

1 **Enabling dynamic modelling of coastal flooding by defining storm** 2 **tide hydrographs**

3 Job C. M. Dullaart¹, Sanne Muis^{1,2}, Hans de Moel¹, Philip J. Ward¹, Dirk Eilander^{1,2}, Jeroen C. J. H.
4 Aerts^{1,2}

- 5 1. Institute for Environmental Studies (IVM), Vrije Universiteit Amsterdam, Amsterdam, The
6 Netherlands
7 2. Deltares, Delft, The Netherlands
8

9 *Correspondence to:* Job C. M. Dullaart (job.dullaart@vu.nl)

10 **Abstract**

11 Coastal flooding is driven by the combination of (high) tide and storm surge, the latter being caused
12 by strong winds and low pressure in tropical and extratropical cyclones. The combination of storm
13 surge and the astronomical tide is defined as the storm tide. To gain understanding into the threat
14 imposed by coastal flooding and to identify areas that are especially at risk, now and in the future, it
15 is crucial to accurately model coastal inundation. Most models used to simulate coastal inundation
16 scale follow a simple planar approach, referred to as bathtub models. The main limitations of this type
17 of models are that they implicitly assume an infinite flood duration and they do not capture relevant
18 physical processes. In this study we develop a method to generate hydrographs called HGRAPHER,
19 and provide a global dataset of storm tide hydrographs based on time-series of storm surges and tides
20 derived with the global tide and surge model (GTSM) forced with the ERA5 reanalysis wind and
21 pressure fields. These hydrographs represent the typical shape of an extreme storm tide at a certain
22 location along the global coastline. We test the sensitivity of the HGRAPHER method with respect to
23 two main assumptions that determine the shape of the hydrograph, namely the surge event sampling
24 threshold and coincidence in time of the surge and tide maxima. The hydrograph dataset can be used
25 to move away from planar to dynamic inundation modelling techniques across different spatial scales.

26 **1 Introduction**

27 Over the course of the 21st century, coastal populations increasingly at risk of flooding due to sea level
28 rise (SLR) (Oppenheimer et al., 2019). In addition, the number of people living in coastal areas below
29 10 m elevation worldwide is projected to increase from over 600 million people today to more than 1
30 billion people by 2050 under all Shared Socioeconomic Pathways scenarios (Merkens et al., 2016),
31 which means that the exposure will increase. Global coastal flood risk assessments can help
32 identifying areas that are potentially exposed to flooding under both current and future climate
33 conditions (Ward et al., 2015). To setup these flood risk assessments, it is important to understand
34 the dynamics of storm surges generated from strong winds and low pressure in tropical (TCs) and
35 extratropical cyclones (ETCs) and how these generate coastal flooding (Resio and Westerink, 2008).
36 Flood models can be used to model these coastal inundation dynamics resulting from extreme storm
37 tides, where the storm tide is defined as the combination of storm surge and the tide (Colle et al.,
38 2010).

39 Coastal inundation models have varying levels of complexity. Global models all follow a simple planar
40 approach (Brown et al., 2018; Dullaart et al., 2021a; Kirezci et al., 2020; Lincke and Hinkel, 2018; Muis
41 et al., 2016). These models, often referred to as bathtub models, assume that any land that is below

42 a specific static water level and that is connected to the sea will be inundated. The main limitation of
43 the planar approach is that it assumes an infinite flood duration (e.g. temporal evolution of a storm
44 surge) and does not capture the physical hydrodynamic processes that drive coastal flooding. This can
45 be partly addressed by accounting for water-level attenuation (Vafeidis et al., 2019; Haer et al., 2018;
46 Tiggeloven et al., 2020). Local to regional-scale models generally apply a (hydro)dynamic modelling
47 approach that captures the physical processes that drive flooding (Lewis et al., 2013; Pasquier et al.,
48 2019; Vousdoukas et al., 2018). Model comparisons at regional scale have shown that in terms of flood
49 extent and depth the dynamic modelling approach is more accurate than the planar approach
50 (Ramirez et al., 2016; Vousdoukas et al., 2016a). Generally, the planar approach overestimates the
51 flood extent due to the assumption that flood propagation is only limited by topography, and that high
52 water levels are maintained for an infinite duration (Stephens et al., 2021). The main reasons for
53 applying the planar approach across different spatial scales, instead of the dynamic approach, are the
54 simplicity of setting up a planar model, low computational costs, and limited requirements for input
55 data.

56 Due to the advances in high-performance computing and the development of reduced-physics
57 dynamic inundation models (Leijnse et al., 2021; Yin et al., 2016; Bates et al., 2010), there is the
58 potential to improve flood mapping across different spatial scales and step away from using the planar
59 approaches for coastal inundation modelling. First applications of dynamic inundation models at
60 continental scale have been published (e.g. Vousdoukas et al., 2016a). However, flood maps are often
61 derived for a specific return period (RP), for example a flood map corresponding to the 1 in 100-year
62 water level. While planar models only need information about the height of the extreme water level,
63 dynamic models also need information about the duration. The temporal evolution of an extreme
64 water level, composed of tide and surge, is referred to as the hydrograph (Chbab, 2015; Sebastian et
65 al., 2014; Salisbury and Hagen, 2007). Throughout this study we use the term hydrograph to refer to
66 the storm tide hydrograph. Hydrograph characteristics that determine the flood severity are, among
67 others, the maximum storm tide level, base duration, and overall shape. For example, when the water
68 level is elevated for a longer period of time, particularly close to the time of high water when defence
69 exceedance is most likely, the water will propagate further inland (Santamaria-Aguilar et al., 2017;
70 Quinn et al., 2014). Currently, a global dataset of hydrographs that can be applied for dynamic
71 inundation modelling for specific RPs is lacking. Vousdoukas et al. (2016) made a first step towards
72 dynamic inundation modelling at the continental-scale for Europe. In this study, the temporal
73 evolution of extreme water levels is incorporated by the use of a generic empirical formulation. The
74 surge hydrograph is assumed to be an isosceles triangle with a duration based on a linear fit
75 relationship between modelled surge heights and the half event duration. In reality the rising and
76 falling limb of the surge hydrograph can have a distinct shape that have different durations, and varies
77 from location to location (MacPherson et al., 2019). The tidal component in Vousdoukas et al., (2016)
78 is represented by taking the highest tidal level from a 10-year simulation. Instead, a time-varying value
79 could be used to include tidal variation, including the spring-neap cycle, in a more accurate way. While
80 some advances have been made in modelling storm tide hydrographs, the current understanding of
81 the temporal evolution of sea levels during extremes is limited.

82 The aim of this study is to address this research gap by developing and applying a globally-applicable
83 method (HGRAPHER) to generate hydrographs. In doing so, we pave the way for coastal flood mapping
84 using dynamic models across different spatial scales. First, we review the various methods available
85 to define a hydrograph and their main assumptions. Second, building on existing literature, we present
86 the open-source HGRAPHER method with a global dataset of hydrographs for 23,226 locations along
87 the world's coastline. As input, we use 38 years of storm surge and tide simulations (1979-2018)
88 derived with the Global Tide and Surge Model (GTSM) forced with the ERA5 climate reanalysis (Muis

89 et al., 2020). Third, the sensitivity of the HGRAPHER method is tested with respect to two main
90 assumptions that determine the shape of the hydrograph, namely: 1) using normal high tide or spring
91 tide; and 2) the coincidence of the surge and tide maximum or a time offset between the two
92 maximums. Last, we discuss the limitations of our methodology and ways forward.


93 2 Available methods to generate hydrographs

94 In this section we give an overview of four hydrograph generating methods. The reason for including
 95 these studies on hydrographs in this review, from the wide variety of studies that exists on this topic
 96 (e.g. Sebastian et al., 2014; Chbab, 2015; Environment Agency, 2018; MacPherson et al., 2019;
 97 Vousdoukas et al., 2016a; Xu and Huang, 2014; Salisbury and Hagen, 2007), is that they all have a
 98 clearly distinct methodology. Based on this review, we can select the hydrograph generating method
 99 that best fits our study goals. All four methods use multi-year water level time series from tide gauge
 100 stations or model simulations as input, but they differ in terms of input parameter used, the way the
 101 surge hydrograph is computed, and how tide and surge levels are combined. Table 1 summarizes the
 102 main characteristics of the four methods.

103 **Table 1:** Main characteristics of four hydrograph methods

study	study area	hydrograph method		
		input parameter	surge hydrograph	combine tide and surge
Chbab, 2015	Dutch coast	surge residual	averaging	linearly
Environment Agency, 2018	United Kingdom coast	skew surge	fit distribution	joint probability method
MacPherson et al., 2019	German Baltic Sea coast	storm tide	parametric	not required
Vousdoukas et al., 2016	European coast	surge and wave setup	best linear fit relationship	constant value for tide

104
 105 The first method by Chbab (2015) starts by computing the residual water level. The surge residual is
 106 the difference between the predicted tide and the storm tide level (*Fig. 1*). Predicted tides are
 107 estimated by harmonic analyses to determine the amplitude and phase of the different tidal
 108 constituents. To define the surge hydrograph, events are selected from the residual time series by
 109 means of the Peaks-Over-Threshold (POT) method using 1.5 m as a threshold. A 48-hour time window
 110 lasting from 24 hours before until 24 hours after the surge maximum is extracted. The final step to
 111 obtain the surge hydrograph is normalizing and averaging all 48-hour time series of surge levels. To
 112 test the sensitivity of the surge hydrograph to the chosen parameters, a sensitivity analysis is
 113 performed. They conclude that the upper 50% of the normalized surge height (normalized surge
 114 height > 0.5) is not affected when either the threshold or time window length is increased or
 115 decreased. This is an important finding because it indicates that the surge hydrograph is most robust
 116 close to the time of high water when defence exceedance is most likely (Santamaria-Aguilar et al.,
 117 2017; Quinn et al., 2014). However, a longer time window (of e.g. 72 or 96 hours) results in a longer
 118 base duration. The argument given for using a 48-hour time window is that 48 hours is the typical
 119 duration of a storm along the Dutch coastline. The surge hydrograph is added linearly to the average
 120 tidal cycle where the surge maximum is assumed to coincide with the tide maximum. To generate a
 121 hydrograph corresponding to a specific RP, the unitless surge hydrograph is scaled to a certain water
 122 level. For example, if the average maximum tide is 1 metre and the 100-year storm tide is 3 metres,
 123 the surge hydrograph is multiplied by 2. In areas with a large tidal range and a wide and shallow
 124 continental shelf, tide-surge interaction may induce a time offset between the two maxima (*Fig. 1*).
 125 For example, in the North Sea the surge maximum generally occurs 2.5 hours before the tidal
 126 maximum (Chbab, 2015; Horsburgh and Wilson, 2007). This is because a storm surge increases the
 127 depth and thereby modulates the influence of bottom friction and the speed of the tidal wave (Pugh,
 128 1996; Rego and Li, 2010). The time offset can be taken into account by computing the time offset
 129 between the surge and tidal maxima for all surge events above the POT 99th percentile (POT99).
 130 Subsequently, the average offset is used to shift the surge time series relative to the tidal maximum.

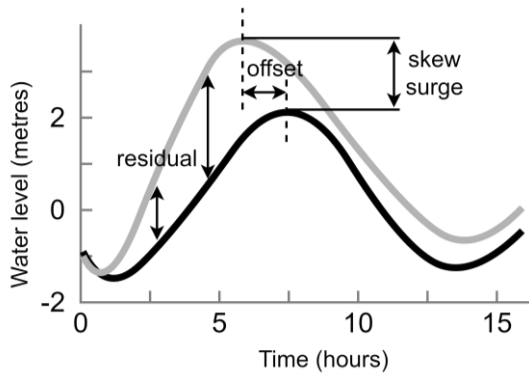

131

Figure 1: schematic of the residual, offset, and skew surge. Time series of the tide (grey line), and the tide including meteorological effects (black line) are shown.

132 The second method, developed by the U.K. Environment Agency (2018) starts by computing the skew
 133 surge. Skew surge (Fig. 1) refers to the difference between the maximum storm tide level and
 134 maximum tidal level within a tidal cycle, irrespective of their timing (Williams et al., 2016). An
 135 important reason for using skew surge instead of the surge residual is that the latter can arise due to
 136 tide-surge interaction (Idier et al., 2019). In contrast to the surge residual, for the skew surge there is
 137 no need to account for timing offsets, apart from some locations where a dependency between skew
 138 surge and high tidal levels is observed (Santamaria-Aguilar and Vafeidis, 2018). To generate the skew
 139 surge hydrograph, the 15 most extreme skew surges are selected. An argument for selecting this
 140 number of events is not given. Both the high and low water skew surge values are extracted for each
 141 storm event. Subsequently, the high and low water skew surge values are interpolated to a 15-minute
 142 timeseries and normalized. Then, the duration of each of the 15 surges at particular percentiles (i.e.
 143 10%, 20% and so on) are calculated. The maximum duration at each percentile is used to compute the
 144 skew surge hydrograph. The study by U.K. Environment Agency does not combine the skew surge
 145 hydrograph with tidal level time series.

146 The third method by MacPherson et al. (2019), that further developed the method from Wahl et al.
 147 (2011, 2012), starts by identifying storm tide events. To do this, a POT method is used. Using POT is
 148 preferred over annual maxima because the number of events extracted is typically higher with POT
 149 resulting in a more robust representation of the local storm tide characteristics in the hydrograph.
 150 Then, each event is characterized through a parameterization scheme. A total of 17 parameters are
 151 calculated such as peak water level, event duration, and the flow (rising limb) and ebb (falling limb)
 152 curve shape. Subsequently, synthetic hydrographs are generated through Monte Carlo simulations
 153 using the obtained parameters. This means that for a single return period multiple storm tide
 154 hydrographs are available with different shapes but the same maximum water level.

155 The fourth method by Vousdoukas et al. (2016) starts by computing the high tide water level (HTWL).
 156 The HTWL is calculated as a constant water level that consists of the mean sea level (MSL) and the
 157 maximum tide elevation taken from a 10-year time series. The assumption that the maximum high
 158 tidal level occurs along the entire duration of the event, thereby neglecting tidal variations, can
 159 significantly overestimate the water level in places with large tidal variability, such as north-western
 160 Australia. The HTWL is then combined with time-varying storm surge levels and wave setup to obtain
 161 total water levels. Time series of storm surge levels (1979-2014) are taken from Vousdoukas et al.
 162 (2016b) and wave setup is approximated by 20% of the significant wave height, both based on the
 163 ERA-Interim global climate reanalysis (Dee et al., 2011). To obtain information about the temporal
 164 evolution of an extreme event, extreme events are identified in the available time series of surge and

165 wave setup. For each identified event the duration and peak water level are extracted. Subsequently,
166 a best linear fit relationship between the duration and peak water level is estimated. To conclude, the
167 combined hydrograph consists of the HTWL combined with a symmetric triangle shaped time series
168 on top of it representing the surge and wave setup for a certain return period.

169 Comparing the four methods, we find that the hydrograph generating methods that are developed for
170 application at smaller scales are tailored towards the local water level characteristics. This makes them
171 less suitable for application at larger scales. For example, in the study by Chbab (2015) a threshold of
172 0.5 m is used to identify extreme surge events in time series. However, at the global scale surge levels
173 exceeding 0.5 m do not occur in some regions such as the south of the Caribbean. The hydrograph
174 generating method developed by U.K. Environment Agency (2018) is developed for regions that
175 experience a substantial tidal range such as the U.K., as it is based on skew surge values. However, the
176 complete global coastline does not experience such high tides. In addition, MacPherson et al., (2019)
177 developed a method that is applicable in areas with a small tidal range, making it well suited for the
178 German Baltic Sea coast and larger scales such as the entire Baltic Sea, but inapplicable at continental
179 to global scales. The last study that we discussed (Vousdoukas et al., 2016a) takes a more simple
180 approach to define hydrographs for continental Europe. The tidal component is represented by a
181 constant value and is combined with a triangle shaped time-varying storm surge. Overall, the study by
182 Vousdoukas et al. (2016a) is a step towards modelling inundation at larger scales using hydrographs.
183 However, substantial improvements can be made to the hydrograph generating method. To this end,
184 we will build on Chbab (2015) because, most importantly, the method used in this study does take a
185 time-varying surge and tide component into account. In addition, instead of representing the surge by
186 a triangle shape in the combined hydrograph like Vousdoukas et al. (2016a), the method from Chbab
187 (2015) allows the rising and falling limb of the hydrograph to have different shapes. This results in a
188 more accurate representation of the shape of the storm surge in the combined hydrograph. It is
189 especially important that the hydrograph represents the water level correctly close to high water
190 when defence exceedance is most likely, and because the water will propagate further inland if the
191 water level is elevated for a longer period of time (Santamaria-Aguilar et al., 2017; Quinn et al., 2014).

192 3 Methods

193 Figure 1 summarizes the main steps of the HGRAPHER hydrograph generating model. Storm tide
 194 levels, tidal time series, and storm tide RPs are used as input. First, extreme events are identified in
 195 the surge time series and used to compute a normalized surge hydrograph. Second, the average tide
 196 signal is computed from the tidal time series, Third, the hydrograph is generated by combining the
 197 average tide signal with the normalized surge hydrograph. To create the final hydrograph, this generic
 198 shape is scaled to an absolute water level height for specific RPs based on the COAST-RP dataset
 199 (Dullaart et al., 2021b).

200 3.1 Input data

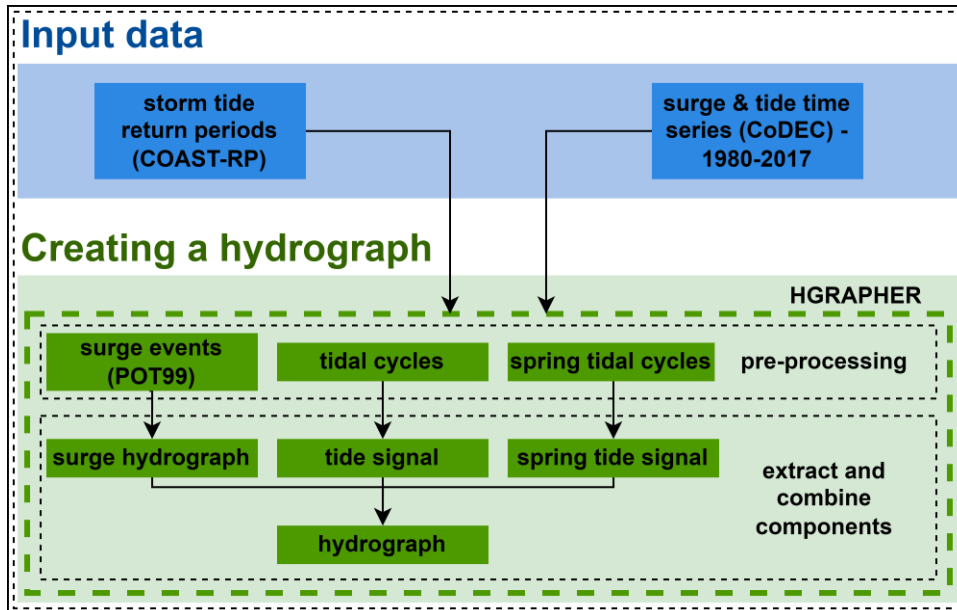


Figure 2: Modelling framework

201 Time series of storm tides (1980-2017) at a 10-minute interval from 23,226 output locations are taken
 202 from the CoDEC-ERA5 dataset (Muis et al., 2020). The CoDEC-ERA5 dataset was generated by forcing
 203 the 2D depth-averaged hydrodynamic Global Tide and Surge Model (GTSM) with wind and pressure
 204 fields from the ERA5 climate reanalysis (Hersbach et al., 2019). GTSM forced with ERA5 has shown to
 205 accurately simulate maximum surge heights of historical TC and ETC events (Dullaart et al., 2020). In
 206 addition, a comparison between modelled and observed annual maxima, showed a mean bias of -0.04
 207 m (with a standard deviation of 0.32 m) (Muis et al., 2020). Overall, the time series of surge and tidal
 208 levels from the CoDEC-ERA5 dataset are of good quality and therefore valid input data to HGRAPHER.
 209 The surge time series are computed as the difference between a storm tide simulation and a tide-only
 210 simulation. As a result, the surge time series include non-linear tide-surge interaction effects
 211 (Horsburgh and Wilson, 2007). The output locations are located at every 50 km along the coastline. In
 212 addition, the locations of tide gauge stations are included. In order to scale the hydrograph to a storm
 213 tide level that corresponds with a certain RP, we use storm tide RPs from the global COAST-RP dataset
 214 (Dullaart et al., 2021b). In contrast to other global storm tide RP datasets, COAST-RP explicitly takes
 215 into account low-probability high impact TCs (Dullaart et al., 2021a) by making use of 3,000 years of
 216 synthetic TC tracks from the STORM dataset (Bloemendaal et al., 2019).

217 3.2 Creating a hydrograph

218 3.2.1 Surge hydrograph

219 The following procedure is used for each of the 23,226 output locations individually. To generate a
 220 hydrograph of the surge, we start with extracting independent extremes from the surge time series
 221 based on the Peaks-Over-Threshold (POT) method. Using the POT method for selecting extremes is
 222 preferred over annual maxima as the latter could result in excluding extreme events that happened in
 223 the same year. We use the 99th percentile over the complete time series as threshold and we select
 224 peaks that are at least 72 hours apart to ensure independent events (Wahl et al., 2017; Vousdoukas
 225 et al., 2016b; Haigh et al., 2016). The threshold results in the selection of on average 1 surge event per
 226 year and 40 events over the full time series. Setting the threshold is a trade-off between having an
 227 event set of sufficient size to compute a representative average shape without including too many
 228 relatively small surge events that would too strongly affect the resulting shape (see section 4.4). For
 229 each selected surge event, we first extract the time series from 36 hours before, until 36 hours after
 230 the peak (Fig. 3a). Second, each 72-hour surge event is normalized (i.e. dividing each surge level by
 231 the peak) such that the maximum surge value is equal to 1 (unitless). Third, we combine the selected
 232 surge events to calculate the average surge hydrograph. This is done by determining the time (relative
 233 to the peak) at which a specific surge height (from 0 to 1 with increments of 0.01) is exceeded. As an
 234 example, in Fig. 3a we show that for one surge event the exceedance time at a normalized surge height
 235 of 0.25 is 14.0 hours before and 26.0 hours (16.0 + 10.0) after the surge maximum occurred as
 236 indicated by the black arrows. Then, for each normalized surge height the average exceedance time is
 237 computed, similar to Chbab (2015), resulting in an average curve. Because the shape of the rising and
 238 falling limb of the surge can differ, the exceedance time is calculated separately for each, and they are
 239 subsequently merged into the final average surge hydrograph.

240 241 3.2.2 Average and spring tide signal

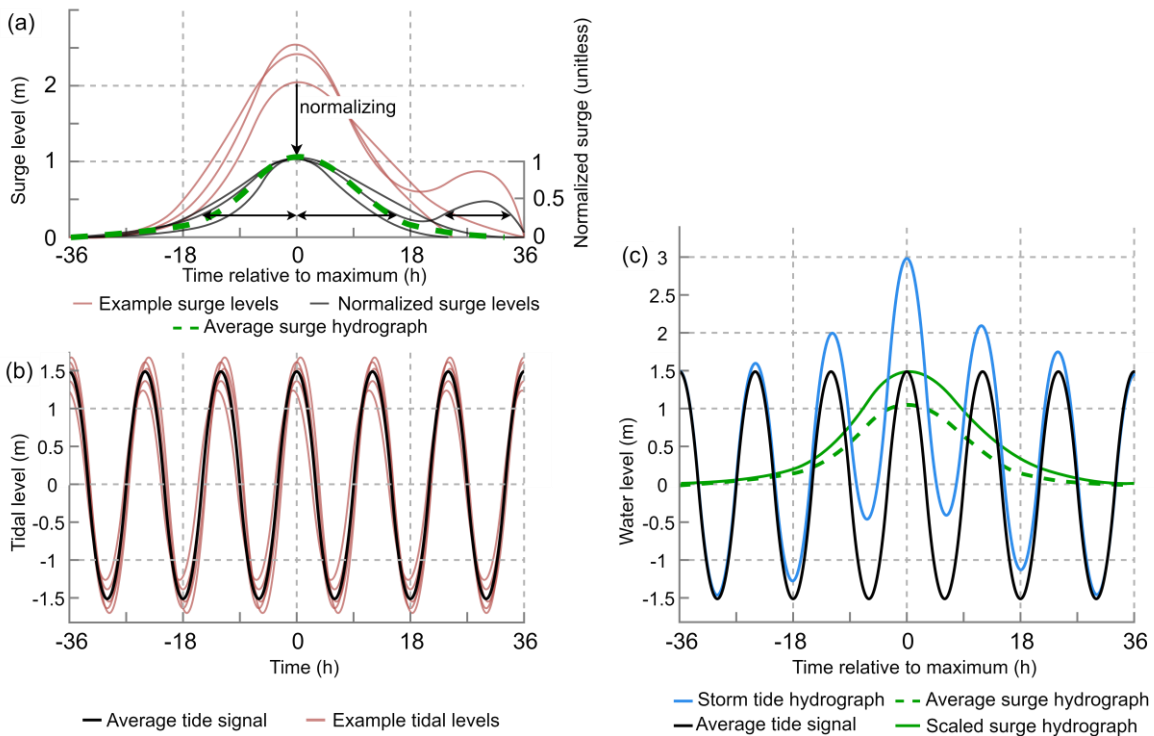


Figure 3: Visualization of the steps leading to the storm tide hydrograph of a hypothetical 1-in-100 year event of 3.0 m with the a) surge hydrograph, where the black arrows indicates the period over which a normalized surge height of 0.25 is exceeded. Note that for the falling limb we take the sum of the two time periods for which this is the case; b) average tide signal, and c) storm tide hydrograph. The average surge hydrograph is scaled to 1.5 m such that the combined water level equals the 1-in-100 year storm tide level of 3.0 m.

242 Next, we combine the surge hydrograph with the average tide signal (*Fig. 3b*). To create a curve
243 representing the average tide signal we take three steps. First, we split the tidal series from the period
244 1980-2017 up into segments that are each 24 hours and 50 minutes long. The start and end times of
245 the tidal cycles are selected from the tide time series by searching for a minimum around 24h and 50
246 minutes after the previous low tide. The segment length is based on the phase of the M2 tidal
247 component which is equal to a lunar day (24 hours and 50 minutes). At most locations around the
248 world the M2 is the main tidal component. Second, we compute the mean over all tidal segments to
249 obtain the average tide segment. Third, we duplicate the average tide segment to obtain a longer tidal
250 time series to which we refer as the average tide signal.

251 In addition, we extract the spring tide signal because a storm surge event happening at spring tide can
252 result in a very different shape of the hydrograph. The spring-neap tide cycle takes two weeks. To
253 extract the average spring tide signal, we first search for the highest tide every two weeks. Second,
254 we select 72 hours of the tidal time series before and after the spring tide maximum. This procedure
255 is repeated for the available time series of the tide (1980-2017), after which we compute the mean
256 over all spring tides to extract the average spring tide signal.

257 3.2.3 Storm tide hydrograph

258 The surge hydrograph is combined with the average tide or spring tide to create a storm tide
259 hydrograph (*Fig. 3c*). In theory the surge maximum can coincide with any tide. However, in shallow
260 regions the timing will be influenced by interaction effects between the surge and the tide which
261 results in a phase difference. This is for example the case in the North Sea where the tidal wave will
262 start travelling faster under storm conditions due to the increased water level which reduces the
263 bottom friction (Horsburgh and Wilson, 2007; Resio and Westerink, 2008). To determine whether a
264 typical time offset between the surge and tide should be taken into account, we extract the
265 distribution of the timing offset between the surge and tidal maximum during the most extreme surge
266 events (POT99). For most locations around the globe, the distribution of the timing offset does not
267 show a clear signal (see section 4.4). Therefore, we assume that the surge and tidal maximum coincide.
268 With HGRAPHER a hydrograph can be generated for a total water level of interest. In this study we
269 use storm tide levels corresponding to a 100-year return period (RP100) because this is an often-used
270 coastal protection standard (Lamb et al., 2018; FEMA, 1968). If, for example, the RP100 storm tide
271 level is 3.0 meters and the average high tide is 1.5 meter this means the unitless average surge
272 hydrograph has to be scaled up to 1.5 meters, such that maximum surge plus the maximum tide is
273 equal to 3.0 meters (*Fig. 3c*).

274 4 Results

275 4.1 Storm surge hydrographs

276 For each output location from the CoDEC-ERA5 dataset, a surge hydrograph is generated. For
 277 illustration, results are shown for La Rochelle in France and Marco Island in the United States (*Fig. 4a*
 278 & *4b*). We find a storm surge duration (i.e. the time over which the normalized surge height is above
 279 zero) of 54 hours in La Rochelle and 42 hours in Marco Island. Other studies find comparable storm
 280 surge durations of 40 hours for Hoek van Holland and 45 hours for Den Helder in The Netherlands
 281 (Chbab, 2015), and between 40 and 70 hours for the German Baltic Sea coast (MacPherson et al.,
 282 2019). The difference in storm surge duration between La Rochelle and Marco Island is likely caused
 283 by the different type of storms occurring in these regions. TCs can cause a fast shift from onshore to
 284 offshore winds when making landfall, which results in the surge becoming negative in just a couple of
 285 hours. Hurricane Irma is an example of a TC that made landfall near Marco Island and caused such a
 286 fast shift in surge levels. The normalized surge level time series have a strong irregular behaviour. This
 287 originates from the fact that the surge time series are obtained by subtracting tide-only simulations
 288 from a total water level simulations (including tidal and meteorological forcing). Therefore, the surge
 289 time series are the residual water level that include tide-surge interaction effects, and we believe this

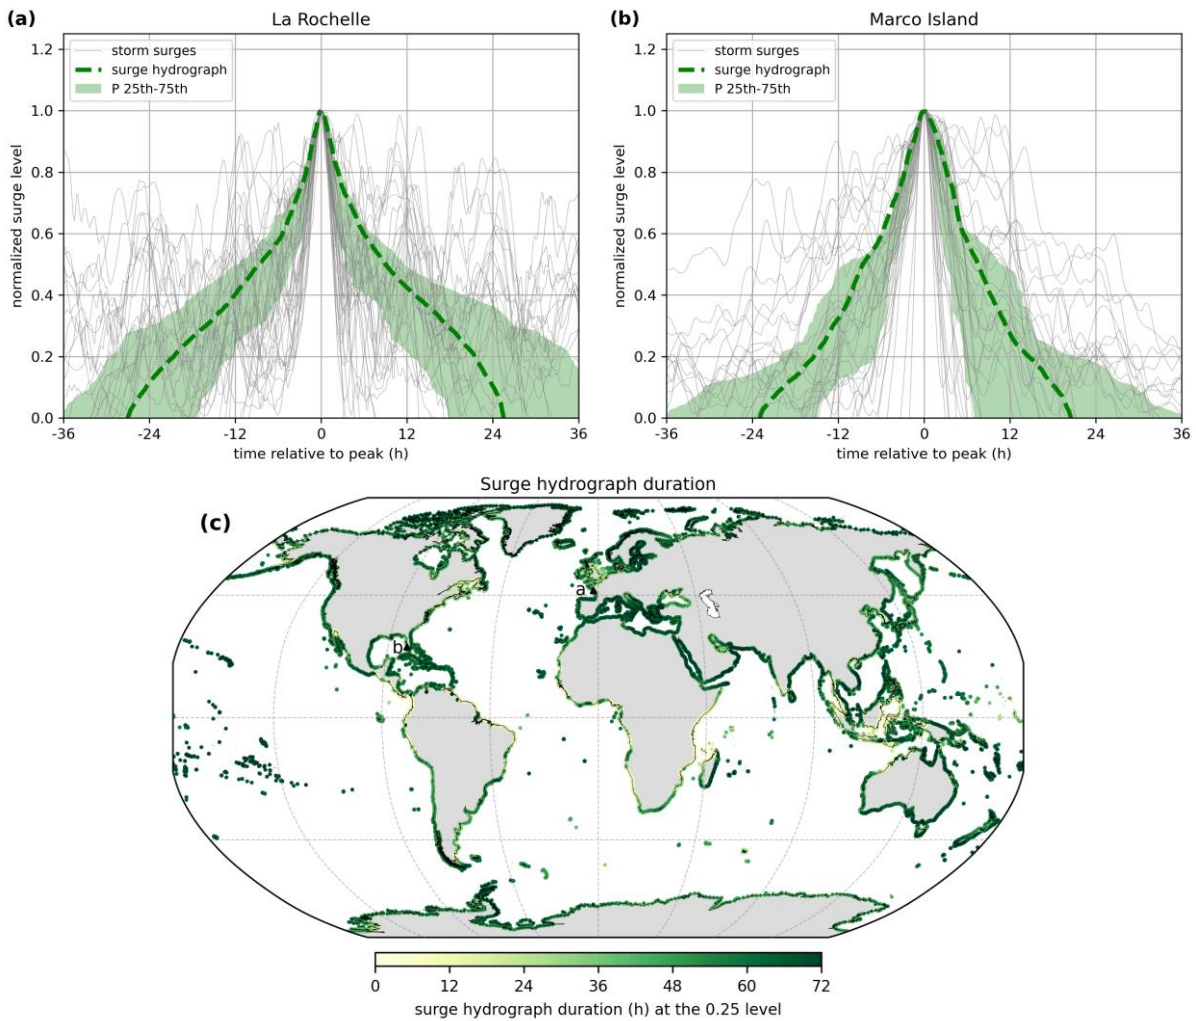


Figure 4: Surge hydrograph (dashed green line) for a) La Rochelle and b) Marco Island. Normalized surge levels are shown in grey and the green shaded area represents the 25th – 75th percentile. Panel c) shows the surge hydrograph duration at 0.25, with the locations of La Rochelle and Marco Island indicated by a and b, respectively.

290 partly explains the irregular behaviour. Differences in the evolution of storms over time can also
 291 contribute to the variability observed at the different time steps of the normalized surge levels,
 292 particularly in areas that are affected by TCs and ETCs as the characteristics of the two types of storms
 293 differ considerably (Domingues et al., 2019). In addition, not all 40 events are extreme over their
 294 complete lifetime, which means that noise is affecting the lower ends of the hydrograph. Taking the
 295 mean over the normalized surge heights removes this irregular shape. At the global scale a distinct
 296 pattern shows up in certain regions (*Fig. 4c*). In Europe for example, the average storm surge duration
 297 is substantially lower in the North Sea compared to the Atlantic coastline and the Baltic Sea. Last, we
 298 computed the difference in surge hydrograph duration between the 25th and 75th percentile at a
 299 normalized surge height of 0.75 (*App. Fig. A1*). This can provide some insights in the variability of flood
 300 duration, assuming that inundation might start to occur around the 0.75 normalized surge height.

301 4.2 Average (spring) tide signal

302 For each output location the average and spring tide signal are computed. Although the tidal range at
 303 La Rochelle is substantially larger than at Marco Island, the general shape of the average tide signal is
 304 comparable (*Fig. 5a & 5b*). Both locations show a large variation in amplitude between tidal cycles.
 305 For spring tide, the variation in the tidal amplitude between the tidal cycles is smaller. Note that the

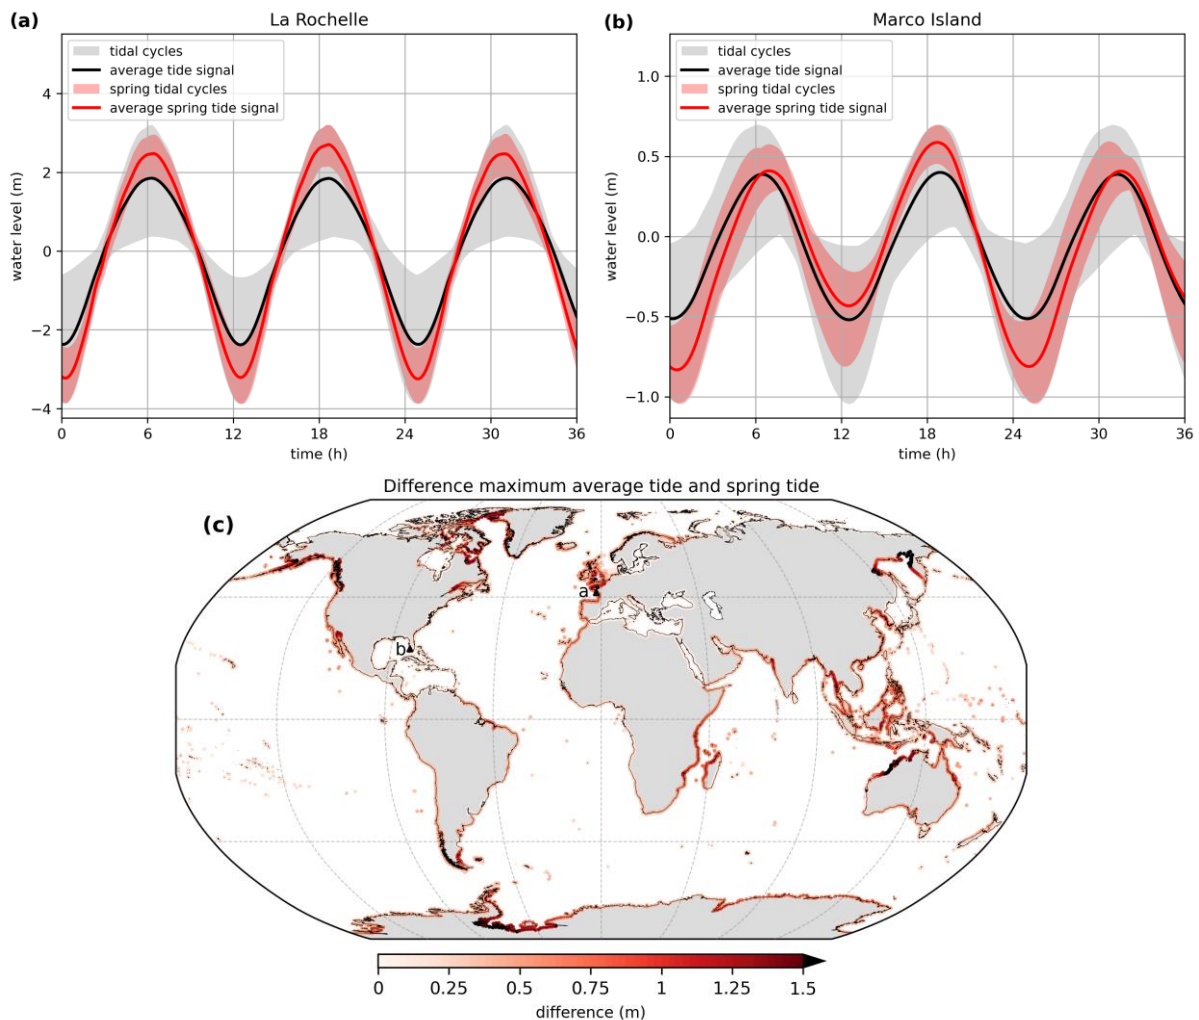


Figure 5: Average tide signal (black line) for a) La Rochelle and b) Marco Island. The grey shaded area shows the range of all tidal cycles. The average spring tide signal is shown in red and the red shaded area indicate all tidal cycles that are used to compute the average spring tide signal. Panel c) shows the absolute difference between the maximum average tide signal and average spring tide signal. The location of La Rochelle and Marco Island are indicated by the letters a and b, respectively.

306 grey shaded area exceeds the red shaded area at both locations during the first and third high tide
307 because the average spring tide signal is computed by taking the average over a two week period,
308 while the average tide signal is computed by taking the average over the daily tidal cycle of 24 hours
309 and 50 minutes. Furthermore, the duration of the first and second high and low tide cycle of a tidal
310 day differs at Marco Island. This is caused by the type of tide at this location which is a mixed
311 semidiurnal tide (i.e. a tidal regime with two high and low tides per tidal day of different size) (Song
312 et al., 2011). Computing the average tide signal can be difficult at locations with a very small tidal
313 amplitude and mixed semidiurnal tide such as Montevideo (*Fig. A1*). Because of the large number of
314 shapes that the tidal cycles can have here, taking the average will not completely represent all possible
315 shapes. However, because the average high tide values are correctly represented by the average
316 (spring) tide signal, the findings are not affected to a large extent. For La Rochelle the maximum
317 average tide signal increases 46% from 1.85 m based on all tidal cycles to 2.70 m when taking the
318 average of the spring tidal cycles. In Marco Island the maximum average tide signal is 0.40 m and the
319 maximum average spring tide is 0.59 m (+48%). The larger absolute difference in La Rochelle means
320 that for an extreme storm tide to occur the timing of the surge maximum relative to the (spring) tide
321 maximum is more important compared to Marco Island. When applying HGRAPHER, it is important to
322 understand the typical characteristics of a storm tide in the area of interest, because this information
323 is needed to choose between the average and spring tide signal. For example, in northwest Australia
324 the difference between the maximum average and spring tide signal exceeds 1.5 m (*Fig. 5c*), indicating
325 that in this region an extreme storm tide is much more likely to occur during spring tide. Therefore,
326 using the average spring tide signal should be considered. At the global scale, the difference between
327 the average and spring tide signal maxima exceeds 0.5 m and 1.0 m, at 24% and 3% of all output
328 locations, respectively.

329 4.3 Storm tide hydrographs

330 The surge hydrograph is scaled up to a certain water level and combined with the average tide signal
 331 to obtain the storm tide hydrograph (Fig. 6a and 6b) that corresponds to the 1-in-100 year (RP100)
 332 storm tide level from the COAST-RP dataset (Dullaart et al., 2021b). In La Rochelle the RP100 storm
 333 tide level is 3.76 m and the average high tide is 1.85 m. Therefore, the unitless surge hydrograph is
 334 scaled up to 1.91 m, such that the combined water level equals the RP100 storm tide level. At Marco
 335 Island the RP100 storm tide level is 2.18 m to which the tide contributes 0.40 meter and the surge
 336 1.78 meter, respectively. From the RP100 storm tide hydrograph that we create globally it is possible
 337 to deduce the relative contribution of the surge (Fig. 6c). Especially in areas where the maximum
 338 spring tide signal substantially exceeds (>0.5 m) the maximum average tide signal the surge
 339 contribution might be too large compared to observed historical events. This effect is counteracted
 340 by the assumption that the surge and tide coincide in time. As a result, a smaller surge is sufficient
 341 to get to the desired RP100 storm tide level compared to the situation where a time offset is
 342 implemented to combine the average tide signal with the scaled surge hydrograph. Last, the surge
 343 hydrographs are based on the surge residual including tide-surge interaction effects. These interaction
 344 effects tend to be positive at low tide and negative at high tide (Horsburgh and Wilson, 2007). As a
 345 result, we might overestimate the contribution of the surge to the combined hydrograph at high tide.

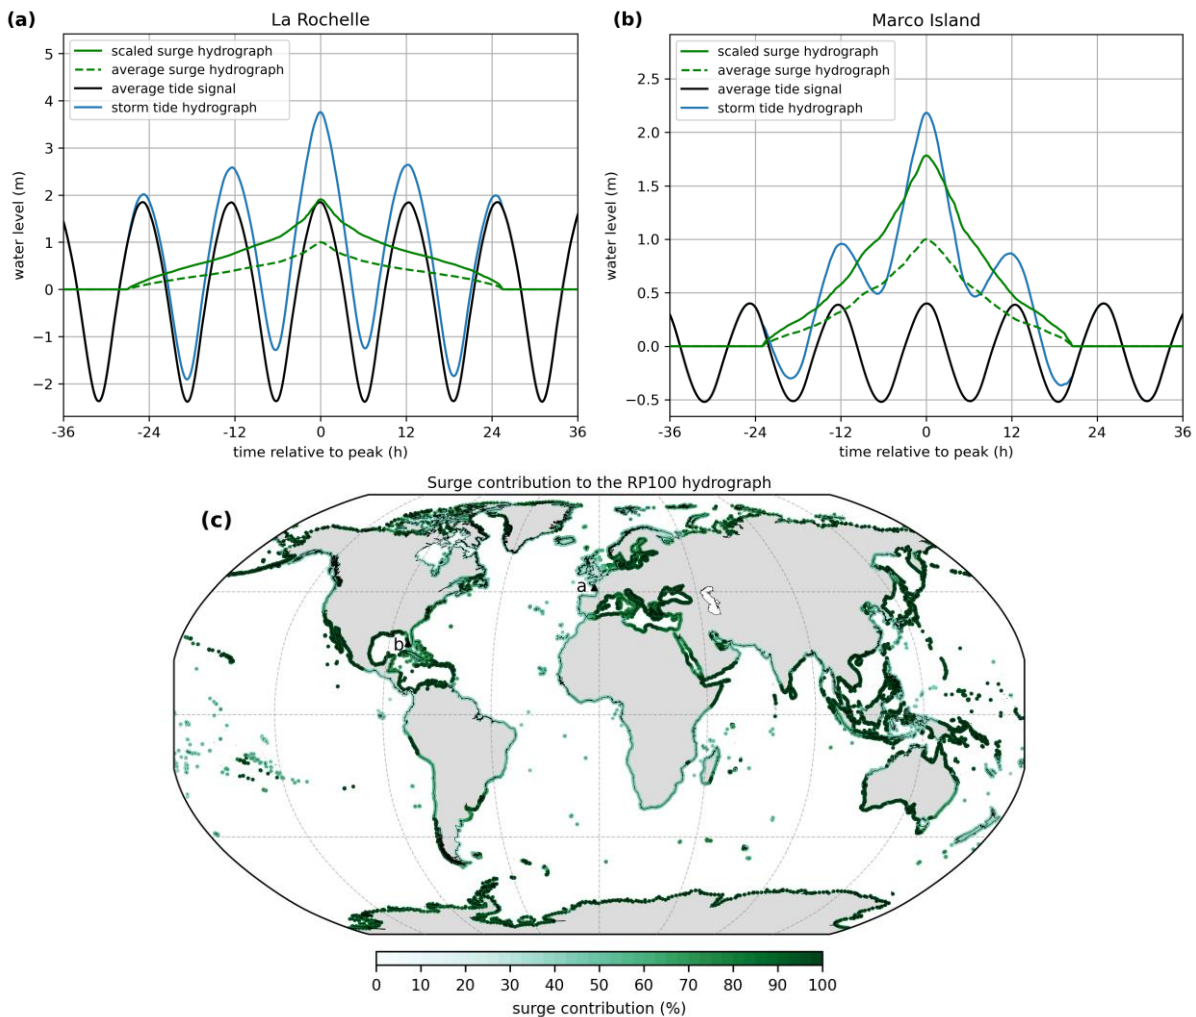


Figure 6: RP100 storm tide hydrograph (blue line) for a) La Rochelle and b) Marco Island. The average tide signal (black line), average surge hydrograph (green line), and scaled surge hydrograph (dashed green line) are also shown. Panel c) shows the relative contribution of the surge to the RP100 storm tide hydrograph maximum as a percentage. The locations of La Rochelle and Marco Island are indicated by the letters a and b, respectively.

346 4.4 Assumptions underlying the hydrograph

347 HGRAPHER is based on certain assumptions to create the storm tide hydrographs. Here, we aim to
 348 better understand how these assumptions influence the results. First, we assume that the POT99
 349 threshold results in the selection of a set of surge events from the residual time series that represents
 350 the typical evolution of a surge event at any location. However, using a higher or lower POT percentile
 351 to select surge events will give different results, depending on the typical characteristics of a location.
 352 We illustrate this using La Rochelle and Marco Island as an example. Using a higher (POT99.5) or lower
 353 (POT98) POT percentile does not result in a clearly deviating surge hydrograph at La Rochelle (*Fig. 7a*).
 354 At Marco Island however (*Fig. 7b*), a clear difference can be observed between the surge hydrographs.
 355 Using the higher POT99.5 percentile (i.e. only using the ~20 most extreme surge events) results in a
 356 hydrograph that is more narrow and has a shorter duration. This is most likely caused by the different
 357 types of storms that occur at Marco Island. Using a higher POT percentile as threshold will result in an
 358 event set with a relatively larger share of TCs, compared to ETCs. This indicates that surge events
 359 caused by TCs are typically shorter compared to ETC-related surge events at Marco Island. Wahl et al.
 360 (2011) also showed that the peak of the surge hydrograph can show a dependency to the intensity of
 361 the underlying surge events. At the global scale, it can be observed that the surge hydrograph duration

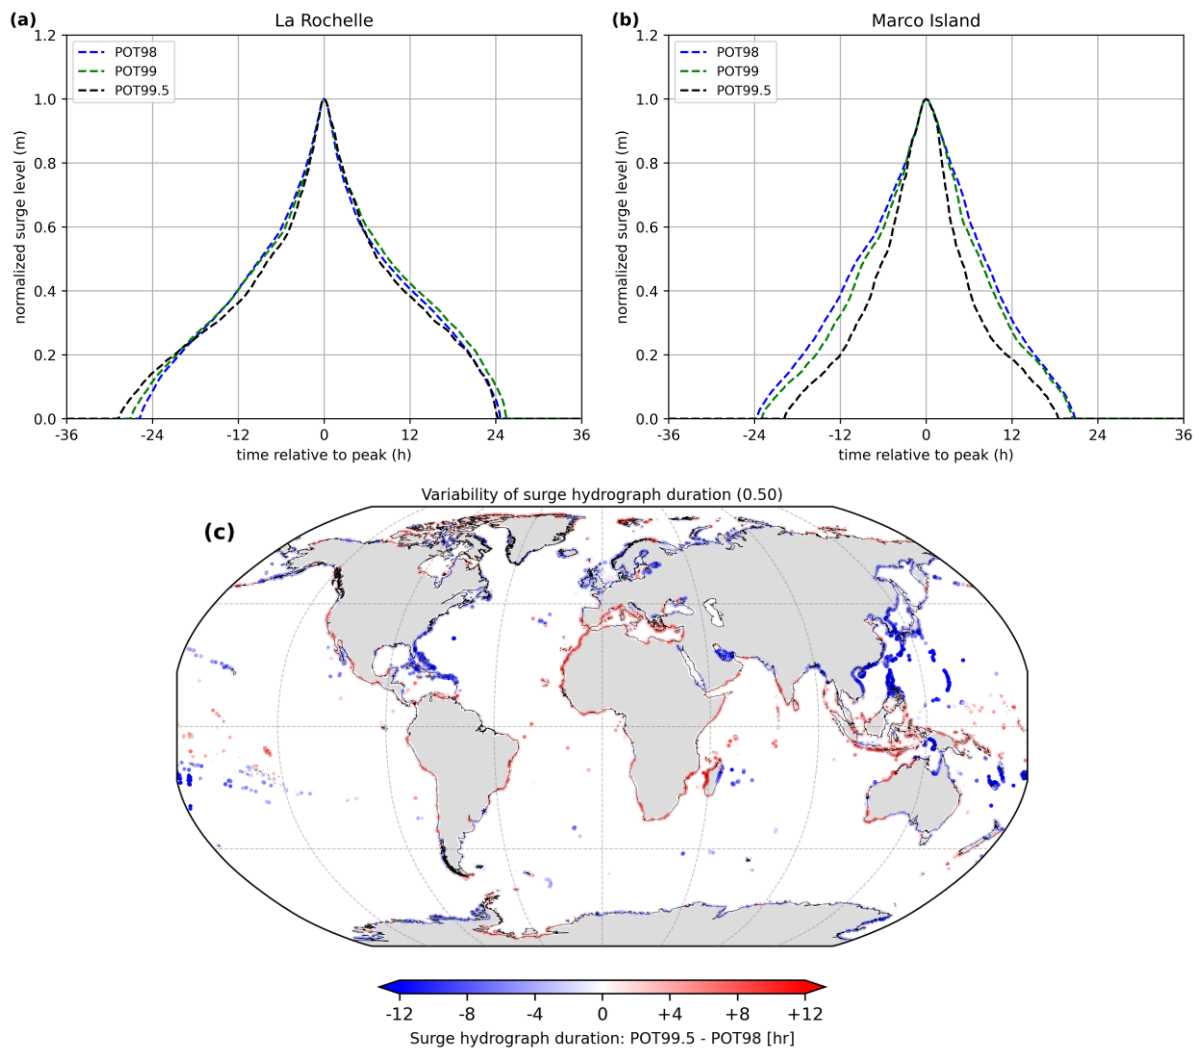


Figure 7: POT99 surge hydrograph (dashed green line) for a) La Rochelle and b) Marco Island. The blue and black dotted lines show the average surge hydrograph based on the surge events that exceed the POT98 and POT99.5 percentile. Panel c) displays the difference in surge hydrograph duration in hours at a normalized surge level of 0.5, computed as POT99.5 minus POT98.

362 (at the unitless 0.5 level) is typically shorter in the Caribbean and northwest Pacific Ocean when only
363 using the more extreme surge events (i.e. POT99.5 relative to POT98) for generating a surge
364 hydrograph (*Fig. 7c*). Outside TC prone areas the variability in surge hydrograph duration, either
365 positive or negative, is less pronounced. Overall, to select the best POT percentile to generate the
366 surge hydrograph, knowledge about the local conditions is required. For example, if surge events
367 happen very infrequently (i.e. less than once per year) a percentile higher than POT99 should be used.
368 Correspondingly, in areas where TCs occur such a higher POT percentile should be chosen if the
369 research focusses on TCs. For this, knowledge about the number of historical TC storm surge events is
370 required. Conversely, if the goal is to create a RP1 storm tide hydrograph a lower POT percentile is
371 warranted compared to when one is interested in the RP100 storm tide hydrograph.

372 Second, when combining the surge hydrograph with the average tide signal we assume that the
373 maxima of the two coincide in time. Including a time offset will lead to a storm tide hydrograph of
374 which the water level is elevated over a longer period of time, potentially increasing the severity of a
375 flood event. To test this assumption we compute the time offset at La Rochelle and Marco Island (*Fig.*
376 *8a & 8b*), which is defined as the timing of the maximum storm tide relative to astronomical high tide
377 (*Fig. 1*). What can be observed at both output locations is that the distribution is centred around zero.
378 However, at Marco Island the distribution is more spread out, indicated by a standard deviation of
379 0.68 compared to 0.13 for La Rochelle. At the global scale, large mean absolute time offsets are
380 observed in areas with either a very small tidal range, such as the Baltic Sea and the Mediterranean
381 Sea, or a diurnal tide regime in combination with large TC induced storm surges, such as the Gulf of
382 Mexico (*Fig. 8c*). We show the absolute time offset instead of the actual values because this way all
383 areas where large time offsets occur are revealed, including areas with both positive and negative
384 time offsets. The globally averaged absolute mean offset is 33 minutes, and the median is 9 minutes.
385 To conclude, the assumption that the surge and tide maxima coincide is appropriate at most output
386 locations. However, at certain locations it should be considered to include a time offset when creating
387 a storm tide hydrograph.

388

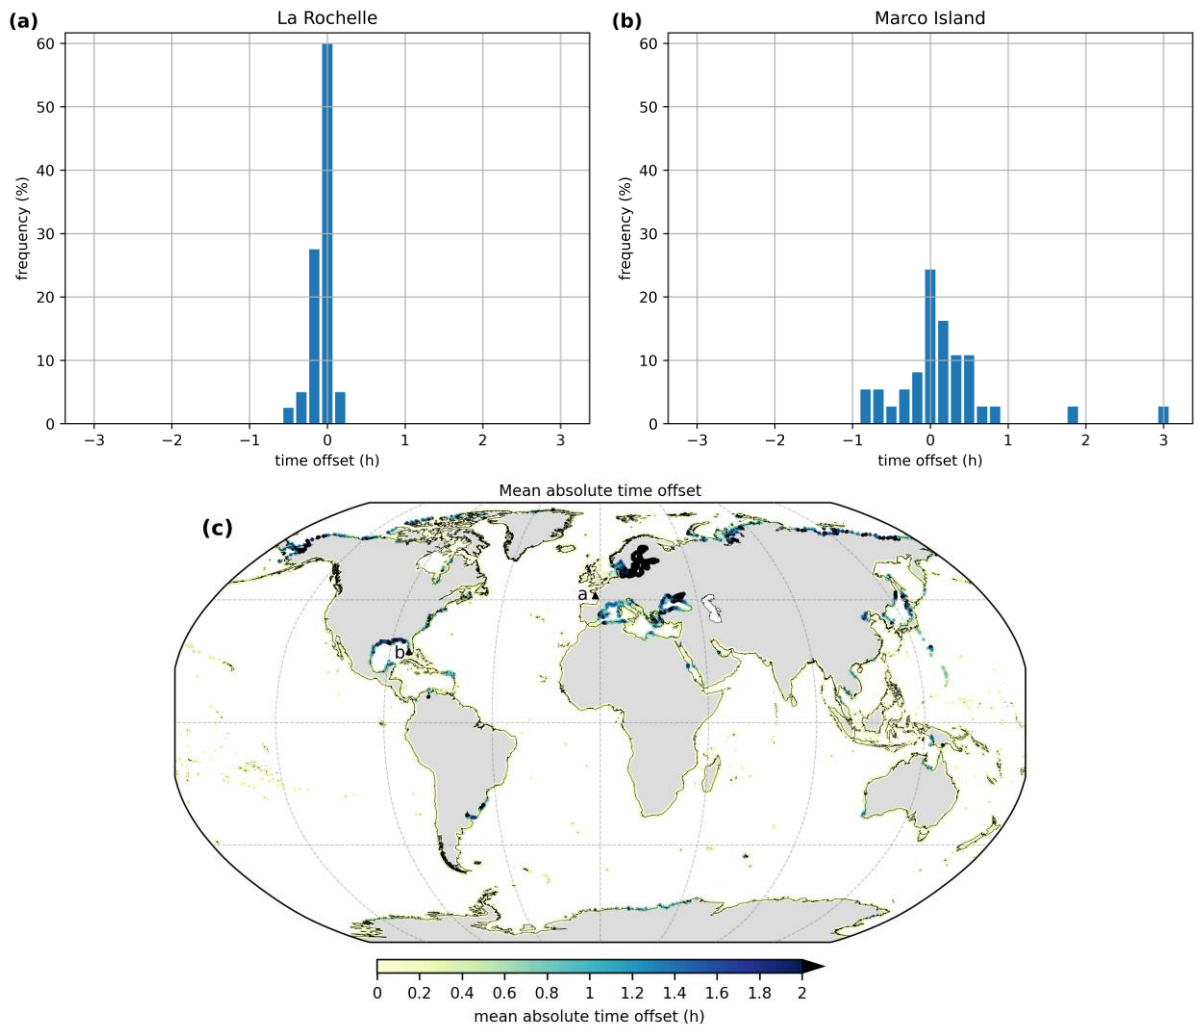


Figure 8: time offset distribution of the POT99 storm tide maxima relative to astronomical high tide at a) La Rochelle and b) Marco Island. Each blue bar represents a 10-minute period. Panel c) shows the mean absolute time offset in hours. The locations of La Rochelle and Marco Island are indicated by the letters a and b, respectively.

389

390 **5 Discussion and conclusion**

391 This study improves the understanding of the duration and shape of extreme sea level events along
392 the global coastline. It provides a novel global dataset of storm tide hydrographs which is an important
393 first step in moving away from the planar approach towards dynamic inundation modelling. The open-
394 source HGRAPHER model can generate hydrographs and allows users to create storm tide
395 hydrographs for a RP of interest. Here, we used time series of surge, tide and storm tide levels from
396 the CoDEC dataset (Muis et al., 2020) as input, and generated storm tide hydrographs with a 1-in-100
397 year return period based on COAST-RP (Dullaart et al., 2021b). Users have multiple options including,
398 1) use the average tide signal or spring tide signal; 2) define a POT percentile to select surge events
399 for generating the surge hydrograph; 3) include a time offset for combining the surge hydrograph with
400 the tide; 4) define for which RP a storm tide hydrograph should be generated; and 5) use other time
401 series or return periods as input data for HGRAPHER.

402 Several aspects of our methodology could be further improved. First, we use 38-year of surge level
403 time series that are obtained by subtracting tidal level time series from the storm tide level. As a result,
404 the surge time series do not only contain the meteorological contribution to the sea level, but also
405 contain tide-surge interaction effects (Horsburgh and Wilson, 2007). This could be addressed by using
406 a ‘surge-only’ simulation, which would not be affected by interaction effects. Another aspect that
407 could be improved is that our analysis is based on a 38 years timeseries. This provides a limited number
408 of events, specifically for regions that do not regularly experience extremes such as the equatorial
409 regions. Potentially we could extend our analysis by using a large set of synthetic events, such as those
410 presented for TCs in (Dullaart et al., 2021a). For extra-tropical regions, seasonal forecasts could be
411 used to create a large ensemble of events (Haarsma et al., 2016). The advantage of a large set of
412 synthetic events is that it would allow to assess if hydrographs are different for different RPs. This is
413 currently not possible because of the small sample size.

414 Second, we do not account for different types of storms. TCs and ETCs have distinct meteorological
415 characteristics resulting in a different evolution of the water level over time. For example, TCs can
416 have stronger wind speeds and lower air pressure than ETCs, resulting in a higher storm surge (Keller
417 and DeVecchio, 2016). ETCs on the other hand generally affect a larger coastal area because they are
418 often larger in size than TCs (Irish et al., 2008). The typical radius of a TC is between 100 and 500 km
419 while for an ETC it is in the range of 100-2000 km. In addition, once TCs move inland the wind direction
420 can become offshore directly at the coast, resulting in a storm surge sign that quickly changes from
421 positive to negative. An example of this is during TC Irma, which made landfall in Florida in 2017 (Cheng
422 and Wang, 2019). A potential direction for future research would be to separate storm surges by type
423 of storm that caused them and develop a surge hydrograph individually for TCs and ETCs. This would
424 require much longer surge time-series (representing thousands of years instead of decades) that could
425 be created using, for example, large climate model ensembles (Haarsma et al., 2016) or synthetic
426 tracks of TCs (Bloemendaal et al., 2020).

427 Third, the average tide signal is computed by taking the average over thousands of tidal cycles with a
428 duration of 1 lunar day, lasting 24 hours and 50 minutes. For the majority of the output locations
429 HGRAPHER correctly extracts the average (spring) tide signal. However, in areas with a mixed tidal
430 regime the daily uneven magnitude of the two high tides are averaged out. This is because over time
431 it alters whether the first or second high tide is the highest tide during that lunar day. Including the
432 mixed tidal regime characteristics at these locations, such as Montevideo (*App. Fig. A2*), would result
433 in a more realistic storm tide hydrograph. However, for this multiple storm tide hydrographs have to

434 be generated that have different shapes but reach the same maximum water level. This would make
435 the storm tide hydrographs dataset less easily applicable in large scale flood hazard assessments.

436 A final limitation is that our analysis does not include waves. Wave setup can increase storm tide levels
437 at the coast. Therefore, it is often an important component of extreme sea levels, and including a
438 dynamic wave setup component in HGRAPHER is a potential direction for future research. To
439 accomplish this, we could make use of a parametric approach that has been used in previous global
440 scale studies to obtain estimates of wave setup (Vousdoukas et al., 2018; Kirezci et al., 2020).

441 HGRAPHER and the global dataset of storm tide hydrographs improve our understanding of the
442 duration and shape of storm tide levels. They provide a basis to move towards more dynamic
443 inundation modelling across different spatial scales, and as a next step, the hydrographs could be
444 applied as boundary conditions in inundation modelling. This way, the time component is taken into
445 account when modelling inundation which will substantially improve the accuracy of coastal flood
446 hazard assessments across different spatial scales.

447 **6 Appendices**

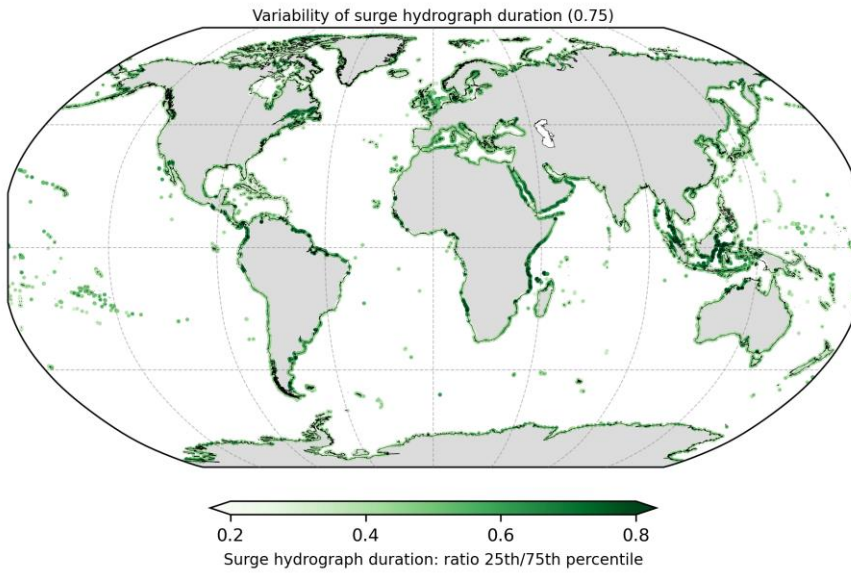


Figure A1: Ratio of the surge hydrograph duration of the 25th and 75th percentile at the normalized surge height 0.75. The ratio is computed by dividing the 25th percentile value by the 75th percentile value.

448

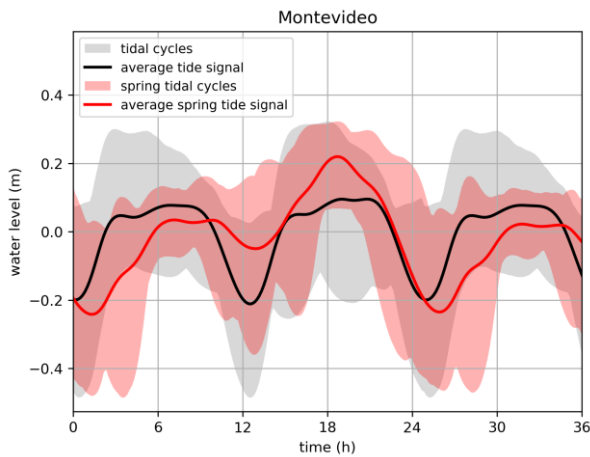


Figure A2: Average tide signal (black line) for Montevideo. The grey shaded area shows the range of all tidal cycles. The average spring tide signal is shown in red and the red shaded area indicate all tidal cycles that are used to compute the average spring tide signal.

449

450 **7 Code availability**

451 The HGRAPHER method developed in this study consists of several scripts that are available from
452 GitHub at github.com/jobdullaart/HGRAPHER

453

454 **8 Data availability**

455 Sea level time series used in this study are available from the Copernicus Climate Data Store (CDS) at
456 doi.org/10.24381/cds.a6d42d60. In addition, the hydrographs generated in this study are available
457 from the 4TU data repository at doi.org/10.4121/21270948.

458

459 **9 Author contribution**

460 JD developed the HGRAPHER method and wrote the paper. SM, HM, DE, PW, and JA participated in
461 technical discussions and co-wrote the paper.

462

463 **10 Competing interests**

464 The authors declare that they have no conflict of interest.

465

466 **11 Acknowledgements**

467 We would like to thank Nathalie van Veen for her active involvement in the interpretation of the model
468 outcomes and her critical look at the methodology. J.D. and J.A. received funding from the COASTRISK
469 project financed by the SCOR Corporate Foundation for Science (R/003316.01). J.A. is also funded by
470 the ERC Advanced Grant COASTMOVE #884442. S.M. received funding from the research program
471 MOSAIC with project number ASDI.2018.036, which is financed by the Netherlands Organization for
472 Scientific Research (NWO). D.E. and P.W. received funding from the NWO in the form of a VIDI grant
473 (grant no. 016.161.324). This work was sponsored by NWO Exact and Natural Sciences for the use of
474 supercomputer facilities (grant no. 2020.007).

475 12 References

- 476 Bates, P. D., Horritt, M. S., and Fewtrell, T. J.: A simple inertial formulation of the shallow water
 477 equations for efficient two-dimensional flood inundation modelling, *J. Hydrol.*, 387, 33–45,
 478 <https://doi.org/10.1016/j.jhydrol.2010.03.027>, 2010.
- 479 Bloemendaal, N., Muis, S., Haarsma, R. J., Verlaan, M., Irazoqui Apecechea, M., de Moel, H., Ward, P.
 480 J., and Aerts, J. C. J. H.: Global modeling of tropical cyclone storm surges using high resolution
 481 forecasts, *Clim. Dyn.*, 52, 5031, <https://doi.org/10.1007/s00382-018-4430-x>, 2019.
- 482 Bloemendaal, N., Haigh, I. D., Moel, H. De, Muis, S., Haarsma, R. J., and Aerts, J. C. J. H.: Generation
 483 of a global synthetic tropical cyclone hazard dataset using STORM, *Sci. Data*, 7,
 484 <https://doi.org/10.1038/s41597-020-0381-2>, 2020.
- 485 Brown, S., Nicholls, R. J., Goodwin, P., Haigh, I. D., Lincke, D., Vafeidis, A. T., and Hinkel, J.:
 486 Quantifying Land and People Exposed to Sea-Level Rise with No Mitigation and 1.5°C and 2.0°C Rise
 487 in Global Temperatures to Year 2300, *Earth's Futur.*, 6, 583–600,
 488 <https://doi.org/10.1002/2017EF000738>, 2018.
- 489 Chbab, H.: Waterstandsverlopen kust. Wettelijk Toetsinstrumentarium WTI-2017, Delft, 2015.
- 490 Cheng, J. and Wang, P.: Unusual Beach Changes Induced by Hurricane Irma with a Negative Storm
 491 Surge and Poststorm Recovery, *J. Coast. Res.*, 35, 1185–1199, [https://doi.org/10.2112/JCOASTRES-D-](https://doi.org/10.2112/JCOASTRES-D-19-00038.1)
 492 [19-00038.1](https://doi.org/10.2112/JCOASTRES-D-19-00038.1), 2019.
- 493 Colle, B. A., Rojowsky, K., and Buonaito, F.: New York city storm surges: Climatology and an analysis
 494 of the wind and cyclone evolution, *J. Appl. Meteorol. Climatol.*, 49, 85–100,
 495 <https://doi.org/10.1175/2009JAMC2189.1>, 2010.
- 496 Dee, D. P., Uppala, S. M., Simmons, A. J., Berrisford, P., Poli, P., Kobayashi, S., Andrae, U., Balmaseda,
 497 M. A., Balsamo, G., Bauer, P., Bechtold, P., Beljaars, A. C. M., van de Berg, L., Bidlot, J., Bormann, N.,
 498 Delsol, C., Dragani, R., Fuentes, M., Geer, A. J., Haimberger, L., Healy, S. B., Hersbach, H., Hólm, E. V.,
 499 Isaksen, I., Kållberg, P., Köhler, M., Matricardi, M., McNally, A. P., Monge-Sanz, B. M., Morcrette, J. J.,
 500 Park, B. K., Peubey, C., de Rosnay, P., Tavolato, C., Thépaut, J. N., and Vitart, F.: The ERA-Interim
 501 reanalysis: Configuration and performance of the data assimilation system, *Q. J. R. Meteorol. Soc.*,
 502 137, 553–597, <https://doi.org/10.1002/qj.828>, 2011.
- 503 Domingues, R., Kuwano-Yoshida, A., Chardon-Maldonado, P., Todd, R. E., Halliwell, G. R., Kim, H. S.,
 504 Lin, I. I., Sato, K., Narazaki, T., Shay, L. K., Miles, T., Glenn, S., Zhang, J. A., Jayne, S. R., Centurioni, L.
 505 R., Le Hénaff, M., Foltz, G., Bringas, F., Ali, M. M., DiMarco, S., Hosoda, S., Fukuoka, T., LaCour, B.,
 506 Mehra, A., Sanabia, E. R., Gyakum, J. R., Dong, J., Knaff, J., and Goni, G. J.: Ocean observations in
 507 support of studies and forecasts of tropical and extratropical cyclones, *Front. Mar. Sci.*, 6, 1–23,
 508 <https://doi.org/10.3389/fmars.2019.00446>, 2019.
- 509 Dullaart, J. C. M., Muis, S., Bloemendaal, N., and Aerts, J. C. J. H.: Advancing global storm surge
 510 modelling using the new ERA5 climate reanalysis, *Clim. Dyn.*, 54, 1007–1021,
 511 <https://doi.org/10.1007/s00382-019-05044-0>, 2020.
- 512 Dullaart, J. C. M., Muis, S., Bloemendaal, N., Chertova, M. V., Couasnon, A., and Aerts, J. C. J. H.:
 513 Accounting for tropical cyclones more than doubles the global population exposed to low-probability
 514 coastal flooding, *Commun. Earth Environ.*, 2, 1–11, <https://doi.org/10.1038/s43247-021-00204-9>,
 515 2021a.
- 516 Dullaart, J. C. M., Muis, S., Bloemendaal, N., Chertova, M., Couasnon, A., and Aerts, J. C. J. H.: COAST-
 517 RP: A global COastal dAtaset of Storm Tide Return Periods,
 518 <https://doi.org/https://doi.org/10.4121/13392314>, 2021b.

- 519 Environment Agency: Coastal flood boundary conditions for the UK: 2018 update, Bristol, 116 pp.,
520 2018.
- 521 FEMA: The national flood insurance act of 1968, Natl. flood Insur. act 1968, 1968.
- 522 Haarsma, R. J., Roberts, M. J., Vidale, P. L., Catherine, A., Bellucci, A., Bao, Q., Chang, P., Corti, S.,
523 Fučkar, N. S., Guemas, V., Von Hardenberg, J., Hazeleger, W., Kodama, C., Koenigk, T., Leung, L. R.,
524 Lu, J., Luo, J. J., Mao, J., Mizielinski, M. S., Mizuta, R., Nobre, P., Satoh, M., Scoccimarro, E., Semmler,
525 T., Small, J., and Von Storch, J. S.: High Resolution Model Intercomparison Project (HighResMIP v1.0)
526 for CMIP6, *Geosci. Model Dev.*, 9, 4185–4208, <https://doi.org/10.5194/gmd-9-4185-2016>, 2016.
- 527 Haer, T., Botzen, W. J. W., Van Roomen, V., Connor, H., Zavala-Hidalgo, J., Eilander, D. M., and Ward,
528 P. J.: Coastal and river flood risk analyses for guiding economically optimal flood adaptation policies:
529 A country-scale study for Mexico, *Philos. Trans. R. Soc. A Math. Phys. Eng. Sci.*, 376,
530 <https://doi.org/10.1098/rsta.2017.0329>, 2018.
- 531 Haigh, I. D., Wadey, M. P., Wahl, T., Ozsoy, O., Nicholls, R. J., Brown, J. M., Horsburgh, K., and
532 Gouldby, B.: Spatial and temporal analysis of extreme sea level and storm surge events around the
533 coastline of the UK, *Sci. Data*, 3, 1–14, <https://doi.org/10.1038/sdata.2016.107>, 2016.
- 534 Hersbach, H., Bell, B., Berrisford, P., Horányi, A., Muñoz Sabater, J., Nicolas, J., Radu, R., Schepers, D.,
535 Simmons, A., Soci, C., and Dee, D.: Global reanalysis: goodbye ERA-Interim, hello ERA5, *ECMWF*
536 *Newsl.*, 159, 17–24, <https://doi.org/10.21957/vf291hehd7>, 2019.
- 537 Horsburgh, K. J. and Wilson, C.: Tide-surge interaction and its role in the distribution of surge
538 residuals in the North Sea, *J. Geophys. Res. Ocean.*, 112, <https://doi.org/10.1029/2006JC004033>,
539 2007.
- 540 Idier, D., Bertin, X., Thompson, P., and Pickering, M. D.: Interactions Between Mean Sea Level, Tide,
541 Surge, Waves and Flooding: Mechanisms and Contributions to Sea Level Variations at the Coast,
542 *Surv. Geophys.*, 40, 1603–1630, <https://doi.org/10.1007/s10712-019-09549-5>, 2019.
- 543 Irish, J. L., Resio, D. T., and Ratcliff, J. J.: The Influence of Storm Size on Hurricane Surge, *J. Phys.*
544 *Oceanogr.*, 38, 2003–2013, <https://doi.org/10.1175/2008JPO3727.1>, 2008.
- 545 Keller, E. A. and DeVecchio, D. E.: Hurricanes and Extratropical Cyclones, in: *Natural Hazards: Earth's*
546 *Processes as Hazards, Disasters, and Catastrophes*, Routledge, New York, 331–363, 2016.
- 547 Kirezci, E., Young, I. R., Ranasinghe, R., Muis, S., Nicholls, R. J., Lincke, D., and Hinkel, J.: Projections of
548 global-scale extreme sea levels and resulting episodic coastal flooding over the 21st century, *Sci.*
549 *Rep.*, 10, <https://doi.org/10.1038/s41598-020-67736-6>, 2020.
- 550 Lamb, R., Brisley, R., Hunter, N., Wingfield, S., Warren, S., Mattingley, P., and Sayers, P.: *Flood*
551 *Standards of Protection and Risk Management Activities Final Report JBA Project Manager*, North
552 *Yorkshire*, 74 pp., 2018.
- 553 Leijnse, T., van Ormondt, M., Nederhoff, K., and van Dongeren, A.: Modeling compound flooding in
554 coastal systems using a computationally efficient reduced-physics solver: Including fluvial, pluvial,
555 tidal, wind- and wave-driven processes, *Coast. Eng.*, 163, 103796,
556 <https://doi.org/10.1016/j.coastaleng.2020.103796>, 2021.
- 557 Lewis, M., Bates, P., Horsburgh, K., Neal, J., and Schumann, G.: A storm surge inundation model of
558 the northern Bay of Bengal using publicly available data, *Q. J. R. Meteorol. Soc.*, 139, 358–369,
559 <https://doi.org/10.1002/qj.2040>, 2013.
- 560 Lincke, D. and Hinkel, J.: Economically robust protection against 21st century sea-level rise, *Glob.*
561 *Environ. Chang.*, 51, 67–73, <https://doi.org/10.1016/j.gloenvcha.2018.05.003>, 2018.

- 562 MacPherson, L. R., Arns, A., Dangendorf, S., Vafeidis, A. T., and Jensen, J.: A Stochastic Extreme Sea
563 Level Model for the German Baltic Sea Coast, *J. Geophys. Res. Ocean.*, 124, 2054–2071,
564 <https://doi.org/10.1029/2018JC014718>, 2019.
- 565 Merkens, J. L., Reimann, L., Hinkel, J., and Vafeidis, A. T.: Gridded population projections for the
566 coastal zone under the Shared Socioeconomic Pathways, *Glob. Planet. Change*, 145, 57–66,
567 <https://doi.org/10.1016/j.gloplacha.2016.08.009>, 2016.
- 568 Muis, S., Verlaan, M., Winsemius, H. C., Aerts, J. C. J. H., and Ward, P. J.: A global reanalysis of storm
569 surges and extreme sea levels, *Nat. Commun.*, 7, <https://doi.org/10.1038/ncomms11969>, 2016.
- 570 Muis, S., Apecechea, M. I., Dullaart, J., de Lima Rego, J., Madsen, K. S., Su, J., Yan, K., and Verlaan, M.:
571 A High-Resolution Global Dataset of Extreme Sea Levels, Tides, and Storm Surges, Including Future
572 Projections, *Front. Mar. Sci.*, 7, <https://doi.org/10.3389/fmars.2020.00263>, 2020.
- 573 Oppenheimer, M., Glavovic, B. C., Hinkel, J., van de Wal, R., Magnan, A. K., Abd-Elgawad, A., Cai, R.,
574 Cifuentes-Jara, M., DeConto, R. M., Ghosh, T., Hay, J., Isla, F., Marzeion, B., Meyssignac, B., and
575 Sebesvari, Z.: Sea level rise and implications for low lying islands, coasts and communities, edited by:
576 Pörtner, H. O., Roberts, D. C., Masson-Delmotte, V., Zhai, P., Tignor, M., Poloczanska, E., Mintenbeck,
577 K., Alegría, A., Nicolai, M., Okem, A., Petzold, J., Rama, B., and Weyer, N. M., 2019.
- 578 Pasquier, U., He, Y., Hooton, S., Goulden, M., and Hiscock, K. M.: An integrated 1D–2D hydraulic
579 modelling approach to assess the sensitivity of a coastal region to compound flooding hazard under
580 climate change, *Nat. Hazards*, 98, 915–937, <https://doi.org/10.1007/s11069-018-3462-1>, 2019.
- 581 Pugh, D. T.: Tides, Surges and mean sea-level (Reprinted with corrections), John Wiley & Sons, Ltd.,
582 Chichester, U.K, 486 pp., [https://doi.org/10.1016/0264-8172\(88\)90013-X](https://doi.org/10.1016/0264-8172(88)90013-X), 1996.
- 583 Quinn, N., Lewis, M., Wadey, M. P., and Haigh, I. D.: Assessing the temporal variability in extreme
584 storm-tide time series for coastal flood risk assessment, *J. Geophys. Res. Ocean.*, 119, 4983–4998,
585 <https://doi.org/10.1002/2014JC010197>, 2014.
- 586 Ramirez, J. A., Lichter, M., Coulthard, T. J., and Skinner, C.: Hyper-resolution mapping of regional
587 storm surge and tide flooding: comparison of static and dynamic models, *Nat. Hazards*, 82, 571–590,
588 <https://doi.org/10.1007/s11069-016-2198-z>, 2016.
- 589 Rego, J. L. and Li, C.: Nonlinear terms in storm surge predictions: Effect of tide and shelf geometry
590 with case study from Hurricane Rita, *J. Geophys. Res. Ocean.*, 115, 1–19,
591 <https://doi.org/10.1029/2009JC005285>, 2010.
- 592 Resio, D. T. and Westerink, J. J.: Modeling the physics of storm surges, *Phys. Today*, 61, 33–38, 2008.
- 593 Salisbury, M. B. and Hagen, S. C.: The effect of tidal inlets on open coast storm surge hydrographs,
594 *Coast. Eng.*, 54, 377–391, <https://doi.org/10.1016/j.coastaleng.2006.10.002>, 2007.
- 595 Santamaria-Aguilar, S. and Vafeidis, A. T.: Are Extreme Skew Surges Independent of High Water
596 Levels in a Mixed Semidiurnal Tidal Regime?, *J. Geophys. Res. Ocean.*, 123, 8877–8886,
597 <https://doi.org/10.1029/2018JC014282>, 2018.
- 598 Santamaria-Aguilar, S., Arns, A., and Vafeidis, A. T.: Sea-level rise impacts on the temporal and
599 spatial variability of extreme water levels: A case study for St. Peter-Ording, Germany, *J. Geophys.*
600 *Res. Ocean.*, 122, 2742–2759, <https://doi.org/10.1002/2016JC012579>, 2017.
- 601 Sebastian, A., Proft, J., Dietrich, J. C., Du, W., Bedient, P. B., and Dawson, C. N.: Characterizing
602 hurricane storm surge behavior in Galveston Bay using the SWAN+ADCIRC model, *Coast. Eng.*, 88,
603 171–181, <https://doi.org/10.1016/j.coastaleng.2014.03.002>, 2014.
- 604 Song, D., Wang, X. H., Kiss, A. E., and Bao, X.: The contribution to tidal asymmetry by different

- 605 combinations of tidal constituents, *J. Geophys. Res. Ocean.*, 116, 1–12,
606 <https://doi.org/10.1029/2011JC007270>, 2011.
- 607 Stephens, S. A., Paulik, R., Reeve, G., Wadhwa, S., Popovich, B., Shand, T., and Haughey, R.: Future
608 changes in built environment risk to coastal flooding, permanent inundation and coastal erosion
609 hazards, *J. Mar. Sci. Eng.*, 9, <https://doi.org/10.3390/jmse9091011>, 2021.
- 610 Tiggeloven, T., De Moel, H., Winsemius, H. C., Eilander, D., Erkens, G., Gebremedhin, E., Diaz Loaiza,
611 A., Kuzma, S., Luo, T., Iceland, C., Bouwman, A., Van Huijstee, J., Ligtvoet, W., and Ward, P. J.: Global-
612 scale benefit-cost analysis of coastal flood adaptation to different flood risk drivers using structural
613 measures, *Nat. Hazards Earth Syst. Sci.*, 20, 1025–1044, [https://doi.org/10.5194/nhess-20-1025-](https://doi.org/10.5194/nhess-20-1025-2020)
614 2020, 2020.
- 615 Vafeidis, A. T., Schuerch, M., Wolff, C., Spencer, T., Merkens, J. L., Hinkel, J., Lincke, D., Brown, S., and
616 Nicholls, R. J.: Water-level attenuation in broad-scale assessments of exposure to coastal flooding: a
617 sensitivity analysis, *Nat. Hazards Earth Syst. Sci.*, 19, 973–984, [https://doi.org/10.5194/nhess-2018-](https://doi.org/10.5194/nhess-2018-359)
618 359, 2019.
- 619 Vousdoukas, M. I., Voukouvalas, E., Mentaschi, L., Dottori, F., Giardino, A., Bouziotas, D., Bianchi, A.,
620 Salamon, P., and Feyen, L.: Developments in large-scale coastal flood hazard mapping, *Nat. Hazards*
621 *Earth Syst. Sci.*, 16, 1841–1853, <https://doi.org/10.5194/nhess-16-1841-2016>, 2016a.
- 622 Vousdoukas, M. I., Voukouvalas, E., Annunziato, A., Giardino, A., and Feyen, L.: Projections of
623 extreme storm surge levels along Europe, *Clim. Dyn.*, 47, 1–20, [https://doi.org/10.1007/s00382-016-](https://doi.org/10.1007/s00382-016-3019-5)
624 3019-5, 2016b.
- 625 Vousdoukas, M. I., Mentaschi, L., Voukouvalas, E., Verlaan, M., Jevrejeva, S., Jackson, L. P., and
626 Feyen, L.: Global probabilistic projections of extreme sea levels show intensification of coastal flood
627 hazard, *Nat. Commun.*, 9, 2360, <https://doi.org/10.1038/s41467-018-04692-w>, 2018.
- 628 Wahl, T., Mudersbach, C., and Jensen, J.: Assessing the hydrodynamic boundary conditions for risk
629 analyses in coastal areas: A stochastic storm surge model, *Nat. Hazards Earth Syst. Sci.*, 11, 2925–
630 2939, <https://doi.org/10.5194/nhess-11-2925-2011>, 2011.
- 631 Wahl, T., Mudersbach, C., and Jensen, J.: Assessing the hydrodynamic boundary conditions for risk
632 analyses in coastal areas: A multivariate statistical approach based on Copula functions, *Nat. Hazards*
633 *Earth Syst. Sci.*, 12, 495–510, <https://doi.org/10.5194/nhess-12-495-2012>, 2012.
- 634 Wahl, T., Haigh, I. D., Nicholls, R. J., Arns, A., Dangendorf, S., Hinkel, J., and Slangen, A. B. A.:
635 Understanding extreme sea levels for broad-scale coastal impact and adaptation analysis, *Nat.*
636 *Commun.*, 8, 1–12, <https://doi.org/10.1038/ncomms16075>, 2017.
- 637 Ward, P. J., Jongman, B., Salamon, P., Simpson, A., Bates, P., De Groeve, T., Muis, S., De Perez, E. C.,
638 Rudari, R., Trigg, M. A., and Winsemius, H. C.: Usefulness and limitations of global flood risk models,
639 *Nat. Clim. Chang.*, 5, 712–715, <https://doi.org/10.1038/nclimate2742>, 2015.
- 640 Williams, J., Horsburgh, K. J., Williams, J. A., and Proctor, R. N. F.: Tide and skew surge independence:
641 New insights for flood risk, *Geophys. Res. Lett.*, 43, 6410–6417,
642 <https://doi.org/10.1002/2016GL069522>, 2016.
- 643 Xu, S. and Huang, W.: An improved empirical equation for storm surge hydrographs in the Gulf of
644 Mexico, U.S.A, *Ocean Eng.*, 75, 174–179, <https://doi.org/10.1016/j.oceaneng.2013.11.004>, 2014.
- 645 Yin, J., Lin, N., and Yu, D.: Coupled modeling of storm surge and coastal inundation: A case study in
646 New York City during Hurricane Sandy, *Water Resour. Res.*, 52, 8685–8699,
647 <https://doi.org/10.1002/2016WR019102>, 2016.