# Effect of structural setting of source volume on rock avalanche mobility and deposit morphology

Zhao Duan<sup>1,2</sup>, Yan-Bin Wu<sup>2,3\*</sup>, Qing Zhang<sup>2,3</sup>, Zhen-Yan Li<sup>2,3</sup>, Lin Yuan<sup>2,3</sup>, Kai Wang<sup>2,3</sup>, Yang Liu<sup>2,3</sup>

- <sup>1</sup> Associate Professor, College of Geology and Environment, Xi'an University of Science and Technology, Xi'an, 710054, China
  - <sup>2</sup> Institute of Ecological Environment Restoration in Mine Areas of West China, Xi'an University of Science and Technology, Xi'an, 710054, China
  - <sup>3</sup> Graduate Student, College of Geology and Environment, Xi'an University of Science and Technology, Xi'an, 710054, China
  - \*Corresponding to: Yan-Bin Wu (19209071021@stu.xust.edu.cn)

Abstract: Deposit morphologies and sedimentary characteristics are methods for investigating rock avalanches. The characteristics of structural geology of source volume, namely the in-place rock mass structure, will influence these two deposit characteristics and rock avalanches' mobility. In this study, a series of experiments were conducted by setting different initial configurations of blocks to simulate different characteristics of structural geology of source volume, specifically including the long axis of the blocks perpendicular to the strike of the inclined plate EP, parallel to the strike of the inclined plate LV, perpendicular to the inclined plate LP, randomly R and without the blocks NB as a control experiment. The experimental materials comprised both cuboid blocks and granular materials to simulate large blocks and matrixes, respectively, in natural rock avalanches. The results revealed that the mobility of the mass flows was enhanced at LV, LP and R configurations, whereas it was restricted at the EP configuration. The mobility decreased with the increase in slope angles at LV configurations. Strand protrusion of the blocks made the elevation of the deposits at LV configuration larger than that at EP, LP, and R configurations. A zigzag structure is created in the blocks resulting from the lateral spreading of the deposits causing the blocks to rotate. Varying degrees of deflection of the blocks demonstrated different levels of collision and friction in the interior of the mass flows; the most intensive collision was observed at EP. In the mass deposits, the blocks' orientation was affected by their initial configurations and the motion process of the mass flows. This research would support studies relating characteristics of structural geology of source volume to landslide mobility and deposit morphology.

#### 1 Introduction

10

15

20

25

Rock avalanches are a type of ubiquitous geological phenomenon in mountainous regions. Their motion processes often involve multiple granular materials, ranging from large blocks to tiny particles (Ui et al., 1986; Voight and Pariseau, 1978). Many rock avalanches have large blocks with hypermobility (Dufresne, 2012; Mangeney et al., 2010; Goujon et al., 2003; Phillips et al., 2006; Delannay et al., 2017). In some cases, these huge blocks have a larger runout (Charrière et al., 2016;

Schwarzkopf et al., 2005). The deposits of rock avalanches often have particular surface structures, such as transverse ridges and lateral levees (Wang et al., 2019; Shea and Van Wyk De Vries, 2008), and unique sedimentary characteristics, such as the inverse grading of particles (Schwarzkopf et al., 2005; Fisher and Heiken, 1982; Dufresne et al., 2016; Hungr, 2006; Duan et al., 2021) and block orientation and distribution (parallel or perpendicular to the motion direction of rock avalanches) (Pánek et al., 2008; Wang et al., 2019). Several factors affect rock avalanches' motion, sedimentary features, and morphologies of the resulting deposit (Manzella and Labiouse, 2009; Phillips et al., 2006; Yang et al., 2011; Duan et al., 2020; Li et al., 2021; Duan et al., 2019). However, the characteristics of structural geology in the source of a rock avalanche are significant controlling factors in modulating rock avalanches' propagation (Duan et al., 2020; Huang and Liu, 2009; Lucas and Mangeney, 2007; Bartali et al., 2020; Manzella and Labiouse, 2009; Phillips et al., 2006; Manzella and Labiouse, 2013b; Crosta et al., 2017). It was stated that the existence of discontinuities could reduce the internal friction and further facilitate the long runout of the sliding mass (Lan et al., 2022; Corominas, 1996). In addition, they pointed out that the matrixes played an important role in controlling the runout of rock avalanches because the matrixes can lead to a large amount of energy dissipation during motion. Field investigations are one of the fundamental methods for examining rock avalanches. These investigations should consider the characteristics of structural geology of the rock mass in the source volume, as well as the surface structures and sedimentary characteristics of rock avalanches' deposits (Wang et al., 2018b; Zhu et al., 2019). Indeed, many rock avalanches involved disaggregated rock masses occurring due to discontinuity sets in the source volume (Mavrouli et al., 2015; Pedrazzini et al., 2013; Jaboyedoff et al., 2009; Brideau et al., 2009). Disaggregated rock structures facilitate the occurrence of a rock avalanche. In some recent cases, the rock avalanches, with initial structures in their source volume that the long axis of blocky rock mass was perpendicular or parallel to the strike of sliding surface, or perpendicular to the sliding surface, exhibited greater mobility, but it is unclear whether their hypermobility is connected to their initial structures (Pedrazzini et al., 2013; Jaboyedoff et al., 2009; Brideau et al., 2009). The Sierre rock avalanche in Switzerland was reported with a runout distance of about 14 km and extremely low apparent friction coefficient (Pedrazzini et al., 2013). In the source volume of the rock avalanche, there are three joint sets which make the rock mass fragmented and blocky before sliding. Similarly, the Randa rockslide in Switzerland (Brideau et al., 2009) and the Frank rock avalanche in Turtle Mountain, Canada (Jaboyedoff et al., 2009), with disaggregated rock mass by joint sets, were also reported with large mobility. It is noted that the disaggregated rock masses in source volume of these rock avalanches have different orientations of the long axis of rock blocks. However, whether the different orientations of the long axis of rock blocks affect the mobility and deposit morphology of rock avalanches is unclear.

30

35

40

45


50

55

60

In previous studies, the deposits of rock avalanches have been extensively investigated to reveal the kinematics of rock avalanches during motion. For a rock avalanche's deposit, the spatial distribution of particle size (Gray and Hutter, 1997; Zeng et al., 2020; Zhao et al., 2021; Baker et al., 2016; Getahun et al., 2019; Dufresne et al., 2016) and the arrangement of blocks (Pánek et al., 2008; Wang et al., 2019; Moreiras, 2020; Dufresne et al., 2021) are prominent features requiring thorough examinations. In fact, the latter has become a hotspot for investigation. An obvious orientation of the long axis of large blocks

(Figure 1) was clearly discerned on the deposits of the Taheman rock avalanche and Nixu rock avalanche in Tibet plateau, China (Wang et al., 2021), the rock avalanche on the Black Rapids Glacier, Alaska (Shugar and Clague, 2011), and the Jiweishan rock avalanche in Chongqing, China (Zhang et al., 2019). For studying the pyroclastic flow deposits that occurred in the NE area of Arequipa, South Peru, Dufresne et al. (2021) quantified the orientation of large blocks using a statistical method. They stated that the compression of deposits caused the orientation during accumulation. It is plausible to believe that the orientation of large blocks is closely related to the mobility process of rock avalanches. However, it is unclear whether the process is related to the characteristics of structural geology in the source volume of rock avalanches.

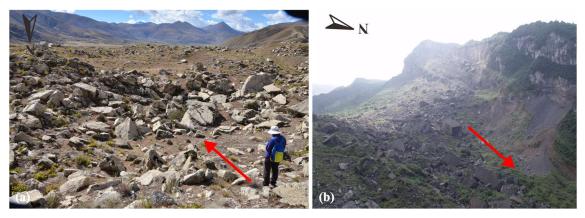

65

75

80

85

Figure 1: Giant blocks and their orientations (the red arrow indicates the motion direction of the rock avalanches): (a)
Nixu rock avalanche in Tibet plateau, China (the base photo was provided from professor Yufeng Wang and Qiangong
Cheng (Wang et al., 2021)); (b) Jiweishan rock avalanche in Chongqing, China (the base photo was provided from
professor Ming Zhang (Zhang et al., 2019)).

In rock avalanches, it is hard to know whether the characteristics of structural geology of the source volume were related to the orientation of large blocks in the deposits by field investigation due to what a role the motion process of rock avalanches played was unknow. In fact, to monitor the motion process of rock avalanches is also hard for we do not know when and where they will occur. Consequently, it is difficult to find a relationship between these rock avalanches' characteristics.

Therefore, physical model experiments, in which the blocks with rectangular shapes were poured into a container either regularly or randomly, were established to study the kinematics and deposit morphologies of rock avalanches (Manzella and Labiouse, 2009; Phillips et al., 2006; Yang et al., 2011; Manzella and Labiouse, 2013b). Manzella and Labiouse (2009) illustrated that the runout of experimental rock avalanches was larger when the long axis of the blocks was adjusted parallel to the strike of the inclined plate than that when the blocks were filled randomly. Bowman and Take (2015) also performed model experiments and used different initial configurations of large blocks to examine the mobility of rock avalanches. However, it was noted that the conditions that cause the long axis of blocks pointing toward other directions were absent in their experiments. In addition, for natural rock avalanches, the material components include both large blocks and matrixes with smaller particle sizes (Glicken, 1996), whereas the materials used in aforesaid experimental studies were totally large blocks or granules with small particle sizes. Yang et al. (2011) conducted experiments on the materials comprising simultaneously large blocks and granular matrixes. However, the blocks were cubes; therefore, the researchers could not examine the

orientation characteristics of large blocks in deposits. Experiments combining large blocks and granular matrixes were also conducted by Phillips et al. (2006). Based on the experimental results, they clearly interpreted the reasons for hypermobility in the rock avalanches, which was that the granular matrixes lubricated the flow of large blocks by rolling. They discussed briefly the deposit morphologies and sedimentary characteristics, including the preserved initial arrangement of large blocks and zigzag-like arrangement.

The abovementioned experimental studies can provide a firm foundation for the kinematics of rock avalanches. Nevertheless, experiments on the materials comprising both large blocks and granular matrixes should be conducted to study the mobility and deposit morphologies of rock avalanches at different initial structures of the original rock. Moreover, the influencing factors and possible reasons for the long axis orientation of large blocks in rock avalanches' deposits should be probed from experimental viewpoints.

Hence, physical model experiments with materials containing large blocks and granular matrixes were performed in this study. The large blocks were set with different initial structures to simulate rock avalanches with a rock mass disaggregated by discontinuity sets to examine rock avalanche propagation, surface morphology and sedimentary characteristics of the resulting deposit. The objectives of this study are: (1) to examine the changing mobility of rock avalanches at different block configurations and slope angles; (2) to explore the differences and reasons for the surface structures and sedimentary characteristics of deposits under those two factors; and (3) to determine the orientation of large blocks' long axis in each experimental rock avalanche's deposit and interpret the orientation differences from their motion processes. This research may provide a reference for investigating the mobility of rock avalanches and revealing the reason for large blocks' orientation. This research, which considered different conditions that rock masses in source volume were disaggregated by discontinuity sets and hence with the long axis of blocky rock masses having different orientations, might provide a significant contribution relating characteristics of structural geology of source volume to landslide mobility and deposit morphology. However, there were limitations that was to consider the blocks as a regular form, which was not often true in natural conditions and can be improved in future studies.

## 2 Experimental design

# 2.1 Apparatus

90

95

100

105

110

115

The propagation and deposit morphology of experimental rock avalanches were studied in a sandbox experiment. Plexiglass comprising five parts, namely an inclined plate, a horizontal plate, a sand container, a 3D scanner, and two high-speed cameras, was used to construct the experimental devices. A pair of sandbox tracks were installed in the inclined plate to adjust the sandbox's height. The horizontal and inclined plates were 1.5 m long and 1.2 m wide, respectively (Fig. 2). The specified volume of the sandbox with a side-by-side gate was  $3.6 \times 10^{-3}$  m<sup>3</sup>. A 3D scanner (8 frames/s, 1.3-megapixel resolution) captured

the whole process of the experimental rock avalanches in motion and generated 3D coordinate data of the free surface. The accuracy of the 3D scanner was 0.1 mm. It had three lenses: an emitter lens at the bottom and two lenses at the top—one with a near-infrared (NIR) sensor and one that could acquire colour images. During scanning, an NIR ray was emitted, reflected from the objects' surfaces, and received by the lenses at the top of the 3D scanner. The received NIR data were converted into 3D cloud data and colour images. The 3D data were collected according to the principles of stereoscopic parallax and active triangular ranging. The right part of Figure 2 depicted the data type the 3D scanner can acquire and correspondingly subsequent processing. Two high-speed cameras (120 frames/s, 0.4-megapixel resolution) were used to collect images at the end of each experiment. One was placed on a camera shelf, which could be adjusted up and down and front to back, to obtain deposit photos with an overhead view. The other one was fixed at the front of the horizontal plate with a front view.

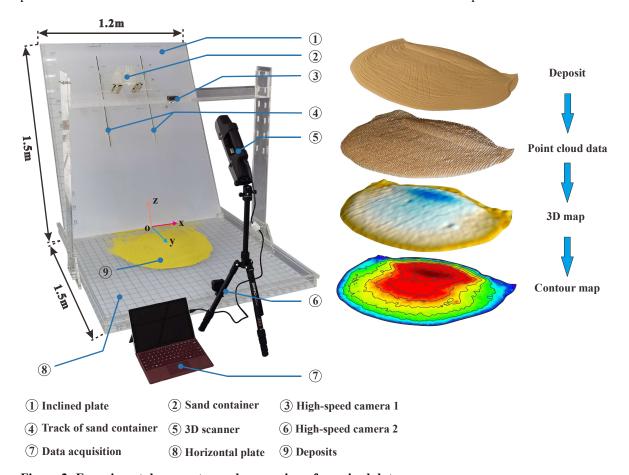


Figure 2: Experimental apparatus and processing of acquired data.

# 2.2 Materials

130

135

120

125


The cuboid blocks (Fig. 3 (a)) were manufactured from quartz sand and cemented with epoxy glue to simulate the large blocks in natural rock avalanches. These cuboid blocks had a mass of  $38 \pm 0.1$  g and specifications of  $20 \times 20 \times 40$  mm. The corresponding equivalent particle size was 31.26 mm. The mass ratio between the epoxy glue and quartz sand is 1:3. A layer of quartz sand was attached to the surface of the cuboid blocks using epoxy glue to produce a rough surface.

The quartz sand (Fig. 3(b)) simulated the granular matrixes filled into between the blocks. Figure 4 depicts the particle size distribution of the sand. It had an uniformity coefficient of 2.39 ( $C_u = D_{60} / D_{10}$ ,  $D_{60}$  is the particle size corresponding to the

value smaller than 60% of the mass proportion, and similarly  $D_{10}$  is the particle size corresponding to the value smaller than 10%), a curvature coefficient of 1.19 ( $C_c = D_{30}^2 / (D_{60} D_{10})$ ,  $D_{30}$  is the particle size corresponding to smaller than 30% of mass proportion), an average diameter of 0.18 mm and a specific surface area of 0.02 m<sup>2</sup>·kg<sup>-4</sup>. The internal friction angle  $\varphi$  was 36°, the cohesion c was 0.

The ratio between the equivalent particle size of the blocks and the average particle size of the sand was 156:1. This ratio was between 167:1 and 45:1, which is the ratio interval of equivalent particle size between large blocks and granular matrixes for natural rock avalanches (Dufresne et al., 2016).

The friction coefficient of the interface between sand and the plexiglass must be obtained. The direct shear tests were performed to determine the internal friction angle of the interface, and the tangent value of the internal friction angle was used as its friction coefficient. During the tests, a customised plexiglass cylinder 61.8×10 mm was installed into the lower shear box. The sand or blocks had the exact specification as the customised plexiglass cylinder and was filled into the upper shear box. Therefore, the shear surface is the interface (Figure 5). The interface friction parameter of plexiglass and sand was 0.42.

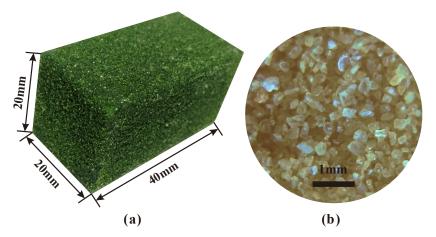

140

145

Figure 3: Experimental material: (a) cuboid block made of green quartz sand; (b) quartz sand.

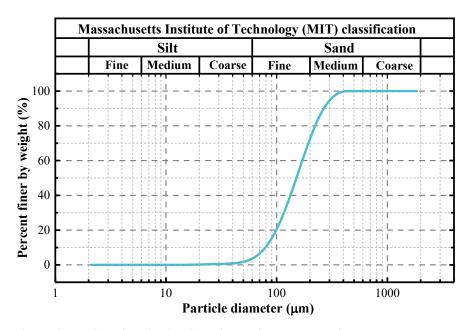


Figure 4: Particle size distribution of experimental material.

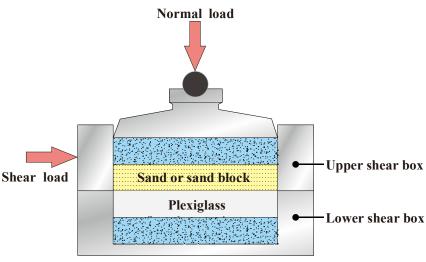


Figure 5: Diagram of direct shear tests at sand-plexiglass interface.

# 2.3 Experimental method

155

160

165

170

175

Figure 6 shows the experimental setup of simulated rock avalanches. The blocks are placed in four kinds of configurations when they are filled into the sand container: the long axis of the blocks perpendicular to the strike of the inclined plate (EP), parallel to the strike of the inclined plate (LV), perpendicular to the inclined plate (LP), and randomly (R). In addition, a contrast experiment without blocks (NB) was also designed in this study. Figure 7 shows the variation of block configurations and slope angles. Except for the contrast experiment, the percentage of blocks was 25% for each experiment group, which was between 10% and 80% for natural rock avalanches (Makris et al., 2020; Dufresne and Dunning, 2017; Dufresne et al., 2016). Manzella and Labiouse (2009) revealed that the rock avalanche exhibited greater mobility at the LV configuration. Hence, experiments were also conducted at 40°, 50°, 60° and 70° with LV configuration to explore the effects of slope angles. Table 1 presents the details of the experimental scheme. The height of the centre of gravity for each group of the experiments was 0.7 m. The matrix density for each group of the experiments was 1.5 × 10³kg·m⁻³.

While preparing for the experiments, the inner surface of the sand container and the inclined and horizontal plates were cleansed with static-proof liquid. After drying these cleaned apparatuses, the 180 g of sand was poured in and levelled. Thereafter, 12 blocks were arranged on the even sand layer, and a third layer of 180 g of sand was then poured in to cover the first 12 blocks and levelled. The abovementioned filling procedures were repeated thrice till the sand container was filled completely. After the filling operations were completed, the sand container's gate was opened and the whole mobility process of an experimental rock avalanche was captured using a 3D scanner and two high-speed cameras.

The displacement of experimental rock avalanches was defined as the difference between the front position of the mass flow and the starting point, which was present at the bottom of the overlap surface (displacement = 0) between the sand container and the inclined plate. The duration of experimental rock avalanches was from the moment the material was released to the moment the front of the sliding mass ended moving forward.

Table 1 Experimental scheme

Experimental numbering	Block configuration	Slope angle (°)	Block amount	Matrix volume in the sand container (10 <sup>-6</sup> m)
EP-50	EP	50	36	2.904
LV-50	LV	50	36	2.904
LP-50	LP	50	36	2.904
R-50	R	50	36	2.904
NB-50	NB	50	0	3.6
LV-40	LV	40	36	2.904
LV-60	LV	60	36	2.904
LV-70	LV	70	36	2.904

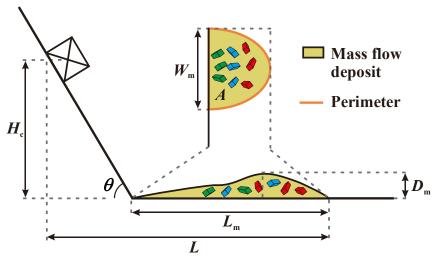


Figure 6: Diagram of experimental rock avalanches:  $L_{\rm m}$  = Maximum length of the deposit;  $W_{\rm m}$  = maximum width of the deposit;  $D_{\rm m}$  = maximum depth of the deposit; A = area of the deposit projected on the horizontal plane; P = perimeter of the deposit;  $\theta$  = slope angle;  $H_{\rm c}$  = height of the sandbox from the centre of gravity; and L = Runout of the sliding mass.

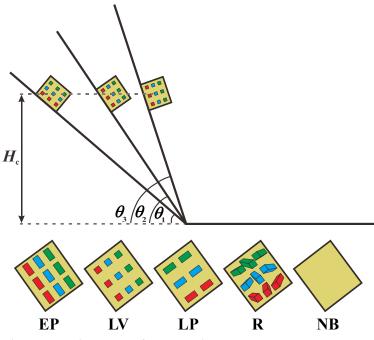


Figure 7: Variable sets of the experiments.

#### 3 Results

190

195

200

205

# 3.1 Runout and velocity

Figure 8 demonstrates the runout of each experimental rock avalanche. At different block configurations, the runout of experimental rock avalanches had a minimum value of  $114.81 \times 10^{-2}$  m at EP-50 and a maximum value of  $128.33 \times 10^{-2}$  m at R-50. Notably, the runout at the EP-50 configuration was smaller than that at NB-50 configuration ( $116.89 \times 10^{-2}$  m). At the LV configuration, the runout decreased linearly with the increase in the slope angles.

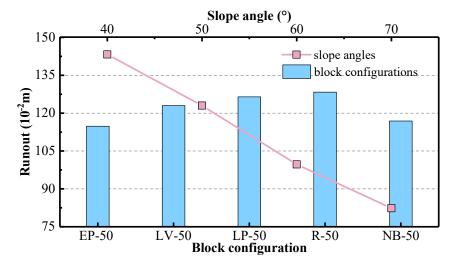


Figure 8: The runout of the experimental rock avalanches.

Figure 9(a) shows that the duration of the mass flows was 1.375 s at EP-50, LV-50, LP-50, and NB-50, but was 1.5 s at R-50. The displacement showed an exponentially increasing trend at the early stage, then a logarithmically increasing trend at the later stage. The peak velocity of the mass flows was approximately  $2300 \times 10^{-3}$  m/s at LV-50, LP-50, R-50, and NB-50, but was  $2016 \times 10^{-3}$  m/s at EP-50, which was apparently smaller than those four conditions. The point of time was 0.5 s when these five mass flows reached their peak velocities.

Figure 9(b) illustrates that the duration of the mass flows decreased with the increase in slope angles. The durations at LV-40, LV-50, LV-60, and LV-70 were 1.5 s, 1.375 s, 1.375 s, and 1 s, respectively. The displacement of the mass flows at different slope angles demonstrated the same trend as those at different block configurations. With the increase in slope angles, the peak velocity of the mass flows and the time they spent to reach their peak velocity were decreased. The front of the mass flows reached the slope break at the same time at which the mass flows attained their peak velocity. Certainly, the mass flows would continue to accelerate if the inclined plate was longer because the slope angles were always larger than the internal friction angle of the experimental materials.

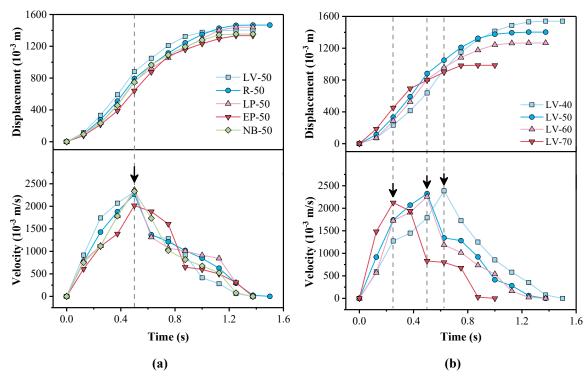


Figure 9: Dynamic characteristics of the experimental rock avalanches: (a) at different block configurations; (b) at different slope angles; black arrows denote the time the front of the mass flow reaches to the slope break.

#### 3.2 Morphology of deposits

210

215

220

225

# 3.2.1 Morphological parameters

Figure 10(a) shows the maximum length of the deposits of the mass flows. The histogram of Figure 10(a) shows that the length had a maximum value of  $647.76 \times 10^{-3}$  m at R-50 but had a minimum value of  $512.5 \times 10^{-3}$  m at EP-50, which was smaller than the value at NB-50. The line chart of Figure 10(a) revealed that the length increased first and then decreased with the increase in slope angles. It attained a maximum value of  $669.83 \times 10^{-3}$  m at LV-50.

The histogram of Figure 10(b) shows that the width had a maximum value of  $781.86 \times 10^{-3}$  m at R-50 but had a minimum value of  $703.29 \times 10^{-3}$  m at LP-50. The deposit width at EP-50, LV-50, and LP-50 was smaller than the width at NB-50. The line chart of Figure 10(b) shows that the width increased first and then decreased with the increase in slope angles.

The histogram of Figure 10(c) shows that the depth had a maximum value of  $41.42 \times 10^{-3}$  m at LV-50 but had a minimum value of  $33.42 \times 10^{-3}$  m at R-50. The depth at EP-50 and R-50 was smaller than the width at NB-50. The line chart of Figure 10(c) shows that the width decreased first but increased at  $60^{\circ}$ .

The histogram of Figure 10(d) shows that the deposit area had a maximum value of  $3495.67 \times 10^{-6} \,\mathrm{m}^2$  at R-50 and a minimum value of  $2485.6 \times 10^{-6} \,\mathrm{m}^2$  at EP-50. The line chart of Figure 10(d) shows that the area increased first and then decreased with the increase in slope angles.

The histogram of Figure 10(e) shows that the perimeter–area ratio had a maximum value of 0.089 at EP-50 but had a minimum value of 0.071 at LV-50. The line chart of Figure 10(e) shows that the perimeter–area ratio had a maximum value of 0.089 at

LV-60; however, it was smaller than that at EP-50.

A comparison showed that the block configurations exerted a more significant effect on the deposit parameters of the mass flows than slope angles. These deposit parameters had a larger amplitude of variation at different block configurations.

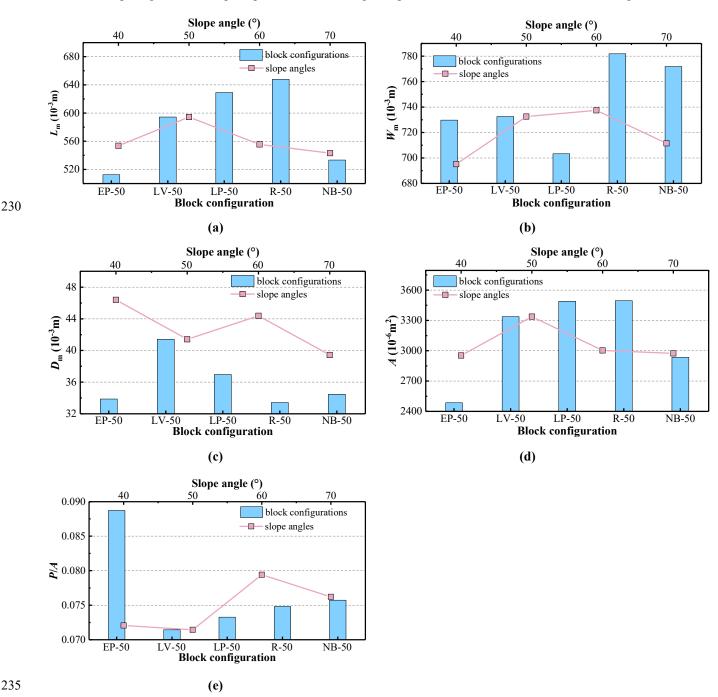


Figure 10: Deposit morphology parameters as a function of block configuration and slope angle: (a) the maximum length; (b) the maximum width; (c) the maximum depth; (d) the area; and (e) the perimeter—area ratio.

# 3.2.2 Surface structures and sedimentary characteristics

240

The digital elevation model of the mass deposits can be established using the point cloud data obtained by the 3D scanner. This model can reflect the elevation characteristics of the deposits (Figure 11(a)) resulting from block configurations and slope angles. A thorough comparison reveals that the elevation of the mass flows at EP-50, LP-50, R-50, and NB-50 was apparently smaller than that at LV-40, LV-50, LV-60, and LV-70. At EP-50, LP-50, and R-50, the surface elevation was similar to NB-50.

Moreover, the protrusion of blocks was less obvious than that seen for the LV experiments (Figure 11(a)), demonstrating that most part of the blocks' body immerged in the granular matrixes. At LV-40, LV-50, LV-60 and LV-70, the elevation of granular matrixes was approximately equal to the elevation of the deposits at EP-50, LP-50, R-50, and NB-50. A string of protrusions was observed on the surface of the deposits (Figure 11(a)). Figure 11(b) shows the protrusion of the stranding blocks. At LV-40 and LV-50, some blocks were located away from the main deposit at a different position.

245

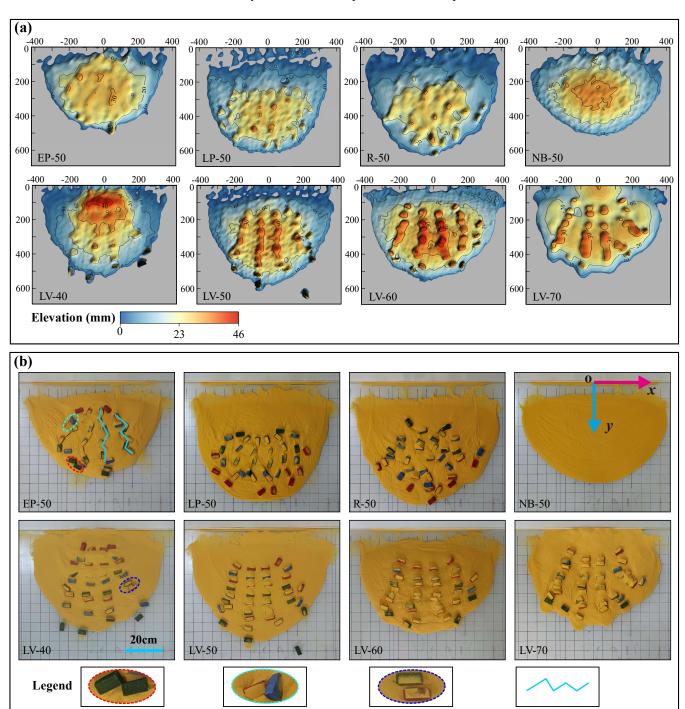


Figure 11: The surface morphology of the rock avalanches' deposit: (a) contour maps with elevation; (b) images of these rock avalanches.

non-direct contact

zigzag-like structure

piling together

direct contact

250

Figure 11 (b) presents the contact relationship of blocks and arranging characteristics of the mass deposits. At EP-50 and LP-50, the symmetry of the deposits and their inner blocks was relatively low along the *y*-axis (the position of the coordinate is

the same for each group of experiments, in which the origin of the coordinate is at the middle of the intersecting line between the inclined and horizontal plate). The spacing between blocks was small. Several contact ways of blocks, such as direct contact, non-direct contact (the blocks are separated by matrixes to prevent a direct contact) and piling together, were discerned in the mass deposits. The blocks formed a series of zigzag-like structures on the deposit surfaces at EP-50 and LP-50. At R-50, the blocks in the deposit exhibited no symmetry. There were only direct contact and non-direct contact observed in the deposit. At LV-40, LV-50, LV-60 and LV-70, the deposits and their inner blocks showed good symmetry along the y-axis. The long axis of the blocks closed to the y-axis had a small angle along the x-axis; however, the angle grew larger with the increase in the distance between the blocks and the y-axis. In these four conditions, the blocks came into contact through matrixes. In addition, the matrixes covered on the surface of the blocks increased by comparing with those at EP-50, LP-50, and R-50. Generally, the blocks in these deposits of mass flows showed a good sequence that inherited the initial position sequence (Figure 7) in the sand container. The initial position sequence was marked by different colour blocks. After releasing the materials, the upper and front part of the sliding mass moved first and then the subsequent sliding mass moved in sequence. For example, the experiments at conditions of LV, the colour of the first layer of blocks in the sand container from top to bottom was green, blue, and red in sequence. Correspondingly, the colour of front blocks in deposits was green, and subsequently blue and red. The same is true for the second and third layers of blocks above the first layer of blocks in the sand container. In addition, we noted that the mass flows with a longer runout often had a more spread out of blocks. In most cases, the blocks played an important role in controlling the mobility of rock avalanches.

# 3.3 Orientation of blocks in deposits

255

260

265

270

275

In this study, the direction of the long axis of the blocks was measured to quantitively examine the orientation of the blocks in the mass deposits. The y-axis was defined as  $0^{\circ}$  during the statistical analysis; based on this, the orientation of the blocks was obtained. Figure 12 shows that the blocks still exhibited predominant orientations for each group of experiments despite having a distribution of multiple orientations at EP-50, LP-50, and R-50. The orientation distribution was scatter at the condition of EP-50, and hence there was no dominant orientation of the blocks. At LP-50, the orientation of the blocks was mainly at intervals of  $310^{\circ}$ – $360^{\circ}$  and  $0^{\circ}$ – $10^{\circ}$ . At R-50, the orientation of the blocks occurred mainly at  $80^{\circ}$  and  $120^{\circ}$ .

At LV-40, LV-50, LV-60 and LV-70, the long axis of the blocks arranged towards a uniform direction increased compared with that at EP-50, LP-50, and R-50. At LV-40, LV-50, LV-60 and LV-70, the orientation of the blocks was mainly observed between 60° and 90°, but a distribution of 40° and 120° was still observed at LV-70.

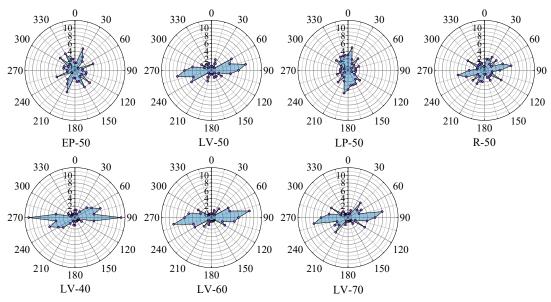


Figure 12: The orientation of the blocks in the deposit of the experimental rock avalanches.

#### 4 Discussions

280

285

290

295

300

#### 4.1 Runout of rock avalanches

The blocks' configuration at the source volume exerted a significant influence in the runout of rock avalanches. The runout of the mass flow was largest at R-50, which was attributed to the release of the blocks. These blocks were randomly stacked in the container. Following the release of materials, the blocks stacked at a higher position would lower their centre of gravity due to an unstable piling state. As a result, they push the front mass forward, resulting in the mass flow having a maximum runout and the depth and height of the centre of gravity of the deposits having minimum values. For LV-50, the energy dissipation caused by collision and friction during motion is thought to be decreased because of a regular arrangement of the blocks (Manzella and Labiouse, 2013a). Nevertheless, the energy dissipation for rolling of blocks during motion is thought to be increased because the blocks can be easier to roll at the configurations of LV. Correspondingly, the runout of the mass flow was smaller than the runout at R-50. At EP-50, the long axis of the blocks was aligned along the direction of the mass flow before its release; therefore, the lateral spreading of the mass flow during motion would change the direction of the blocks to a larger extent. During the motion, the energy of the mass flow dissipated by collision and friction among the blocks was larger; hence, its runout was minimum. The closing contact and change in the blocks' orientation offered direct evidence that a potential interaction of the blocks occurred during the motion. At LP-50, the blocks were perpendicular to the inclined plate before the release, in which they would evolve to the form of EP-50 gradually during the motion and transfer more energy to the front mass. However, the energy loss due to collision and friction of the blocks was thought to be decreased compared with EP-50 according to the difference of deposit structures. Therefore, the mass flow had a relatively longer runout. Certainly, though the runout variation between many of the experiments was relatively small, it was plausible to believe that the differences in runout was the result of the changes in block configurations. Because the runout variation between many of the

experiments was larger than the standard deviation of  $2.41 \times 10^{-3}$  m (mean runout  $116.92 \times 10^{-2}$  m) in pre-repeated experiments that were conducted totally 8 times under the same experimental conditions with sand.

Slope angles also have a noticeable impact on the runout of mass flows. The results demonstrated that the runout was decreased with the increase in the slope angles, which was consistent with previous studies (Fan et al., 2016; Crosta et al., 2015; Crosta et al., 2017; Duan et al., 2020), regardless of the experimental apparatus (with or without side walls). The decreased runout was caused by the energy dissipated from the colliding at the slope break increased with the increase of the slope angles (Zhang et al., 2015; Ji et al., 2019; Wang et al., 2018a).

The existence of matrixes also affects the runout of the mass flows. Manzella and Labiouse (2009) showed a converse trend in the same block configurations of LV and R, which was mainly caused by the difference in experimental materials. Because the matrixes were missing from their block studies, the blocks would collide directly and generate friction throughout the motion. Many interlocked structures were formed when the blocks were poured into the container. After releasing the mass, the constraints from the container disappeared. Then, the blocks would overcome the interlocked structures, and collide and produce friction. This action causes a large amount of energy dissipation during the motion. Moreover, the mass flow had a low runout. At a regular piling of the blocks in Manzella and Labiouse (2009), similar to the configuration of LV in this study, the collision and friction of the blocks decreased significantly, leading to a large runout of the mass flow. In general, the matrixes served as a conduit for transferring the interaction force between blocks to prevent a dramatic direct contact in present study. Because of the matrixes, most of the blocks were in direct contact with each other, and the friction was changed to rolling friction from sliding friction.

In fact, in the source volume of natural rock avalanches, there are disaggregated rock masses (Mavrouli et al., 2015; Carter, 2015; Locat et al., 2006; Welkner et al., 2010; Zhu et al., 2020; Pedrazzini et al., 2013). The rock masses are blocky and with different orientation of long axis for different rock avalanches (Mavrouli et al., 2015; Jaboyedoff et al., 2009; Brideau et al., 2009; Pedrazzini et al., 2013). It was reported that the existence of discontinuity sets would affect the stability and mobility of rock avalanches (Manzella and Labiouse, 2013a; Manzella and Labiouse, 2009; Mavrouli et al., 2015; Corominas, 1996; Lan et al., 2022). The Sierre rock avalanche in Switzerland was reported with a runout distance of about 14 km and extremely low apparent friction coefficient (Pedrazzini et al., 2013). The rock mass of the rock avalanche has a structural feature in source volume, in which the long axis of blocky rock mass fragmented by discontinuity sets is parallel to the strike of the sliding surface, having similarity with the configuration of LV in this study. Similarly, the Ganluo rock avalanche in China (Zhu et al., 2020) also having structural features in source volume that is similar with the configuration of EP, in which the long axis of blocky rock mass fragmented by discontinuity sets is along and perpendicularly the sliding surface. The rock avalanche was reported with a runout of 320m and an apparent friction coefficient of 0.58. Although these two rock avalanches are with different mobility, it is inappropriate to attribute the difference in mobility to the discontinuity sets because the volume and topography of the two rock avalanches are also different. Extensive field investigations or numerical simulations are needed

to clarify whether the variation of discontinuity sets affects the rock avalanches' mobility at an approximate volume and an approximate topography. There is significant scientific debate regarding the physical processes that result in the enhanced mobility of rock avalanches. However, given the limited mobility of the laboratory flows, it is likely the experiments are not capturing the mechanisms leading to the mobility of natural events.

#### 4.2 Morphological differences and corresponding reasons

335

340

345

350

355

360

The protrusion of blocks in the deposit at the LV configuration was clearly distinct from those at the other configurations. At EP-50, LP-50, and R-50, the deposit surface was at a low elevation, which was attributed mainly to the low thickness of the matrixes underlying the blocks. The thickness was approximately 10 mm and even close to 0 mm somewhere. At LV configuration, the thickness of the matrixes underlying the blocks was larger than 10 mm and even close to 20 mm somewhere. The protrusion of large blocks was often observed on the deposit surface of natural rock avalanches (Shugar and Clague, 2011; Cole et al., 2002; Schwarzkopf et al., 2005). The generation of protrusion because of the stranding of large blocks was related to the inverse grading of particles that was large particles sitting at a higher position during motion due to dispersive pressure and dynamic sieving (Dasgupta and Manna, 2011; Felix and Thomas, 2004). It was noted that the arrangement of the blocks in the source area is preserved in the deposit in this study when the blocks were placed in the configuration of LV into the sand container. According to the study of Magnarini et al. (2021), the arrangement of fragmented rock in the source area was also well-preserved in the deposit of the EI Magnifica rock avalanche. This kind of structures in deposits of rock avalanches, which also observed in the work of Manzella and Labiouse (2013a), demonstrated a motion process of less energy dissipation due to less interaction of blocks.

The regular arrangement and reduced direct contact of the blocks in the deposits at LV-40, LV-50, LV-60, and LV-70 led to the understanding that the blocks might maintain their original arrangement throughout the mobility process at the LV configurations, preventing direct collision and friction. In fact, the blocks tended to keep their initial arrangement from the structure of a regular piling of the blocks in the deposit at an initial LV configuration (Manzella and Labiouse, 2013a).

In this paper, the collision and friction of the blocks during motion were relatively drastic at EP-50, LP-50, and R-50, especially at EP-50, because there were many direct contacts piling structures of the blocks in the deposit (Figure 11(b)). The blocks would deflect throughout the motion, causing the matrixes surrounding them to be pushed aside and leaving space to allow the blocks immersing into. As a result, the thickness of the matrixes beneath the blocks was smaller at EP-50, LP-50, and R-50. Correspondingly, the depth of these deposits was smaller.

The zigzag structure comprising a string of blocks is a type of unique phenomenon occurring on the deposit surface. Phillips et al. (2006) have also produced similar results. In their study, the rectangular glass slabs were arranged with their long axis vertical and their largest face parallel to the plane of the gate, similar to the configuration in which the rectangular sand blocks were placed parallel with the inclined plate and vertical to its dip. The zigzag structures were also observed in their experiments.

The reason for their formation was unknown. Figure 13 shows the process for the formation of the zigzag structures in this study. Because there were no sidewalls in the path of the mass flows, they would spread laterally, subjecting the backside of a block subject to a force  $F_1$  at an angle with the y-axis. The force can be divided into  $F_{1x}$  and  $F_{1y}$  along the x-axis and y-axis, respectively. The  $F_{1y}$  would push the block forward, whereas  $F_{1x}$  would generate a moment clockwise and the block would be deflected under the influence of the moment. Meanwhile, the matrixes on the front side of the blocks would be subjected to a force  $F_{2x}$  along the negative x-axis, making the blue block on the front of the red block face a moment  $M_2$  and consequently deflect counterclockwise. By parity of reasoning, the front blocks would deflect clockwise and counterclockwise. As a result, the zigzag structure was formed during this process.

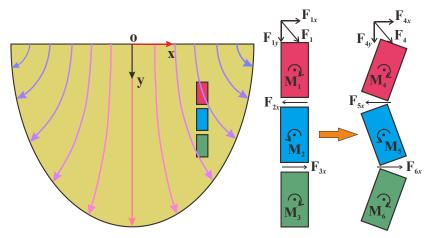


Figure 13: The formation of zigzag arrangement of the blocks. The streamlines with a gradient colour depict the lateral spreading of a mass flow.

# 4.3 Orientation of blocks

365

370

375

380

385

Naturally, the orientation of large blocks is observed in the deposit rock avalanches (Mcdougall, 2016; Fisher and Heiken, 1982; Zhang et al., 2019; Pánek et al., 2008; Dufresne et al., 2021; Deganutti, 2008; Reznichenko et al., 2011; Jomelli and Bertran, 2001; Dufresne, 2017; Shugar and Clague, 2011). Most researchers investigate this phenomenon through field investigation, and they conclude that the phenomenon is closely related to the motion process of rock avalanches. However, it has been unclear how to determine the relationship between the orientation of blocks in deposit and the motion process under different conditions because the geological environments are different for each rock avalanche. Therefore, seven groups of experiments were conducted at different initial configurations of materials to investigate the orientation of the blocks.

Under EP-50, LP-50, and R-50, the long axis of the blocks was multi-orientation, but there were still predominant orientations for each group of the experiments. The existence of predominant orientation at R-50 demonstrated that the variation of orientation of the blocks, which was due to the interaction of the blocks and matrixes, was from disorder to orderly. At EP-50 and LP-50, the unconcentrated orientation of the blocks in the deposit demonstrated a more intensive interaction in interior of the mass flows during the motion because of the lateral spread (Johnson et al., 2012; Mangold et al., 2010; Reznichenko et al., 2011). In these two configurations, the blocks were prone to be affected by the lateral spread because their long axis was along

the motion direction of the mass flows. Therefore, the side force due to lateral spread can easily change the blocks' orientation. A more unconcentrated orientation of the blocks at EP-50 comparing with LP-50 demonstrated a more intensive interaction of collision and friction in the mass flow. At EP-50, LP-50, and R-50, the sides of the blocks were buried almost totally and the contact area between the blocks and the matrixes became large. Hence, the force of the blocks from the matrixes was large and correspondingly, leading to a larger number of deflected blocks.

At LV configuration, parts of the sides of the blocks were buried by the matrixes. Correspondingly, there was a limited contact area between the blocks and the matrixes. Therefore, the force of the blocks from the matrixes was small, correspondingly leading to a small deflection of the blocks. The blocks could keep their initial direction well during motion from the approximate direction of 90° of the blocks in the deposits at the initial configurations of LV. With the increase in slope angles, the extent to which the blocks had a similar orientation decreased. At LV-40, the predominant orientation of the blocks was almost 90°, whereas it had a small deflection and some sub-predominant orientation at LV-50, LV-60, and LV-70. The reason was the impact force increased with the increase in the slope angles (Ji et al., 2019; Asteriou et al., 2012; Li et al., 2015). In summary, the orientation of the blocks in the deposits was less influenced by slope angles at the initial configurations of LV.

#### 4.4 Interaction of blocks and matrix

The matrixes perform various functions during the motion of the mass flows. First, the matrixes serve as a medium during the movement of the blocks (Figure 14(a)). The matrixes beneath the blocks reduced the resistance of the blocks while moving forward because they exhibit a rolling characteristic. In the absence of matrixes, the blocks would slide forward. Second, the matrixes changed the interaction form of the blocks during motion (Figure 14(b)). The presence of the matrixes promoted rolling contact between blocks (Phillips et al., 2006). Third, the matrixes played a buffering role in the blocks at the slope break (Figure 14(c)). The matrixes would fill the slope break and make it a smooth transition from a sharp transition, which led to a gentle process when the blocks get from the inclined plate to the horizontal plate. Therefore, the extent of a change in the orientation of the blocks decreased a lot at the slope break. If the matrixes were absent, the orientation of the blocks would change a lot because of the randomness of the blocks after a colliding at the slope break. That was clearly shown in the experiments of Manzella and Labiouse (2013b). Even at LV configuration, in which the blocks tended to keep their initial orientation, the orientation of the blocks changed a lot because of a collision at the slope break. Fourth, the matrixes exerted a constraining effect on the blocks (Figure 14(d)). The matrixes at the flanks and front of the mass flows would restrict and avoid the separation of the blocks near the boundary during the motion of the mass flows. In the middle part of the mass flows, the matrixes around the blocks limited the change in position and avoided a substantial deflection of the blocks.

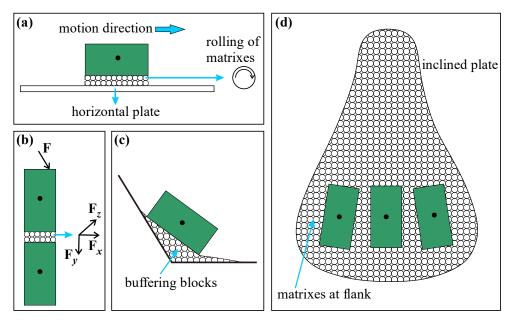


Figure 14: The functions of matrixes in experimental rock avalanches: (a) motion on horizontal plate; (b) interaction of blocks; (c) buffering effect of matrixes; (d) constraining effect of matrixes.

To summarise, the matrixes were crucial during the motion of a mass flow. They can avoid a significant change in the blocks' orientation, act as a buffer for the movement of the blocks to the slope break, and change the friction form of the blocks. In this paper, the matrixes are medium-fine sand. As a result, they were used to simulate rock avalanches containing both disaggregated rocks and granular matrixes. However, for some rock avalanches, the matrixes are cohesive; therefore, the experiments considering different types of matrixes are also worth more studying.

#### 4.5 Comparison with previous studies

420

425

430

435

We know that rock avalanches often evolve from disaggregated rock masses by discontinuity sets. The disaggregated rock masses are blocky and with different orientation of long axis for different rock avalanches (Mavrouli et al., 2015; Pedrazzini et al., 2013; Jaboyedoff et al., 2009; Brideau et al., 2009). In previous studies, Manzella and Labiouse (2009); Manzella and Labiouse (2013a) performed experimental rock avalanches considering conditions the long axis of the blocks was adjusted parallelly to the strike of the inclined plate (LV configuration in this study) and the blocks were filled randomly. In these two conditions, the experimental material was only the blocks but without fine matrixes. However, the rock structures in the source volume of natural rock avalanches are various, including the long axis of the blocks perpendicular to the strike of the sliding surface, parallel to the strike of the sliding surface, perpendicular to the sliding surface. In addition, the materials of rock avalanches also include fine matrixes. Yang et al. (2011) conducted experiments on the materials comprising simultaneously large blocks and granular matrixes. However, the blocks were cubes, therefore the research could not examine the orientation characteristics of large blocks in deposits and was hard to simulate a more realistic rock structures in source volume. In this study, we considered different conditions that rock masses in source volume were disaggregated by discontinuity sets and hence with the long axis of blocky rock masses having different orientations. With the simplified model experiments, the

influence on rock avalanches' mobility, kinematics, morphological parameters and deposit morphology, and interactions between rectangular blocks and matrix due to difference in initial structures of source volume, was discussed. The comparison between this study and aforementioned two studies was showed in Table 2. This research might provide a significant contribution relating characteristics of structural geology of source volume to landslide mobility and deposit morphology. The novelty of this paper is the design of different arrangement of rectangular blocks to simulate the differences in rock structures in the source volume of rock avalanches.

Table 2 Comparisons between previous studies and present study.

Research	Manzella and Labiouse (2009);	Yang et al. (2011)	Present study
contents	Manzella and Labiouse (2013a)		
Materials in	Rectangular blocks.	Cube blocks, gravel, and	Rectangular blocks and sand.
experiments		cobbles.	
of			
arrangement			
of blocks			
Experimental Arrangement of rectangular blocks:		Arrangement of cube blocks:	Arrangement of rectangular blocks:
design of including configurations of LV and		by piling orderly one on top	including configurations of LV, LP,
arrangement R.		of the other.	EP, R, and NB.
of blocks			
Results	Factors such as volume, fall height,	Factors such as gradation and	Factors including structure of the
analysed basal friction angle, material		volume of materials, shape	material before release and slope
	structure of the material before	and initial arrangement of	angle were considered and their
	release, type of slope break, i.e.	blocks, consecutive releases,	influence on rock avalanches'
	curved or sharp angular, were	obstacles, and bottom	mobility, kinematics,
	considered and their influence on	roughness, were considered	morphological parameters and
	apparent friction angle, travel angle	and their influence on rock	deposit morphology, and
	of the centre of mass, deposit length	avalanches' velocity and	interactions between rectangular
	and runout was analysed.	deposit characteristics.	blocks and matrix was discussed.

#### **5 Conclusions**

450

455

440

- (1) The runout of the mass flows varied at different configurations of the blocks. At the initial LV-50, LP-50, and R-50 configurations, the runout of the mass flows was facilitated, which was larger than that at NB-50, but not at EP-50. The runout decreased with the increase in slope angles at configurations of LV.
- (2) The elevation of the deposits at configurations of LV was apparently higher than that at EP-50, LP-50, and R-50 due to the strand protrusion of the blocks. The zigzag structures were caused by an alternate deflection of the blocks for the moment that was generated during the lateral spread of the mass flows.
- (3) At the initial EP configuration, the collision and friction in the mass flow were relatively most intensive according to the small runout, numerous direct contacts of blocks and piling structures. The orientation of the blocks was affected by both the

initial configurations of mass flows and their mobility process.

This paper studied the relation between the disaggregated rock mass by discontinuity sets in source volume of rock avalanches and their corresponding runout and deposit characteristics. This research might provide a significant contribution relating characteristics of structural geology of source volume to landslide mobility and deposit morphology, specifically including the interaction between blocks and matrixes during motion and studies of deposit morphology in relating to rock avalanches' source volume that has been disaggregated by discontinuity sets.

# Availability of data and material

The data used to support the findings of this study are included in this paper.

#### **Author contributions**

460

470

475

Each author contributed to different parts, here listed: Conceptualisation: Zhao Duan and Yan-Bin Wu, Funding acquisition: Zhao Duan, Conducting experiments and analysis: Zhao Duan, Yan-Bin Wu, Qing Zhang, Zhen-Yan Li, Lin Yuan, Kai Wang, and Yang Liu; Writing: Zhao Duan, Yan-Bin Wu.

# **Conflicts of interest**

The authors declare that they have no known competing financial interests or personal relationships that could have appeared to influence the work reported in this paper.

## Acknowledgements

This study would not have been possible without financial support from the Special Fund for the National Natural Science Foundation of China under Grant Nos. 42177155, 41790442, and 41702298. We thank the Team of Native English Editing (https://www.nativeee.com) for an English language editing. We are grateful to Professor Yufeng Wang, Qiangong Cheng, and Ming Zhang for providing the base photos in Figure 1.

# **References:**

Asteriou, P., Saroglou, H., and Tsiambaos, G.: Geotechnical and kinematic parameters affecting the coefficients of restitution for rock fall analysis, International Journal of Rock Mechanics & Mining Sciences, 54, 103-113, 10.1016/j.ijrmms.2012.05.029, 2012.

Baker, J., Gray, N., and Kokelaar, P.: Particle Size-Segregation and Spontaneous Levee Formation in Geophysical Granular Flows, International Journal of Erosion Control Engineering, 9, 174-178, 10.13101/ijece.9.174, 2016.

- Bartali, R., Rodríguez Liñán, G. M., Torres-Cisneros, L. A., Pérez-Ángel, G., and Nahmad-Molinari, Y.: Runout transition and clustering instability observed in binary-mixture avalanche deposits, Granular Matter, 22, 30, 10.1007/s10035-019-0989-0, 2020.
- Bowman, E. T. and Take, W. A.: The runout of chalk cliff collapses in England and France—case studies and physical model experiments, Landslides, 12, 225-239, 10.1007/s10346-014-0472-2, 2015.
  - Brideau, M.-A., Yan, M., and Stead, D.: The role of tectonic damage and brittle rock fracture in the development of large rock slope failures, Geomorphology, 103, 30-49, https://doi.org/10.1016/j.geomorph.2008.04.010, 2009.
- Carter, G.: Rock avalanche scars in the geological record: an example from Little Loch Broom, NW Scotland, Proceedings of the Geologists' Association, 126, 698-711, https://doi.org/10.1016/j.pgeola.2015.09.003, 2015.
  - Charrière, M., Humair, F., Froese, C., Jaboyedoff, M., Pedrazzini, A., and Longchamp, C.: From the source area to the deposit: Collapse, fragmentation, and propagation of the Frank Slide, GSA Bulletin, 128, 332-351, 10.1130/B31243.1, 2016.
  - Cole, P. D., Calder, E. S., Sparks, R. S. J., Clarke, A. B., Druitt, T. H., Young, S. R., Herd, R. A., Harford, C. L., and Norton, G. E.: Deposits from dome-collapse and fountain-collapse pyroclastic flows at Soufrière Hills Volcano, Montserrat, Geological Society, London, Memoirs, 21, 231, 10.1144/GSL.MEM.2002.021.01.11, 2002.

- Corominas, J.: The angle of reach as a mobility index for small and large landslides, Canadian Geotechnical Journal, 33, 260-271, 10.1139/t96-005, 1996.
- Crosta, G. B., Blasio, F. V. D., Locatelli, M., Imposimato, S., and Roddeman, D.: Landslides falling onto a shallow erodible substrate or water layer: an experimental and numerical approach, IOP Conference Series: Earth and Environmental Science, 10.1088/1755-1315/26/1/012004, 2015.
- Crosta, G. B., Blasio, F. V. D., Caro, M. D., Volpi, G., Imposimato, S., and Roddeman, D.: Modes of propagation and deposition of granular flows onto an erodible substrate: experimental, analytical, and numerical study, Landslides, 14, 47–68, https://doi.org/10.1007/s10346-016-0697-3, 2017.
- Dasgupta, P. and Manna, P.: Geometrical mechanism of inverse grading in grain-flow deposits: An experimental revelation,

  Earth-Science Reviews, 104, 186-198, <a href="https://doi.org/10.1016/j.earscirev.2010.10.002">https://doi.org/10.1016/j.earscirev.2010.10.002</a>, 2011.
  - Deganutti, A. M.: The Hypermobility of Rock Avalanches, Dipartimento di Geoscienze, Università degli Studi di Padova, 2008.
  - Delannay, R., Valance, A., Roche4, O., and Richard, P.: Granular and particle-laden flows: from laboratory experiments to field observations, Journal of Physics D: Applied Physic, 50 (5), pp.40. 10.1088, hal-univ-rennes1.archives-ouvertes.fr/hal-01481019, 2017.
- Duan, Z., Cheng, W.-C., Peng, J.-B., Rahman, M. M., and Tang, H.: Interactions of landslide deposit with terrace sediments:

  Perspectives from velocity of deposit movement and apparent friction angle, Engineering Geology, 280, 105913, https://doi.org/10.1016/j.enggeo.2020.105913, 2021.
  - Duan, Z., Cheng, W.-C., Peng, J.-B., Wang, Q.-Y., and Chen, W.: Investigation into the triggering mechanism of loess

- landslides in the south Jingyang platform, Shaanxi province, Bulletin of Engineering Geology and the Environment, 78, 4919-4930, 10.1007/s10064-018-01432-8, 2019.
  - Duan, Z., Wu, Y. B., Tang, H., Ma, J. Q., and Zhu, X. H.: An Analysis of Factors Affecting Flowslide Deposit Morphology Using Taguchi Method, Advances in Civil Engineering, 2020, 1-14, 10.1155/2020/8844722, 2020.
  - Dufresne, A.: Granular flow experiments on the interaction with stationary runout path materials and comparison to rock avalanche events, Earth surface processes and landforms, 37, 1527-1541, 2012.
- Dufresne, A.: Rock Avalanche Sedimentology—Recent Progress, Advancing Culture of Living with Landslides, Cham, 2017//, 117-122,
  - Dufresne, A. and Dunning, S. A.: Process dependence of grain size distributions in rock avalanche deposits, Landslides, 14, 1555-1563, 10.1007/s10346-017-0806-y, 2017.
- Dufresne, A., Bösmeier, A., and Prager, C.: Sedimentology of rock avalanche deposits Case study and review, Earth-Science Reviews, 163, 234-259, 10.1016/j.earscirev.2016.10.002, 2016.
  - Dufresne, A., Zernack, A., Bernard, K., Thouret, J.-C., and Roverato, M.: Sedimentology of Volcanic Debris Avalanche Deposits, in: Volcanic Debris Avalanches: From Collapse to Hazard, edited by: Roverato, M., Dufresne, A., and Procter, J., Springer International Publishing, Cham, 175-210, 10.1007/978-3-030-57411-6 8, 2021.
- Fan, X. y., Tian, S. j., and Zhang, Y. y.: Mass-front velocity of dry granular flows influenced by the angle of the slope to the runout plane and particle size gradation, Journal of Mountain Science, 13, 234-245, 10.1007/s11629-014-3396-3, 2016.
  - Felix, G. and Thomas, N.: Evidence of two effects in the size segregation process in dry granular media, Phys Rev E Stat Nonlin Soft Matter Phys, 70, 051307, 10.1103/PhysRevE.70.051307, 2004.
  - Fisher, R. V. and Heiken, G.: Mt. Pelée, martinique: may 8 and 20, 1902, pyroclastic flows and surges, Journal of Volcanology and Geothermal Research, 13, 339-371, <a href="https://doi.org/10.1016/0377-0273(82)90056-7">https://doi.org/10.1016/0377-0273(82)90056-7</a>, 1982.
- Getahun, E., Qi, S.-w., Guo, S.-f., Zou, Y., and Liang, N.: Characteristics of grain size distribution and the shear strength analysis of Chenjiaba long runout coseismic landslide, Journal of Mountain Science, 16, 2110-2125, 10.1007/s11629-019-5535-3, 2019.
  - Glicken, H., Survey, U. S. G. (Ed.): Rockslide-debris avalanche of May 18, 1980, Mount St. Helens Volcano, Washington, Open-File Report, 98 pp., <a href="https://doi.org/10.3133/ofr96677">https://doi.org/10.3133/ofr96677</a>, 1996.
- Goujon, C., Thomas, N., and Dalloz-Dubrujeaud, B.: Monodisperse dry granular flows oninclined planes: Role of roughness,

  The European Physical Journal E, 11, 147-157, 10.1140/epje/i2003-10012-0, 2003.
  - Gray, J. M. N. T. and Hutter, K.: Pattern formation in granular avalanches, Continuum Mechanics and Thermodynamics, 9, 341-345, 10.1007/s001610050075, 1997.
  - Huang, R. Q. and Liu, W. H.: In-situ test study of characteristics of rolling rock blocks based on orthogonal design, Chinese Journal of Rock Mechanics Engineering Geology(in Chinese), 28, 882-891, 2009.

- Hungr, O.: ROCK AVALANCHE OCCURRENCE, PROCESS AND MODELLING, Landslides from Massive Rock Slope Failure, Dordrecht, 2006//, 243-266,
- Jaboyedoff, M., Couture, R., and Locat, P.: Structural analysis of Turtle Mountain (Alberta) using digital elevation model:

  Toward a progressive failure, Geomorphology, 103, 5-16, <a href="https://doi.org/10.1016/j.geomorph.2008.04.012">https://doi.org/10.1016/j.geomorph.2008.04.012</a>, 2009.
- Ji, Z.-M., Chen, Z.-J., Niu, Q.-H., Wang, T.-J., Song, H., and Wang, T.-H.: Laboratory study on the influencing factors and their control for the coefficient of restitution during rockfall impacts, Landslides, 16, 1939-1963, 10.1007/s10346-019-01183-x, 2019.
  - Johnson, C. G., Kokelaar, B. P., Iverson, R. M., Logan, M., LaHusen, R. G., and Gray, J. M. N. T.: Grain-size segregation and levee formation in geophysical mass flows, Journal of Geophysical Research: Earth Surface, 117, <a href="https://doi.org/10.1029/2011JF002185">https://doi.org/10.1029/2011JF002185</a>, 2012.

565

570

- Jomelli, V. and Bertran, P.: Wet snow avalanche deposits in the french alps: structure and sedimentology, Geografiska Annaler: Series A, Physical Geography, 83, 15-28, 10.1111/j.0435-3676.2001.00141.x, 2001.
- Lan, H., Zhang, Y., Macciotta, R., Li, L., Wu, Y., Bao, H., and Peng, J.: The role of discontinuities in the susceptibility, development, and runout of rock avalanches: a review, Landslides, 19, 1391-1404, 10.1007/s10346-022-01868-w, 2022.
- Li, H., Duan, Z., Wu, Y., Dong, C., and Zhao, F.: The Motion and Range of Landslides According to Their Height, Frontiers in Earth Science, 9, 811, 2021.
  - Li, L. P., Sun, S. Q., Li, S. C., Zhang, Q. Q., Hu, C., and Shi, S. S.: Coefficient of restitution and kinetic energy loss of rockfall impacts, KSCE Journal of Civil Engineering, 20, 2297-2307, 10.1007/s12205-015-0221-7, 2015.
  - Locat, P., Couture, R., Leroueil, S., Locat, J., and Jaboyedoff, M.: Fragmentation energy in rock avalanches, Canadian Geotechnical Journal, 43, 830-851, 10.1139/t06-045, 2006.
  - Lucas, A. and Mangeney, A.: Mobility and topographic effects for large Valles Marineris landslides on Mars, GEOPHYSICAL RESEARCH LETTERS, 34, L10201, https://doi.org/10.1029/2007GL029835, 2007.
  - Magnarini, G., Mitchell, T. M., Goren, L., Grindrod, P. M., and Browning, J.: Implications of longitudinal ridges for the mechanics of ice-free long runout landslides, Earth and Planetary Science Letters, 574, 117177, <a href="https://doi.org/10.1016/j.epsl.2021.117177">https://doi.org/10.1016/j.epsl.2021.117177</a>, 2021.
  - Makris, S., Manzella, I., Cole, P., and Roverato, M.: Grain size distribution and sedimentology in volcanic mass-wasting flows: implications for propagation and mobility, International Journal of Earth Sciences, 109, 2679-2695, 10.1007/s00531-020-01907-8, 2020.
  - Mangeney, A., Roche, O., Hungr, O., Mangold, N., Faccanoni, G., and Lucas, A.: Erosion and mobility in granular collapse over sloping beds, Journal of Geophysical Research, 115, 10.1029/2009jf001462, 2010.
    - Mangold, N., Mangeney, A., Migeon, V., Ansan, V., Lucas, A., Baratoux, D., and Bouchut, F.: Sinuous gullies on Mars: Frequency, distribution, and implications for flow properties, Journal of Geophysical Research, 115,

10.1029/2009je003540, 2010.

- Manzella, I. and Labiouse, V.: Flow experiments with gravel and blocks at small scale to investigate parameters and mechanisms involved in rock avalanches, Engineering Geology, 109, 146-158, 2009.
  - Manzella, I. and Labiouse, V.: Empirical and analytical analyses of laboratory granular flows to investigate rock avalanche propagation, Landslides, 10, 23-26, 10.1007/s10346-011-0313-5, 2013a.
  - Manzella, I. and Labiouse, V.: Empirical and analytical analyses of laboratory granular flows to investigate rock avalanche propagation, Landslides, 10, 23-26, 10.1007/s10346-011-0313-5, 2013b.
- Mavrouli, O., Corominas, J., and Jaboyedoff, M.: Size Distribution for Potentially Unstable Rock Masses and In Situ Rock Blocks Using LIDAR-Generated Digital Elevation Models, Rock Mechanics and Rock Engineering, 48, 1589-1604, 10.1007/s00603-014-0647-0, 2015.
  - McDougall, S.: 2014 Canadian Geotechnical Colloquium: Landslide runout analysis current practice and challenges, Canadian Geotechnical Journal, 54, 605-620, 10.1139/cgj-2016-0104, 2016.
- Moreiras, S. M.: The Plata Rock Avalanche: Deciphering the Occurrence of This Huge Collapse in a Glacial Valley of the Central Andes (33° S), 8, 10.3389/feart.2020.00267, 2020.
  - Pánek, T., Hradecký, J., Smolková, V., and Šilhán, K.: Gigantic low-gradient landslides in the northern periphery of the Crimean Mountains (Ukraine), Geomorphology, 95, 449-473, <a href="https://doi.org/10.1016/j.geomorph.2007.07.007">https://doi.org/10.1016/j.geomorph.2007.07.007</a>, 2008.
- Pedrazzini, A., Jaboyedoff, M., Loye, A., and Derron, M.-H.: From deep seated slope deformation to rock avalanche:

  Destabilization and transportation models of the Sierre landslide (Switzerland), Tectonophysics, 605, 149-168, 
  <a href="https://doi.org/10.1016/j.tecto.2013.04.016">https://doi.org/10.1016/j.tecto.2013.04.016</a>, 2013.
  - Phillips, J. C., Hogg, A. J., Kerswell, R. R., and Thomas, N. H.: Enhanced mobility of granular mixtures of fine and coarse particles, Earth and Planetary Science Letters, 246, 466-480, https://doi.org/10.1016/j.epsl.2006.04.007, 2006.
  - Reznichenko, N. V., Davies, T. R. H., and Alexander, D. J.: Effects of rock avalanches on glacier behaviour and moraine formation, Geomorphology, 132, 327-338, https://doi.org/10.1016/j.geomorph.2011.05.019, 2011.
    - Schwarzkopf, L. M., Schmincke, H.-U., and Cronin, S. J.: A conceptual model for block-and-ash flow basal avalanche transport and deposition, based on deposit architecture of 1998 and 1994 Merapi flows, Journal of Volcanology and Geothermal Research, 139, 117-134, <a href="https://doi.org/10.1016/j.jvolgeores.2004.06.012">https://doi.org/10.1016/j.jvolgeores.2004.06.012</a>, 2005.
- Shea, T. and van Wyk de Vries, B.: Structural analysis and analogue modeling of the kinematics and dynamics of rockslide avalanches, Geosphere, 4, 657-686, 10.1130/GES00131.1, 2008.
  - Shugar, D. H. and Clague, J. J.: The sedimentology and geomorphology of rock avalanche deposits on glaciers, Sedimentology, 58, 1762-1783, <a href="https://doi.org/10.1111/j.1365-3091.2011.01238.x">https://doi.org/10.1111/j.1365-3091.2011.01238.x</a>, 2011.
  - Ui, T., Kawachi, S., and Neall, V. E.: Fragmentation of debris avalanche material during flowage Evidence from the Pungarehu Formation, Mount Egmont, New Zealand, Journal of Volcanology and Geothermal Research, 27, 255-264,

610 <u>https://doi.org/10.1016/0377-0273(86)90016-8,</u> 1986.

615

- Voight, B. and Pariseau, W. G.: Rockslides and Avalanches: An Introduction, in: Developments in Geotechnical Engineering, edited by: Voight, B., Elsevier, 1-67, https://doi.org/10.1016/B978-0-444-41507-3.50008-8, 1978.
- Wang, Y.-F., Cheng, Q.-G., Shi, A.-W., Yuan, Y.-Q., Yin, B.-M., and Qiu, Y.-H.: Sedimentary deformation structures in the Nyixoi Chongco rock avalanche: implications on rock avalanche transport mechanisms, Landslides, 16, 523-532, 10.1007/s10346-018-1117-7, 2019.
- Wang, Y., Cheng, Q., Lin, Q., Li, K., and Shi, A.: Observations on the sedimentary structure of prehistoric rock avalanches on the Tibetan Plateau, China, Earth Science Frontiers (in Chinese), 28, 106-124, 2021.
- Wang, Y., Jiang, W., Cheng, S., Song, P., and Mao, C.: Effects of the impact angle on the coefficient of restitution in rockfall analysis based on a medium-scale laboratory test, Nat. Hazards Earth Syst. Sci., 18, 3045-3061, 10.5194/nhess-18-3045-2018, 2018a.
- Wang, Y. F., Cheng, Q. G., Lin, Q. W., Li, K., and Yang, H. F.: Insights into the kinematics and dynamics of the Luanshibao rock avalanche (Tibetan Plateau, China) based on its complex surface landforms, Geomorphology, 317, 170-183, <a href="https://doi.org/10.1016/j.geomorph.2018.05.025">https://doi.org/10.1016/j.geomorph.2018.05.025</a>, 2018b.
- Welkner, D., Eberhardt, E., and Hermanns, R. L.: Hazard investigation of the Portillo Rock Avalanche site, central Andes,

  Chile, using an integrated field mapping and numerical modelling approach, Engineering Geology, 114, 278-297,

  <a href="https://doi.org/10.1016/j.enggeo.2010.05.007">https://doi.org/10.1016/j.enggeo.2010.05.007</a>, 2010.
  - Yang, Q., Cai, F., Ugai, K., Yamada, M., Su, Z., Ahmed, A., Huang, R., and Xu, Q.: Some factors affecting mass-front velocity of rapid dry granular flows in a large flume, Engineering Geology, 122, 249-260, <a href="https://doi.org/10.1016/j.enggeo.2011.06.006">https://doi.org/10.1016/j.enggeo.2011.06.006</a>, 2011.
- Zeng, Q., Wei, R., McSaveney, M., Ma, F., Yuan, G., and Liao, L.: From surface morphologies to inner structures: insights into hypermobility of the Nixu rock avalanche, southern Tibet, China, Landslides, 10.1007/s10346-020-01503-6, 2020.
  - Zhang, G., Tang, H., Xiang, X., Murat, K., and Wu, J.: Theoretical study of rockfall impacts based on logistic curves, International Journal of Rock Mechanics and Mining Sciences, 78, 133-143, <a href="https://doi.org/10.1016/j.ijrmms.2015.06.001">https://doi.org/10.1016/j.ijrmms.2015.06.001</a>, 2015.
- Zhang, M., Wu, L., Zhang, J., and Li, L.: The 2009 Jiweishan rock avalanche, Wulong, China: deposit characteristics and implications for its fragmentation, Landslides, 16, 893-906, 10.1007/s10346-019-01142-6, 2019.
  - Zhao, B., Zhao, X., Zeng, L., Wang, S., and Du, Y.: The mechanisms of complex morphological features of a prehistorical landslide on the eastern margin of the Qinghai-Tibetan Plateau, Bulletin of Engineering Geology and the Environment, 80, 3423-3437, 10.1007/s10064-021-02114-8, 2021.
- Zhu, L., Liang, H., He, S., Liu, W., Zhang, Q., and Li, G.: Failure mechanism and dynamic processes of rock avalanche occurrence in Chengkun railway, China, on August 14, 2019, Landslides, 17, 943-957, 10.1007/s10346-019-01343-z, 2020.

Zhu, Y., Dai, F., and Yao, X.: Preliminary understanding of the emplacement mechanism for the Tahman rock avalanche based on deposit landforms, Quarterly Journal of Engineering Geology and Hydrogeology, 53, 460-465, 10.1144/qjegh2019-079, 2019.