# Improving Simulations of Zeeman Absorption Spectrum for Hyperspectral Microwave Sounding Applications

Changjiao Dong[1], Fuzhong Weng[2], and Emma Turner[3]

[1]School of Atmospheric Physics, Nanjing University of Information Science and Technology, Nanjing, 210044, China

[2]CMA Earth System Modeling and Prediction Centre (CEMC), China Meteorological Administration, Beijing, 100081, China

[3]European Centre for Medium-Range Weather Forecasts (ECMWF), Reading, RG2 9AX, UK

*Correspondence to*: Fuzhong Weng (fweng58@gmail.com)

**Abstract.** Accurate simulation of microwave oxygen absorption is critical for upper atmospheric remote sensing, yet traditional models suffer from biases due to simplified Zeeman splitting calculations. This study presents the channel parameters of a hyperspectral microwave sounder for near space temperature profiling, built upon the updated microwave Line-by-Line (LBL) model with Larsson (2019) Zeeman coefficients. The Hyperspectral Microwave Atmospheric Sounder (HMAS) is designed as a 60-63 GHz linearly polarized instrument comprising 150 channels, optimized to 39 composite channels for noise reduction. The HMAS channels are validated by comparing weighting functions and simulated brightness temperatures with Special Sensor Microwave Imager/Sounder (SSMIS) upper atmospheric sounding (UAS) channels. The global distribution of brightness temperature differences between HMAS composite channels and SSMIS channels on representative dates shows that the differences are generally within ±1.3 K, confirming the physical consistency of the HMAS channel design. Temperature profile retrieval experiments are conducted using an improved back propagation (BP) neural network with dual residual blocks and squeeze-and-excitation (SE) attention mechanism based on simulated brightness temperatures from both HMAS and SSMIS corresponding channels. The retrieval results show that the HMAS achieves a root mean square error (RMSE) of 7.652±0.389 K, a mean absolute error (MAE) of 4.911±0.282 K, and a coefficient of determination ($R^2$) of 0.915±0.010, while the SSMIS channels 19-24 yield a RMSE of 7.858±0.314 K, a MAE of 5.107±0.208 K, and an $R^2$ of 0.910±0.010. The HMAS shows potential as a payload for future near space exploration missions.

## 1 Introduction

Near space typically refers to the region between 20 and 100 km (60-0.0004 hPa) above sea level, encompassing the stratosphere, mesosphere, and lower thermosphere (Yang et al., 2023). Observation of near space is crucial for weather forecasting and climate analysis (Eckermann et al., 2018; Liu et al., 2007; Zhao et al., 2021). The accuracy of upper atmosphere forecasts can be improved by assimilating near space observations in numerical weather prediction (NWP)

删除[董嫦娇]: channel design

删除[董嫦娇]: RS-LBL model

删除[董嫦娇]: Systematic sensitivity experiments quantify the impacts of magnetic field intensity, propagation angle, and frequency shift on polarized brightness temperatures, with particular focus on detection altitude characteristics that inform channel design.Two key advancements were prese

删除[董嫦娇]: :

删除[Eleanor D]:

删除[Eleanor D]: a

删除[董嫦娇]: Performance benchmarks against SSMIS UAS channels confirm that HMAS delivers unprecedented vertical resolution with reduced noise, establishing it as an optimal payload concept for next-generation space exploration missions targeting the near space atmosphere. Furthermor

systems (Eckermann et al., 2009; Hoppel et al., 2013, 2008; Maurer et al., 2015; Nezlin et al., 2009). However, observations of the middle to upper atmosphere are comparatively rare due to technological and scientific limitations (Dong et al., 2024). Satellite-based data used in NWP assimilation systems at altitudes above 1 hPa are typically from the Microwave Limb Sounder (MLS), the Sounding of the Atmosphere using Broadband Emission Radiometry (SABER), and the Special Sensor Microwave Imager/Sounder (SSMIS) on board the Defense Meteorology Satellite Program (DMSP) satellite (Hoppel et al., 2008). The temperature analysis fields from assimilated SSMIS upper atmospheric sounding (UAS) channels are comparable to those from SABER and MLS data (Hoppel et al., 2013). However, SSMIS has only six UAS channels with low vertical resolution and significant noise. Increasing the amount of high-quality upper atmospheric observation data is critical for weather forecasting and climate analysis.

Infrared hyperspectral instruments have now reached maturity, and their radiance data have been proven to improve NWP forecast accuracy (Aires et al., 2015; Eresmaa et al., 2017; Mcnally et al., 2006). Nevertheless, infrared observations are inherently limited by their shorter wavelengths, which are strongly attenuated by clouds and precipitation, making it difficult to obtain valid measurements under cloudy conditions. Microwave sensors, operating at much longer wavelengths, can penetrate clouds and precipitation, enabling all-weather observations and reaching higher altitudes. Thus, microwave sensors are essential for filling the observational gaps left by infrared instruments, particularly in cloudy conditions and the upper atmosphere. However, microwave sensors have significantly fewer detection channels compared to infrared instruments due to technological limitations (Boukabara and Garrett, 2011). With recent advancements in Fast Fourier Transform spectroscopy technology, microwave radiometers with high spectral resolution have become a more feasible component in remote sensing (Kummerow et al., 2022; Liu et al., 2007). This is highly beneficial because microwave hyperspectral sampling can achieve a high-density weighting function (WF), which facilitates the accurate retrieval of temperature and water vapor profiles and exerts a positive impact on weather forecasting (Aires et al., 2015; Zhang et al., 2025). In recent years, various studies have focused on specific hyperspectral microwave channels and their ability to provide valuable observations for retrieval or NWP systems (Bi et al., 2024; Blackwell et al., 2011; Boukabara and Garrett, 2011). However, most studies primarily reference the Advanced Microwave Sounding Unit (AMSU) or Advanced Technology Microwave Sounder (ATMS) temperature and water vapor detection channels (around 52.6-57.3 GHz and 183.31 GHz), which mainly provide information on tropospheric clouds, precipitation, and surface parameters, with limited upper atmospheric information.

删除[董嫦娇]: However

删除[董嫦娇]: is complementary relationship means that

删除[董嫦娇]: scenes

删除[董嫦娇]: primari

Microwave oxygen ($O_2$) absorption channel observations and simulations above 40 km are affected by Earth's magnetic field. The 2×2 coherency matrix formed radiative transfer equation can describe the Zeeman splitting effect (Lenoir, 1967, 1968; Rosenkranz and Staelin, 1988). To fully investigate the influence of magnetic field parameters on brightness temperature (BT) simulation, Stogryn (1989) derived the magnetic field-related symmetry, systematically revealing the quantitative impact of Zeeman splitting on $O_2$ absorption line simulations (Stogryn, 1989). However, previous research is based on the

Hund's case (b) assumption, which has limitations for low quantum numbers. Larsson et al. (2019) provide a new Zeeman splitting coefficients database, improving the $O_2$ fine-structure lines simulation accuracy (Larsson et al., 2019). A recent study conducted a detailed comparison of the simulation differences between the Hund's case (b) and the Larsson (2019) implementation, including an analysis of the Stokes vector analysis for various oxygen absorption lines (Dong et al., 2026). All simulations in this study are conducted using the RS-LBL model (version 2024), updated with Larsson (2019) Zeeman splitting coefficients (Rosenkranz, 2024) is employed to analyze the oxygen line sensitivity and detection altitude in section 3. In section 4, the hyperspectral channel characteristics for a microwave sounder capable of high-resolution detecting near space temperature are proposed. The Hyperspectral Microwave Atmospheric Sounder (HMAS) channel parameters are validated through comparisons with the SSMIS channel WF and brightness temperature simulations, as well as temperature profile retrieval experiments using an improved back propagation (BP) neural network.

## 2 Methodology

### 2.1 Zeeman Splitting Effect

Under an external magnetic field, the Zeeman splitting effect causes the energy levels of oxygen molecules to split, with the emitted or absorbed radiation originating from the molecule's magnetic dipole (Zeeman, 1897). This phenomenon manifests as a single spectral line splitting into multiple sub-lines with distinct polarization characteristics, a process that must be accounted for in radiative transfer simulations above 40 km.

The g-factor ( $g_{J_N}$ ) quantifies the interaction intensity between the magnetic field and specific energy levels $J_N$ of oxygen molecules. It directly determines the frequency shift and intensity of Zeeman splitting sub-lines, and consequently determines the complex propagation matrix **G** accuracy employed in the vector radiative transfer equation (Rosenkranz and Staelin, 1988). The energy perturbation caused by Zeeman splitting is expressed as (Hill and Gordy, 1954; Lenoir, 1968):

$$\Delta W = -g_{J_N}\mu_B M_J H \tag{1}$$

where $\mu_B$ is the Bohr magneton, $H$ represents the external field strength, $M_J$ is the magnetic quantum number.

Early microwave LBL models, including the Millimeter-Wave Propagation Model (MPM) (Liebe, 1981, 1989; Liebe et al., 1992), the RS-LBL (version 1988) (Rosenkranz and Staelin, 1988), and the Atmospheric Radiative Transfer Simulator (ARTS) prior to 2014 (Larsson et al., 2014), all relied on Hund's case (b) basis wavefunctions to calculate $g_{J_N}$:

$$g_{J_N}^{\text{Hund_b}} = \frac{g_S\left[J(J+1) - N(N+1) + S(S+1)\right]}{2J(J+1)} \tag{2}$$



删除[董嫦娇]: This article provides a brief review of the
删除[董嫦娇]: s
删除[董嫦娇]: and validation against SSMIS observation
删除[董嫦娇]: T
删除[Eleanor D]: update
删除[董嫦娇]: .
删除[董嫦娇]: **icrowave Propagation in Near Space $O_2$**
删除[董嫦娇]: **Coefficient**
删除[董嫦娇]: Under the influence of an external magnet
删除[董嫦娇]: This phenomenon manifests as a single
删除[董嫦娇]: A so-called
删除[董嫦娇]: ‘
删除[董嫦娇]: ’
删除[董嫦娇]: is a key parameter thatcommonly used to
删除[董嫦娇]:
删除[董嫦娇]: thus
删除[董嫦娇]: accuracy of the
删除[董嫦娇]: used
删除[董嫦娇]: In an external magnetic field, $g_{J_N}$ directly
删除[董嫦娇]: of
删除[董嫦娇]: the
删除[董嫦娇]: for the projection of total angular momen
删除[董嫦娇]: Previous
删除[董嫦娇]: such as
删除[董嫦娇]: and
删除[董嫦娇]: as well as
删除[董嫦娇]: calculations before

where $g_S \approx 2.00232$ is the electron spin g-factor. This approximation only considers the electron spin contribution to the Zeeman effect, neglecting higher-order interactions such as molecular self-spin coupling and anisotropic spin effects (Larsson et al., 2014; Lenoir, 1968; Rosenkranz and Staelin, 1988). Consequently, it introduces systematic biases for oxygen absorption lines with low rotational quantum numbers ( $J_N < 10$), which are precisely the lines most sensitive to upper atmospheric temperature.

Larsson et al. (2019) addressed this limitation by incorporating higher-order rotational ( $g_r$ ) and anisotropic spin ( $g_l^e$ ) Zeeman effects into the g-factor calculation:

$$g_{J_N}^{\text{Larsson}} = g_S \cos^2\phi + \left(g_S + 2g_l^e\right)\sin^2\phi + 2g_r \cos\phi \sin\phi \quad (3)$$

where $\phi$ is the diagonalization angle determined by the ratio of the off-diagonal elements to the diagonal elements in the fine-structure Hamiltonians. The derivation of $g_S$, $g_r$, $g_l^e$, and $g_{J_N}$, also with their calculated values for individual $N$ and $J$ states, is provided by Larsson et al. (2019). Eq. (3) captures all coupling contributions from electron spin, anisotropic spin, and molecular rotation, thereby substantially improving the accuracy of Zeeman splitting calculations for low-energy oxygen lines. As demonstrated by Dong et al. (2026), the updated coefficients effectively reduce simulation biases in upper atmospheric sounding channels, a critical improvement for near space temperature profiling.

### 2.2 Oxygen Absorption

Oxygen absorption at microwave frequencies is a key element in atmospheric remote sensing and retrieval. The frequency characteristics and vertical sounding distribution provide critical data for retrieving atmospheric temperature profiles, pressure profiles, and dynamic processes. In practice, $O_2$ absorption is not confined to a single frequency of a spectral line but is broadened by other influences (Tretyakov et al., 2005), primarily collisional or pressure broadening in the troposphere, which can typically be represented by Lorentz lines (Koshelev et al., 2015). In the upper atmosphere, the collisional broadening effect diminishes, and the absorption line broadening is now primarily caused by the relative motion of molecules (Doppler broadening), resulting in Gaussian line shapes (Ben-Reuven and Lightman, 1967; Koshelev et al., 2021; Van Vleck and Weisskopf, 1945).

The $O_2$ absorption coefficient is typically expressed as the per unit volume of oxygen molecules' power absorption efficiency for a specific microwave frequency (Unit: dB/km) (Liebe et al., 1977; Van Vleck, 1947):

$$\alpha(\nu) = n\sum_{j,i} S_{ji}(T) F\left(\nu, \nu_{ji}\right) \quad (4)$$

where $n$ is the number of molecules per unit volume, and $\nu$ is the incident electromagnetic wave frequency. $j$ and $i$ denote two distinct energy levels of an isolated molecule, where $i$ represents the initial state energy level and $j$ the final state. The



删除[董嫦娇]: the $S$
删除[董嫦娇]: electronic spin-quantum number
删除[董嫦娇]: only
删除[董嫦娇]: As a result
删除[董嫦娇]: This model is dominated by the electron sp
删除[董嫦娇]: Recently,
删除[Eleanor D]: (
删除[Eleanor D]: ,
删除[董嫦娇]: provide an updated Zeeman splitting
删除[董嫦娇]: incorporates
删除[董嫦娇]: ,
删除[董嫦娇]: For t
删除[董嫦娇]: the
删除[董嫦娇]: and
删除[董嫦娇]: culation
删除[董嫦娇]: results
删除[董嫦娇]: $g_{J_N=J-1}$, $g_{J_N=J}$,
设置格式[董嫦娇]: 字体: 倾斜
设置格式[董嫦娇]: 字体: 倾斜
设置格式[董嫦娇]: 字体: 非倾斜
删除[董嫦娇]: J $g_{J_N=J+1}$.
删除[董嫦娇]: Please refer to
设置格式[董嫦娇]: 字体颜色: 自动设置
删除[董嫦娇]: (
删除[董嫦娇]: ,
设置格式[董嫦娇]: 字体颜色: 自动设置

absorption or emission process involves the molecule transitioning between energy levels $i$ and $j$. The corresponding transition frequency is $\nu_{ji} = \left(E_j - E_i\right)/h$, where $E_j$ and $E_i$ are the final and initial states' energy, respectively, $h$ is the Planck constant, $S_{ji}\left(T\right)$ the monochromatic intensity of a single molecule at temperature $T$, $F\left(\nu,\nu_{ji}\right)$ is the normalized line shape function, and the summation term Σ represents the sum over all possible energy level transition combinations.

When performing microwave remote sensing and radiative transfer modeling at the atmosphere below 40 km, the $O_2$ absorption coefficient $\alpha$ is used in the scalar radiative transfer equation to express the absorption and emission of the medium. For this study, oxygen absorption lines above 40 km are also affected by the Zeeman splitting (Hill and Gordy, 1954; Meeks and Lilley, 1963). Only the vector radiative transfer equation can fully describe the radiation polarization characteristics at this complex condition. In the vector radiative transfer equation, the scalar $\alpha$ is replaced by the complex propagation matrix **G**, which incorporates $O_2$ absorption properties (Lenoir, 1967):

$$\mathbf{G} = \begin{pmatrix} G_{11} & G_{12} \\ G_{21} & G_{22} \end{pmatrix} \tag{5}$$

with

$$G_{11} = \frac{1}{2}\left(1+\cos\theta\right)^2 \cdot G_{\sigma+} + \frac{1}{2}\left(1-\cos\theta\right)^2 \cdot G_{\sigma-} + \frac{1}{2}\left(1-\cos^2\theta\right) \cdot G_{\pi}$$

$$G_{22} = \frac{1}{2}\left(1-\cos\theta\right)^2 \cdot G_{\sigma+} + \frac{1}{2}\left(1+\cos\theta\right)^2 \cdot G_{\sigma-} + \frac{1}{2}\left(1-\cos^2\theta\right) \cdot G_{\pi}$$

$$G_{12} = G_{21} = \frac{1}{2}\left(1-\cos^2\theta\right) \cdot \left(G_{\sigma+} + G_{\sigma-} - G_{\pi}\right)$$

where $\theta$ is the angle between the magnetic field vector and the electromagnetic wave propagation direction. The calculation principles and formulas for $G_{\pi}$, $G_{\sigma+}$, and $G_{\sigma-}$ are analogous to those in Eq. (4), representing the product of the oxygen Zeeman relative intensities and line shape functions. The $O_2$ line Zeeman component frequency shift and relative intensity calculation can be found in (Lenoir, 1968). The line shape is calculated using the complex error function (CERROR), as referenced in (Hui et al., 1978).

### 2.3 Radiative Transfer Transmittance Solution

The $g_{J_N}$ determines the frequency shift and intensity of the oxygen line Zeeman components, influencing the absorption and radiance calculations. Therefore, this study calculates **G** based on both $g_{J_N}^{\text{hund_b}}$ and $g_{J_N}^{\text{Larsson}}$ and determines the upward radiance. When dealing with the Zeeman effect radiance above 40 km, the BT coherence matrix can be solved directly.

Incident radiance is calculated through the scalar radiative transfer model. The BT matrix is a 2×2 matrix, with diagonal elements corresponding to linear-based or circular-based polarized brightness temperatures (Lenoir, 1968).

Alternatively, the total transmittance is calculated based on the oxygen absorption coefficient, and then the BT can be derived. Considering only oxygen absorption, the specific frequency transmittance $\Gamma_\nu(z)$ of the $O_2$ absorption line from altitude $z$ to the top of the atmosphere relates to the optical depth $\tau_\nu$ and $O_2$ absorption coefficient $\alpha(\nu,z)$ as follows (Meeks and Lilley, 1963; Weng, 2017):

$$\Gamma_\nu(z) = \exp\left(-\frac{\tau_\nu}{\mu}\right) = \exp\left(-\int_z^\infty \frac{\alpha(\nu,z)}{\mu} dz\right) \tag{6}$$

where $\alpha(\nu,z)$ is the volumetric absorption coefficient in unit of $cm^{-1}$, $\mu = \cos(\beta)$, $\beta$ is the zenith angle. For atmospheric detection, the integral term in Eq. (6) is obtained by summing all absorptions within each thin layer.

For the atmosphere above 40 km, the cumulative product matrix **P** is solved through matrix diagonalization (Rosenkranz and Staelin, 1988). Starting from the top of the atmosphere, **P** is accumulated layer by layer as $\mathbf{P}_{i-1} = \mathbf{P}_i\mathbf{E}_i$, where $\mathbf{E}_i = \exp(-\mathbf{G}\Delta z_i)$ is the exponential matrix for layer $i$ based on the complex propagation matrix **G**, and $\Delta z_i$ is the propagation path length. **P** is a 2×2 complex matrix that shares the same properties as **G**. Based on **P**, the transmittance matrix $\mathbf{\Gamma}$ can be calculated:

$$\mathbf{\Gamma} = \begin{pmatrix} \Gamma_{VV} & \Gamma_{VH} \\ \Gamma_{HV} & \Gamma_{HH} \end{pmatrix} \tag{7}$$

where the diagonal elements $\Gamma_{VV}$ and $\Gamma_{HH}$ represent the vertical and horizontal total transmittance, respectively, while the off-diagonal elements measure the coherence of the diagonal elements. The transmittance within each layer is multiplied by the atmospheric temperature, and then summed across the entire atmospheric column to obtain the brightness temperature matrix.

The relation between the BT matrix diagonal element and the Stokes parameters is:

$$T_{B_{VV}} = (I+Q)/2\,; \quad T_{B_{HH}} = (I-Q)/2\,; \quad T_{B_{VH}} = (U-iV)/2 \tag{8}$$

$$T_{B_{RC}} = (I-V)/2\,; \quad T_{B_{LC}} = (I+V)/2\,; \quad T_{B_{RL}} = (Q+iU)/2 \tag{9}$$

where $I$ is the total radiance intensity, $Q$ is the difference between vertical and horizontal linear polarization, $U$ is the difference between ±45° linear polarization, and $V$ is the difference between left- and right-hand circular polarization (Eriksson et al., 2011).

## 3 Oxygen Absorption Line Characteristics

### 3.1 Model Simulation Differences and Magnetic Field Dependence

The BT matrix and Stokes vector for different oxygen absorption lines based on $g_{J_N}^{\text{hund_b}}$ and $g_{J_N}^{\text{Larsson}}$ are calculated using the different versions RS-LBL model. The simulations use the 84-layer ECMWF profile dataset developed by Peter Rayer (Met Office) as input, with geomagnetic field parameters obtained from the International Geomagnetic Reference Field (IGRF-13) (Alken et al., 2021). As detailed in Dong et al. (2026), the $7^+$ line exhibits the largest simulation difference, approaching 1 K at a frequency shift of approximately 1.4 MHz, while the $1^-$ line exhibits differences exceeding 0.5 K in the *I*, *Q*, and *V* components within ±2 MHz frequency shift. The *U* component shows minimal differences across all lines. These results confirm that updating the Zeeman splitting coefficients improves the accuracy of oxygen absorption line simulations, particularly for low $J_N$ energy levels. Figure 1 shows the Stokes parameter differences between the Hund's case (b) and the Larsson (2019) implementations for the selected $O_2$ lines.

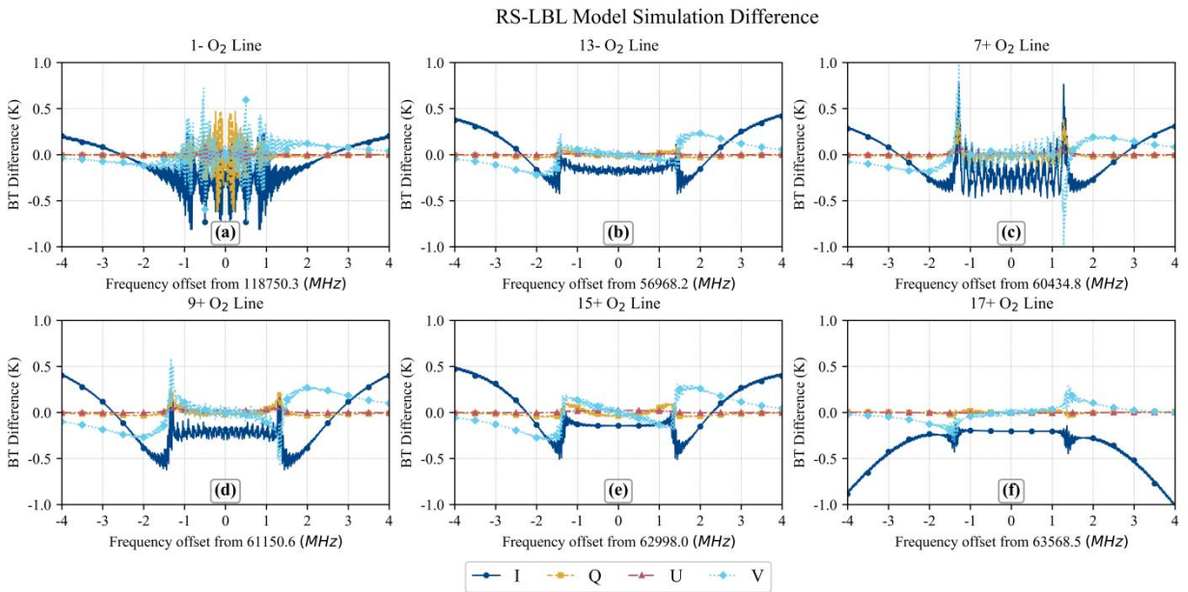



**Figure 1:** Stokes vector simulation differences between the Hund (b) and Larsson (2019) implementation of the microwave LBL model for total magnetic field strength $B_e$ = 0.5 Gauss, $\theta$ = 135°: (**a**) $1^-$ (118.7503 GHz); (**b**) $13^-$ (56.9682 GHz); (**c**) $7^+$ (60.4348 GHz); (**d**) $9^+$ (61.1506 GHz); (**e**) $15^+$ (62.9980 GHz); and (**f**) $17^+$ (63.5685 GHz) line (The dark blue (solid) line represents *I*, yellow (dashed) line represents *Q*, red (dashed-dotted) line represents *U*, and light blue (dotted) lines for *V*).

Dong et al. (2026) further investigates the dependence of oxygen absorption lines on magnetic field parameters through two sets of experiments. For the first experiment, cos($\theta$) is fixed at 0.7 while $B_e$ varies from 0.2 to 0.7 Gauss. In the second, $B_e$ is fixed at 0.45 Gauss while $\theta$ varies from 0° to 180°. This results reveal that the $7^+$ line is sensitive to moderate magnetic field

删除[董嫦娇]: **Simulation Results**

删除[董嫦娇]: **Microwave LBL Model Simulations**

删除[董嫦娇]: , respectively

删除[董嫦娇]: shows

删除[Eleanor D]: select

删除[董嫦娇]: The sensitivity analysis further reveals that the $7^+$ line is sensitive to moderate magnetic field strength (0.35-0.55 Gauss), while the $1^-$ line is sensitive to strong magnetic fields (0.5-0.7 Gauss). Left-hand circular and vertical linear polarization are more sensitive to magnetic field parameter changes. These findings confirm that updating the Zeeman splitting coefficients improves simulation accuracy and provide a theoretical reference for channel polarization selection.

strength (0.35-0.55 Gauss), within which left-hand circular and vertical linear polarization exhibit pronounced low-temperature depressions. The $1^-$ line, by contrast, is more sensitive to strong magnetic fields (0.5-0.7 Gauss). Regarding angular dependence, linear polarization brightness temperatures are symmetric about $\theta = 90°$, while left- and right-hand circular polarizations exhibit mirror symmetry. These findings provide a theoretical reference for channel polarization selection.

### 3.2 Analysis of Detection Altitude

Most past studies are based on fixed magnetic field strengths or angles, which are not sufficiently representative of the real Earth's atmospheric environment. This section performs three sets of cyclic calculations for $B_e$, $\theta$, and frequency shift from the $O_2$ line center: 1. $B_e$ ranges from 0.2-0.7 Gauss with steps of 0.1 Gauss. 2. $\theta$ ranges from 0° to 180° in steps of 1°. 3. The frequency is determined by a 10 MHz shift from the $O_2$ absorption line center in steps of 0.1 MHz. The detection altitude of the 50-70 GHz oxygen absorption line under varying frequency and magnetic field conditions is analyzed, providing theoretical support for designing microwave sounder channels in near space environments. $7^+$ line vertical linear polarization BT is calculated and shown in Fig. 2, since past research focused more on circular polarization.

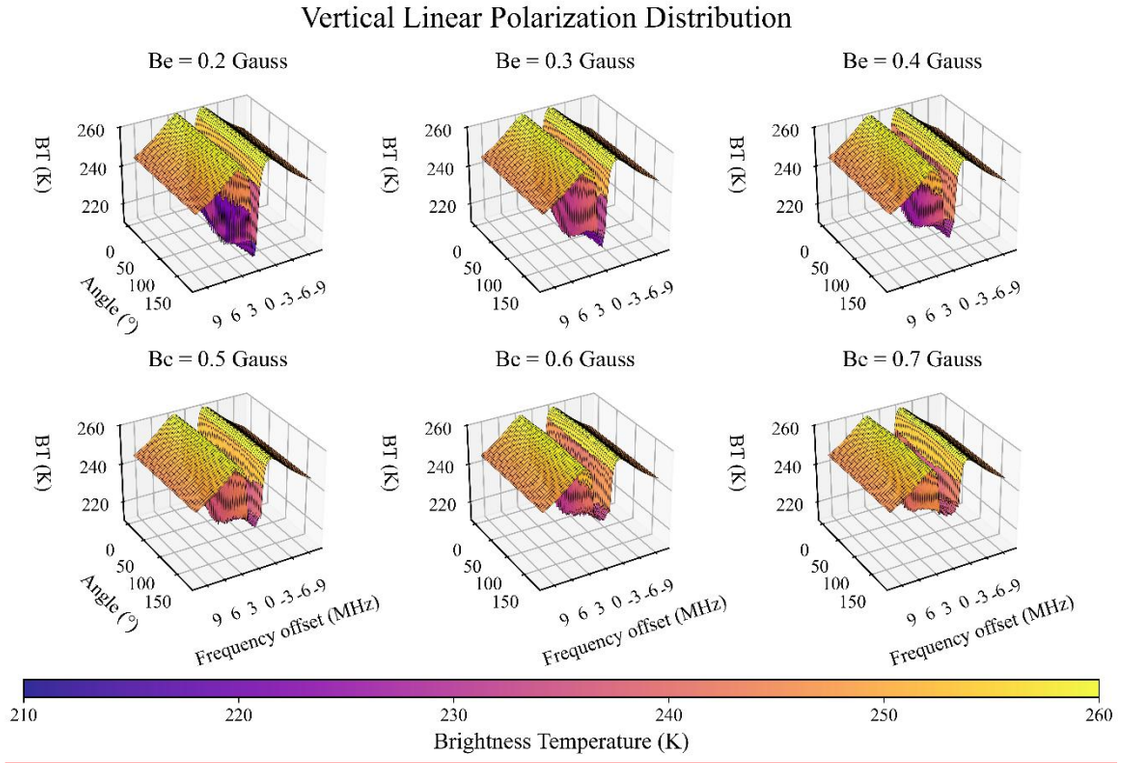



**Figure 2:** $7^+$ line vertical linear polarization simulated brightness temperature distribution at 3 cyclic conditions: frequency shift of oxygen absorption line center from -10 MHz to 10 MHz in steps of 0.1 MHz, $B_e$ ranges from 0.2-0.7 Gauss in steps of 0.1 Gauss, and $\theta$ ranges from 0° to 180° in steps of 1°.

删除[董嫦娇]: Figure 1 shows the Stokes parameter differences between the Hund's case (b) and Larrson (2019) implementations for the different $O_2$ lines. From Fig. 1, the $7^+$ line $V$ component exhibits the greatest absolute BT difference compared to other lines, approaching 1 K at a frequency sl

删除[董嫦娇]: **3**

删除[董嫦娇]: 5

Each subplot of magnetic field strength in Fig. 2 displays two "peaks" (yellow high-BT) and one "valley" (purple low-BT). From Fig. 2, the "peaks" are primarily located near the 3 MHz frequency shift, with brightness temperatures reaching 260 K, while the "valleys" are mainly around the $O_2$ line center, with brightness temperatures as low as 220 K. When $B_e$ increases from 0.2 Gauss to 0.7 Gauss, the "peaks" pattern remains virtually unchanged, but the "valleys" gradually contract upward, meaning that the brightness temperature upward with increasing magnetic field strength. The slope between "peak" and "valley" exhibits distinct temperature gradient variations (e.g., the boundary between yellow and orange), which are nearly unchanged with $\theta$. This phenomenon indicates that the simulated brightness temperature increases with frequency shift and that the BT is unaffected by the observed angle. According to the standard atmospheric temperature profile distribution, the "peak" in Fig. 2 corresponds to an altitude of approximately 1 hPa. The simulated brightness temperature increases initially and then decreases with frequency shift, meaning the detection altitude gradually decreases.

When quantitatively analyzing detection altitude, weighting functions are typically employed, with the peak height corresponding to the altitude where the radiation signal is strongest (Zhang et al., 2024). The WF is typically defined as a function of single-layer ($l$) atmospheric pressure ($P_l$) and the transmittance at specific frequencies ($v$) (Rosenkranz and Staelin, 1988):

$$WF = \left(\Gamma_{l-1} - \Gamma_l\right) / \left[\ln\left(P_l\right) - \ln\left(P_{l-1}\right)\right] \tag{10}$$

when $l = 0$ (top of atmosphere):

$$WF = \left(1 - \Gamma_l\right) / \left[\ln\left(P_{l+1}\right) - \ln\left(P_l\right)\right] \tag{11}$$

The avoidance of linear polarization in near space microwave remote sensing is largely due to its "double-peaked" WF (Rosenkranz and Staelin, 1988). According to Fig. 2, the locations where the WF exhibits "double-peaked" largely correspond to stronger magnetic field strength, meaning that linear polarization introduces uncertainty in observations and simulations of the polar regions or areas prone to electromagnetic storms. However, this "double-peaked" phenomenon changes with frequency shift. When the frequency shift exceeds 2 MHz, the magnetic field strength has a negligible effect on the temperature detection. Furthermore, linear polarization offers significant symmetry advantages at the observed angle. This is important for profiling the near space vertical atmosphere if the same oxygen absorption channel can be used for both linearly and circularly polarized detection.

To achieve full-polarization near space atmospheric detection, it is essential to investigate the distribution characteristics of the "double-peak" weighting function in linear polarization. The "double-peak" WF is more likely to appear at strong $B_e$ (Fig. 2). Therefore, this study fixed the magnetic field strength and $\cos(\theta)$ at 0.63 Gauss and 0.9, respectively. The fine-structure weighting function for the $7^+$ (60.4348 GHz) line and its 2 MHz frequency shift in 0.05 MHz is shown in Fig. 3. From Fig. 3,



删除[董嫦娇]:

设置格式[董嫦娇]: 题注

删除[董嫦娇]: 5


删除[董嫦娇]: 5

删除[董嫦娇]: (corresponding to Fig. 3)

删除[董嫦娇]: (consistent with the contour line structure

删除[董嫦娇]: 5

Vertical Line

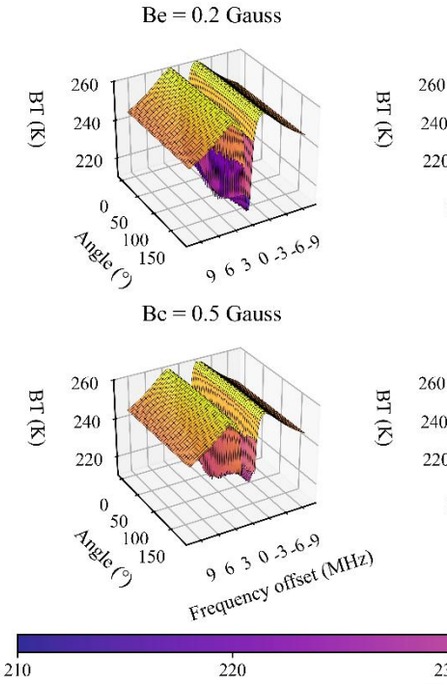


删除[董嫦娇]:

删除[董嫦娇]: 5

删除[董嫦娇]: (Fig. 3)

删除[董嫦娇]: It should be

删除[董嫦娇]: 5

删除[董嫦娇]: 6

删除[董嫦娇]: 6

the WF is relatively narrow when the $7^+$ line frequency shift is within 0.5 MHz, and the peak heights for both vertical and horizontal polarization are approximately 60 km (0.1 hPa). The weighting function starts to broaden at frequency shift 0.75 MHz, gradually exhibiting "double-peaked". The altitudes of "double-peaked" are approximately 50 and 65 km, with the lower-level signal being stronger, particularly in horizontal polarization. The "double-peak" structure gradually weakens as the frequency shift continues to increase, and the WF signal of the lower atmosphere gradually intensifies. At a frequency shift of 2 MHz, it exhibits a perfect narrow "single-peaked" WF.

Therefore, for linear polarization, oxygen line frequency shifts outside the range of 0.8-1.8 MHz can be selected to avoid the effects of the "double peak". This selection of extreme cases aims to enable detailed simulation and analysis of oxygen lines under strong magnetic field conditions. Reality, not all oxygen absorption lines exhibit a "double peak" (such as $17^+$) at high magnetic field strengths, which also depends on the intensity of the oxygen absorption line itself. In actual detection, multiple oxygen absorption lines are typically combined to diminish the influence of a single line.

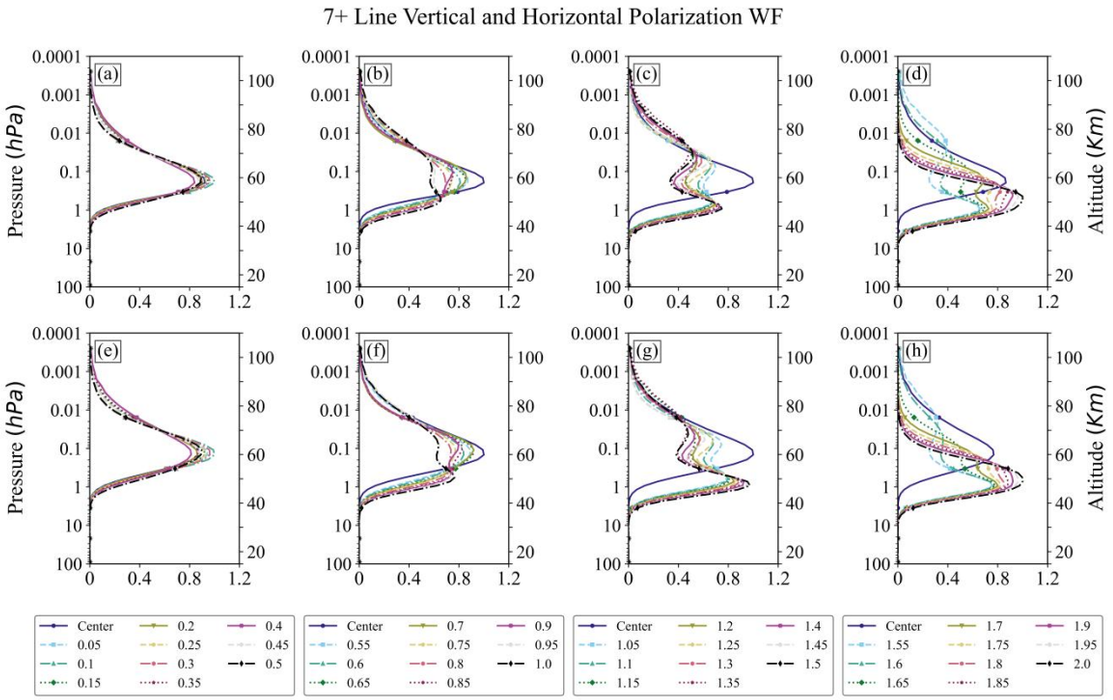



**Figure 3:** Weighting Functions of $7^+$ line frequency shifts from 0.05-2 MHz at $B_e$ of 0.63 Gauss and $\cos(\theta)$ of 0.9 for the (**a-d**) vertical linear polarization, and (**e-h**) horizontal linear polarization. (**a, e**) represent frequency shifts of 0.05-0.5 MHz from the $7^+$ line center, (**b, f**) represent frequency shifts of 0.55-1.0 MHz, (**c, g**) represent shifts of 1.05-1.5 MHz, (**d, h**) represent shifts of 1.55-2.0 MHz. Colors denote the magnitude of the shift, with black lines indicating the $7^+$ line.

删除[董嫦娇]: (Figure 6a)

删除[董嫦娇]: (Fig. 6e)

删除[董嫦娇]: **6**

## 4 Microwave Sounder in Near Space

### 4.1 SSMIS UAS Channel Characteristics

The SSMIS on board DMSP satellites features six channels capable of detecting altitudes from 20 to 100 km (Swadley et al., 2008). To achieve upper atmospheric detection, a narrow bandwidth is currently the preferred method (Lipton, 2003). However, a single narrow bandwidth often comes with significant channel noise, which may render the data unusable. The relationship between channel noise and bandwidth is as follows (Zhang et al., 2024):

$$NEDT = \left(T_r + T_a\right) / \sqrt{BW \cdot t} \tag{12}$$

where $NEDT$ denotes the channel noise equivalent delta temperature (unit: K), $BW$ represents the channel bandwidth (unit: MHz), $T_r$ is the receiver equivalent noise temperature (unit: K), $T_a$ is the antenna temperature (unit: K), and $t$ is the integration time (unit: s).

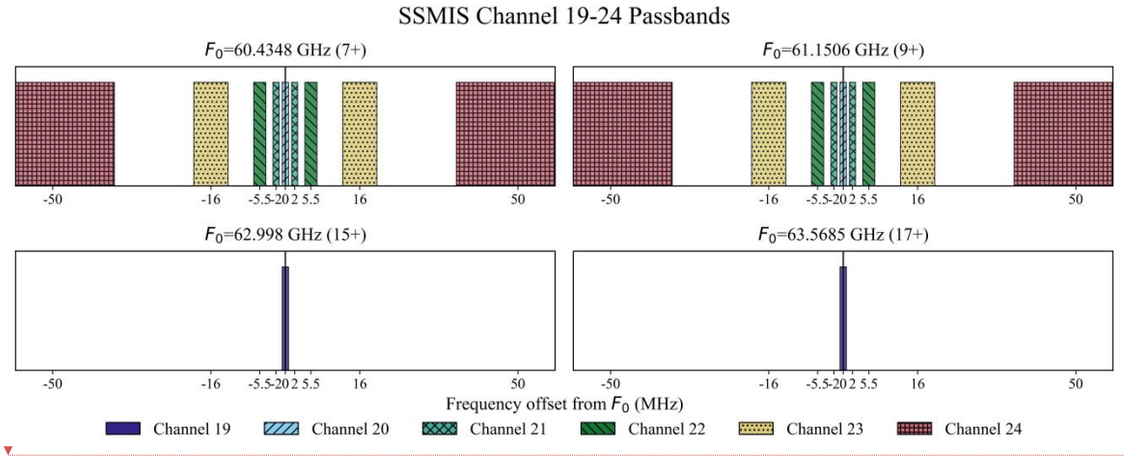



**Figure 4:** SSMIS channel 20-24 (upper panel) and channel 19 (bottom panel) passband distribution. The x-axis labels the passband frequency shift from the $O_2$ line, while the "rectangular" width indicates the bandwidth.

To reduce noise, channels are typically designed as a double- or quadruple-sideband, and multi-line cooperative detection can significantly improve *NEDT* performance (Kunkee et al., 2008; Pardo et al., 1998). In SSMIS channel 19, the local oscillator (LO) is positioned between the $15^+$ and $17^+$ line frequencies, while channels 20-24 are between the $7^+$ and $9^+$ lines to achieve multiband detection. These UAS channels are designed for circular polarization. The SSMIS channel passband distribution is shown in Fig. 4. SSMIS channel 20 has two passbands with bandwidths of approximately 1.35 MHz covering the $7^+$ and $9^+$ lines, respectively. Channel 19 also features two passbands with bandwidths of approximately 1.35 MHz, covering the $15^+$ and $17^+$ lines, respectively. Channel 21 has four passbands, each bandwidth of approximately 1.3 MHz, positioned 2 MHz on either side of the $7^+$ and $9^+$ oxygen absorption lines. Channels 22-24 also feature four passbands centered at the $7^+$ and $9^+$ oxygen line frequencies, with frequency shifts of ±5.5 MHz, ±16 MHz, and ±50 MHz, respectively.

删除[董嫦娇]: , which

删除[董嫦娇]:

删除[董嫦娇]: To reduce noise, channels are typically designed as a double- or quadruple-sideband, and multi-line cooperative detection can significantly improve *NEDT* performance (Kunkee et al., 2008; Pardo et al., 1998). In SSMIS channel 19, the local oscillator (LO) is positioned between the $15^+$ and $17^+$ line frequencies, while channels 20-24 are between the $7^+$ and $9^+$ lines to achieve multiband detection. These UAS channels are designed for circular polarization. The SSMIS channel passband distribution is shown in Fig. 7. SSMIS channel 20 has two passbands with bandwidths of approximately 1.35 MHz covering the $7^+$ and $9^+$ lines, respectively. Channel 19 also features two passbands with bandwidths of approximately 1.35 MHz, covering the $15^+$ and $17^+$ lines, respectively. Channel 21 has four passbands, each bandwidth of approximately 1.3 MHz, positioned 2 MHz on either side of the $7^+$ and $9^+$ oxygen absorption lines. Channels 22-24 also feature four passbands centered at the $7^+$ and $9^+$ oxygen line frequencies, with frequency shifts of ±5.5 MHz, ±16 MHz, and ±50 MHz, respectively. Their respective bandwidths are 2.6 MHz, 7.35 MHz, and 26.5 MHz. The detection altitude of the channel decreases as the oxygen line shift increases, enabling detection of near space environments (Swadley et al., 2008).

删除[董嫦娇]: **7**

Their respective bandwidths are 2.6 MHz, 7.35 MHz, and 26.5 MHz. The detection altitude of the channel decreases as the oxygen line shift increases, enabling detection of near space environments (Swadley et al., 2008).

### 4.2 HMAS Passband Distribution

The SSMIS is relatively mature, with remaining instruments approaching the end of their operational lifetimes. This study proposes a high-resolution microwave sounder based on the same design principles as SSMIS, but with linear polarization, aiming to increase near space observations, with the new channels complementing and extending the existing SSMIS UAS channels. To achieve high-resolution continuous detection, this study introduces channels that utilize new oxygen line combinations around $11^+$ and $13^+$ based on the existing channel specifications. The first channel bandwidth centered on each oxygen line is set to 1.8 MHz to reduce channel noise. Then a second channel with a bandwidth of 2 MHz is set near each further oxygen line offset of 1.9 MHz. Thanks to recent microwave hyperspectral detection technology, the channels away from the absorption line centers can all be set to narrow values, so the bandwidths of the remaining channels are all set to 2.2 MHz.

Based on these design principles, multiple channels with narrow bandwidth can be formed on either side of the $7^+$, $9^+$, $11^+$, $13^+$, $15^+$, and $17^+$ oxygen lines. All these channels, covering both sides of the oxygen absorption lines, can theoretically be implemented on the same instrument named Hyperspectral Microwave Atmospheric Sounder (HMAS). Figure 5 shows the HMAS partly channel distribution, where the top panel, middle panel, and bottom panel groups represent three sets of detection channels designed with different oxygen line combinations, with the corresponding passbands for the SSMIS channels overlaid. From Fig. 5, approximately 150 channels of the HMAS achieve continuous frequency coverage within the $7^+$, $9^+$, $11^+$, $13^+$, $15^+$, and $17^+$ oxygen line offsets to ±26 MHz with detection frequency from about 60-63 GHz.

To compare with SSMIS, the HMAS 150 channels are set to passband and combined into 39 composite channels. In HMAS 39 composite channels, there are 3 double-sideband and 36 quadruple-sideband composite channels. For microwave radiometers, the $T_a$ is typically assumed to be 290 K, and the $T_r$ is calculated based on frequency, approximately 300 K at 60 GHz (Zhang et al., 2024). In this study, the system noise temperature is set to 800 K ( $T_r + T_a = 800\text{K}$ ). To reduce channel noise, the integration time is extended to approximately 44.3 ms. This can be achieved through software averaging (i.e., accumulating and averaging observations from the same channel over multiple scan cycles), which is within the allowable range of satellite scan periods. According to Eq. (12), the *NEDT* of HMAS Composite Channel 1 is approximately 2 K. Table 1 gives the HMAS channel parameters.

删除[董嫦娇]: .

删除[董嫦娇]: A

删除[董嫦娇]: All these channel coverage or side of the oxygen absorption line

删除[董嫦娇]: 8

删除[董嫦娇]: 8

删除[董嫦娇]: we plan to extend the integration time to approximately 44.3 ms.

**Table 1** HMAS channel characteristics.

| Channel | Center Frequency（GHz） | 3-db Width（MHz） | NEDT（K） |
|---|---|---|---|
| 1 | 60.7927±0.35790 | 1.8 | 2.00 |
| 2 | 60.7927±0.35790±0.0019 | 2.0 | 1.34 |
| 3 | 60.7927±0.35790±0.0040 | 2.2 | 1.28 |
| 4 | 60.7927±0.35790±0.0062 | 2.2 | 1.28 |
| 5 | 60.7927±0.35790±0.0084 | 2.2 | 1.28 |
| 6 | 60.7927±0.35790±0.0106 | 2.2 | 1.28 |
| 7 | 60.7927±0.35790±0.0128 | 2.2 | 1.28 |
| 8 | 60.7927±0.35790±0.0150 | 2.2 | 1.28 |
| 9 | 60.7927±0.35790±0.0172 | 2.2 | 1.28 |
| 10 | 60.7927±0.35790±0.0194 | 2.2 | 1.28 |
| 11 | 60.7927±0.35790±0.0216 | 2.2 | 1.28 |
| 12 | 60.7927±0.35790±0.0238 | 2.2 | 1.28 |
| 13 | 60.7927±0.35790±0.0260 | 2.2 | 1.28 |
| 14 | 62.1057±0.30550 | 1.8 | 2.00 |
| 15 | 62.1057±0.30550±0.0019 | 2.0 | 1.34 |
| 16 | 62.1057±0.30550±0.0040 | 2.2 | 1.28 |
| 17 | 62.1057±0.30550±0.0062 | 2.2 | 1.28 |
| 18 | 62.1057±0.30550±0.0084 | 2.2 | 1.28 |
| 19 | 62.1057±0.30550±0.0106 | 2.2 | 1.28 |
| 20 | 62.1057±0.30550±0.0128 | 2.2 | 1.28 |
| 21 | 62.1057±0.30550±0.0150 | 2.2 | 1.28 |
| 22 | 62.1057±0.30550±0.0172 | 2.2 | 1.28 |
| 23 | 62.1057±0.30550±0.0194 | 2.2 | 1.28 |
| 24 | 62.1057±0.30550±0.0216 | 2.2 | 1.28 |
| 25 | 62.1057±0.30550±0.0238 | 2.2 | 1.28 |
| 26 | 62.1057±0.30550±0.0260 | 2.2 | 1.28 |
| 27 | 63.28325±0.28525 | 1.8 | 2.00 |
| 28 | 63.28325±0.28525±0.0019 | 2.0 | 1.34 |
| 29 | 63.28325±0.28525±0.0040 | 2.2 | 1.28 |
| 30 | 63.28325±0.28525±0.0062 | 2.2 | 1.28 |

| | | | |
|---|---|---|---|
| 31 | 63.28325±0.28525±0.0084 | 2.2 | 1.28 |
| 32 | 63.28325±0.28525±0.0106 | 2.2 | 1.28 |
| 33 | 63.28325±0.28525±0.0128 | 2.2 | 1.28 |
| 34 | 63.28325±0.28525±0.0150 | 2.2 | 1.28 |
| 35 | 63.28325±0.28525±0.0172 | 2.2 | 1.28 |
| 36 | 63.28325±0.28525±0.0194 | 2.2 | 1.28 |
| 37 | 63.28325±0.28525±0.0216 | 2.2 | 1.28 |
| 38 | 63.28325±0.28525±0.0238 | 2.2 | 1.28 |
| 39 | 63.28325±0.28525±0.0260 | 2.2 | 1.28 |

The integration time for the SSMIS channel 19-23 is 25.2 ms, and for channel 24 is 12.6 ms, which are fixed hardware parameters determined by the radiometer design (Swadley et al., 2008). For comparison, the system noise is also set to 800 K when calculating the *NEDT* for SSMIS in this study. From Eq. (12), the SSMIS Channels 19-20 *NEDT* is approximately 3 K, which is highly consistent with the reported (2.7 K) (Kunkee et al., 2008). The number of channels and vertical resolution in this study are significantly higher than those of SSMIS, allowing for an appropriate extension of the integration time.

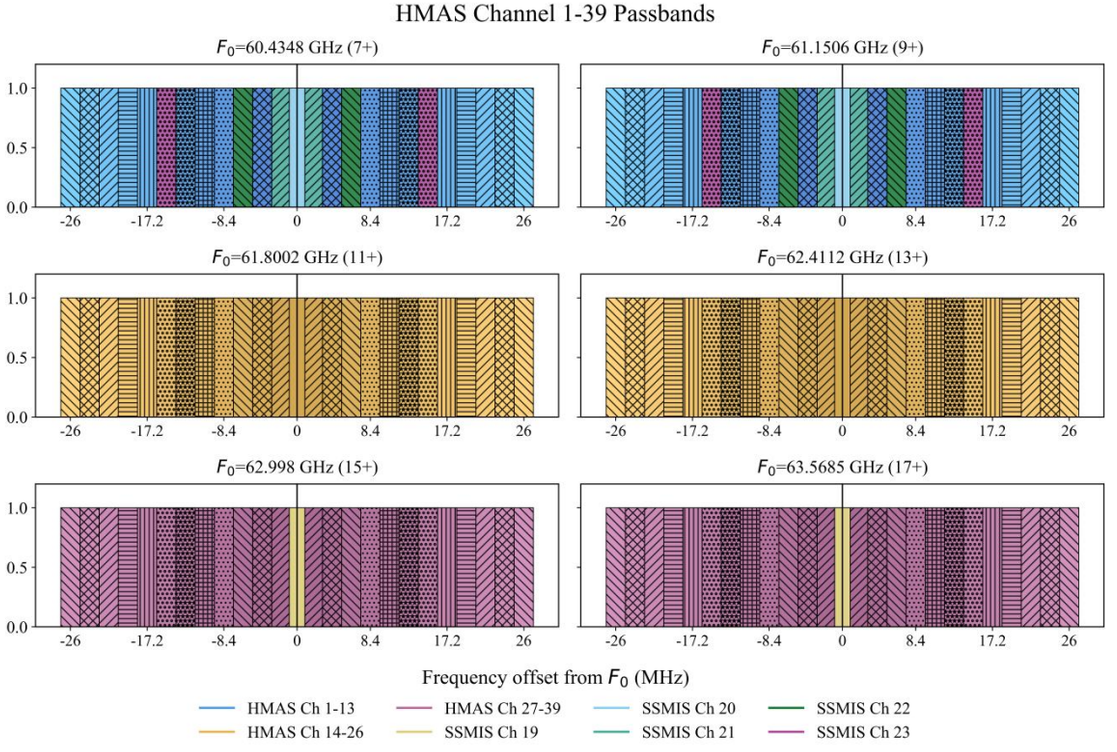



**Figure 5:** HMAS all-channel passband distribution. The orange, pink, bright green, dark blue, and purple lines in the $7^+$, $9^+$, $15^+$, and $17^+$ diagrams represent the SSMIS channels 19, 20, 21, 22, and 23 passbands, respectively.

删除[董嫦娇]: **8**

Based on the same principle, high-resolution channels that do not utilize microwave hyperspectral detection technology are also proposed in this study. A double-sideband channel with a bandwidth of 1.8 MHz was set covering the oxygen absorption line. Four quadruple-sideband channels were established at frequencies progressively shifting away from the absorption line center: 1.9 MHz, 4.0 MHz, 6.5 MHz, 9.9 MHz, 15.5 MHz, and 26 MHz, with respective bandwidths of 1.9 MHz, 2.1 MHz, 2.7 MHz, 3.9 MHz, 7.1 MHz, and 13.7 MHz. Table 2 gives the Microwave Atmospheric Sounder (MAS) channel parameters suitable for conventional detection techniques. This is essentially an extension of SSMIS channels 19-23, incorporating the $11^{+}$ and $13^{+}$ lines. However, the most significant difference between MAS and SSMIS is its capability to perform linear or circular polarization detection. The MAS can be manufactured with reference to the structure of ATMS or AMSU to achieve end-to-end calibration.

**Table2** MAS channel characteristics.

| Channel | Center Frequency（GHz） | 3-db Width（MHz） | NEDT（K） |
|---|---|---|---|
| 1 | 60.7927±0.35790 | 1.8 | 2.00 |
| 2 | 60.7927±0.35790±0.0019 | 1.9 | 1.38 |
| 3 | 60.7927±0.35790±0.0040 | 2.1 | 1.31 |
| 4 | 60.7927±0.35790±0.0065 | 2.7 | 1.16 |
| 5 | 60.7927±0.35790±0.0099 | 3.9 | 0.96 |
| 6 | 60.7927±0.35790±0.0155 | 7.1 | 0.71 |
| 7 | 60.7927±0.35790±0.0260 | 13.7 | 0.51 |
| 8 | 62.1057±0.30550 | 1.8 | 2.00 |
| 9 | 62.1057±0.30550±0.0019 | 1.9 | 1.38 |
| 10 | 62.1057±0.30550±0.0040 | 2.1 | 1.31 |
| 11 | 62.1057±0.30550±0.0065 | 2.7 | 1.16 |
| 12 | 62.1057±0.30550±0.0099 | 3.9 | 0.96 |
| 13 | 62.1057±0.30550±0.0155 | 7.1 | 0.71 |
| 14 | 62.1057±0.30550±0.0260 | 13.7 | 0.51 |
| 15 | 63.28325±0.28525 | 1.8 | 2.00 |
| 16 | 63.28325±0.28525±0.0019 | 1.9 | 1.38 |
| 17 | 63.28325±0.28525±0.0040 | 2.1 | 1.31 |
| 18 | 63.28325±0.28525±0.0065 | 2.7 | 1.16 |
| 19 | 63.28325±0.28525±0.0099 | 3.9 | 0.96 |

| | | | |
|---|---|---|---|
| 20 | 63.28325±0.28525±0.0155 | 7.1 | 0.71 |
| 21 | 63.28325±0.28525±0.0260 | 13.7 | 0.51 |

### 4.3 Comparison of SSMIS and HMAS Channel Simulations

The atmospheric profile dataset and RS-LBL model configuration used for SSMIS and HMAS simulation follow the same setup as described in Dong et al. (2026, Section 2). The atmospheric profile dataset was developed by Peter Rayer (Met Office). It consists of 13,495 randomly sampled model profiles from the European Centre for Medium-Range Weather Forecasts (ECMWF), providing high vertical resolution (extending up to 0.0002 hPa). The key characteristics required for upper atmospheric simulations can be met by utilizing the average of this profile dataset. Figure 6 shows the HMAS weighting function distribution for different polarizations. The HMAS channels are grouped into three sets based on oxygen absorption line combinations: Group 1 (blue) comprises channels 1-13 centered around the $7^+$ and $9^+$ lines, Group 2 (yellow) includes channels 14-26 centered around the $11^+$ and $13^+$ lines, and Group 3 (pink) consists of channels 27-39 centered around the $15^+$ and $17^+$ lines. From Fig. 6, it is shown that the three double-sideband channels covering the respective oxygen absorption lines exhibit the highest peak among all WFs. Detection height gradually decreases as the passband moves further from the oxygen line center, with every 13 channels exhibiting a similar pattern. Using only channels 1-2, 14-15, and 27-28 enables detection at upper altitudes of approximately 40-80 km, while the remaining channels complete the high-resolution coverage of about 20-55 km.

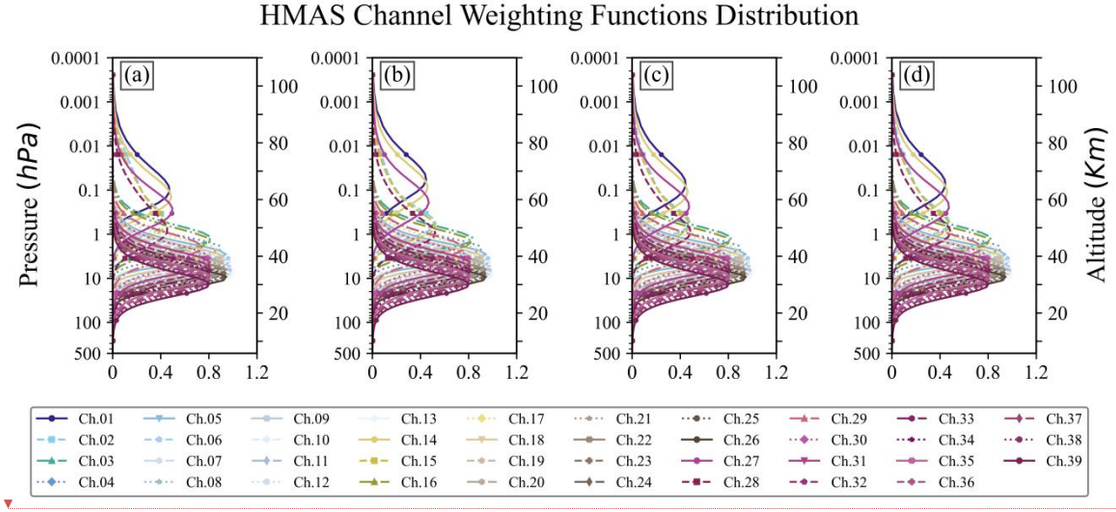



**Figure 6:** HMAS channel Weighting Functions (WF) for the (**a**) vertical-, (**b**) horizontal-, (**c**) right-, and (**d**) left-polarization. The first three channels in each group (channels 1-3, 14-16, and 27-29) are highlighted from the same color family.

删除[董嫦娇]: 9

删除[董嫦娇]: 9

删除[董嫦娇]: with

删除[董嫦娇]: their respective

删除[董嫦娇]:
The SSMIS UAS channel WFs are shown in Fig. 10 for different polarisations. The six-channel weighting functions also achieve similar coverage to HMAS from 100 hPa to 0.001 hPa. The SSMIS channel 24, with a center frequency shift of about 50 MHz, has a WF peak height of approximately 28 km (16 hPa). In contrast to SSMIS, the HMAS high-density weighting function is expected to provide rich atmospheric information in the near space.

删除[董嫦娇]: **9**

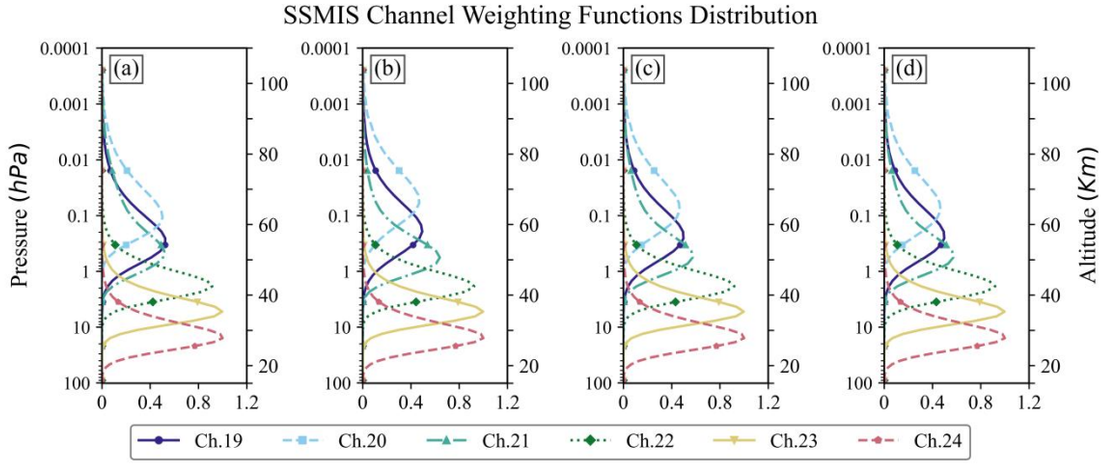



**Figure 7:** As Fig. 6, but for SSMIS channel 19-24.

The SSMIS UAS channel WFs are shown in Fig. 7 for different polarizations. The six-channel weighting functions also achieve similar coverage to HMAS from 100 hPa to 0.001 hPa. The SSMIS channel 24, with a center frequency shift of about 50 MHz, has a WF peak height of approximately 28 km (16 hPa). In contrast to SSMIS, the HMAS high-density weighting function is expected to provide richer atmospheric information in the near space.

To further validate the physical consistency of the HMAS channel design, the BT simulations of HMAS composite channels and SSMIS UAS channels are compared using the Advanced Radiative Transfer Modeling System (ARMS) developed based on the RS-LBL model with Larsson implementation. The simulations are performed using the ECMWF profile dataset as input, with the IGRF-13 geomagnetic field model providing the magnetic field parameters. The HMAS composite channels are constructed by combining the original 150 hyperspectral channels into 39 composite channels, with the central frequency and bandwidth of each composite channel designed to match the detection altitude characteristics of the corresponding SSMIS channels.

Figure 8 presents the global distribution of BT differences between HMAS composite channels and SSMIS channels on 1 January 2024. Four representative channel pairs are selected for comparison: (a) HMAS composite channel 27 and SSMIS channel 19, (b) HMAS composite channel 1 and SSMIS channel 20, (c) HMAS composite channel 2 and SSMIS channel 21, and (d) HMAS composite channel 4 and SSMIS channel 22.

The BT differences exhibit distinct spatial patterns that vary across channel pairs, reflecting the combined influence of geomagnetic field strength and latitude. For HMAS composite channels 27 and 1, which correspond to SSMIS channels 19 and 20, the BT differences are smaller at high latitudes where the geomagnetic field is stronger, typically within ±1.3 K, while at low latitudes, the differences become larger, reaching up to 6 K. In contrast, HMAS composite channel 2

设置格式[董嫦娇]: 题注

删除[董嫦娇]: **10**

删除[董嫦娇]: 9

(corresponding to SSMIS channel 21) displays the opposite behavior: larger BT differences, up to -6 K, are observed at higher geomagnetic field strength. For HMAS composite channel 4 (corresponding to SSMIS channel 22), the BT differences exhibit a predominantly latitudinal dependence rather than a magnetic field dependence.

These contrasting patterns can be attributed to subtle differences in center frequency and bandwidth between the HMAS composite channels and their SSMIS counterparts, leading to shifts in the weighting function peak altitude. Since the Zeeman splitting effect varies with both magnetic field strength and atmospheric pressure (altitude), channels with different effective detection heights sample different layers of the atmosphere, where the temperature profile and its sensitivity to magnetic field perturbations differ. Consequently, the BT difference between HMAS and SSMIS at a given location is not solely determined by the local geomagnetic field intensity but also by the vertical alignment of their respective weighting functions. This explains why some channel pairs show larger differences in strong-field regions (channel 2 vs. 21), while others show smaller differences under the same conditions (channels 1 and 27 vs. 19 and 20), and why channel 4 vs. 22 exhibits a primarily latitudinal pattern governed by the background temperature gradient rather than magnetic field variations.

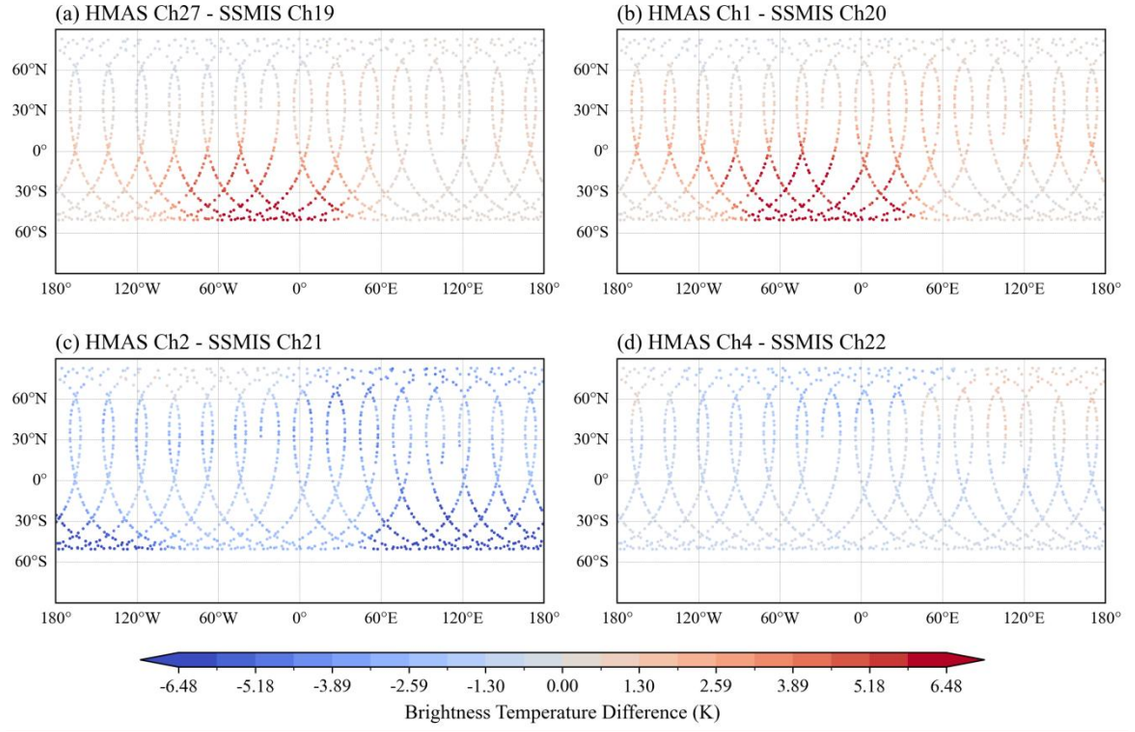



**Figure 8:** Global brightness temperature differences distribution between HMAS and SSMIS corresponding channels on 1 January 2024 for (**a**) HMAS composite channel 27 and SSMIS channel 19, (**b**) HMAS composite channel 1 and SSMIS channel 20, (**c**) HMAS composite channel 2 and SSMIS channel 21, and (**d**) HMAS composite channel 4 and SSMIS channel 22.

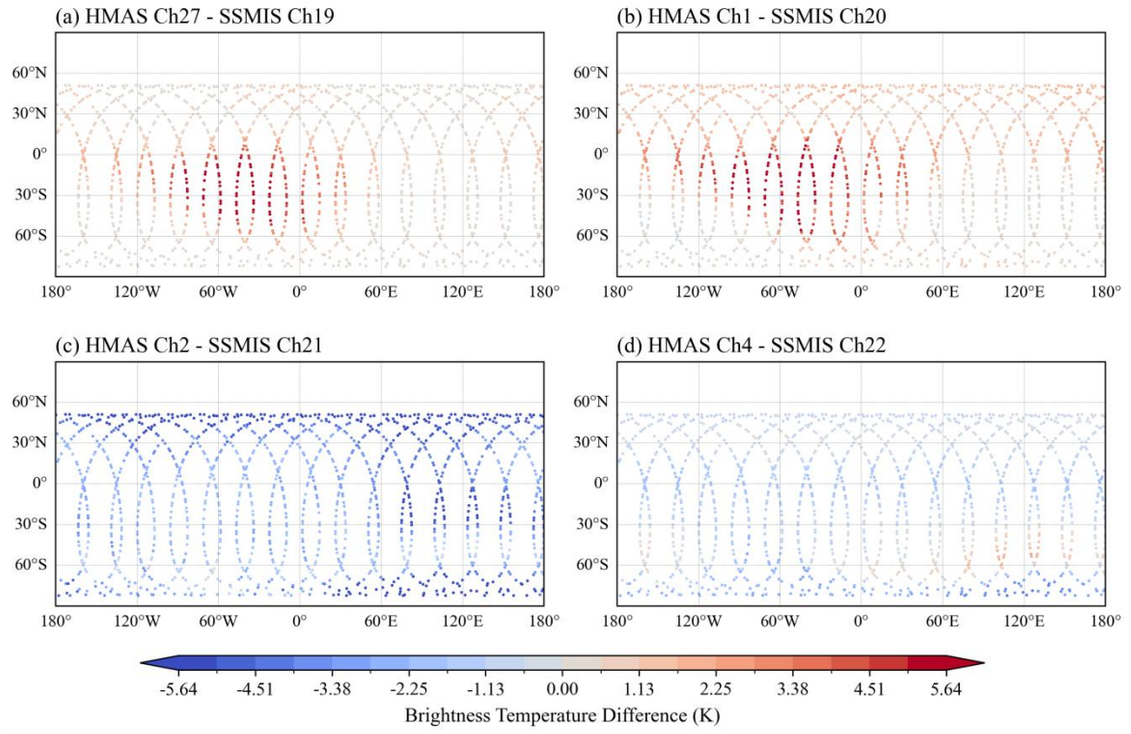



**Figure 9:** As Fig. 8, but for 1 August 2024.

设置格式[董嫦娇]: 题注

Figure 9 presents the corresponding BT difference distribution on 1 August 2024. The overall spatial pattern of BT differences is similar to that in January, with the differences remaining generally within ±1.13 K across most latitude bands. However, notable seasonal variations are evident, particularly in the polar regions, where the BT differences exhibit asymmetry between the Northern and Southern Hemispheres. This asymmetry is partly attributable to the SABER yaw cycle: the SABER has a yaw cycle of approximately two months (60 days), causing its observation region to alternate between 53° S-83°N and 83°S-53°N every two months (Dong et al., 2026). Consequently, the sampling coverage of SABER temperature profiles used for BT simulation differs between January and August.

Among the four channel pairs, HMAS composite channel 4 (corresponding to SSMIS channel 22) exhibits the most pronounced seasonal variation. This channel pair has the largest frequency offset from the oxygen absorption line center among the four comparisons, corresponding to a lower WF peak altitude. At this altitude, the atmospheric temperature exhibits stronger seasonal variability compared to the upper stratosphere and mesosphere, where the other three channel pairs are primarily sensitive. The larger seasonal temperature contrast between winter and summer at lower altitudes amplifies the BT difference between January and August for this channel pair. In contrast, HMAS composite channels 27, 1, and 2 (corresponding to SSMIS channels 19, 20, and 21) have weighting function peaks at higher altitudes, where the seasonal temperature variation is relatively weaker.

Overall, the BT differences between HMAS and SSMIS channels remain within the instrument noise level of SSMIS UAS channels (approximately 2-3 K) for both January and August, confirming that the HMAS channel parameter design is physically consistent with the well-validated SSMIS UAS channels across different seasons.

### 4.4 Comparison of SSMIS and HMAS Temperature Profile Retrieval Results

To further validate the rationality of the HMAS channel design, a temperature profile retrieval experiment is conducted using an improved BP neural network algorithm. The experiment consists of three steps: brightness temperature forward simulation, retrieval model training, and retrieval accuracy evaluation, with consistent input profiles, radiative transfer model, retrieval algorithm, and evaluation criteria applied to both HMAS and SSMIS channels.

The retrieval experiment adopts a hybrid approach combining physical forward modeling with data-driven inversion. The ARMS with the Zeeman module is used to generate simulated BT datasets for both SSMIS channels 19-24 and all HMAS channels. This forward model is rigorously based on radiative transfer theory and the Zeeman splitting physical mechanism, ensuring the physical reliability of the input data. The improved BP neural network then performs the nonlinear mapping from BT to temperature profiles, leveraging the efficiency of machine learning for high-dimensional data fitting. This approach combines the physical constraints of radiative transfer with the efficiency of machine learning.

The experiment period is set to the year 2024. SABER V2.0 temperature profiles from three groups of dates (1st-5th, 11th-15th, and 24th-25th of each month) are selected to ensure comprehensive coverage of atmospheric temperature characteristics across different seasons. SABER profiles are used as the truth reference due to their high vertical resolution and reliable quality. To facilitate subsequent retrieval and statistical comparison, SABER data from 100 to 0.001 hPa are selected based on the weighting function peak altitudes of SSMIS channels 19-24 and all HMAS channels, forming a unified 200-layer atmospheric temperature profile dataset. The SABER temperature profiles and IGRF-13 geomagnetic field parameters are then input into the ARMS model with the Zeeman module to simulate BTs for SSMIS and HMAS channels, respectively. A total of 144 days of simulated BT datasets are constructed for both instruments.

The retrieval algorithm and procedure are strictly controlled to eliminate retrieval errors caused by differences in algorithms or non-instrument channel parameters. The improved BP neural network is trained using 120 days of simulated BT data and corresponding SABER temperature profiles (1st-5th and 11th-15th of each month in 2024). The remaining 24 days (24th-25th of each month) serve as an independent test set. The SSMIS channel 19-24 and HMAS full-channel simulated BTs from these test dates are input into the trained retrieval model to obtain temperature profiles, which are then compared with the corresponding SABER profiles for validation.

The improved BP neural network incorporates several key enhancements tailored to the characteristics of HMAS channels. In terms of input features, in addition to the channel BTs, two types of auxiliary information are included: statistical features of channel BTs (mean, standard deviation, and range) to capture the intrinsic relationships between different channel observations, and sine-cosine encoded latitude and longitude features to enable the model to learn the latitudinal distribution characteristics of atmospheric temperature. In the network architecture, a dual residual block structure is adopted to mitigate the gradient vanishing problem in deep networks, thereby accelerating convergence and improving training stability. A squeeze-and-excitation (SE) channel attention module is also introduced, which automatically learns the dependencies between different channels and generates adaptive weight coefficients, allowing the model to identify channels that contribute more significantly to temperature retrieval while suppressing redundant or noisy channels. For the loss function, a layer-weighted mean squared error is designed, dividing the 200-layer temperature profile into lower, middle, and upper altitude intervals with different weight coefficients. Higher weights are assigned to the 50-0.01 hPa, which is the primary focus of this study.

Data augmentation is applied to improve model robustness. Gaussian noise of 1-2 K is added to the simulated BTs to simulate instrument noise and measurement errors in actual observations. Random channel masking is also applied to simulate scenarios where some channels may fail during operation. The AdamW optimizer with cosine annealing warm restarts learning rate scheduling is used for training, and an early stopping strategy is implemented to prevent overfitting.

Figure 10 presents the retrieval results for a randomly selected temperature profile (No. 41) on 24 March 2024, compared with the SABER truth profile. Figure 10a shows the vertical distribution of atmospheric temperature from 100 to 0.001 hPa, where the black solid line represents the SABER observation, the blue dashed line represents the HMAS retrieval, and the yellow dotted line represents the SSMIS retrieval. The HMAS retrieval shows better agreement with the SABER profile, while the SSMIS retrieval exhibits larger deviations near 10-5 hPa and 0.1 hPa. Figure 10b displays the probability density function (PDF) of retrieval errors for both instruments. The HMAS retrieval errors are more concentrated within the ±2 K compared to SSMIS, indicating a lower probability of large errors. Figure 10c quantifies the retrieval performance using five core metrics. The results show that the root mean square error (RMSE), mean absolute error (MAE), and mean absolute percentage error (MAPE) of HMAS retrievals are significantly lower than those of SSMIS, while the coefficient of determination ($R^2$) and correlation coefficient of HMAS are closer to 1, demonstrating superior retrieval accuracy.

删除[Eleanor D]: red

删除[Eleanor D]: truth

删除[Eleanor D]: range

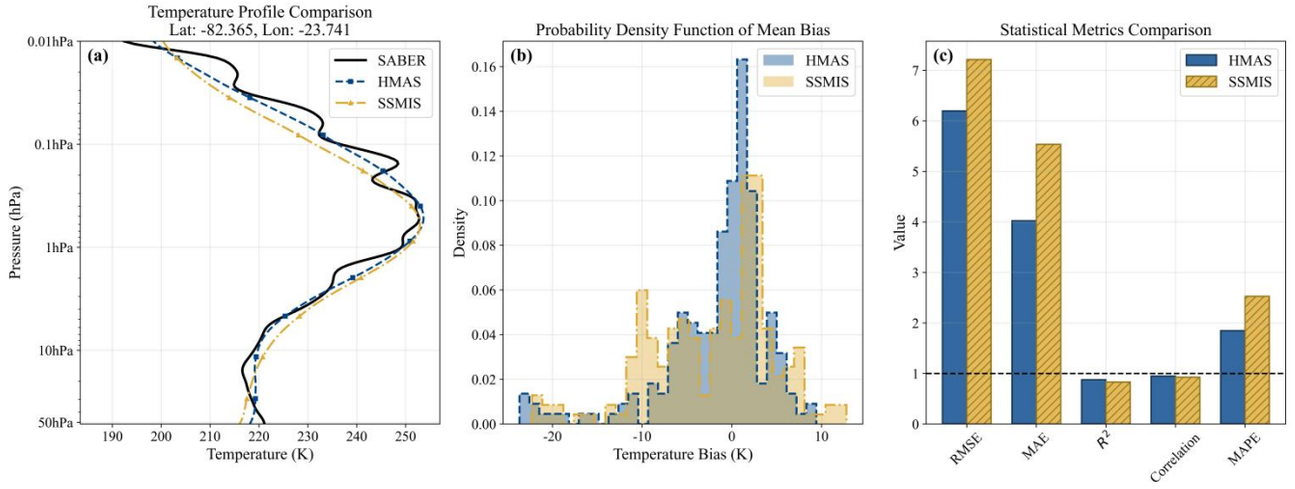



**Figure 10:** Comparison of the retrieved temperature profile (No. 41) based on HMAS and SSMIS channel simulations with the SABER temperature profile on 24 March 2024: (**a**) vertical distribution of atmospheric temperature from 50 to 0.01 hPa for the SABER profile (black solid line), the HMAS-based retrieval result (blue dashed line), and the SSMIS-based retrieval result (yellow dotted line), (**b**) probability density function (PDF) of retrieval errors relative to the SABER profile for HMAS (blue) and SSMIS (yellow), (**c**) statistical comparison of root mean square error (RMSE), mean absolute error (MAE), coefficient of determination ($R^2$), correlation coefficient, and mean absolute percentage error (MAPE) for HMAS and SSMIS retrieval results.

Considering the limitations of single-day analysis, the daily mean statistics of all retrieved profiles on the 24th and 25th of each month from January to December 2024 are further analyzed, as shown in Fig. 11. The blue dashed and yellow dotted lines represent the HMAS and SSMIS results, respectively. From the RMSE time series (Fig. 11a), except for 25 April 2024, when the HMAS RMSE is slightly higher than that of SSMIS, the HMAS RMSE is consistently lower for all other dates, indicating that the HMAS retrievals are generally closer to the true values. The MAE time series (Fig. 11b) shows that the HMAS MAE remains lower than that of SSMIS throughout the entire experimental period. The $R^2$ comparison (Fig. 11c) shows that both instruments achieve $R^2$ values above 0.8, confirming the overall effectiveness of the retrieval algorithm. Except for three dates (25 April, 24 May, and 24 June 2024), the HMAS $R^2$ is consistently closer to 1. The correlation coefficient trends (Fig. 11d) are consistent with the $R^2$ results, further validating the retrieval accuracy advantage of HMAS.

To comprehensively evaluate the overall retrieval performance of both instruments, the five metrics are statistically summarized for all retrieved profiles throughout the experiment period, as shown in Table 3. The results demonstrate that HMAS outperforms SSMIS across all evaluation metrics: HMAS achieves an RMSE of 7.652±0.389 K compared to 7.858±0.314 K for SSMIS, an MAE of 4.911±0.282 K compared to 5.107±0.208 K, an $R^2$ of 0.915±0.010 compared to 0.910±0.010, a correlation coefficient of 0.957±0.005 compared to 0.955±0.005, and a MAPE of 2.380±0.158% compared to 2.467±0.119%. These results are consistent with the theoretical expectations for HMAS channels, where the greater number of detection channels provides richer atmospheric state information, thereby enabling higher retrieval accuracy.

删除[Eleanor D]: red
删除[Eleanor D]: orange
删除[Eleanor D]: s
删除[Eleanor D]: red

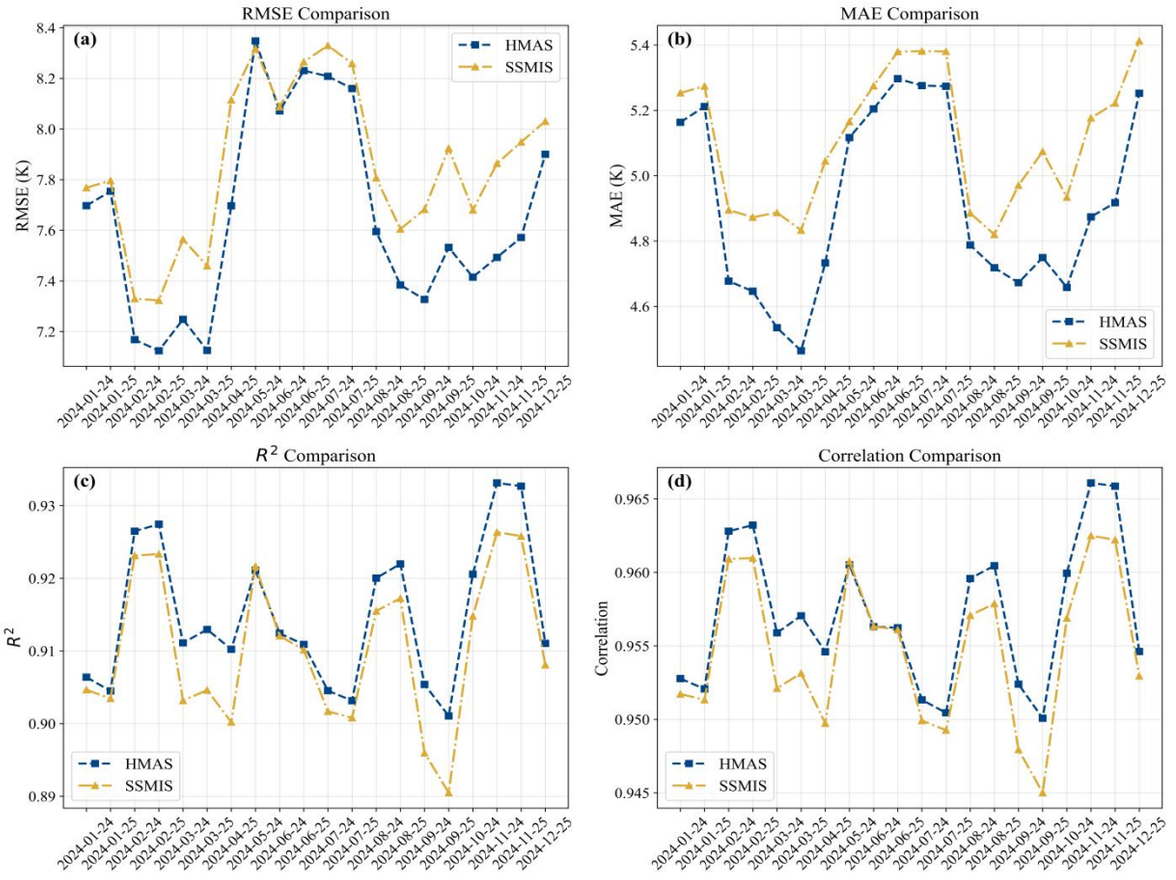



**Figure 11:** Daily mean statistics of all retrieved profiles on the 24th and 25th of each month from January to December 2024 for HMAS (blue dashed line) and SSMIS (yellow dotted line): (**a**) RMSE, (**b**) MAE, (**c**) $R^2$ , and (**d**) correlation coefficient.

设置格式[董嫦娇]: 题注

**Table 3** Statistical comparison of HMAS and SSMIS temperature profile retrieval results.

删除[Eleanor D]: **Table3**

带格式表格[董嫦娇]

| Metric | Unit | HMAS | SSMIS |
|---|---|---|---|
| RMSE | K | 7.652±0.389 | 7.858±0.314 |
| MAE | K | 4.911±0.282 | 5.107±0.208 |
| $R^2$ | — | 0.915±0.010 | 0.910±0.010 |
| Correlation | — | 0.957±0.005 | 0.955±0.005 |
| MAPE | % | 2.380±0.158 | 2.467±0.119 |

## 5 Conclusions

The Special Sensor Microwave Imager Sounder (SSMIS) has six upper atmospheric sounding (UAS) channels that have demonstrated positive impacts on data assimilation (Hoppel et al., 2013). This study proposes both conventional and hyperspectral linear polarization channels parameters based on the simulation and analysis of oxygen absorption lines, aiming to complement and extend the capability of existing SSMIS observations, particularly as it reaches the end of its life. The channel configurations for both Hyperspectral Microwave Atmospheric Sounder (HMAS) and Microwave Atmospheric Sounder (MAS) are comparable to SSMIS, featuring double-sideband covering the oxygen line and quadruple-sideband channels on either side of the oxygen absorption line. To reduce channel noise, the bandwidth covering oxygen lines has been appropriately broadened. The HMAS comprises 150 original channels covering the 60-63 GHz, optimized to 39 composite channels, while the MAS provides 21 channels as a conventional alternative. The detection altitude characteristics of oxygen absorption lines under varying frequency shifts and magnetic field conditions are systematically analyzed. The results indicate that the $O_2$ line center and frequency shift within 2 MHz are highly sensitive to magnetic field strength ($B_e$), particularly when it exceeds 0.4 Gauss, but above 2 MHz, there is negligible sensitivity. The weighting function analysis reveals that the "double-peaked" phenomenon in linear polarization is primarily associated with frequency shifts within the 0.8-1.8 MHz range under strong magnetic field conditions, providing guidance for channel frequency selection in linear polarization detection.

The SSMIS and HMAS composite channel weighting function distributions are compared. Overall, both the SSMIS and HMAS WFs achieve coverage from 50 to 0.01 hPa, but HMAS has a higher density. Using only HMAS channels 1-2, 14-15, and 27-28 enables detection at upper altitudes of approximately 40-80 km, while the remaining channels complete the high-resolution coverage of about 20-55 km. The HMAS channel parameters are further validated through brightness temperature simulations using the ARMS model developed based on the RS-LBL model with Larsson (2019) implementation. The global distribution of BT differences between HMAS composite channels and SSMIS channels on representative dates in January and August 2024 shows that the differences are generally within ±1.3 K across most latitude bands, with larger differences at high latitudes where the geomagnetic field is stronger. This confirms the physical consistency of the HMAS channel design with the well-validated SSMIS upper atmospheric sounding (UAS) channels.

Temperature profile retrieval experiments using an improved back propagation (BP) neural network with dual residual blocks and squeeze-and-excitation (SE) attention mechanism are conducted based on 144 days of simulated BT data in 2024. The retrieval results demonstrate that HMAS channels achieve superior accuracy (RMSE: 7.652±0.389 K, MAE: 4.911±0.282 K, $R^2$: 0.915±0.010) compared to SSMIS channels 19-24 (RMSE: 7.858±0.314 K, MAE: 5.107±0.208 K, $R^2$: 0.910±0.010), with the HMAS retrieval errors more concentrated within ±2 K. The daily mean statistics from January to December

删除[董嫦娇]:

删除[董嫦娇]:

**In this study, recent developments in the modelling of the Zeeman effect on high-peaking oxygen ($O_2$) absorption lines are incorporated into the microwave Line-by-Line (LBL) model to accurately simulate high-resolution satellite channels sensitive to these effects. The Stokes vector simulation differences for $1^-$, $13^-$, $7^+$, $9^+$, $15^+$, and $17^+$ oxygen absorption lines are compared, and it is shown that the $7^+$ line has the largest simulation difference for the $V$ component. Brightness temperature (BT) is simulated for representative $7^+$ and $1^-$ oxygen lines using the Rosenkranz and Staelin's microwave Line-by-Line (RS-LBL) model updated with Larsson (2019) Zeeman splitting coefficients. The sensitivity of simulated BT to magnetic field strength ($B_e$) and angle between the magnetic field vector and the electromagnetic wave propagation direction ($\theta$) indicates that the $O_2$ line center and frequency shift within 2 MHz are highly sensitive to $B_e$, particularly when it exceeds 0.4 Gauss, but above 2 MHz, there is negligible sensitivity. When the medium and magnetic field are uniformly distributed, and contributions from other absorption lines are neglected. The simulated BT exhibits symmetry with the $\theta$, specifically, the linearly polarized BT of oxygen absorption lines is symmetric about $\theta$=90° ($\cos(\theta)=0$), while left- and right-based circularly polarized BT are mirrors of each other.**

设置格式[董嫦娇]: 标题 1

删除[董嫦娇]: , which can potentially have a positive impact on assimilation

2024 further confirm that HMAS consistently outperforms SSMIS across all evaluation metrics, indicating that the greater number of detection channels provides richer atmospheric state information and enables higher retrieval accuracy.

This study focuses on the HMAS 150 channels at 60-63 GHz, while additional channel configurations at other frequency bands remain to be investigated. The current HMAS channel configuration is a conservative adaptation of existing techniques. In the future, channel setups can be fully adjusted based on technological capabilities, though all configurations require detailed simulation and analysis of the $O_2$ fine-structure lines. The temperature profile retrieval framework developed in this study can also be applied to compare the performance of HMAS, MAS, and SSMIS channel configurations.

## Code availability

The microwave LBL code used in this article can be downloaded at: https://cetemps.aquila.infn.it/mwrnet/lblmrt_ns.html.

## Author contributions

CD and FW conceptualized and designed the experiments. CD, FW, and ET developed the methodology and performed the formal analysis, software development, data curation, and visualization. CD carried out the investigation and wrote the original draft. FW supervised the work and acquired funding. All co-authors contributed to writing, reviewing, and editing the final manuscript.

## Competing interests

The authors declare no conflicts of interest.

## Disclaimer

Copernicus Publications remains neutral with regard to jurisdictional claims made in the text, published maps, institutional affiliations, or any other geographical representation in this paper. While Copernicus Publications makes every effort to include appropriate place names, the final responsibility lies with the authors. Views expressed in the text are those of the authors and do not necessarily reflect the views of the publisher.

删除[董嫦娇]: The study concludes by presenting the SSMIS and HMAS composite channel weighting function (WF) distributions. Overall, both the SSMIS and HMAS WFs achieve coverage from 100 to 0.001 hPa, but HMAS has a higher density, hence supported by hyperspectral detection technology, an instrument like HMAS is expected to obtain super high-resolution vertical atmospheric information from near space.

删除[董嫦娇]: Since this study only focuses on the HMAS 150 channels at 60-63 GHz, with additional channels awaiting investigation. Meanwhile, the HMAS channel configuration is a conservative adaptation of existing techniques.

删除[董嫦娇]: based on current channel parameters also enables comparison of differences between HMAS or MAS and SSMIS.

**Financial support**

This research was supported by the Hunan Provincial Natural Science Foundation of China (grant no. 2021JC0009); by the Natural Science Foundation of China (grant no. U2142212 and 42105136); by the Fengyun Application Pioneering Project (FY APP).

**Review statement**

The review statement will be added by Copernicus Publications listing the handling editor as well as all contributing referees according to their status anonymous or identified.

**References**

Aires, F., Prigent, C., Orlandi, E., Milz, M., Eriksson, P., Crewell, S., Lin, C., and Kangas, V.: Microwave hyperspectral measurements for temperature and humidity atmospheric profiling from satellite: The clear-sky case, JGR Atmospheres, 120, https://doi.org/10.1002/2015JD023331, 2015.

Alken, P., Thébault, E., Beggan, C. D., Amit, H., Aubert, J., Baerenzung, J., Bondar, T. N., Brown, W. J., Califf, S., Chambodut, A., Chulliat, A., Cox, G. A., Finlay, C. C., Fournier, A., Gillet, N., Grayver, A., Hammer, M. D., Holschneider, M., Huder, L., Hulot, G., Jager, T., Kloss, C., Korte, M., Kuang, W., Kuvshinov, A., Langlais, B., Léger, J.-M., Lesur, V., Livermore, P. W., Lowes, F. J., Macmillan, S., Magnes, W., Mandea, M., Marsal, S., Matzka, J., Metman, M. C., Minami, T., Morschhauser, A., Mound, J. E., Nair, M., Nakano, S., Olsen, N., Pavón-Carrasco, F. J., Petrov, V. G., Ropp, G., Rother, M., Sabaka, T. J., Sanchez, S., Saturnino, D., Schnepf, N. R., Shen, X., Stolle, C., Tangborn, A., Tøffner-Clausen, L., Toh, H., Torta, J. M., Varner, J., Vervelidou, F., Vigneron, P., Wardinski, I., Wicht, J., Woods, A., Yang, Y., Zeren, Z., and Zhou, B.: International Geomagnetic Reference Field: the thirteenth generation, Earth Planets Space, 73, 49, https://doi.org/10.1186/s40623-020-01288-x, 2021.

Ben-Reuven, A. and Lightman, A.: Impact Broadening of the Oxygen Microwave Spectrum, The Journal of Chemical Physics, 46, 2429–2430, https://doi.org/10.1063/1.1841051, 1967.

Bi, Y., Yang, J., Wei, C., Dou, F., Xu, W., An, D., Luan, Y., Feng, J., and Zhang, L.: Atmospheric Temperature Measurements Using Microwave Hyper-Spectrum from Geostationary Satellite: Band Design, Weighting Functions and Information Content, Remote Sensing, 16, 289, https://doi.org/10.3390/rs16020289, 2024.

Blackwell, W. J., Bickmeier, L. J., Leslie, R. V., Pieper, M. L., Samra, J. E., Surussavadee, C., and Upham, C. A.: Hyperspectral Microwave Atmospheric Sounding, IEEE Trans. Geosci. Remote Sensing, 49, 128–142, https://doi.org/10.1109/TGRS.2010.2052260, 2011.

Boukabara, S.-A. and Garrett, K.: Benefits of a hyperspectral microwave sensor, in: 2011 IEEE SENSORS Proceedings, 2011 IEEE Sensors, 1881–1884, https://doi.org/10.1109/ICSENS.2011.6127357, 2011.

Dong, C., Hu, H., and Weng, F.: Optimal Assimilation of Microwave Upper-Level Sounding Data in CMA-GFS, Adv. Atmos. Sci., 41, 2043–2060, https://doi.org/10.1007/s00376-024-3323-7, 2024.

Dong, C., Weng, F., and Turner, E.: Dependence of Simulations of Upper Atmospheric Microwave Sounding Channels on Magnetic Field Parameters and Zeeman Splitting Absorption Coefficients, Remote Sensing, 18, 766, https://doi.org/10.3390/rs18050766, 2026.

Eckermann, S. D., Hoppel, K. W., Coy, L., McCormack, J. P., Siskind, D. E., Nielsen, K., Kochenash, A., Stevens, M. H., Englert, C. R., Singer, W., and Hervig, M.: High-altitude data assimilation system experiments for the northern summer mesosphere season of 2007, Journal of Atmospheric and Solar-Terrestrial Physics, 71, 531–551, https://doi.org/10.1016/j.jastp.2008.09.036, 2009.

Eckermann, S. D., Ma, J., Hoppel, K. W., Kuhl, D. D., Allen, D. R., Doyle, J. A., Viner, K. C., Ruston, B. C., Baker, N. L., Swadley, S. D., Whitcomb, T. R., Reynolds, C. A., Xu, L., Kaifler, N., Kaifler, B., Reid, I. M., Murphy, D. J., and Love, P. T.: High-Altitude (0–100 km) Global Atmospheric Reanalysis System: Description and Application to the 2014 Austral Winter of the Deep Propagating Gravity Wave Experiment (DEEPWAVE), Monthly Weather Review, 146, 2639–2666, https://doi.org/10.1175/MWR-D-17-0386.1, 2018.

Eresmaa, R., Letertre-Danczak, J., Lupu, C., Bormann, N., and McNally, A. P.: The assimilation of Cross-track Infrared Sounder radiances at ECMWF, Quart J Royal Meteoro Soc, 143, 3177–3188, https://doi.org/10.1002/qj.3171, 2017.

Eriksson, P., Buehler, S. A., Davis, C. P., Emde, C., and Lemke, O.: ARTS, the atmospheric radiative transfer simulator, version 2, Journal of Quantitative Spectroscopy and Radiative Transfer, 112, 1551–1558, https://doi.org/10.1016/j.jqsrt.2011.03.001, 2011.

Hill, R. M. and Gordy, W.: Zeeman Effect and Line Breadth Studies of the Microwave Lines of Oxygen, Phys. Rev., 93, 1019–1022, https://doi.org/10.1103/PhysRev.93.1019, 1954.

Hoppel, K. W., Baker, N. L., Coy, L., Eckermann, S. D., McCormack, J. P., Nedoluha, G. E., and Siskind, E.: Assimilation of stratospheric and mesospheric temperatures from MLS and SABER into a global NWP model, Atmos. Chem. Phys., 2008.

Hoppel, K. W., Eckermann, S. D., Coy, L., Nedoluha, G. E., Allen, D. R., Swadley, S. D., and Baker, N. L.: Evaluation of SSMIS Upper Atmosphere Sounding Channels for High-Altitude Data Assimilation, Monthly Weather Review, 141, 3314–3330, https://doi.org/10.1175/MWR-D-13-00003.1, 2013.

Hui, A. K., Armstrong, B. H., and Wray, A. A.: Rapid computation of the Voigt and complex error functions, Journal of Quantitative Spectroscopy and Radiative Transfer, 19, 509–516, https://doi.org/10.1016/0022-4073(78)90019-5, 1978.

Koshelev, M. A., Vilkov, I. N., and Tretyakov, M. Yu.: Pressure broadening of oxygen fine structure lines by water, Journal of Quantitative Spectroscopy and Radiative Transfer, 154, 24–27, https://doi.org/10.1016/j.jqsrt.2014.11.019, 2015.

Koshelev, M. A., Vilkov, I. N., Makarov, D. S., Tretyakov, M. Yu., and Rosenkranz, P. W.: Speed-dependent broadening of the O 2 fine-structure lines, Journal of Quantitative Spectroscopy and Radiative Transfer, 264, 107546, https://doi.org/10.1016/j.jqsrt.2021.107546, 2021.

Kummerow, C. D., Poczatek, J. C., Almond, S., Berg, W., Jarrett, O., Jones, A., Kantner, M., and Kuo, C.-P.: Hyperspectral Microwave Sensors—Advantages and Limitations, IEEE J. Sel. Top. Appl. Earth Observations Remote Sensing, 15, 764–775, https://doi.org/10.1109/JSTARS.2021.3133382, 2022.

Kunkee, D. B., Poe, G. A., Boucher, D. J., Swadley, S. D., Hong, Y., Wessel, J. E., and Uliana, E. A.: Design and Evaluation of the First Special Sensor Microwave Imager/Sounder, IEEE Trans. Geosci. Remote Sensing, 46, 863–883, https://doi.org/10.1109/tgrs.2008.917980, 2008.

Larsson, R., Buehler, S. A., Eriksson, P., and Mendrok, J.: A treatment of the Zeeman effect using Stokes formalism and its implementation in the Atmospheric Radiative Transfer Simulator (ARTS), Journal of Quantitative Spectroscopy and Radiative Transfer, 133, 445–453, https://doi.org/10.1016/j.jqsrt.2013.09.006, 2014.

Larsson, R., Lankhaar, B., and Eriksson, P.: Updated Zeeman effect splitting coefficients for molecular oxygen in planetary applications, Journal of Quantitative Spectroscopy and Radiative Transfer, 224, 431–438, https://doi.org/10.1016/j.jqsrt.2018.12.004, 2019.

Lenoir, W. B.: Propagation of Partially Polarized Waves in a Slightly Anisotropic Medium, Journal of Applied Physics, 38, 5283–5290, https://doi.org/10.1063/1.1709315, 1967.

Lenoir, W. B.: Microwave spectrum of molecular oxygen in the mesosphere, J. Geophys. Res., 73, 361–376, https://doi.org/10.1029/JA073i001p00361, 1968.

Liebe, H., Grimmestad, G., and Hopponen, J.: Atmospheric oxygen microwave spectrum--Experiment versus theory, IEEE Trans. Antennas Propagat., 25, 327–335, https://doi.org/10.1109/TAP.1977.1141573, 1977.

Liebe, H. J.: Modeling attenuation and phase of radio waves in air at frequencies below 1000 GHz, Radio Science, 16, 1183–1199, https://doi.org/10.1029/RS016i006p01183, 1981.

Liebe, H. J.: MPM?An atmospheric millimeter-wave propagation model, Int J Infrared Milli Waves, 10, 631–650, https://doi.org/10.1007/BF01009565, 1989.

Liebe, H. J., Rosenkranz, P. W., and Hufford, G. A.: Atmospheric 60-GHz oxygen spectrum: New laboratory measurements and line parameters, Journal of Quantitative Spectroscopy and Radiative Transfer, 48, 629–643, https://doi.org/10.1016/0022-4073(92)90127-P, 1992.

Lipton, A. E.: Satellite sounding channel optimization in the microwave spectrum, IEEE Trans. Geosci. Remote Sensing, 41, 761–781, https://doi.org/10.1109/TGRS.2003.810926, 2003.

Liu, L., Bliankinshtein, N., Huang, Y., Gyakum, J. R., Gabriel, P. M., Xu, S., and Wolde, M.: Comparative experimental validation of microwave hyperspectral atmospheric soundings in clear-sky conditions, n.d.

Liu, Q., Kazumori, M., Han, Y., and Weng, F.: Calculating Antarctic stratospheric temperature from Special Sensor Microwave Imager and Sounder, Geophysical Research Letters, 34, 2007GL030646, https://doi.org/10.1029/2007GL030646, 2007.

Maurer, T., Ruston, B., Swadley, S., and Booton, A.: Assimilation Impacts of SSMIS Upper Atmosphere Soundings with Improved Orbital Bias Predictors in NAVGEM, n.d.

Mcnally, A. P., Watts, P. D., A. Smith, J., Engelen, R., Kelly, G. A., Thépaut, J. N., and Matricardi, M.: The assimilation of AIRS radiance data at ECMWF, Quart J Royal Meteoro Soc, 132, 935–957, https://doi.org/10.1256/qj.04.171, 2006.

Meeks, M. L. and Lilley, A. E.: The microwave spectrum of oxygen in the Earth's atmosphere, J. Geophys. Res., 68, 1683–1703, https://doi.org/10.1029/JZ068i006p01683, 1963.

Nezlin, Y., Rochon, Y. J., and Polavarapu, S.: Impact of tropospheric and stratospheric data assimilation on mesospheric prediction, Tellus A, 61, 154–159, https://doi.org/10.1111/j.1600-0870.2008.00368.x, 2009.

Pardo, J. R., Gérin, M., Prigent, C., Cernicharo, J., Rochard, G., and Brunel, P.: REMOTE SENSING OF THE MESOSPHERIC TEMPERATURE PROFILE FROM CLOSE-TO-NADIR OBSERVATIONS: DISCUSSION ABOUT THE CAPABILITIES OF THE 57.5–62.5GHz FREQUENCY BAND AND THE 118.75GHz SINGLE O2 LINE, Journal of Quantitative Spectroscopy and Radiative Transfer, 60, 559–571, https://doi.org/10.1016/S0022-4073(97)00235-5, 1998.

Rosenkranz, P. W. and Staelin, D. H.: Polarized thermal microwave emission from oxygen in the mesosphere, Radio Science, 23, 721–729, https://doi.org/10.1029/rs023i005p00721, 1988.

Rosenkranz, P.W.: Line-by-line microwave radiative transfer (non-scattering) [software] (version 2024), https://cetemps.aquila.infn.it/mwrnet/lblmrt_ns.html (last access: 18 May 2025).

Stogryn, A.: The Magnetic Field Dependence of Brightness Temperatures at Frequencies Microwave Absorption, IEEE Trans. Geosci. Remote Sensing, 27, 279–289, https://doi.org/10.1109/36.17669, 1989.

Swadley, S. D., Poe, G. A., Bell, W., Ye Hong, Kunkee, D. B., McDermid, I. S., and Leblanc, T.: Analysis and Characterization of the SSMIS Upper Atmosphere Sounding Channel Measurements, IEEE Trans. Geosci. Remote Sensing, 46, 962–983, https://doi.org/10.1109/TGRS.2008.916980, 2008.

Tretyakov, M. Yu., Koshelev, M. A., Dorovskikh, V. V., Makarov, D. S., and Rosenkranz, P. W.: 60-GHz oxygen band: precise broadening and central frequencies of fine-structure lines, absolute absorption profile at atmospheric pressure, and revision of mixing coefficients, Journal of Molecular Spectroscopy, 231, 1–14, https://doi.org/10.1016/j.jms.2004.11.011, 2005.

Van Vleck, J. H.: The Absorption of Microwaves by Oxygen, Phys. Rev., 71, 413–424, https://doi.org/10.1103/PhysRev.71.413, 1947.

Van Vleck, J. H. and Weisskopf, V. F.: On the Shape of Collision-Broadened Lines, Rev. Mod. Phys., 17, 227–236, https://doi.org/10.1103/RevModPhys.17.227, 1945.

Weng, F.: Passive Microwave Remote Sensing of the Earth: for Meteorological Applications, 1st ed., Wiley, https://doi.org/10.1002/9783527336289, 2017.

Yang, S., Yang, H., Li, N., and Ding, Z.: Short-Term Prediction of 80–88 km Wind Speed in Near Space Based on VMD–PSO–LSTM, Atmosphere, 14, 315, https://doi.org/10.3390/atmos14020315, 2023.

Zeeman, P.: XXXII. *On the influence of magnetism on the nature of the light emitted by a substance*, The London, Edinburgh, and Dublin Philosophical Magazine and Journal of Science, 43, 226–239, https://doi.org/10.1080/14786449708620985, 1897.

690 Zhang, M., Ma, G., He, J., and Zhang, C.: Impact of Channel Selection with Different Bandwidths on Retrieval at 50–60 GHz, Remote Sensing, 16, 1323, https://doi.org/10.3390/rs16081323, 2024.

Zhang, Y., Weng, F., and Hu, H.: Unraveling the Impacts of Hyperspectral Microwave and Terahertz Sounding Channels on Temperature and Humidity Profile Retrieval, J Meteorol Res, 39, 1088–1099, https://doi.org/10.1007/s13351-025-4042-4, 2025.

695 Zhao, X. R., Sheng, Z., Shi, H. Q., Weng, L. B., and He, Y.: Middle Atmosphere Temperature Changes Derived from SABER Observations during 2002-2020, Journal of Climate, 1, https://doi.org/10.1175/JCLI-D-20-1010.1, 2021.