



1 **Influence of climate change, land use land cover, population and industries**
2 **on the pollution of Ganga River**

3 SnehaSanty¹, Pradeep Mujumdar^{1,2} and Govindasamy Bala^{1,3}

4 ¹Interdisciplinary Centre for Water Research, Indian Institute of Science, Bangalore, India

5 ²Civil Engineering, Indian Institute of Science, Bangalore, India

6 ³Centre for Atmospheric and Oceanic Sciences, Indian Institute of Science, Bangalore, India

7 ***Correspondence:**

8 Sneha Santy, Interdisciplinary Centre for Water Research, Indian Institute of Science,
9 Bangalore 560 012, India. E-mail: snehasanty@iisc.ac.in

10 **Abstract**

11 Climate change, land use land cover (LULC), population, industries, and sewage treatment are
12 factors that can strongly influence river water quality. This paper uses a coupled hydrological-
13 water quality simulation model to assess the influence of each of these drivers on the most
14 polluted river stretch of the Ganga River. The water quality model QUAL2K is driven by these
15 five factors to assess their influence on nine water quality parameters, namely dissolved oxygen
16 (DO), biochemical oxygen demand (BOD), faecal coliform, ammonia, nitrate, total nitrogen,
17 organic-, inorganic-, and total phosphorous. Climate change projections are taken from CMIP5
18 RCP 4.5 and RCP 8.5 scenarios. Five socio-environmental scenarios which consider sewer
19 network, sewage treatment capacity, level of treatment at sewage treatment plants (STPs), and
20 the type of sewage (domestic or mixed) are also considered. The water quality is simulated
21 using a coupled HEC-HMS-QUAL2K framework. The non-point source pollution is quantified
22 using the export coefficient method, where the export of pollutants from all land use classes
23 are considered. The climate change effect is found to have a larger effect on Kanpur water
24 quality than other drivers, with a percentage contribution of above 70% because of the large
25 sensitivity of water quality parameters to the amount of streamflow. Climate change projections
26 combined with socio-environmental scenarios imply that the large increase in pollution due to
27 climate change, LULC, industry, and population growth cannot be controlled by the current
28 treatment proposals for 2050. However, providing adequate STPs to meet the population of
29 2050, and allowing only domestic sewage to reach STPs can help to achieve the objective of
30 the Ganga Action Plan in the mid-21st century.

31 **Keywords:** Climate change, land use, industry, population, Ganga pollution, water quality

32



33 **1. Introduction**

34 Water pollution of rivers is one of the crucial environmental issues, especially for developing
35 countries like India. However, proper management can save our rivers from future pollution
36 (Shukla et al.,2018). For this to happen, it is important to understand the sensitivity of water
37 quality parameters to major drivers that cause pollution. This knowledge can help water system
38 designers and policy makers take appropriate measures while designing a treatment unit or
39 changing policies for industrial dischargers. The major drivers that can affect the river water
40 quality in the future are climate change, land use land cover changes, population and industrial
41 growth, and the amount of treatment given to wastewater (Hunter, 2003).

42 In India, the Ganga River has high religious importance, and it serves a large population in
43 many ways, such as, irrigation, industrial and domestic use and hydropower generation. Ganga
44 Action Plan (GAP) was launched in 1986 to achieve 'bathing class' standard by 2000
45 (Environment & Forests Division and Water Resources Division Planning Commission
46 Government of India, 2009). Though there has been a significant improvement in Ganga water
47 quality since 2006 (Central Pollution Control Board, 2013), the goal of GAP is not fulfilled,
48 particularly at the pollution hotspot of Kanpur (Central Pollution Control Board, 2013). A study
49 conducted by seven Indian Institute of Technology (IIT) in 2011 suggested that there should be
50 an Urban River Management Plan that focuses on how sewage should be treated and conveyed
51 (Indian Institutes of Technology, 2010a). It also proposed to construct sewage treatment plants
52 (STP) for the present load and later increase the capacity to meet the demand from population
53 increase. Further, it suggested to enhance the level of treatment at STPs to tertiary level as the
54 present treatment is not effective in treating microbial load, and to increase sewer connectivity
55 to STPs (Indian Institutes of Technology, 2010b; Indian Institutes of Technology, 2011; Indian
56 Institutes of Technology, 2012). In this context, it is also important to isolate the effects of
57 major drivers on water quality.

58 Climate change is an important driver which can aggravate water pollution. Even if municipal
59 or industrial discharges remain the same in the future, climate change can alter flow
60 characteristics and temperature, affecting the dilution factor, reaction kinetics, and water
61 pollution (Rehana and Mujumdar, 2012). Climate change impact studies on the Ganga River
62 show a reduction in water availability, water quality, and ecological degradation if no actions
63 are taken in the future (Bons, 2018; Santy et al., 2020; Santy et al., 2022). In recent studies on
64 the Ganga River basin using a process-based Integrated Catchment (INCA) model (Jin, 2015;



65 Whitehead et al., 2015; Whitehead et al., 2018; Whitehead, 2018), ammonia, nitrate, and
66 phosphorous concentration are projected to decrease in the SRES A1B scenarios.

67 Land use land cover also play an important role in water quality, with high nutrient
68 concentration associated with agricultural land; high BOD, COD, and suspended solid
69 associated with urban land; and improved water quality associated with forestland (Santy et
70 al., 2020; Permatasari et al., 2017; Davids et al., 2018; Jacobs et al., 2018; Namugizea et al.,
71 2018; Gyawali et al., 2013). A growing population could result in increased water demand and
72 municipal sewage generation, which will aggravate the pollution of rivers (Khattiyavong and
73 Lee, 2019). Further, socio-economic factors, such as agricultural, industrial, and domestic
74 demands, sewage treatment capacity, and effluent characteristics, also influence the Ganga
75 basin water quality (Bons, 2018; Whitehead et al., 2015).

76 Wastewater treatment plants (WWTP) are meant to reduce river pollution by reducing the
77 pollutant concentration of sewage. However, the effluents of WWTP should be well within
78 limits, otherwise the effluents can cause pollution (Pascual-Benito et al., 2020). Past studies on
79 the effluent discharge of pharmaceutical industries to the rivers show the importance of WWTP
80 as it can help to improve the quality of water downstream. Partial removal of pollutants can
81 lead to having residues in the drinking water (Al-Ahmad et al., 1999; Hernando et al., 2006;
82 Choi et al., 2008). The inflow rate is identified as the most crucial operational factor of a
83 wastewater treatment plant in a study in the UK (Astarai-Imani et al., 2012). Climate change
84 can impact the inflow rate and the treatment processes due to hydrologic variation, increase in
85 water temperature, increase in organic load, and variation in chemical and pathogenic load
86 (Hurst et al., 2004; Rosario-Ortiz et al., 2007).

87 The isolated and combined impact of climate change and land use on Ganga river water quality
88 is analysed in Santy et al., (2020) using hypothetical scenarios and a standalone water quality
89 simulation model. That work dealt with sensitivity of water quality parameters to climatic and
90 land use forcings, using hypothetical scenarios; however, more realistic climate and land use
91 projections are to be considered for an accurate quantification of isolated effects. In the
92 subsequent study (Santy et al., 2022), the isolated risk of low water quality, eutrophication and
93 fish kill with climate change is quantified for the 2040-60 and 2080-2100 periods. Santy et al.,
94 (2022) use climate projections of CMIP5 RCP 4.5 & RCP 8.5 scenarios and a coupled
95 hydrological-water quality simulation model for the analysis. However, the effects of major
96 factors such as land use projections, population and industrial growth are not considered in that



97 study. The work presented in this paper advances the earlier work by explicitly accounting for
98 anthropogenic forcings such as land use, population and industrial growth along with climate
99 change and their isolated effects on water quality. The percentage contribution of these factors
100 to water pollution is quantified, and the predominant factor is identified. Planners and designers
101 consider only population growth for the future while designing a treatment unit, which can
102 underestimate future pollution levels as factors such as climate change, land use land cover and
103 industrial growth would affect water quality. Hence, it is essential to study whether the
104 proposed treatment can cater to the additional load due to these anthropogenic factors. The
105 objectives of this paper are to (i) isolate the effects of climate change, land use land cover
106 change, population and industrial growth on water quality, and (ii) to assess whether the
107 proposed treatment for Kanpur in the mid-21st century is sufficient to achieve the objective of
108 GAP.

109 The CMIP5 climate change projections for 20 GCMs along with land use projections, industry
110 and population growth are used to drive a coupled hydrological-water quality simulation model
111 to simulate nine water quality parameters: dissolved oxygen (DO), biochemical oxygen
112 demand (BOD), faecal coliform (FC), ammonia, nitrate, total nitrogen (TN), organic-,
113 inorganic- and total phosphorous (TP). The comparison of CMIP5 and CMIP6 climate outputs
114 shows that the multi model ensemble means of both give similar values, and CMIP6 is not
115 found to outperform the CMIP5 dataset (Bourdeau-Goulet and Hassanzadeh, 2021; Li et al.,
116 2021). The export coefficient method is used to estimate the non-point source pollution from
117 each land use class. Water quality is also analyzed for five socio-environmental scenarios
118 where proposed sewage treatment capacities, level of treatment at STP: secondary and tertiary,
119 and type of sewage reaching STP: domestic and mixed is considered. The novelty of the study
120 lies in isolating the effects of the major drivers: climate change, land use land cover, population
121 and industrial growth on water quality in terms of nine water quality parameters and identifying
122 the most crucial driver for the most polluted Kanpur stretch of the Ganga River. This will help
123 decision-makers decide in the design of treatment units to ensure water quality.


124 **2. Methodology**

125 **2.1 Study Area**

126 Ganga river supports one of the highest density of population in the world (Central Water
127 Commission & National Remote Sensing Centre, 2014), stretching across northern India and
128 Bangladesh. The river has a catchment area of 8,61,404 sq. km and a length of 2525km in India.



129 Ganga River, the largest river basin in India, lies between 73°2'E to 89°5'E longitudes and
130 21°6'N to 31°21'N latitudes. The types of industries discharging to the Ganga River are
131 Tannery, sugar & distillery, pulp and paper mills with high pollution load of BOD, Chemical
132 oxygen demand (COD), solids, TN, chromium, sulphate, sulphide and chloride.

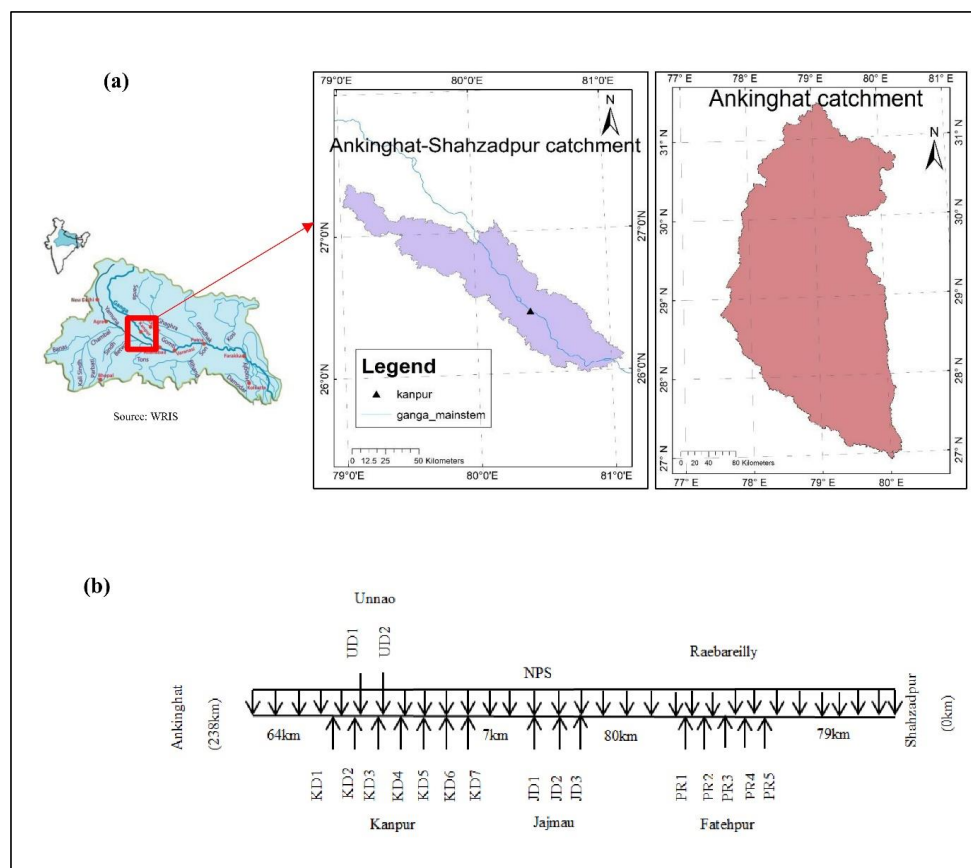

133
134 Figure 1: (a) Ganga basin with study area Ankinghat to Shahzadpur river stretch and Ankinghat
135 catchment highlighted in two boxes; (b) Schematic diagram of the river stretch with point and
136 non-point loads joining.

137 A 238 km long stretch of Ganga River from Ankinghat to Shahzadpur is considered in the
138 present study. Figure 1 shows the study area with point loads and diffuse loads. The prominent
139 locations where the drains carrying domestic and industrial sewage join are Kanpur, Jajmau,
140 Unnao, and Fatehpur. The effluent characteristics of each drain (Supplementary Table S1)
141 consist mainly of BOD, ammonia, nitrate, faecal coliform and phosphorous loading. The major




142 industries contributing to Kanpur, Unnao and Jajmau drains are Tannery and slaughterhouse
143 (Supplementary Table S2).

144 The Ranighat drain (KD1), Sisamau Nala (KD2), Bhagwatdas Nala (KD3), Golaghat Nala
145 (KD4), Satti chaura (KD5), Permiya drain (KD6) and Muir mill drain (KD7) join Ganga river
146 at Kanpur with high ammonia and faecal coliform loading and low nitrate loading. The Loni
147 drain (UD1) and City Jail drain (UD2) join Unnao with high BOD and faecal coliform loading.
148 The Shetla Bazar (JD1), Wazidpur drain (JD2), and Bhurighat drain (JD3) join at Jajmau with
149 high BOD, ammonia, nitrate, phosphorous and faecal coliform loading. The Panki Thermal
150 Power Plant drain (PD1), ICI drain (PD2), Ganda Nalla (PD3), COD nalla (PD4) and Halwa
151 Khanda Nalla (PD5) join Pandu river with high BOD, ammonia and faecal coliform loading
152 and moderate nitrate loading. The data used for the study is given in Supplementary Table S3.

153 **2.2 Methodology**

154 A schematic diagram of an overview of the work is given in Figure 2. To obtain the individual
155 effect of climate change, land use, land cover, population and industry, coupled hydrological
156 and water quality simulations are performed by changing only one driver at a time in a
157 simulation, keeping other drivers unchanged in the future. An ensemble of statistically
158 downscaled air temperature and precipitation projections from 20 GCMs (Supplementary
159 Table S4) for the mid-21st century for two climate change scenarios, RCP 4.5 and RCP 8.5, is
160 considered for climate change projections. The projected LULC for 2040 (Both cropland and
161 built-up land are allowed to change) with a good kappa index of agreement from Chawla and
162 Mujumdar, 2018 for the Upper Ganga basin is used for the present study. The population
163 projections of the drain catchment area are calculated from the projected population of India
164 (United Nations, 2019) for the mid-century using the Ratio and Correlation method of
165 Population forecast (Martin & Serow, 1978) where the population growth rate of the city is
166 assumed to be the same as the population growth rate of entire India. The industrial load is
167 increased by 10%, 20% and 30% to analyze the effect of industries on water quality. Assuming
168 a fixed increase in the number of industrial areas per 100,000 population for Kanpur (Indian
169 Institute of Technology, 2013), the percentage increase for 2040 projections is approximately
170 10%.. Additional information on these drivers is given in Supplementary Text S1. The stream
171 flow and water quality are simulated using HEC-HMS model (Supplementary Text S2) and
172 QUAL2K model (Supplementary Text S3), respectively.

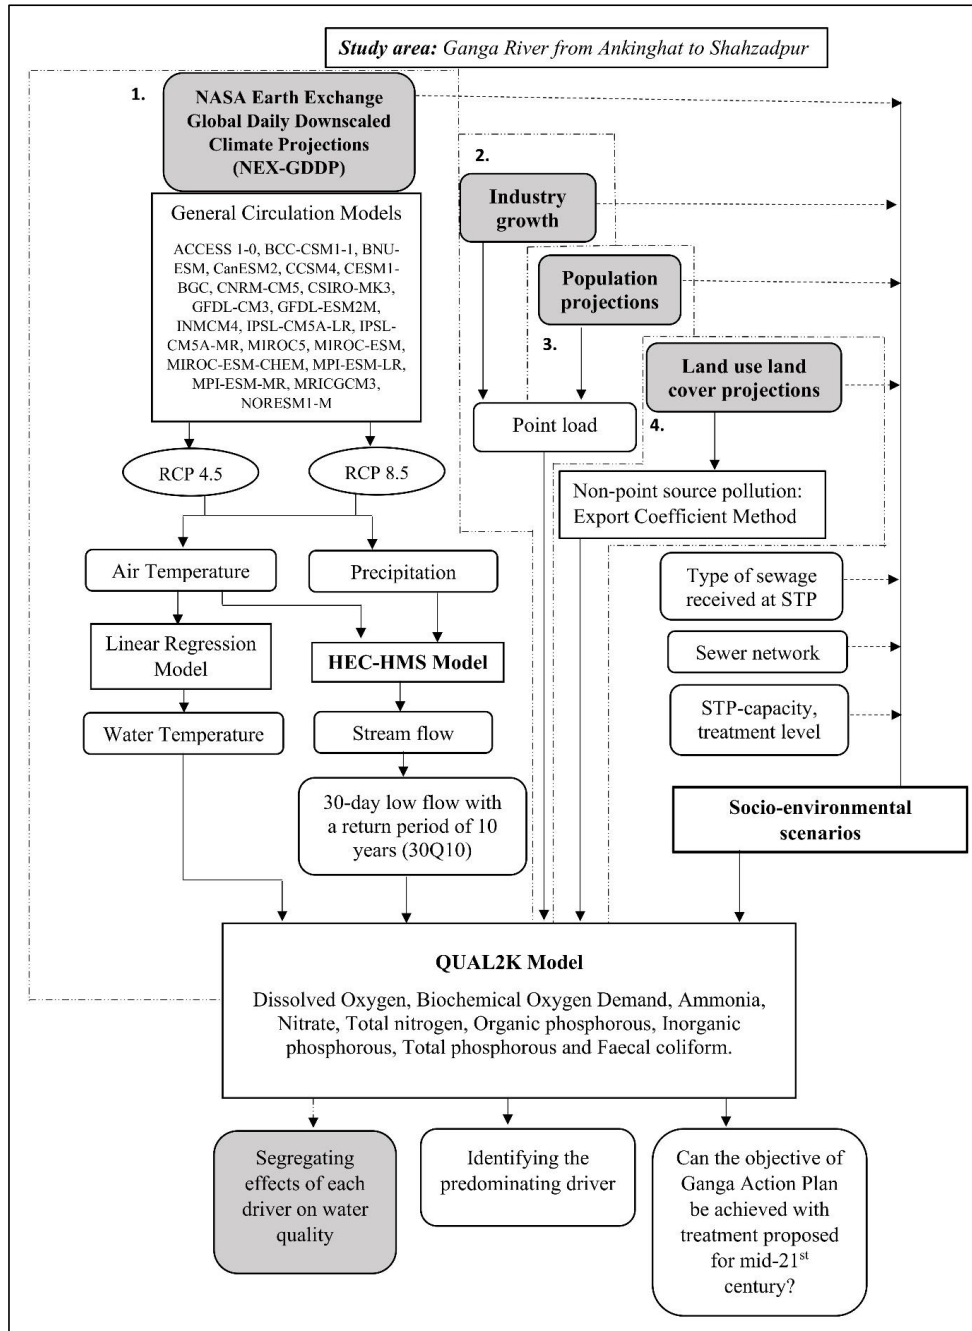

173

174 Figure 2: Overview of work

175



176 **2.2.1 Hydrological Model**

177 The Hydrologic Engineering Center, Hydrologic Modeling System (HEC-HMS 4.3) (U. S 133
178 Army Corps of Engineers Hydrologic Engineering Center, 2000) is used to simulate the
179 streamflow at Ankinghat, the headwater for the water quality simulation. Simple Canopy,
180 Simple Surface, SCS curve number method, SCS Unit Hydrograph, Constant Monthly
181 Baseflow, and Muskingum are the methods used for modelling the canopy, surface, loss,
182 transform, baseflow, and routing, respectively. The model is calibrated for the period 1977-
183 2002 and validated for 2003-2012 on a monthly timescale with an R^2 of 0.6 (Supplementary
184 Text S2). The model is found to perform well for low flows. The climatic inputs such as
185 precipitation, average temperature and temperature range are changed with RCP 4.5 and 8.5,
186 and the curve number is changed with land use land cover projections. The monthly streamflow
187 is simulated by the model and the 30Q10 value is calculated (Supplementary Text S4) and
188 given as input to the water quality model, QUAL2K. For analyzing the individual contribution
189 of each driver, only corresponding inputs are changed while keeping other factors unchanged.

190 **2.2.2 Water quality simulation model**

191 The nine water quality parameters assessed are dissolved oxygen, biochemical oxygen demand,
192 ammonia, nitrate, total nitrogen, organic-, inorganic- and total phosphorous and faecal
193 coliform. These parameters are simulated using the water quality simulation model QUAL2K
194 (Chapra and Pelletier, 2003) (Supplementary Text S3). The inputs to the model are stream flow,
195 stream temperature, water quality at the headwater, hydro geometric characteristics of the river
196 reach such as width, depth, channel slope, side slope, manning's n, meteorological data such as
197 air temperature, dew point temperature, wind speed, evaporation, cloud cover; point loads and
198 diffuse loads. The diffuse load is calculated using an export coefficient method where export
199 from all land-use types is considered (Supplementary Text S5).

200 The point loads include industrial and domestic sewage discharge. The point load projections
201 consider the population and industrial growth. The sewage projections are calculated from the
202 population projections of each drain's catchment area and are taken as 80% of the water supply,
203 135 litres per capita per day. The non-point load changes with land use land cover changes are
204 simulated from export coefficients developed for the study area (Santy et al., 2020). The water
205 temperature is simulated using the Air-water temperature regression model for Ankinghat
206 (Santy et al., 2020), and the 30Q10 value of streamflow from the 2040 through 2060 period is
207 given as input to the QUAL2K model. The calibrated rate kinetics is changed with changes in



208 stream temperature (Supplementary Table S5). The water quality is analyzed at five
209 checkpoints: Kanpur downstream, Jajmau downstream (1), Jajmau downstream (2), Fatehpur
210 downstream, and Shahzadpur. The Jajmau downstream (1) and (2) correspond to immediate
211 downstream and 8km downstream of Jajmau, which is identified as the critical location in the
212 DO sag curve. The individual effect of each driver is analyzed using percentage change from
213 baseline and change ratio. Change ratio is calculated as the ratio of change in a water quality
214 parameter for a single driver to cumulative change expressed in percentage.

$$215 \quad CR_{i,j} = \frac{\Delta C_{i,j}}{\sum_{j=1}^4 \Delta C_{i,j}} \quad (1)$$

216 Where $CR_{i,j}$ is the change ratio of i^{th} water quality parameter for j^{th} driver and $\Delta C_{i,j}$ is the
217 change in i^{th} water quality parameter for j^{th} driver from baseline.

218 **2.3 Socio-environmental scenarios**

219 Five socio-environmental scenarios (Table 1) are considered based on the proposals made for
220 a cleaner Ganga basin (Indian Institute of Technology, 2010 a, b, c, d; Indian Institute of
221 Technology, 2011; Indian Institute of Technology, 2012). The first scenario is the baseline
222 future scenario, considering climate change, LULC change, and population and industrial
223 growth for the mid-21st century with STPs at present-day levels. From second scenario
224 onwards, we assume that all households would have access to toilets, sewer line connectivity
225 is fully established, and STPs receive total capacity sewage. The proposed and tendered STP
226 works for the future are considered for second scenario (Supplementary Text S6), along with
227 future climate change, LULC, and growth of industries and population. We also assume that
228 the faecal coliform concentration at headwater is within the bathing class limit (500 MPN
229 (100mL^{-1})), and the diffuse load contribution of the faecal load is a minimum as open
230 defecation will be entirely removed from the system.

231 The third scenario is a planning scenario proposed by the Urban River management plan
232 (Indian Institute of Technology, 2010a, 2010b) for Ganga. Kanpur is the first city to prepare
233 such a plan in 2021, and the major highlights include increasing the STP capacity to meet the
234 present population (2020), and the plan would last for 15 to 25-year duration. Also, the
235 wastewater flowing in the drains is tapped and redirected to STPs, where mixed sewage,
236 including industrial and domestic sewage, reaches the STP. Even if the industries are
237 discharging at effluent standards, it mixes with untreated wastewater before reaching STPs.
238 This leads to a larger increase in the flow of the drains than the population demand, resulting



239 in overflowing or bypassing of untreated sewage reaching the Ganga River. Hence, it is crucial
240 to study the difference if only domestic sewage reaches STP for treatment. Therefore, one
241 additional sub-scenario is considered for 3, 4 and 5 with separate industrial and domestic
242 sewage treatment. Scenario 4 assumes STP capacity for the 2050 population load is in place.
243 Scenario 5 is the same as scenario 3 but tertiary level treatment is given at the STPs for proper
244 microbial removal as proposed by IIT Consortium reports. Scenarios 4 and 5 show how
245 treatment capacity and level affect water quality, which is more critical to reducing microbial
246 pollution.

247 Table 2 shows a detailed description and nomenclature of the scenarios. In the scenario name,
248 'C' refers to climate change, and the number after C describes climate change scenarios, '45' for
249 RCP 4.5, and '85' for RCP 8.5. This is followed by 'LP' for land use, industry and population
250 projection. For example, C45LP and C85LP represent the socio-environmental scenario 1 for
251 climate change scenarios RCP 4.5 and 8.5. The following letter 'S' represents STP, and the
252 following number denotes the year for which STPs are built to meet the demand: 'S20' and
253 'S50' indicate that the STP capacity is built to meet the population of 2020 and 2050,
254 respectively. This is followed by 'S' or 'T', representing the level of treatment given at STPs: S
255 for secondary and T for tertiary. The letter 'M' or 'D' represents the sewage type received at
256 STPs: M for mixed sewage and D for domestic sewage.

257

258

259

260

261

262

263

264

265

266

267



268 Table 1: Description of the five socio-environmental scenarios

Scenario no	Description	Details
1	Baseline future scenario with STP capacity at present day conditions.	Future Climate, LULC, population, industry for 2050; Point loads of 2018 drain data modified for 2050; present STP working condition
2	Includes proposed STPs (Real-time scenario)	Future Climate, LULC, population, industry for 2050; Point loads of 2018 drain data modified for 2050; complete sewer lines laid; STP working on total capacity; proposed & tendered STPs also considered; all industries comply with effluent standards; STPs work with secondary level treatment
3	Increased STP capacity (Planning Scenario)	Same as scenario 2, with an increase in STP capacity to meet the population of 2020 as proposed by the Urban River Management Plan for Ganga
4	Tertiary treatment at STP	Same as scenario 3, but with tertiary treatment at STPs
5	Ideal scenario	Same as scenario 2, but with an increase in STP capacity to meet the population of 2050

269

270

271

272

273

274

275

276

277



278 Table2: Socio-environmental scenarios. 'C' refers to climate change; '45' and '85' for RCP 4.5
 279 & 8.5; 'LP' for land use, industry and population projection; 'S' represents STP, followed by
 280 number denoting the year (20 for 2020 and 50 for 2050) for which STPs are built to meet the
 281 demand, followed by 'S' or 'T', representing the level of treatment given at STPs (S for
 282 secondary and T for tertiary), and followed by 'M' or 'D' representing the sewage type received
 283 at STPs: M for mixed sewage and D for domestic sewage.

Sl no	Scenario name	Climate scenario	LULC	Population	Industry	Sewer lines	STP capacity	STP treatment level	Sewage type				
1	C45LP	RCP 4.5	LULC projection for 2040 from Chawla & Mujumdar, 2018	Population Projections for 2050	Industrial growth for 2050	Present	Present	Secondary	M				
2	C45LPSPSM					Fully laid	Proposed STPs	Secondary	M				
3a	C45LPS20SM						STPs to meet 2020 population	Secondary	M				
3b	C45LPS20SD						D						
4	C45LPS20TM						STPs to meet 2020 population	Tertiary	M				
4b	C45LPS20TD						D						
5	C45LPS50SM						STPs to meet 2050 population	Secondary	M				
5b	C45LPS50SD					D							
6	C85LP					RCP 8.5	LULC projection for 2040 from Chawla & Mujumdar, 2018	Population Projections for 2050	Industrial growth for 2050	Present	Present	Secondary	M
7	C85LPSPSM									Fully laid	Proposed STPs	Secondary	M
8a	C85LPS20SM	STPs to meet 2020 population	Secondary	M									
8b	C85LPS20SD	D											
9a	C85LPS20TM	STPs to meet 2020 population	Tertiary	M									
9b	C85LPS20TD	D											
10a	C85LPS50SM	STPs to meet 2050 population	Secondary	M									
10b	C85LPS50SD	D											

284
 285
 286
 287




288 **3. Results & Discussion**

289 **3.1 Future projections of drivers**

290 **3.1.1 Climate change projections**

291 The air temperature anomalies for RCP 4.5 and RCP 8.5 show an increase in air temperature
 292 within a range of 1.5 to 2.5 °C for mid of 21st century, with a higher temperature rise in the
 293 RCP 8.5 scenario (Figure 3(a)). The annual precipitation anomaly from the historical period
 294 shows an increase in median annual precipitation for the Ankinghat catchment (Figure 3(b)).
 295 The model-wise air temperature and precipitation projections for climate change show large
 296 variability (Supplementary Figure S1); hence, an ensemble of GCMs is considered for the
 297 analysis. The monthly precipitation increases during the summer monsoon season and
 298 decreases during the pre-monsoon season (Supplementary Figure S1). The increase in air
 299 temperature and the resulting stream temperature (Supplementary Figure S2) and reduction in
 300 summer precipitation (Supplementary Figure S1) can have a negative impact on streamflow,
 301 with more low flow events which can reduce the dilution volume for the pollutant loads.

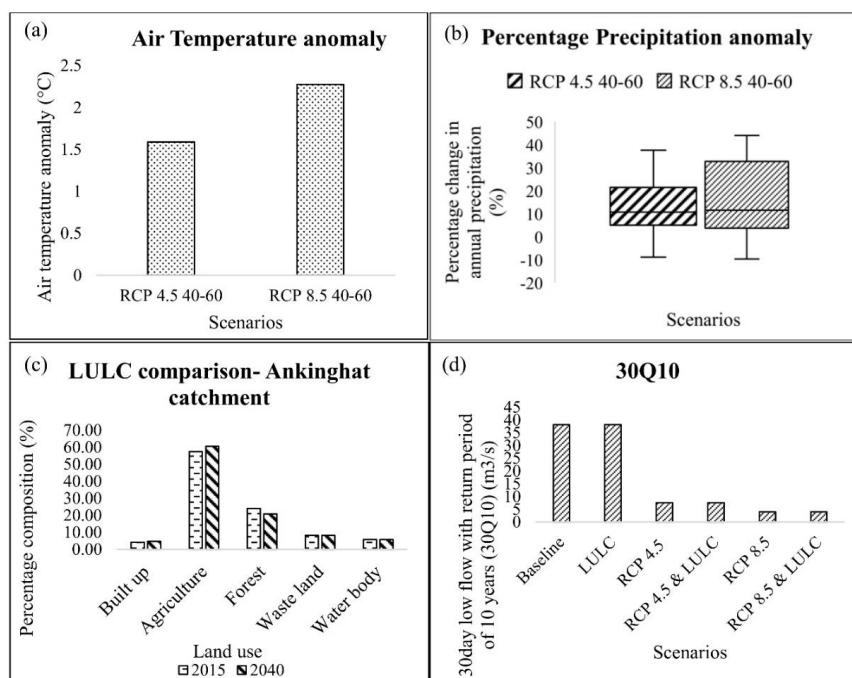

302

303 Figure 3: Climate change and land-use projections (a) Air temperature anomaly and (b)
 304 Percentage precipitation anomaly for Ankinghat catchment; (c) Land use land cover percentage



305 composition for Ankinghat catchment for 2015 and 2040; (d) 30-day low flow with a return
306 period of 10 years for climate change and land use land cover projections

307 **3.1.2 Land use land cover projections**

308 The land use land cover projections for the Ankinghat catchment show an increase in
309 agricultural land and built-up land and a reduction in forestland (Figure 3(c)). The percentage
310 composition of the land for the study area in 2015 and 2040 simulated is shown in Fig 4. The
311 projected LULC shows an increase in agricultural land and built-up land and a reduction in
312 wasteland and forestland for both the stretches. Agricultural land is the predominant land cover
313 type for the study area; hence, non-point source pollution can have a major effect on water
314 quality. An increase in non-point pollution load of up to 10% is simulated for the future LULC
315 which can affect mainly the nutrient pollution. Also, increase in agricultural land can affect the
316 evapotranspiration and hence affect the streamflow which in turn affects water quality by
317 altering the dilution factor (Zou et al., 2017).


318 **3.1.3 Population and Industrial projections**

319 The projected population of the mid-century catchment area of the drains along with the present
320 population is shown in Fig 5(a), and the sewage generated by the present and future population
321 calculated is shown in Fig 5(b). The population projected for mid-century matches with the
322 projections made by Kanpur and Unnao city for Planning, which uses the mean of population
323 obtained from Arithmetic increase, geometric increase and incremental increase method
324 (Ministry of Urban Development et al., 2016, Unnao Nagar Palika Parishad, 2016). A
325 population increase is expected in the Kanpur area, where there is much scope for urban
326 expansion due to available fertile land for cultivation, and job opportunities due to industrial
327 growth for the future. The rise in population can lead to rise in sewage generated and hence
328 increase the point loads coming to the drains, especially the faecal coliform. Industrial growth
329 is expected in the Kanpur industrial belt, due to availability of raw materials and current efforts
330 towards industrialization in Uttar Pradesh to increase economic growth (The Economic Times,
331 2021). The industrial growth can lead to high pollution in river if the effluents are not treated
332 properly before disposal.

333 The comparison of point loads from drains with population and industry projections are shown
334 in Figure 5 (c)-(g). The BOD loads are greatly affected by population and industrial growth,
335 with a higher loading corresponding to population growth at all drains. The effect of industrial
336 and population growth has significantly affected Unnao and Jajmau BOD loadings. Unnao




337 drains did not contribute to ammonia and nitrate loading. The effect of population dominates
 338 the effect of industry on ammonia and nitrate loading, except for Jajmau, where both the effects
 339 are found comparable. The most significant increase in ammonia and nitrate loading from
 340 baseline is observed for Jajmau drains. The only drain which carries P load is the Jammu drain,
 341 which is found to increase further with industry growth, whereas population growth did not
 342 impact its loading. Faecal coliform loading increases with population growth at all checkpoints
 343 and is not affected by industrial growth.

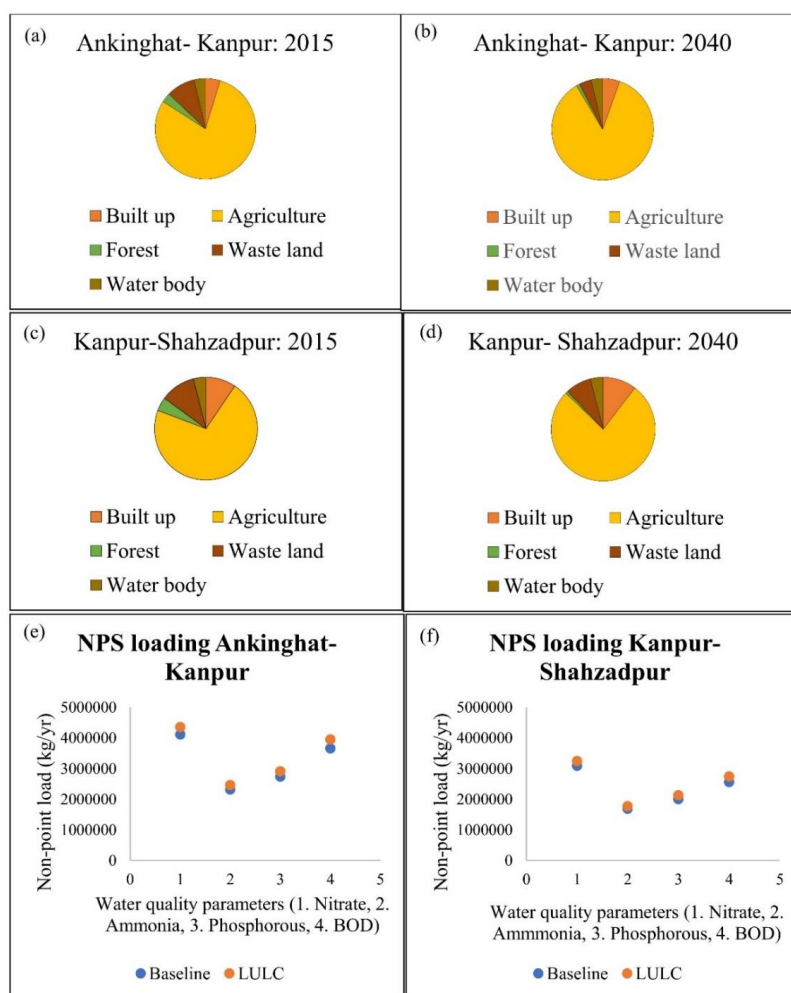

344

345 Figure 4: Land use land cover projections. Percentage composition of land use for Ankinghat
 346 to Kanpur in (a) 2015 and (b) 2040, for Kanpur to Shahzadpur in (c) 2015 and (d) 2040. Non-
 347 point source pollution load for (e) Ankinghat to Kanpur and (f) Kanpur to Shahzadpur.

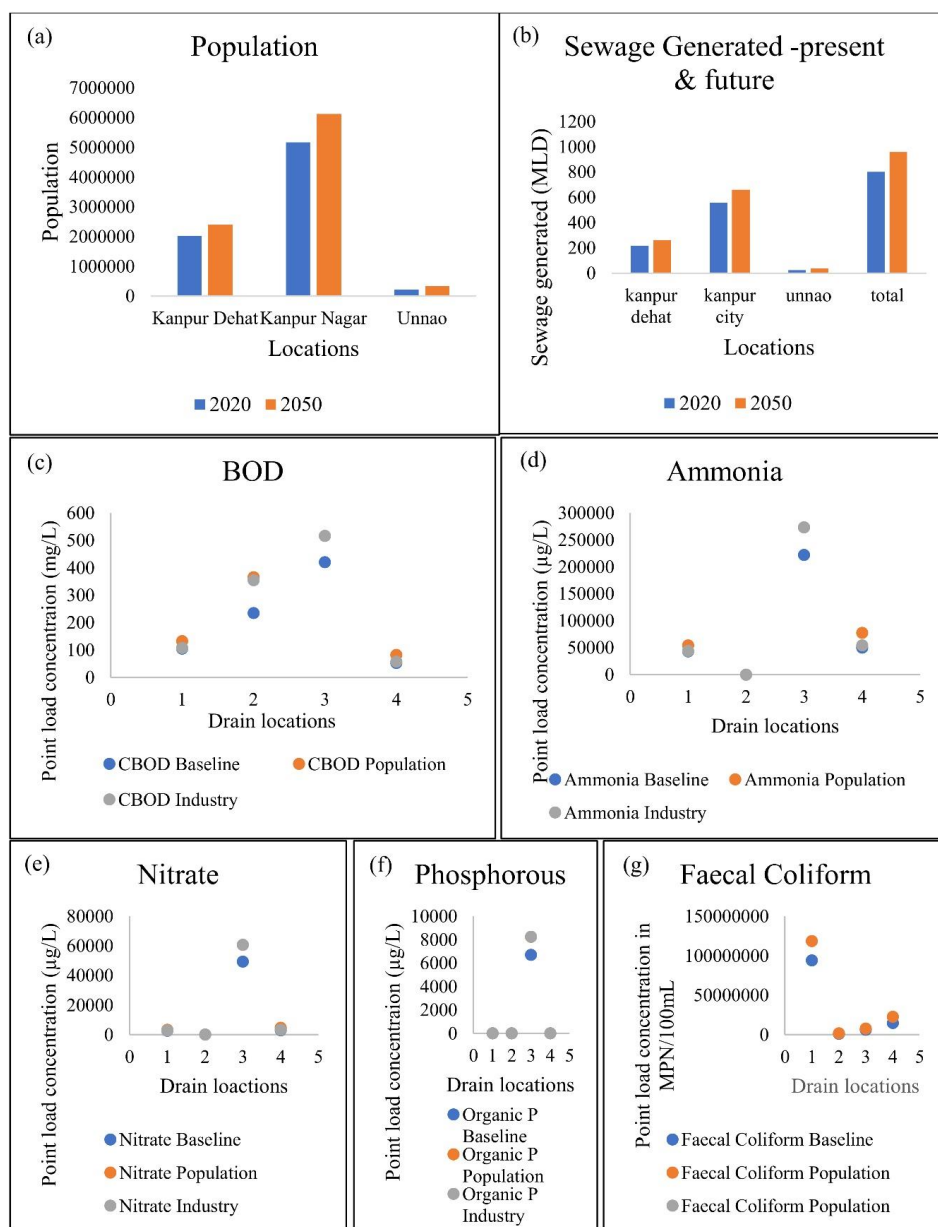

348

349 Figure 5: (a) Population projections for the catchment area of drains; (b) Sewage generated
 350 comparison for 2020 and 2050; Point load comparison of population and industry projections
 351 with the baseline for (c) BOD, (d) Ammonia, (e) Nitrate, (f) Phosphorous and (g) Faecal
 352 Coliform.

353



354 **3.2 Streamflow changes under changing climate and land use land cover**

355 The 30Q10 flow comparison for the climate change and land use land cover projections
356 simulated from the HEC-HMS model in Figure 3(d) shows a reduction of low flows for the
357 future. The annual minima streamflow at Ankinghat also shows a considerable decrease in the
358 magnitude of low flows in the future, with more reduction corresponding to the RCP 8.5
359 (Supplementary Figure S3). The month with the lowest flow is March (Supplementary Figure
360 S4). Even though the Ganga River is snow-fed, the barrages constructed upstream nullify the
361 impact of snowmelt on streamflow at Ankinghat, thus having low flows during summer (Santy
362 et al., 2020). The significant reduction in the summer month flows poses a severe threat to the
363 quantity and quality of water. The low flows are predicted to reduce with high warming in
364 Europe (Marx et al., 2018).

365 The land use land cover is not found to affect low flow significantly, whereas climate change
366 significantly reduces the low flow. The increase in agricultural land simulated can lead to an
367 increased evapotranspiration and can affect low flows. However, significant changes in low
368 flows are not identified and can be due to the large catchment area for Ankinghat and the
369 resulting complex physical processes resulting in a slight change in streamflow at Ankinghat
370 with land-use changes (Fohrer et al., 2001). The curve numbers of each sub-catchment had
371 significant changes with LULC projections (Supplementary Figure S5); however, it was
372 insufficient to make significant changes in streamflow. The effect of land-use changes on
373 streamflow is found to be more pronounced at the subbasin than at the basin level (Zhou et al.,
374 2013).

375 **3.3 Individual effects of climate change, land use land cover, population and industrial** 376 **growth on water quality**

377 The individual effects of major drivers of pollution- climate change, land use land cover,
378 population and industries on water quality simulated using the coupled HEC-HMS and
379 QUAL2K model is compared in terms of percentage changes of nine water quality parameters
380 for each driver from baseline period (Figure 6).

381 **3.3.1 Influence of climate change on water quality**

382 Climate change affects water quality mainly by low flow and stream temperature changes.
383 Climate change is found to affect all water quality parameters significantly (Figure 6), with a
384 higher percentage change corresponding to higher warming scenario RCP 8.5. The effect of



385 climate change dominates the effect of other drivers for DO concentration (Figure 6(a) & 7(a))
386 with a maximum percentage reduction of 60% for Kanpur downstream corresponding to RCP
387 8.5. Climate change has a more significant effect on DO, which can be attributed to a reduction
388 in saturation DO with a rise in stream temperature and a reduction in dilution volume followed
389 by a decrease in low flows. The percentage increase in BOD is more than 100% for future
390 climate at Kanpur and Jajmau downstream points. The percentage increase in ammonia with
391 RCP 4.5 and 8.5 is also more than 100% for Kanpur and Jajmau downstream. The percentage
392 change in P components with climate change is above 50% for Kanpur and Jajmau
393 downstream. The percentage change in nitrate is found to be less than 18% with changes in
394 driver. The percentage change in nitrate concentration is small compared to other water quality
395 parameters (Figure 6(d)) because of the higher denitrification rate for this river stretch. Increase
396 in pollutant concentration with climate change is due to reduced dilution volume following a
397 decreased low flow. It can be noted that the nutrient concentration is high during the low flow
398 period, and climate change is the important driver aggravating pollution; hence, climate change
399 alone can lead to eutrophication during the low flow period for the Ganga river stretch
400 considered here. The climate change leads to increased pollution of FC in Kanpur and Fatehpur
401 downstream with an increase in more than 50% of the concentration, while the concentration
402 is found to reduce for Jajmau downstream and Shahzadpur (20 to 85%) (Figure 6(i)). This
403 reduction at Jajmau is due to FC's higher sensitivity to temperature (Santy et al., 2020).

404 **3.3.2 Influence of land use land cover on water quality**

405 The land use land cover change leads to changes in non-point source pollutant load and hence
406 an increase in pollution. The effect of land use land cover on water quality parameters are found
407 to be minimal except for nutrients with a percentage change less than 5%. The percentage
408 change in ammonia with LULC for all checkpoints is found to be less than 4%. The effect of
409 LULC on nitrate is more in Jajmau than in other checkpoints (Figure 7(d)), however, the
410 percentage change in nitrate is less than 1. The land use land cover alone doesn't lead to higher
411 pollution; however together with climate change it can aggravate pollution due to reduction in
412 dilution volume for the increased NPS load.

413 **3.3.3 Influence of population on water quality**

414 The population growth is found to affect all water quality parameters except for P, due to the
415 absence of P in domestic sewage. The percentage change in BOD with population is found to
416 be 30%. The effect of population growth is more pronounced at the Jajmau downstream due to



417 additional point loads projected with population. However, the extra loading at Pandu river
418 drains due to population growth is offset by the excess flow from Pandu river drains. The effect
419 of population on DO is slightly higher than that of industrial growth at Kanpur downstream.
420 However, industrial growth is dominant for other checkpoints because Kanpur downstream is
421 the immediate downstream point of the industrial loading, and hence it will take some distance
422 downstream to reach the impact. The effect of population on nitrate varies from 2 to 4% except
423 for Kanpur downstream, where the percentage increase is less than 1. The percentage change
424 in ammonia and TN with population growth ranges from 13-24% and 6-17% respectively. The
425 effect of population on FC concentration is dominant with a percentage change ranging from
426 20-30% for all check points. The increase in concentration with population growth is due to
427 the increased point loads, resulting in high pollution downstream of the drain confluence.

428 **3.3.4 Influence of industry on water quality**

429 Industrial growth is found to affect DO, BOD and ammonia. Industrial growth with 30% rise
430 in industry (INDS+30) is found to have more impact than population growth on BOD with an
431 increase of about 40% from baseline at all checkpoints. Ammonia concentration is found to be
432 more affected by industrial growth in the Jajmau downstream (Figure 6(c) & 7(c)) with a
433 percentage change varying from 20 to 30%. The P components are not found to change with
434 industrial growth, as the primary source of P load in this river stretch is fertilizers used in
435 agricultural fields (Supplementary Table1). The only point load of P is from an industry
436 effluent from Jajmau and is well within limits. The industrial growth does not affect FC
437 concentration due to absence of FC in the industry effluent. A considerable percentage
438 reduction of 10% in DO concentration is simulated at Jajmau d/s with a 30% rise in industry.
439 The industrial growth resulted in higher pollution due to an increased point load.

440 **3.3.5 Percentage contribution of each driver to water quality change**

441 The percentage contribution of each driver for future water quality change calculated from the
442 change ratio for Kanpur and Shahzadpur is shown in Figures 7 and 8. The major drivers of
443 pollutants such as population, industries, land use land cover and climate change have a large
444 effect on all water quality parameters (Figure 6). It can be noted that the contribution of climate
445 change dominates the effect contribution of other drivers (Figure 7 & 8). This can be due to the
446 dominating effect of streamflow over the changes in point and non-point loads due to
447 population, industrial and land use land cover growth. The effect of climate change decreases



448 downstream of the stretch due to high flow from Pandu river drains joining the river
449 (Supplementary Figure S6, S7)


450 The effect of each driver is found to change with checkpoints (Figure 7 & Supplementary
451 Figure S6) and can be attributed to the varied state of loads at each checkpoint. Downstream
452 of Kanpur can be considered a representative of critical locations or drain confluence points,
453 whereas Shahzadpur can be considered a representative of a location away from point loads.
454 The pollution hotspot points are more vulnerable to climate change (Figure 7 & Supplementary
455 Figure S8) and its influence is very high and, hence, neglecting climate change in future designs
456 can have severe implications.

457 Climate change's contribution is larger compared with other drivers, especially at Kanpur
458 downstream. The contribution of climate change to DO, BOD, ammonia, nitrate, TN, organic
459 P, inorganic P and TP is 85%, 70%, 85%, 90%, 85%, 95%, 95% and 95% respectively (Figure
460 7). This high contribution of climate change is due to the reduced dilution volume. The
461 contribution of population, industry and land use together is only around 20 to 30%. The
462 contribution of population to DO, BOD, ammonia, nitrate, and TN is 6%, 12%, 5%, 2%, and
463 7% respectively (Figure 7). The contribution of industry growth is comparable to the
464 contribution of population growth. The major contribution of FC is from climate change and
465 population growth, with an individual contribution of 65 and 35% (Figure 7). Land use land
466 cover has a considerable effect on nitrate and P concentrations in comparison with other water
467 quality parameters, however the contribution is only 5%. The effect of population, industry and
468 land use tend to increase downstream due to the addition of more flows from Pandu river drains
469 resulting in an increased flow and hence an increased dilution volume.

470 The individual contribution of climate change is reduced from Kanpur to Shahzadpur. The
471 contribution of climate change to DO, BOD, ammonia, nitrate, TN, organic P, inorganic P and
472 TP is 35%, 30%, 25%, 60%, 40%, 60%, 75% and 75% (Figure 8). The contribution of
473 population to DO, BOD, ammonia, nitrate, and TN, is 35%, 30%, 40%, 20%, and 30%,
474 respectively (Figure 8). Climate change, population and industry are found to contribute
475 equally to DO and BOD concentration. The contribution of population to FC has risen from
476 Kanpur to Shahzadpur; however, climate change contribution is slightly higher than
477 population. The contribution of climate change to ammonia increase reduced for Shahzadpur,
478 with population and industrial contribution overwhelming the effect of climate change.
479 However, climate change contribution is dominant for nitrate and TN. The higher contribution



480 of ammonia for population and industrial growth is due to large ammonia concentration in
 481 sewage and industrial effluent. The contribution of land use land cover on P components is
 482 large with 20 to 40% contribution. However, climate change is found to dominant for P
 483 concentration due to low dilution volume followed by a reduced low flow.

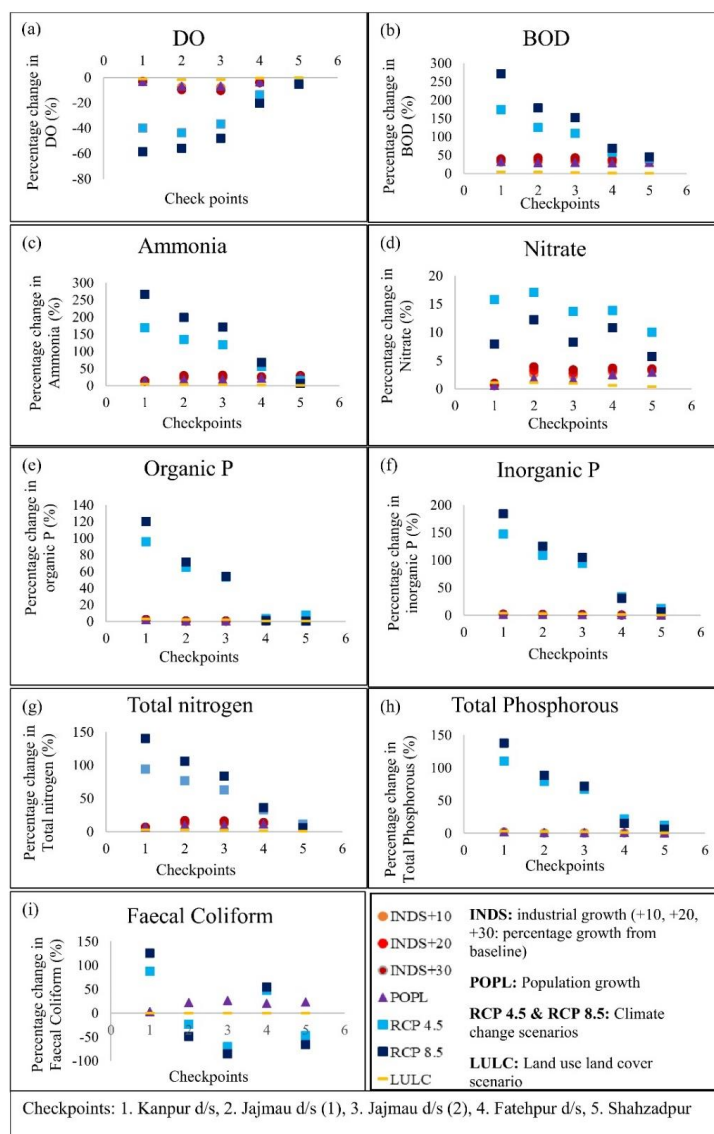


484

485 Figure 6: Percentage change in water quality parameters for climate change (RCP 4.5 & RCP
 486 8.5), land use land cover (LULC), population (POPL), and Industry (INDS) growth. (+10,+20
 487 and +30 correspond to the percentage increase in industry in the future) for (a) DO, (b) BOD,




488 (c) ammonia, (d) nitrate, (e) organic phosphorous, (f) inorganic phosphorous, (g) total nitrogen,
489 (h) total phosphorous, and (i) faecal coliform.

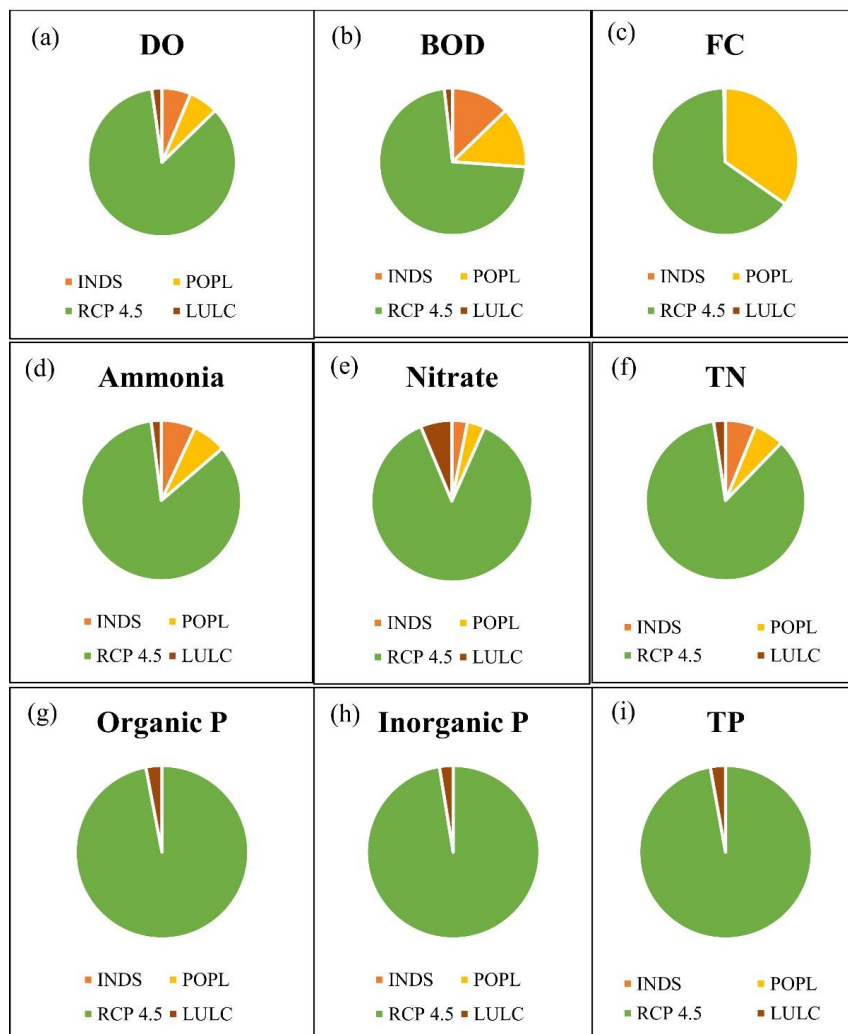

490

491 Figure 7: Individual effects of climate change (RCP 4.5), land use land cover (LULC), industry
492 (INDS) and population (POPL) on (a) DO, (b) BOD, (c) Faecal coliform, (d) Ammonia, (e)
493 Nitrate, (f) total nitrogen, (g) organic-, (h) inorganic- and (i) total phosphorous for Kanpur

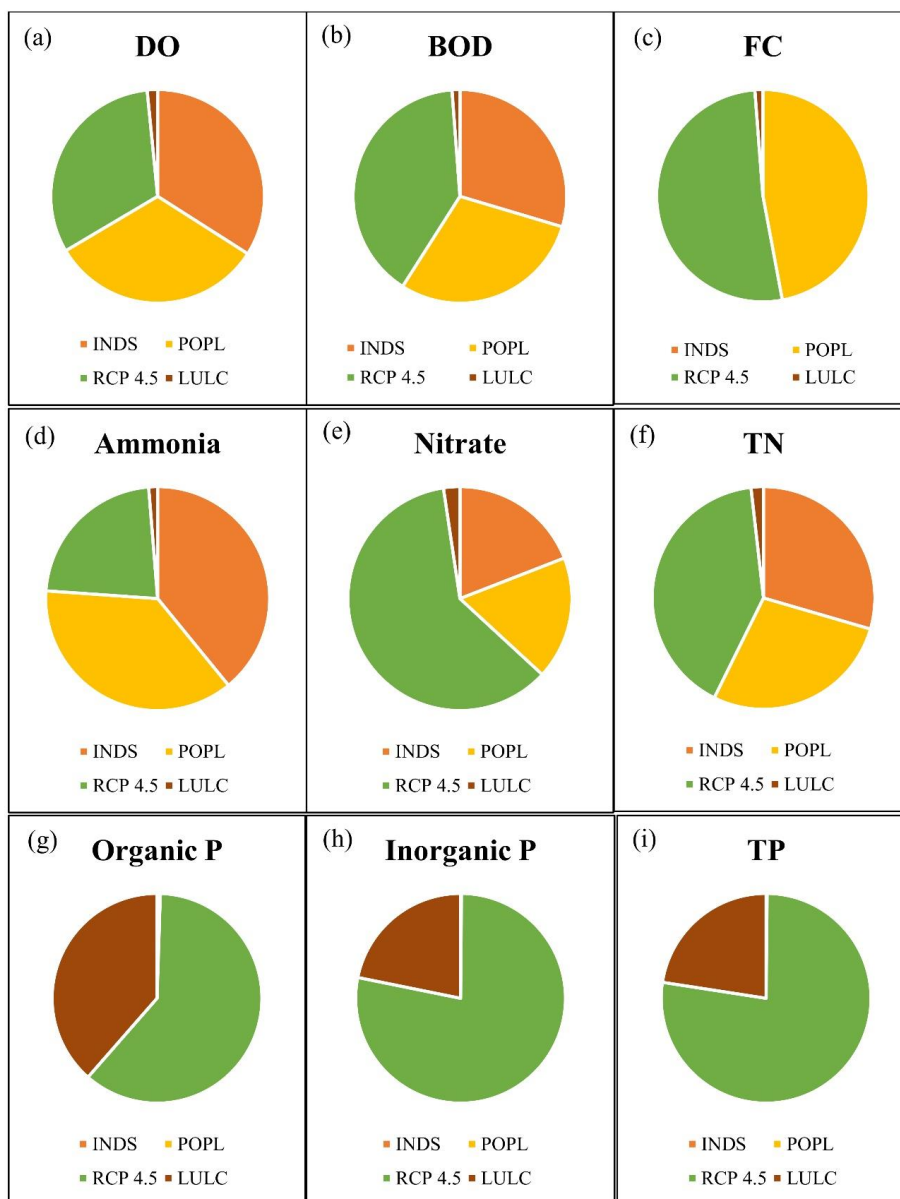

494

495 Figure 8: Individual effects of climate change (RCP 4.5), land use land cover (LULC), industry
496 (INDS) and population (POPL) on (a) DO, (b) BOD, (c) Faecal coliform, (d) Ammonia, (e)
497 Nitrate, (f) total nitrogen, (g) organic-, (h) inorganic- and (i) total phosphorous for Shahzadpur

498


499



500 **3.4 Water quality for socio-environmental scenarios**


501 The treatment units are usually designed considering only the population aspect. The above
502 section 3.3 shows climate change, land use, and industrial growth also affect water quality
503 considerably. The water quality is analyzed for the future considering population growth,
504 industrial growth, climate change and LULC and the effectiveness of the treatment proposals
505 are analyzed with the help of socio-environmental scenarios. The point loads calculated for
506 socio-environmental scenarios are given in Supplementary Text S7. The results of important
507 scenarios for the critical checkpoints are shown in Figures 9 and 10. The results of all scenarios
508 for the entire study area are given in Supplementary Figures S9 & S10. For the scenarios
509 'C45LP' and 'C85LP', DO goes below 4 mgL^{-1} a 35km, and 51km stretch, respectively,
510 downstream of Kanpur drains (Figure 9(a) & Supplementary Figure S9). It shows the
511 intensification of pollution for future climate change, land use, industry and population if no
512 actions are taken. Also, it can be noted that the pollution for the RCP 8.5 scenario is higher
513 than RCP 4.5 (Figure 9 & Supplementary Figure S9). With all sewer lines laid and STPs
514 working at full capacity, DO improves considerably for the entire stretch, making it fit for
515 aquatic life. For the scenarios 'C45LPSPSM' and 'C85LPSPSM', the DO rises above 4 mgL^{-1} ,
516 revealing that the river is safe for aquatic life even with the present and proposed treatment
517 plants. The increase in treatment level to tertiary didn't have much effect on DO concentration.
518 It can be noted that even in the adverse climate change scenario of RCP 8.5, with the proposed
519 STPs, the goals of GAP can be achieved in terms of DO concentration (Figure 9 &
520 Supplementary Figure S9).

521 The BOD concentration increases drastically for 'C45LP' and 'C85LP' from the baseline due to
522 the high pollution load due to climate change, LULC, industry and population. Even for the
523 baseline scenario, the stretch after the confluence of Kanpur drains exceeds the bathing class
524 limit of 3 mgL^{-1} . The only scenario in which the entire stretch achieves the objective of GAP is
525 'C45LPS50SD' (Figure 9(b) & Supplementary Figure S9). However, a significant reduction in
526 concentration is observed from scenarios 1 to 5. The tertiary treatment greatly reduces the
527 pollutant concentration concerning BOD (Supplementary Figure S9). Also, it can be seen that
528 BOD concentration improves if domestic sewage only reaches the STPs, implying that STP
529 capacity for 2050 population demand is essential to have good water quality (Supplementary
530 Figure S9). The 2020 demand STP capacity will not be sufficient even if we provide tertiary
531 treatment (Figure 9(b)). For scenario 'C45LPS50SM', the entire stretch except for the 10km
532 downstream of Kanpur drains falls within bathing class limits.

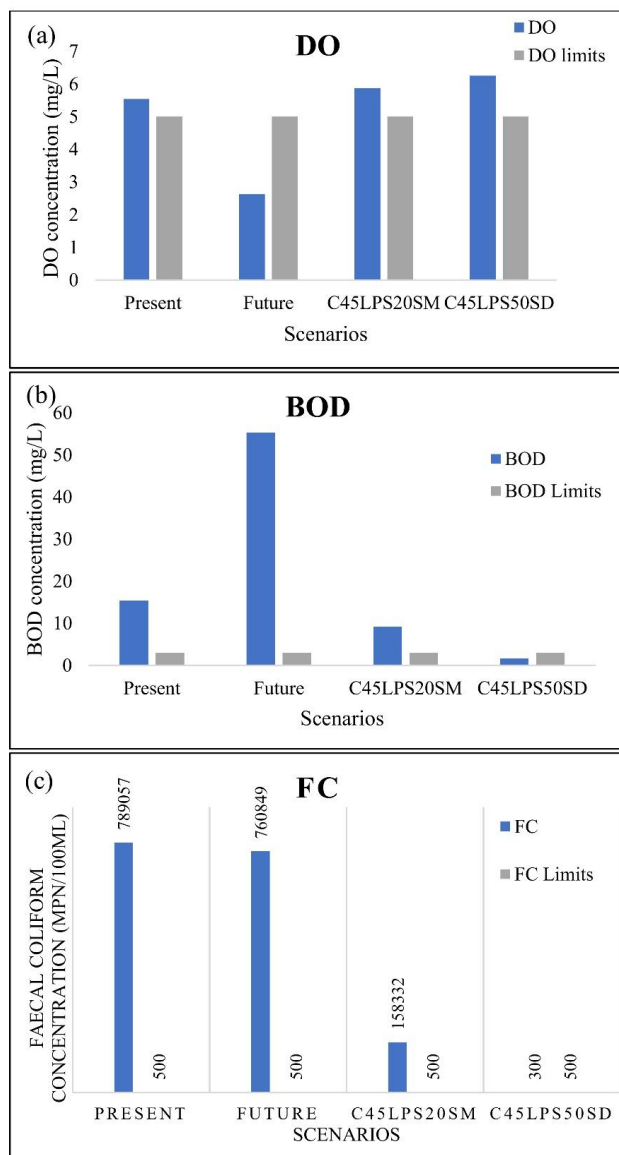

533

534 Figure 9: Water quality for future under proposed treatment. (a) DO, (b) BOD and (c) Faecal
 535 coliform (FC) for socio-environmental scenarios. 'C45LPS20SM' is the treatment proposed by
 536 authorities for 2050; 'C45LPS50SD' is the scenario proposed in this paper to contain the
 537 pollution.

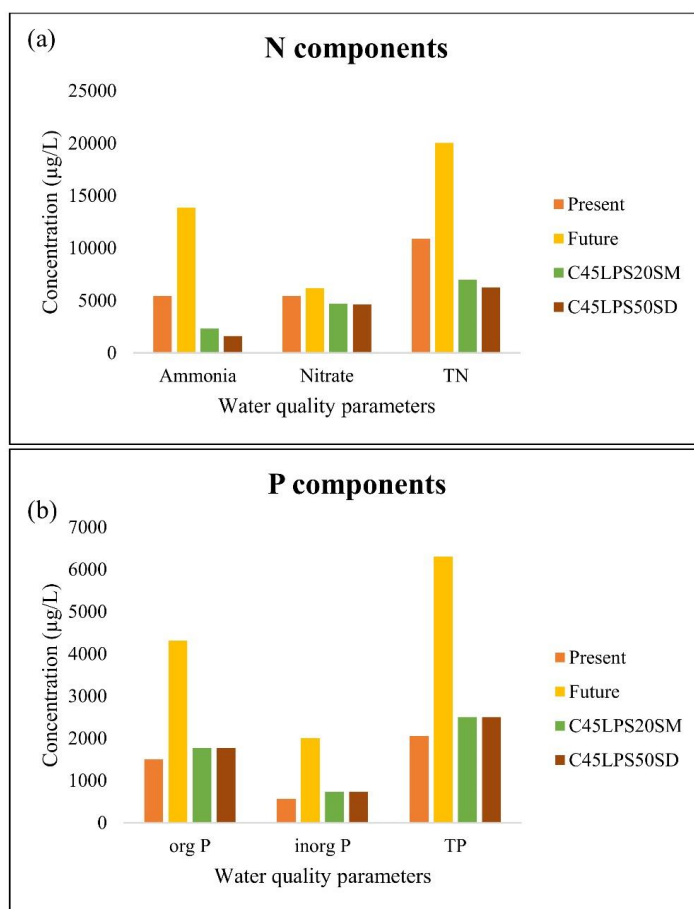

538

539 Figure 10: Nutrient projections for future under proposed treatment. (a) Nitrogen components
540 (ammonia, nitrate and total nitrogen); (b) Phosphorous components (organic-, inorganic- and
541 total phosphorous). 'C45LPS20SM' is the treatment proposed by authorities for 2050;
542 'C45LPS50SD' is the scenario proposed in this paper to contain the pollution.

543 Microbial pollution is a significant challenge that requires great attention. Most drains carry
544 wastewater with a very high FC concentration (in the order of 10^8). Faecal coliform profile
545 plots for socio-environmental scenarios 1-5 and climate change scenarios are given in Figure
546 9(c). A drastic reduction in FC concentration is observed with increased STP capacity. It is
547 noticed that only for scenario 5b, the entire stretch is fit for bathing concerning FC
548 concentration (Figure 9(c)). Even if we provide STPs to meet the demand of the 2050
549 population (Scenario 5a), due to the added flow from industrial discharge, the capacity of the
550 STPs will not be sufficient to cater to domestic and industrial wastewater flow. Hence, some



551 amount of the sewage overflows or gets bypassed, and as a result, some portion of untreated
552 sewage reaches the river, further adding to pollution. In scenario 5b, only domestic sewage
553 reaches the STP; hence the capacity can meet the demand, and the treated industrial wastewater
554 is discharged downstream of the STP influent point of the drain or through separate drains and
555 discharged to the river. Unlike other pollutants, due to very high FC loading in the untreated
556 sewage, mixing with treated water, even though it reduces the concentration, fails to comply
557 with the standards. The proposed treatment cannot contain FC pollution due to aggravated
558 pollution in future with climate change, land use, industry and population.

559 The high concentration of ammonia, nitrate and TN is drastically reduced for scenarios 2 to 5
560 (Figure 10 (a) & Supplementary Figure S10). The tertiary treatment brings down ammonia
561 concentration considerably. Scenarios 3 and 4 do not change much of the nitrate concentration
562 because the existing STPs are efficient in removing nitrates, and tertiary treatment is not
563 required. Nitrate is a crucial water quality parameter as most people depend on groundwater
564 for drinking. Nitrate concentration for the study area is below 7mg/L, well within drinking
565 water limits (45mg/L), hence no health hazards. TN and ammonia follow the same trend
566 (Figure 10 (a)& Supplementary Figure S10).

567 The organic P pollution increases with future climate, LULC, industry and population, which
568 gets drastically reduced for all scenarios 2 to 5 (Figure 10 (b) & Supplementary Figure S10).
569 The significant contribution of phosphorous loading is diffuse sources. Only Jajmau drains
570 carry a phosphorous load. The treatment given at the STPs reduces the pollution from point
571 loads. Inorganic P also varies in the same order as organic P. The initial variation up to Kanpur
572 is the contribution of non-point source pollution (Supplementary Figure S10). High
573 concentration of nitrogen and phosphorous can lead to eutrophication, a severe issue for river
574 health. Also, with the second scenario of proposed STPs, sewage gets treated fully at Jajmau,
575 and hence P pollution is under control for the future.

576 The ranking of the socio-environmental scenario is given in Table 3, with rank 1 for the best
577 water quality. 'C45LPS50SD' has resulted in good water quality in terms of bathing standards.
578 Hence, the STP capacity to meet 2050 population demand and separate treatment for industrial
579 and domestic wastewater is very important in achieving GAP goals. The treated industrial
580 wastewater should be discharged into the river directly or used for irrigation instead of draining
581 it into the drains that find their way to STP. The water quality for scenarios 2 to 5 (Table 1) fits
582 aquatic life. Hence, the planning scenario successfully achieves good water quality, except for



583 BOD and microbial pollution, which is a significant concern, mainly if the water is used for
 584 irrigation, bathing, or drinking purposes.

585 Table 3: Ranking of treatment scenarios with rank 1 for the best water quality

Scenarios	DO	BOD	FC	Ammonia	Nitrate	TN	Organic P	Inorganic P	TP
C45LP	15	15	16	15	16	15	3	3	3
C45LPSPSM	14	9	14	14	8	14	1	2	1
C45LPS20SM	6	6	7	6	3	4	1	2	1
C45LPS20SD	5	5	5	5	5	6	1	2	1
C45LPS20TM	7	7	6	7	4	5	1	2	1
C45LPS20TD	4	4	4	4	6	7	1	2	1
C45LPS50SM	3	2	3	3	2	2	1	2	1
C45LPS50SD	1	1	1	1	1	1	1	2	1
C85LP	16	16	9	16	15	16	4	4	4
C85LPSPSM	8	12	15	8	14	8	2	1	2
C85LPS20SM	11	13	13	11	10	9	2	1	2
C85LPS20SD	10	11	10	10	12	11	2	1	2
C85LPS20TM	12	14	11	12	11	10	2	1	2
C85LPS20TD	9	10	12	9	13	12	2	1	2
C85LPS50SM	13	8	8	13	9	13	2	1	2
C85LPS50SD	2	3	2	2	7	3	2	1	2

586

587 **4. Conclusions:**

588 After the Ganga Action Plan (GAP) was launched in 1986 (Environment & Forests Division
 589 and Water Resources Division Planning Commission Government of India, 2009), there have
 590 been efforts toward a pollution-free Ganga River. Water quality has considerably improved but
 591 it does not comply with bathing class limits, the objective of GAP. The individual effects of
 592 significant drivers of pollution, climate change, land use land cover, population and industry
 593 on water quality are analyzed for the most polluted stretch of Ganga river passing through
 594 Kanpur in the mid-21st century using a coupled HEC-HMS and QUAL2K model. Climate
 595 change, land use land cover, population and industry growth affect water quality. However,
 596 climate change is found to dominate the effect of other drivers for the low flow period due to
 597 lower dilution volume followed by a reduction in low flows simulated for the future with a
 598 percentage contribution of above 70% at Kanpur.

599 The major factors affecting water quality in the future- population, land use land cover, sewer
 600 lines connectivity, STP capacity, treatment level and the type of sewage, domestic or mixed
 601 reaching STP, treatment proposals for Ganga river - are considered in developing five socio-



602 environmental scenarios. Five socio-environmental scenarios were developed for the study
603 area to evaluate the effectiveness of the treatment proposals made by the authorities to achieve
604 the GAP objective by the mid-21st century. The results show that the proposed and tendered
605 STPs will not be sufficient to bring water quality to the bathing class, the objective of GAP.
606 However, DO and nutrient pollution is improved with this proposed treatment. The BOD and
607 microbial pollution are the parameters which need additional attention to save the Ganga river
608 from future pollution. The only scenario by which BOD and FC can be brought to bathing class
609 limits are 'C45LPS50SD' and 'C85LPS50SD', where the STPs to meet the demand of the 2050
610 population is provided. By increasing the STP capacity, the water quality is found to improve.
611 Also, water quality is improved by increasing the treatment level to tertiary. However,
612 treatment capacity is more important than treatment level, especially for microbial pollution.
613 Raw sewage has a significantly high FC concentration; hence, no untreated sewage should
614 reach the river, as it will deteriorate water quality, especially in the low flow period.

615 This study will be highly beneficial for the policymakers and the authorities as it will help them
616 take the mitigation actions to reach GAP's objective. Also, the study shows the quantum of
617 benefits of segregating sewage reaching STPs. Even if the STP capacity of 2050 is in place and
618 the mixed sewage reaches STPs, the objective of GAP cannot be achieved unless the treatment
619 is increased to the tertiary level. The missing data of some water quality parameters at some
620 stations, model uncertainty, and parameter uncertainty contribute to some uncertainty in our
621 work. However, we believe that the qualitative results will not be affected. Also, the land use
622 projections considered assumes the transition in the past to occur in future too which can lead
623 to some uncertainty.

624 This study considers a hypothetical growth in the industry in the future and hence can affect
625 the results slightly. As the industrial effluent discharge is significantly less than the municipal
626 discharge, its effect will not be dominant on water quality, provided they are discharging at the
627 effluent disposal limits. The climate change, LULC, growth industry and population effects on
628 water quality for the monsoon season and extreme events for the hotspots of the Ganga River
629 can be a future scope of the study. In our study, we have not considered the cost incurred for
630 the mitigation strategy adopted; hence a waste load allocation model along with our present
631 study would give an idea of the ideal treatment required at the industries and STPs to reach the
632 objective of GAP.

633



634 Data Availability

635 The data that support the findings of this study are available from Ministry of Water Resources,
636 Government of India but restrictions apply to the availability of these data, which were used
637 under license for the current study, and so are not publicly available.

638 Author contributions

639 Sneha Santy developed the model, made computational runs and prepared first draft of the
640 manuscript including figures. Mujumdar conceptualized the model, facilitated data collection
641 and edited the manuscript. Bala helped in devising climate change scenarios and review of
642 manuscript.

643 Competing interests

644 The authors declare that they have no conflict of interest.

645 Acknowledgement

646 We thank the Chief Engineer, Upper Ganga Basin Organisation, Central Water Commission,
647 Lucknow for providing very useful data on streamflow, water quality and hydraulic
648 characteristics for the river stretch studied, India Meteorological Department for providing
649 temperature data, National Remote Sensing Centre, Hyderabad for providing us land use land
650 cover data, United States Geological Survey for providing DEM data, the European Centre for
651 Medium-Range Weather Forecasts for providing atmospheric data and NASA Center for
652 Climate Simulation for providing NASA Earth Exchange Global Daily Downscaled Climate
653 Projections. We thank Uttar Pradesh Pollution Control Board and State Mission for Clean
654 Ganga Uttar Pradesh for providing data on drain, STP capacity and sewer network. The authors
655 thank Dr. Ila Chawla for sharing the land use projection files. We also thank the Divecha Centre
656 for Climate change, IISc, Bangalore, for providing Grantham Fellowship to the first author.
657 The funding received from the Ministry of Earth Sciences (MoES), Government of India,
658 through the project, "Advanced Research in Hydrology and Knowledge Dissemination",
659 Project No.: MOES/PAMC/H&C/41/2013-PC-II, is also gratefully acknowledged. The second
660 author acknowledges the support received through the JC Bose Fellowship (Number,
661 JCB/2018/000031). The authors are thankful to Dr. Pankaj Dey for the help with proof reading
662 the manuscript.

663



664 **References:**

- 665 1. Al-Ahmad A, Daschner FD, Kummerer K (1999). Biodegradability of cefotiam,
666 ciprofloxacin, meropenem, penicillin G, and sulfamethoxazole and inhibition of
667 wastewater bacteria. *Arch Environ Contam Toxicol* 37:158–63.
- 668 2. Astaraie-Imani M, Zoran Kapelan, Guangtao Fu, David Butler (2012). Assessing the
669 combined effects of urbanization and climate change on the river water quality in an
670 integrated urban wastewater system in the UK. *Journal of Environmental Management*
671 112 (2012) 1-9.
- 672 3. Bonus, CA (Ed.), 2018. Ganga River Basin Planning Assessment Report. Main volume
673 and Appendices. Deltares with AECOM and Future Water for the World Bank and the
674 Government of India, Report 1220123-002-ZWS-0003.
- 675 4. Bourdeau-Goulet S, Hassanzadeh E (2021). Comparisons Between CMIP5 and CMIP6
676 Models: Simulations of Climate Indices Influencing Food Security, Infrastructure
677 Resilience, and Human Health in Canada. *Earth's Future* 9, e2021EF001995.
678 <https://doi.org/10.1029/2021EF001995>
- 679 5. Central Water Commission & National Remote Sensing Centre (2014). Government of
680 India Ministry of Water Resources GANGA BASIN.
- 681 6. Central Pollution Control Board. Pollution Assessment: River Ganga (CPCB (2013)
- 682 7. Chawla I. and Mujumdar P. P., 2018. Partitioning uncertainty in streamflow projections
683 under nonstationary model conditions. *Advances in Water Resources* 112: 266–282.
- 684 8. Chapra S C and Pelletier G J 2003. QUAL2K: A Modeling Framework for Simulating
685 River and Stream Water Quality: Documentation and User's Manual. Civil and
686 Environmental Engineering Dept., Tufts University, Medford, MA.
- 687 9. Choi K, Kima Y, Park J, Park CK, Kim M, Kim HS, Kim P (2008). Seasonal variations
688 of several pharmaceutical residues in surface water and sewage treatment plants of Han
689 River. *Sci Total Environ* 405:102–28.
- 690 10. Davids, J. C. et al. Quantifying the connections—linkages between land-use and water
691 in the Kathmandu Valley, Nepal. *Environmental Monitoring and Assessment* 190, 304
692 (2018).
- 693 11. Environment & Forests Division and Water Resources Division Planning Commission
694 Government of India, 2009. Report on utilization of funds and assets created through
695 Ganga Action Plan in states under GAP



- 696 12. Fohrer, N., Haverkamp, S., Eckhardt, K., & Frede, H.-G. (2001). Hydrologic response
697 to land-use changes on the catchment scale. *Physics and Chemistry of the Earth, Part*
698 *B: Hydrology, Oceans and Atmosphere*, 26, 577-582
- 699 13. Gyawali, S., Techato, K., Monprapussorn, S. & Yuangyai, C. Integrating Land use and
700 Water quality for Environmental based land use planning for U-tapao River Basin.
701 Thailand. *Procedia – Social and Behavioral Sciences* 91, 556–563 (2013).
- 702 14. Hernando MD, Mezcuca M, Fernandez-Alba AR, Barcelo D (2006). Environmental risk
703 assessment of pharmaceutical residues in wastewater effluents, surface waters and
704 sediments. *Talanta* 69:334–42.
- 705 15. Hunter P. Climate change and waterborne and vector-borne diseases. *Journal of*
706 *Applied Microbiology*, 94 (2003), pp. 37S-46S
- 707 16. Hurst AM, Edwards MJ, Chipps M, Jefferson B, Parsons SA (2004). The impact of
708 rainstorm events on coagulation and clarifier performance in potable water treatment.
709 *Sci Total Environ* 321:219–30.
- 710 17. Indian Institutes of Technology, 2010a. Guidelines for the Preparation of Urban River
711 Management Plan (URMP) for all Class I Towns in Ganga River Basin. GRB EMP:
712 Ganga River Basin Environment Management Plan. Report code:
713 002_GBT_IIT_EQP_S&R_01_Ver 1_Dec2010.
- 714 18. Indian Institutes of Technology, 2010b. River Ganga at a Glance: Identification of
715 Issues and Priority Actions for Restoration. GRB EMP: Ganga River Basin
716 Environment Management Plan. Report code: 001_GBT_IIT_GEN_DAT_01_Ver
717 1_Dec2010.
- 718 19. Indian Institutes of Technology, 2010c. Guidelines for Implementation of Sewage
719 Collection, Diversion, Pumping, Treatment, and Reuse (Sewage CDPTR)
720 Infrastructure in Class I Towns. GRB EMP: Ganga River Basin Environment
721 Management Plan. Report code: 004_GBT_IIT_EQP_S&R_03_Ver 1_Dec2010.
- 722 20. Indian Institutes of Technology, 2010d. Sewage Treatment in Class I Towns:
723 Recommendations and Guidelines. GRB EMP: Ganga River Basin Environment
724 Management Plan. Report code: 003_GBT_IIT_EQP_S&R_02_Ver 1_Dec2010.
- 725 21. Indian Institutes of Technology, 2011. Prevention of River Pollution by Urban Sewage:
726 Recommendations from Policy and Governance Perspective based on a Model Case
727 Study. GRB EMP: Ganga River Basin Environment Management Plan. Report code:
728 010_GBT_IIT_PLG_ANL_04_Ver 1_Dec2011.



- 729 22. Indian Institutes of Technology, 2012. Water Quality in the Ganga River and Efficacy
730 of Sewage Treatment Process in Coliform Removal: A Case for Adopting Tertiary
731 Treatment. GRB EMP: Ganga River Basin Environment Management Plan. Report
732 code: 023_GBP_IIT_EQP_ANL_01_Ver 1_June2012.
- 733 23. Indian Institutes of Technology, 2013. Status of Urbanization and Industrialization
734 in Middle Ganga Basin. GRBMP: Ganga River Basin Management Plan. Report Code:
735 051_GBP_IIT_SEC_ANL_13_Ver 1_Dec 2013
- 736 24. Jacobs, S. R. et al. Using high-resolution data to assess land use impact on nitrate
737 dynamics in East African Tropical Montane Catchments. *Water Resources Research*
738 54, 1812–1830 (2018).
- 739 25. Jin, L. et al. Assessing the impacts of climate change and socio-economic changes on
740 flow and phosphorus flux in the Ganga river system. *Environmental Science: Processes
741 and Impacts* 17(6), <https://doi.org/10.1039/c5em00092k> (2015).
- 742 26. Khattiyavong C and Lee H S. Performance Simulation an Assessment of an
743 Appropriate Wastewater Treatment Technology in a Densely Populated Growing City
744 in a Developing Country: A Case Study in Vientiane, Laos. *Water* 2019, 11, 1012;
745 doi:10.3390/w11051012
- 746 27. Li J, Huo R, Chen H, Zhao Y, and Zhao T (2021). Comparative Assessment and Future
747 Prediction Using CMIP6 and CMIP5 for Annual Precipitation and Extreme
748 Precipitation Simulation. *Front. Earth Sci.* 9:687976. doi: 10.3389/feart.2021.687976.
- 749 28. Marx A, Kumar R, Thober S, Rakovec O, Wanders N, Zink M, Wood E F, Pan M,
750 Sheffield J, and Samaniego L (2018). Climate change alters low flows in Europe under
751 global warming of 1.5, 2, and 3 °C. *Hydrol. Earth Syst. Sci.*, 22: 1017–1032
- 752 29. Ministry of Urban Development, Government of India, Kanpur Nagar Nigam and
753 Administrative Staff College of India, 2016. City Sanitation Plan for Kanpur.
- 754 30. Namugizea J N, Jewitta G, Graham M (2018). Effects of land use and land cover
755 changes on water quality in the uMngeni river catchment, South Africa. *Physics and
756 Chemistry of the Earth* 105: 247–264.
- 757 31. Pascual-Benito M , Nadal-Sala D, Tobella M, Ballest E, García-Aljaro C, Sabat S,
758 Sabater F, Martí E., Gracia C.A, Blanch A.R., Lucena F. (2020). Modelling the seasonal
759 impacts of a wastewater treatment plant on water quality in a Mediterranean stream
760 using microbial indicators. *Journal of Environmental Management* 261 (2020) 110220.



- 761 32. Permatasari P A, Setiawan Y, Khairiah R N and Effendi H (2017). The effect of land-
762 use change on water quality: A case study in Ciliwung Watershed. IOP Conf. Ser.:
763 Earth Environ. Sci. 54 012026
- 764 33. Rehana S and Mujumdar P P 2012. Climate change induced risk in water quality control
765 670 problems. Journal of Hydrology 444-445 63-77.
- 766 34. Rosario-Ortiz FL, Snyder SA, Suffet IH (2007). Characterization of dissolved organic
767 matter in drinking water sources impacted by multiple tributaries. Water Res 41:4115–
768 28.
- 769 35. Santy, S., Mujumdar, P. P. and Bala, G., 2020. Potential Impacts of Climate and Land
770 Use Change on the Water Quality of Ganga River around the Industrialized Kanpur
771 Region. Scientific Reports, 10:9107.
- 772 36. Santy, S., Mujumdar, P. P. and Bala, G., 2022. Increased risk of water quality
773 deterioration under climate change in Ganga River. Front. Water 4:971623. doi:
774 10.3389/frwa.2022.971623
- 775 37. Shukla, S., Khire, M. V., and Godan, S. S. (2018). Effects of urbanization on surface
776 and subsurface hydrologic variables of upper bhima river basin, Maharashtra, India.
777 Model. Earth Syst. Environ. 4, 699–728. doi: 10.1007/s40808-018-0446-9
- 778 38. The Economic Times, 2021. UP targets industrialization to raise economic growth and
779 lift incomes of poorer regions. [https://economictimes.indiatimes.com/industry/indl-
780 goods/svs/construction/up-targets-industrialisation-to-raise-economic-growth-and-lift-
781 incomes-of-poorer-regions/articleshow/87332486.cms?from=mdr](https://economictimes.indiatimes.com/industry/indl-goods/svs/construction/up-targets-industrialisation-to-raise-economic-growth-and-lift-incomes-of-poorer-regions/articleshow/87332486.cms?from=mdr).
- 782 39. THE TIMES OF INDIA, 14Jan2021. Kanpur will be first city to formulate river
783 management plan. [https://timesofindia.indiatimes.com/city/kanpur/kanpur-will-be-
784 first-city-to-formulate-river-mgmt-plan/articleshow/80256831.cms](https://timesofindia.indiatimes.com/city/kanpur/kanpur-will-be-first-city-to-formulate-river-mgmt-plan/articleshow/80256831.cms).
- 785 40. Unnao Nagar Palika Parishad, 2016. Final Report of City Sanitation Plan Unnao.
- 786 41. US Army Corps of Engineers Hydrologic Engineering Center 2000. Hydrologic
787 Modeling System HEC-HMS Technical Reference Manual.
- 788 42. Uttar Pradesh Jal Nigam, Uttar Pradesh Pollution Control Board, National Mission for
789 Clean Ganga, MoWR, RD & GR, Central Pollution Control Board, MoEF&CC (2016).
790 Assessment of Pollution of Drains Carrying Sewage /Industrial Effluent Joining River
791 Ganga and its Tributaries (Kali-East/Ramganga) between Haridwar (Down) to Kanpur
792 (Down)"
- 793 43. Uttar Pradesh Pollution Control Board (2019). Action Plan for Restoration of Polluted
794 stretch of River Ganga from district Kannauj to district Varanasi.



- 795 44. Whitehead, P. G. et al. Modelling impacts of climate change and socio-economic
796 change on the Ganga, Brahmaputra, Meghna, Hooghly and Mahanadi river systems in
797 India and Bangladesh. *Science of The Total Environment* 636, 1362–1372,
798 <https://doi.org/10.1016/j.scitotenv.2018.04.362> (2018).
- 799 45. Whitehead, P. G. Biophysical Modelling of the Ganges, Brahmaputra, and Meghna
800 Catchment. (ed. Nicholls, R., Hutton, C., Adger, W.Hanson, S., Rahman, M., Salehin,
801 M.) *Ecosystem Services for Well-Being in Deltas* 249–262,
802 <https://doi.org/10.1007/978-3-319-71093-8> (Palgrave Macmillan, Cham, 2018).
- 803 46. Whitehead, P. G. et al. Dynamic modeling of the Ganga river system: impacts of future
804 climate and socio-economic change on flows and nitrogen fluxes in India and
805 Bangladesh. *Environmental Science: Processes and Impacts*,
806 <https://doi.org/10.1039/c4em00616j> (2015).
- 807 47. Whitehead P G et al., 2015. Impacts of climate change and socio-economic scenarios
808 on flow and water quality of the Ganges, Brahmaputra and Meghna (GBM) river
809 systems: low flow and flood statistics. *Environmental Science: Processes & Impacts*
- 810 48. Zhou, F., Xu, Y., Chen, Y., Xu, C.-Y., Gao, Y., & Du, J. (2013). Hydrological response
811 to urbanization at different spatio-temporal scales simulated by coupling of CLUE-S
812 and the SWAT model in the Yangtze River Delta region. *Journal of Hydrology*, 485,
813 113-125
- 814 49. Zou M., Niu J., Kang S., Li X. & Lu H. (2017). The contribution of human agricultural
815 activities to increasing evapotranspiration is significantly greater than climate change
816 effect over Heihe agricultural region. *Scientific Reports* 7: 8805.
- 817