

Impact of permeability evolution in igneous sills on hydrothermal flow and hydrocarbon transport in volcanic sedimentary basins

Ole Rabbel¹, [Jörg Hasenclever²](#), Christophe Y. [Galerie²](#), [Jörg Hasenclever³](#) [Galerie³](#), Olivier Galland¹, Karen Mair¹, Octavio Palma⁴

¹ NJORD, Department of Geosciences, University of Oslo, Norway

² [Faculty of Geosciences, University of Bremen, Germany](#)

^{3,2} Institute of Geophysics, Center for Earth System Research and Sustainability, University of Hamburg University, Germany

³ [Faculty of Geosciences, University of Bremen, Germany](#)

⁴ Facultad de Ciencias Naturales y Museo, Universidad de La Plata, Argentina

Abstract:

~~Sill intrusions~~ Sills emplaced in organic-rich sedimentary rocks trigger the generation and migration of hydrocarbons in volcanic sedimentary basins. Based on seismic and geological observations, numerical modeling studies of hydrothermal flow around sills show that thermogenic methane is channeled ~~towards below~~ the intrusion ~~towards its~~ tip, where ~~it rises~~ [hydrothermal vents nucleate and transport methane](#) to the surface ~~in a hydrothermal vent~~. However, these models typically assume impermeable sills and ignore potential effects of permeability evolution in cooling sills, e.g., due to fracturing. ~~To address this issue~~ [Here](#), we combine a geological field study of a volcanic basin (Neuquén Basin, Argentina) with hybrid FEM/FVM numerical modeling of hydrothermal flow around a sill, including hydrocarbon generation and transport. Our field observations show widespread veins within sills composed of graphitized bitumen and cooling joints filled with solid bitumen or fluidized shale. Raman spectroscopy indicates graphitization at temperatures between 350-500°C, ~~evidencing~~ [suggesting](#) fluid flow within the intrusions ~~shortly after solidification during cooling~~. This finding motivates our modeling setup, which investigates flow patterns around ~~and through~~ intrusions that become porous and permeable upon solidification. The results show three ~~distinct~~ flow phases affecting the transport of hydrocarbons generated in the contact aureole: (1) Contact-parallel flow toward the sill tip prior to solidification, (2) upon complete solidification, sudden vertical “flushing” of overpressured hydrocarbon-rich fluids from the lower contact aureole ~~through~~ [towards and into](#) the hot sill [along its entire length](#), and (3) ~~slow rise~~ [stabilization](#) of hydrocarbon ~~rich fluids above~~ [distribution and fading hydrothermal flow](#). ~~In low-permeability host rocks, hydraulic fracturing facilitates flow and hydrocarbon migration toward the sill center, and backward downward flow by temporarily elevating porosity and permeability. Up to 7.5% of the generated methane is exposed to temperatures >400°C in the simulations and may thus be permanently stored as graphite in or near the sill tip. We conclude that. Porosity and permeability creation within cooling sills may be an important factor for impact hydrothermal flow and, hydrocarbon transport and venting in volcanic basins, as it considerably alters the fluid pressure configuration and flow~~

43 ~~patterns by dissipating,~~ provides vertical flow paths, and helps to dissipate overpressure
44 below the sills. ~~This could, for instance, lead to a reduced potential for hydrothermal venting.~~
45

1 Introduction

Sill intrusions emplaced in sedimentary rocks strongly influence generation and migration of hydrocarbons and greenhouse gases in volcanic sedimentary basins. If sill intrusions are emplaced in organic-rich strata, they trigger contact-metamorphic reactions (e.g., organic matter transformation), overpressure generation and hydrothermal fluid flow in the surrounding strata (Einsele et al., 1980; Aarnes et al., 2012). Many recent studies of volcanic sedimentary basins investigate how such processes may cause the formation of hydrothermal vent complexes, which facilitate greenhouse gas release to the atmosphere and can thus drive global climate change (Svensen et al., 2004; Aarnes et al., 2010; Aarnes et al., 2012; Iyer et al., 2013; Iyer et al., 2017; Galerne and Hasenclever, 2019). Additionally, the same processes can be critical factors for hydrocarbon generation and migration in igneous petroleum systems containing sills emplaced within shale formations (Senger et al., 2017; Spacapan et al., 2020).

Hydrothermal flow in response to intrusion of magma into sedimentary host rocks has been investigated for decades. The magmatic heat input leads to several temperature-dependent processes that promote strong fluid pressure increase, which drive fluid flow (Einsele et al., 1980; Delaney, 1982). These processes include for instance thermal fluid expansion, mineral dehydration, organic matter transformation into hydrocarbon generation, and pore space reduction due to mineral precipitation (Einsele et al., 1980; Delaney, 1982; Aarnes et al., 2010; Townsend, 2018). When the rate of overpressure generation is larger than flow-driven pressure dissipation, e.g., in low-permeable rocks like shale, hydraulic fractures form and locally enhance fluid flow and pressure release (Jamtveit et al., 2004; Aarnes et al., 2012; Kobchenko et al., 2014; Panahi et al., 2018; Rabbel et al., 2020). This process may lead to explosive hydrothermal vents, which are present in ~~a number of several~~ volcanic basins (Nermoen et al., 2010; Aarnes et al., 2012; Iyer et al., 2017). In general, Ingebritsen et al. (2010) highlighted the deciding role of permeability structure for magmatic hydrothermal systems, where permeability of 10^{-16} m² represents the approximate boundary between convection and conduction dominated systems.

Numerical models simulate these coupled processes to understand hydrothermal flow dynamics and the associated hydrocarbon migration (usually represented as methane carried in the hydrothermal fluids), ~~typically in the context of~~. Typically, these models investigate potential vent formation around sills emplaced in organic-rich sediments. Such simulations usually assume that sills are impermeable and show that vents seem to preferentially form at the inclined tips of large “saucer-shaped” sills, because ~~this fluids get trapped under the sill and migrate towards their tips~~. This situation favours both fast fluid pressure build-up below the sills and focussed fluid migration towards the tips (Iyer et al., 2013, Iyer et al., 2017; Galerne and Hasenclever, 2019).

However, observations from several volcanic sedimentary basins indicate that the assumption of impermeable sills is not generally valid. Sills often host fracture networks including different fracture types. These form shortly after solidification of the magma and may include columnar cooling joints or fractures related to thermal contraction or hydraulic fracturing during ~~hydrothermalism~~ hydrothermal activity (Senger et al. 2015, Witte et al. 2012, Rabbel et al., 2021). Multiple studies have provided evidence that such fracture networks may be open and can contain water (Chevallier et al., 2004) or hydrocarbons and act as fluid pathways or even fractured reservoirs (Mark et al., 2018; Schofield et al., 2020; Spacapan et al., 2020). ~~However, it is currently unknown to which extent the generation of fractures during the cooling phase of sills affects hydrothermal flow and associated hydrocarbon migration in volcanic basins.~~

To address this issue, we present a geological case study from the northern Neuquén Basin, Argentina, combined with numerical hydrothermal simulations. The northern Neuquén Basin provides particularly ~~Mainly~~ based on evidence from field and subsurface data, several studies hypothesized that cooling-related fracturing in sills creates an early migration pulse of fluids into the sill, although the thermal regime of such a pulse is under debate (Witte et al., 2012, Spacapan et al. 2020, Rabbel et al. 2021). In addition, Spacapan et al. (2019) noted the absence of hydrothermal vents around the sills in the Neuquén Basin and suggested that pore pressures were not high enough to create such features. A recent study on the Karoo Basin in South Africa estimates that half of the thermogenic gas mobilized in the contact aureole of flat sills may enter the sill through cooling joints (Lenhard et al., 2023). Although based on field evidence, these geological models remain qualitative in terms of the physical process dynamics, and a dedicated study to investigate quantitative hydrothermal flow and hydrocarbon migration around and in fractured, permeable sills is currently missing.

In this study, we combine a field study from the Neuquén Basin, Argentina, with numerical modelling to: (1) investigate if and in which thermal conditions opening of cooling joints may trigger an early hydrocarbon migration pulse into the sill, and (2) assess the impact of porosity and permeability generation in sills on the hydrothermal flow and hydrocarbon migration and storage in comparison to systems with impermeable sills. The northern Neuquén Basin provides well documented examples of sills with extensive cooling joint networks emplaced in organic-rich shale, ~~because the fractured sills represent the main reservoirs in a number of commercially producing oil fields many of which are commercial oil reservoirs~~ (Rodriguez Monreal et al., 2009; Witte et al., 2012; Spacapan et al., 2020). Additionally, ~~numerical modeling and subsurface data demonstrate~~ the strong thermal impact of intrusions on host rock maturation in these systems is well documented (Rodriguez Monreal et al., 2009; Spacapan et al., 2018). We first present geological evidence ~~from outcropping sills to provide evidence~~ for hydrocarbon transport through fractured sills in a hydrothermal environment. Our field observations motivate ~~the implementation of a~~ numerical modelling ~~study to test~~ investigate the influence of cooling joint formation, i.e., permeable sills, on the hydrothermal flow patterns and hydrocarbon migration. ~~We performed a parameter study. We perform simulations for sills emplaced in which we test this host rocks of different permeability to be able to discuss the effect for sills of varying thickness and emplacement depth~~ different geological settings. By integrating the simulations results with geological evidence, we show how permeable sills affect hydrothermal flow in volcanic sedimentary basins as well as the fate of hydrocarbons generated by contact-metamorphism.

2 Geological observations

2.1 Geological setting

The study area is located around the Río Grande Valley (RGV) in the northern Neuquén Basin, Argentina, about 100 km south of the town of Malargüe (**Fehler! Verweisquelle konnte nicht gefunden werden.**). The Neuquén Basin initially formed as a series of isolated half-grabens during the late Triassic to early Jurassic (Howell et al., 2005). During the middle Jurassic to early Cretaceous, these depocenters coalesced during thermal subsidence, forming a large shallow-marine basin. This phase included the deposition of the Vaca Muerta and Agrío formations, which comprise several hundreds of meters of calcareous, organic-rich shale and form two important source rock formations for presently exploited petroleum systems (Kietzmann et al., 2014). From the early Cretaceous, the basin developed into a foreland basin in response to the compressive tectonic regime of the Andean orogeny. This led to inversion of the Triassic normal faults and generation of a series of fold-thrust belts along the western basin boundary (Manceda and Figueroa, 1995; Yagupsky et al., 2008).

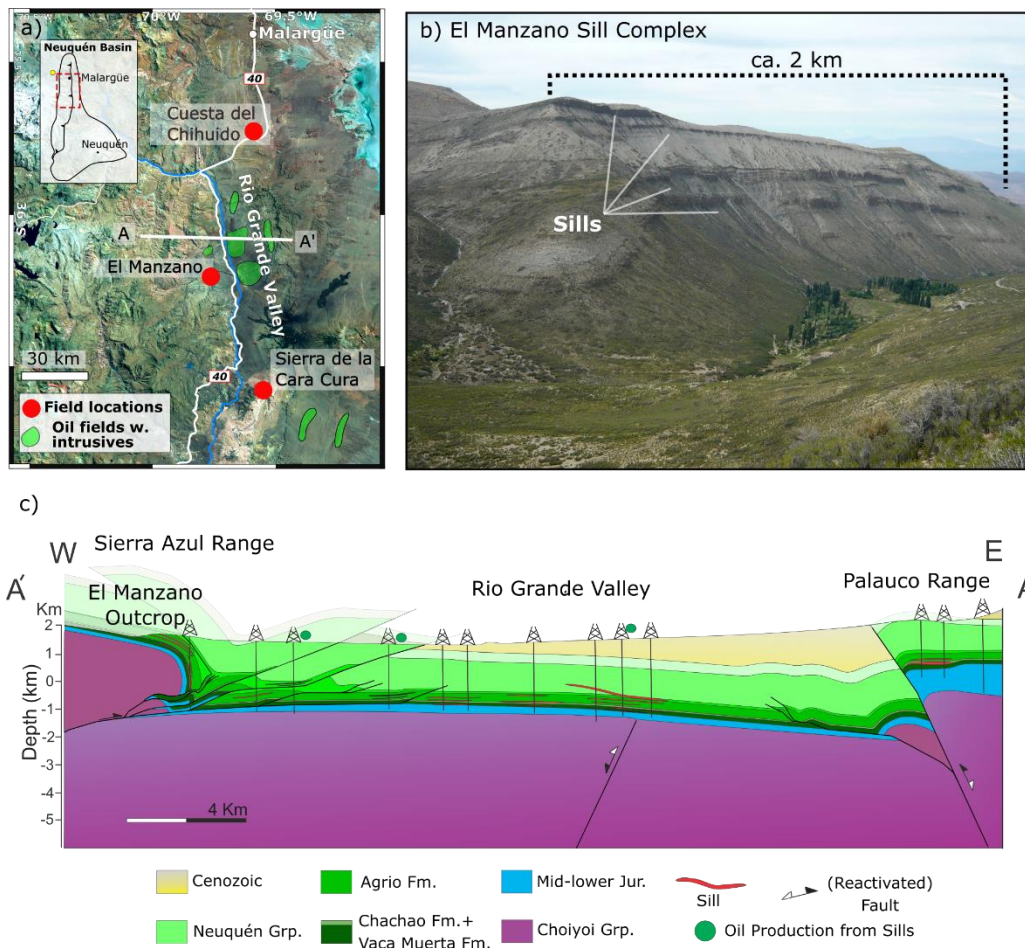


Figure 1. (a) Satellite image of the study area in the northern Neuquén Basin including field localities (red dots) and producing igneous petroleum systems (green areas). (b) View of the El Manzano sill complex outcrop in the Sierra Azul range (Photo: F. Soto). (c) E-W structural geological section illustrating the relation between subsurface and outcropping sill complexes (courtesy. J. B. Spacapan)

In addition to tectonic deformation, the northern Neuquén Basin experienced intense magmatic activity that formed a series of volcanic plateaus and widespread magmatic intrusions within the sedimentary succession (Kay et al., 2006). In the study area, two main eruptive cycles, termed Molle and Huincán eruptive cycles, occurred in the late Oligocene-mid Miocene and the late Miocene-Pleistocene, respectively (Combina and Nullo, 2005). These events ~~lead~~led to the emplacement of extensive andesitic and basaltic sill complexes predominantly in the Vaca Muerta and Agrío Formations, but also in overlying gypsum and sandstone units (Spacapan et al., 2020).

In the RGV, heavily fractured sills emplaced in the Vaca Muerta and Agrío formations constitute the reservoirs in an actively producing igneous petroleum system (Schiuma, 1994; Witte et al., 2012). Spacapan et al. (2020) reported 2 to 27 m thick sills in these shale formations, but up to 54 m within shallower clastic sediments of RGV. Other studies from the northern Neuquén Basin report thick laccolith intrusions (>100 m) acting as reservoirs (Rodríguez Monreal et al., 2009). Spacapan et al. (2018) showed that the heat input provided by the sills matured the Vaca Muerta and Agrío shale formations, which otherwise show very low thermal maturity at burial depths of ca. 2-2.5 km. The established model for the formation of these igneous reservoirs includes that the intrusions developed interconnected cooling joint networks, which subsequently stored the generated hydrocarbons (Witte et al., 2012; Spacapan et al., 2020).

In addition to the subsurface sill complexes, thrust tectonics brought to surface exceptional analogue outcrops in the surrounding mountain ranges including the Sierra Azul, Sierra Cara Cura and Cuesta del Chihuido (**Fehler! Verweisquelle konnte nicht gefunden werden.**). Several studies describe these localities, which offer easy access to sills emplaced in the Vaca Muerta and Agrío formations (Spacapan et al., 2017; Rabbel et al., 2018; Rabbel et al., 2021). Especially the km-scale outcrops at El Manzano (**Fehler! Verweisquelle konnte nicht gefunden werden.**b) and Sierra Cara Cura constitute direct analogues to the subsurface sill complexes of RGV igneous petroleum system (Palma et al., 2019; Rabbel et al., 2021). These three field localities are ideal case studies to reveal the interactions between igneous intrusions and the petroleum system.

2.2—Field methods

~~2.2 The fieldwork conducted for this study aims to document evidence of hydrothermal flow and hydrocarbon transport related to permeable intrusions in the study area. Geological field observations~~

During three field campaigns, we collected an extensive dataset at ~~the~~ outcrops in El Manzano, Sierra de la Cara Cura and Cuesta del Chihuido (**Fehler! Verweisquelle konnte nicht gefunden werden.**). We gathered ground-based and drone digital photographs to document outcrop observations. Additionally, we collected over 100 rock samples from the intrusions, surrounding shale as well as various types of veins for geochemical analyses. ~~Here, we focus on presenting field evidence for hydrothermal flow of hydrocarbon-bearing fluids both around and within the sills, which then motivates the numerical study.~~ Note that a more comprehensive description of the field study is presented by Rabbel et al. (2021).

2.3 Observations of hydrocarbons inside and around sills

Outcropping sills in all three localities feature solid bitumen and black shale inside the fracture network of the sills. At Cuesta del Chihuido, both the side and roof of thin sills are exposed, and the side view reveals upwelling dykelets of black shale (Vaca Muerta Formation) entering the sill from the bottom contact (~~Figure 2a~~). (~~Figure 2a~~). The top view of the same sill shows the entire polygonal cooling joint network with a black fill of the same material (~~Figure 2b~~). (~~Figure 2a, b~~). Brecciated igneous material often surrounds the dykelets where they enter the intrusion.

The larger sills at El Manzano (Sierra Azul) and Sierra Cara Cura also show widespread bitumen in the fracture network of the sills, but at a much larger scale (~~Figure 3~~). (~~Figure 3~~). We observe arrays of 1-up to 50 cm thick and >10 m high bitumen dykes or veins (~~Figure 3a~~). (~~Figure 3a~~). Here, the bitumen dyke cuts across the contact aureole and enters the sill intrusion. We find exposures of similar structures where the sill interior is accessible (~~Figure 3b~~). (~~Figure 3b~~). The sill appears heavily fractured in addition to preexisting cooling joints, and solid bitumen or calcite fill nearly all fractures. On closer inspection, the bituminous material in these veins has a shiny and fibrous texture.

At an exposed sill tip at El Manzano, we also observe that several cm thick bitumen veins appear to be concentrated along the tip contact, where they mutually cross-cut with calcite veins of at least similar thicknesses (~~Figure 3c,d~~). (~~Figure 3c, d~~). These calcite veins have cm-scale pores, which occasionally contain solid bitumen themselves and release strong hydrocarbon smell when the vein is broken up.

2.4 Bitumen characterization

~~The fibrous texture of the observed bitumen within the sills is intriguing and suggests that it partly experienced graphitization, i.e. it is much higher-grade bituminous material than that described in the Neuquén basin by Cobbold et al. (1999) and Zanella et al. (2015).~~

~~The fibrous texture of the observed bitumen within the sills is intriguing and we hypothesized that it may be much higher-grade bituminous material than that described in the Neuquén basin and commonly attributed to regional burial (Parnell et al., 1995; Cobbold et al., 1999; Zanella et al., 2015).~~


In the field, we tested this hypothesis by measuring the resistivity of the fibrous bitumen with a hand-held multimeter. Graphitization of bitumen significantly changes the electric

resistivity of the material: amorphous solid bitumen is very resistive and used as an electric insulator in industry applications (Hays et al., 1967), while graphite is an excellent conductor. Qualitative on-site resistivity measurements showed that the fibrous bitumen conducts electric currents well, i.e., within the detection limit of a standard multimeter, suggesting significant graphitization.

In addition, we applied Raman spectroscopy to better constrain the nature of the solid bitumen and its thermal history. Raman spectroscopy provides positions and relative intensities of spectral peaks characterizing carbonaceous materials like bitumen, including D (“disorder”) and G (“graphite”) peaks at 1345 cm^{-1} and 1585 cm^{-1} , respectively (Potgieter-Vermaak et al., 2011; Rantitsch et al., 2016). The shape of the spectra and the D/G peak and area ratios allow a classification of high-grade alteration of the bitumen to anthracite or (semi-)graphite and may serve as a geothermometer for high-temperature regimes (Beyssac et al., 2002; Rantitsch et al., 2016). Due to the high temperatures within and around igneous intrusions, we expect this method to give an indication on the degree of thermal alteration and thus temperatures that the hydrocarbons experienced. Since Raman spectra can show varying absolute intensities, we normalized each spectrum to the intensity of the respective G peak (I_G) for visualization purposes.

Raman spectrograms of the sampled bitumen veins show very clearly developed G and D1 peaks and I_{D1}/I_G ratios of ~~0.6~~ca. 1 and 0.9, respectively. ~~(Figure 4).~~ The D3 band between the peaks is nearly absent in the sample from Sierra de la Cara Cura, ~~(from vein in Figure 3b),~~ while it is visible at low intensity in the presented sample from El Manzano ~~(Figure 4).~~ (from vein in Figure 3a). Note that both vein samples stem from the intrusion-host contact, and each veins penetrate about 10 m into around 20 m thick sills.

247

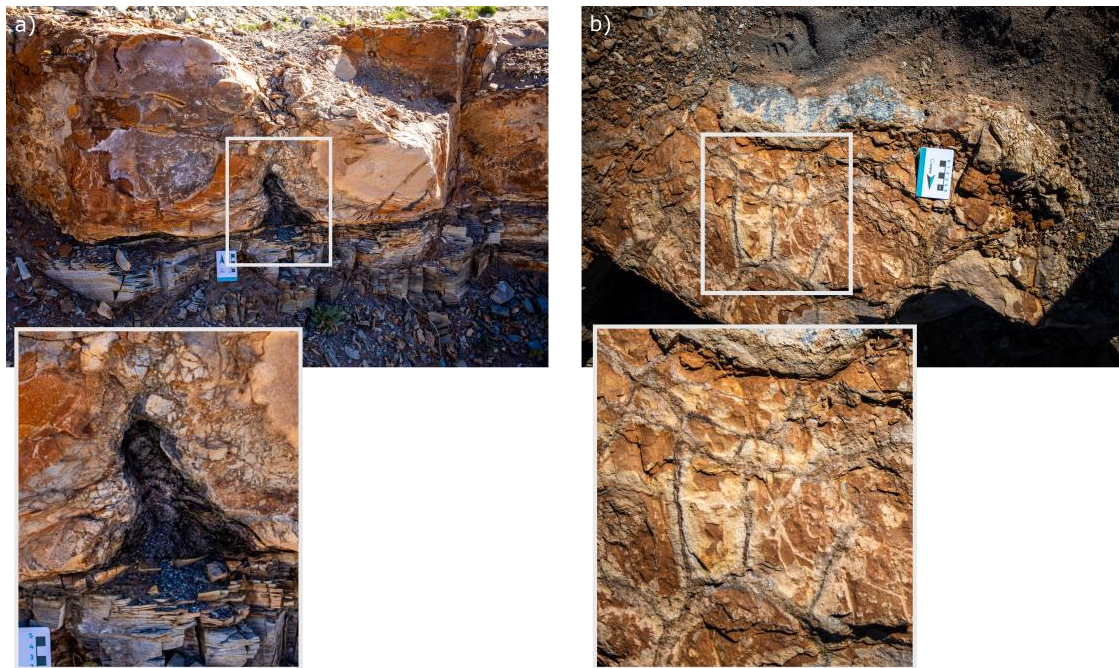

248

249

250

251

252

253

Figure 2. Field observations of upwelling dykelets of liquefied shale and bitumen entering the cooling joint network of a thin sill at Cuesta del Chihuido (ca. 30 cm thick). (a) Side view showing the sediment-intrusion contact and dyke (Photo: D. Michelin), (b) top view demonstrating black bituminous fill in the polygonal cooling joints.

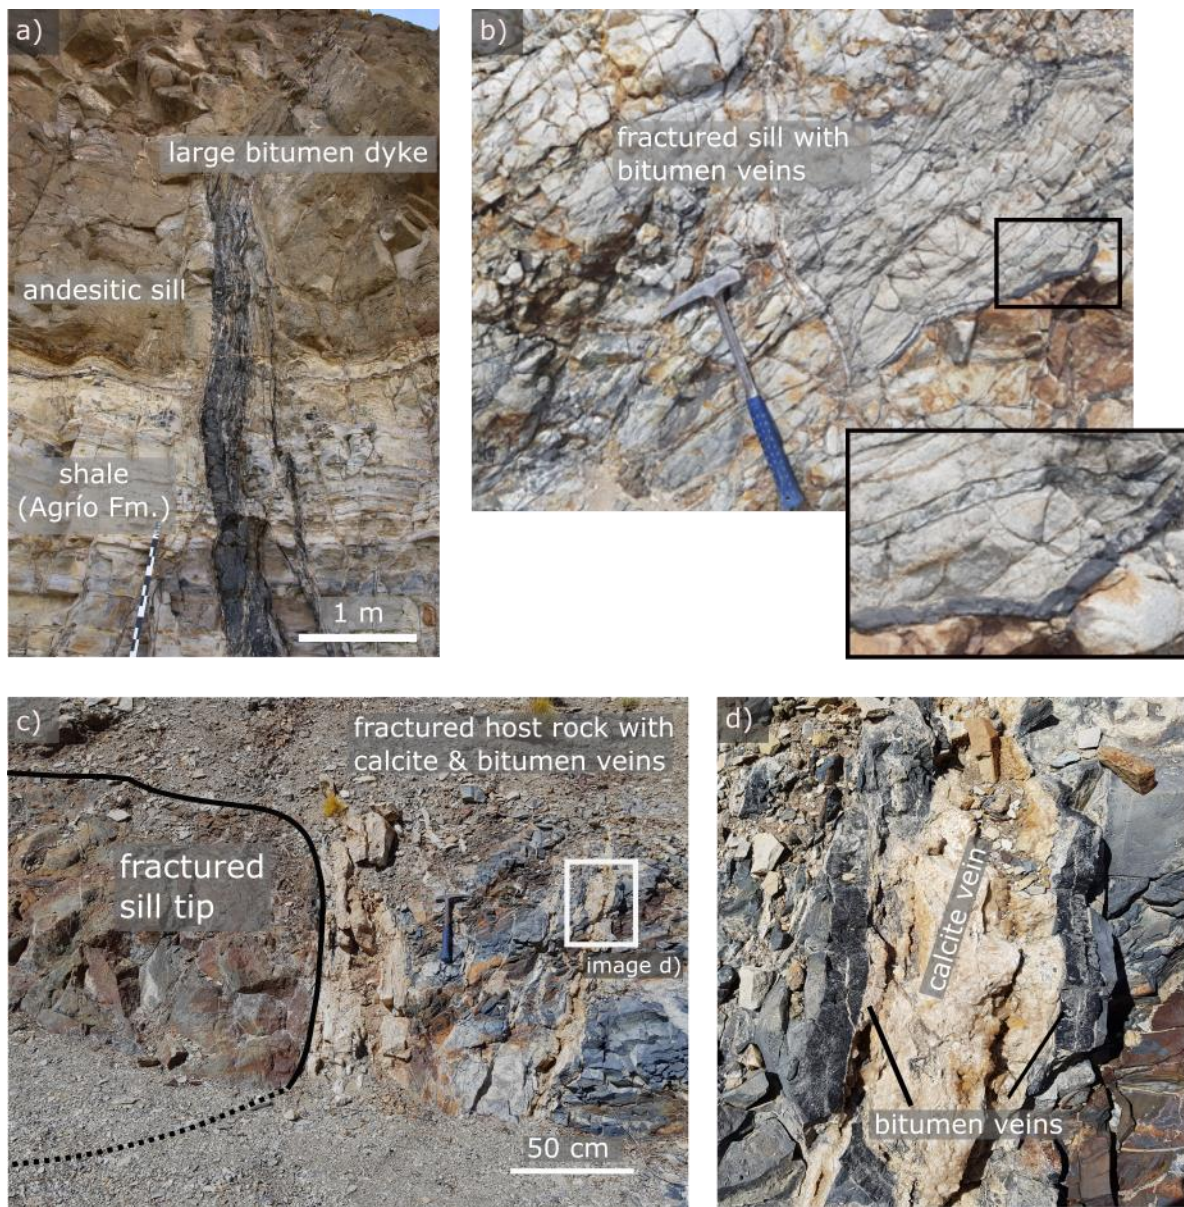


Figure 3. Examples of dykes or veins of solid bitumen associated the sill intrusions. (a) Bitumen dyke at El Manzano of >10 m height and up to 0.5 m thickness originating in the aureole of Agrío Fm. and entering the sill through the bottom contact. (b) Fractured zone inside a sill at Sierra de la Cara Cura exhibiting many cm-scale veins of solid bitumen. (c, d) Exposed sill tip at El Manzano showing high concentration of fibrous bitumen and calcite veins in the contact in front of the tip.

2.5 Composition and thermal implications of bitumen samples

We compare our Raman results with those measured in carbonaceous material from several studies, where increased graphitization and metamorphism lead to well-developed, narrow graphite (G) and disordered carbon (D1) peaks, weak or absent D3 bands, and I_G/I_D peak ratios of <1 (Beyssac et al., 2002; Kwiecinska et al., 2010; Rantitsch et al., 2016). Although we did not perform quantification via peak-fitting, a qualitative comparison of our results with highly metamorphosed sediments presented by Beyssac et al. (2002, Fig. 6 and 11) leads to estimated temperatures of 350-500°C for our samples (Figure). Hydrothermal graphitization can occur along intrusion-sediment contacts at relatively shallow crustal levels and requires temperatures of $\geq 400^\circ\text{C}$ (Buseck and Beyssac, 2014). Hydraulic fracturing focuses the flow of hydrothermal fluids oversaturated with CH_4 and/or CO_2 from which crystalline graphite may precipitate (Rumble, 2014). This fits well with the observations that the bitumen dykes in our study area consist of pure, often crystalline graphitic material and occupy fractured zones in the aureole, around the [intrusion](#) tip, or within the sills themselves ([Figure 3](#)). In a previous summary of fracture types present in the sills of the study area, Rabbel et al. (2021) interpreted these features as hydraulic fractures. Thus, evidence from graphitized bitumen in the fractures in the aureole and in the sills themselves points to hydrocarbon transport in a high-pressure, high-temperature environment in which at least part of the mobilized carbon transforms to graphitic carbonaceous material.

Our field and sample results strongly suggest that significant volumes of hydrocarbons circulated through the sills when the temperature at their margins were 350-500°C. The temperature was thus likely much higher in the interior of the sills. We infer that hydrothermal flow also occurred along cooling fractures within the sill, i.e., the sill developed some permeability while still hot (cf. Figure 2). This interpretation challenges the [common assumption](#) of previous models of hydrothermal circulation around cooling sills, ~~in which the sills that intrusions~~ remain impermeable during cooling (Aarnes et al., 2012; Iyer et al., 2017, Galerne & Hasenclever, 2019). ~~To which extent permeability creation within hot sills affects hydrothermal flow and the associated hydrocarbon transport around sills is not known.~~ An exception is the study of Iyer et al. (2013), who tested a model that included a linear permeability increase inside a cooling sill. While the author highlighted the importance of this mechanism in potentially facilitating the upward migration of thermogenic gas generated beneath sills, this test remained exploratory. Hence, no great detail analyses on the effect on the hydrothermal flow is provided nor supported by field evidence. Thus, a dedicated modeling study on the effect of permeability creation in cooling sills on hydrothermal flow and hydrocarbon transport is still missing. In the following section, we therefore present numerical simulations to test the effects of permeability increase associated with fracturing within the sills on hydrothermal circulations, and how this affects hydrothermal transport of hydrocarbons around sills.

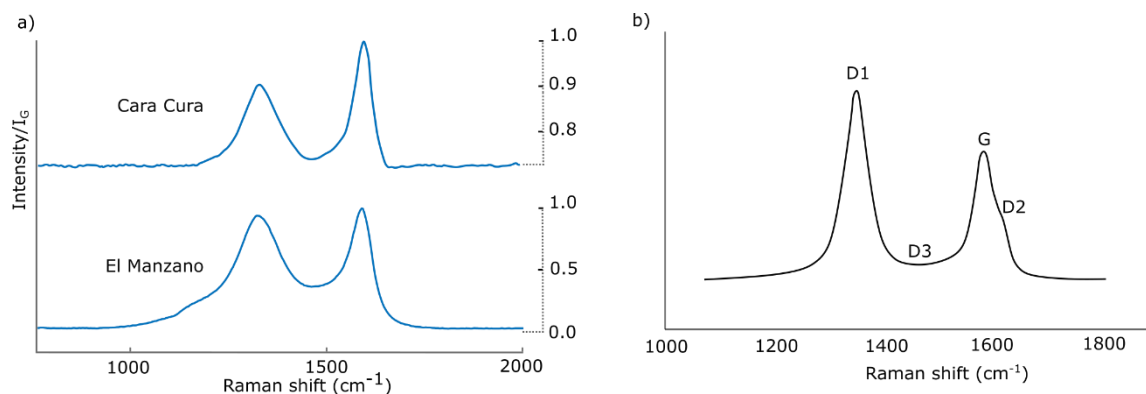


Figure 4.4. (a) Raman spectra from two bitumen vein samples at Sierra de la Cara Cura and El Manzano, respectively. Both samples include well-developed and narrow graphite and disordered carbon (G, D1) peaks as well as weak or absent D3 band. (b) Reference Raman spectrum to illustrate spectra decomposition of carbonaceous material after Beyssac et al. (2002).

3 Numerical Simulations

3.1 Model description

We employ the two-dimensional (2D) finite element model of Galerne and Hasenclever (2019), who applied it to quantify degassing through sill-related hydrothermal vents. ~~As this complex~~The model is presented in detail in Galerne and Hasenclever (2019). ~~Here~~ we will limit our discussion to the main features and point out the key adjustments made for this study. In short, the model simulates hydrothermal flow around a cooling sill, but is also coupled to a model for the heat-driven chemical transformation of organic matter into hydrocarbons (represented by methane). This allows us to investigate not only hydrothermal circulation around sills as such, but also how this affects transport of the hydrocarbons generated in the contact aureole.

The model considers single-phase hydrothermal flow of a compressible fluid in a porous medium following Darcy's law. Temperature calculations comprise heat diffusion, heat advection and heat sources/sinks related to latent heat of magma crystallization, mineral dehydration, thermal cracking of organic matter as well as internal fluid friction and pressure-volume work. Fluid density varies with temperature and pressure according to the equation of state of pure water. The pore pressure equation also contains source terms representing fluid release due to temperature-dependent, irreversible contact metamorphic reactions, including (i) organic matter transformation into methane and (ii) clay mineral dehydration.

To calculate organic matter transformation to ~~methane~~light hydrocarbon, the model uses the EASY%Ro method (Sweeney and Burnham, 1990), which quantifies the converted fraction of organic matter and thermal maturity through vitrinite reflectance *Ro*. Here we assume that all organic matter transformation is converted to methane. We monitor transport and accumulation of the released methane due to hydrothermal flow using a finite volume advection scheme, but do not consider buoyancy effects resulting from the addition of methane to the pore fluid. Clay mineral dehydration follows the maximum storable weight fraction of water in the stable mineral assemblage at a given temperature, which is predicted by phase equilibria (Connolly, 2009). This process not only produces additional pore fluid, but also causes a permanent porosity increase in the affected host rock to ensure mass conservation of rock and fluid. The brittle-ductile transition for the host rock is assumed to happen at 500-750°C and linearly decreases permeability (Galerne and Hasenclever, 2019). Note here that while the model ~~calculates~~calculations are conducted with ~~the methane~~ properties ~~of methane~~, the results can be used to understand transport of (light) hydrocarbons around sills in general. We thus use “methane” and “hydrocarbons” interchangeably in the context of this study.

The model provides time series of the 2D fields of all relevant rock properties in the model domain and physical quantities related to metamorphism and hydrothermal flow. Since we investigate the impact of permeable sills on the fluid and hydrocarbon circulation, our analysis focuses on visualization of the temperature, permeability, fluid flow ~~fields~~ and methane accumulation during cooling of the sill.

3.2 Adjustments for this study

We adjusted ~~two~~three aspects of the original model to honor geological observations in the study area. First, we limit ~~the permeability increase in the host rock due to rock fracturing~~failure to tensile hydraulic fracturing, ~~but and~~ do not consider shear failure. ~~At~~We assume that hydrofracturing occurs at sufficiently high pore fluid overpressure, i.e., if pore pressure exceeds the sum of lithostatic stress and tensile strength, ~~we assume that~~

~~hydrofracturing occurs and increases permeability.~~ Here, we consider hydrofracturing of the aureole only, host rock and not within the sill.

~~Second, we approximate the process of joint formation within the sill through a linear porosity-permeability increase that is function of temperature. Geological observations from the Neuquén Basin suggest that an open (cooling) joint network developed in the sills through which hydrocarbon-bearing hydrothermal fluids entered the sill while it was still hot enough to cause graphitization (Figure 2, Figure 3, Figure 4). Cooling joints form as a result of bulk volume reduction of the cooling and crystallizing magma, which~~Second, we assume that hydrofracturing increases not only permeability but also porosity, which is often neglected in numerical models for simplicity. However, the additional space provided by the opening of hydraulic fractures, which we approximate by the porosity increase, is an important storage buffer during thermal expansion of fluids and hydrocarbon generation. While a transient permeability increase during hydrofracturing can easily be defined without affecting the numerical stability and physical plausibility of the model, prescribing a porosity increase associated with hydrofracturing is not straightforward. A prescribed too large porosity increase, for instance, would create a strong suction effect leading to unrealistically low pressures or even underpressure. We solve this problem by iteratively increasing porosity in regions where overpressure exceeds the failure criterion and solving again for the pore pressure field until a consistent solution establishes, which on average requires 10 – 15 iterations. Hydrofracturing is treated reversible and its effects on porosity and permeability vanish once pore pressure drops below the failure criterion. In this study, we limit the hydrofracturing-related maximum porosity and permeability increase to 1% and a factor 100, respectively.

~~Third, we approximate the process of cooling joint formation within the sill through a linear temperature-dependent permanent increase of permeability, similar to Iyer et al. (2013), but additionally consider the corresponding permanent porosity increase. Note that this is likely a strong simplification of fracture flow through cooling joints networks, which is still poorly constrained. Bulk volume reduction of the cooling and crystallizing magma induces thermal stresses that lead to the formation of a cooling joint network, creating primary porosity and permeability inside the intrusion (e.g., Petford, 2003; Hetényi et al., 2012). The overall pore-space gained in the~~our model is set to equate 8% volume loss, occurring during the transition from a melted to crystallized magma (between the liquidus and solidus temperature), based on reported fracture porosities from fractured sill reservoirs in the study area (Witte et al., 2012; Spacapan et al., 2020). To be consistent with the crystal-mush model described by Marsh (2002), the onset of the pore opening should be when 50-55% of the magma has crystallized. Here we take a value of 1000°C as the onset of the brittle-ductile-transition (BDT) temperature. Using a linearized, temperature-dependent definition of the melt fraction, $(T-T_s)/(T_L-T_s)$, with $T_L = 1100^\circ\text{C}$ and $T_s = 900^\circ\text{C}$ being liquidus and solidus temperatures, ~~resp., respectively,~~ the set value for the BDT in our simulations implies that cooling joint creation starts at 1000°C when, at any distance from the sill margins, 50% of the sill has crystallized. (Figure 5c).

Note that ~~in this way,~~ we limit the model's representation of fracturing in the sill to cooling joints and thus perform a strong simplification compared to the complex interplay of thermal and hydraulic fracturing mechanisms observed in the field (cf. section 3 and Rabbel et al, 2021). However, the goal is to study the general impact of porous and permeable sills on hydrothermal flow and the associated hydrocarbon transport and storage, which ~~should be~~is possible even with this limitation.

3.3 Modeling setup

We designed our modeling study to approximate the conditions of our study area, although we simplified the setup for the sake of a well-constrained parameter study. Figure 5 and Table 1 show the model setup and the list of important model parameters, respectively.

Our modeling setup consists of a single flat sill of 50 m thickness and 1 km length emplaced at 3 km depth in a homogenous host rock (Figure 5a). We performed a parameter sensitivity study to investigate the impact of porosity and permeability development in sills emplaced in either low-permeability (e.g., shale) and high-to-medium permeability (e.g., silt-/sandstone) host rocks. This allows us to investigate the sills of our study area (sills in Agrío and Vaca Muerta shales), but also compare to sills in the overlying Neuquén Group (silt-/ sandstones) or other relevant geological settings. Figure 5 and Table 1 show the model setup and the list of important model parameters, respectively. Note that we also carried out simulations with thinner sills and provide those as supplementary data for completeness, but do not address their results in detail. We first conducted a series of reference setups including permanently impermeable sills emplaced in either high- or low-permeable host rock. Subsequently, we use the same setups but activate temperature-dependent porosity and permeability generation for the sills. Hydraulic fracturing of the host rock is activated in all simulations.

The model domain (Figure 5a) is 4000 m wide, extends from the surface to 5001000 m below the emplacement depth of the sill, and is discretized with a triangular mesh with variable element sizes between 0.5 - 50 m (smallest around and within the sill, see Figure 5c). We assume instantaneous sill emplacement at 1100°C, corresponding to the inferred liquidus temperatures of andesitic magma in the study area (Spacapan et al., 2018). Since flow patterns around idealized flat sills tend to be symmetric, we limited our studies to a 500 m long “half”, flat sill intrusion (Figure 5a). This allows to evaluate processes around and within the sill at very high resolution of 0.5 m. The left and right boundaries are insulating and impermeable, and we calibrated the fixed temperature at the impermeable bottom boundary to create a geothermal gradient of around 3025 °C/km. The top boundary mimics the behaviour of the sea floor a shallow seafloor with temperature set to 10 °C, pressure set to 0.1 MPa and free in- and outflow. Otherwise, initial conditions consider no basin history such as uplift and erosion, and no pre-existing thermal maturation prior to sill emplacement. We justify this by low background maturity values reported in the study area (Spacapan et al., 2018; Palma et al., 2019; Rabbell et al., 2021).

For the sediments, we chose a homogenous material with 5% TOC and ca. 5 weight percent bound water, as well as exponential decay of porosity with depth (Figure 5b). Permeability is porosity-dependent and follows a Kozeny-Carman relationship. This relationship is calibrated to local organic-rich shale, i.e. values of low porosity and low permeability rocks (Figure 5b). We chose the specific values to match properties of Agrío and Vaca Muerta shale formations at 2-3 km depth in the northern Neuquén Basin, which yielding 10^{-18} m^2 at 3 km. This corresponds to emplacement depths for the igneous petroleum systems present in both subsurface and outcrop (Figure 5b). To compare with settings with more permeable lithologies (silt-/sandstone), we increased the host rock permeability by two orders of magnitude for another set of simulation (Figure 5b). Yet, each host rock setup remains a simplification, as we do not include lithological variations. Sill permeability starts at 10^{-20} m^2 (impermeable) and increases to 10^{-15} m^2 at 900°C. In lack of macroscopic permeability measurements, we chose the maximum permeability value to approximate the upper range for Neuquén sill reservoirs as reported by Spacapan et al. (2020). These values were obtained from (micro-)fractured sill matrix samples and therefore likely underestimate bulk permeability, as they do not include macroscopic cooling joints.

454

455 **3.4—Parameter sensitivity study**

456 ~~In total, we ran 27 simulations to investigate the effects of~~


- 457 ~~○ porosity and permeability generation within sills~~
- 458 ~~○ emplacement depth, i.e., sediment permeability and porosity (1, 2, 3 km)~~
- 459 ~~○ intrusion thickness (10, 30, 50 m)~~

460 ~~We first conduct a series of reference setups including permanently impermeable sills but~~
461 ~~allowing hydraulic fracturing of the host rock. All combinations of emplacement depth and~~
462 ~~sill thickness lead to a total set of 9 reference simulations. Subsequently, we use the same~~
463 ~~setups but activate temperature-dependent porosity and permeability generation for the sills.~~


464

465

a) Simulation Setup Sketch

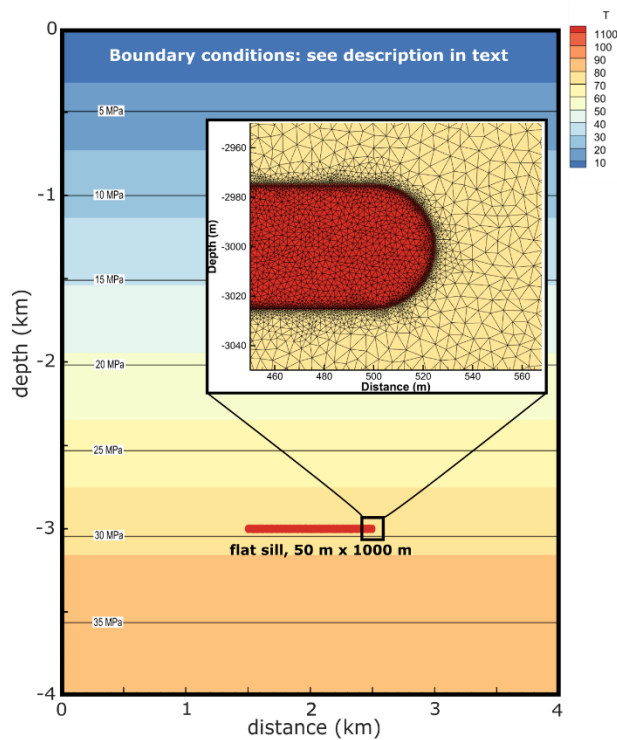

b) Porosity-Permeability models for host rock

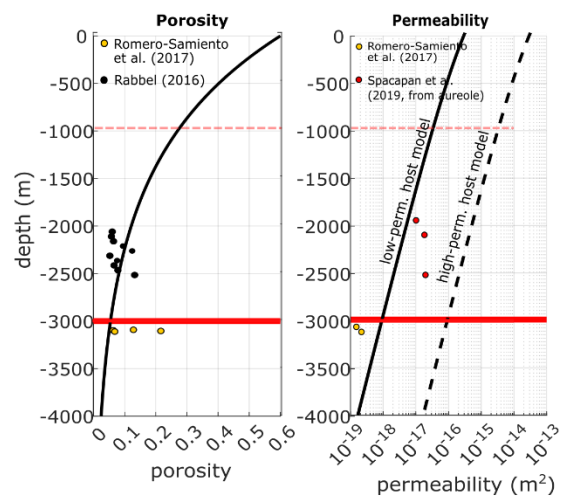

c) Temperature-permeability/porosity evolution in sill

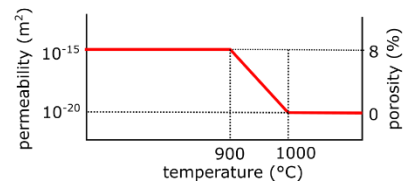


Figure 5. Illustration of the numerical modelling setup. (a) Model domain, with initial temperature and pore pressure field and close-up for mesh illustration. (b) Porosity-permeability-depth relationships in the models alongside reported data from the Vaca Muerta formation from various depths (Rabbel 2017, Romero-Samiento et al. 2017, Spacapan et al. 2019). Note that permeabilities from Spacapan et al. (2019) are the smallest values reported from the fractured and altered aureole of sills and thus likely overestimating background values. (c) Illustration of porosity-permeability-temperature function for sill with assumed cooling joint formation.

477 Table 1. Material properties used for hydrothermal simulations

| Fixed rock parameters | Value | Unit |
|--|--|---|
| Fluid Properties | Follow equation <u>Equation</u> of state for pure water (IAPS-84) | |
| Magma / Sill Properties (representing andesite) | | |
| Specific heat capacity ^{1,2} | 900 | J kg ⁻¹ K ⁻¹ |
| Latent heat of crystallization ^{1,2} | 320 | kJ kg⁻¹ |
| Initial sill temperature ^{3,4} | 1100 | °C |
| Liquidus temperature ³ | 1100 | °C |
| Solidus temperature ⁴ | 900/ 750 | °C |
| Brittle-Ductile-Transition (permeability creation) | 1000-900 | °C |
| Sill thickness ⁴ | <u>50 (+ 10 in supplement)</u> | m |
| Magma density ² <u>Density</u> ^{2,6} | 2830 | kg m⁻³ <u>kg m⁻³</u> |
| Thermal conductivity ⁵ | 2.51 | W m ⁻¹ K ⁻¹ |
| <u>Permeability range in sill</u> ⁷ | 10 ⁻²⁰ – 10 ⁻¹⁵ | <u>m²</u> |
| <u>Porosity range in sill</u> ⁷ | <u>0 – 0.08</u> | <u>1</u> |
| Host Rock Properties (representing shale) | | |
| Density ⁶ | 2600 | kg m⁻³ <u>kg m⁻³</u> |
| Specific heat capacity ⁵ | 960 | J kg ⁻¹ K ⁻¹ |
| Thermal conductivity ⁵ | 2.55 | W m ⁻¹ K ⁻¹ |
| Porosity ⁶ | Ref fig | Ref fig |
| Permeability | Ref fig | Ref fig |
| Initial TOC ⁴ | 0.05 | 1 |
| Initial bound water content ² | 0.048 | 1 |
| Tensile strength ⁷ <u>strength</u> ⁸ | 3 | MPa |
| <u>– Enthalpy of mineral dehydration</u> ^{1,2} | <u>2800</u> | <u>kJ kg(H₂O)⁻¹</u> |
| <u>Enthalpy of organic cracking</u> ^{1,2} | <u>375</u> | <u>kJ kg(TOC)⁻¹</u> |
| <u>Brittle-ductile-transition</u> ² | <u>500-750</u> | <u>°C</u> |
| Sources: ¹ Aarnes et al. (2010), ² Galerie and Hasenclever (2019), ³ Stern et al. (1975), ⁴ Spacapan et al. (2018), ⁵ Angenheister et al. (1982), ⁶ Rabbal (2017), ⁷ <u>Spacapan et al. (2020)</u> , ⁸ Schön (2015) | | |

478

479

3.5.3.4 Numerical Simulation: results

3.5.3.4.1 Impermeable sill: Flow focusing around sill tip and methane plume

We first present and compare the results of the reference simulations of a 50 m thick, impermeable sill emplaced at 3 km depth. Figure 6 displays in either a low-permeability (Figure 6) or high permeability (Figure 7) host rock. Figure 6 and 7 display the evolution of temperature, vitrinite reflectance (R_o) as proxy for thermal maturity, permeability and (first row of images), pore fluid pressure (second row), permeability and transiently opened fracture porosity to highlight regions of active hydrofracturing (third row) and the methane concentration fraction of the fluid (fourth row) in the model at 1, 6460 and 1000 years after the sill is emplaced. In the first few years Additionally, flow vectors colored by fluid velocity in the pore space are shown. We highly recommend to also view the movies supplied in the additional materials of this paper to get a better sense of the process dynamics in space and time.


One year after emplacement (left column in Figure 6, Figure 6 and 7), the sill is still over 1000°C hot and only the host rock very close within <10 m distance to the sill is has been heated to temperatures of >350°C. Within the thin, barely visible thermal aureole, thermal maturity increases strongly, methane is generated by thermal cracking and mineral dehydration takes place. In the dehydrated area, permeability increases from initial values of around 10^{-16} to 10^{-15} m^2 (Figure 6g). Figure 6g also shows a wider area of increased permeability indicated by the white dotted outline Thermal expansion of the heated fluid, mineral dehydration and methane generation close to the sill lead to strongly elevated pore fluid pressures, which corresponds to the extent of hydrofracturing. The organic matter in the shale close to the propagate away from the sill (Figure 6d and 7d). In both low- and high-permeability scenarios we observe similar peak pore pressures of around 80 – 85 MPa at the sill contact shows a strong initial methane release, which travels toward the tip, during the first weeks after the sill emplacement. However, in the high-permeability case (Figure 7d), the pressure front moves faster because of efficient fluid flow even far away from the sill. In contrast, the pressure front moves much slower in the low-permeability case (Figure 6d), where a small initial methane plume rises above the intrusion (Figure 6f) fast fluid flow is restricted to the region of active hydrofracturing (Figure 6g vs. 7g). Flow direction and therefore methane transport is sill-parallel towards the tips in the highly permeable contact aureole and radially outwards outside of the aureole (Figure 6d,j and 7d,j).

After 64 years (central column in Figure 6), the high temperature aureole in the surrounding host rock has expanded as the sill progressively cools down (Figure 6b). Within a distance of about 50 m around the sill, thermal maturity has reached R_o values above 2, which indicates the gas window or overmaturity (Figure 6e). Permeability in the same region is visibly elevated because the clay minerals are partly or fully dehydrated (Figure 6h). However, no more hydrofracturing occurs, since overpressures have dissipated and no longer exceed the tensile failure criterion. Methane concentrations now show a wide plume of methane rising on top of the sill and especially over its tip, but also a sizable accumulation remaining below the sill (Figure 6k).

After 60 years of sill cooling (central column in Figure 6 and 7), the high-temperature aureole (>350°C) has expanded to ca. 25 m around the sill (Figure 6b and 7b), thermal maturity has reached R_o values above 2, which indicates the gas window or overmaturity. At this stage, pore pressure and permeability distribution in the two reference cases differ markedly. In the low-permeability host, fluid overpressure is still sufficiently high to cause hydrofracturing in a several 100 m wide halo around the sill, where permeability is elevated by 1-2 orders of

magnitude with respect to background values (Figure 6e, h). Note that hydrofracturing is vanishing close to the sill where hydrofractures are closing again as pore pressure slowly reduces. The high-permeability host allows for a more efficient dissipation of fluid overpressures so that no more hydrofracturing occurs ca. 10 years after the sill emplacement. After 60 years, the remaining fluid overpressure around the sill is only a few MPa above hydrostatic (Figure 7e, h). Both models also develop porosity and permeability increase due to clay mineral dehydration, but this is limited to 50 m distance from the sill contact. In both models, the highest temperature in the inner aureole (ca. 10 m from contact) is reached ca. 10 years after the sill emplacement (around 670 °C at the sill contact), while the outer aureole (up to ca. 50 m to contact) reaches its peak temperatures (300-400°C, depending on distance to sill) after around 60 years. The combined action of thermal contraction of the cooling fluid after reaching the peak-temperature and additional closure of hydrofractures (i.e., pore-space reduction) in the low-permeability host cause an inversion of the flow direction. After 60 years, fluids carrying high methane concentrations migrate towards the sill within a ~100 m thick region above and below the sill (Figure 6e,k, Figure 7e,k and supplementary movies). Despite the differences in permeability structure and pressure regimes, flow patterns of both reference simulations are relatively similar. The contact-parallel flow in the high permeability host is stronger, and these higher flow velocities lead to a more pronounced plume of rising methane on top of the sill near its tip (Figure 7k). Both cases also show a sizable methane accumulation remaining below the sill.

The right column in ~~Figure 6~~Figure 6 and 7 represents the end of the simulation after ca. 1000 years. The temperatures throughout the model are still elevated with respect to the initial geotherm but are now below 200°C everywhere. Fluid pressure in the low-permeability case is still up to 20 MPa above hydrostatic but has dropped below the failure criterion and hydrofracturing has stopped (Figure 6f,i). In the high-permeability host, pore pressure is reduced to values of <1 MPa above hydrostatic (Figure 7f). The dehydration-related permeability increase has not expanded significantly, ~~but a second~~ in either model. In the low-permeability scenario, some of the methane rises to 250 m above the sill, but the highest concentrations (almost pure methane, i.e., mass fraction close to 1) occur within 50–100 m to the sill contact (Figure 6l). In contrast, the model with a high-permeability host shows the formation of a localized secondary plume of very high methane concentrations ~~is~~(essentially pure methane) rising above the sill, ~~but at some distance to its tip. The peak of (Figure 7l), and the first initial methane plume has reached ca. 300400 m above the sill at this point.~~ The aureole below the sill has also accumulated high methane concentration ~~of up to 800 kg per m³ of water, which in the fluids with up >70% methane fraction within 30 m of the sill. These methane-rich fluids~~ remain trapped below the impermeable sill.

Impermeable sill  Low-permeability host rock (shale)

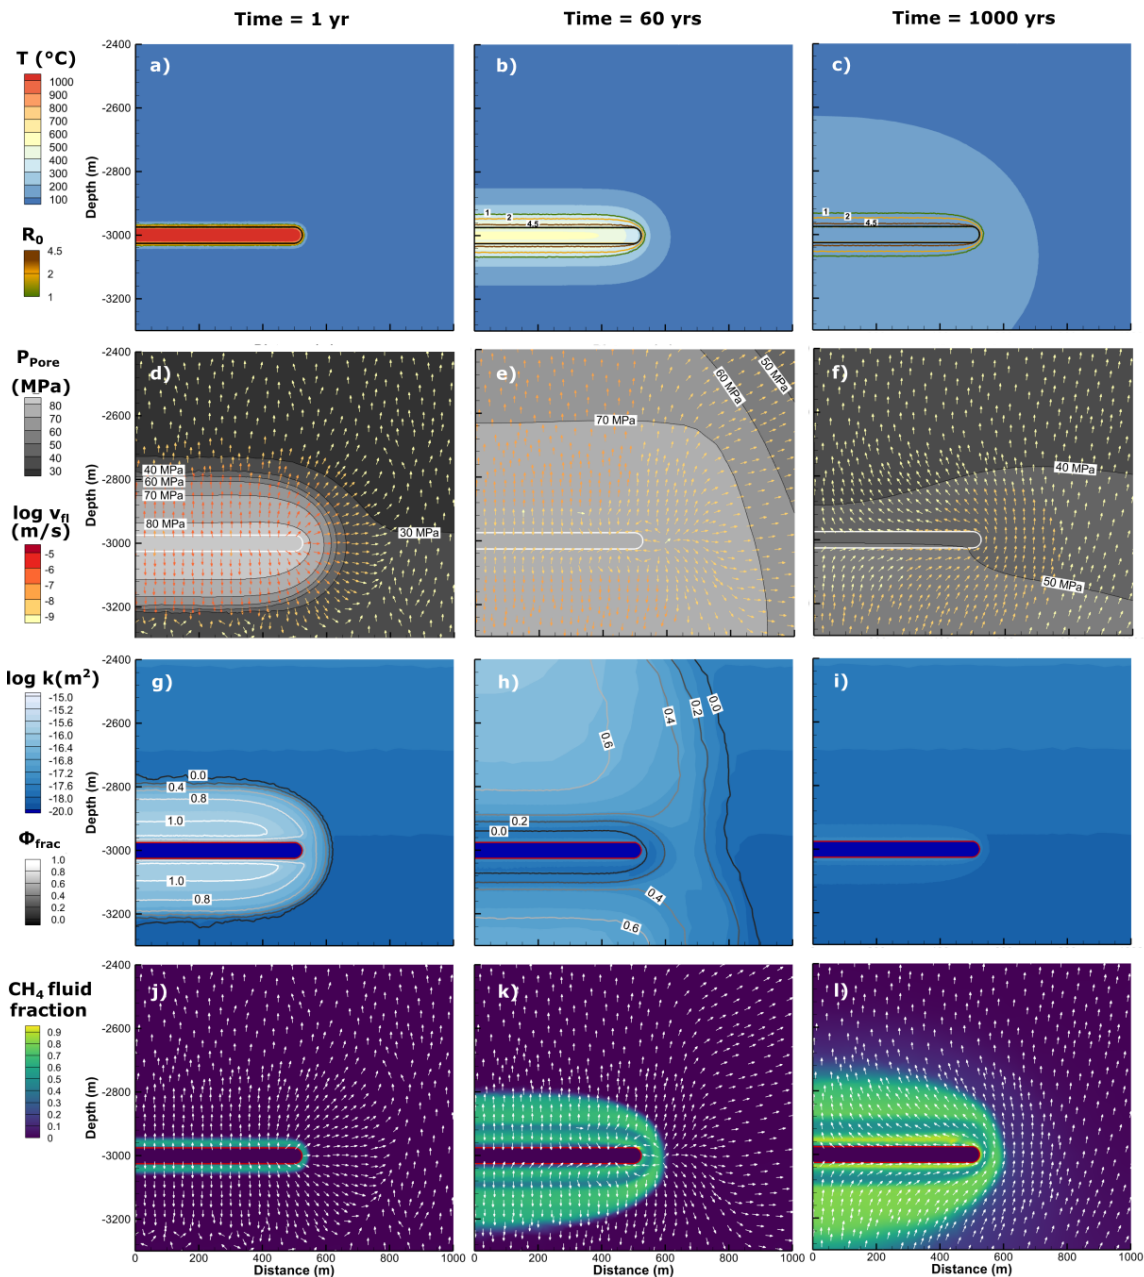


Figure 6. Reference simulation results for an impermeable sill of 50 m thickness at 3 km depth in the low-permeability host case. The columns correspond to 1, 60 and 1000 years of simulated time after emplacement, respectively. The rows represent four parameters characterizing thermal state, contact metamorphism and hydrothermal transport of methane: (a-c) Temperature, thermal maturity as vitrinite reflectance R_0 contours, (d-f) pore fluid pressure with flow vectors coloured by pore velocities, (g-i) permeability with fracture porosity contours, (j-l) methane fraction in fluid.

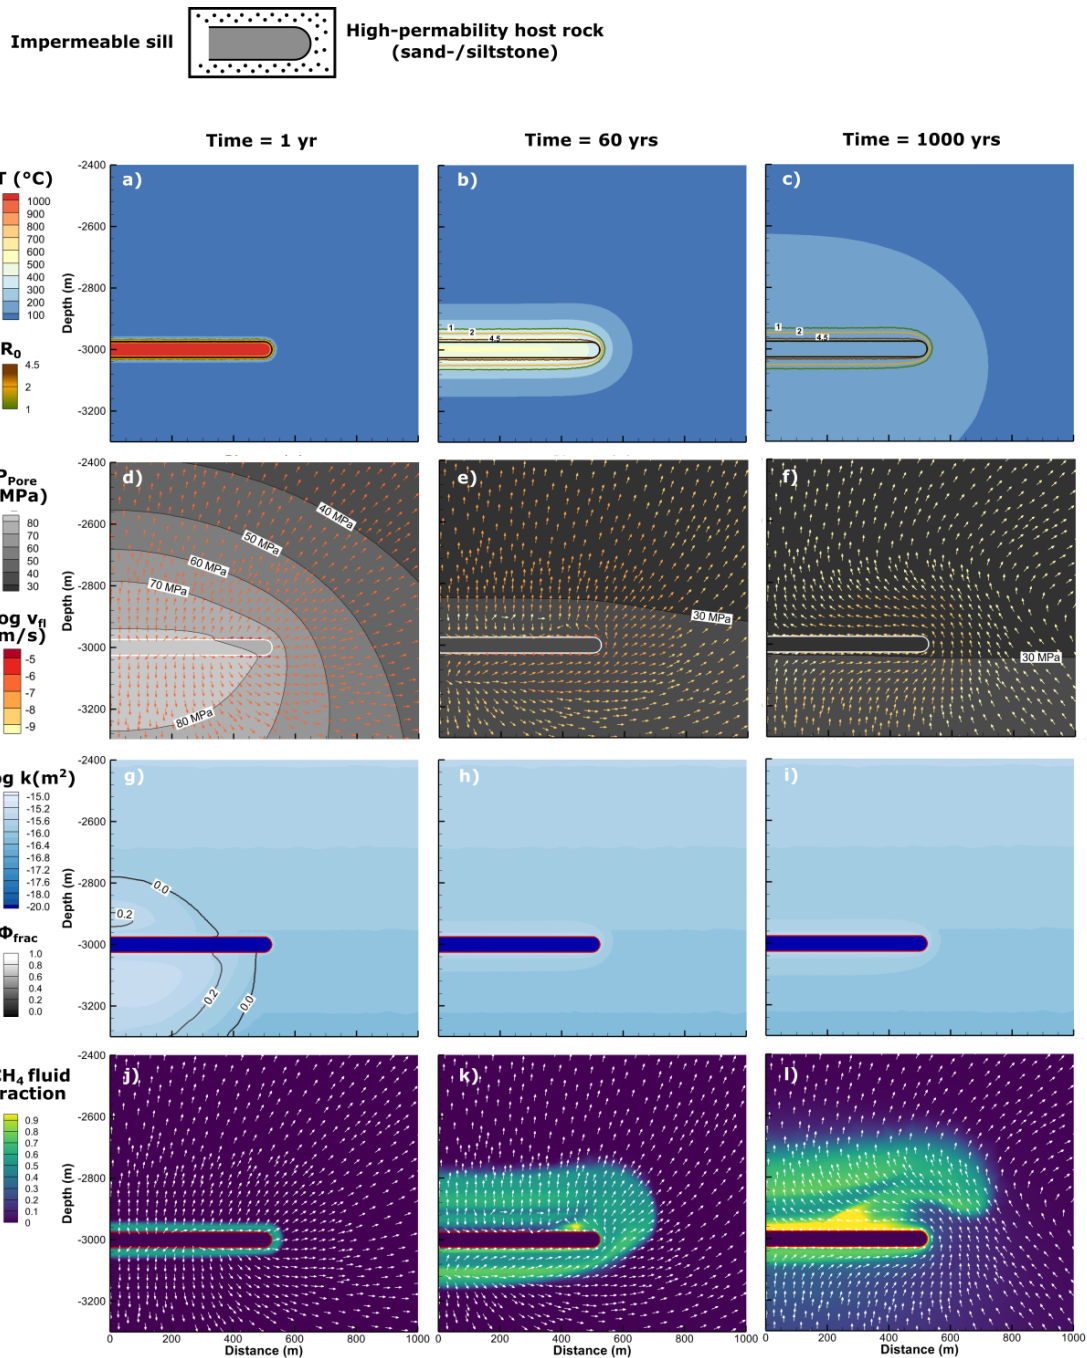


Figure 7. Reference simulation results for an impermeable sill of 50 m thickness at 3 km depth in the high-permeability host case. The columns correspond to 1, 60 and 1000 years of simulated time after emplacement, respectively. The rows represent four parameters characterizing thermal state, contact metamorphism and hydrothermal transport of methane: (a-c) Temperature, thermal maturity as vitrinite reflectance R_0 contours, (d-f) pore fluid pressure with flow vectors coloured by pore velocities, (g-i) permeability with fracture porosity contours, (j-l) methane fraction in fluid.

3.5.23.4.2 Permeable sill: ~~Pressure-release~~Opened upward flow path and flow reversal

The introduction of cooling-related permeability generation in the sill profoundly changes the development of hydrothermal flow and methane transport patterns: ~~for both host rock types.~~ We show identical parameters and time steps as for the reference simulations, ~~i.e. temperature, vitrinite reflectance (thermal maturity), for low- and high-permeability and methane concentrations~~ host in the model area around the permeable sill (Figure 7). ~~Figure 8 and 9, respectively.~~ To describe the details of the evolving flow patterns ~~and hydrocarbon transport in the first 60 years,~~ we add close-up figures for ~~methane concentration and flow velocities~~ both cases displaying ~~fluid pressure with~~ flow vectors ~~as well as and permeability plots with (transient) fracture porosity (Figure 10). Finally, we quantify the total generated methane mass, the methane mass exposed to temperatures >400°C (graphitization conditions), the accumulation of methane and average temperature in the permeable and porous sill, and the average sill (Figure 8)-temperature over time (Figure 11). Again, it is instructive to also view the supplementary movies for the respective simulations.~~

~~In the early phase~~One year after emplacement, initial cooling of the sill leads to a progressing porosity/permeability front where the temperatures approach the solidus defined as 900°C: ~~(Figure 8 and 9, left column).~~ At this stage, ~~which continues until the sill becomes fully permeable,~~ the ~~simulations~~simulations closely ~~resembles~~resemble the reference ~~run (Figure 7, left column)-runs (see also supplementary animations of the simulations).~~ Temperatures in the sediments are elevated only ~~very~~ close to the intrusion, where the sediments almost instantly produce gas or become thermally overmature, i.e., vitrinite reflectance is larger than 1.5 ~~(Figure 7a, d). Permeability (Figure 8a, 9a). Again, pore pressures are strongly elevated, and porosity and permeability in the sediments increases~~increase due to ~~dehydration near the intrusion contact and hydrofracturing in the area within the dotted line below~~around the sill ~~(Figure 7 (Figure 8d, g and 9d, g)).~~ Although large-scale methane ~~concentrations appear~~distribution appears nearly identical to the reference ~~scenarios~~scenarios, the detailed view shows that the onset of porosity and permeability generation in the sill's outermost regions allows ~~some limited methane transport into the flow within the sill (Figure 8a.1) (Figure 10, first and second column).~~ Nevertheless, most fluid flow and methane transport ~~occur parallel to~~is directed away from the sill contact ~~and only rise upward around~~with some sideways flow towards the sill tip (Figure 8a.1, a.4). ~~Since methane generation in~~along the aureole continues but transport is directed sideways within the host rock, ~~the fraction of methane stored in the sill itself reduces (Figure 8b)-bottom contact.~~

~~However, after the~~The entire sill has become fully porous and permeable, after about 12 years (just after Figure 10, second column). While the same processes as described for the reference cases take place here as well (vanishing hydrofracturing, cooling of the contact aureole, fluid contraction and beginning inversion of the flow ~~direction along~~field towards the sill ~~center suddenly~~), the opening of the sill leads to stronger and more focused flow towards it. The flow direction below the sill changes from ~~horizontal, downward or contact-parallel to near-vertical (Figure 7h, k, Figure 8a.2, a.5).~~ The hydrothermal fluids transport ~~the upwards (Figure 8e, Figure 9e), "flushing" high methane concentrations from the lower aureole directly through the sill and into the upper aureole (Figure 7h, Figure 8a.2)-sill (Figure 8k, 9k, 10c, i).~~ However, at this point there are differences between the simulations considering a low- vs. high-permeability host rock.

In the ~~upper aureole~~ temperatures and thermal maturity are now low permeability case, a convection cell evolves within the sill, whose permeability is 2 – 3 orders of magnitude higher than ~~that of the surrounding shale (Figure 10c).~~ Methane transport into the sill is further enhanced by the much slower overpressure dissipation through this host rock and the

fading hydrofracturing. After 60 years, hydrofracturing and the associated fracture porosity are progressively reduced and eventually stopped near the sill (Figure 8h, 10f), where fluid pressures have dropped below the failure criterium. The pressure drop is primarily caused by thermal contraction of the cooling fluids in the lower aureole (Figure 7b, e). At the same time aureole and within the cooling sill. While the front of fading hydrofracturing and associated fracture porosity propagates away from the sill, methane-rich fluid is “squeezed” out of the host rock (Figure 8l, 10c, f) and contributes to a sustained flow and methane transport towards the sill. In this way, the sill is charged with up to 11,000 tons of methane (7.5% of total generated methane) within the first 100 years (Figure 11a). Methane mass in the cooling sill rises to ca. 16,000 tons (8.8% of total) after 250 years.

In the high permeability host rock, the porosity and permeability structure are much simpler, because hydrofracturing is absent due to generally lower fluid pressure (Figure 9e). The permeable sill and its dehydrated aureole, with slightly higher permeability than the background (Figure 9h, k, 10l), now represent an upward pathway and storage layer for methane-rich fluids. In addition to upward flow from below the sill, the flow directions at the intrusion tip also change and a circular flow pattern develops centered around a vortex located at the top of the intrusion tip (Figure 8a.2, a.5). (Figure 9e, 10i). This vortex initiates a sideward and downward directed flow that transports some of the methane from the flat rising plume above and next to the sill tip back towards and into the sill tip (Figure 7k, (Figure 9k). During this phase of “methane flushing”, more methane enters the sill from below and through the tip than is lost through the top contact, and thus both absolute and fractional methane stored in the intrusion rises until ca. 90 years of simulation (Figure 8b). Interestingly, the average temperature in the sill during this stage is still between 400–800°C (Figure 8b). The flow of fluids through the sill also leads to an increased cooling rate from the moment when the sill becomes fully permeable, as is indicated by the “kink” of the temperature curve at ca. 20 years (Figure 8b). Note also that the flow velocities drop by about 2 orders of magnitude compared to the initial years and are now on the order of 10 cm/year after 64 years of simulation. methane stored in the intrusion rises to 10,000 tons (6.3% of total) until ca. 90 years of simulation time (Figure 11b).

Interestingly, in both cases the average temperature in the sill during this stage of “flushing” is still between 400–800 °C (Figure 11). Thus, up to 7.5% of the overall generated methane that reaches the sill and the innermost 10 – 20 m of the aureole in the first ca. 100 years is exposed to these temperatures.

In the following phase until the end of the simulation both simulations, the sill and sediments cool down to below 200°C, and thermal maturity and increases only marginally, and fluid pressures dissipate to a level below the hydrofracturing point (right columns in Figures 8 and 9). In the simulation comprising a low-permeability only increase marginally (Figure 7c, f, i). The host rock, highest methane concentrations accumulate within the sill or within 50 m of the upper contact (Figure 8l). In the high-permeability case, the release of methane previously trapped under the sill creates a slowly rising band of very high methane concentrations above the sill (Figure 7l). At the tip, continuous circular flow creates a spatially confined area of very high methane concentration (Figure 8a.3, a.6). However, flow (Figure 9l). Flow velocities have further reduced by another 2 orders of magnitude (Figure 8a.6). Overall, the sill maintains the total amount of stored methane due to approximately equal inflow and outflow (Figure 8b). However, since, indicating that hydrothermal flow is stalling. In the last few hundred years of each simulation, the methane generation continues in the shale, the fraction of total methane stored amount in the sill reduces to ea. about 10,000 tons (5% from

500 years, 5% of simulation total) and onwards, 4000 tons (2.5% of total), respectively (Figure 11).

In summary, we identify three hydrothermal flow phases in the case of a sill with porosity and permeability evolution due to cooling joints, joint formation. These include


(i) ~~pre-fracturing contact-parallel~~ fluid flow and methane transport, away from the sill and contact-parallel as long as the sill core is impermeable,

(ii) ~~post-fracturing methane flushing and~~ partial backflow and “methane-flushing” into, or through the sill once it is completely fractured; in low-permeability environments, this phase is accompanied by the closure of hydrofractures around the sill, thereby “squeezing out” methane-rich fluids that enter the sill

(iii) stabilization of methane in sill and late stage hydrocarbon in and around the sill during fading hydrothermal circulation.

Despite the differences in the physical behavior between low- and high-permeability host rocks in phase (ii), i.e. fracture-facilitated fluid flow vs. matrix flow, substantial amounts of methane-rich fluids from below enter the porous and permeable sill shortly after its solidification at 900 °C. Compared to the simulations with impermeable sills, fluid overpressures dissipate slightly faster in the same host rock type, because the opening of pore space in the sill compensates for a small fraction of the overpressure.

Permeable sill
(Cooling joints)



Low-permeability
host rock (shale)

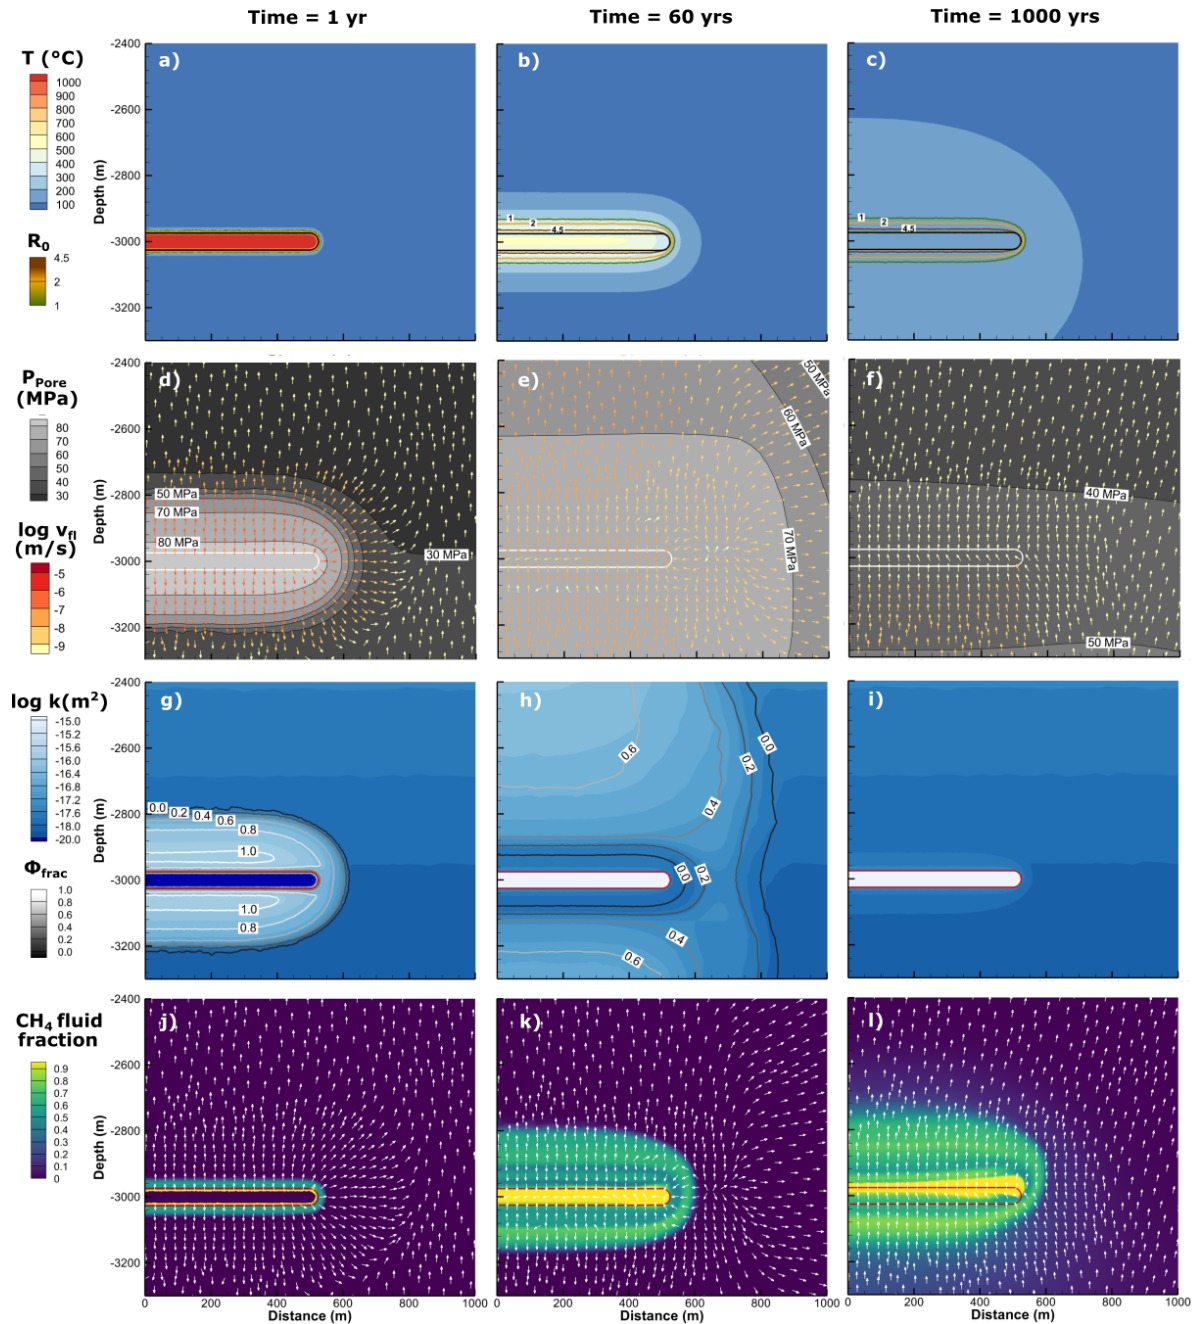


Figure 8. Simulation results for identical conditions as the reference case in Figure 6 (50 m thick, 3 km depth, low-permeability host), but the sill develops porosity and permeability with cooling. The rows represent four parameters characterizing thermal state, contact metamorphism and hydrothermal transport of methane-generation: (a-c) Temperature, thermal maturity as vitrinite reflectance R_0 contours, (d-f) pore fluid pressure with flow vectors coloured by pore velocities, (g-i) permeability with fracture porosity contours, (j-l) methane fraction in fluid.

3.5.3 Effects of emplacement depth and sill thickness

Finally, we explore the influence of emplacement depth and sill thickness on the resulting hydrothermal flow and methane transport pattern in case of a permeable sill (Figure 9). Not surprisingly, deeper and larger sills lead to more methane generation, but the transport of methane differs significantly because the flow patterns are affected in several ways. First, backward flow toward the intrusions similar to that described in the former section occurs only for deep emplacement depths, i.e. generally low permeability of the host rock due to burial, and for relatively thick intrusions (Figure 9a, d, g). In contrast, very thin intrusions (10

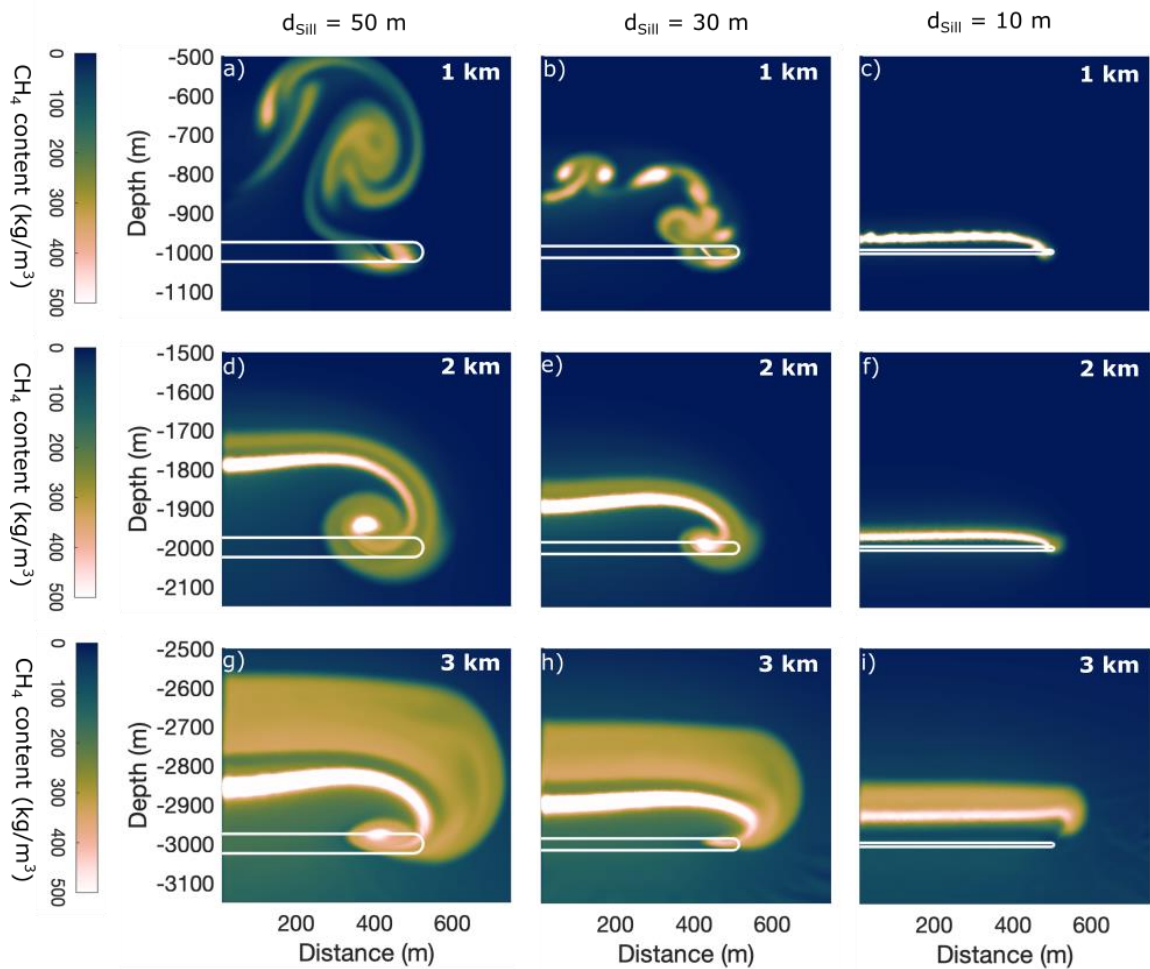


Figure 9. Parameter study results for the effect of varying emplacement depths and sill thicknesses on the final methane distribution after 1000 years, assuming a permeable sill. The columns represent different thicknesses of 50 m, 30 m and 10 m, respectively. The rows show emplacement depths of 1 km, 2 km, and 3 km, respectively, and thus include associated changes in host rock porosity and permeability as displayed in Figure 2b.

m) mainly generate a thick band of rising methane but little to no backflows at this depth (Figure 9f, i).

At 1km depth, however, the characteristics of the hydrothermal flow patterns change drastically. Although some methane remains inside and below the sill tip, the backflow around a tip vortex is no longer the dominant feature. Instead, hydrothermal convection cells develop above the intrusion and a methane plume rises towards the surface (Figure 9a,b). After 1000 years, the plume generated by the 50 m thick sill has risen by 500m, which is more than double compared to the 30 m thick sill at the same depth, or a 50 m thick sill at 2 km depth (Figure 9a, b, d).

Permeable sill (Cooling joints) High-permeability host rock (sand-/siltstone)

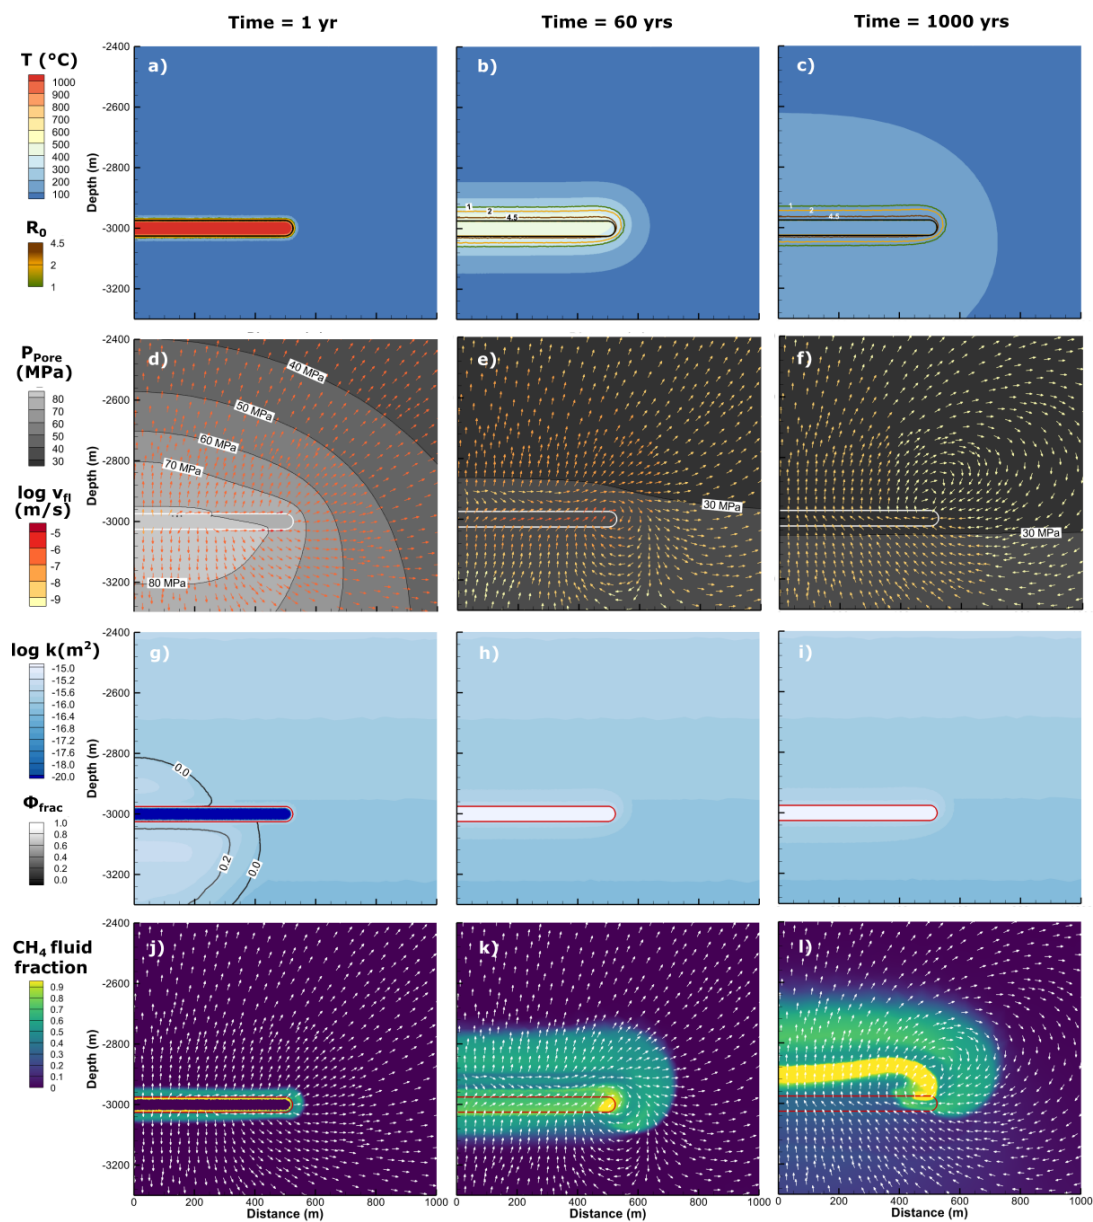


Figure 9. Simulation results for identical conditions as the reference case in Figure 7 (50 m thick, 3 km depth, high-permeability host), but the sill develops porosity and permeability with cooling. The columns correspond to 1, 60 and 1000 years of simulated time after emplacement, respectively. The rows represent four parameters characterizing thermal state, contact metamorphism and hydrothermal transport of methane: (a-c) Temperature, thermal maturity as vitrinite reflectance R_0 contours, (d-f) pore fluid pressure with flow vectors coloured by pore velocities, (g-i) permeability with fracture porosity contours, (j-l) methane fraction in fluid.

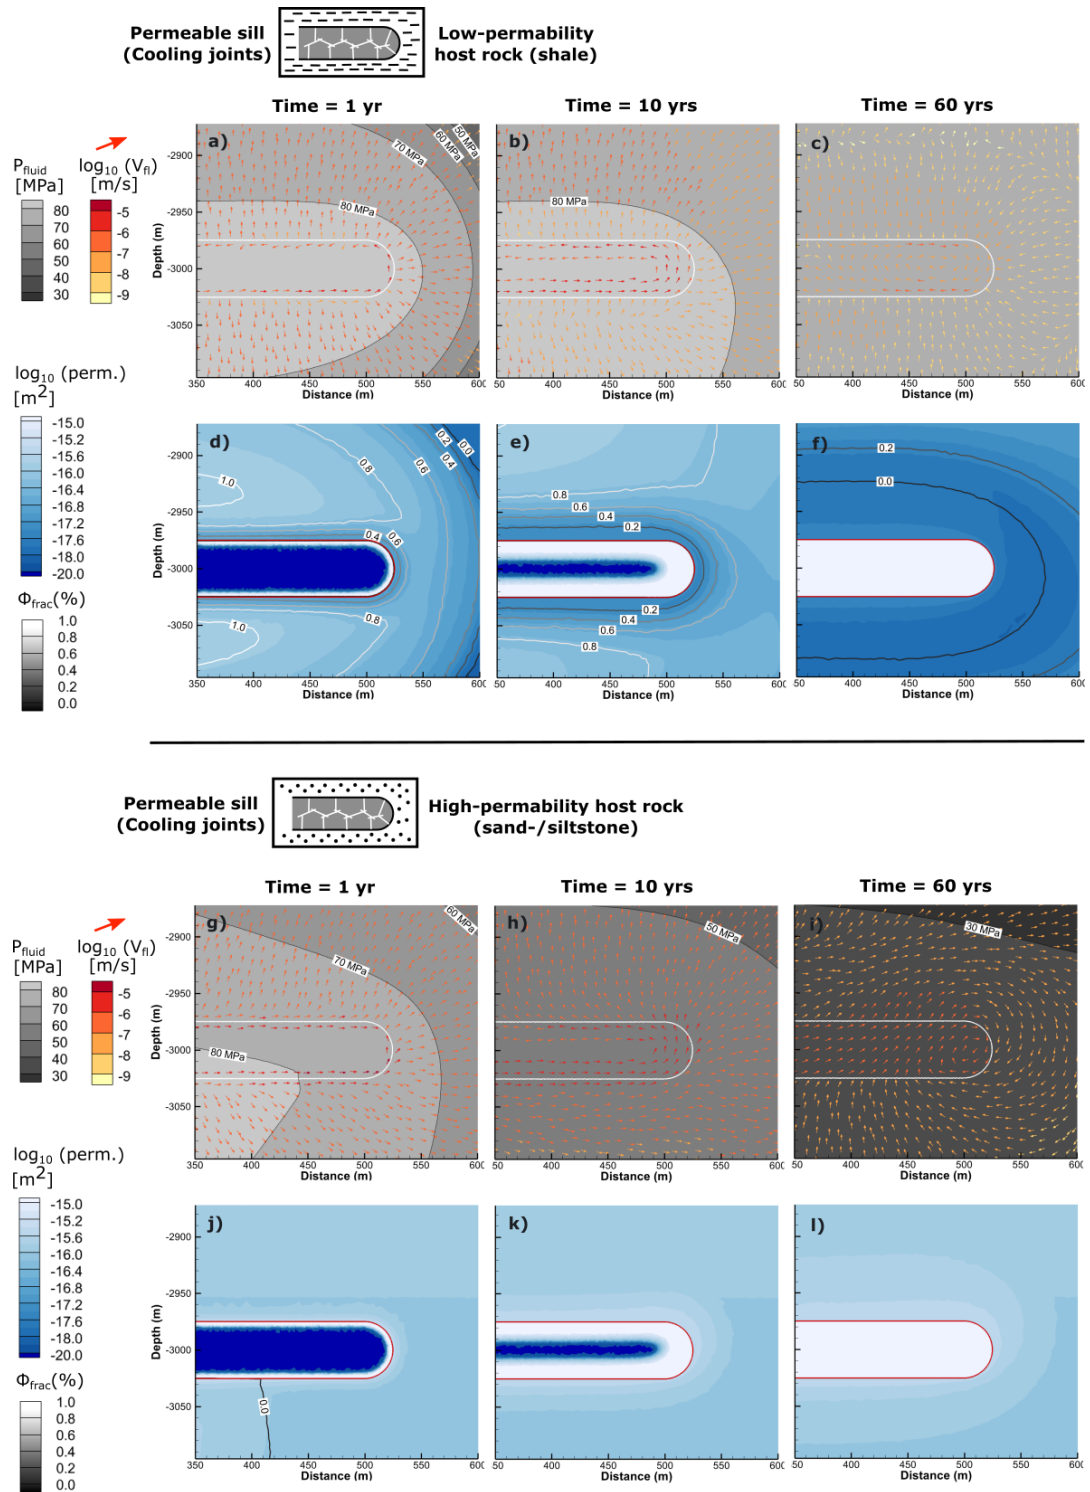


Figure 10. Close-up view of fluid pressure with flow vectors and permeability with fracture porosity contours at 1, 10 and 60 years of the permeable sill simulations in low-permeability (a-f) and high-permeability (g-l) host rocks.

a) Low-permeability host rock

b) High-permeability host rock

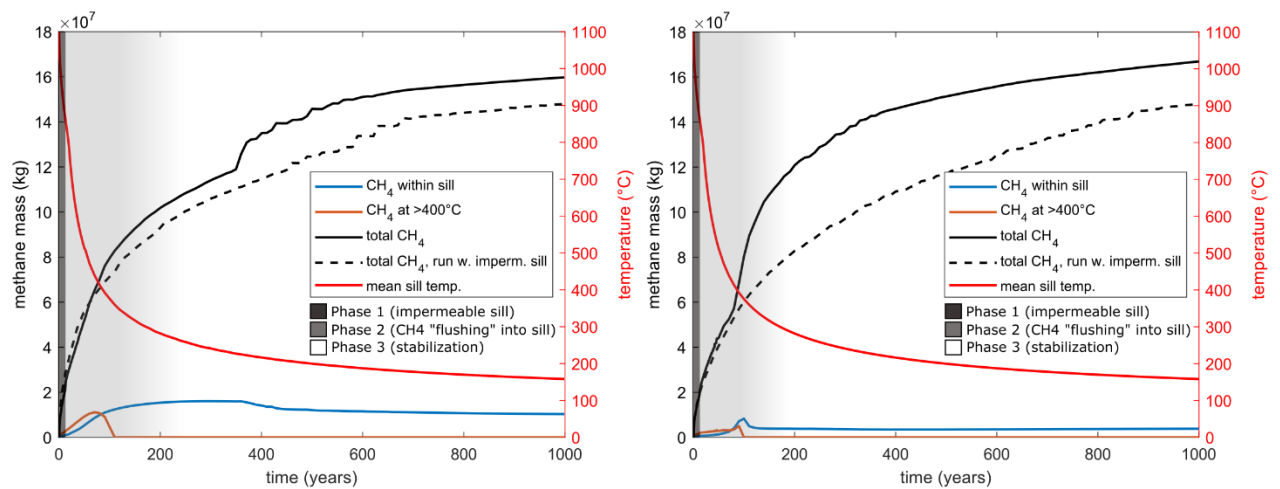


Figure 11. Cumulative methane mass for the simulations with permeable sills in low-permeability host (a) and high-permeability host (b) grouped by different criteria: within rock at $>400^{\circ}\text{C}$, i.e., sufficient for graphitization (orange line), within sill (blue line), total mass generated in the model (black line). Dotted black line gives the total generated methane mass for the respective reference simulation with an impermeable sill. Red line represents average sill temperature.

4 Interpretation and discussion

4.1 Hydrocarbon transport through hot sills

Outcrop data strongly suggests that transport of hydrocarbons generated around the sills in the northern Neuquén Basin occurs both vertically through the igneous intrusions as well as around their tip. Importantly, geochemical data from the study area suggests that the sills are responsible for most, if not all, organic matter transformation in the host rock, because background maturity between the sills is essentially zero (Spacapan et al., 2018; Rabbel et al., 2021). We thus interpret the observed hydrocarbons in the field to result from magmatic heating and hydrothermal activity rather than burial-related maturation.

Cooling joints and veins or dykes filled with black shale and bitumen are pervasive throughout the fracture networks of sills in our study area (~~Figure 2~~(Figure 2 and Figure 3)). The example shown in Figure 2 is particularly clear in showing the relationship between upwelling fluidized structures and the fill of the cooling joints. Note that similar observations have been documented in other outcrops at larger scales (Rabbel et al., 2021). We therefore propose that the flow of hot fluids and fluidized sediments through sills is a common occurrence in the northern Neuquén Basin. We thus provide solid outcrop evidence that sills can become ~~a~~-preferred hydrocarbon transport pathways upon cooling. In contrast, this finding contradicts the widespread assumption of impermeable intrusions in modeling studies of hydrothermal fluid flow in volcanic basins (e.g., Iyer et al., 2013; Iyer et al., 2017; Galerne and Hasenclever, 2019).

Our observations complement numerous growing evidence ~~of hydrocarbons that (carbon-rich) fluids~~ or fluidized sediments ~~within~~entered sills of widely different sizes ~~exist during their cooling stage~~, for instance in the Faroe-Shetland Basin (Rateau et al., 2013; Schofield et al., 2020), Karoo Basin (Svensen et al., 2010; Lenhard et al., 2023) and Guyamas Basin (Teske et al., 2021). Lenhard et al. (2023) concluded that carbon-rich fluids must have entered the sill during magma solidification, and Svensen et al. (2010) found metamorphosed sandstone dykes within dolerite sills in the Karoo Basin with mineral assemblage indicative of temperatures >300°C. They proposed that strong pressure gradients between the overpressured host rocks and the solidifying and contracting sill intrusions are likely responsible for liquefied sediments entering the intrusions shortly after cooling. Similar to this study, Svensen et al. (2010) based this interpretation on coupled thermo-hydraulic models, but explicitly considered thermal contraction of the magma. Although our approach of adding porosity to the sill is a simplification of this process, the general mechanism of hydrocarbon-rich fluids and sediments entering the cooling joint network in the intrusions in the Neuquén Basin is similar. We thus infer that our observations of hydrocarbon flow through hot sills in the Neuquén Basin are widespread in volcanic basins worldwide.

4.2 Impact of permeable sills on hydrothermal flow

Our numerical simulations allow us to assess the effects of ~~implementing~~ porosity and permeability increase due to ~~fracturing~~cooling joint formation when the sill has reached the solidus temperature. In simulations with an impermeable (i.e., unfractured) sill, the intrusion acts as a constant barrier for the hydrothermal flow and methane transport, ~~and only while~~ the aureole shows porosity and permeability evolution due to ~~fracturing~~hydrofracturing and dehydration (~~Figure 6a, d, e~~)(Figure 6 and 7). In this configuration, ~~an~~ upward-rising methane plume initiates from the top contact of the sill. This plume is much more pronounced and methane is transported further upwards if the host rock is relatively permeable, such as

silt- or sandstone (Figure 7). In addition, large amounts of methane are trapped below the sill, since no vertical pathways are available through the sill (~~Figure 6g, j~~ Figure 6l and Figure 7l).

In contrast, a sill becoming permeable ~~sill~~ during cooling introduces drastic changes in the flow and methane transport patterns, and results in three ~~distinct~~ phases with very different characteristics. The details of these phases differ depending on the type of host rock (low- vs. high-permeability), but share many similarities as described below.

Phase 1: ~~Impermeable sill~~ Diverging and contact-parallel flow: ~~around the impermeable sill.~~

Prior to complete solidification, the sill acts as a flow boundary and the flow patterns are essentially the same as ~~in the reference simulation, i.e., rising methane above the sill and contact-parallel flow and extensive hydrofracturing below the sill (Figure 6g, j; Figure 7g, j; Figure 8a.1, a.4).~~ for impermeable sills. Hydraulic fractures in the aureole and around the sill edge initiate in this early phase, ~~(Figure 10d, j),~~ which may lead to the formation of the large bitumen dykes and calcite veins observed in the field (~~Figure 3~~).

Phase 2: ~~Hydrothermal “flushing” through solidified, permeable sill.~~ ~~The generation of cooling-related porosity and permeability inside the sill initiates the abrupt change from contact-parallel flow towards the intrusion tip to vertical uprising through the sill (second column of Figure 7, Figure 8a.2, a.5). This effect is responsible for a rush of hydrocarbon (here: methane)-rich fluids through the sill at average temperatures of 400–800°C (Figure 8b), because the large overpressure below the sills can now drive fluid flow straight upwards and dissipate instead of supplying a steady flow toward the sill tip. (Figure 3). In addition, porosity generation inside the sill creates a suction effect that drives fluids into the intrusion (cf. Svensen et al., 2010). ~~Considering flow velocities after 64 years (Figure 8a.2, a.5), the model shows that fluids flowing through a 50 m thick sill are exposed to this~~~~

Phase 2: ~~Reversed flow and hydrothermal “flushing” of the solidified, permeable sill.~~ The generation of cooling-related porosity and permeability inside the sill creates a hydraulic connection between the lower and upper aureole and initiates the abrupt change to vertical upflow into and through the sill (central column of Figure 8 and 9, Figure 10c, i). This rush of hydrocarbons (here: methane-rich fluids) into and through the sill occurs at average sill temperatures of 400–800 °C (Figure 11). Given the flow velocities and the timespan of methane accumulation (Figure 8k, Figure 9k, Figure 11), the model shows that fluids flowing through a 50 m thick sill are exposed to this high-temperature environment for tens of years, which could be sufficient for graphite generation and therefore seems to fit well with outcrop data and models for hydrothermal graphite generation (Figure 4; Rumble, 2014). We stress that this is also valid for low-permeability host rocks such as shale, because sustained hydrofracturing around the sill facilitates fluid flow by temporarily increasing porosity and permeability in the host rock (Figure 8, 10d, e). “Squeezing” of hydrocarbons towards the porous/permeable sill as the transiently opened fractures close corresponds well with the observation of multi-generation bitumen dykes/dyke arrays in the study area (e.g., Figure 3a, see also Rabbel et al. (2021)).

Phase 3: ~~Vortex phase~~ Stabilization of hydrocarbon and ~~reversed flow.~~ ~~The fading hydrothermal flow.~~

In low-permeability host rocks, reversed flow towards the sill continues for a few hundred years and seems to be driven by closing of hydrofractures and thermal contraction of fluids within the still cooling sill (Figure 8l, 10c, supplementary movies). In high-permeability rocks, however, the sudden change in the pore pressure distribution due to porosity and permeability creation within the sill also initiates ~~the~~ a vortex ~~observed above~~ at the sill tip and. This leads to ~~the observed flow reversal and methane~~ transport of methane-rich fluids

towards the sill tip (right column Figure 7; Figure 8a.3, a.6). However, in the long run from the surrounding host rock (Figure 9l). Eventually the amount of methane influx toward the sill approximately equals the loss through upward flow so that the amount of methane is stable within the sill, and the fraction of total methane stored in the sill reduces after the “flushing” phase (Figure 8b) stabilizes within the sill (Figure 11). Hydrocarbons entering the sill in this last phase ~~does~~do not experience the extreme temperatures and ~~have better chances of survival~~are unlikely to experience graphitization.

4.3—Impact of depth Implications for flow and thickness of permeable sills on hydrothermal flow

The first two phases, i.e. contact parallel flow followed by methane “flushing”, occur in all simulations with permeability creation within the cooling sill in a very similar fashion, which fits well with the fact that we observe graphitic material in sills of all sizes in the field. However, the final flow configuration and methane distribution shows important differences with intrusion thickness and emplacement depth (Figure 9). At depths of at least 2 km, i.e., emplacement depths approximately corresponding to the Agrio and Vaca Muerta formations in the study area, the dominant feature is the backflow at the sill tip from an otherwise evenly rising band of very high methane concentration (Figure 9d, g). Conversely, for the shallowest case (1 km), higher background permeability now allows the formation of large convection cells that methane transport methane towards the surface, while accumulation in the sill itself is very limited (Figure 9a). Thus, shallow permeable sills seem to favour hydrothermal upward transport of methane. This conclusion corresponds well with the results of Iyer et al. (2013) who found that in shallow, high permeability settings, release of fluids through permeable sills could be an important factor for greenhouse gas emissions from contact aureoles of sill intrusions.

Furthermore, the thinnest sills modelled do not have sufficient thermal energy to create the required pressure anomaly to sustain a flow vortex and backward flow of methane similar to the larger intrusions (Figure 9c, f, i). This is especially true for the deeper intrusions, where lower permeability of the host rock generally inhibits fluid flow. Since most of the sills emplaced in our study area are less than 30 m thick, we expect that only few sills create significant backflow.

4.4—Implications for fluid flow and methane transport

4.3 The strong contrast between the simulations with permeable and impermeable sills has important implications for the understanding of hydrothermal flow in volcanic basins, and notably on the formation of hydrothermal vent complexes and gas release to the atmosphere. Permeable sills strongly favor upward vertical flow and fluid pressure dissipation, especially in low-permeability host rocks, whereas impermeable sills favor fluid pressure build-up and contact parallel flow towards sill tips. These latter mechanisms

~~are the main responsible for the formation of hydrothermal vent complexes at sill tips (Iyer et al., 2017; Galerne and Hasenclever, 2019). Conversely, since~~Our results have two main implications for fluid flow and methane transport in volcanic basins. First, they demonstrate that part of the generated methane may transform to graphite and thus be permanently stored in fractured sills. Second, the opening of vertical pathways/flow paths through the sills due to cooling joints efficiently dissipates overpressure, permeable/fractured sills could potentially inhibit vent formation, or at least reduce changes hydrocarbon migration routes compared to impermeable sills, and may thereby affect atmospheric degassing.

Although we do not attempt to model vent formation here, our study can serve as a starting point to investigate the favorable conditions for hydrothermal vent formation. Our findings suggest that imposing impermeable sills in hydrothermal models is a strong assumption that may artificially ease the formation of hydrothermal vent complexes. Although there are good arguments to assume that massive, unfractured and impermeable intrusions dominate in many volcanic basins, the growing evidence of permeable sills during cooling (see section 6.1) suggests that this assumption should be critically evaluated on a case-by-case basis, and might explain the lack of hydrothermal vent complexes in some volcanic basins, like in the Neuquén Basin. We argue that future hydrothermal modelling studies of intrusion in sedimentary basins need to include sound justification for the chosen permeability and porosity evolution of the sills.

Additionally, ~~the~~ Despite observable differences in the physical processes at work during sill emplacement in low- vs. high-permeability host rocks, both environments allow for a signification amount of hydrocarbon flushing into a fractured sill at temperatures that are sufficient for graphitization. The occurrence of graphitic bitumen in dykes and as filling of cooling joints indicates that part of the carbon gases rising through permeable sills could be reduced to graphite and be stored as solids (Figure 2, Figure 3, Figure 4). ~~This fraction of~~ (Figure 2, 3, 11). Our results show a plausible mechanism for the creation of these features, as they demonstrate that methane-rich fluids can exploit hydrofractures to flow into the porous and permeable while temperatures in the sill are >400°C, i.e., high enough for graphite precipitation (Buseck and Beyssac, 2014). This fraction of the mobilized carbon is ~~strappedtrapped~~ permanently underground and is not available for degassing ~~into~~ the atmosphere. The widespread observations of graphite in the field suggests that a significant fraction of hydrocarbons matured in the ~~sills~~-metamorphic aureoles of sills may not be ~~mobilized-transported away from the sill~~. Currently, the fraction of methane transformed to immobile graphite, ~~and so how much this reduced methane transport,~~ is not known. Our simulations with permeable sills provide a first estimate, showing that up to 10-11,000 tons (6.3-7.5%) of the generated methane experiences temperature >400°C (Figure 11a).

Sequestration of significant amounts of generated thermogenic carbon into cooling sills by secondary mineral formation is suggested by borehole data in the Karoo Basin, South Africa (Lenhardt et al., 2023). Despite this carbon mass not being available for degassing, a recent investigation on the Karoo Large Igneous Province and the related Toarcian crisis (ca 183 Ma) indicates that a total of ca. 20,500 Gt C is needed to replicate the Toarcian pCO₂ and δ¹³C proxy data (Heimdal et al., 2021). Based on existing quantitative model outcomes on the Karoo LIP (Galerne and Hasenclever, 2019), Lenhardt et al., (2023) pointed out that sequestration and degassing are not contradictory but rather point at synchronous processes during sill emplacement and cooling.

Additionally, permeable sills favor upward vertical flow and can thus contribute to fluid pressure release below the sill both in low-permeability and high-permeability host rocks. Conversely, impermeable sills favor sustained fluid pressure build-up below the sill and force contact-parallel fluid flow and methane transport towards sill tips (Iyer et al., 2017). These latter mechanisms, combined with a saucer-shaped sill geometry, are the main responsible for the formation of hydrothermal vent complexes at sill tips (Iyer et al., 2017; Galerne and Hasenclever, 2019). In line with field observations in the Neuquén Basin, the simulations considered here use relatively small, flat sills and therefore do not develop sufficient overpressure for hydrothermal vent formation (Galerne and Hasenclever, 2019; Spacapan et al., 2019). They are therefore not suited to quantify the effect of permeable and porous sills

on venting. Nevertheless, the results allow us to speculate that for settings in which venting is generally more likely, permeable sills could reduce vent formation potential, or at least reduce atmospheric degassing. This is because the opening of vertical pathways through the sills offers a more direct fluid escape route and helps to dissipate overpressure below the sill.

4.5.4.4 Implications for igneous petroleum systems in the Río Grande Valley

Our study also provides further insight into the evolution of the igneous petroleum systems in the Río Grande Valley, ~~in particular~~ with respect to the timing of the charging of the igneous hydrocarbon reservoirs. The current conceptual models ~~comprise three main phases after sill emplacement into the previously immature shale formations for these petroleum systems state that a first migration pulse of hydrocarbons into the reservoirs happens when cooling joints open~~ (Witte et al., 2012; Spacapan et al., 2018; Spacapan et al., 2020). ~~During the initial “thermal stage”, the heat input from the sills generates liquid and gaseous hydrocarbons. During the second so-called “cooling stage”, hydrocarbons hydrothermally migrate into the sill once cooling joints form. The last stage comprises tectonic fracturing and late-stage migration of hydrocarbons into the sills.~~

~~In this model, a significant part of the producible hydrocarbons migrates into the sill during the cooling stage, after the formation of cooling joints. However, our~~ study ~~shows demonstrates~~ that hydrocarbons indeed migrate into the intrusions when the cooling joint network ~~has formed forms~~, but likely experience far too high temperatures (at least 400°C) for them to survive as producible liquids or gases. ~~In addition, regardless the scenarios tested in our simulations, temperatures during the main phase of accumulation of hydrocarbons in the intrusion still exceed 300°C (Figure 8b). (Figure 8, Figure 11a).~~ Therefore, a survival of hydrocarbons entering the cooling joint network shortly after its creation seems highly unlikely. This result suggests that the ~~charging of the~~ igneous reservoirs ~~occurs are charged~~ during the late-stage cooling of the sills, and after significant amounts of ~~the~~ hydrocarbons ~~has have~~ flowed through the sills at high temperature. The ~~cooling stage of the models migration model~~ proposed earlier thus needs to be revised and split into two sub-stages: (1) a first influx of hydrocarbons through still hot sills, with no or very limited survival of hydrocarbons, and (2) a later migration of hydrocarbons within the cooled sill, where the hydrocarbons can survive and be trapped to form producible reservoirs.

4.6.4.5 Study limitations and future recommendations

Finally, we present selected recommendations for future work arising from the limitations of our study. Despite the complexity of the current numerical model, some known processes in the host rock are not yet considered. First, mineral precipitation at high temperatures can occur at non-negligible rates and lead to fast porosity-decrease, causing pore pressure increase and possibly fracturing (Townsend, 2018). ~~Fracturing in the aureole may not be reversible but permanently increase porosity and permeability, which has been documented in systematic core studies of contact aureoles in the RGV (Spacapan et al., 2019). These features should be included in future research, and the model predictions tested against field and laboratory studies. Finally, due to the strong effect on hydrothermal flow, it is critical to investigate under which circumstances cooling joints, which exist in many sheet intrusions, become available flow pathways~~ In addition, buoyancy effects of methane or even two-phase ~~flow are not considered, which may be an important parameter especially for venting (Iyer et al., 2017).~~ Finally, we believe that due to the strong impact on hydrothermal flow patterns, future hydrothermal modelling studies of intrusion in sedimentary basins should consider the possibility of early porosity-permeability generation within the sills, especially in light of growing evidence for gas sequestration in sills worldwide. One important point would be to

990 better constrain the permeability of sill fracture networks. Optimally, we should seek to reach
991 beyond ad-hoc models and develop a physical model that quantifies porosity-permeability
992 evolution under given conditions, e.g., depth, thickness, cooling rate, composition of
993 magmatic intrusions.

995 5 Conclusions

996 ~~In this study, we~~We integrate geological field data with numerical models to investigate
997 hydrothermal transport of hydrocarbon-rich fluids around fractured igneous sills. We use
998 outcrops of fractured sills emplaced in organic-rich shales in the northern Neuquén Basin to
999 establish that sills can become permeable fluid pathways upon solidification while still hot,
1000 which affects the fate of locally generated hydrocarbons. The numerical modelling study
1001 allows us to understand in detail the ~~main phases of~~ hydrothermal ~~flow and the kilometre-~~
1002 ~~scale~~ flow patterns in response to porosity and permeability generation inside a sill intrusion.
1003 This provides new insights into hydrothermal flow in volcanic sedimentary basins, because
1004 previous studies commonly assume that sills represent ~~permanently~~prominently impermeable
1005 bodies. The main conclusions of this study are as follows:

- 1006 1. Widespread occurrence of veins with solid, strongly graphitized bitumen as well as
1007 cooling joints filled with solid bitumen or organic-rich shales evidence transport of
1008 hydrocarbon-rich fluids and liquefied sediments into the sill in a high-temperature
1009 (probably >350°C), high-pressure environment. This happens within years to several
1010 decades after solidification of the sill.
- 1012 2. Numerical modelling indicates three ~~distinct~~ flow phases around sills that become porous
1013 and permeable upon solidification, which ~~affects transport of hydrocarbons generated in~~
1014 ~~the contact aureole~~differ markedly from flow around impermeable sills:

1015 (1) Contact-parallel flow toward the tip prior to solidification, creating an early
1016 plume above the sill tip.

1017 (2) Sudden change to vertical flow upon complete solidification ~~and “flushing”.~~
1018 This leads to flow of hydrocarbons from the lower contact aureole upwards into
1019 and/or through the sill. ~~This almost instantly dissipates much of the overpressure~~
1020 ~~below (“flushing”).~~ This effect is present in both low- and high-permeability host
1021 rocks, because hydrofracturing around the sill increases permeability and thus
1022 facilitates flow. In addition, hydrocarbons stored in closing hydrofractures are
1023 expelled, which, directly around the sill, pushes hydrocarbon-rich fluid back
1024 towards the sill.

1025 (3) ~~“Post-flushing”~~Stabilization of the flow regime with slow rise of hydrocarbon-
1026 rich fluids above the sill center, and backward-downward flow towards the sill ~~tip~~
1027 due to either closing of hydrofractures (low-permeability host) or a vortex
1028 initialized~~driven~~ by the ~~sudden pressure reconfiguration~~permeable sill (high-
1029 permeability host).

- 1030 3. Simulations indicate that ~~“flushing”~~flow of methane through the sill occurs at
1031 temperatures >400°C, which meets the conditions for hydrothermal graphitization. This
1032 may explain field observations of graphitic bitumen dykes, and could lead to permanent
1033 storage of part of the mobilized carbon (estimated up to 7.5%).

4. Thus, in contrast to proposed conceptual models, flow of hydrocarbons into newly formed cooling joints is likely not a viable migration/charge mechanism for sill reservoirs in the northern Neuquén Basin, as the intrusions are too hot for survival of liquid hydrocarbons.

4.5. Permeability creation with the cooling sills ~~may considerably~~ does not significantly reduce pressure build-up below the ~~sills, sill,~~ but creates efficient upward pathways for fluid and ~~thus reduce~~ reduces focusing of flow around the ~~potential for hydrothermal venting~~ sill tip. With growing evidence for permeable sills in volcanic basins globally, the permeability evolution of sills should be addressed in future modelling studies focused on sill-related venting.

Acknowledgements

Rabbel's position was funded by the Faculty of Mathematics and Natural Science of the University of Oslo, through the "Earth Flows" Strategic Initiative project. The DEEP Research School provided funding for fieldwork (249040/F60). We thank YTEC for ~~the~~ providing Raman analyses ~~(Octavio, can you complete?)~~ of the graphitic bitumen.

Supplementary material

Additional figures and animations of all described simulation runs, plus some additional ones using a thinner sill, can be found in the following FAIR data repository:
https://osf.io/28whp/?view_only=5ad1d2cc52844f1cb715516d076a5dd0

References

- Aarnes, I., Podladchikov, Y.Y., Svensen, H., 2012. Devolatilization-induced pressure build-up: Implications for reaction front movement and breccia pipe formation. *Geofluids* 12, 265-279, 10.1111/j.1468-8123.2012.00368.x.
- Aarnes, I., Svensen, H., Connolly, J.A.D., Podladchikov, Y.Y., 2010. How contact metamorphism can trigger global climate changes: Modeling gas generation around igneous sills in sedimentary basins. *Geochimica et Cosmochimica Acta* 74, 7179-7195, <http://dx.doi.org/10.1016/j.gca.2010.09.011>.
- Angenheister, G., Cermak, V., Huckenholz, H., Rybach, L., Schmid, R., Schopper, J., Schuch, M., Stoeffler, D., Wohlenberg, J., 1982. Physical properties of rocks. Subvol. a.
- Beyssac, O., Goffé, B., Chopin, C., Rouzaud, J.N., 2002. Raman spectra of carbonaceous material in metasediments: a new geothermometer. *Journal of Metamorphic Geology* 20, 859-871, 10.1046/j.1525-1314.2002.00408.x.
- Buseck, P.R., Beyssac, O., 2014. From organic matter to graphite: Graphitization. *Elements* 10, 421-426.
- Chevallier, L., Gibson, L.A., Hnheleko, L.O., Woodford, A.C., Nomqophu, W., Kippie, I., 2004. Hydrogeology of fractured-rock aquifers and related ecosystems within the Qoqodala

- dolerite ring and sill complex, Great Kei catchment, Eastern Cape, Water Res. Com., S. Afr., p. 127.
- Cobbold, P.R., Diraison, M., Rossello, E.A., 1999. Bitumen veins and Eocene transpression, Neuquén basin, Argentina. *Tectonophysics* 314, 423-442.
- Combina, A., Nullo, F., 2005. Tertiary volcanism and sedimentation in the southern Cordillera Principal, Mendoza, Argentina, Extended Abstracts, 6th International Symposium on Andean Geodynamics, pp. 174-177.
- Connolly, J., 2009. The geodynamic equation of state: what and how. *Geochemistry, Geophysics, Geosystems* 10.
- Delaney, P.T., 1982. Rapid intrusion of magma into wet rock: Groundwater flow due to pore pressure increases. *Journal of Geophysical Research: Solid Earth* 87, 7739-7756.
- Einsele, G., Gieskes, J.M., Curray, J., Moore, D.M., Aguayo, E., Aubry, M.-P., Fornari, D., Guerrero, J., Kastner, M., Kelts, K., Lyle, M., Matoba, Y., Molina-Cruz, A., Niemitz, J., Rueda, J., Saunders, A., Schrader, H., Simoneit, B., Vacquier, V., 1980. Intrusion of basaltic sills into highly porous sediments, and resulting hydrothermal activity. *Nature* 283, 441-445, doi: 10.1038/283441a0.
- Galerne, C.Y., Hasenclever, J., 2019. Distinct Degassing Pulses During Magma Invasion in the Stratified Karoo Basin—New Insights From Hydrothermal Fluid Flow Modeling. *Geochemistry, Geophysics, Geosystems* 20, 2955-2984, 10.1029/2018GC008120.
- Hayba, D. O., and S. E. Ingebritsen, 1997. Multiphase groundwater flow near cooling plutons, J. Geophys. Res., 102, 12,235–12,252, doi:10.1029/97JB00552.
- Hays, W.W., Nuttli, O.W., Scharon, L., 1967. Mapping gilsonite veins with the electrical resistivity method. *Geophysics* 32, 302-310.
- Hetényi, G., Heimdal, T. H., Goddérís, Y., Jones, M. T., & Svensen, H. H., 2021. Assessing the importance of thermogenic degassing from the Karoo Large Igneous Province (LIP) in driving Toarcian carbon cycle perturbations. Nature Communications, 12(1), 6221. Hetényi, G., Taisne, B., Garel, F., Médard, É., Bosshard, S., Mattsson, H.B., 2012. Scales of columnar jointing in igneous rocks: field measurements and controlling factors. *Bulletin of Volcanology* 74, 457-482, 10.1007/s00445-011-0534-4.
- Howell, J.A., Schwarz, E., Spalletti, L.A., Veiga, G.D., 2005. The Neuquén Basin: an overview, in: Veiga, G.D., Spalletti, L.A., Howell, J.A., Schwarz, E. (Eds.), *Geological Society, London, Special Publications*, 252, pp. 1-14.
- Ingebritsen, S. E., Geiger, S., Hurwitz, S., & Driesner, T., 2010. Numerical simulation of magmatic hydrothermal systems. Reviews of Geophysics, 48(1).
- Iyer, K., Rüpke, L., Galerne, C.Y., 2013. Modeling fluid flow in sedimentary basins with sill intrusions: Implications for hydrothermal venting and climate change. *Geochemistry, Geophysics, Geosystems* 14, 5244-5262, 10.1002/2013GC005012.
- Iyer, K., Schmid, D.W., Planke, S., Millett, J., 2017. Modelling hydrothermal venting in volcanic sedimentary basins: Impact on hydrocarbon maturation and paleoclimate. *Earth Planet. Sci. Lett.* 467, 30–42, <https://doi.org/10.1016/j.epsl.2017.03.023>, 467, 30-42
- Jamtveit, B., Svensen, H., Podladchikov, Y.Y., Planke, S., 2004. Hydrothermal vent complexes associated with sill intrusions in sedimentary basins. *Physical Geology of High-Level Magmatic Systems. Geological Society, London, Special Publications* 234, 233-241.
- Kay, S.M., Burns, W.M., Copeland, P., Mancilla, O., 2006. Upper Cretaceous to Holocene magmatism and evidence for transient Miocene shallowing of the Andean subduction zone under the northern Neuquén Basin. *Geological Society of America Special Papers* 407, 19-60.
- Kietzmann, D.A., Palma, R.M., Riccardi, A.C., Martín-Chivelet, J., López-Gómez, J., 2014. Sedimentology and sequence stratigraphy of a Tithonian–Valanginian carbonate ramp (Vaca Muerta Formation): a misunderstood exceptional source rock in the Southern Mendoza area of the Neuquén Basin, Argentina. *Sedimentary geology* 302, 64-86.

- Kobchenko, M., Hafver, A., Jettestuen, E., Renard, F., Galland, O., Jamtveit, B., Meakin, P., Dysthe, D. K., 2014. Evolution of a fracture network in an elastic medium with internal fluid generation and expulsion. *Physical Review E*, 90(5), 052801.
- Kwiecinska, B., Suárez-Ruiz, I., Paluszkiwicz, C., Rodriques, S., 2010. Raman spectroscopy of selected carbonaceous samples. *International Journal of Coal Geology* 84, 206-212.
- Lenhardt, N., Galerne, C., Le Roux, P., Götz, A. E., & Lötter, F. J., 2023. Geochemistry of dolerite intrusions of the southeastern Main Karoo Basin, South Africa: Magma evolution, evidence for thermogenic gas sequestration, and potential implications for the early Toarcian Oceanic Anoxic Event, *Gondwana Research*, 113, 144-162.
- Manceda, R., Figueroa, D., 1995. Inversion of the Mesozoic Neuquén rift in the Malargüe fold and thrust belt, Mendoza, Argentina, in: Tankard, A.J., S., S., Welsink, H.J. (Eds.), *Petroleum basins of South America: AAPG Memoir*, 62, pp. 369–382.
- Mark, N., Schofield, N., Pugliese, S., Watson, D., Holford, S., Muirhead, D., Brown, R., Healy, D., 2018. Igneous intrusions in the Faroe Shetland basin and their implications for hydrocarbon exploration; new insights from well and seismic data. *Marine and Petroleum Geology* 92, 733-753.
- Marsh, B.D., 2002. On bimodal differentiation by solidification front instability in basaltic magmas, part 1: basic mechanics. *Geochimica et Cosmochimica Acta* 66, 2211-2229, [https://doi.org/10.1016/S0016-7037\(02\)00905-5](https://doi.org/10.1016/S0016-7037(02)00905-5).
- Nermoen, A., Galland, O., Jettestuen, E., Fristad, K., Podladchikov, Y.Y., Svensen, H., Malthes-Sørensen, A., 2010. Experimental and analytic modeling of piercement structures. *J. Geophys. Res.* 115, B10202, 10.1029/2010jb007583.
- Palma, J.O., Spacapan, J.B., Rabbel, O., Galland, O., Ruiz, R., Leanza, H.A., 2019. The atypical igneous Petroleum System of the Cara Cura range, southern Mendoza province, Argentina, in: *The Physical Geology of Subvolcanic Systems: Laccoliths, Sills and Dykes (LASI6)*, Book The atypical igneous Petroleum System of the Cara Cura range, southern Mendoza province, Argentina, Edition ed.
- Panahi, H., Kobchenko, M., Meakin, P., Dysthe, D.K., Renard, F., 2018. In-situ imaging of fracture development during maturation of an organic-rich shale: Effects of heating rate and confinement. *Marine and Petroleum Geology* 95, 314-327.
- Parnell, J., & Carey, P. F., 1995. Emplacement of bitumen (asphaltite) veins in the Neuquén Basin, Argentina, *AAPG bulletin*, 79(12), 1798-1816.
- Petford, N., 2003. Controls on primary porosity and permeability development in igneous rocks. *Hydrocarbons in Crystalline Rocks* 214, 93-107, Doi 10.1144/Gsl.Sp.2003.214.01.06.
- Potgieter-Vermaak, S., Maledi, N., Wagner, N., Van Heerden, J., Van Grieken, R., Potgieter, J., 2011. Raman spectroscopy for the analysis of coal: a review. *Journal of Raman Spectroscopy* 42, 123-129.
- Rabbel, O., 2017. Integrated Seismic and Rock Physics Modelling of Oil-Producing Volcanic Sills in the Neuquén Basin, Argentina, Department of Geosciences. University of Oslo, Oslo, p. 83.
- Rabbel, O., Galland, O., Mair, K., Lecomte, I., Senger, K., Spacapan, J.B., Manceda, R., 2018. From field analogues to realistic seismic modelling: a case study of an oil-producing andesitic sill complex in the Neuquén Basin, Argentina. *J. Geol. Soc.*, 10.1144/jgs2017-116.
- Rabbel, O., Mair, K., Galland, O., Grühser, C., Meier, T., 2020. Numerical modeling of fracture network evolution in organic-rich shale with rapid internal fluid generation. *Journal of Geophysical Research: Solid Earth* 125, e2020JB019445.
- Rabbel, O., Palma, J.O., Mair, K., Galland, O., Spacapan, J.B., Senger, K., 2021. Fracture networks in shale-hosted igneous intrusions: Processes, distribution and implications for igneous petroleum systems. *J. Struct. Geol.* 150, 104403, <https://doi.org/10.1016/j.jsg.2021.104403>
- Rantitsch, G., Lämmerer, W., Fisslthaler, E., Mitsche, S., Kaltenböck, H., 2016. On the discrimination of semi-graphite and graphite by Raman spectroscopy. *International Journal of Coal Geology* 159, 48-56.

- Rateau, R., Schofield, N., Smith, M., 2013. The potential role of igneous intrusions on hydrocarbon migration, West of Shetland. *Petroleum Geoscience* 19, 259-272, doi: 10.1144/petgeo2012-035.
- Rodriguez Monreal, F., Villar, H.J., Baudino, R., Delpino, D., Zencich, S., 2009. Modeling an atypical petroleum system: A case study of hydrocarbon generation, migration and accumulation related to igneous intrusions in the Neuquen Basin, Argentina. *Marine and Petroleum Geology* 26, 590-605, doi: 10.1016/j.marpetgeo.2009.01.005.
- Rumble, D., 2014. Hydrothermal graphitic carbon. *Elements* 10, 427-433.
- Schioma, M.F., 1994. Intrusivos del valle del Río Grande, provincia de Mendoza, su importancia como productores de hidrocarburos. Universidad Nacional de La Plata.
- Schofield, N., Holford, S., Edwards, A., Mark, N., Pugliese, S., 2020. Overpressure transmission through interconnected igneous intrusions. *AAPG Bulletin* 104, 285-303.
- Schön, J.H., 2015. *Physical properties of rocks: Fundamentals and principles of petrophysics*. Elsevier.
- Senger, K., Millett, J., Planke, S., Ogata, K., Eide, C., Festøy, M., Galland, O., Jerram, D.A., 2017. Effects of igneous intrusions on the petroleum system: a review. *First Break* 35.6, 47-56, 10.3997/1365-2397.2017011.
- Spacapan, J.B., D'Odorico, A., Palma, O., Galland, O., Rojas Vera, E., Ruiz, R., Leanza, H.A., Medialdea, A., Mancada, R., 2020. Igneous petroleum systems in the Malargüe fold and thrust belt, Río Grande Valley area, Neuquén Basin, Argentina. *Marine and Petroleum Geology* 111, 309-331, <https://doi.org/10.1016/j.marpetgeo.2019.08.038>.
- Spacapan, J.B., D'Odorico, A., Palma, O., Galland, O., Senger, K., Ruiz, R., Mancada, R., Leanza, H.A., 2019. Low resistivity zones at contacts of igneous intrusions emplaced in organic-rich formations and their implications on fluid flow and petroleum systems: A case study in the northern Neuquén Basin, Argentina. *Basin Research*, 10.1111/bre.12363.
- Spacapan, J.B., Galland, O., Leanza, H.A., Planke, S., 2017. Igneous sill and finger emplacement mechanism in shale-dominated formations: a field study at Cuesta del Chihuido, Neuquén Basin, Argentina. *J. Geol. Soc.* 174, 422-433, 10.1144/jgs2016-056.
- Spacapan, J.B., Palma, O., Galland, O., Mancada, R., Rocha, E., D'Odorico, A., Leanza, H.A., 2018. Thermal impact of igneous sill complexes on organic-rich formations and the generation of a petroleum system: case study in the Neuquén Basin, Argentina. *Mar. Pet. Geol.* 91, 519-531, <https://doi.org/10.1016/j.marpetgeo.2018.01.018>.
- Stern, C.R., Huang, W.-L., Wyllie, P.J., 1975. Basalt-andesite-rhyolite-H₂O: Crystallization intervals with excess H₂O and H₂O-undersaturated liquidus surfaces to 35 kbars, with implications for magma genesis. *Earth and Planetary Science Letters* 28, 189-196.
- Svensen, H., Aarnes, I., Podladchikov, Y.Y., Jettsetuen, E., Harstad, C.H., Planke, S., 2010. Sandstone dikes in dolerite sills: Evidence for high-pressure gradients and sediment mobilization during solidification of magmatic sheet intrusions in sedimentary basins. *Geosphere* 6, 211-224.
- Svensen, H., Planke, S., Mørth, S., Sørensen, A., Jamveit, B., Myklebust, R., Rasmussen Eidem, T., Rey, S.S., 2004. Release of methane from a volcanic basin as a mechanism for initial Eocene global warming. *Nature* 429, 542-545, doi: 10.1038/nature02566.
- Sweeney, J.J., Burnham, A.K., 1990. Evaluation of a simple model of vitrinite reflectance based on chemical kinetics. *AAPG bulletin* 74, 1559-1570.
- Teske A, Lizarralde D, Höfig TW, and the Expedition 385 Scientists (2021): Expedition 385 Summary. *Proceedings of the International Ocean Discovery Program* 385. doi: 10.14379/iodp.proc.385.101.2021
- Townsend, M.R., 2018. Modeling Thermal Pressurization Around Shallow Dikes Using Temperature-Dependent Hydraulic Properties: Implications for Deformation Around Intrusions. *Journal of Geophysical Research: Solid Earth* 123, 311-323.
- Witte, J., Bonora, M., Carbone, C., Oncken, O., 2012. Fracture evolution in oil-producing sills of the Río Grande Valley, northern Neuquen Basin, Argentina. *AAPG Bulletin* 96, 1253-1277, doi: 10.1306/10181110152.

1230 Yagupsky, D.L., Cristallini, E.O., Fantín, J., Valcarce, G.Z., Bottesi, G., Varadé, R., 2008. Oblique half-
1231 graben inversion of the Mesozoic Neuquén Rift in the Malargüe Fold and Thrust Belt,
1232 Mendoza, Argentina: New insights from analogue models. Journal of Structural Geology 30,
1233 839-853, <https://doi.org/10.1016/j.jsg.2008.03.007>.
1234 Zanella, A., Cobbold, P.R., Ruffet, G., Leanza, H.A., 2015. Geological evidence for fluid overpressure,
1235 hydraulic fracturing and strong heating during maturation and migration of hydrocarbons in
1236 Mesozoic rocks of the northern Neuquén Basin, Mendoza Province, Argentina. J. S. Amer.
1237 Earth. Sci. 62, 229-242, <http://dx.doi.org/10.1016/j.jsames.2015.06.006>.
1238