

# 1 **Proposal for a new meteotsunami intensity index.**

2

3 Clare Lewis<sup>1 2</sup>, Tim Smyth<sup>2</sup>, Jess Neumann<sup>1</sup>, Hannah Cloke<sup>1 3</sup>

4

5 <sup>1</sup> Department of Geography & Environmental Science, University of Reading, Reading, UK

6 <sup>2</sup> Plymouth Marine Laboratory, Prospect Place, Plymouth, Devon, PL1 3DH, UK

7 <sup>3</sup> Department of Meteorology, University of Reading, Reading, UK

8

9 *Correspondence to:* Clare Lewis ([clare.lewis@pgr.reading.ac.uk](mailto:clare.lewis@pgr.reading.ac.uk))

10

## 11 **Abstract**

12 Atmospherically generated coastal waves labelled as meteotsunami are known to cause destruction, injury and fatality due to  
13 their rapid onset and unexpected nature. Unlike other coastal hazards such as tsunami, there exists no standardised means of  
14 quantifying this phenomenon which is crucial for understanding shoreline impacts and to enable researchers to establish a  
15 shared language and framework for meteotsunami analysis and comparison.

16 In this study, we present a new 5-level Lewis Meteotsunami Intensity Index (LMTI) trialled in the United Kingdom (UK) but  
17 designed for global applicability. A comprehensive dataset of meteotsunami events recorded in the UK was utilised and the  
18 index's effectiveness was evaluated, with intensity level and spatial distribution of meteotsunami occurrence derived. Results  
19 revealed a predominant occurrence of Level 2 moderate intensity meteotsunamis (69%) in the UK, with distinct hotspots  
20 identified in Southwest England and Scotland. Further trial implementation of the LMTI in a global capacity revealed its  
21 potential adaptability to other meteotsunami prone regions facilitating the comparison of events and promoting standardisation  
22 of assessment methodologies.

23

## 24 **1 Introduction**

25 If you live in a coastal zone, you are at risk from being impacted by various hydrometeorological hazards, one such hazard is  
26 the meteorological tsunami or meteotsunami. This is a globally occurring shallow water wave which tends to be initiated by  
27 sudden air pressure changes and wind stress from moving atmospheric systems such as convective clouds, cyclones, squalls,  
28 thunderstorms, gravity waves and strong mid-tropospheric winds (Vilibić and Šepić, 2017). The atmospheric disturbance  
29 transfers energy into the ocean initiating and amplifying a water wave that then travels towards the coastline where it is further  
30 amplified through coastal resonances (Šepić et al. 2012). There are a range of geneses associated with meteotsunami, however  
31 air pressure change has been the traditional dominant factor in the generation and propagation of this phenomenon worldwide.  
32 Certain meteotsunami can be driven by strong wind fronts, as exemplified by the ‘winter type meteotsunamis’ in the Northern  
33 Baltic Sea (Pellikka et al, 2022). Infra gravity waves linked to strong mid tropospheric jets are also correlated with

34 meteotsunami genesis, this is restricted to such locations as the Mediterranean, Chile and Australia but not so prevalent in the  
35 Tropics (Zemunik, 2022). According to Denamiel et al (2023) infra gravity waves manifest as rapid surface pressure  
36 oscillations and low sea level pressure. This reinforces Pellikka et al (2022) and Rabinovich (2020) who state that air pressure  
37 plays a dominant role in some of the world's strongest meteotsunami. Following on from this and with the data available we  
38 examined the source of each event and chose air pressure as the primary atmospheric component to cover both mid latitudes  
39 and equatorial regions to, allowing for global standardisation of the index.

40 Due to the rapid onset and unexpected nature of these waves, they have the potential to pose a considerable threat to coastal  
41 communities, infrastructure and ecosystems (Sibley et al. 2016). This has been apparent throughout recent history with an  
42 increase in the number of meteotsunami being experienced around the world. With extreme events such as those in Vela Luka  
43 (Croatia, 1978) where a 6m wave caused US\$7 million damage; at Nagasaki (Japan, 1979) where an event killed three people;  
44 Dayton Beach (Florida, 1992) where a single 3 m wave injured 75 people and caused damaged to dozens of cars and the  
45 Persian Gulf (2017) where a squall line initiated a 2.5 m wave leaving 22 injured and five dead (Gusiakov, 2021).

46 Understanding the intensity and impact of meteotsunami is crucial for effective coastal hazard management. The development  
47 of the LMTI index involved an extensive review of existing global meteotsunami scales and indices to which it was found that  
48 there is an absence of a working methodology. There was an initial suggestion at an intensity scale for meteotsunami as  
49 presented in an editorial by Vilibic´ et al (2021). However, as acknowledged by the author this scale was limited to the events  
50 and papers presented in the special edition and was designed to represent a feature that might be used for cataloguing  
51 meteotsunami. There is no detailed methodology available for this index, the scoring appears to be based upon wave height,  
52 injuries and fatalities. While fatalities can indicate the severity of an event, they are influenced by a range of factors. Using  
53 fatality as a sole aspect would mean that a meteotsunami arriving on the shores of a highly populated area would indeed have  
54 more of an impact than an event occurring in a less populated area. It assumes that an event is only of high intensity if it has  
55 an anthropogenic impact.

56 Due to the absence of a working intensity index, we subsequently reviewed tsunami scales and indices, as these have a  
57 similarity to meteotsunami in wave types and impacts. The review revealed two types of indices used for defining and  
58 quantifying tsunami:

- 59 • A magnitude scale which relates to the physical quantities and parameters of the hazard including the source of the  
60 event and/or the wave height (Imamura-Iida scale, 1967). These scales tend to be logarithmic, and this allows for  
61 the compression of a wide range of values into a smaller range. This makes it easier to compare and visualise data  
62 that spans several orders of magnitude. However, it can make it difficult to translate the results to a non-academic  
63 community. Magnitude scales tend to compare only the wave size and not it's strength.
- 64 • An intensity scale that assesses the impacts of an event, including expected damage, based on observations  
65 (Papadopoulos and Imamura scale, 2001). It is easier to interpret and compare than other scales and can incorporate  
66 the human element without instrumentation. However, its reliance on descriptive evidence can lead to subjective  
67 results.

68 In this paper, we present a novel approach to assessing meteotsunami intensity by introducing a new 5 level meteotsunami  
69 intensity index named the Lewis Meteotsunami Intensity Index (LMTI). We provide an overview of the development process  
70 and implementation of this index, focussing on its application in the UK as a case study with a view to further global  
71 applicability.

72

## 73 **2 Index development**

74 Creating the LMTI involved four stages, (Figure 1).

75

### 76 **2.1 Stage 1: Catalogue of events**

77 Trials for the LMTI were conducted in the UK, where there is a long history of events dating back to at least 1750 AD (Haslett  
78 and Bryant 2009). Six main sources of UK meteotsunami events were utilised: Lewis et al. (2023), Williams et al. (2021),  
79 Thompson et al. (2020), Long (2015), Haslett and Bryant (2009) and Dawson et al (2000) all providing a comprehensive and  
80 coherent historical record. The collected data were analysed, with the meteotsunami identified and categorised according to a  
81 reliability and verification system adopted from Gusiakov (2021). Identified events were allocated a reliability score from 1 to  
82 4 depending on the amount of evidence and data available across the sources (i.e., the number of components completed in the  
83 index), where 1= doubtful (1 to 3 components), 2= questionable (eyewitness report, 3 to 6 components), 3= probable  
84 (newspaper report, 6 to 9 components) and 4= definite (technical report, 9 to 12 components). Older events which are usually  
85 fragmented make it difficult to establish an informed judgement, so these were subsequently allocated a reliability score of 1;  
86 events with insufficient information remained unclassified and were considered highly uncertain.

87

### 88 **2.2 Stage 2: Meteotsunami components and values**

89 The proposed LMTI considers 12 various components of meteotsunami and receptor site characteristics, based upon  
90 descriptions of previous global events, current thresholds used by researchers and the characteristics of other related hazard  
91 indices (Table 1). This multifaceted approach allows for the LMTI to capture the complex dynamics of meteotsunami events  
92 and facilitate a single score which can be matched with a description on the LMTI index table (Table 1). The LMTI adopts  
93 this layout to allow for intensity evaluation based upon hazard only or receptor site only. By incorporating both parts this  
94 allows for analysis of a low height wave impacting a highly vulnerable coastline. Each component has a different threshold  
95 weighting leading to the allocation of a score from 1 to 5. These threshold weightings are calculated based on event data and  
96 other related hazard indices.

97

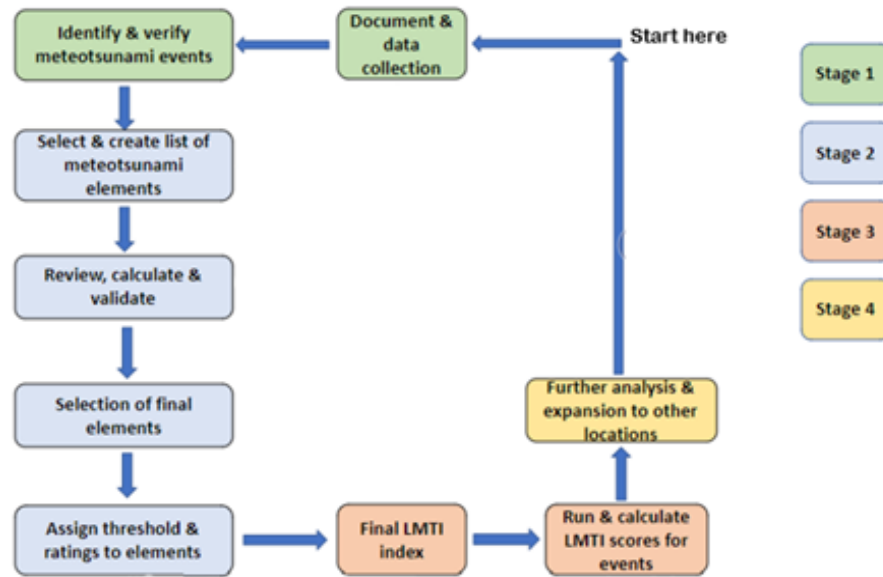


Figure 1: The adopted methodology for the development of the LMTI.

98

99

100

### 101 2.2.1 Physical hazard characteristics

102

103 **Maximum wave height (Mw):** the vertical distance between wave trough and crest (m) at the shoreline. This is the most  
 104 frequently used element when discussing tsunami and meteotsunami (Williams et al. 2021, Gusiakov 2021) as wave height is  
 105 the easiest form of data to observe. The greater the wave height, the greater the volume of water impacting people and structures  
 106 along the shoreline. A wave height threshold of 0.30 m or less was selected as the baseline for Level 1 (minimal intensity),  
 107 which was decided by analysing average wave heights of global and UK events, where 0.3 m was found to be the threshold  
 108 for potential damage (Lynett et al. 2014).

109 **Currents (Cr):** the velocity (m/s) of the water's movement produced by the meteotsunami wave as it inundates the shoreline.  
 110 The faster the current the more the displacement of people, animals, and debris. The values for LMTI are based upon those  
 111 laid out in Lynett et al. (2014) for tsunami waves which is calculated upon not only past event data from buoys and boats but  
 112 also from experienced eyewitness accounts and videos.

113 **Maximum inland intrusion of seawater (Fd):** the inland extent (m) of seawater flow past the high tide mark. The further  
 114 inland the water reaches, the higher the risk to assets. However, this can be restricted by local topography which is addressed  
 115 in subsection 2. This component can contribute to the impact of an event through flooding and as such is frequently used in  
 116 coastal flooding indices (Rocha, Antunes and Catita, 2020). Including this component in the index allows for comparisons of  
 117 events and provides a comprehensive and quantifiable measure of the potential damage and impact. This provides information  
 118 for decision makers to assess the role of local topography in the extent of flooding impact.

119 **Additional or compound hazards (Ch):** considerations of other hazards linked to the source system and their potential to  
120 elevate the overall level of risk are considered in this component, one point is accumulated for each additional hazard that  
121 occurs parallel to the meteotsunami event. Existing tsunami indices do not include this component as it is deemed an external  
122 factor. However, we feel that due to the interactive nature of meteotsunami with other hazards, it is imperative that it be  
123 considered. The risk from meteotsunami is not just restricted to elevated water level and velocity, if coupled with hazards such  
124 storm surge, seiching, precipitation water levels may become elevated. High winds, mudflows, and lightning can produce  
125 compound issues. This element also covers wind dynamics such as intense gusts, windstorms and abrupt changes in direction  
126 which can also generate significant wave energy.

127 **Air pressure change (Ap):** the rate of change in the localised air pressure (mb) within a 3-minute period. This is included as  
128 a key component in the initiation of a meteotsunami via the inverse barometer effect and has been found to be present in many  
129 of the world's strongest meteotsunami. The sharper the air pressure changes the greater the potential for water displacement, 1  
130 mb change equals 1cm change in static water level. The thresholds for this component have been derived from the data recorded  
131 from global events which range from 0.5 to 1.5 mb in approx. 3 minutes. This air pressure change creates a connection with  
132 the mechanisms in the open sea, which can significantly affect the amplification or attenuation of meteotsunami waves. By  
133 using air pressure as a component researchers can identify commonalities and differences between regions in relation to one  
134 of the principle forcing mechanisms.

135 **Tidal regime (Ti):** the tidal stage at the time and location of maximum wave impact at the shoreline. This can be either neap,  
136 spring, low, mid or high. Coastal areas experiencing a spring or high tide are characterised as being highly vulnerable with the  
137 impacts being exacerbated by an already elevated water level. Whilst the authors acknowledge the importance of tidal range  
138 in coastal dynamics within this category, after a provisional analysis of tidal ranges in locations prone to different intensity  
139 meteotsunami, we could not find a direct correlation. However, it was found that coastal infrastructure in certain regions such  
140 as the Mediterranean, is adapted to the local tidal range and as such the effects of meteotsunami are modulated by this. In  
141 micro tidal areas whilst the wave energy is lower it tends to be more concentrated and in macro tidal areas where the wave  
142 energy is a lot stronger the impact tends to be dissipated over a larger area.

143

#### 144 **2.2.2 Receptor site characteristics**

145

146 **Time of arrival of maximum wave at the shoreline (Pw):** the time of day at the location of maximum wave activity and is  
147 sub divided into approximately 3-hour slots. This element is imperative to assessing the risk to human life. The highest scoring  
148 category (5 = extreme) equates to the most likely time of day where people, assets and commercial activity will be present  
149 along the shoreline.

150 **Shoreline geomorphology (Sm):** the composition of the dominant shoreline material type. The five classes are scored  
151 accordingly based on the erosion capability of water, relative resistance, and the ability of the material to diffuse wave power  
152 and alter the flow characteristics. The five classes of shoreline material range from the fastest and least resistant material of a

153 sandy beach (5 points); bedrock and gravel shores (4 points); estuarine and vegetated zones (3 points); artificial frontage such  
154 as concrete seawalls (2 points) and finally to hard igneous rocks (1 point), scoring for this component is adapted from Masselink  
155 et al. 2020 and Gornitz, 1991. For this component, geomorphic classes were defined based on a visual interpretation of the  
156 shoreline material in the immediate area of inundation using high resolution satellite imagery (Google Earth).

157 **Shoreline gradient (Sg):** the steepness of the coastal zone ( $^{\circ}$ ) and is linked to the susceptibility of the area to inundation and  
158 flooding by meteotsunami waves. This component can inform decision makers on mitigation factors that may need to be  
159 implemented. The thresholds created for this index are adopted from the vulnerability index of Gornitz (1991) which is an  
160 already accepted and implemented methodology for assessing coastal hazards and risk. The gentler the slope the greater the  
161 loss of land to seawater and the higher the vulnerability. This is defined as the ratio of altitude change to the horizontal distance  
162 between any two points in the coastal hinterland behind the initial elevation and is calculated using Google Earth as a distance  
163 finder and then by applying the following calculation Eq. (1):

164

$$165 \quad Sg = \frac{Hsl}{Pd} 100 \quad (1)$$

166

167 Where Hsl represents height above sea level in (m) of the selected feature point. Pd is the straight point distance from 0 m  
168 above sea level to a point of interest such as a hospital, school, or park.

169 **Shoreline elevation (Se):** average height (m) above sea level of the area in the immediate vicinity of the shoreline. The  
170 thresholds are again based on the vulnerability index of Gornitz (1991) where the elevation zone within 5 m of the shoreline  
171 faces the highest probability of inundation. The higher the elevation values the less vulnerable the area to inundation, as  
172 elevation provides more resistance to water flow. This can be calculated by using an online elevation finder (freemaptools.com)  
173 and is the average of six random elevation points within a 1000 m zone of the mean high-water spring (MHS) level enabling  
174 measurement during all tidal stages. In considering the possibility of redundancy amongst ‘Sg’ and ‘Se’ components, a cursory  
175 assessment was carried out using the well-established variance inflation factor or VIF. A VIF value of 1.162 was yielded, this  
176 indicates that the two components are not correlated. If the VIF value was higher and nearer to ‘5’ this would suggest that the  
177 index may have redundant components or overlapping information.

178 **Asset impact (Ai):** This is one of two qualitative components present in the index, and it represents the level of flooding and  
179 disruption experienced on infrastructure, historical, ecological, agricultural, livestock and property at the location. With scoring  
180 ranging from no impacts to minor (short term inconvenience and disruption), moderate (repairable), to severe (structural  
181 damage with interruption of critical infrastructure) to extreme (long term damage where assets are lost and written off).

182 **Fatality and/or injury (Fi):** This is the second qualitative component and accounts for the number of individual fatalities and  
183 general injury to persons in the affected area as a direct result of the event. If we measured meteotsunami intensity solely in  
184 terms of loss of life this would be an inaccurate approach as it does not consider the hazard but rather just one aspect of its  
185 impact. This component and the one preceding it were included to assess the level of asset damage and to allow for long term

186 trend analysis. If fatality levels at a certain location start to drop after the implementation of a warning system, this will indicate  
187 that the system has been effective. With this component ‘minor’ relates to only cuts and bruises experienced, ‘moderate’ relates  
188 to broken bones and non-permanent trauma, ‘severe’ is permanent damage to a limb or organ and ‘extreme’ is fatality.  
189

### 190 **2.2.3 LMTI intensity levels**

191 Once the thresholds were determined it was possible to then propose a five-stage index. This system incorporates a scoring  
192 regime to represent the level of contribution or weighting from each component towards the overall hazard. For this reason,  
193 each component is scored separately on a level of 1 to 5, with 1 contributing least and 5 contributing most strongly. This  
194 method allows for standardisation of the index and for each component that is measured in different units to be combined.  
195 Papadopoulos and Imamura (2001) proposed a 12-level scale to measure tsunamis, however, we have reduced and simplified  
196 the LMTI scale to 5 levels, as meteotsunamis, being smaller in scale and more localised in impact than tsunamis, do not need  
197 such a detailed breakdown.

198 The final meteotsunami intensity values exhibited in Table 2 contain brief descriptions highlighting the characteristics of each  
199 intensity level which have been devised from the characteristics of historical global meteotsunami events and are based around  
200 the events ability to be measured, its impacts and post event actions. The five levels are portrayed in a colour coded format as  
201 this is an effective way of communication as people tend to perceive risk better through colours, graphics, and visuals (Engeset  
202 et al. 2022).

203

### 204 **2.3 Stage 3: Categorising events based on intensity: How to calculate LMTI**

- 205 1. An event must be identified and verified as a meteotsunami (see Lewis et al. 2023).
- 206 2. The 12 components are systematically allocated a score of 1 to 5 dependant on the distinct weightings of the  
207 threshold values as displayed in Table 1.

208 The component scores from each of the two subsections are added together and divided by the number of  
209 component cells containing data. If a component is not present at certain locations, then the numerical score of  
210 ‘zero’ is placed in the calculation and this does not affect the overall intensity score.

- 211 3. Scores for the two subsections are then combined to give a single score by using the following conceptual  
212 calculation Eq. (2):

$$213 \quad MTI = \frac{\sum z}{Nz} \quad (2)$$

214

215 Where LMTI (meteotsunami intensity) is a function of 12 potential components, where Z is component and N  
216 is the number of components.

- 217 4. The final LMTI score will be a number between 1 and 5 as shown in Table 2 and will give a standardised

218 description of the level of intensity for that event. The higher the intensity score the higher the level of risk.

219

220 In the calculation of the index the scores are expressed with decimal places as shown in supplementary 1 for example, LMTI  
 221 1.3 or LMTI 3.4, this enables a fine resolution for quantifying and comparing intensity and impact for research purposes. The  
 222 presentation of the final intensity score is represented as a whole number, where the index is typically rounded to the nearest  
 223 integer for example, LMTI 1 or LMTI 3. This simplified representation provides a clear categorisation to present to the public,  
 224 stakeholders and decision makers.

225

226

Table 1: Hazard and receptor components with associated thresholds as used in the LMTI.

Score		1 (minimal)	2 (moderate)	3 (high)	4 (severe)	5 (extreme)
Hazard	Wm: Max wave height (m)	<0.3	0.3 to 0.7	0.8 to 2	2.1 to 3.9	4+
	Cr: Currents created (m/s)	<0.75	0.75 to 1.5	1.6 to 2	2.1 to 4	4+
	Fd: Max inland flooding (m)	<2	2 to 10	11 to 50	51 to 100	100+
	Ch: Number of cumulative hazards	none	one	two	three	four +
	Ap: Air pressure change (mb/3 mins)	<0.5	0.5 to 0.7	0.8 to 1	1.1 to 1.9	2+
	Ti: Tidal stage at peak wave	Neap	Low	Mid	High	Spring
Receptor	Pw: Time of peak wave arrival (24 hr)	0.00 to 05.00	21.00 to 00.00	05.00 to 10.00	15.00 to 21.00	10.00 to 15.00
	Sm: Shoreline geomorphology	Rocky (Igneous)	Artificial Frontage	Estuarine (saltmarsh)	Rocky (sedimentary or metamorphic)	Sandy (beach, dunes)
	Sg: Shoreline gradient (%)	>20	20 to 10	9 to 5	4 to 1	<1
	Se: Shoreline elevation ASL (m)	>30	30 to 10	9 to 5	4 to 2	<2
	Ai: Asset impact (Human & Eco)	none	Flooding, minor disruption	Moderate damage	Severe damage	Large scale, Long term
	Fi: Fatality/Injury	none	minor injury	Moderate injury	Severe injury	Fatality

227

228

229

230

Table 2: LMTI intensity level descriptions.

MTI	Description
<b>L1</b> (green)	<b>Minimal.</b> Only detectable on instruments, weak with no direct threat to life & assets, no action required.
<b>L2</b> (yellow)	<b>Moderate.</b> Visible in instruments & observations, slight disruption, accompanied by other hazards, small debris & shallow flow, rarely a threat to life & assets.
<b>L3</b> (orange)	<b>High.</b> Large debris, violent movement of vessels & cars parked in flood zones, multi hazard situation with frequent threat to life & assets, fast water velocity with deep water extending past flood risk defences. Future coastal plan required.
<b>L4</b> (red)	<b>Severe.</b> Violent movement & damage to infrastructure and assets. Pollution by contaminants. Significant threat to life & assets, coastline retreat & erosion with a multi-hazard situation. Large debris in fast flowing, deep water. Significant & active adaption methods required for the future.
<b>L5</b> (purple)	<b>Extreme.</b> Widespread & extensive threat to life & assets. Heavily damaging with long term changes to the coastal profile and ecological assets. Heavy objects washed away or moved to a higher elevation with fast and deep water. Multi hazard situation requiring extensive pre-event preparedness measures.

231

232

### 233 3 Stage 4: Application of the Index

234 We demonstrate the practical application of the LMTI in this paper by applying the index to the combined lists of UK

235 meteotsunami events (Lewis et al. (2023), Williams et al. (2021), Thompson et al. (2020), Long (2015), Haslett and Bryant



236 (2009) and Dawson et al (2000)). The full dataset of UK results can be found in S1: supplementary information and on an  
237 interactive map available at [https://www.google.com/maps/d/edit?mid=1RiSeW-DIPSYllVOLv\\_8-  
238 T8Gy\\_e0To08&usp=sharing](https://www.google.com/maps/d/edit?mid=1RiSeW-DIPSYllVOLv_8-T8Gy_e0To08&usp=sharing).

239 To further demonstrate the LMTI's practicality and to lay the groundwork for its global application, a selection of 30  
240 worldwide events as sourced from Vilibic' et al. (2021) and Pattiaratchi and Wijeratne (2015) had the index applied to them to  
241 extrapolate intensity scores (S2: supplementary information). The LMTI in this format offers a valuable tool for researchers,  
242 enabling comparative analyses between different regions and to facilitate a better understanding of meteotsunami dynamics  
243 in a global capacity.

244

### 245 **3.1 UK meteotsunami intensity**

246 The trial run of the LMTI provided valuable insights into UK meteotsunami events. A total of 100 events were analysed,  
247 amongst these events, Level 2 meteotsunamis accounted for 69 % of the occurrences (Figure 2). This finding suggests that the  
248 UK is prone to moderate intensity meteotsunami. Level 1 (minimal) meteotsunamis represented 12 % of events, in particular  
249 between 2009 and 2015. Level 3 (high) meteotsunamis accounted for 16 % of the events especially between 1883 and 1932.  
250 Finally, the results revealed a small number of severe intensity events (Level 4) which appeared in the hazard subsection, with  
251 all three events occurring in the winter months and along the Bristol Channel.

252 The results highlighted in Supplementary 1 show that the number of unreliable meteotsunamis (those classified as 1= doubtful  
253 and 2= questionable) decreases over time, with none recorded after 1968. 67 % of the events were classified as definite  
254 meteotsunamis having been attributed a high reliability score of 4. This enhanced reliability is apparent in the record since  
255 2008, which is an indication of the abundance of data with increasing instrumentation.

256 The distribution of meteotsunami hotspots was also identified through the application. The southwest region of England  
257 exhibited a concentration of all levels of intensity type events, with the Bristol Channel exhibiting the only Level 4 type events.  
258 The south of England and north of Scotland also demonstrated notable meteotsunami activity in particular Level 2 (moderate)  
259 intensity events (Figure 3). These hotspots highlight the region's most at risk from meteotsunami occurrence and provide a  
260 valuable insight for future coastal management.

261

### 262 **3.2 Global expansion of the Index**

263 The findings from the trial implementation of the LMTI in a global context demonstrated that the index has the potential for  
264 adoption into other coastal regions prone to meteotsunami. Results for events such as Vela Luka (Croatia) in 1978, Nagasaki  
265 (Japan) in 1979, Ciutadella (Menorca) in 2006 all scored an expected with a Level 3 on the scale in line with the observed  
266 data. The event in 2017 in Dayyer (Persian Gulf) scored a Level 4, this was particularly deadly as it occurred in an area that  
267 was not accustomed to experiencing extreme wave events and so consequently the infrastructure and population were not  
268 prepared. It occurred at 08.00 local time, a few hours after a thunderstorm and it was calm, so people were starting their day  
269 unaware of any issue. On the LMTI index a Level 3 and 4 equates to high intensity, where large debris is deposited from high

270 velocity water flow and there is a threat to life and assets (Table 2). On the opposite end of the intensity scale at Level 1,  
271 corresponding to minimal intensity events which are only detectable on instruments and with no impact to life or assets, we  
272 find events such as Pellinki (Finland) in 2010. If we compare these results to the intensity scale proposed by Vilibic´ et al  
273 (2021), we find a correlation. According to Vilibic´ et al (2021) Vela Luka, Croatia (1978), Ciutadella, Menorca (2006) and  
274 Pantano do Sul, Brazil (2009) were all allocated an intensity Level 4, LMTI scored these events at a 3.8, 3.6 and 3.5  
275 respectively. Cassino beach (Brazil) in 2014, Zandvoort (Netherlands) in 2017 and Mali Losinj (Croatia) in 2007 were allocated  
276 a Level 3 according to Vilibic´ et al, LMTI scored these events at a 3.2, 3.1 and 3 respectively. Arraial do Cabo (Brazil) in  
277 2002 and Lagos (Portugal) in 2010) were both allocated a 2 by Vilibic´ et al, LMTI scored these events at a 2.2 and a 2  
278 respectively. Finally, the Persian Gulf event of 2017 was allocated a Level 5 and LMTI scored it at a 4.3.

279 Validation was a critical step in assessing the accuracy and applicability of the index. This procedure involved ensuring that  
280 the index accurately reflected the observed and recorded data for the event that it was quantifying. For example, the well  
281 documented and researched event at Vela Luka (Croatia) on the 21 June 1978, where in the early evening the bay experienced  
282 a 6 m water level change with accompanying strong currents which inundated 650 m inland. The impact was large scale  
283 damage and loss of assets, and contamination of the bay with belongings and chemicals washed out by the retreat of the water.  
284 Fortunately, due to the quick thinking of residents there were no fatalities and minimal injuries. (Vučetić et al, 2009). The  
285 LMTI allocated a Level 3.8 to this event (Level 3 bordering on Level 4) which is described in Table 2 as ‘violent movement  
286 and damage to infrastructure and assets. Pollution by contaminants. Fast flowing velocity with deep water exceeding past flood  
287 risk defences’. The LMTI result and description accurately reflects the data for this event.

288 To demonstrate validation at the lower end of the index and a different geographical location the event at Arraial do Cabo  
289 (Brazil) on 7 September 2002 is given as an example. At 12:00 (UTC) and low tide, a series of unusual sea level oscillations  
290 at the maximum height of 0.7m occurred in the harbour. They were initiated by a sharp air pressure change (5 mb/hr) associated  
291 with an offshore weather system. Even though water velocity was strong, no damage to assets or injury/loss of life was reported  
292 (Candella and Araujo, 2021). The LMTI allocated this event a Level 2.2 which as described in Table 2 is an event that is  
293 ‘visible in instruments and observations, causing slight disruption, with small debris and rarely a threat to life and assets.’ The  
294 intensity level and description reflect the observed data for this event. However, even though the LMTI’s ability to assess  
295 meteotsunami intensity was validated and demonstrated through this trial run, as the sample size is so small this will require  
296 further testing to ensure complete confidence.

297 Level 5 events are expected to be of a rare occurrence in the current climate. If one were to occur it would be distinguishable  
298 from the other levels by the extensive and long-term destruction of assets and loss of life that it would enforce on the shoreline.  
299

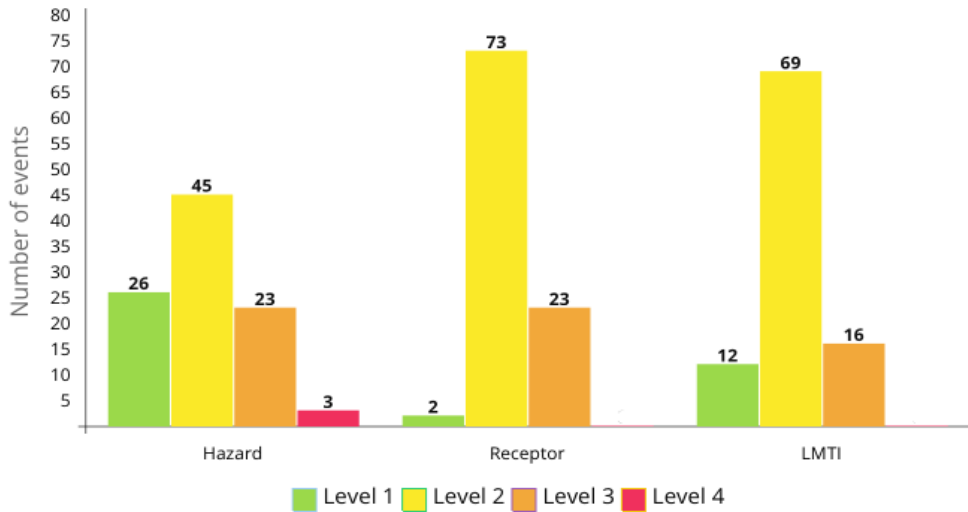


Figure 2: Hazard, receptor and LMTI index scores for UK meteotsunami (1750 to 2022).

300

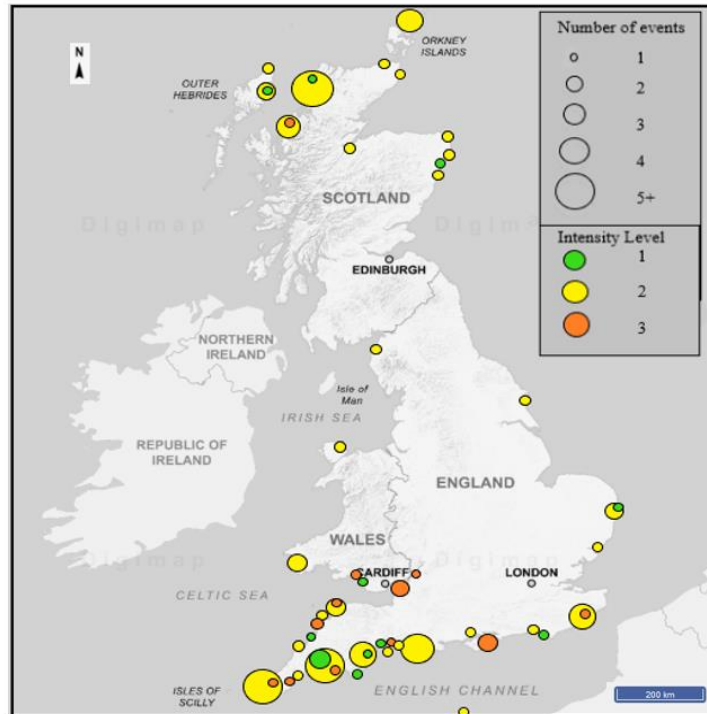


Figure 3: Geographical distribution of UK meteotsunami, with the number of events and the final LMTI intensity level shown at each location. Full results are in supplementary S1. Base map © Crown copyright and database rights 2022 Ordnance Survey (100025252).

301

302

303

## 304 **4 Discussion**

305

### 306 **4.1 The LMTI and UK meteotsunami**

307 Upon successful implementation of the LMTI in the UK, results have shown that meteotsunami have tended to be of moderate  
308 intensity with an overall Level 2. Table 2 describes a Level 2 type event as representing visibly on instruments but rarely a  
309 threat to life. Coastal communities will experience a slight disruption including flooding, the movement of small sized debris  
310 and shallow water flow which will usually be accompanied by other hazards such as precipitation and lightning. The  
311 identification of southwest England and Scotland as hotspots underscores the importance of the ability to run comparisons  
312 between regions and events, allowing researchers to track changes in meteotsunami frequency, intensity and spatial distribution  
313 over time. This hotspot tendency is most likely due to the dominant weather direction coming in from the west, off the Atlantic  
314 Ocean and from strong convective storms building over Spain and France during the summertime.

315 The rareness of the combination of atmospheric, marine and topographical factors required for meteotsunami propagation is  
316 why Level 4 (severe) events are small in quantity and observed at a limited number of locations. The strongest intensity  
317 meteotsunami tend to appear in funnel shaped bays and harbours with a wide shelf which is necessary for Proudman resonance  
318 to occur and the transfer energy from the atmosphere to the water. The western English Channel is sufficiently wide and deep,  
319 with a shoaling coastline for meteotsunami to become well developed. The noticeable run of Level 3 and Level 4 hazard events  
320 that occurred between 1883 and 1932 also coincided with a series of severe storms. The run of Level 1 hazard events between  
321 2009 and 2015 are again due to a series of severe storms but in this instance, we can extrapolate a more accurate picture due  
322 to the emergence of more refined quantitative data.

323 It is likely that the data for higher intensity meteotsunami events such as a Level 3 would have a more extensive historical  
324 record compared to lower-level events such as a Level 1. This pattern can be attributed to the fact that major events tend to  
325 have a more significant impact and are therefore more likely to be documented. The index has become more ‘complete’ over  
326 recent years due to advancements in measurement and monitoring and an increase in the level of scientific interest and  
327 awareness.

328

### 329 **4.2 Application of the LMTI index**

330 Motivated by the absence of a formalised way of quantifying meteotsunami intensity, in this paper we have presented the new  
331 LMTI index which will allow for comparative analysis between regions prone to meteotsunami and it is offering a standardised  
332 communication media to eliminate any confusion and inconsistency. Having started from a zero position the authors have  
333 based the LMTI on the already widely accepted and used Papadopoulos and Imamura tsunami index (2001) and the ITIS-2012  
334 tsunami index (Lekkas et al, 2013). Both indices are heavily reliant on qualitative perceptions based around the impact on  
335 people and places. The latter, however, does incorporate quantitative data on the physical characteristics in the form of wave  
336 height, run up and the number of fatalities, neither index accounts for variables such as resonance nor local geomorphology.

337 The traditional concept of an intensity scale measures the effects of hazards but not its strength (Gusiakov, 2009). The LMTI  
338 has evolved this concept to incorporate the physical components of the hazard, this allows for further investigation into not  
339 just why certain areas are more prone but also into the dynamics of the meteotsunami at the shoreline. The index is different  
340 from other hazard indices as it does not require sophisticated technology and it allows for the analysis of both the hazard and  
341 the receptor site to provide a more holistic view of meteotsunami risk. Understanding how these events have behaved and  
342 evolved historically can be a precursor to establishing future trends and highlight issues to promote forward thinking in terms  
343 of coastal planning. One of the primary strengths of the LMTI lies in its adaptability and potential for global application. As  
344 the field of meteotsunami forecasting and warning progresses, the LMTI will no doubt play an important role in assisting in  
345 this process. While the index was developed and trialled in the UK due to its long history of events, records and data  
346 availability, it's underlying principles and methodology can be applied to other meteotsunami prone regions worldwide.

347

#### 348 **4.3 Constraints and limitations**

349 While the expected results from the LMTI implementation are encouraging, there are certain limitations that should be  
350 considered. The availability and quality of historical data may vary across regions, with events missing and the severity of  
351 other events being underrepresented due to incomplete datasets, this may potentially affect the applicability in certain areas.  
352 Addressing this limitation requires efforts to enhance data collection and establish robust monitoring networks.

353 The index contains two thresholds that rely on qualitative descriptors and many of the historical accounts used may have been  
354 subjective in nature, especially with documents such as pamphlets and newspapers tending to misreport, exaggerate or invent  
355 characteristics to boost sales. Results have revealed that the further back in time you go the less available and reliable the  
356 accounts become. However, as time progresses this will be remedied with improved quantitative data collection methods.

357 Finally, sea level, shoreline slope and elevation in historical times would have been different from present day and the  
358 geometric and topographic nuances of an area can have effects on the propagation of waves. As adjustment of this is beyond  
359 the scope of this study; we must assume a static shoreline position based up on current data. Despite the limitations, the index  
360 proves to be a useful indication of meteotsunami intensity, and these limitations should not be an issue in moving forward as  
361 data becomes more available and at a higher frequency.

362

#### 363 **4.4 Further work**

364 Successful implementation of the LMTI in the UK has yielded results that can be used to champion the need for higher  
365 frequency data sampling on tide gauges and for the consideration of the inclusion of meteotsunami into coastal management  
366 regimes. As this paper introduces the first evolution of the LMTI, we can offer potential strategies for calibrating and improving  
367 the index, in particular for use in a more global context. Primarily, the incorporation of more data from recent observed events  
368 and more global events will improve the calibration and reliability. The present evolution of the LMTI requires instantaneous  
369 air pressure readings to indicate sudden changes. However, as wave height is proportional to integrated air pressure over time  
370 it may be more appropriate to alter this component to incorporate air pressure over time.

371 Expanding the index to include resonances such as Proudman, Greenspan and harbour Q factor may provide valuable  
372 information about the potential amplification or dampening effects within a particular location. However, whilst this offers a  
373 valuable insight, it's practical implementation would require advanced numerical modelling techniques with reliable and  
374 detailed data on bathymetry, morphology and atmospheric conditions. This data may not be available for all affected locations  
375 and by adding complex resonances this could potentially hinder the practicality and usability of the index, making it harder to  
376 interpret and less accessible to decision makers.

377

## 378 **5 Conclusions**

379 After a review of the field of research for meteotsunami it was revealed that there was an absence of a standardised format for  
380 quantifying this phenomenon. In this paper, we have introduced a novel meteotsunami intensity index (LMTI), the first of its  
381 kind that mixes both quantitative data on the hazard with the effects on the shoreline. The successful implementation of the  
382 LMTI in the UK signifies an advance in meteotsunami research with results revealing a 69 % prominence of Level 2 (moderate  
383 intensity with slight disruption and a rare threat to life) type events occurring and the presence of distinct geographical hotspots  
384 in southwest England and Scotland.

385 Additionally, we successfully assessed the applicability and adaptability of the LMTI in a global context. As further trials and  
386 refinements are carried out, the LMTI has the potential to become a widely accepted standard, contributing to coastal planning  
387 and early warning systems worldwide.

388 **Supplement.** The supplementary UK map related to this article is available online at:

389 [https://www.google.com/maps/d/edit?mid=1RiSeW-DIPSYlIVOLv\\_8-T8Gy\\_e0To08&usp=sharing](https://www.google.com/maps/d/edit?mid=1RiSeW-DIPSYlIVOLv_8-T8Gy_e0To08&usp=sharing)

390 **Author contributions.** C. Lewis developed the concept, designed, and executed the study and prepared the original draft. T.  
391 Smyth, J. Neumann, and H. Cloke supervised the project, provided advice, reviewed, and edited the manuscript.

392 **Competing interests.** The authors declare that they have no conflict of interest.

393 **Data availability.** The datasets used in this study were derived from resources available in the public domain.

394

## 395 **References**

396 Candella, R.N., de Araujo, C.E.S. Meteotsunamis in Brazil: an overview of known occurrences from 1977 to 2020. Nat  
397 Hazards 106, 1563–1579. <https://doi.org/10.1007/s11069-020-04331-y>. 2021.

398

399 Dawson, A.G., Musson, R.M.W., Foster, I.D.L., and Brunnsden, D.: Abnormal historic sea-surface fluctuations, SW England  
400 marine Geology. Vol. 170, 59-68. [10.1016/S0025-3227\(00\)00065-7](https://doi.org/10.1016/S0025-3227(00)00065-7). 2000.

401

402 Denamiel C, Belušić D, Zemunik P and Vilibić I Climate projections of meteotsunami hazards. *Front. Mar. Sci.* 10:1167863.  
403 <https://doi.org/10.3389/fmars.2023.1167863>. 2023

404

405 Engeset, R., Pfuhl, G., Orten, C., Hendrikx, J., & Hetland, A.: Colours and maps for communicating natural hazards to users  
406 with and without colour vision deficiency. *International Journal of Disaster Risk Reduction*, Volume 76.  
407 <https://doi.org/10.1016/j.ijdrr.2022.103034> 2022.

408

409 Gornitz, V.: Global coastal hazards from future sea level rise. *Palaeogeography, Palaeoclimatology, Palaeoecology*,  
410 Volume 89, Issue 4, 379-398, [https://doi.org/10.1016/0031-0182\(91\)90173-O](https://doi.org/10.1016/0031-0182(91)90173-O). 1991.

411

412 Gusiakov, V.: Meteotsunamis at global scale: problems of event identification, parameterization, and cataloguing. *Natural*  
413 *Hazards*. 106. 1105–1123, <https://doi.org/10.1007/s11069-020-04230-2> 2021.

414

415 Haslett, S.K. and Bryant, E.A.: Meteorological Tsunamis in Southern Britain: An Historical Review. *Geographical Review*.  
416 99, 146–163. <https://doi.org/10.1111/j.1931-0846.2009.tb00424.x> 2009.

417

418 Lekkas. E, Andreadakis. E, Kostaki. I, Kapourani. E. A Proposal for a New Integrated Tsunami Intensity Scale (ITIS-  
419 2012). *Bulletin of the Seismological Society of America*. 103 (2B): 1493–1502. <https://doi.org/10.1785/0120120099> 2013

420

421 Lewis, C., Smyth, T., Williams, D., Neumann, J., and Cloke, H.: Meteotsunami in the United Kingdom: the hidden hazard,  
422 *Nat. Hazards Earth Syst. Sci.*, 23, <https://doi.org/10.5194/nhess-23-2531-2023> 2023.

423

424 Long, D.: A catalogue of tsunamis reported in the UK. British Geological Association 1R/15/043  
425 [https://nora.nerc.ac.uk/id/eprint/513298/1/IR\\_15\\_043%20%20BGS%20Tsunami%20catalogue%20update.pdf](https://nora.nerc.ac.uk/id/eprint/513298/1/IR_15_043%20%20BGS%20Tsunami%20catalogue%20update.pdf) 2015.

426

427 Lynett, P.J., Borrero, J., Son, S., Wilson, R. and Miller, K.: Assessment of the tsunami induced current hazard. *Geophysical*  
428 *Res Lett* 41 (6): 2048-2055. <https://doi.org/10.1002/2013GL058680> 2014497. 2014.

429

430 Masselink, G. Russell, P. Rennie, A. Brookes, S. and Spencer, T.: Impacts of climate change on coastal geomorphology and  
431 coastal erosion relevant to the coastal and marine environment around the UK. *MCCIP Science Review*. 158 – 189.  
432 <https://doi.org/10.14465/2020.arc08.cgm> 2020.

433

434 Papadopoulos, G. and Imamura, F.: Proposal for a new tsunami intensity scale. ITS proceedings, session 5, number 5-1, 2001.

435

436 Pattiaratchi, C.B. and Wijeratne, E.M.S.: Are meteotsunamis an underrated hazard? Philosophical Transactions of the Royal  
437 Society: Mathematical and Engineering Sciences 373. <https://doi.org/10.1007/s11069-014-1263-8> 2015.

438

439 Pellikka, H, Šepić, J, Lehtonen, I, Vilibić, I, Meteotsunamis in the northern Baltic Sea and their relation to synoptic patterns,  
440 Weather and Climate Extremes, Volume 38, 100527, <https://doi.org/10.1016/j.wace.2022.100527> 2022

441

442 Proudman, F.R.S.: The Effects on the Sea of Changes in Atmospheric Pressure. Geophysical Journal International 2 s4.  
443 <https://doi.org/10.1111/j.1365-246X.1929.tb05408.x> 1929.

444

445 Rabinovich, A.B. Twenty-Seven Years of Progress in the Science of Meteorological Tsunamis Following the 1992 Daytona  
446 Beach Event. Pure Appl. Geophys. 177, 1193–1230. <https://doi.org/10.1007/s00024-019-02349-3> 2020

447

448 Rocha C., Antunes C., Catita C. Coastal Vulnerability Assessment Due to Sea Level Rise: The Case Study of the Atlantic  
449 Coast of Mainland Portugal. Water 12, 360. <https://10.3390/w12020360> 2020.

450

451 Šepić, J., Vilibić, I. and Mahović, N.: Northern Adriatic meteorological tsunamis: observations, link to the atmosphere, and  
452 predictability. Journal of Geophysical Research Oceans. 117(C2). <https://doi.org/10.1029/2011JC007> 2012.

453

454 Sibley, A., Cox, D., Long, D., Tappin, D.R. and Horsburgh, K.J.: Meteorologically generated tsunami like waves in the North  
455 Sea on 1 July 2015 and 28 May 2008. Weather. 71. 68-74. <https://doi.org/10.1002/wea.2696> 2016.

456

457 Thompson, J., Renzi, E., Sibley, A. and Tappin, D.: UK meteotsunamis: a revision and update on events and their frequency.  
458 Weather. 75.9, 281–287. <https://doi.org/10.1002/wea.3741> 2020.

459

460 Vilibić, I. and Šepić, J.: Global mapping of non-seismic sea level oscillations at tsunami timescales. Scientific reports. 7. (1).  
461 <https://doi.org/10.1038/srep40818> 2017.

462

463 Vilibić, I., Rabinovich, A.B. & Anderson, E.J. Special issue on the global perspective on meteotsunami science: editorial. Nat  
464 Hazards 106, 1087–1104. <https://doi.org/10.1007/s11069-021-04679-9> 2021

465

466 Vučetić, A., Vilibić, I., Tinti, S. & Maramai, A. The Great Adriatic flood of 21 June 1978 revisited: An overview of the reports,



467 Physics and Chemistry of the Earth, Parts A/B/C, Volume 34, Issues 17–18, 894-903,  
468 <https://doi.org/10.1016/j.pce.2009.08.005>. 2009.

469

470 Williams, D. A., Schultz, D. M., Horsburgh, K. J., & Hughes, C. W.: An 8-yr meteotsunami climatology  
471 across northwest Europe: 2010–2017. Journal of physical oceanography. 1145-1160. [https://doi.org/10.1175/JPO-D-20-](https://doi.org/10.1175/JPO-D-20-0175.1)  
472 [0175.1](https://doi.org/10.1175/JPO-D-20-0175.1) 2021

473

474 Zemunik P., Denamiel C., Williams J., Vilibić I. High-frequency sea-level analysis: global correlations to synoptic atmospheric  
475 patterns. Weather Clim. Extrem. 38 (7), 100516. <https://doi:10.1016/j.wace.2022.100516> 2022