

# Comparison of the Coastal and Regional Ocean Community Model (CROCO) and NCAR-LES in Non-hydrostatic Simulations

Xiaoyu Fan<sup>a</sup>, Baylor Fox-Kemper<sup>a</sup>, Nobuhiro Suzuki<sup>b</sup>, Qing Li<sup>c</sup>, Patrick Marchesiello<sup>d</sup>, Peter Sullivan<sup>e</sup>, and Paul Hall<sup>a</sup>

<sup>a</sup>Department of Earth, Environmental, and Planetary Sciences, Brown University, Providence, RI 02912, USA

<sup>b</sup>Institute of Coastal Ocean Dynamics, Helmholtz-Zentrum Hereon

<sup>c</sup>Earth, Ocean and Atmospheric Sciences Thrust, The Hong Kong University of Science and Technology (Guangzhou), Guangzhou, 511400, Guangdong, China

<sup>d</sup>Institute of Research for Development, LEGOS

<sup>e</sup>NCAR

**Correspondence:** Xiaoyu Fan (xiaoyu\_fan@alumni.brown.edu)

## Abstract.


Advances in coastal modeling and computation provide the opportunity for examining non-hydrostatic and compressible fluid effects at very small scales, but the cost of these new capabilities and the accuracy of these models versus trusted non-hydrostatic codes has yet to be determined. Here the Coastal and Regional Ocean Community model (CROCO, v1.2) and the NCAR Large-Eddy Simulations (NCAR-LES) models are compared with a focus on their simulation accuracy and computational efficiency. These models differ significantly in numerics and capabilities, so they are run on common classic problems of surface-forced, boundary-layer turbulence. In accuracy, we compare turbulence statistics, including the effect of the explicit sub-grid scale (SGS) parameterization, the effect of the second (dilatational) viscosity and the sensitivity to the speed-of-sound, which is used as part of the CROCO compressible turbulence formulation. To gauge how far CROCO is from the NCAR-LES, we first compare the NCAR-LES with two other non-hydrostatic, Boussinesq approximation LES codes (PALM and Oceananigans), defining the notion and magnitude of accuracy for the LES and CROCO comparison. To judge efficiency of CROCO, strong and weak scaling simulation sets vary different problem sizes and workload per processor, respectively. Additionally, the effects of 2D decomposition of CROCO and NCAR-LES and supercomputer settings are tested. In sum, the accuracy comparison between CROCO and the NCAR-LES is similar to the NCAR-LES versus other LES codes. However, the additional capabilities of CROCO (e.g., nesting, non-uniform grid and realism of ocean configuration in general) and its weakly compressible formulation come with roughly an order of magnitude of additional costs despite efforts to reduce them by adjusting the second viscosity and sound speed as far as accuracy allows. However, a new variant of the non-hydrostatic CROCO formulation is currently undergoing prototype testing and should enable faster simulations by releasing the stability constrain by the free surface. Overall, when the additional features of CROCO are needed (e.g., nesting, complex topography, etc.) additional costs are justified, while in idealized settings (a rectangular domain with periodic boundary conditions) the NCAR-LES is faster in arriving at nearly the same result.

## 1 Introduction

Coastal ocean modeling using limited domain sizes and open boundaries has been a standard practice for decades (Mellor, 1998; Haidvogel et al., 2008). As computing power has increased, the opportunity to simulate conditions that exceed the limits for standard oceanographic model approximations (Fox-Kemper et al., 2019) have arisen in the coastal modeling context (e.g., Boussinesq incompressibility, hydrostasy, the traditional approximation of the Coriolis force). Sharp topographic features, strong internal waves and submesoscales, boundary layer turbulence, sea level rise and ice-ocean phase transitions, and many other phenomena of coastal interest could be more directly simulated with these assumptions relaxed, rather than relying on parameterizations or numerical fixes to approximate the impacts of smaller scales. By contrast, Large Eddy Simulation codes have long been used that do not make the hydrostatic approximation to study three-dimensional turbulence, but these codes often rely on numerical approaches (e.g., Fourier spectral methods) that make them unable to handle realistic topography and other aspects of coastal modeling. This paper is an evaluation of these different types of codes side-by-side on problems where they can be directly compared for accuracy and efficiency.

The Coastal and Regional Ocean Community model (CROCO) is a modelling platform for the regional and coastal ocean primarily supported by French institutes working on environmental sciences and applied mathematics (IRD, INRIA, IFREMER, CNRS and SHOM). Built on a version (ROMS\_AGRIF) of the Regional Ocean Modeling System and the non-hydrostatic kernel of SNH (a pseudo-compressible solver developed in Toulouse), CROCO has the objective to resolve problems of very fine-scale coastal areas through nesting while at the same time operating as a standard coarse resolution coastal modeling system (Debreu et al., 2016). Activating the non-Boussinesq and non-hydrostatic kernel (NBQ) of CROCO is the precondition to solve the pseudo-compressible Navier-Stokes equations, allowing direct simulation of complex non-hydrostatic physical problems such as overturning and three-dimensional turbulence. The simulations carried out here were in version 1.0 of CROCO, and similar results were obtained with version 1.2. Non-hydrostatic effects become important when the horizontal and vertical scales of motion are similar (Wedi and Smolarkiewicz, 2009; Fox-Kemper et al., 2019), and they are required in the study of small-scale phenomena in the ocean which are not in hydrostatic balance (Marshall et al., 1997). CROCO and ROMS\_AGRIF have long been applied to solve problems at coastal- or meso-scale ocean problems, such as coupled biogeochemical simulations and submesoscale and river plume simulations, where applying a resolution of more than 1 kilometer is standard. In this paper, CROCO NBQ is used at meter-scale resolution within a total domain size and depth of 100m to 300m. In ocean model simulations, the turbulence tends to moderate with increasing depth. Figure 1 shows that the resulting water mean velocity as simulated by CROCO is sheared as depth increases, the degree to which this occurs results from the activity and momentum transported vertically by turbulence.

The addition of a non-hydrostatic solver is a rare feature to incorporate into a coastal model such as CROCO, but some applications on small-scale coastal dynamics will require nonhydrostatic capability. The scalings of the fluid equations for common oceanographic problems (e.g., McWilliams, 1985) indicate that the dimensionless vertical momentum equation has two key parameters determining if hydrostasy will be adequate: the aspect ratio and Froude number (ratio of vertical shear to

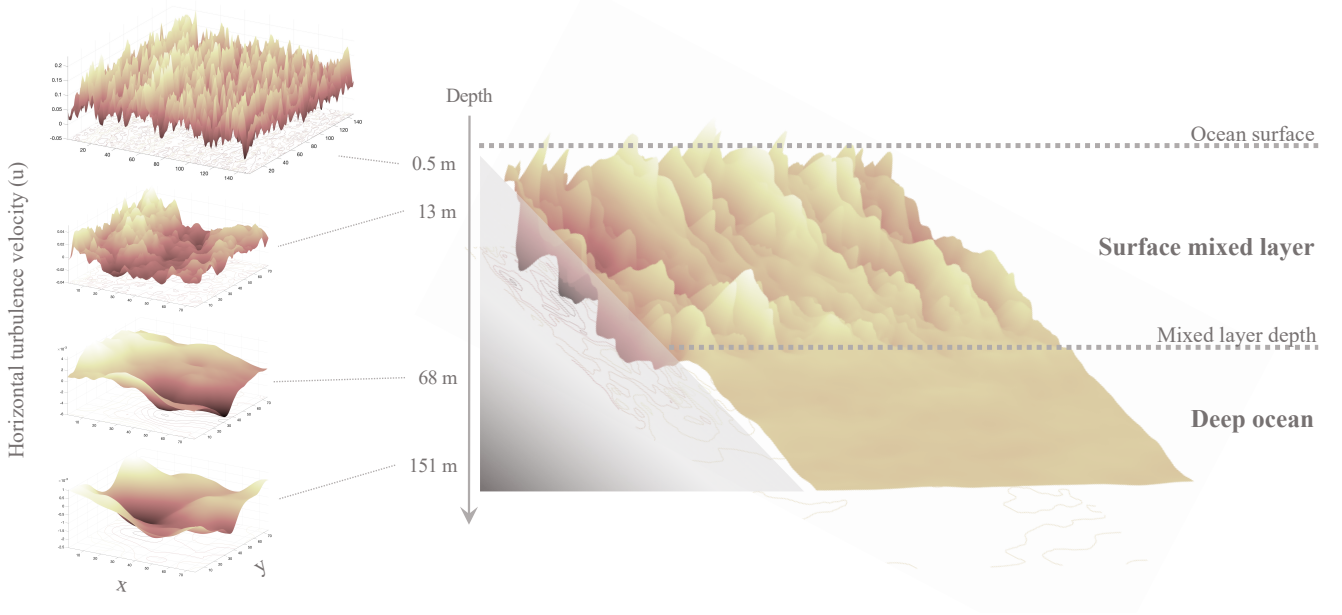

**Figure 1.** A snapshot of a horizontal component of the water velocity simulated by CROCO changes increasing depth, illustrating the turbulent behavior of CROCO model simulation.

55 buoyancy frequency).

$$\underbrace{\frac{H^2}{L^2}}_{\text{aspect}^2} \underbrace{\frac{V^2}{N^2 H^2}}_{\text{Froude}^2} \frac{Dw}{Dt} = -\frac{\partial\phi}{\partial z} + b \quad (1)$$

When non-hydrostatic effects are important, the aspect ratio approaches 1 and the stratification is not stronger than the shear, so the resulting turbulent motions are nearly isotropic.

$$\text{Hydrostatic if: } \frac{H}{L} \ll 1, \quad \text{Non-hydrostatic if: } \frac{H}{L} \sim 1 \text{ and } \frac{V}{NH} \sim 1 \quad (2)$$

60 Ocean LES are usually used in the non-hydrostatic regime, and thus these models solve the non-hydrostatic equations.

Typically, non-hydrostatic ocean models also employ the Boussinesq approximation (Marshall et al., 1997). In CROCO, the implementation of non-hydrostatic physics takes advantage of compressible fluid dynamics to arrive at a simplified numerical implementation. In CROCO, the degree of compressibility can be varied by changing the sound speed in the model, but it cannot be chosen to be infinite (i.e., incompressible). Importantly for this paper, the sound speed does not need to be realistic  
 65 in order to simulate conditions similar to those in non-hydrostatic, Boussinesq approximation LES. The lower the sound speed is, the larger the timesteps can be in CROCO, and thus the more efficient the model becomes. Section 2 explores the sensitivity of CROCO results to changing the sound speed and other parameters that arise only in compressible fluid models.

In order to test the accuracy and computational efficiency of CROCO, an idealized ocean setting is applied as a benchmark, where the proven NCAR Large-Eddy-Simulation (LES) model can be used to evaluate the performance of CROCO. The setting

70 is doubly-periodic, horizontally-homogeneous turbulence forced with winds and/or convective cooling at the surface following the class of simulations developed for study of entrainment (Li and Fox-Kemper, 2017) and anisotropy (Li and Fox-Kemper, 2020) modeling. NCAR-LES (Moeng, 1984; Sullivan et al., 1994), PALM (Raasch and Schröter, 2001) and Oceananigans (Ramadhan et al., 2020) are branches of the LES model family which are also compared in preliminary testing to see how much those models differ. These LES models are more similar to one another than NCAR-LES and CROCO (they are all  
75 Boussinesq, non-hydrostatic models, while CROCO in non-hydrostatic mode solves the compressible fluid equations), but they still differ in capabilities, numerics, code language, and subgrid schemes. The purpose of comparing these three LES models is to demonstrate the level of agreement among “standard” LES models including the NCAR-LES model, which can serve as a guide in the NCAR-LES versus CROCO comparisons. The inter-model spread of the three LES models provides a measure of the level of uncertainty due to SGS parameterizations, numerical schemes, etc., *without the Boussinesq versus compressible*  
80 *fluid aspect of the NCAR-LES versus CROCO comparisons*. In the subsequent analyses with CROCO, the NCAR-LES model is the focus of comparison.

In this paper, the comparisons between CROCO and NCAR-LES are divided into two major aspects: model prediction accuracy (Section 2) and computational efficiency (Section 3). The descriptions of these three LES models are presented in Section 2.5. In the accuracy and LES comparisons, essential turbulence statistics form the basis, and the results include the  
85 effects in CROCO of varying the explicit SGS parameterization, the second viscosity, the speed of sound, and the time step. In the efficiency comparison, the computing time for each time step is recorded to measure the model efficiency, and the factors which limit the time step in each model are discussed. Strong and weak scaling are examined in simulations set for different problem sizes and workload per processor, respectively. The impacts of varying the MPI parallelization of CROCO and 2D decomposition of NCAR-LES as well as the settings of the Cheyenne supercomputer are discussed.

## 90 2 Turbulence statistics accuracy comparison

In this section, we compare the turbulence statistics simulated by the NCAR boundary-layer LES model (Moeng, 1984; Sullivan et al., 1994; Sullivan and Patton, 2011) and the Coastal and Regional Ocean Community (CROCO) non-Boussinesq (NBQ) model (Auclair et al., 2018; Marchesiello et al., 2021). In addition, we test the sensitivity of the turbulence statistics to certain constants specific to the CROCO NBQ model.

95 All simulations in this section use the following configuration. The grid has 256 uniformly-spaced points in each direction (including the NCAR-LES pseudospectral collocation grid). The domain size is 320 m  $\times$  320 m horizontally and 163.84 m vertically. The horizontal resolution  $\Delta x = \Delta y$  is 1.25 m, and the vertical resolution  $\Delta z$  is 0.64 m. The vertical Coriolis parameter  $f$  is  $1.028 \times 10^{-4} \text{ s}^{-1}$ , and the horizontal Coriolis parameter is set to zero. The density  $\rho$  is given by a linear equation of state without salinity: namely,  $\rho = \rho_0 + \rho_0 \beta_T (\theta_0 - \theta)$  with the reference density  $\rho_0 = 1000 \text{ kg m}^{-3}$ , reference temperature  $\theta_0 = 13.554^\circ\text{C}$ , the thermal expansion coefficient  $\beta_T = 2 \times 10^{-4} \text{ }^\circ\text{C}^{-1}$ , and potential temperature  $\theta$ . Initially, there is a  
100 mixed layer having  $\theta = 14^\circ\text{C}^{-1}$  above  $z \geq -42 \text{ m}$ , and below that depth the temperature linearly decreases to  $12.8^\circ\text{C}^{-1}$  at  $z = 163.84 \text{ m}$ , providing a nearly uniform buoyancy frequency of  $N = 0.0044 \text{ s}^{-1} \approx 43f$  below the mixed layer. The bottom

boundary uses a rigid free-slip surface and no-flux conditions. In the fields of atmospheric dynamics and oceanography, the Brunt–Väisälä frequency, also known as the buoyancy frequency, quantifies the stability of a fluid in response to vertical displacements, such as those induced by convection. At the upper-boundary, uniform wind stress in the  $x$ -direction and uniform surface heat flux  $Q_*$  are applied where the upper-boundary temperature flux is given by  $Q_*/(\rho_0 c_p)$  with specific heat capacity  $c_p = 3985 \text{ J kg}^{-1} \text{ }^\circ\text{C}^{-1}$ . The gravitational acceleration  $g$  is  $9.81 \text{ m s}^{-2}$ . During the initial spin-up period, the wind stress and the surface heat flux increase to their full values over 51 minutes (5% of the inertial period). After this period, they stay constant. Four combinations of the water-side friction velocity  $U_*$  and the surface heat flux  $Q_*$  are considered: namely,  $(U_*, Q_*) = (0.006 \text{ m s}^{-1}, 5 \text{ W m}^{-2}), (0.006 \text{ m s}^{-1}, 50 \text{ W m}^{-2}), (0.012 \text{ m s}^{-1}, 5 \text{ W m}^{-2}),$  and  $(0.012 \text{ m s}^{-1}, 50 \text{ W m}^{-2})$ .

The NCAR-LES model uses a two-part SGS eddy-viscosity model of Sullivan et al. (1994) designed to improve the LES accuracy in comparison to similarity theory (Monin and Obukhov, 1954) near the surface at  $z = 0 \text{ m}$ . Their SGS model constants  $C_k$  and  $C_\epsilon$  in their equations 4 and 11 are 0.1 and 0.93, respectively. We configure their SGS model such that it reduces to a simpler form (their equation 1) below  $z = -21 \text{ m}$ . With rough approximations, this simpler model can be related to the Smagorinsky (1963) model with a relatively large value of the corresponding Smagorinsky constant  $C_s = 0.18$  (their equation 14). The NCAR-LES uses the pseudo-spectral method (Fox and Orszag, 1973) for the horizontal derivatives and second-order centered finite-differences for the vertical derivatives (Moeng, 1984). The resolved vertical temperature flux is determined using a second-order near monotonic scheme (Beets and Koren, 1996). The higher third of wavenumbers are zeroed out to remove aliasing of unresolved scales (Orszag, 1971). The time stepping utilizes a third-order Runge-Kutta scheme (Sullivan et al., 1996). More information is given in the model description papers (Moeng, 1984; Sullivan et al., 1994; Sullivan and Patton, 2011).

The CROCO NBQ model offers several options for the SGS parameterizations. In this paper, we consider two options: namely, the use of only numerical diffusion and the SGS model of Lilly (1962). The former avoids adding any explicit SGS terms and implicitly relies only on numerical diffusion. Here, the WENO5-Z improved version of the 5th-order weighted essentially nonoscillatory scheme (Borges et al., 2008) is used for all advection terms (see Auclair et al., 2018; Marchesiello et al., 2021, for more information). Unless explicitly mentioned otherwise, the CROCO runs shown here use the numerical-only option for the SGS parametrization because we are interested in understanding the performance of (unavoidable) numerical diffusion before adding explicit SGS terms (and associated parameters) which make the model behavior more complex. We test the explicit SGS effect only briefly in section 2.2.

## 2.1 NCAR-LES model vs CROCO NBQ model

Here, we compare the NCAR-LES model with the CROCO NBQ model. As we will see shortly, the results show that these two models produce very similar boundary-layer flows, with differences comparable to those among the different LES (Section 2.5).

The CROCO model uses a time-splitting method and uses two different time steps for the so-called fast and slow modes. In this subsection, all of the CROCO runs use a slow-mode timestep of  $0.5 \text{ s}$  and a fast-mode timestep of  $0.019 \text{ s}$ . We tested many different time steps, and these values are closest to the largest stable values for the configuration used. To match the slow-mode time step, the NCAR model runs in this section use a timestep of  $0.5 \text{ s}$  as well. However, note that the NCAR model

can be run with a much larger time step and it has the capability of adjusting its timestep based on an embedded Runge-Kutta multiple-order approach; namely, the Courant-Friedrichs-Lewy (CFL) timestep which the NCAR model finds when running with adjustable timestepping is about 7 s for the run with  $U_* = 0.006 \text{ ms}^{-1}$  and about 3 s for the runs with  $U_* = 0.012 \text{ ms}^{-1}$ .  
 140 Thus, when used with this reduced timestep the NCAR model is roughly six to fourteen times slower.

The CROCO NBQ model has two constants related to the fast mode: namely, the speed of sound  $c_s$  and the second viscosity (also called bulk viscosity, volume viscosity, or dilatational viscosity)  $\lambda$ . Because we are not interested in sound waves, we may use an unphysically-small value of  $c_s$  and an unphysically-large value of  $\lambda$  to relax the sound-related CFL constraint by slowing and damping these waves, respectively. In this subsection, we use  $c_s = 3 \text{ ms}^{-1}$  and  $\lambda = 1 \text{ kg s}^{-1} \text{ m}^{-1}$ , which are about  
 145 500 times slower and 400 times more viscous than in seawater. As discussed in sections 2.4 and 2.3, the unphysical values of these constants affect turbulence statistics negligibly.

Figures 2 and 3 show the vertical profiles of various flow properties.<sup>1</sup> Hereafter, we use the following symbols: the horizontal average  $\bar{\phi}$  and the turbulent fluctuation  $\phi' \equiv \phi - \bar{\phi}$  for any quantity  $\phi$ , the buoyancy  $b \equiv -g\rho/\rho_0$ , the buoyancy frequency  $N^2 \equiv \partial\bar{b}/\partial z$ , and the horizontally-averaged depth  $z_p$  of the mixed-layer base defined as the  $z$ -coordinate of the  $N^2$  maximum.

### 150 2.1.1 Scaling of turbulent properties

To understand these figures, let us first explain the nondimensionalization used. Figures 2a, 3a, 3b, 3c, and 3f show quantities related to the turbulent kinetic energy (TKE) and the TKE shear production such as the mean shear and a Reynolds stress component. These quantities are largely governed by the energy input to the water rather than the wind stress or surface heat flux. Therefore, we introduce a characteristic scale  $E_*$  of the surface energy flux:

$$155 \quad E_* \equiv U_*^2 \bar{u}_0 + B_* |z_p| \quad (3)$$

where  $\bar{u}_0(t) \equiv \overline{u(x, y, z = 0, t)}$  is the surface current in the wind-stress direction, and  $B_* \equiv g\beta_T Q_*/(\rho_0 c_p)$  is the surface buoyancy flux. The first term on the r.h.s. is the flux of the work done by the wind stress, and the second term is a rough approximation of the flux of available potential energy.<sup>2</sup> For ease of notation, we use an energy-flux-based velocity scale

$$U_E \equiv E_*^{\frac{1}{3}}. \quad (4)$$

160 While  $\bar{v}$  and  $\overline{u'w'}$  are also related to the TKE shear production, they are largely constrained by other factors. Therefore, we use other scalings to nondimensionalize them. Namely, figure 2b uses the vertically-averaged Ekman transport velocity  $U_*^2/(f|z_p|)$  because  $\bar{v}$  is roughly constrained by the Ekman balance. Figure 3e uses the wind stress  $U_*^2$  because  $\overline{u'w'}$  is constrained by the wind stress.

---

<sup>1</sup>Each profile is an average of 21 samples taken every one-fortieth (about 25 minutes) of the inertial period during  $t = 4.7$  to 13.6 hours. At each given time, the normalized profiles are computed using the characteristic scales at that time. Then, the final profiles are made by averaging these normalized profiles. The time window is kept short, about 9 hours, because the simulated flow is not in a statistically steady state due to mixed-layer deepening and entrainment. In all simulations, the boundary-layer thickness reaches the initial mixed-layer thickness within 4 hours from  $t = 0$  s when the flow has no motion.

<sup>2</sup>Here, for notational simplicity, we use a positive value when energy is coming into the water.

In figure 2d, we use a stratification scale  $\Gamma_N$  pertinent to pycnocline entrainment where

$$165 \quad \Gamma_N \equiv \frac{2E_b^{\frac{2}{3}}}{\Delta_e(z_w - z_p)}, \quad (5)$$

and  $\Delta_e$  is a length scale<sup>3</sup>, and

$$z_w \equiv -\frac{U_E}{4.5f} \quad (6)$$

is a rough depth scale of the wind-driven boundary layer<sup>4</sup>, and

$$E_b \equiv U_*^2 \bar{u}_0 e^{-\frac{z_p}{z_w}} + B_* |z_p| \quad (7)$$

170 is a rough scale of the energy flux at  $z_p$  causing pycnocline entrainment.<sup>5</sup> Unlike the available potential energy input, the wind energy input is largely dissipated near the surface and is not directly used for pycnocline entrainment. Therefore, (7) assumes an exponential decay of the wind energy available to pycnocline entrainment. Note that, for a pycnocline buoyancy frequency  $N_p^2$ ,  $(z_w - z_p)\Delta_e N_p^2/2$  is the energy necessary to mix  $\Delta_e$  thickness of the pycnocline water with the adjacent mixed-layer water located between  $z_w$  and  $z_p$  where mostly the convective turbulence has to entrain the pycnocline water and lift it up to  
175 the Ekman-layer bottom  $z_w$  (where a larger amount of wind energy is available to the mixing above). Therefore, the normalized buoyancy frequency in figure 2d indicates how strong the pycnocline stratification is relative to the energy input available for the pycnocline entrainment.

In figure 2e, we use a two-part buoyancy flux scale

$$\Gamma_{b'w'} \equiv \max\left(1 - \frac{z}{z_p}, 0\right) B_* + \min\left(\frac{z}{z_p}, 1\right) E_b^{\frac{2}{3}} \sqrt{N_p^2} \times 4 \times 10^{-3} \quad (8)$$

180 where the first term is the scale relevant near the surface and the second term is the scale relevant near the boundary-layer bottom. The nondimensional constant  $4 \times 10^{-3}$  in the second term is used only to make the normalized value at  $z_p$  close to -1.

Figure 2f uses the energy-flux-based scale for  $w'w'w'$  but modified with a nondimensional function  $\phi_s$  as

$$\Gamma_{w'w'w'} \equiv \phi_s U_E^3 \quad (9)$$

because  $w'w'w'$  is very sensitive to the turbulence structure. When  $(U_*, Q_*) = (0.006 \text{ m s}^{-1}, 50 \text{ W m}^{-2})$ , the turbulence devel-  
185 ops distinct convective rolls spanning the whole boundary-layer depth while in other cases convective rolls are much weaker and the turbulence structures in the upper part of the boundary layer are more similar to the pure wind-driven turbulence—which mainly consists of smaller-scale and more-disturbed tilted-vortexes—and the turbulence structures in the lower part of

<sup>3</sup>The length scale  $\Delta_e$  is independent of the flow. Therefore, an arbitrary value may be used. Here we arbitrarily use  $\Delta_e = 1 \text{ m}$ .

<sup>4</sup>The factor 4.5 is an empirical nondimensional coefficient. Equation (6) is related to the standard thickness of the Ekman layer derived assuming a constant vertical eddy viscosity. Here, however, we relate the wind-driven boundary-layer thickness to the surface energy flux because the eddy viscosity does not have to be vertically uniform but is still roughly related to the surface energy flux.

<sup>5</sup>When the wind energy mixes the surface water very well and thereby significantly distract the available potential energy due to the surface cooling, it may be more appropriate to use  $B_* |(z_w - z_p)|$  instead in the second term.

the boundary layer are similar to pure convective plumes. Convective rolls utilize both wind energy and available potential energy constructively and channel these energies into bands of strong  $w'$ . In contrast, the turbulence in the other cases uses  
190 wind energy to mix the water in the upper part of the boundary layer and thereby partially distracts the available potential energy coming in from the surface. As a result,  $\overline{w'w'w'}$  due to convective rolls is much stronger. Therefore, to make the order of the normalized values similar, we use  $\phi_s = 5$  when  $(U_*, Q_*) = (0.006 \text{ m s}^{-1}, 50 \text{ W m}^{-2})$  and  $\phi_s = 1$  otherwise.

Figure 3d shows  $\overline{b'b'}$  near  $z_p$ . It is dominated by internal waves and isopycnal deformation due to the boundary-layer turbulence reaching  $z_p$ . The nondimensionalization is done relative to the stratification and the energy input to these processes:  
195 namely,

$$\Gamma_{b'b'} \equiv E_b^{\frac{2}{3}} N^2. \quad (10)$$

### 2.1.2 Comparison of results

Figures 2a, 2b, and 2c show that the simulated mean flows are very similar. The only somewhat notable differences are 1) that the CROCO surface velocity tends to be slightly higher, 2) that the CROCO surface temperature tends to be slightly lower,  
200 and 3) that the CROCO pycnocline entrainment is weaker. The weaker entrainment in CROCO can be seen more clearly in the comparison of the deepening mixed layers in Figure 4.

The CROCO runs produced weaker mixed-layer deepening although Figure 2d shows that CROCO runs had either a similar or greater amount of energy flux reaching the mixed-layer base.<sup>6</sup> Furthermore, despite the slower mixed-layer deepening in the CROCO runs, CROCO tends to have a slightly stronger resolved buoyancy flux at the mixed-layer base (figure 2e).  
205 This implies that the NCAR model's faster entrainment occurs because NCAR model's explicit SGS diffusion is larger than CROCO's implicit (numerical-only) SGS diffusion. Note that the NCAR model also has only second-order advection in the vertical with upwinding, so even though it is centered it may have higher-order diffusion and dispersion effects, while CROCO has fifth-order advection with implicit diffusion entering only at the highest orders. This point is reiterated in section 2.2 where we add explicit SGS diffusion terms to a CROCO run.

Figures 2e, 2f, 3a, 3b, 3c, 3e, and 3f show that the resolved turbulence statistics are overall very similar. Note that a difference of up to about 10 % should be considered negligible for the domain size used and the time window lengths used for averaging. Experimentation by varying timesteps (not shown) gives this level of difference, reflecting that different realizations of instantaneous chaotic turbulent flow that do not altering the turbulence statistics can differ by this amount. This order of difference is likewise justified by the comparison among the LES in Section 2.5, which approach 10% differences in many of  
215 the same variables even though the averaging in those LES comparison figures is over an entire inertial period. Especially, the profiles of  $\overline{w'w'w'}$ ,  $\overline{v'w'}$ , and  $\overline{b'b'}$  fluctuate strongly and require significant averaging to obtain a well-sampled profile. However, near the surface where the turbulence structures tend to be small, the statistics are more robust even for these quantities. Thus, the resolved turbulence quantities near the surface tend to be robustly stronger for the CROCO runs. This stronger re-


<sup>6</sup>That is, the normalized buoyancy frequency of the pycnocline tends to be smaller for the CROCO runs while the dimensional  $N^2$  of the pycnocline is the same for both NCAR and CROCO runs. This is a result of a slightly larger  $\bar{u}_0$  in the CROCO runs, which leads to a larger  $U_E$ , a deeper  $z_w$ , and a smaller  $z_w - z_p$ , a larger  $E_b$ , and a larger  $\Gamma_N$ .




solved turbulence is closely related to the difference in the SGS parameterization, which becomes significant near the surface.  
220 Generally, a stronger SGS diffusion tends to weaken the resolved turbulence. Therefore, the result here suggest that CROCO's numerical diffusion is weaker than the explicit SGS diffusion of the NCAR model. As shown in section 2.2, the difference in the resolved turbulence quantities significantly reduces when the CROCO model uses an explicit SGS diffusion additionally to the (unavoidable) numerical diffusion.

Figures 3c and 3d show that the variances of the resolved  $w$  and  $b$  in the stratified part of the water ( $z/|z_p| \lesssim -0.9$ ) tend to be  
225 larger with the NCAR model. This is partially due to the slightly smaller  $U_E$  and  $E_b$  in the NCAR runs. However, this tendency persists in the dimensional variances as well. Contrary to these variances, the resolved buoyancy flux (figure 2e) at the same depths tends to be less with the NCAR model. Therefore, the NCAR runs have stronger internal waves (who have no buoyancy flux when they are not growing nor decaying) and less resolved turbulent mixing. It is not clear why this is the case, but one hypothesis was that these waves are more easily supported by the horizontal pseudospectral numerics of the NCAR-LES, and  
230 another hypothesis is that the fifth-order WENO scheme in CROCO is damping these waves. Further experimentation with different numerics in CROCO is possible, but is beyond the scope of this comparison paper. However, no similar effect is seen when comparing the different LES schemes in Figures 10-11.


To further investigate this difference, the spectra of 1D discrete FFT modes and the circularly-integrated 2D energy spectra of  $u'$ ,  $v'$ ,  $w'$ , and  $b'$  are shown in Figures 5 and 6. These figures are made using the data taken from special runs having a  
235 larger horizontal domain size of  $640\text{ m} \times 640\text{ m}$  to have more wavenumbers and for better statistics, and the results are very similar to the baseline domain size of  $320\text{ m} \times 320\text{ m}$ . These spectra are taken from three different regions: namely, the mixed-layer interior ( $-32\text{ m} < z < -6\text{ m}$ ), the entrainment layer ( $-60\text{ m} < z < -38\text{ m}$ ), and the pycnocline interior ( $-132\text{ m} < z < -70\text{ m}$ ). Overall, the NCAR and CROCO simulations tend to differ at the spectral heads and tails. The difference in the high-wavenumber tail is likely due to the dealiasing truncation in the NCAR runs which is not likely to resemble the high-  
240 wavenumber numerical diffusion in the CROCO approach. Note that this difference occurs over roughly the upper third of wavenumbers where the dealiasing is applied. The deviations at low wavenumber are due to the integral constraints of  $\langle w \rangle = 0$  and buoyancy anomaly over the whole domain being linked to vertical fluxes. Thus, the small-scale deviations and large scale deviations are linked. In  $u'$  and  $v'$ , there are not meaningful large-scale deviations. We show only the spectra from the case with  $(U_*, Q_*) = (0.012\text{ m s}^{-1}, 5\text{ W m}^{-2})$  because the differences between the NCAR and CROCO simulations have similar  
245 tendency for all other cases.

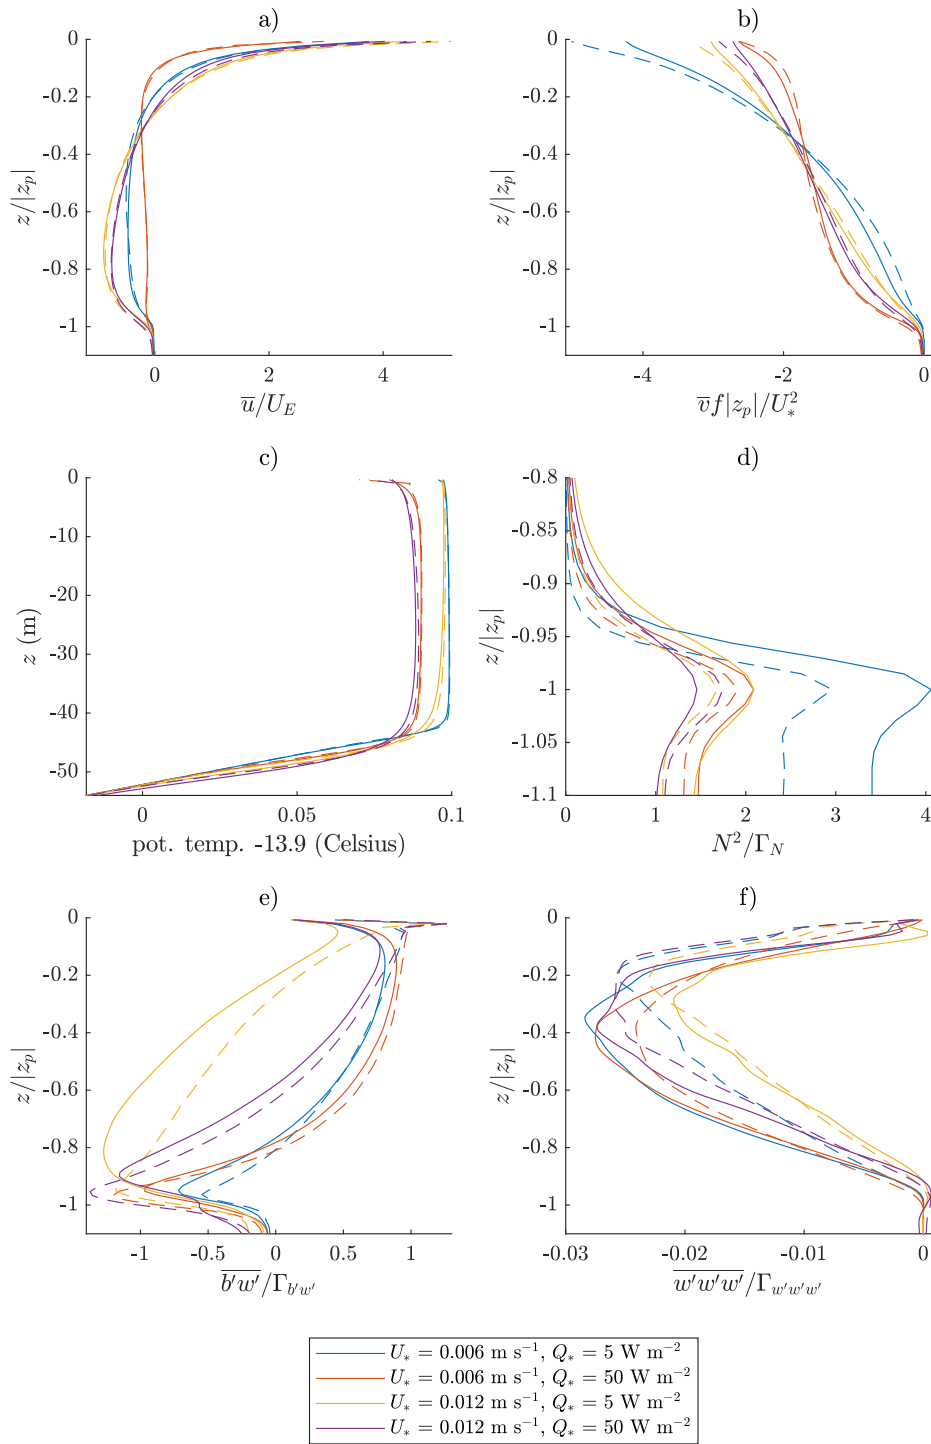


**Figure 2.** Comparison between the NCAR-LES model (solid) and the CROCO NBQ model (dashed). The line color indicates the surface forcing as shown in the legend.

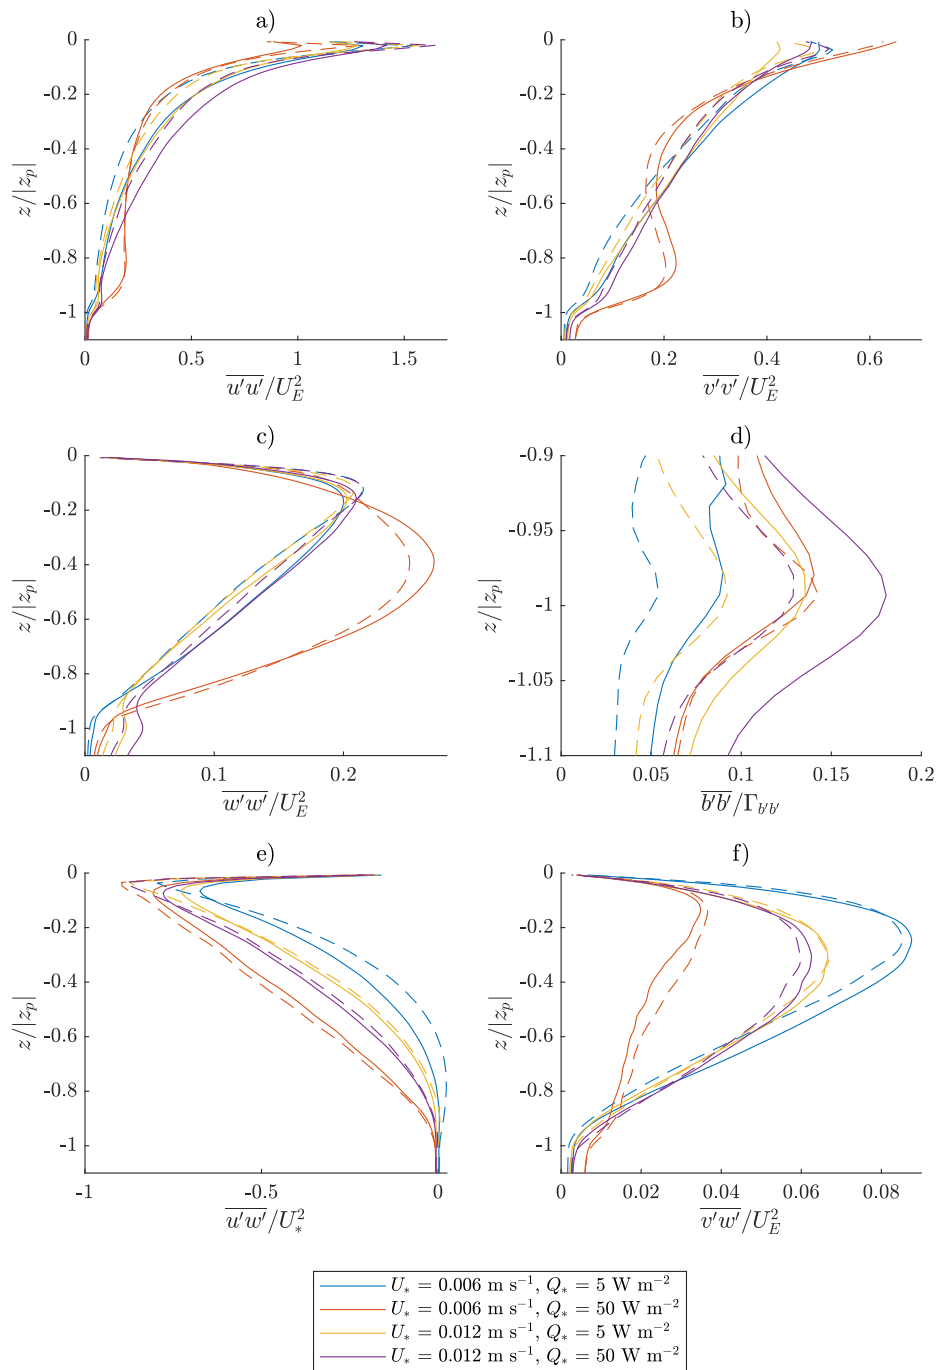


**Figure 3.** Comparison between the NCAR-LES model (solid) and the CROCO NBQ model (dashed). The line color indicates the surface forcing as shown in the legend.

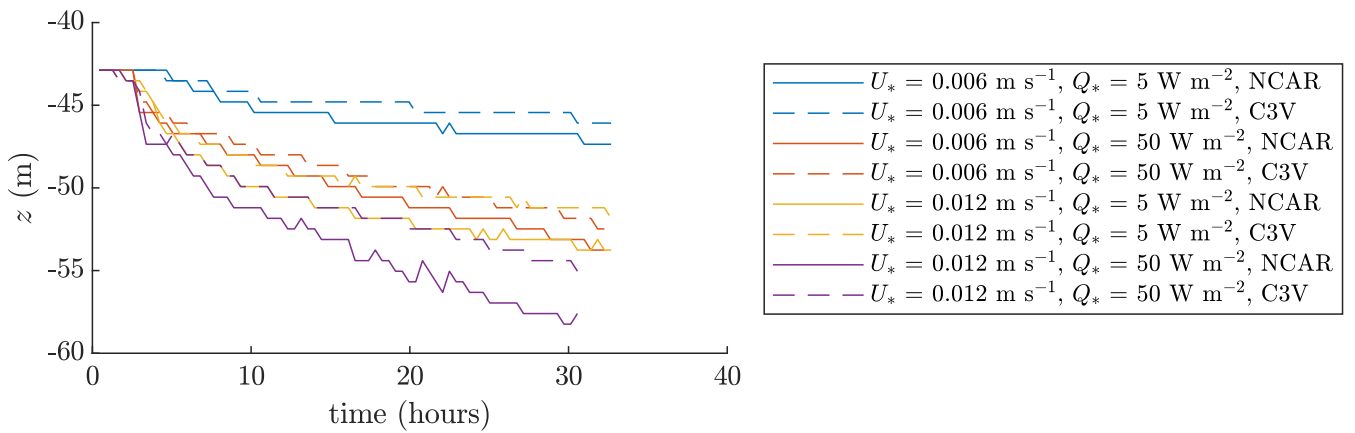

**Figure 4.** Time series of the mixed-layer-base depth  $z_p$ . C3V in the legend refers to the CROCO NBQ run with the sound speed  $c_s = 3 \text{ m s}^{-1}$  and the second viscosity  $\lambda = 1 \text{ kg s}^{-1} \text{ m}^{-1}$ . The difference in the mixed-layer deepening occurs mainly because NCAR's explicit SGS diffusion is larger than CROCO's implicit SGS (that is, only numerical) diffusion.

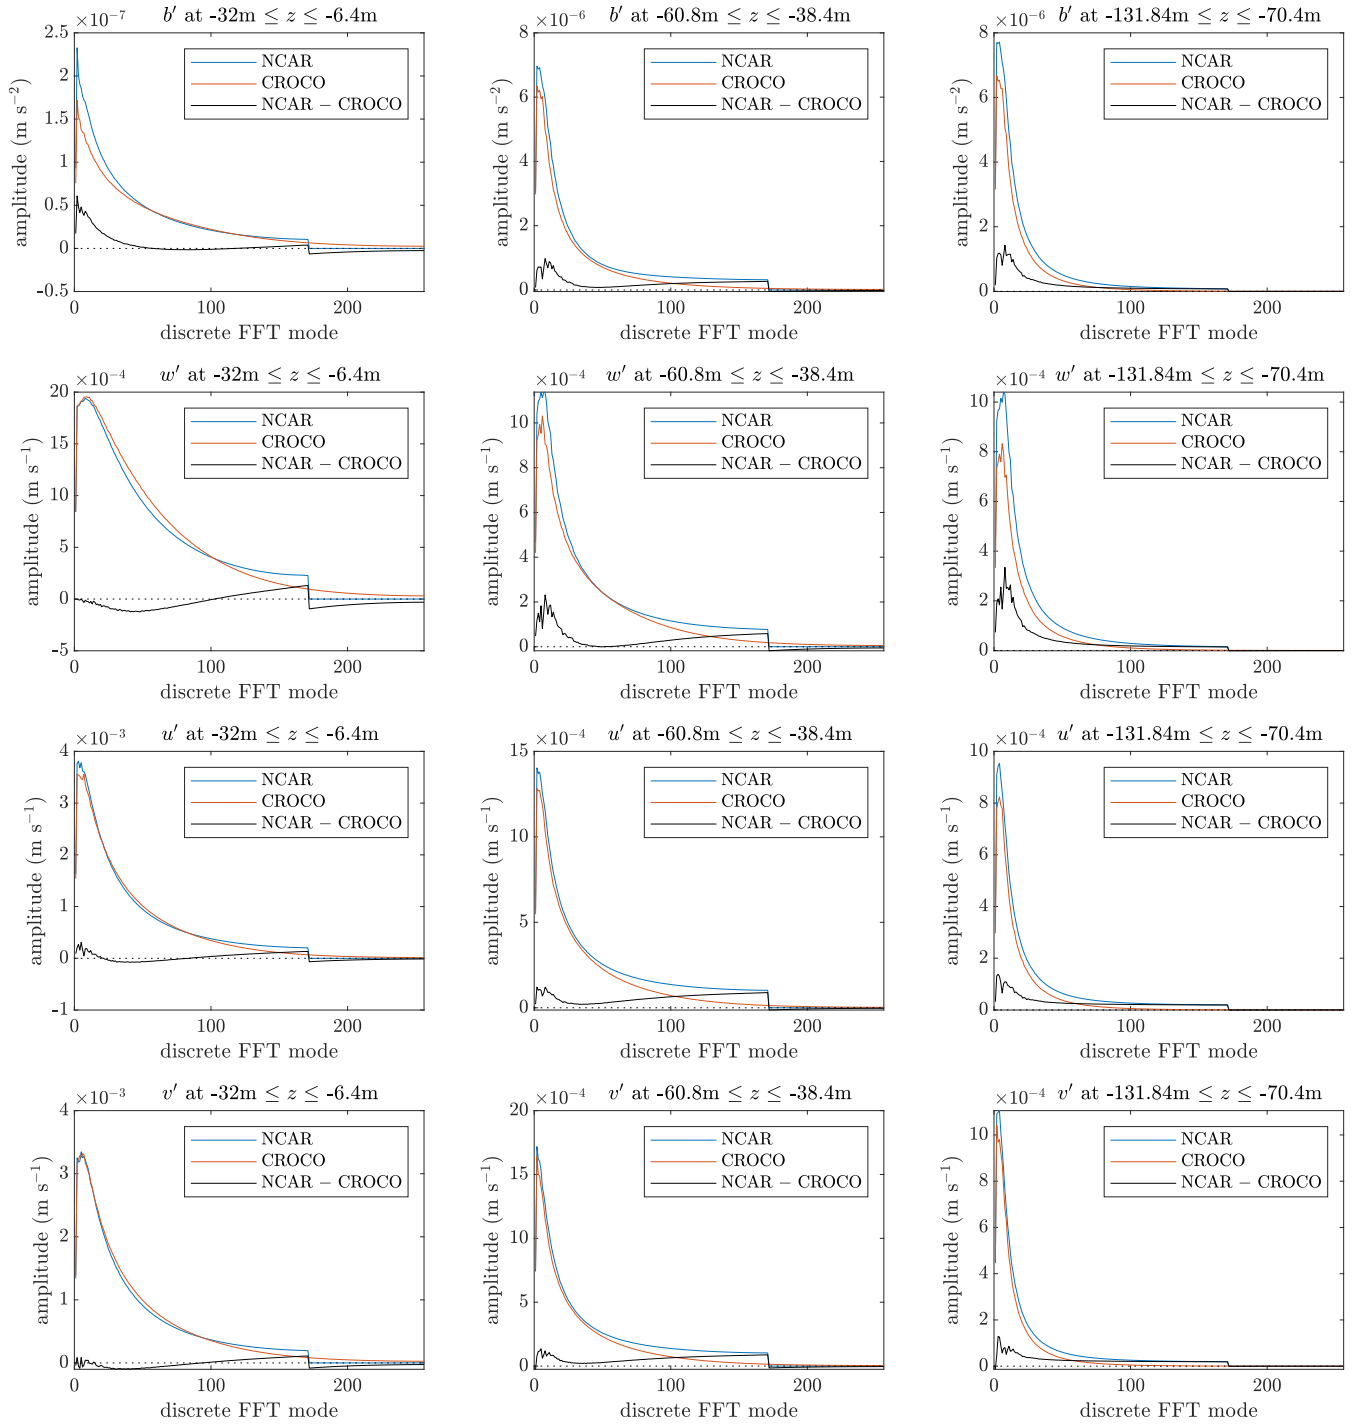

**Figure 5.** Comparison of the 1D discrete FFT spectra with  $(U_*, Q_*) = (0.012 \text{ m s}^{-1}, 5 \text{ W m}^{-2})$ . Each spectrum is smoothed by averaging over the vertical range shown in each title as well as averaging over 21 hours and each horizontal direction.

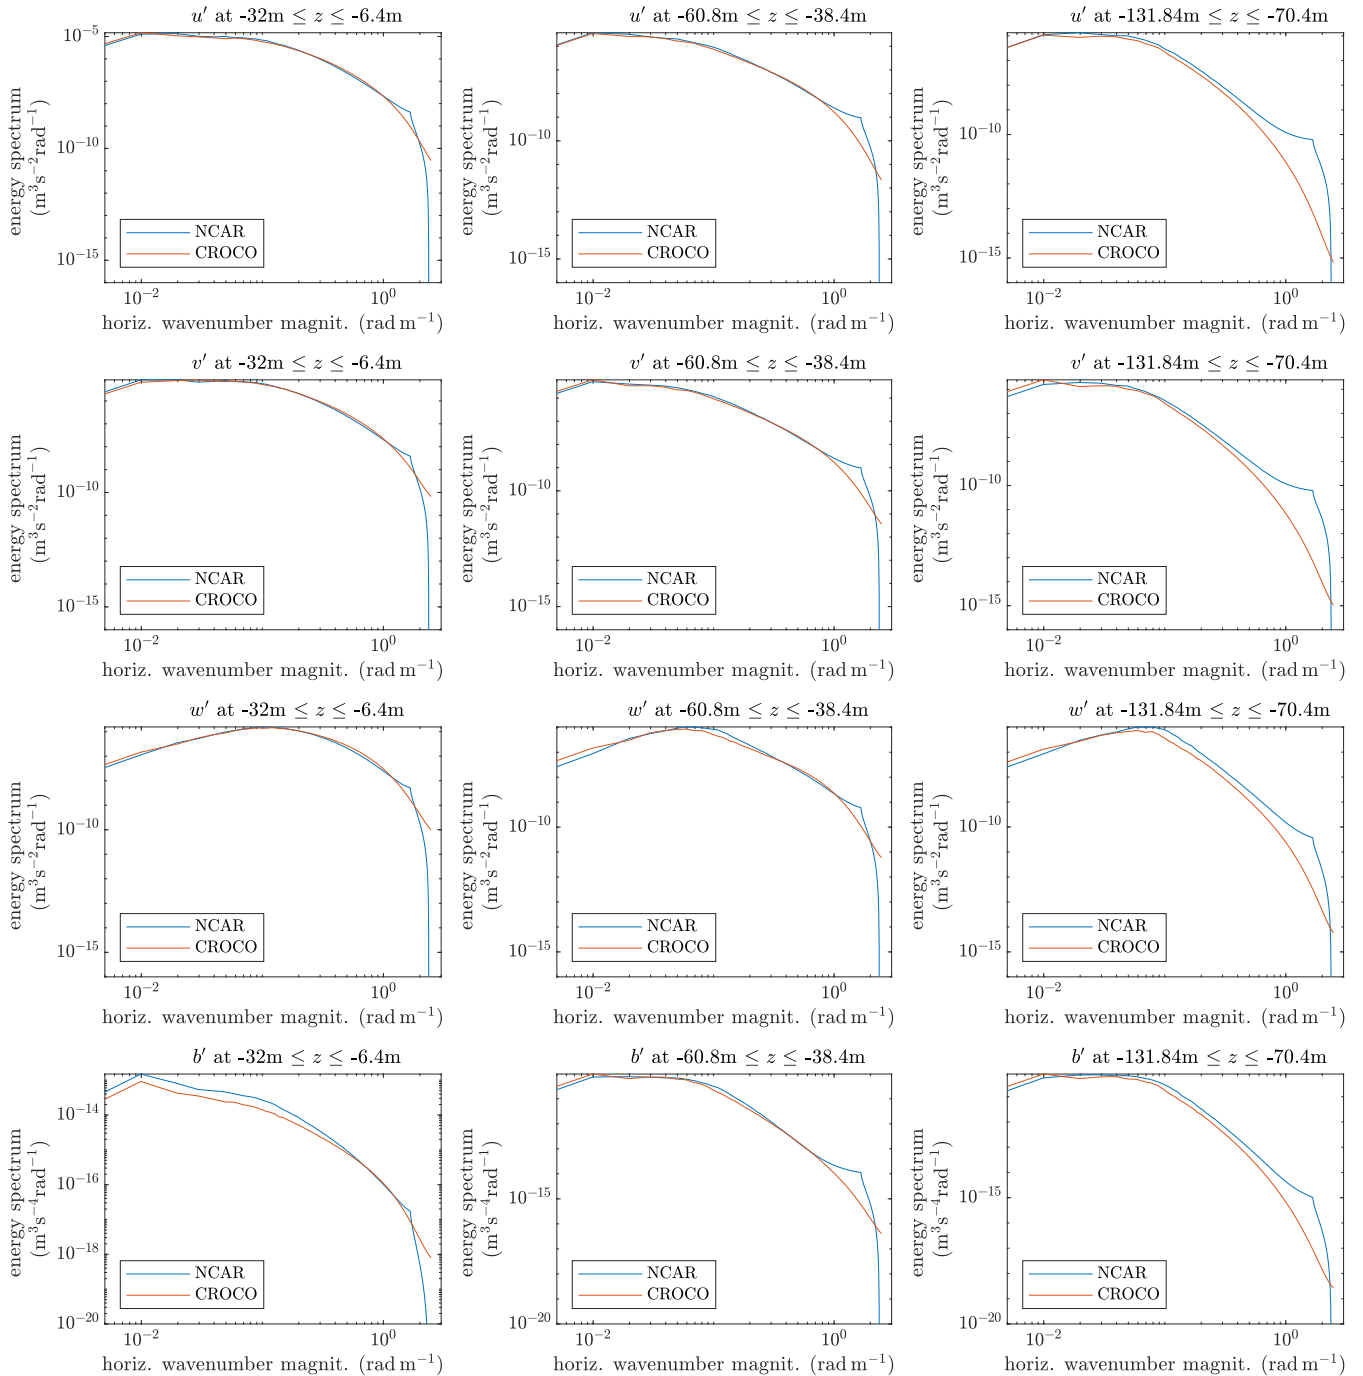

**Figure 6.** Comparison of the 2D spectra averaged in circular rings at constant horizontal wavenumber magnitude from the runs with  $(U_*, Q_*) = (0.012 \text{ms}^{-1}, 5 \text{W m}^{-2})$ . Each spectrum is smoothed by averaging over the vertical range shown in each title as well as averaging over 21 hours.

## 2.2 The effect of the explicit SGS parameterization

This subsection shows how explicit SGS diffusion terms affect the results in subsection 2.1. For this, we focus on the case with  $(U_*, Q_*) = (0.012 \text{ m s}^{-1}, 50 \text{ W m}^{-2})$  because this case has the largest difference in the mixed-layer deepening, which is the most significant difference observed in the previous subsection.

250 Here, the CROCO NBQ run uses a modified version of the SGS parameterization by Lilly (1962). Namely,

$$\tau_{ih} = \nu_H \left( \frac{\partial u_i}{\partial x_h} + \frac{\partial u_h}{\partial x_i} \right), \quad (11)$$

$$\tau_{i3} = \nu_V \left( \frac{\partial u_i}{\partial z} + \frac{\partial w}{\partial x_i} \right), \quad (12)$$

$$\tau_{\theta h} = \text{Pr} \nu_H \frac{\partial \theta}{\partial x_h}, \quad (13)$$

$$\tau_{\theta z} = \text{Pr} \nu_V \frac{\partial \theta}{\partial z}, \quad (14)$$

255 where

$$S_{ij} = \frac{1}{2} \left( \frac{\partial u_i}{\partial x_j} + \frac{\partial u_j}{\partial x_i} \right), \quad (15)$$


$$D = \sqrt{2 S_{ij} S_{ij}}, \quad (16)$$

$$\nu_H = C_s^2 \Delta x \Delta y D \sqrt{\max\left(0, 1 - \frac{N^2/D^2}{C_R}\right)}, \quad (17)$$

$$\nu_V = C_s^2 \Delta z \Delta z D \sqrt{\max\left(0, 1 - \frac{N^2/D^2}{C_R}\right)}, \quad (18)$$

260 and the indexes are  $h = 1, 2$ ,  $i = 1, 2, 3$ , and  $j = 1, 2, 3$ , and the summation convention is used, and the model parameters are the Smagorinsky constant  $C_s$ , Prandtl number  $\text{Pr}$ , and a mixing-threshold constant  $C_R$ . The SGS terms become zero when a Richardson-like number  $N^2/D^2$  exceeds  $C_R$ . As mentioned in the introduction of section 2, the NCAR model's SGS parameterization below  $z = -21 \text{ m}$  is roughly relatable to the Smagorinsky model with  $C_s = 0.18$ . Therefore, we test  $C_s = 0.17$  and  $0.2$  with CROCO. These values of  $C_s$  together with a large value of  $\text{Pr}$  produce the mixed-layer deepening  
 265 comparable to the NCAR model run as shown in Figure 7 where the mixed-layer deepening with  $(C_s, C_R, \text{Pr}) = (0.17, 0.25, 3)$  and  $(0.2, 1, 4)$  are shown. Note also that the net entrainment in the CROCO implicit plus explicit diffusion cases (C3VS and C3VS2) is greater than the implicit-only diffusion, which is important to verify as occasionally net effects can in fact become larger under implicit-only diffusion if the gradients sharpen in response (Bachman et al., 2017). The results in Figure 7 demonstrate that the difference in the entrainment and mixed-layer deepening seen in the previous subsection is due primarily  
 270 to the SGS parameterization always present in the NCAR-LES, and the numerical-only diffusion of the CROCO runs is less than the combined numerical plus explicit diffusion of the NCAR model and the C3VS cases.

The previous subsection also showed that the resolved turbulence quantities near the surface tend to be larger with the CROCO model without an explicit SGS parameterization. This difference also significantly reduces with the addition of the

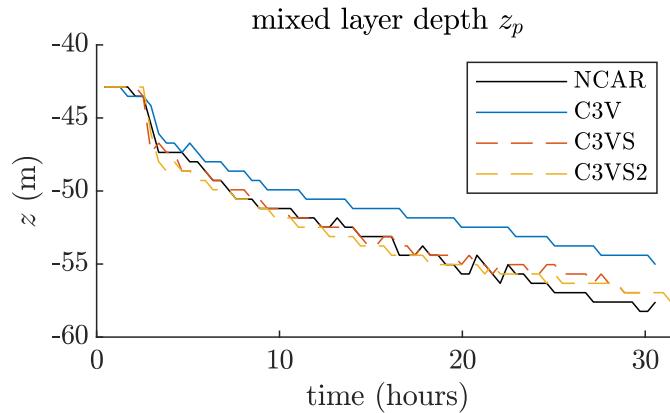


**Figure 7.** Time series of the mixed-layer-base depth  $z_p$ . The CROCO NBQ runs (C3V, C3VS, C3VS2 in the legend) use the sound speed  $c_s = 3 \text{ m s}^{-1}$  and the second viscosity  $\lambda = 1 \text{ kg s}^{-1} \text{ m}^{-1}$ . C3V uses only numerical diffusion. C3VS and C3VS2 use an explicit SGS parameterization (11)-(18) with  $(C_s, C_R, \text{Pr}) = (0.17, 0.25, 3)$  and  $(0.2, 1, 4)$ , respectively.

explicit SGS parameterization as shown in Figures 8 and 9.<sup>7</sup> A stronger near-surface diffusion weakens the resolved turbulence.  
 275 There are some small remaining differences, but they are expected because different explicit SGS parameterizations are used in the NCAR and CROCO models.


In summary, the NCAR results and the CROCO results are overall very comparable. There are some minor differences, but most of them are due to the different SGS parameterization. The only notable difference that may not be attributable to the SGS parameterization difference is that the NCAR model runs tend to produce more internal waves in the stratified part.

<sup>7</sup>Each profile is an average of 21 samples taken every one-fortieth of the inertial period during  $t = 4.7$  to 13.6 hours.



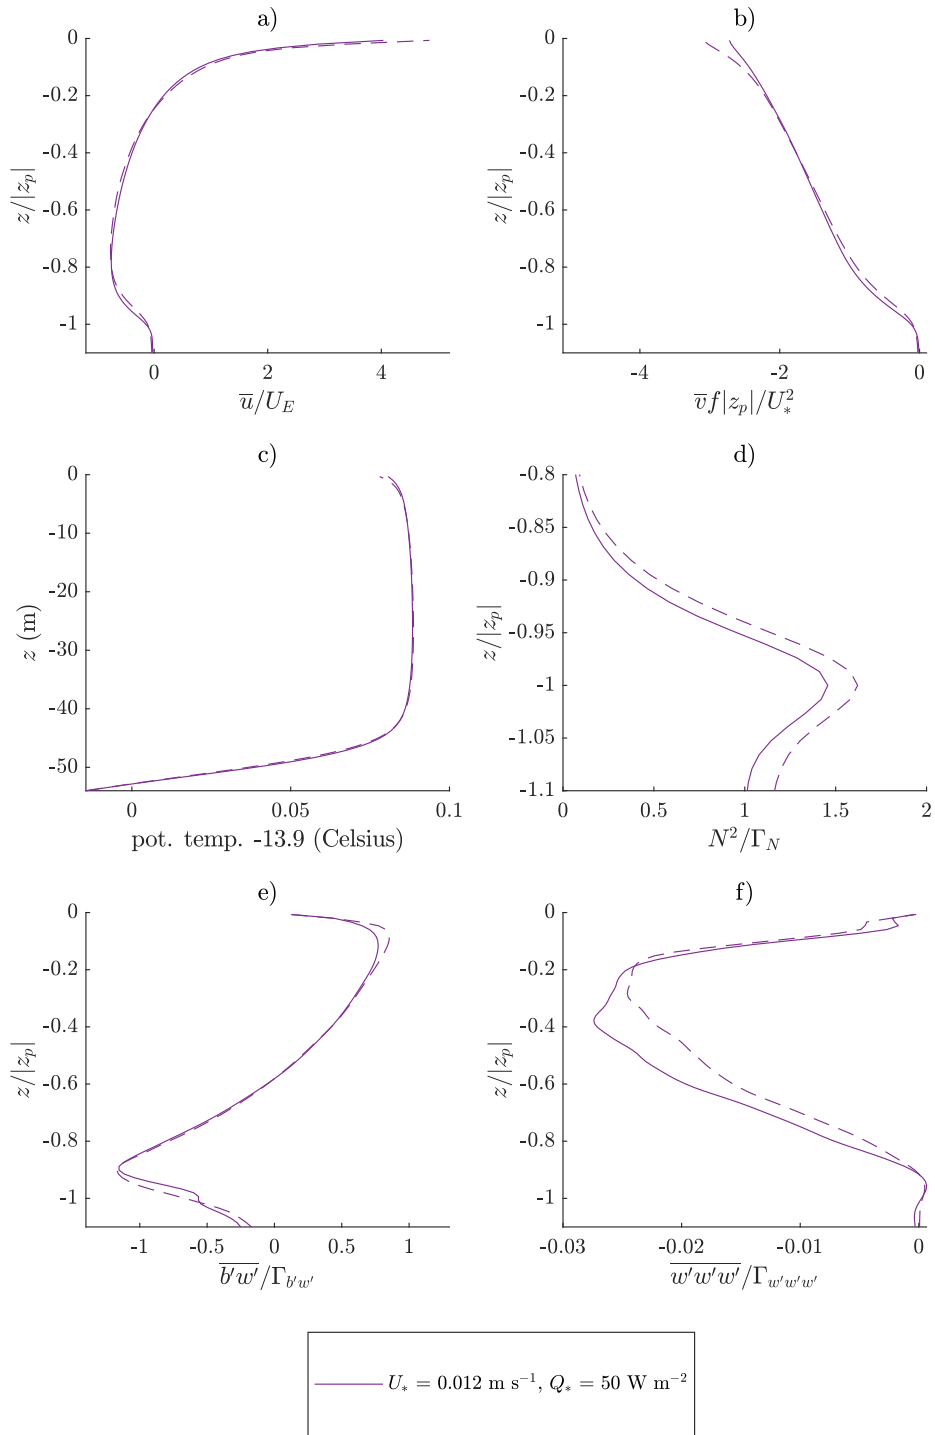

**Figure 8.** Comparison between the NCAR run (solid) and the C3VS CROCO run (dashed) including explicit SGS dissipation with  $(C_s, C_R, Pr) = (0.17, 0.25, 3)$ . Compare to the purple lines in Figure 2 which show the same forcing but the CROCO C3V case with only implicit dissipation.

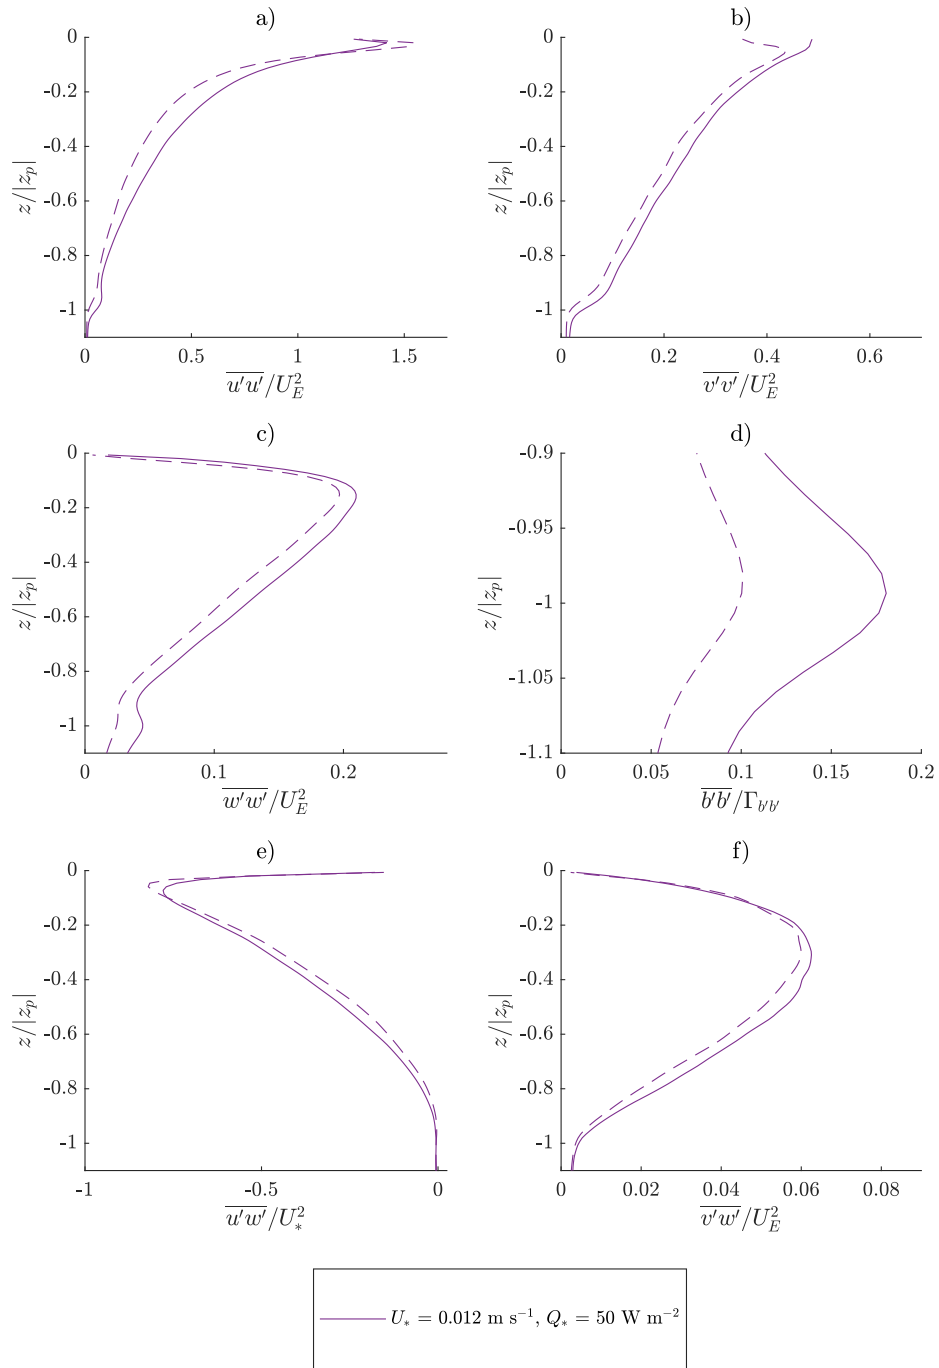

**Figure 9.** Comparison between the NCAR run (solid) and the C3VS CROCO run (dashed) including explicit SGS dissipation with  $(C_s, C_R, Pr) = (0.17, 0.25, 3)$ . Compare to purple lines in Figure 3 which show the same forcing but with CROCO C3V case with only implicit dissipation .

### 280 2.3 The effect of the second viscosity parameter

For the CROCO NBQ model runs, an unphysically-large value of the second viscosity  $\lambda$  may be used to aggressively dissipate (near-grid-scale) pseudo-acoustic waves and stabilize the simulation. Therefore, we tested whether an unphysically-large value of  $\lambda$  affects the turbulence statistics. We evaluated two types of CROCO runs having the speed-of-sound parameter  $c_s = 202 \text{ m s}^{-1}$ . One simulation uses  $\lambda = 0.01 \text{ kg s}^{-1} \text{ m}^{-1}$ , and the other uses  $\lambda = 19 \text{ kg s}^{-1} \text{ m}^{-1}$  for  $(U_*, Q_*) =$   
285  $(0.006 \text{ m s}^{-1}, 50 \text{ W m}^{-2})$  and  $\lambda = 18 \text{ kg s}^{-1} \text{ m}^{-1}$  for all other values of  $(U_*, Q_*)$ . The results show that the turbulence statistics are not significantly affected.

By increasing  $\lambda$ , the additional viscosity does have the effect of stabilizing marginal numerical instabilities so that the optimal slow-mode time step increases from 0.15 s to 0.2 s for the case with  $(U_*, Q_*) = (0.006 \text{ m s}^{-1}, 5 \text{ W m}^{-2})$ , and from 0.04 s to 0.08 s for the cases with  $(U_*, Q_*) = (0.012 \text{ m s}^{-1}, 5 \text{ W m}^{-2})$  and  $(0.012 \text{ m s}^{-1}, 50 \text{ W m}^{-2})$ . However, for the case  
290 with  $(U_*, Q_*) = (0.006 \text{ m s}^{-1}, 50 \text{ W m}^{-2})$ , increasing  $\lambda$  does not lead to an increase of the slow-mode time, which stays at 0.25 s. The optimal fast-mode time step is unaffected by  $\lambda$  and is about 0.0038 s for all values of  $(U_*, Q_*)$ . Therefore, increasing damping using  $\lambda$  speeds up the simulations only slightly.

## 2.4 Sensitivity to the speed-of-sound parameter

295 Reducing the speed-of-sound parameter  $c_s$  in the CROCO NBQ model allows a larger time step by relaxing the CFL condition related to pseudo-acoustic waves. Here, we study the effect of reducing the value of  $c_s$  to a value 500 times slower than nature,  $c_s = 3 \text{ m s}^{-1}$ . The results show that the resolved turbulence statistics are largely insensitive to the value of  $c_s$  between  $c_s = 3 \text{ m s}^{-1}$  and  $c_s = 202 \text{ m s}^{-1}$ . However, it should be noted that  $c_s$  should not be smaller than the fastest speed of the process that needs to be properly simulated, for example, the barotropic wave speed in the case of geophysical applications.

300 Most statistics have only small differences that should be considered negligible for the given limited domain size (not shown). The only possibly non-negligible difference appears in the internal wave strength seen below  $z/|z_p| \approx -0.9$  for the cases with  $U_* = 0.012 \text{ m s}^{-1}$ . It is unclear why the intensity of internal waves is sensitive to changing the sound speed. However, note that the differences among the two CROCO simulations differing in sound speed are not as big as the differences between NCAR and CROCO internal wave strength in previous comparisons.

305 Decreasing  $c_s$  without increasing  $\lambda$  makes simulations unstable and is not recommended. By decreasing  $c_s$  together with increasing  $\lambda$ , the optimal slow-mode and fast-mode time steps increase to 0.5 s and 0.019 s, respectively, for all optimized runs, amounting to more than 5 times faster simulations.

## 2.5 Comparison between LES models

NCAR-LES was developed at NCAR to simulate planetary boundary layer turbulence (Moeng, 1984) and extended to include the effects of ocean surface waves when applied to the ocean surface boundary layer turbulence (McWilliams et al., 1997). The spatial discretization is pseudo-spectral in the horizontal and finite-difference in the vertical. It uses a modified Smagorinsky sub-grid scale (SGS) closure that evolves a prognostic equation for the SGS turbulent kinetic energy (TKE) (Deardorff, 1980; Sullivan et al., 1994).


The Parallelized Large-Eddy Simulation Model (PALM) was developed at Leibniz Universität Hannover (Germany) as a turbulence-resolving LES model for atmospheric and oceanic boundary layer flows, specifically designed to run on massively parallel computer architectures (Raasch and Schröter, 2001; Maronga et al., 2015). It uses a modified version of the Deardorff (1980) SGS parameterization similar to the NCAR-LES. But the spatial discretization is finite-differences in both horizontal and vertical directions. An upwind-biased fifth-order differencing scheme for advection terms in combination with a third-order Runge–Kutta timestepping scheme is used in PALM (Wicker and Skamarock, 2002).

Both NCAR-LES and PALM have been widely used in simulating atmospheric and oceanic boundary layer turbulence under various idealized and realistic conditions, while Oceananigans is a new (v0.83.0 is used here) fast and friendly software package for numerical simulations of geophysical fluid dynamics developed at the Massachusetts Institute of Technology in the Julia programming language (Ramadhan et al., 2020). Oceananigans uses a spatial discretization that is finite-volume and it can be configured as an LES with various combinations of SGS, advection and timestepping schemes. For this particular comparison, we are using the anisotropic minimum dissipation closure (Verstappen, 2018) combined with third-order Runge–Kutta timestepping and fifth-order WENO advection.


Ideally, the differences in the discretization and SGS closure schemes among the three LES models should not affect the horizontally and temporally averaged turbulence statistics for the ocean surface boundary layer problem, as long as the grid cells are small enough to capture the dominant turbulent structures and the model domain is large enough to collect robust statistics. Here we assess to what extent is this assumption valid using two idealized cases: a case dominated by wind driven shear turbulence with  $(U_*, Q_*) = (0.012 \text{ m s}^{-1}, 5 \text{ W m}^{-2})$  and a case dominated by convective turbulence with  $(U_*, Q_*) = (0.006 \text{ m s}^{-1}, 500 \text{ W m}^{-2})$ . In both cases, we run PALM and Oceananigans using a consistent domain size and resolution as NCAR-LES.

Figures 10 and 11 compare the vertical profiles of the horizontal mean turbulence statistics averaged over the last inertial period ( $\sim 17$  hours) for the two idealized cases, respectively. As expected, the three LES models give largely consistent results for the turbulence statistics examined here in the two idealized cases. The most notable differences are confined near the surface or the base of the boundary layer where entrainment is important, which highlights where the differences in SGS closure and numerical schemes have their greatest impact (note that the turbulence statistics shown here are all well-resolved). The seemingly large discrepancies in Figures 10c and 11a,d are due to the normalization and constraints imposed at the surface: the buoyancy flux is small in the wind-driven-shear turbulence dominant case, and the momentum flux is small in the convective turbulence dominant case. Thus, the variables which are most strongly forced at the surface are in closest agreement when

normalized by the surface forcing (Li and Fox-Kemper, 2017; Skitka et al., 2020). Indeed, the simulated momentum flux in the first case (Figure 10d) and buoyancy flux in the second case (Figure 11) show the best agreement among the three LES models. The vertical velocity skewness ( $\overline{w'^3}$ ), cross-wind velocity component ( $\overline{v'^2}$ ), temperature variance ( $\overline{t'^2}$ ), and stratification ( $\overline{N^2}$ ) (panels b, e, and f) are not as strongly constrained by the surface forcing and are subject to more variability among the models, especially at the surface and base of the boundary layer where entrainment occurs.

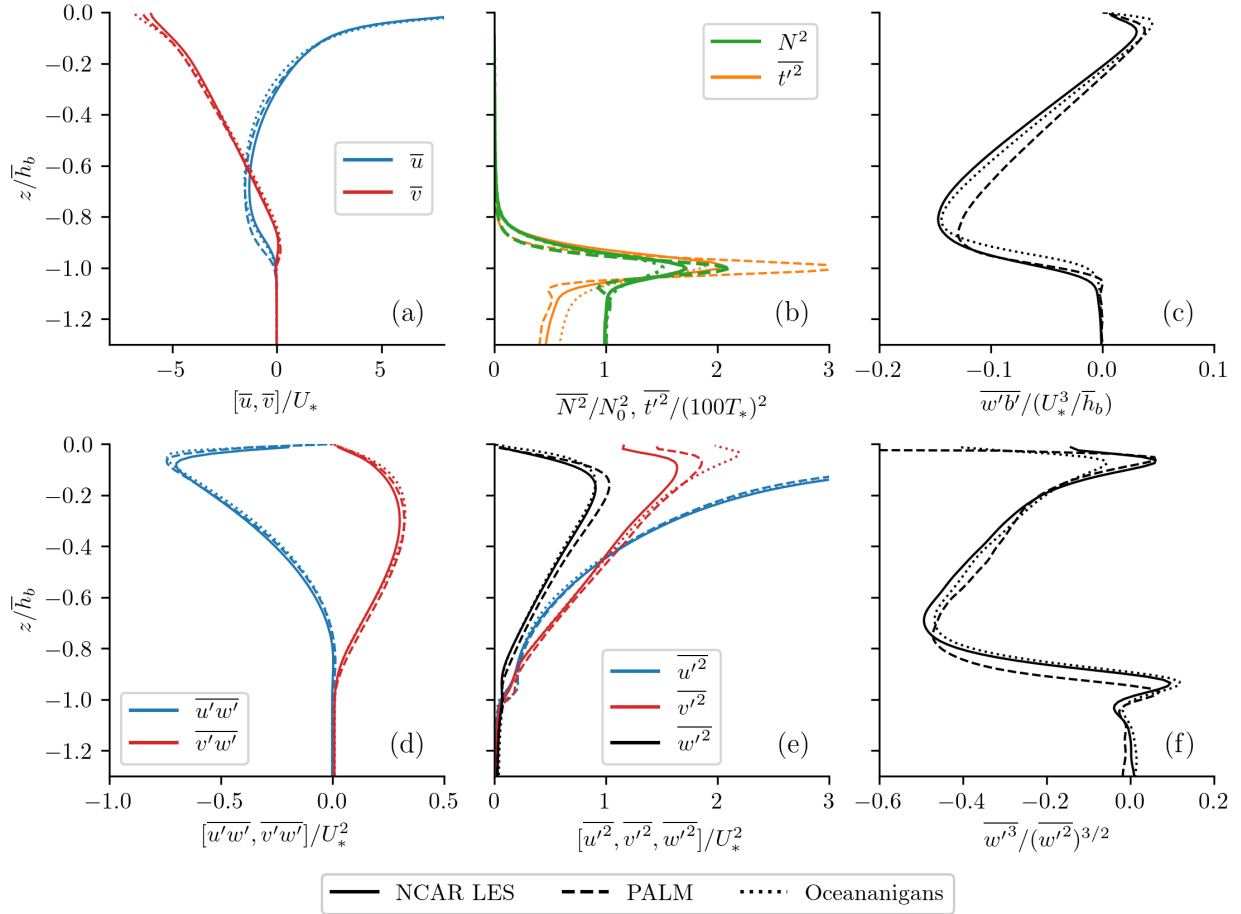

**Figure 10.** A comparison of the horizontally and temporally averaged turbulence statistics among NCAR-LES (solid), PALM (dashed) and Oceananigans (dotted) in a case dominated by wind driven shear turbulence. The normalized turbulence statistics include: (a) horizontal velocity,  $\bar{u}, \bar{v}$ , normalized by the friction velocity  $U_*$ ; (b) stratification (black),  $\overline{N^2}$ , normalized by its value below the boundary layer,  $N_0^2$ , and temperature variance (purple),  $\overline{t'^2}$ , normalized by a characteristic temperature  $T_* = Q_*/(c_p \rho U_*)$ ; (c) buoyancy flux,  $\overline{w'b'}$ , normalized by  $U_*^3/\bar{h}_b$ ,  $\bar{h}_b$  refers to the mixed layer depth; (d) momentum flux,  $\overline{u'w'}, \overline{v'w'}$ , normalized by  $U_*^2$ ; (e) velocity variance,  $\overline{u'^2}, \overline{v'^2}, \overline{w'^2}$ , normalized by  $U_*^2$ ; and (f) the skewness,  $\overline{w'^3}/(\overline{w'^2})^{3/2}$ . The turbulence statistics are averaged over the last inertial period ( $\sim 17$  hours) to reduce the effects of inertial oscillation.

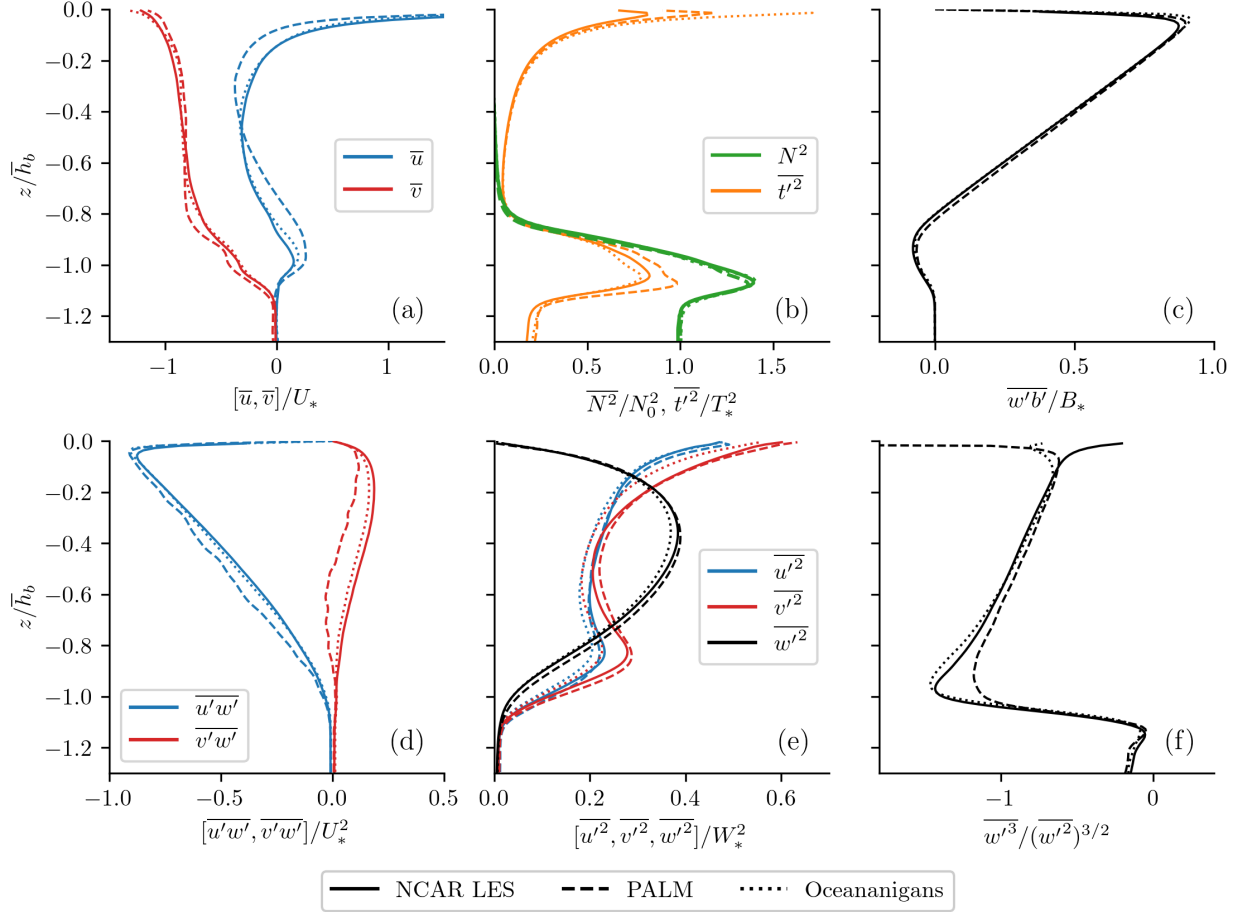

**Figure 11.** Same as Figure 10, except that the turbulence statistics are for a case dominated by convective turbulence, and the buoyancy flux in panel (c) is normalized by the surface buoyancy flux  $B_*$  and the three components of the velocity variance in panel (e) are normalized by  $W_*^2$  where  $W_* = (B_* \bar{h}_b)^{1/3}$  is a convective velocity scale.



## 2.6 A rough comparison between vertically-stretched CROCO and NCAR-LES

In reproducing Li and Fox-Kemper (2017) with both NCAR-LES and CROCO, there were notable differences. However, in that comparison many parameters differed between the models (e.g., stretched vertical grid, subgrid model) in addition to the numerics. Hence, a more detailed comparison where gridding was more tightly matched and subgrid schemes were explored  
350 was carried out (preceding subsections in Section 2). In this final subsection, a comparison between CROCO and NCAR-LES in more typical configurations (where they are not matched in gridding and subgrid schemes) are shown to illustrate discrepancies under more realistic configurations.

The preceding comparisons were motivated to better understand a set of calculations comparing CROCO to NCAR-LES under realistic conditions and typical setups for CROCO and NCAR-LES in 16 previously published scenarios with different  
355 combinations of surface wind and cooling from Li and Fox-Kemper (2017). Surface wind and cooling conditions are correspondingly matched for each case. Similar to the accuracy comparisons above, the simulation cases of both CROCO and NCAR-LES models are based on the domain size of  $320m \times 320m \times 163.84m$  in  $x, y, z$  direction. The computational cells are  $256 \times 256 \times 256$  grids in each direction, which corresponds to a horizontal resolution of  $dx = dy = 1.25m$ . The vertical grids of the NCAR-LES are uniform with a vertical resolution of  $dz = 0.64m$ . The vertical grids of CROCO, however, were  
360 unequal. The CROCO grid points were stretched to be finer near the surface and coarser near the bottom of the domain, as is commonly configured in CROCO and other ROMS applications.

These comparisons spanned a wider range of convective forcing (over a factor of 100) and a wider range of wind stresses (a factor of 4) than the comparisons in the previous sections. The largest differences among the simulations, however, were consistent with the preceding results. According to the comparison of horizontal  $(\overline{u'v'})$  and vertical  $(\overline{u'w'})$  momentum flux  
365 and the turbulence kinetic energy (TKE), the turbulence intensity was slightly weaker in CROCO, which is a similar result to the tendencies in the above comparisons. However, as we have seen in some cases this difference can change according to the SGS scheme and averaging windows. By comparison of buoyancy frequency ( $N^2$ ) and vertical buoyancy flux ( $w'b'$ ), CROCO had weaker vertical heat transport and entrainment, similar to the differences observed in in Figures 2 and 3 and now these differences can be largely attributed to differences in SGS dissipation rather than numerics. Overall, these comparisons suggest  
370 that even in the case of a moderately stretched vertical grid comparable results are to be expected from CROCO as in a uniform grid LES.

## 3 Efficiency comparison

Many factors affect the model computing efficiency, such as the structure and assignment of computing platform, Message Passing Interface (MPI) parallelization, 2D-decomposition of the model and some specific physical parameterizations, particu-  
375 larly ones that have consequences for the stability and allowable time step size. In this section, we compared the computational efficiency of CROCO and NCAR-LES model.

### 3.1 Computing platform – Cheyenne supercomputer

The number and allocation of nodes and processors used for computing and the availability of threads matter to model efficiency. In this study, the Cheyenne supercomputer is used for efficiency tests. The Cheyenne supercomputer, built for NCAR, operates as one of the world’s most energy-efficient and high-performance computers. Cheyenne consists of 4,032 dual-socket nodes with 2.3 GHz Intel Xeon E5-2697V4 processors with 18 cores each, for a total of 145,152 cores and a peak performance of 5.34 petaflops. Nodes have either 64 GB or 128 GB of RAM (DDR4-2400) and networked using Mellanox EDR InfiniBand high-speed interconnects with a bandwidth of 25 GBps bidirectional per link. The simulations presented in this paper all ran on Cheyenne with exclusive use of the nodes. In each efficiency test, the number of nodes, the number of CPU per node, the number of MPI processes and the number of OpenMP threads can be specified.


Combinations of nodes and CPUs per node with different problem sizes and the total number of processors were tested. When the problem size and total number of processors are fixed, we find that the combination of more nodes and fewer CPUs per node makes the CROCO model compute more efficiently. When fewer processors per node are used, most systems still typically charge for the unused processors on each node so this is not more efficient overall, just more efficient per processor in use. However, this combination of the selection of nodes and CPUs per node is more costly and so it is typically better to stick to affordable and moderate numbers despite the higher performance, because more nodes requested to Cheyenne make jobs wait longer in the waiting queue, thus the overall time to complete runs is longer though the computing time is shorter.

### 3.2 NCAR-LES 2D-decomposition

NCAR-LES uses pseudo-spectral discretization in the horizontal. Fast Fourier transforms (FFTs) are used to evaluate horizontal derivatives, which requires global data at all grid points in the direction along which the derivatives are evaluated. Thus, a simple domain decomposition in the two horizontal directions would need frequent exchange of large amount of data between different processors, which limits the computational performance. To address this, a 2D domain decomposition is used in NCAR-LES (Sullivan and Patton, 2008), in which each processor operates on constricted “pencils” that include all the grid points in a specific direction, so that horizontal derivatives along that direction can be evaluated on a single processor with FFT. To evaluate the derivatives on the other direction, a transpose is performed before the evaluation of derivatives, and another transpose is performed afterwards. The combination of transposes and ghost point exchange uses specific communication patterns between only subsets of processors and no global communication is needed. Therefore, large numbers of grid points can be used and it scales pretty well on thousands of processors. The 2D-decomposition of NCAR-LES is schematized in Figure 12, which illustrates the structure of total number of processors used in the computational process.

### 3.3 CROCO MPI parallelization

CROCO is currently supported by two parallelization options, MPI and OpenMP, which respectively represent distributed memory and shared memory. The awareness of CROCO MPI or OpenMP settings is necessary to be defined as needed, and the use of MPI or OPENMP is exclusive. According to the test results, when the OpenMP is not called for during compilation

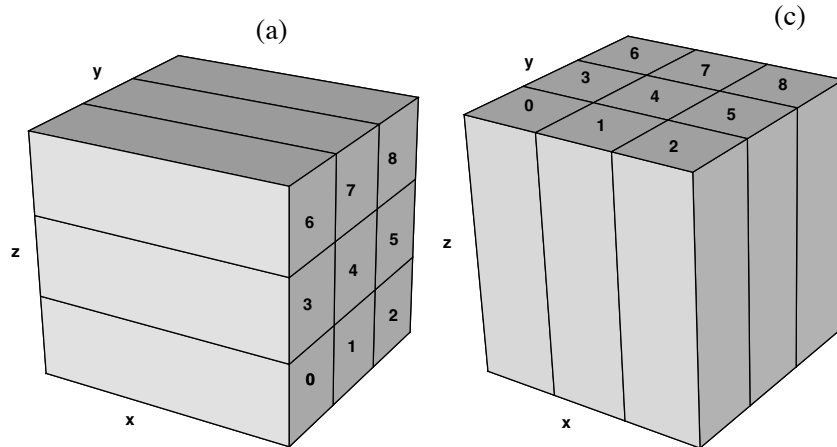

**Figure 12.** 2D domain decomposition on 9 processors: (left) base state with y-z decomposition; and (right) x-y decomposition used in the tridiagonal matrix inversion of the pressure Poisson equation (Sullivan and Patton, 2008).

in CROCO, the computing time with or without OpenMP threads on Cheyenne does not affect timing so offers no advantages.  
 410 In this paper, CROCO is used without OpenMP and with MPI, which means only one thread is used for each processor on Cheyenne, and the decomposition of processors and distribution across nodes impact the computing efficiency. The following discussion focuses on the MPI parallelization option.

The structure of CROCO MPI decomposition is divided into XI and ETA direction, NP\_XI and NP\_ETA in CROCO codes represents the number of processor assignment in XI and ETA horizontal directions respectively. When NP\_XI=3 and  
 415 NP\_ETA=3 are set, the MPI parallelization structure is shown in Figure 12c. In order to match the number of processors used in Cheyenne, the product of NP\_XI and NP\_ETA should be as the same as the product of the number of nodes and the number of CPUs per node should also be matched. Different combinations of NP\_XI and NP\_ETA were tested under the frameworks of different combinations of problem size and total number of processors in the Cheyenne environment.

### 3.4 Efficiency test results

420 The performance of the model efficiency for varying problem sizes and workload per processor is shown from Figure 13 and Figure 14.  $NP = NP_z \times NP_x \times NP_y$  where  $NP_z$ ,  $NP_x$ , and  $NP_y$  are the number of processors in the vertical and horizontal directions, respectively. In each figure, the vertical axis is the computing time per time step  $t$  multiplied by NP and divided by total work size (i.e., number of grid points or a similar work with a logarithmic multiplier to handle the Fourier pseudospectral costs).  $N_z$  is the number of vertical levels, and  $N_x$  and  $N_y$  are the horizontal grid points.<sup>8</sup>


425 Figure 13 shows the computational time per grid point for different combinations of problem size (an example of strong scaling). For a given number of total processors NP, the symbol indicates the result found with the most optimal combination of

<sup>8</sup>In Sullivan and Patton (2008), a different scaling for horizontal effort was used because the NCAR-LES is pseudospectral:  $M_x = N_x \log N_x$  with  $N_x$  the number of grid points in the x direction, or a similar formula for the y direction. This scaling is not used here because CROCO is not pseudospectral.


MPI parallelisation or 2D decomposition after experimentation with different parallelism on that problem size. As the number of processors increases, the running time increases under the same problem size reflecting the cost associated with communication among processors. Relatedly, with the same number of processors, a low problem size can take more computing time than a high problem size. The CROCO model shows slightly worse performance per time step on small problems and a potential for better performance in both scaling and cost per time step on large problems. However, given that the timesteps allowed in the NCAR-LES are much larger for these problems than in the CROCO version due to 1) the Boussinesq approximation instead of compressible fluids avoiding limitations of the sound speed, and 2) the numerical choices made in our CROCO setup, the cost per simulated time interval tends to be six to fourteen times higher in CROCO, although may be further improved by changing the number of fast (barotropic and pseudo-acoustic) subcycles if appropriate.

Figure 14 shows computational time per grid point per slow (baroclinic) time step for a fixed amount of work per processor (an example of weak scaling). The different numbers of barotropic timesteps (NDTFAST) between each baroclinic time step have great influence on computing efficiency in this case. Most intuitively, it can be seen that the runtime of CROCO greatly increases when NDTFAST is increased, reflecting the cost of additional barotropic time step subcycling. Under weak scaling, the efficiency of the NCAR-LES decreases slightly with larger processor counts. The CROCO efficiency tends toward decreases at first, but then changes in parallelism can recoup some of the losses on high processor counts. CROCO and LES exhibit similar simulation accuracy and computational efficiency per time step. Nevertheless, in specific idealized test scenarios where compressibility and barotropic flow, for which CROCO has specialized capabilities, are not significant factors, these capabilities restrict the time step in CROCO to be six to fourteen times shorter, depending on the strength of forcing. Figure 14 shows similar speed *per time step* in NCAR-LES and CROCO, with 2 times better weak scaling in CROCO using few barotropic subcycling timesteps (NDTFAST=11) and 2 times worse weak scaling in CROCO using more barotropic subcycles (NDTFAST=65).

In the weak scaling comparison, significant experimentation using different 2D decompositions for models, different node configurations, and different CPU\_per\_node choices was carried out to optimize at each processor count and computation size. The structure of optimal processor grid distributions are not always square layouts. It is possible, but unlikely, that a more efficient configuration exists that was not tried. These aspects affect the workload per processor and also the comparison results and are the reason why some scaling results are slightly more or less efficient than expected in certain configurations.

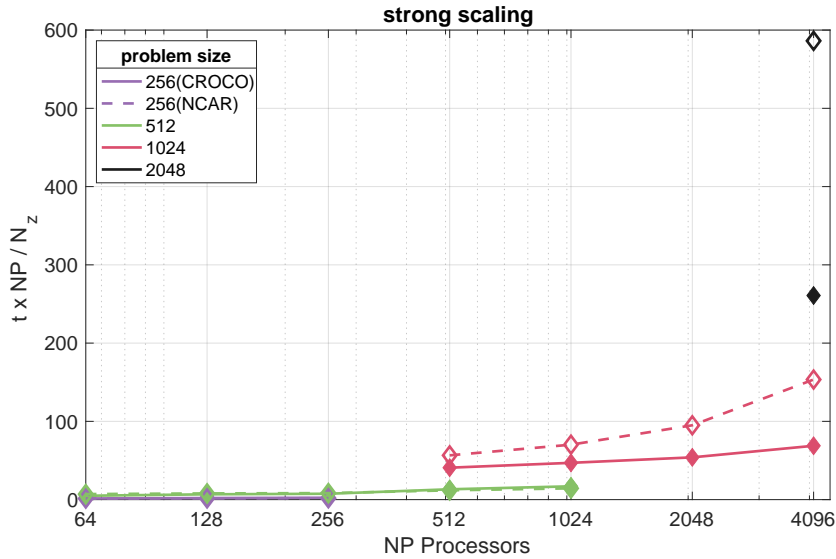

**Figure 13.** Computational time per grid point per time step for different combinations of problem size for CROCO (solid) and NCAR-LES (dashed), an example of strong scaling. NDTFAST=200. a) purple lines and symbols problem size  $256^3$ ; b) green lines and symbols  $512^3$ ; c) red lines and symbols  $1024^3$ ; and d) black symbol  $2048^3$ .

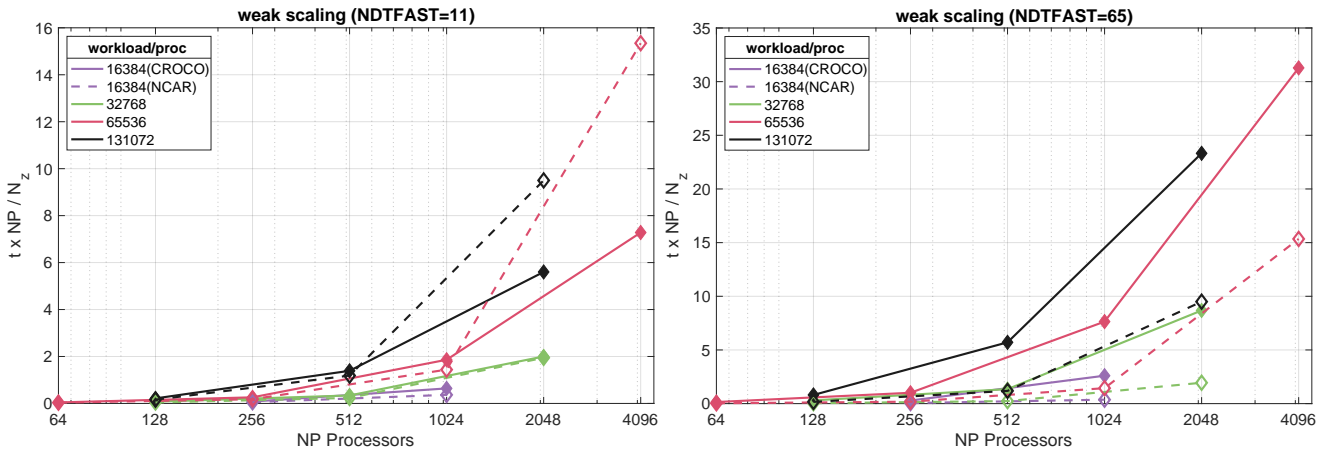

**Figure 14.** Computational time per grid point for a fixed amount of work (i.e., same number of slow time steps and grid points) per processor (an example of weak scaling) with 11 fast (barotropic and pseudo-acoustic) time steps per slow (baroclinic) time step (left) and 65 fast time steps per slow time step (right).

## 4 Conclusions

In order to evaluate the performance of the ocean model CROCO with non-hydrostatic kernels, this paper uses NCAR-LES as a benchmark for comparison. The study begins with a comparison of several different LES versions and then because of their close agreement only NCAR-LES is used elsewhere. Two comparison aspects of CROCO and NCAR-LES are simulation accuracy and computational efficiency.

In the accuracy tests, the effect of the explicit SGS parameterization, the second viscosity parameter and the speed-of-sound parameter are varied to understand these key factors impacting simulation accuracy. Once these parameters are considered, the NCAR-LES results and the CROCO results are overall within expected variations. The simulated mean flows are very similar. The only notable differences are 1) that the CROCO surface velocity tends to be slightly higher, 2) that the CROCO surface temperature tends to be slightly lower, and 3) that the CROCO pycnocline entrainment is weaker. These effects are best explained by noting that CROCO's numerical diffusion is weaker than the explicit SGS plus implicit diffusion of the NCAR model. The NCAR runs have stronger internal waves (contributing no buoyancy flux when statistically steady) and less resolved turbulent mixing. There are other minor differences, but most of them are expected due to the different SGS parameterization and limited averaging windows. Overall, the differences between CROCO and the NCAR-LES are similar to the differences between three different LES codes. The only notable difference that may not be attributable to the SGS parameterization difference is that the NCAR model runs tend to produce more internal waves where higher stratification is present, a result that is also sensitive to the sound speed setting in CROCO. As for the effect of the second (dilatation) viscosity parameter, increasing  $\lambda$  damps marginally unstable modes but allows only moderately larger time steps. Decreasing the speed of sound from  $202\text{ m s}^{-1}$  to  $3\text{ m s}^{-1}$  allowed a factor of 5 times faster simulations with negligible changes to the solution accuracy. However, this is a simulation-specific adjustment, and such a large reduction in sound speed is likely to have consequences in other simulated scenarios. A rough comparison between CROCO on a stretched vertical grid and NCAR-LES on a uniform grid finds that the stretched grid does not significantly magnify the model discrepancies in this setting.

In efficiency tests, based on the Cheyenne supercomputer platform, the difference between CROCO and NCAR-LES performance at weak and strong scaling on their computational parallelization and 2D-decomposition was found. The strong scaling represents the computational time per grid point per time step for different combinations of processors for each problem size and the weak scaling represents computational time per grid point for a fixed amount of work per processor. In both cases the computational efficiency of CROCO and NCAR-LES per time step is comparable. The number of fast subcycle time steps in CROCO affects its efficiency, but it ranged from 2 times to half as expensive as NCAR-LES per time step. To sum up, CROCO and LES are comparable on their simulation accuracy and computational efficiency per time step.

However, in these idealized test cases where the advantages of a weak compressibility approach to realistic simulations (where CROCO has specialized capabilities) are unimportant, these capabilities limit the time step in CROCO to be six to fourteen times smaller depending on the strength of forcing. CROCO optimizations are ongoing and will be documented in future publications: using the Runge-Kutta version of CROCO may allow approximately a doubling of timestep length (Lemarié et al., 2015). Avoiding the fifth-order WENO scheme also makes CROCO faster, although with possibly larger

dispersion errors. A new variant on the CROCO nonhydrostatic numerics (removing the need for solving non-hydrostatic modes at the free surface, which severely constrain the time step) is in prototype testing and should allow much faster simulations. The version of NCAR-LES used here can also be sped up by 10-15% by using a new Fourier transform package (MKL fft).

490 The only simulation result difference between CROCO and NCAR-LES that was not attributable to the SGS parameter-  
ization differences is that NCAR-LES tends to produce slightly more internal waves. The CROCO solutions were found to  
be insensitive to the values of the second viscosity and the speed of sound over wide ranges. Therefore, an artificially large  
value of the second viscosity and an artificially small value of speed of sound were used to increase the timestep stably and  
accurately as long as the speed of sound is faster than the speed of the fastest process that needs to be properly simulated  
(this constraint will be eased with the new variant currently being tested). Overall, when the additional features of CROCO are  
495 needed (e.g., nesting, complex topography, free surface, etc.), these additional costs can be justified, while in idealized settings,  
in a rectangular domain with mathematically well-defined periodic boundary conditions, the NCAR-LES is faster in arriving  
at nearly the same result.

*Code availability.* The latest CROCO ROMS code is available for download at <http://croco-ocean.org>. The latest NCAR-LES is available  
upon request to [pps@ucar.edu](mailto:pps@ucar.edu). The versions of the code compared here are available at <http://dx.doi.org/10.5281/zenodo.8431670> and <http://dx.doi.org/10.5281/zenodo.8431732>.  
500

*Data availability.* The simulation data underlying this paper are available on the permanent archive of the Brown Digital Repository at  
<https://doi.org/10.26300/vpdb-v266>.

*Author contributions.* XF, NS, QL, and BFK conceived the project. XF, NS, and QL ran the simulations. PM, FA, PS contributed expertise on the CROCO and NCAR-LES models. All authors participated in the writing. XF organized the writing contributions. This project is XF's master's degree project, and BFK is her advisor.

*Competing interests.* The authors declare no competing interests.

*Acknowledgements.* BFK and XF and computing at Brown University were supported by NSF 1655221. Time on Cheyenne was supplied by the Computational and Information Systems Laboratory at the National Center for Atmospheric Research (Computational and Information Systems Laboratory, 2019). QL acknowledges the support from the Center for Ocean Research in Hong Kong and Macau. The collaboration of NS was supported by Innovation, Information & Biologisation–Fonds (I<sup>2</sup>B-Fonds). The comments of two anonymous reviewers greatly improved the clarity of the paper.



## References

- Auclair, F., Bordois, L., Dossmann, Y., Duhaut, T., Paci, A., Ulses, C., and Nguyen, C.: A non-hydrostatic non-Boussinesq algorithm for free-surface ocean modelling, *Ocean Modelling*, 132, 12–29, <https://doi.org/10.1016/j.ocemod.2018.07.011>, 2018.
- 515 Bachman, S. D., Fox-Kemper, B., and Pearson, B.: A Scale-Aware Subgrid Model for Quasigeostrophic Turbulence, *Journal of Geophysical Research–Oceans*, 122, 1529–1554, <https://doi.org/10.1002/2016JC012265>, 2017.
- Beets, C. and Koren, B.: Large-eddy simulation with accurate implicit subgrid-scale diffusion, Department of Numerical Mathematics Rep., NM-R9601, pp. 24, 1996.
- Borges, R., Carmona, M., Costa, B., and Don, W. S.: An improved weighted essentially non-oscillatory scheme for hyperbolic conservation laws, *Journal of Computational Physics*, 227, 3191–3211, <https://doi.org/10.1016/j.jcp.2007.11.038>, 2008.
- 520 Computational and Information Systems Laboratory: Cheyenne: HPE/SGI ICE XA System (Climate Simulation Laboratory), National Center for Atmospheric Research, Boulder, Colorado, <https://doi.org/10.5065/D6RX99HX>, 2019.
- Deardorff, J. W.: Stratocumulus-Capped Mixed Layers Derived from a Three-Dimensional Model, *Boundary-Layer Meteorology*, 18, 495–527, <https://doi.org/10.1007/BF00119502>, 1980.
- 525 Debreu, L., Auclair, F., Benschila, R., Capet, X., Dumas, F., Julien, S., and Marchesiello, P.: Multiresolution in CROCO (Coastal and Regional Ocean Community model), in: EGU General Assembly Conference Abstracts, pp. EPSC2016–15 272, 2016.
- Fox, D. G. and Orszag, S. A.: Pseudospectral approximation to two-dimensional turbulence, *Journal of Computational Physics*, 11, 612–619, [https://doi.org/10.1016/0021-9991\(73\)90141-1](https://doi.org/10.1016/0021-9991(73)90141-1), 1973.
- Fox-Kemper, B., Adcroft, A., Boeing, Claus W., C. W., Chassignet, E. P., Curchitser, E., Danabasoglu, G., Eden, C., England, M. H., Gerdes, R., Greatbatch, R. J., Griffies, S. M., Hallberg, R. W., Hanert, E., Heimbach, P., Hewitt, H. T., Hill, C. N., Komuro, Y., Legg, S., Le Sommer, J., Masina, S., Marsland, S. J., Penny, S. G., Qiao, F., Ringler, T. D., Treguier, A. M., Tsujino, H., Uotila, P., and Yeager, S. G.: Challenges and Prospects in Ocean Circulation Models, *Frontiers in Marine Science*, 6, 65, <https://doi.org/10.3389/fmars.2019.00065>, 2019.
- 530 Haidvogel, D. B., Arango, H., Budgell, W. P., Cornuelle, B. D., Curchitser, E., Di Lorenzo, E., Fennel, K., Geyer, W. R., Hermann, A. J., Lanerolle, L., et al.: Ocean forecasting in terrain-following coordinates: Formulation and skill assessment of the Regional Ocean Modeling System, *Journal of computational physics*, 227, 3595–3624, 2008.
- 535 Lemarié, F., Debreu, L., Madec, G., Demange, J., Molines, J.-M., and Honnorat, M.: Stability constraints for oceanic numerical models: implications for the formulation of time and space discretizations, *Ocean Modelling*, 92, 124–148, 2015.
- Li, Q. and Fox-Kemper, B.: Assessing the Effects of Langmuir Turbulence on the Entrainment Buoyancy Flux in the Ocean Surface Boundary Layer, *Journal of Physical Oceanography*, 47, 2863 – 2886, <https://doi.org/10.1175/JPO-D-17-0085.1>, 2017.
- 540 Li, Q. and Fox-Kemper, B.: Anisotropy of Langmuir Turbulence and the Langmuir-Enhanced Mixed Layer Entrainment, *Physical Review Fluids*, 5, 013 803, <https://doi.org/10.1103/PhysRevFluids.5.013803>, 2020.
- Lilly, D. K.: On the numerical simulation of buoyant convection, *Tellus*, 14, 148–172, <https://doi.org/10.3402/tellusa.v14i2.9537>, 1962.
- Marchesiello, P., Auclair, F., Debreu, L., McWilliams, J., Almar, R., Benschila, R., and Dumas, F.: Tridimensional nonhydrostatic transient rip currents in a wave-resolving model, *Ocean Modelling*, 163, 101 816, <https://doi.org/10.1016/j.ocemod.2021.101816>, 2021.
- 545 Maronga, B., Gryscha, M., Heinze, R., Hoffmann, F., Kanani-Sühring, F., Keck, M., Ketelsen, K., Letzel, M. O., Sühring, M., and Raasch, S.: The Parallelized Large-Eddy Simulation Model (PALM) Version 4.0 for Atmospheric and Oceanic Flows: Model Formulation, Recent Developments, and Future Perspectives, *Geoscientific Model Development*, 8, 2515–2551, <https://doi.org/10.5194/gmd-8-2515-2015>, 2015.

- Marshall, J., Hill, C., Perelman, L., and Adcroft, A.: Hydrostatic, quasi-hydrostatic, and nonhydrostatic ocean modeling, *Journal of Geophysical Research: Oceans*, 102, 5733–5752, 1997.
- 550 McWilliams, J. C.: A uniformly valid model spanning the regimes of geostrophic and isotropic, stratified turbulence: Balanced turbulence, *Journal of the atmospheric sciences*, 42, 1773–1774, 1985.
- McWilliams, J. C., Sullivan, P. P., and Moeng, C.-H.: Langmuir Turbulence in the Ocean, *Journal of Fluid Mechanics*, 334, 1–30, <https://doi.org/10.1017/S0022112096004375>, 1997.
- 555 Mellor, G. L.: Users guide for a three dimensional, primitive equation, numerical ocean model, Program in Atmospheric and Oceanic Sciences, Princeton University Princeton, NJ, 1998.
- Moeng, C.-H.: A Large-Eddy-Simulation Model for the Study of Planetary Boundary-Layer Turbulence, *Journal of Atmospheric Sciences*, 41, 2052 – 2062, [https://doi.org/10.1175/1520-0469\(1984\)041<2052:ALESMF>2.0.CO;2](https://doi.org/10.1175/1520-0469(1984)041<2052:ALESMF>2.0.CO;2), 1984.
- Monin, A. and Obukhov, A.: Basic laws of turbulent mixing in the surface layer of the atmosphere, *Contrib. Geophys. Inst. Acad. Sci. USSR*, 151, e187, 1954.
- 560 Orszag, S. A.: On the Elimination of Aliasing in Finite-Difference Schemes by Filtering High-Wavenumber Components, *Journal of Atmospheric Sciences*, 28, 1074 – 1074, [https://doi.org/10.1175/1520-0469\(1971\)028<1074:OTEOAI>2.0.CO;2](https://doi.org/10.1175/1520-0469(1971)028<1074:OTEOAI>2.0.CO;2), 1971.
- Raasch, S. and Schröter, M.: PALM - A Large-Eddy Simulation Model Performing on Massively Parallel Computers, *Meteorologische Zeitschrift*, 10, 363–372, <https://doi.org/10.1127/0941-2948/2001/0010-0363>, 2001.
- 565 Ramadhan, A., Wagner, G., Hill, C., Campin, J.-M., Churavy, V., Besard, T., Souza, A., Edelman, A., Ferrari, R., and Marshall, J.: Oceananigans.Jl: Fast and Friendly Geophysical Fluid Dynamics on GPUs, *Journal of Open Source Software*, 5, 2018, <https://doi.org/10.21105/joss.02018>, 2020.
- Skitka, J., Marston, J. B., and Fox-Kemper, B.: Reduced-Order Quasilinear Model of Ocean Boundary-Layer Turbulence, *Journal of Physical Oceanography*, 50, 537–558, 10.1175/JPO-D-19-0149.1, 2020.
- 570 Smagorinsky, J.: General circulation experiments with the primitive equations: I. The basic experiment, *Monthly weather review*, 91, 99–164, 1963.
- Sullivan, P., McWilliams, J., and Moeng, C.: A subgrid-scale model for large-eddy simulation of planetary boundary-layer flows, *Boundary-Layer Meteorol*, 71, 247 – 276, <https://doi.org/10.1007/BF00713741>, 1994.
- Sullivan, P., McWilliams, J., and Moeng, C.: A grid nesting method for large-eddy simulation of planetary boundary-layer flows, *Boundary-Layer Meteorol*, 80, 167 – 202, <https://doi.org/10.1007/BF00119016>, 1996.
- 575 Sullivan, P. P. and Patton, E. G.: A highly parallel algorithm for turbulence simulations in planetary boundary layers: Results with meshes up to 2048<sup>3</sup>, in: 18th Symposium on Boundary Layers and Turbulence, 2008.
- Sullivan, P. P. and Patton, E. G.: The Effect of Mesh Resolution on Convective Boundary Layer Statistics and Structures Generated by Large-Eddy Simulation, *Journal of the Atmospheric Sciences*, 68, 2395 – 2415, <https://doi.org/10.1175/JAS-D-10-05010.1>, 2011.
- 580 Versteppen, R.: How Much Eddy Dissipation Is Needed to Counterbalance the Nonlinear Production of Small, Unresolved Scales in a Large-Eddy Simulation of Turbulence?, *Computers & Fluids*, 176, 276–284, <https://doi.org/10.1016/j.compfluid.2016.12.016>, 2018.
- Wedi, N. P. and Smolarkiewicz, P. K.: A framework for testing global non-hydrostatic models, *Quarterly Journal of the Royal Meteorological Society: A journal of the atmospheric sciences, applied meteorology and physical oceanography*, 135, 469–484, 2009.
- Wicker, L. J. and Skamarock, W. C.: Time-Splitting Methods for Elastic Models Using Forward Time Schemes, *Monthly Weather Review*, 130, 2088–2097, [https://doi.org/10.1175/1520-0493\(2002\)130<2088:TSMFEM>2.0.CO;2](https://doi.org/10.1175/1520-0493(2002)130<2088:TSMFEM>2.0.CO;2), 2002.
- 585