

Performance assessment of geospatial ~~Assessing~~ Groundwater Level Modelling using a 1D-CNN: Linking Model Performances to Geospatial and ~~time-series features on groundwater level forecasting with deep learning.~~ Time Series Features

Mariana Gomez^{1,2}, Maximilian Nölscher¹, Andreas Hartmann², and Stefan Broda¹

¹Federal Institute for Geosciences and Natural Resources, Berlin, Germany

²Institute of Groundwater Management, TU Dresden, Dresden, Germany

Correspondence: M.Gomez (mariana.gomezospina@bgr.de)

Abstract. Groundwater level (GWL) forecasting with machine learning has been widely studied due to its generally accurate results and little input data requirements. Furthermore, machine learning models for this purpose ~~are~~ can be set up and trained ~~in a short time when~~ quickly compared to the effort required for process-based numerical models. Despite ~~the high performance of models obtained~~ high performance at specific locations, applying the same model architecture to multiple sites across a regional area ~~might lead to contrasting accuracies. Likely causalities of~~ can lead to varying accuracies. The reasons behind this discrepancy in model performance have been ~~barely scarcely~~ examined in previous studies. Here, we ~~investigate the link~~ explore the relationship between model performance and the ~~effects of geospatial site~~ geospatial and time series features of the sites. Using precipitation (P) and temperature (T) as predictors, we model monthly groundwater levels at approximately 500 observation wells in Lower Saxony, Germany, applying a 1-D convolutional neural network (CNN) with a fixed architecture and hyperparameters tuned for each time series individually. The GWL observations range from 21 to 71 years, ~~leading to a~~ resulting in variable test and training dataset time ~~rangeranges~~ ranges. The performances are evaluated against ~~relevant~~ selected geospatial characteristics (e.g. landcover, distance to waterworks, and leaf area index) and time series features (e.g. autocorrelation, flat spots, and number of peaks) using Pearson correlation coefficients. ~~We found~~ Results indicate that model performance is negatively influenced at sites near waterworks and densely vegetated areas. Longer subsequences of GWL measurements above or below the mean negatively impact the ~~metries~~ model accuracy. Besides, GWL time series containing more irregular patterns and with a higher number of peaks ~~exhibit better metries~~ might lead to higher model performances, possibly due to a closer link with precipitation dynamics. As deep learning models are known to be black-box models missing the understanding of physical processes, our work ~~shows~~ provides new insights into ~~the degree of affectation that external physical factors have on the~~ how geospatial and time series features link to the input-output ~~relation~~ relationship of a GWL forecasting model.

keywords: Groundwater levels, ~~deep learning, 1D-CNN, features,~~ forecast

1 Introduction

Global water use increases, aggravated by climate change in current water-stressed areas and generating future stress in regions of abundant supply (UNESCO, 2022). Under these situations, groundwater is seen as a solution to ensure water supply, accounting for approximately 25% of the global freshwater (UNESCO, 2022). In fact, aquifers might report a seasonal and multi-year buffer capacity, but when deficits in groundwater storage are observed, they may last much longer due to the memory effect (UNESCO, 2020). Moreover, only slight groundwater level (GWL) declines are needed to significantly affect groundwater discharges to streams (de Graaf et al., 2019). Consequently, approaches based on groundwater observation sites Understanding the dynamics of groundwater levels over time has gained greater importance in recent years as a key tool for groundwater management. This importance is driven by the link between groundwater discharges to streams, where even slight declines can significantly affect the environment, as highlighted by de Graaf et al. (2019). Various modeling approaches are valuable for estimating groundwater stress in the near levels in both the short and long term. This allows identifying These approaches allow for the identification of over-exploitation based on depletion trends (Daliakopoulos et al., 2005), increasing the knowledge about enhance our knowledge of water availability for drinking water supply and agricultural irrigation (Taka-fuji et al., 2019), and delineating help delineate potential soil subsidence zones due to extremely low groundwater levels in connection associated with droughts and water abstraction (Xu et al., 2008). Furthermore, understanding these dynamics is crucial for sustainable groundwater management in the face of climate change and increasing water demands (Famiglietti, 2014).

Physical and numerical approaches have been widely used as the primary tool to study GWL (Goderniaux et al., 2015). However, achieving a desired model calibration/validation requires extensive physical knowledge of the study area and large volumes of data related to the aquifer properties, geology, and topography, among others. In the last two decades, many publications have shown that data-driven models are simpler and faster to develop and provide more accurate results than physical or numerical models under certain conditions (Tao et al., 2022; Malik and Bhagwat, 2021; Ahmadi et al., 2022). Data-driven models using machine learning (ML) techniques such as artificial neural networks (ANNs) have proven their suitability for GWL forecasting (Wunsch et al., 2022) and the ability to capture the non-linearity of the aquifer's dynamics, although at the expense of having a physical understanding of the process. Many studies address the former challenge by applying explainable AI methods such as SHAP to elucidate the input-output non-linear dynamics (Chakraborty et al., 2021; Zhang et al., 2023; Liu et al., 2022). In particular, ANN are suitable for solving groundwater-related problems on a regional scale due to their low dependency on field data accessibility. Many ANN approaches have been successfully implemented, and recent developments in the field of deep learning (DL) promise a significant improvement of already existing prediction approaches. High overall performances have been obtained through ANNs techniques including feed-forward neural network (FFNN) (Roshni et al., 2020), long short-term memory (LSTM) (Wunsch et al., 2021), and convolutional neural networks (CNN) models (Mohanty et al., 2015; Ahmadi et al., 2022 ; Wunsch et al., 2022). Besides DL techniques, shallow recurrent networks such as non-linear auto-regressive networks with exogenous input (NARX) are proven to be useful for modelling a wide variety of dynamic systems (Guzman et al., 2017; Zanotti et al., 2019; Fabio et al., 2022). Regarding accuracy and calculation speed, the CNN models outperform the LSTM. NARX models performed, on average, better than CNN (Wunsch et al., 2021), mainly because NARX models capture temporal dependencies on groundwater. However, the CNN model has been shown to be faster with only

a slightly lower accuracy ([Wunseh et al., 2020](#)). [Wunsch et al., 2021](#)). [Most groundwater modeling has traditionally employed the previously described approaches as single-station models. However, recent studies \(Heudorfer et al., 2024\) have introduced a global model incorporating multiple stations and static features. Despite this advancement, the performance improvement is modest compared to the progress seen in surface water modeling \(Kratzert et al., 2024\).](#)

Most studies have successfully applied these techniques for GWL forecasting using meteorological variables as inputs. Up to date, the research focuses on a comparative analysis among different AI techniques, resulting in slight differences among models' performance (Wunsch et al., 2021) or in improving the model's accuracy by modifying its architecture (Gong et al., 2016). In many cases, disregarding site geospatial characteristics can reduce model accuracy or credibility, owing to the different responses depending on the aquifer characteristics (Kløve et al., 2013), unsaturated zone conditions, and groundwater contributing area (Rust et al., 2018). Therefore, it is known that in order to achieve more accurate results in areas influenced by natural and anthropogenic factors, river water level and human impact factors such as pumping rates should be considered as inputs (Lee et al., 2019). For instance, Gholizadeh et al. (2023) applied an LSTM model including static input features (e.g. hydraulic conductivity and soil depth) as an attempt to model ungauged locations, the authors attribute the satisfactory model performance to such inputs. [However, as highlighted by Tarasova et al. \(2024\), the lack of agreement on evaluating hydrological catchment descriptors hinders consensus on what is considered as relevant geospatial features, in particular for subsurface characterization.](#)

Since regional studies frequently lack supplementary information beyond meteorological data, this study explores the link between model performance (using only precipitation (P) and temperature (T) as inputs) vs. site-specific and time series features that might help to understand the input-output relation of a GWL DL model. Although many types of ANN structures have been developed for GWL forecasting, a 1-D CNN (LeCun et al., 2015) is applied here to evaluate the model performance due to their flexibility, calculation speed, and reliability. The model is trained, validated, and tuned individually in 505 wells distributed throughout the state of Lower Saxony, Germany. The research considers ~~the relevant and available geospatial features~~ [geospatial](#) and time series features [based on their availability and potential impact on groundwater records](#). New insights are provided about the complexity of controlling factors on the groundwater dynamics.

2 Study area and materials

2.1 Study area

The study area is located in Lower Saxony, Germany (Fig 1), where groundwater accounts for 86% of the public water supply (LSN, 2016). The groundwater bodies in this area comprise a great extension of highly productive porous aquifers and, in less proportion, fractured hard rock, and karst aquifers (LSN, 2016). The landscape is mainly dominated by the lowlands in the northern and central regions, whereas the south is predominantly hilly and mountainous. Land use corresponds mainly to farming (~ 47%) and pasture (~ 15%), concentrated in the western and northern regions (NMUEK, 2015). The maritime influence in the coastal region affects the precipitation distribution, decreasing from the West (approx. 750mm/yr) to the East (<600 mm/yr). In contrast, the annual precipitation exceeds 1500 mm in the south (NMUEK, 2015).

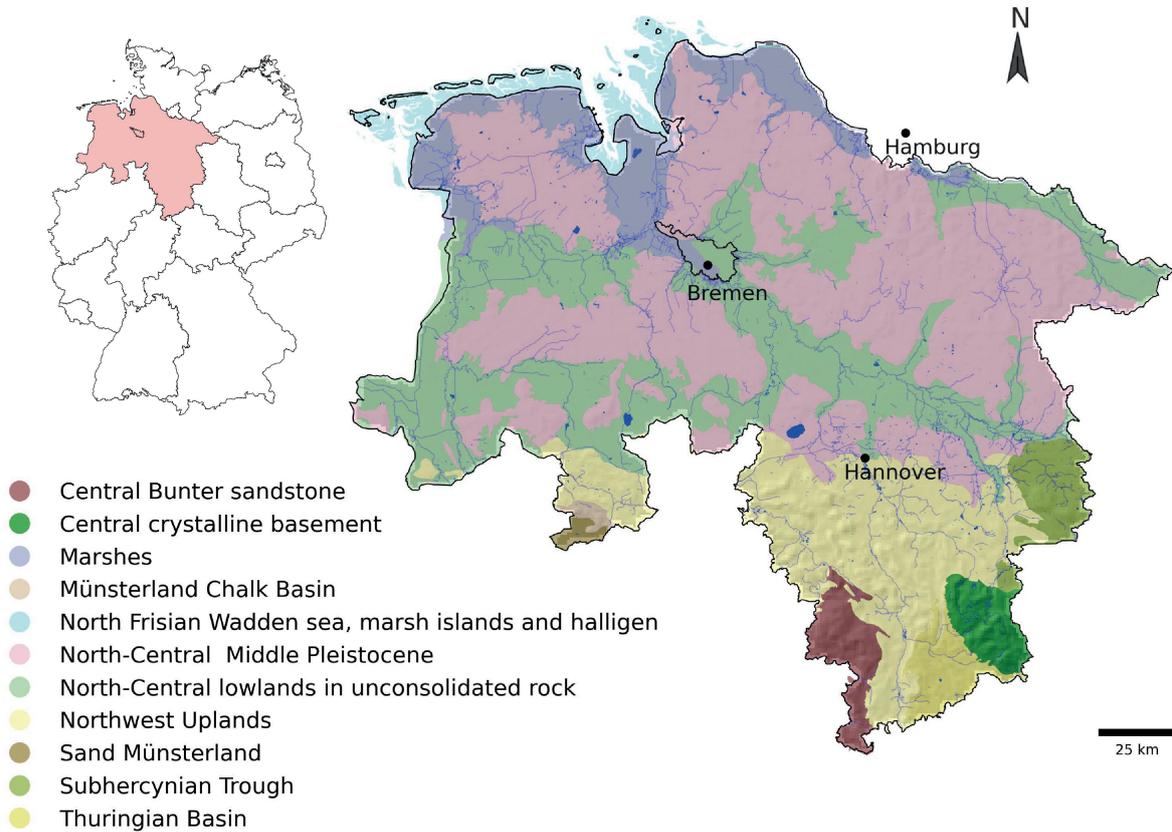


Figure 1. Hydrogeological areas of Lower Saxony. 1:500,000 (modified from LBEG (2016)) . The hydrological bodies towards the north correspond to porous aquifers (Nord- und mitteldeutsches Mittelpleistozän ([North-Central Middle Pleistocene](#)), Niederungen im nord- und mitteldeutschen Lockergesteinsgebiet ([North-Central lowlands in unconsolidated rock](#)), Nordseemarschen und Nordseeinseln und Watten ([North Frisian Wadden sea, marsh islands and halligen](#))). The south consists of fractured and karst aquifers (Mitteldeutscher Buntsandstein ([Central Bunter sandstone](#)), Mitteldeutsches Grundgebirge ([Central crystalline basement](#)), Münsterländer Kreidebecken ([Münsterland Chalk Basin](#)), Nordwestdeutsches Bergland ([Northwest Uplands](#)), Sandmünsterland ([Sand Münsterland](#)) and Subherzyne Senke ([Subhercynian Trough](#)))

90 From a broad perspective, the northern German Plain is covered up to the edge of the low mountain range by glacial deposits of varying thicknesses (LBEG, 2016), constituting a great proportion of Lower Saxony. Hard rock areas in the southern highlands are formed by sandstones and limestones (BGR, 2019a). Highly heterogeneous geological structures exist among these two groups, leading to groundwater availability at different depths with varying yields, especially in karst aquifers (LBEG, 2016). The primary pressures on the quantitative status of groundwater bodies arise from its long-term abstraction, mainly for

95 drinking water, irrigation, mining or construction activities, and long-term hydraulic measures for groundwater remediation (NMUEK, 2015).

2.2 Data

GWL observations and meteorological information are available throughout the state of Lower Saxony. Table 1 shows the data overview. The GWL is in monthly resolution with a variable time range, and historical records of meteorological variables are available in a daily resolution of 5 x 5 km. The GWL time series consists of 505 wells that are unevenly distributed, with more information available in the central region of the study area. Besides the irregular spatial distribution, there are data gaps depending on the well (Fig. 2.a), and the time range of the groundwater records varies between 21 and 71 (Fig. 2.b) years from 1950 to 2021, resulting in differences in start-end dates of time series [\(Fig. A1\)](#).

Table 1. Data availability overview.

Data	Temporal resolution	Spatial resolution	Time range	Source
Groundwater level observations	Monthly	-	Variable (1950 : 2021)	The Lower Saxony State Office for Mining, Energy and Geology (LBEG)
Precipitation and temperature	Daily	5 x 5 km	1951 : 2015	(Rauthe et al., 2013; Frick et al., 2014)

As observed in Fig. 3.a, less data is available for fractured aquifers, limiting the interpretation in terms of different hydro-geological units. This uneven spatial distribution of the wells reflects the differences in hydraulic properties between porous and fractured aquifers. In the latter, water primarily flows through conduits and cavities, creating a more complex system that could increase the construction and maintenance costs of wells, reducing their number in the area. Almost half of the wells are located in sandy-gravel material (Fig. 3.b), associated with high hydraulic conductivity and stronger variations of GWL. The other half is in finer materials but still with a high sand portion. Regarding geomorphology, the predominant category is low relief with a high to moderate soil moisture index (SMI), followed by sink areas with a high SMI (Fig. 3.c). [The SMI serve to measure how wet or dry the soil is at any given time based on the minimum and maximum moisture levels that the soil can hold \(Hunt et al., 2009\)](#). Most wells are in non-irrigated arable lands and pastures (Fig. 3.d). Overall, the study area characteristics associated with each well are relatively homogeneous regarding hydrogeology, geomorphology, and land use. Most wells are located below 100 m.a.s.l. (northern area), and higher elevations relate to wells in the southern mountainous regions. According to the filter depth, most analyzed wells relate to shallow aquifers (Fig A2).

The historical records of meteorological information in Germany are available as an observational dataset (HYRAS dataset, Rauthe et al. (2013), Frick et al. (2014)). This corresponds to gridded hydrometeorological information based on a compilation of variables across Germany and adjacent river basins (Razafimaharo et al., 2020). The dataset consists of daily precipitation (interpolated according to Rauthe et al. (2013)) and temperature from 1951 to 2015. The German Weather Service (DWD) adapted and improved the raster data based on more than 1300 stations and with a direct station-grid comparison, making the data highly reliable (Razafimaharo et al., 2020). The daily dataset is provided free of charge for academic and non-commercial purposes (DWD, n.d.).

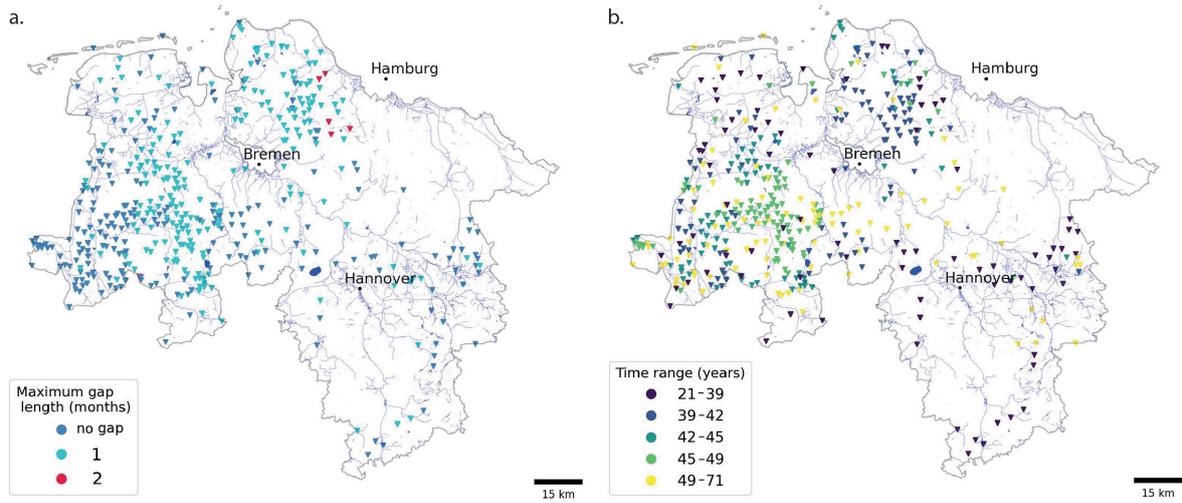


Figure 2. Location of the 505 wells with GWL time series observations used in the study. a. Maximum gap length and b. Time range of the GWL time series. Author-generated map.

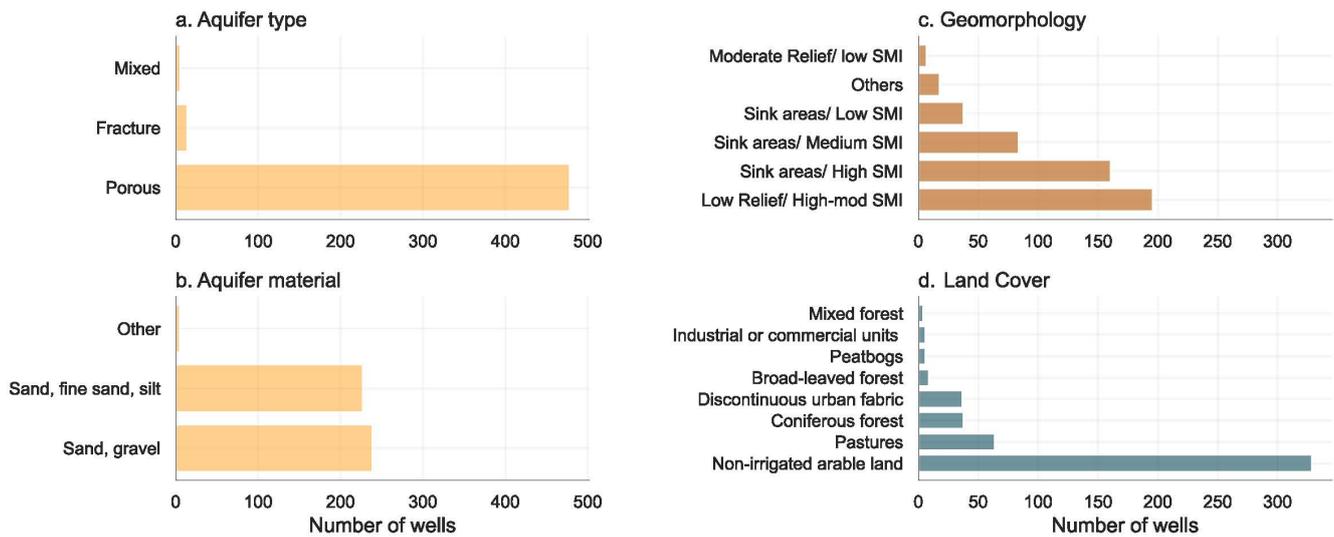


Figure 3. Bar plots showing the distribution of well characteristics in the study area: a. Aquifer type, b. Aquifer material (BGR, 2019b), c. Geomorphology (SMI: soil moisture index) (BGR, 2006), and d. land cover (CORINE Land Cover (Copernicus, 2018) associated with the studied wells.

3 Methods

Figure 4 presents the methodological flow chart. The first stage consists of pre-processing the available information, jointly with exploratory data analysis and data mining. The procedure starts with the GWL observations involving the filtering, data imputation, and jump detection steps. Simultaneously, the meteorological variables are extracted per well location and re-sampled from daily to monthly resolution. As a result, there is an input dataset per well relating GWL, P and T. In the second stage, a CNN model is implemented, validated, optimized, and tuned through a Bayesian optimization process (Snoek et al., 2012; Fernando Nogueira, 2014). The latter corresponds to an optimization method based on bayesian inference and Gaussian process to maximize the sum of performance metrics, in this case NSE and R^2 . The following step is the performance evaluation and interpretability, relating geospatial and time series features with the performance metrics (Snoek et al., 2012; Fernando Nogueira, 2014). To achieve the objectives, several Python libraries are used: Pandas 2.0 (Reback, 2020), Numpy 1.23 (Van Der Walt et al., 2011), Scipy (Virtanen et al., 2020), Matplotlib (Hunter, 2007), Geopandas 0.14 (Jordahl et al., 2020), and Tensorflow 2.7 (Abadi et al., 2015) as the most relevant throughout the process. Additional specific libraries are later mentioned at each methodological step.

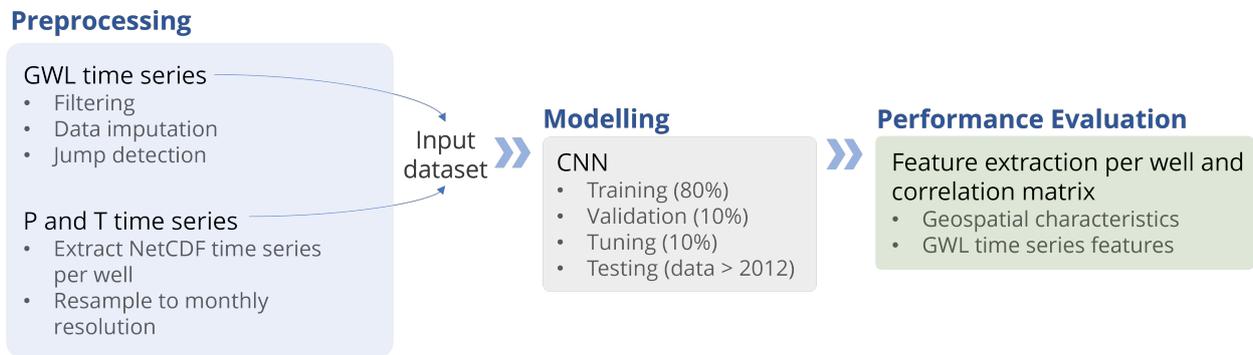


Figure 4. Methodological flow chart.

3.1 Preprocessing

The initially available GWL information consists of 962 wells, ~~but a selection is made~~. A pre-selection was done based on the categorization performed by Wriedt and NLWKN (2020), which considered the agreement between theoretical and observed hydrographs, as well as visual indications of anthropogenic influences. This process aimed to exclude wells under strong anthropogenic influences, such as pumping, favouring to better capture the dependency between ~~the~~ meteorological input features and observed groundwater levels. After applying this filter, a total of 745 wells remain. A second selection removes time series with gap lengths above two consecutive missing values, obtaining 505 wells, 241 (48%) as a complete series, 254 (50%) with one missing value, and 10 (2%) with two missing values. To provide the CNN model with continuous time series, we performed ~~a data imputation process through a~~ data imputation using Multiple Linear Regression (MLR). This

145 method is ~~only applied~~ applied only when the wells exhibit similar ~~behaviour~~ behavior in their time series, as ~~measured by the~~ determined by Euclidean distance. ~~otherwise,~~ Wells with the smallest Euclidean distances (below percentile 10th) are selected for MLR, ensuring a model R^2 score above 0.7. If the score is not met, we use the Piecewise Cubic Hermite Interpolating Polynomial (PCHIP) for gap filling (Virtanen et al., 2020; Fritsch and Butland, 1984). Overall, the time series have less than 5% gap-filled values. Additionally, jumps (sudden changes in the time series) are identified at 28 wells and might be associated
150 with measurement instruments or other technical problems (Post and von Asmuth, 2013; Retike et al., 2022). We identified the observations displaying these anomalies by finding the highest slope in the cumulative sum and removing the time series before 1990 for those wells. This is because we are aware of changes due to measurement devices around this time. Finally, to extract the meteorological information, an average of 3 x 3 pixels is used to reduce uncertainty related to the grid cell size following the suggestion of Linke (2017).

155 3.2 Modelling

The 1D-CNN structure is implemented based on Wunsch et al. (2022), ~~where inputs are split.~~ This type of network was specifically designed to process and analyze sequential data, capturing local patterns and temporal dependencies through convolutional layers. In this implementation, the input data is scaled between -1 and 1 to enhance the learning process. The inputs are divided into sequences of a defined ~~value given by the sequence length.~~ The sequences of input data length. These
160 sequences pass through a 1D convolutional layer, where a ~~window of a fixed kernel~~ fixed kernel window convolves through the data. The maximum ~~of each convolution value from each convolution operation~~ is extracted to ~~generate form~~ the max pooling layer. ~~A,~~ reducing dimensionality and highlighting the most significant features. To prevent overfitting, a Monte Carlo dropout of 50% is ~~made to avoid model overfitting. This is followed by~~ applied. Following this, a flattened layer ~~and a~~ converts the
165 pooled features into a one-dimensional array, which is then processed by a fully connected dense layer ~~that uses a~~ using the rectified linear unit (RELU ReLU) as the activation function.

The CNN model is applied to each GWL time series, ~~and consequently,~~ encompassing the phases of training, validation, optimization, and hyperparameter tuning are also carried out per well. The available groundwater data ~~before~~ prior to 2012 is split between the training (80%), validation (10%), and hyperparameter tuning (10%) dataset, ~~and the time series after 2012 is used while the 2012-2015 period serves~~ as the test set. Each subset differs depending on the time range of GWL
170 observations (~~ranging,~~ which vary from 21 to 71 years). ~~Therefore.~~ Thus, the input features, time range, and specific model parameters ~~make the model create~~ a unique representation of the GWL ~~in a particular for each~~ location. An Adam optimizer is applied with 100 training epochs, an initial learning rate of 0.001, and the early stopping of 15 patience. In this case, the loss is minimized with the mean squared error (MSE) through each epoch for the validation process. The hyperparameter tuning is done with a Bayesian optimization (Snoek et al., 2012; Fernando Nogueira, 2014) to maximize the sum of the squared Pearson
175 (R^2) and the Nash-Sutcliffe efficiency (NSE) coefficients, measuring the deviation of observed from predicted GWL over a total of observations. The hyperparameters correspond to: kernel size (fixed as 3), sequence length (1-12 months), number of filters (1-256), dense size (1-256), and batch size (1-256). Owing to the dataset's monthly resolution, the sequence length boundaries are set between 1 and 12 months, a time range that can include significant variabilities in the sub-sequences.

3.3 Performance evaluation

180 The model performance can be significantly or slightly affected, depending on the well location, by natural and anthropogenic factors, such as the distance to waterworks or watercourses, the type of land cover, and the geomorphology. Besides, the intrinsic patterns present in the observation time series might reveal external affectations on the GWL model. Table 2 describes the geospatial features considered. The selection was made based on data availability and their potential impact on groundwater records. We also performed the analysis with further geospatial features, such as distance to the surface water bodies, but no
185 statistically significant correlation with model performance was found, and therefore, the results are not shown here. Among the reported ones, the distance to the waterworks is expected to modify groundwater flow and, consequently, the GWL nearby in the surrounding wells. Here, we assume that Open Street Map (OSM, 2022) includes a significant proportion of all waterworks in the study area, but a comprehensive dataset including the locations of all waterworks or information regarding pumping rates is still missing. Regarding categorical variables, the proportion of a 1 km radius around the well is taken ~~for the~~
190 ~~most relevant categories~~ as it has been shown to adequately represent the contributing area of a monitoring site, especially when detailed information about groundwater conditions is lacking (Knoll et al., 2019). The Python packages of Tsfeatures (Yang and Hyndman, 2020) and Tsfresh (Christ et al., 2018) are used to extract multiple GWL time series features automatically. A selection is made from the long list of features (available in each package) according to their Pearson correlation coefficient in relation to the ~~metrics and~~ model performance metrics (R^2 and NSE) and the added value to the analysis ~~-(interpretability~~
195 ~~in the context of groundwater level).~~ We are aware that Pearson correlations provide linear relationships, so we also computed Spearman rank correlation coefficients. However, since Spearman rank did not yield higher correlations, we chose to continue using Pearson. Table 3 shows an overview of the selected time series features, description, range of values and guidelines of their occurrence on the GWL time series (for a detailed description of the estimation procedure, please refer to the package manual). We incorporated the Fourier power spectral density at a period of 1 year to measure the influence of annual climate
200 seasonality on the GWL. Higher values indicate a greater annual seasonality. High autocorrelation values indicate patterns constantly repeating in the time series. High stability values imply that GWL remains within a consistent range without significant variations or trends. The more flat spots, the more relatively constant values over extended periods. Approximate entropy and number of peaks measure the complexity of the time series. A high value of the former indicates that the GWL time series contains multiple irregular patterns, making it harder to predict. A higher number of peaks indicates multiple local maximums,
205 implying stronger fluctuations in GWL observations.

To evaluate the impact of external factors on the model performance, the geospatial and time series features are extracted per well and correlated with the accuracy metrics (R^2 , NSE, and bias) through the Pearson correlation coefficient. An R^2 and NSE value closer to 1 mean a higher similarity between modelled and observed GWL, whereas the closer the bias is to zero, the more similar are simulations to the observed data; negative bias refers to a model with underestimation. To enhance the
210 robustness of the correlations, we took the mean correlation coefficient after bootstrap sampling with 100 re-sampling datasets. ~~Only statistically significant correlations~~ We report only those correlations that demonstrate statistical significance, ensuring

~~they fall~~ within a 90% confidence interval ~~are reported~~ to guarantee the reliability of our findings. The main objective is to notice positive or negative effects on the model performance.

4 Results

215 4.1 Modelling

The performance per well is presented in Figure 5. According to our results, a total of 212 wells show R^2 and NSE values above 0.7 and 0.6, respectively (Fig. 5), which we would consider an acceptable model fit (Moriassi et al., 2015). Lower performance is seen mainly in the south, related to the fractured aquifers, where both metrics (R^2 and NSE) are below 0.5. The highest positive and negative bias also occurs in those hydrogeological areas. These wells correspond to the shortest data length. Most
220 of the best-performed models are found for the wells in the central region of the study area, ~~where the density of wells is higher~~. Contrarily, some models exhibit low performance near the coast regarding R^2 and NSE, with a bias is between ± 0.2 .

After ~~a visual comparison of~~ visually comparing most of the CNN models ~~and with~~ and with GWL observations, ~~an overall good agreement is visible~~ a degree of agreement can be noted between the simulated ~~GWL and the observations~~ and observed GWL (Fig. A5). Figure 6 shows examples where the optimized model performs well and where the model does not correctly
225 reproduce GWL variability. As observed, the model sometimes underestimates and overestimates the peaks and lows. However, steep peaks are mainly underestimated. In most cases, local variations ~~from the main seasonal behaviour on the time series~~ are ignored. Occasionally, in poorly performing models, the pattern of the GWL observations has been generally learned but with a strong bias (around 10% of the wells show a bias above 0.13). The well-performed cases show how the CNN model can represent low peaks for some wells. Additionally, model overfitting is low, as seen in Figure A3, along with the effects of the
230 lengths of the training, validation, and testing periods, as shown by Figure A4

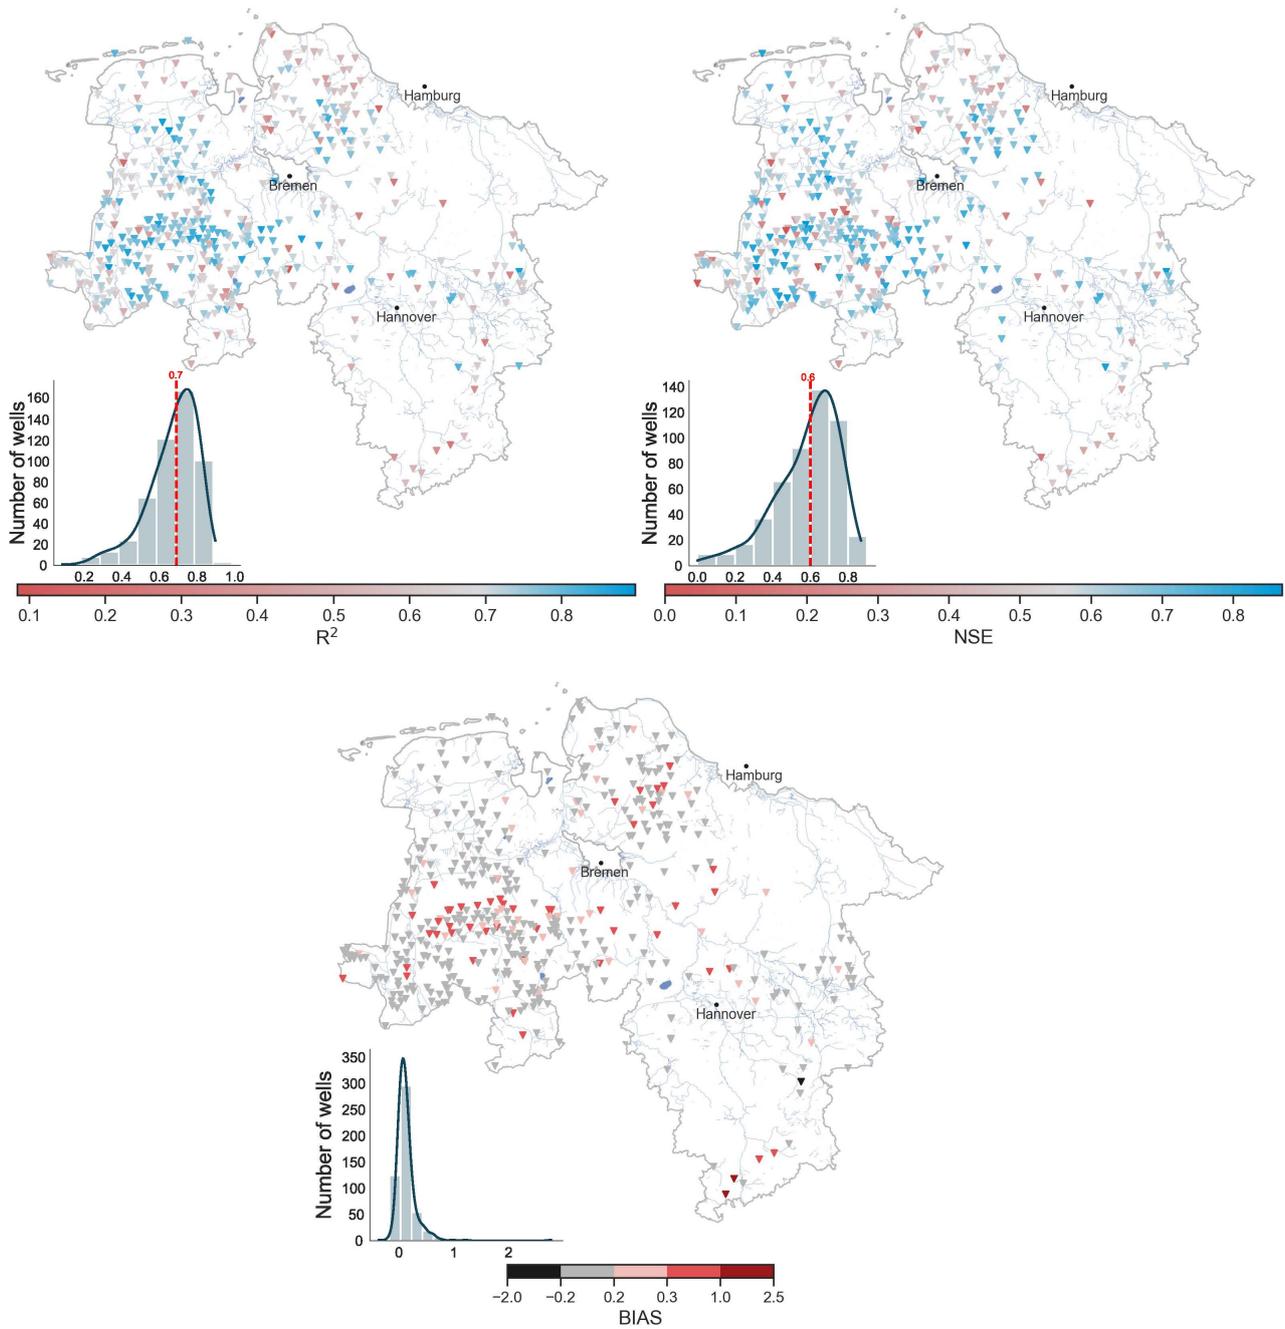


Figure 5. Spatial distribution of model performance metrics (R², NSE and Bias) per well and their respective histogram. Author-generated map.

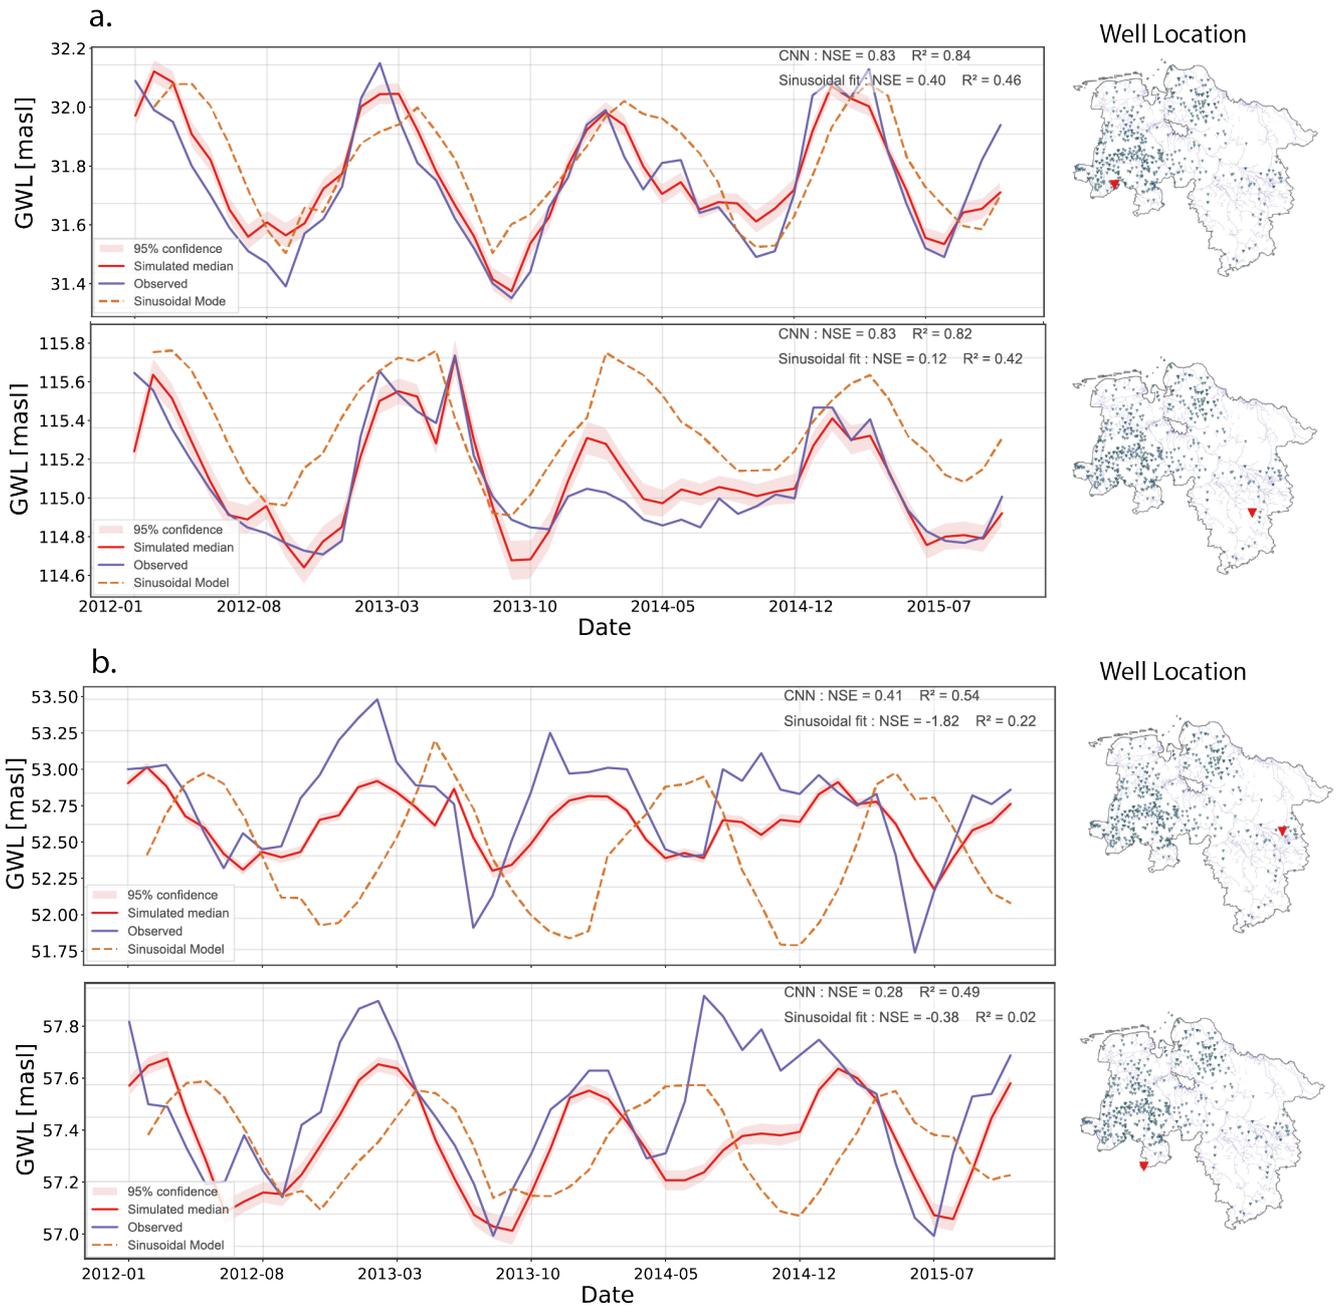


Figure 6. Examples of the optimized observations, CNN model with, and baseline model (sinusoidal curve plus precipitation trend) for cases of (a) high performance and (b) low performance.

4.2 Performance assessment

The correlation coefficients between the geospatial, and time series features and the model performance are shown in Figure 7. Only significant correlations with ~~a confidence interval level of 90%~~ confidence interval are displayed. Although ~~the~~ correlation coefficients are statistically significant, they do not exceed ~~0.62-0.53 for time series features.~~ Correlations for the geospatial features are weaker, serving in both cases more as an indication rather than providing strong evidence. One of the highest correlations is the distance to the waterworks, corresponding to 0.43 (R^2) and 0.29 (NSE). ~~The~~ Although there is no clear spatial pattern followed by R^2 ~~increases as the distance to the coastline does, whereas the bias reduces~~ and NSE, the Pearson correlation suggests that model performance improves with increasing distance from the coastline. The proportion of the most common landcover type in the study area (non-irrigated arable land) ~~relates positively to~~ suggests a positive relationship with model performance. Conversely, wells ~~with a significant surrounding area surrounded by significant areas~~ display tend to show lower correlations. Sink and low relief areas with medium to high SMI may negatively impact performance. Hilly regions ~~evidence might indicate~~ lower accuracy, while areas with ~~a~~ high drainage density or a high topographic wetness index ~~evidence a higher~~ suggest better model performance.

~~Stronger correlations, mainly negative, are found for the~~ Regarding time series features. ~~Overall, we found that autocorrelation reduces, autocorrelation may reduce~~ model performance. This might not be the case when using antecedent GWL as an additional input feature ~~when GWL will show, where GWL shows~~ the highest influence on model output (Chakraborty et al., 2021), better explaining the current state based on the past one if the time series is highly autocorrelated. Similarly, higher time series stability (higher ~~mean variance over~~ variance of the means through overlapping windows) ~~reduces the~~ may reduce model performance. Increasing flat spots and long strikes above or below the mean are negatively correlated, ~~mainly concerning particularly with~~ the NSE metric. ~~The positive~~ Positive correlations are mainly associated with ~~the~~ complexity measures such as approximate entropy and the number of peaks. The time series length positively correlates with R^2 but does not correlate with NSE. ~~Stronger~~ Higher values of the Fourier power spectral density at one year (indicating stronger annual seasonality ~~on in~~ the observed GWL) result in ~~a~~ higher model performance.

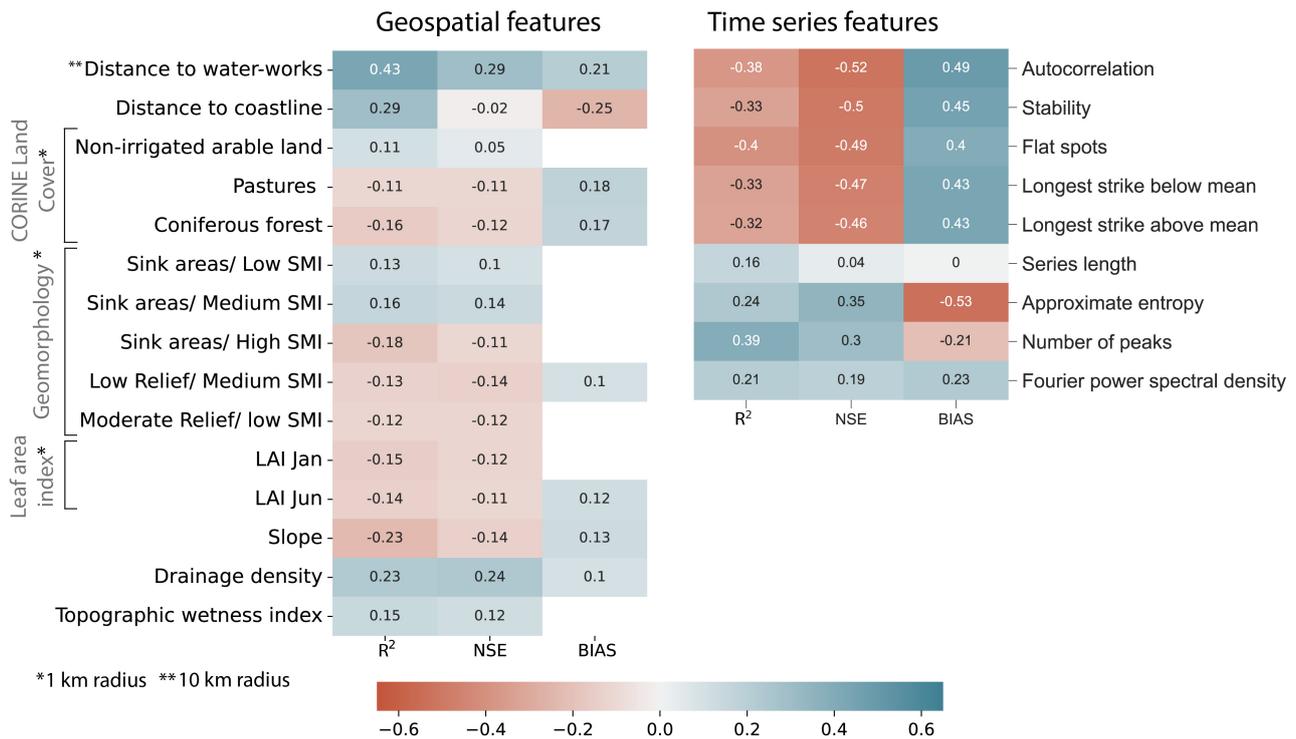


Figure 7. Pearson correlation coefficients between the geospatial features, GWL time series features, and the model performance. Significant correlations are displayed with a confidence level of 90%. Blank spaces correspond to non-significant correlations. Correlations with the distance to waterworks are done with 90 wells located in the 10 km buffer and with 50 wells located up to 25 km for the distance to the coastline.

255 5 Discussion

The analyzed wells are located in a relatively homogeneous area in terms of hydrogeology, associated with a major proportion of porous material and shallow aquifers, improving the model's capacity to express GWL only in terms of meteorological inputs (Kløve et al., 2013). There are a few wells in the fractured and karst aquifers, but those are frequently associated with greater depths (Wunsch et al., 2022). A more diverse distribution of wells is observed regarding land cover and geomorphology, resulting in distinct interactions between climate, land use, and groundwater (Kløve et al., 2013; Treidel et al., 2011), potentially influencing the model performance.

The primary source of uncertainty in the current analysis ~~lies in is~~ the inability to separate the effects of each external ~~features affecting observations (especially the geospatial features), which will greatly depend~~ feature affecting observations, particularly geospatial features. This uncertainty is highly dependent on the aquifer size (Kløve et al., 2013), ~~amount the~~ amount of available information, and its reliability. Furthermore, time resolution may introduce additional uncertainty, as the ~~magnitude of information available, and their reliability. To better interpret the non-linear behaviour between groundwater and~~

its influencing factors, some studies applied explainable AI techniques (Chakraborty et al., 2021; Zhang et al., 2023). However, this implies including all the analyzed features as inputs on the model, most of which correspond to static data (as regionally accessible information) that might not add value to the sequential model. Furthermore, since the magnitude of fluctuations of GWL varies greatly GWL fluctuations varies significantly from season to season (Taylor and Alley, 2001), ~~depending on the aquifer properties, groundwater dynamics are better observed at a weekly or even daily temporal resolution instead of the monthly time step. In addition, owing to the fact that the~~ Certain patterns in groundwater dynamics, especially in karst aquifers or those with strong secondary porosity, become more evident at weekly or daily time steps. Consequently, the use of a monthly resolution in our study may not fully capture these dynamics. Additionally, because the vast majority of the wells ~~we used in the~~ current used in this analysis are located in porous aquifers, our results are ~~mainly~~ primarily representative of these conditions.

The GWL behaves following the interaction between climate, topography, hydrogeology, and land use, among others (Earmann and Dettinger, 2011). Estimating GWL solely with meteorological variables brings uncertainty, especially in areas with more significant human impact. Additionally, there are uncertainties related to the model realizations, which, in this case, are solved by using several random initialization seeds. As a result, the model precision is generally high, and we only use the best-performed optimized models. Regarding the geospatial relations with the model performance, there are uncertainties based on the variable scale and the definition of influential radius (assumed as 1 km for the geomorphology and land use, 10 km for the waterworks) and with the reliability of the primary information.

5.1 Modelling

Overall, the CNN model was able to simulate, to a significant extent, the GWL changes for more than 200 wells with good overall performance ($R^2 > 0.7$ and $NSE > 0.6$). Thus, the remaining wells account for at least one metric with a non-acceptable performance, and in those cases, further hydrological or anthropogenic factors might influence the GWL behaviour. The Bayesian optimization currently maximizes the sum of R^2 and NSE, occasionally causing contrasting values for both metrics at specific wells. Thus, constraining both values to define model performance guarantees adequate results, even when individual accuracy is lower than acceptable criteria (Gong et al., 2016). Different combinations of metrics can also be explored against model improvements. As explained, Bayesian inference and Gaussian process (Snoek et al., 2012; Fernando Nogueira, 2014) are used to tune the hyperparameters (external parameters that can not be learned from the data). However, additional tuning strategies such as Genetic Algorithm and Grid Search have shown better results (Alibrahim and Ludwig, 2021). Therefore, modifying the optimization strategy and ~~following the standard approach of changing the~~ adjusting the network architecture can enhance the results. ~~Other~~ Alternative networks, such as LSTM or FFNN, ~~can potentially increase~~ may further improve the learning process. However, in ~~the current study, understanding the influence of geospatial and temporal features related to the GWL has priority over~~ this study, our priority is to understand the link between GWL and geospatial and time series features rather than focusing on optimizing the network architecture.

Generalizing the model inputs for all wells throughout the state influences the scores, especially at sites where GWL is not only driven by P and T. Even with a low performance, sometimes the model can learn the GWL variations but incorporates a bias. Around 10% of the wells show strong bias (>0.3), meaning the model has little or no intersections with observations.

Differences in spatial resolution between the input data (gridded P and T) and the GWL observations can cause this bias at some stations. When both metrics used for the optimization (R^2 and NSE) are high, the model is seen to fit the observations adequately. At certain times, the model misses the small spikes on the observations. However, a model that adequately represents the lower and higher periods due to dry or wet years holds higher relevance for groundwater management. ~~A low performance occurs mainly when a notorious~~ Even though the received dataset excluded highly impacted anthropogenic time series, low performance is primarily observed when a significant anthropogenic or non-periodic signal is ~~observed~~ present in the time series. ~~Every model that could not correctly~~ Models that do not accurately learn from meteorological inputs might be treated independently. Specific external forcings influencing GWL variability might be studied, and particular cases should be re-trained with the additional influencing variables. Lastly, while model overfitting appears to be small (Fig. A3), the low performance on the test data may still be attributed to overfitting at some stations.

5.2 Performance evaluation

The weak correlations between the geospatial features and the model performance can be related to the regional scale of the analysis and to the multiple drivers controlling the GWL at a specific location. Factors such as the spatial resolution of the geospatial features or the large numbers of observation pairs could also reduce the correlation coefficients (Armstrong, 2019). For instance, skewed probability distribution in the filter depth, which is below 50 m in most wells, excludes deeper aquifers from the analysis and can hinder the relation. Even though we ~~found~~ reported a directly proportional relationship between model performance and distance to waterworks, the correlation might be weaker due to non-reported abstractions. However, it is inferred that wells outside the influence area of the waterworks are more prone to be represented only by meteorological variables. Contrarily, wells located in the influence area of the waterworks system should include variables such as abstraction rates to keep the learning process stable (Lee et al., 2019)

The land cover can influence the recharge and the GWL dynamics. When the surface is sealed, the aquifer recharge decreases, and the GWL diminishes. In the same way, groundwater recharge is significantly reduced through evapotranspiration wherever dense vegetation is present, such as in a native forest (Lerner and Harris, 2009). In this case, most wells are located in non-irrigated arable land, which consists of rainfed crops, meaning a more direct response of GWL to meteorological variables is feasible. ~~Indeed, as seen~~ This supports the positive correlation suggested in Figure 7, ~~the correlation is positive when the surrounding area of the well relates to a high proportion of~~ between model performance and wells located in non-irrigated arable land. Contrarily, model performance reduces as LAI increases. LAI indicates the vegetation canopy, and therefore, it governs the interception of precipitation, largely controlling the partitioning of infiltrated water into evapotranspiration and percolation (Reichenau et al., 2016). Thus, the interception process can hamper a direct response of GWL to precipitation (Pan et al., 2011), then affecting model performance. Regarding geomorphology, areas of accumulation (sink areas) with low to medium SMI positively affect the performance but negatively when the SMI is high. Sites with higher relief and SMI present lower performance. According to Rajaveni et al. (2017), geomorphological features referring to the accumulation process (pediment and valley fill) have a good groundwater potential and are, therefore, more prone to react to meteorological inputs. Accumulation areas are also represented by risen drainage density and TWI because these areas are feasible to respond quicker

335 to meteorological inputs. We also expected the model's fitness to decrease as the slope increases since steeper areas account for higher runoff, reducing precipitation dynamics' influence on GWL observations.

As the geospatial characteristics surrounding the groundwater well influence observations, investigating the patterns encountered in the time series by extracting selected features can provide insights into model performance affectations. For instance, the recurrent presence of flat spots on the observations, seen as relatively constant values over extended periods, reduces model performance. This might indicate an aquifer that is less responsive to ~~changes in climate~~ climate variability, which is often the case with large aquifers (Kløve et al., 2013). We can apply a similar argument to the reduction of performance when there is an increase in time series stability. This means the GWL remains within a specific range of values without significant variations. Thus, even if there are upward or downward ~~trends~~ changes in precipitation, the observations of GWL do not exhibit similar patterns. Consequently, the proposed model using only P and T would fail to reproduce the GWL patterns adequately.

345 We found that the learning process reduces as long consecutive subsequences above or below the mean occur. Direct human influences such as managed aquifer recharge can keep the GWL above the average and modify its response to meteorological variables. The opposite happens when groundwater abstractions exceed recharge, and the aquifer levels drop for a more or less continuous period (Wendt et al., 2020). In both situations, the anthropogenic effects on GWL reduce the performance. Natural climate variability might also result in a similar effect, negatively affecting performance. For instance, if wetter or drier periods occur during testing but not in the training phase, the model is unlikely to learn the consequent patterns. Additionally, the time series complexity measures (approximate entropy and the number of peaks) indicate a directly proportional relationship with model performance, meaning that the more complex the GWL time series is (more irregular patterns), the better fit simulations with observations. Complex GWL time series might reflect a good response to precipitation.

Previous studies have shown little or no correlation between the time series length and the model performance (~~Wunsch et al., 2020~~ Wunsch et al., 2021). However, at least observations over decades are required to cover groundwater dynamics due to climate variability (Taylor and Alley, 2001), especially when considering a monthly temporal resolution. In this sense, the model can incorporate more information into the learning process, and model performance might increase with longer time series. However, conclusions about this relation should be further studied.

6 Conclusions

360 Fluctuations in the GWL observations are influenced by a combination of natural and anthropogenic factors, challenging the modelling of groundwater systems. An alternative to high data-required physical and numerical models is DL techniques. Many DL models have been applied to GWL modelling, but the main concern about using these models remains a lack of physical understanding. Owing to the complex system between climate, GWL, and external drivers, model performance can be directly or indirectly affected outside of what the model can explain, limited by the input features. Our study brings insights into how model performance is affected by geospatial features and intrinsic time series characteristics. We selected a 1d-CNN model to simulate monthly GWL time series per well in northern Germany, using P and T as inputs. ~~We found~~ Our results indicate low performances in wells near waterworks, an expected result as GWL are modified by pumping rates. An increased LAI or

forest land cover ~~leads~~might lead to lower performance by hindering the P and T relation with the GWL. Complex time series ~~show~~relate to a better performance, possibly linked to a closer relationship between GWL and P patterns. More extended
370 continuous GWL measurements above or below the mean negatively impact the metrics and can be associated with artificial recharge, pumping imposed in the time series, or natural events such as wetter and drier seasons. Even though only P and T are used as model inputs, the performances obtained are considered acceptable ($R^2 > 0.7$ and $NSE > 0.6$) for more than 200 wells. Nonetheless, incorporating explainable AI techniques in future studies is recommended to enhance the interpretation of the non-linear behaviour between groundwater and its influencing factors.

375 As the study covers regional areas, local variabilities in climate and human-water interactions might occur. Therefore, model performance should be evaluated at locations with greater data availability to strengthen the current research. Moreover, correlations might vary depending on the model architecture selected or the temporal resolution of GWL observations. For instance, daily resolution can better include groundwater dynamics showing stronger correlations. Our results encourage the joint analysis of physical-related characteristics and DL GWL modelling as an essential path to improve the reliability of data-driven
380 models.

Code availability. The code required to reproduce our results is available on Zenodo (Gomez, 2024)

Data availability. The raw, filtered, and gap-filled groundwater levels dataset along with the input meteorological forcings dataset are available on Zenodo (Gomez, 2024)

Appendix A: A

385 *Author contributions.* Mariana Gomez: Methodology, Visualization, Data curation, Writing – original draft. Maximilian Nölscher: Conceptualization, Methodology, Writing – review, and editing. Andreas Hartmann: Supervision, review, and editing. Stefan Broda: Supervision, review, and editing.

Acknowledgements. This work was supported by the Erasmus Mundus scholarship following the Joint master’s degree Program on Groundwater and Global Change – Impacts and Adaptation, and the FOSTER program of Technische Universität Dresden.

390 The Article Processing Charge (APC) was funded by the joint publication funds of the TU Dresden, including Carl Gustav Carus Faculty of Medicine, and the SLUB Dresden as well as the Open Access Publication Funding of the DFG.

We acknowledge the use of AI tools for assisting in the improvement of readability throughout the text and in enhancing certain portions of the code.

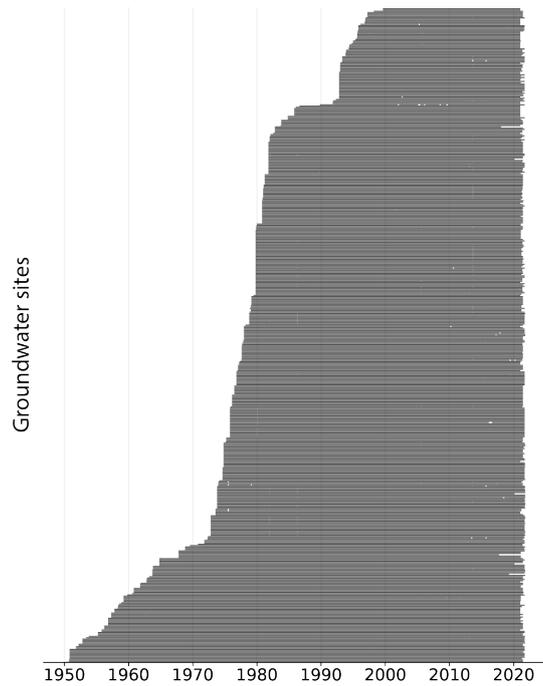


Figure A1. Time range of GWL observations. The blank spaces correspond to missing data.

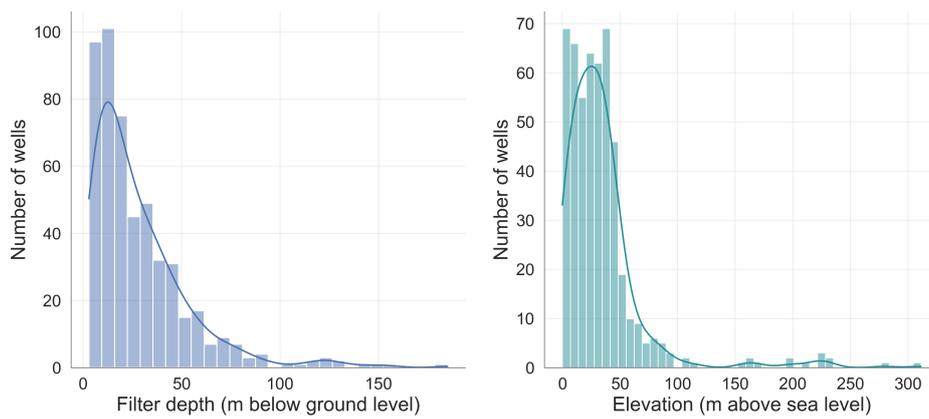


Figure A2. Filter depth (meters below ground level) and elevation in meters above sea level of all the wells in the study area.

Competing interests. No competing interests are present

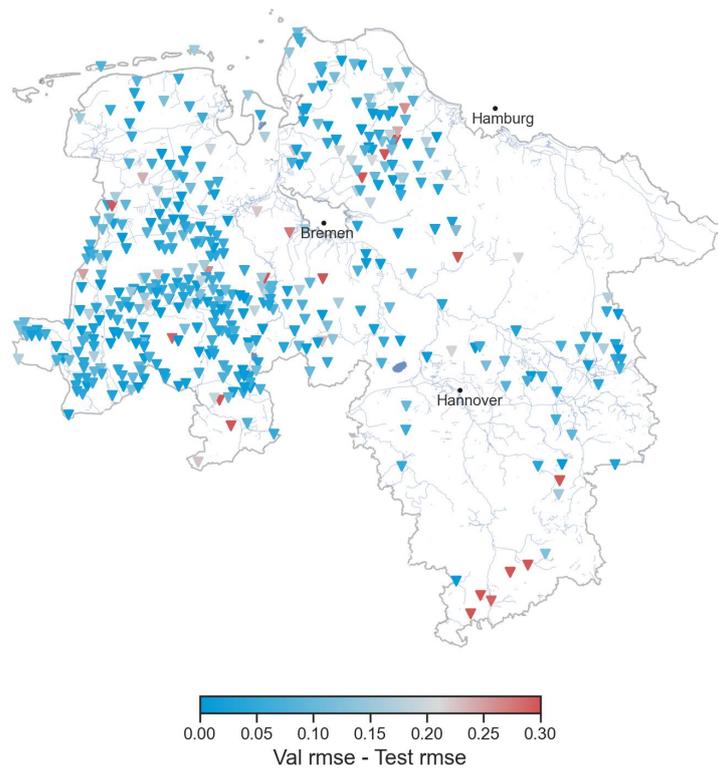


Figure A3. Difference in model performance (RMSE) between validation and testing periods.

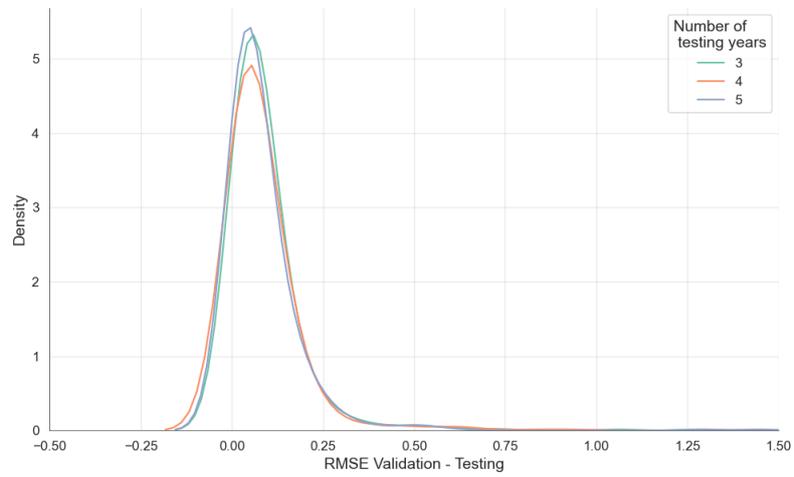


Figure A4. Model performance (RMSE) difference between validation and testing period for 3, 4 and 5 years of testing ranges.

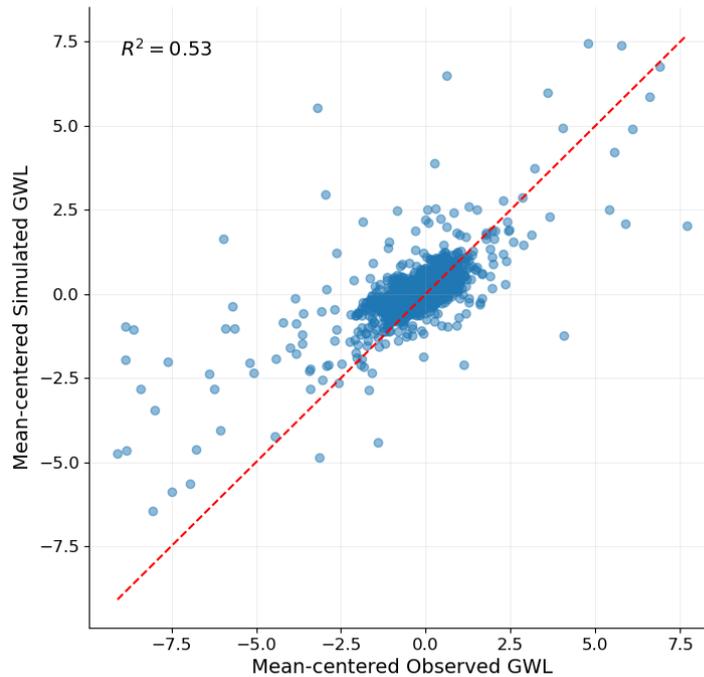


Figure A5. Scatterplot of simulated vs observed values for the 505 wells for the test period.

395 References

- Abadi, M., Agarwal, A., Barham, P., Brevdo, E., Chen, Z., Citro, C., Corrado, G., & Davis, A. (2015). TensorFlow: Large-Scale Machine Learning on Heterogeneous Systems. <https://doi.org/10.5281/zenodo.4724125>
- Ahmadi, A., Olyaei, M., Heydari, Z., Emami, M., Zeynolabedin, A., Ghomlaghi, A., Daccache, A., Fogg, G. E., & Sadegh, M. (2022). Groundwater Level Modeling with Machine Learning : A Systematic Review and Meta-Analysis, 1–22.
- 400 Alibrahim, H., & Ludwig, S. A. (2021). Hyperparameter Optimization: Comparing Genetic Algorithm against Grid Search and Bayesian Optimization. *2021 IEEE Congress on Evolutionary Computation, CEC 2021 - Proceedings*. <https://doi.org/10.1109/CEC45853.2021.9504761>
- Armstrong, R. A. (2019). Should Pearson’s correlation coefficient be avoided? *Ophthalmic and Physiological Optics*, 39(5), 316–327. <https://doi.org/10.1111/opo.12636>
- 405 Beven, K. J., & Kirkby, M. J. (1979). A physically based, variable contributing area model of basin hydrology. *Hydrological Sciences Bulletin*, 24(1), 43–69. <https://doi.org/10.1080/02626667909491834>
- BGR. (2006). Geomorphographische Einheiten von Deutschland. <https://geoportal.bgr.de/mapapps/resources/apps/geoportal/index.html?lang=de#/datasets/portal/60ab5e4e-9493-44b0-9cae-d9ce603de742>

- 410 BGR. (2019a). Geologische Übersichtskarte der Bundesrepublik Deutschland 1:250.000 (GÜK250). <https://produktcenter.bgr.de/terraCatalog/DetailResult.do?fileIdentifier=0f2e1b5b-fc02-4491-a12b-2178473f5c84>
- BGR. (2019b). Hydrogeologische Übersichtskarte 1:250.000 von Deutschland (HÜK250). <https://geoportal.bgr.de/mapapps/resources/apps/geoportal/index.html?lang=de#/datasets/portal/61ac4628-6b62-48c6-89b8-46270819f0d6>
- BKG. (2021). Digitales Geländemodell Gitterweite 1000 m (DGM1000). <https://gdz.bkg.bund.de/index.php/default/digitale-geodaten/digitale-gelandemodelle/digitales-gelandemodell-gitterweite-1000-m-dgm1000.html>
- 415 Chakraborty, D., Başağaoğlu, H., Gutierrez, L., & Mirchi, A. (2021). Explainable AI reveals new hydroclimatic insights for ecosystem-centric groundwater management. *Environmental Research Letters*, 16(11). <https://doi.org/10.1088/1748-9326/ac2fde>
- Christ, M., Braun, N., Neuffer, J., & Kempa-Liehr, A. W. (2018). Time Series Feature Extraction on basis of Scalable Hypothesis tests (tsfresh – A Python package). *Neurocomputing*, 307, 72–77. <https://doi.org/10.1016/j.neucom.2018.03.067>
- Copernicus. (2018). CORINE Land Cover 2018 (vector/raster 100 m), Europe, 6-yearly. <https://doi.org/10.2909/960998c1-1870-4e82-8051-6485205ebbac>
- 420 Copernicus. (2022). Index Corine Land Cover (clc). <https://land.copernicus.eu/content/corine-land-cover-nomenclature-guidelines/html/>
- Daliakopoulos, I. N., Coulibaly, P., & Tsanis, I. K. (2005). Groundwater level forecasting using artificial neural networks. *Journal of Hydrology*, 309(1-4), 229–240. <https://doi.org/10.1016/j.jhydrol.2004.12.001>
- de Graaf, I., Gleeson, T., Rens van Beek, L., Sutanudjaja, E., & Bierkens, M. (2019). Environmental flow limits to global groundwater pumping. *Nature*, 574, 90–94. <https://doi.org/https://doi.org/10.1038/s41586-019-1594-4>
- 425 DWD. (n.d.). Climate Data Center - Grids Germany- HYRAS dataset. https://opendata.dwd.de/climate_environment/CDC/grids_germany/daily/hyras_de/
- Earman, S., & Dettinger, M. (2011). Potential impacts of climate change on groundwater resources - A global review. *Journal of Water and Climate Change*, 2(4), 213–229. <https://doi.org/10.2166/wcc.2011.034>
- 430 Fabio, D. N., Abba, S. I., Pham, B. Q., Towfiqul Islam, A. R. M., Talukdar, S., & Francesco, G. (2022). Groundwater level forecasting in Northern Bangladesh using nonlinear autoregressive exogenous (NARX) and extreme learning machine (ELM) neural networks. *Arabian Journal of Geosciences*, 15(7). <https://doi.org/10.1007/s12517-022-09906-6>
- Famiglietti, J. S. (2014). The global groundwater crisis. <https://doi.org/10.1038/nclimate2425>
- Fernando Nogueira. (2014). Bayesian Optimization: Open source constrained global optimization tool for Python. <https://github.com/bayesian-optimization/BayesianOptimization>
- 435 Frick, C., Steiner, H., Mazurkiewicz, A., Riediger, U., Rauthe, M., Reich, T., & Gratzki, A. (2014). Central European high-resolution gridded daily data sets (HYRAS): Mean temperature and relative humidity. *Meteorologische Zeitschrift*, 23(1), 15–32. <https://doi.org/10.1127/0941-2948/2014/0560>
- Fritsch, F. N., & Butland, J. (1984). A Method for Constructing Local Monotone Piecewise Cubic Interpolants. *SIAM Journal on Scientific and Statistical Computing*, 5(2). <https://doi.org/10.1137/0905021>
- 440 Gholizadeh, H., Zhang, Y., Frame, J., Gu, X., & Green, C. T. (2023). Long short-term memory models to quantify long-term evolution of streamflow discharge and groundwater depth in Alabama. *Science of the Total Environment*, 901. <https://doi.org/10.1016/j.scitotenv.2023.165884>
- Goderniaux, P., Brouyère, S., Wildemeersch, S., Therrien, R., & Dassargues, A. (2015). Uncertainty of climate change impact on groundwater reserves - Application to a chalk aquifer. *Journal of Hydrology*, 528, 108–121. <https://doi.org/10.1016/j.jhydrol.2015.06.018>
- 445

- Gomez, M. (2024). mgomezo12/Performance_CNN_v3: Assessing Groundwater Level Modelling using a 1D-CNN: Linking Model Performances to Geospatial and Time Series Features (Version 3). Zenodo. <https://doi.org/https://doi.org/10.5281/zenodo.12531372>
- Gong, Y., Zhang, Y., Lan, S., & Wang, H. (2016). A Comparative Study of Artificial Neural Networks, Support Vector Machines and Adaptive Neuro Fuzzy Inference System for Forecasting Groundwater Levels near Lake Okeechobee, Florida. *Water Resources Management*, 30(1), 375–391. <https://doi.org/10.1007/s11269-015-1167-8>
- 450 Guzman, S. M., Paz, J. O., & Tagert, M. L. M. (2017). The Use of NARX Neural Networks to Forecast Daily Groundwater Levels. *Water Resources Management*, 31(5). <https://doi.org/10.1007/s11269-017-1598-5>
- Heudorfer, B., Liesch, T., & Broda, S. (2024). On the challenges of global entity-aware deep learning models for groundwater level prediction. *Hydrology and Earth System Sciences*, 28(3). <https://doi.org/10.5194/hess-28-525-2024>
- 455 Hunt, E. D., Hubbard, K. G., Wilhite, D. A., Arkebauer, T. J., & Dutcher, A. L. (2009). The development and evaluation of a soil moisture index. *International Journal of Climatology*, 29(5). <https://doi.org/10.1002/joc.1749>
- Hunter, J. D. (2007). Matplotlib: A 2D Graphics Environment. *Computing in Science & Engineering*, 9(3), 90–95. <https://doi.org/10.1109/MCSE.2007.55>
- Jordahl, K., Van den Bossche, J., Fleischmann, M., Wasserman, J., McBride, J., & Gerard, J. (2020). geopandas/geopandas: v0.8.1. <https://doi.org/10.5281/zenodo.3946761>
- 460 Kløve, B., Ala-Aho, P., Bertrand, G., Gurdak, J. J., Kupfersberger, H., Kvarner, J., Muotka, T., Mykrä, H., Preda, E., Rossi, P., Uvo, C. B., Velasco, E., & Pulido-Velazquez, M. (2013). Climate change impacts on groundwater and dependent ecosystems. *Journal of Hydrology*, 518(PB), 250–266. <https://doi.org/10.1016/j.jhydrol.2013.06.037>
- Knoll, L., Breuer, L., & Bach, M. (2019). Large scale prediction of groundwater nitrate concentrations from spatial data using machine learning. *Science of the Total Environment*, 668. <https://doi.org/10.1016/j.scitotenv.2019.03.045>
- 465 Kratzert, F., Gauch, M., Klotz, D., & Nearing, G. (2024). HESS Opinions: Never train an LSTM on a single basin. *Hydrol. Earth Syst. Sci. Discuss. [preprint]*.
- LBEG. (2016). Hydrogeologische Räume und Teilräume in Niedersachsen. https://www.umwelt.niedersachsen.de/startseite/themen/wasser/grundwasser/grundwasserbericht_niedersachsen/nutzung_schutz_und_uberwachung/hydrogeologischer_uberblick/
- 470 LeCun, Y., Hinton, G., & Bengio, Y. (2015). Deep learning (2015), Y. LeCun, Y. Bengio and G. Hinton. *Nature*, 521.
- Lee, S., Lee, K. K., & Yoon, H. (2019). Using artificial neural network models for groundwater level forecasting and assessment of the relative impacts of influencing factors. *Hydrogeology Journal*, 27(2), 567–579. <https://doi.org/10.1007/s10040-018-1866-3>
- Lerner, D. N., & Harris, B. (2009). The relationship between land use and groundwater resources and quality. *Land Use Policy*, 26(SUPPL. 1), 265–273. <https://doi.org/10.1016/j.landusepol.2009.09.005>
- 475 Linke, C. (2017). Leitlinien zur Interpretation regionaler Klimamodelldaten des Bund-Länder-Fachgespräches „Interpretation regionaler Klimamodelldaten“. <http://www.lfu.brandenburg.de>
- Liu, Q., Gui, D., Zhang, L., Niu, J., Dai, H., Wei, G., & Hu, B. X. (2022). Simulation of regional groundwater levels in arid regions using interpretable machine learning models. *Science of the Total Environment*, 831. <https://doi.org/10.1016/j.scitotenv.2022.154902>
- LSN. (2016). *Öffentliche Wasserversorgung und Abwasserbeseitigung* (tech. rep.). https://www.statistik.niedersachsen.de/startseite/themen/umwelt_und_energie/umwelt-und-energie-in-niedersachsen-statistische-berichte-q-i-2-178924.html
- 480 Malik, A., & Bhagwat, A. (2021). Modelling groundwater level fluctuations in urban areas using artificial neural network. *Groundwater for Sustainable Development*, 12(July 2020), 100484. <https://doi.org/10.1016/j.gsd.2020.100484>

- Mohanty, S., Jha, M. K., & Raul, S. K. (2015). Using Artificial Neural Network Approach for Simultaneous Forecasting of Weekly Groundwater Levels at Multiple Sites, 5521–5532. <https://doi.org/10.1007/s11269-015-1132-6>
- 485 Moriasi, D. N., Gitau, M. W., Pai, N., & Daggupati, P. (2015). Hydrologic and water quality models: Performance measures and evaluation criteria. *Transactions of the ASABE*, 58(6), 1763–1785. <https://doi.org/10.13031/trans.58.10715>
- NMUEK. (2015). Lower Saxony contribution to the management plans 2015 to 2021 for the Elbe, Weser, Ems and Rhine river basins.
- OSM. (2022). Download OpenStreetMap data for this region: Niedersachsen. <https://download.geofabrik.de/europe/germany/niedersachsen.html>
- 490 Pan, Y., Gong, H., Zhou, D., Li, X., & Nakagoshi, N. (2011). Impact of land use change on groundwater recharge in Guishui River Basin, China. *Chinese Geographical Science*, 21(6), 734–743. <https://doi.org/10.1007/s11769-011-0508-7>
- Pistocchi, A. (2015). *Leaf Area Index (MAPPE model)* (tech. rep.). European Commission, Joint Research Centre (JRC). <https://data.jrc.ec.europa.eu/dataset/jrc-mappe-europe-setup-d-18-lai>
- Post, V. E., & von Asmuth, J. R. (2013). Revue : Mesure du niveau piézométrique-nouvelles technologies, pièges classiques. *Hydrogeology Journal*, 21(4), 737–750. <https://doi.org/10.1007/s10040-013-0969-0>
- 495 Rajaveni, S. P., Brindha, K., & Elango, L. (2017). Geological and geomorphological controls on groundwater occurrence in a hard rock region. *Applied Water Science*, 7(3), 1377–1389. <https://doi.org/10.1007/s13201-015-0327-6>
- Rauthe, M., Steiner, H., Riediger, U., Mazurkiewicz, A., & Gratzki, A. (2013). A Central European precipitation climatology - Part I: Generation and validation of a high-resolution gridded daily data set (HYRAS). *Meteorologische Zeitschrift*, 22(3), 235–256. <https://doi.org/10.1127/0941-2948/2013/0436>
- 500 Razafimaharo, C., Krähenmann, S., Höpp, S., Rauthe, M., & Deutschländer, T. (2020). New high-resolution gridded dataset of daily mean, minimum, and maximum temperature and relative humidity for Central Europe (HYRAS). <https://doi.org/10.1007/s00704-020-03388-w/Published>
- Reback, J. e. a. (2020). pandas-dev/pandas: Pandas 1.4.2. <https://zenodo.org/record/6702671#.YwEQwHZBzt8>
- 505 Reichenau, T. G., Korres, W., Montzka, C., Fiener, P., Wilken, F., Stadler, A., Waldhoff, G., & Schneider, K. (2016). Spatial Heterogeneity of Leaf Area Index (LAI) and Its Temporal Course on Arable Land: Combining Field Measurements, Remote Sensing and Simulation in a Comprehensive Data Analysis Approach (CDAA). *PLoS ONE*, 11(7), 158451. <https://doi.org/10.1371/journal.pone.0158451>
- Retike, I., Bikše, J., Kalvāns, A., Dēliņa, A., Avotniece, Z., Zaadnoordijk, W. J., Jemeljanova, M., Popovs, K., Babre, A., Zelenkevičs, A., & Baikovs, A. (2022). Rescue of groundwater level time series: How to visually identify and treat errors. *Journal of Hydrology*, 605. <https://doi.org/10.1016/j.jhydrol.2021.127294>
- 510 Roshni, T., Jha, M. K., & Drisya, J. (2020). Neural network modeling for groundwater-level forecasting in coastal aquifers. *Neural Computing and Applications*, 32(16), 12737–12754. <https://doi.org/10.1007/s00521-020-04722-z>
- Rust, W., Holman, I., Corstanje, R., Bloomfield, J., & Cuthbert, M. (2018). A conceptual model for climatic teleconnection signal control on groundwater variability in Europe. *Earth-Science Reviews*, 177, 164–174. <https://doi.org/10.1016/j.earscirev.2017.09.017>
- 515 Snoek, J., Larochelle, H., & Adams, R. P. (2012). Practical Bayesian optimization of machine learning algorithms. *Advances in Neural Information Processing Systems*, 4.
- Takafuji, E. H. d. M., Rocha, M. M. d., & Manzione, R. L. (2019). Groundwater Level Prediction/Forecasting and Assessment of Uncertainty Using SGS and ARIMA Models: A Case Study in the Bauru Aquifer System (Brazil). *Natural Resources Research*, 28(2), 487–503. <https://doi.org/10.1007/s11053-018-9403-6>

- 520 Tao, H., Hameed, M. M., Marhoon, H. A., Zounemat-Kermani, M., Heddami, S., Sungwon, K., Sulaiman, S. O., Tan, M. L., Sa'adi, Z., Mehr, A. D., Allawi, M. F., Abba, S. I., Zain, J. M., Falah, M. W., Jamei, M., Bokde, N. D., Bayatvarkeshi, M., Al-Mukhtar, M., Bhagat, S. K., ... Yaseen, Z. M. (2022). Groundwater level prediction using machine learning models: A comprehensive review. *Neurocomputing*, 489, 271–308. <https://doi.org/10.1016/j.neucom.2022.03.014>
- Tarasova, L., Gnann, S., Yang, S., Hartmann, A., & Wagener, T. (2024). Catchment characterization: Current descriptors, knowledge gaps
525 and future opportunities. <https://doi.org/10.1016/j.earscirev.2024.104739>
- Taylor, C. J., & Alley, W. M. (2001). Ground-water-level monitoring and the importance of long-term water-level data. *US Geological Survey Circular*, (1217), 1–68.
- Treidel, H., Martin-Bordes, J. L., & Gurdak, J. J. (2011). *Climate change effects on groundwater resources: A global synthesis of findings and recommendations*.
- 530 UNESCO. (2020). The United Nations world water development report 2020: water and climate change.
UNESCO. (2022). *Water and climate change* (tech. rep.).
- Van Der Walt, S., Colbert, S. C., & Varoquaux, G. (2011). The NumPy array: A structure for efficient numerical computation. *Computing in Science and Engineering*, 13(2). <https://doi.org/10.1109/MCSE.2011.37>
- Virtanen, P., Gommers, R., Oliphant, T. E., Haberland, M., Reddy, T., Cournapeau, D., Burovski, E., Peterson, P., Weckesser, W., Bright,
535 J., van der Walt, S. J., Brett, M., Wilson, J., Millman, K. J., Mayorov, N., Nelson, A. R. J., Jones, E., Kern, R., Larson, E., ... Vázquez-Baeza, Y. (2020). SciPy 1.0: fundamental algorithms for scientific computing in Python. *Nature Methods*, 17(3), 261–272. <https://doi.org/10.1038/s41592-019-0686-2>
- Wendt, D. E., Van Loon, A. F., Bloomfield, J. P., & Hannah, D. M. (2020). Asymmetric impact of groundwater use on groundwater droughts. *Hydrology and Earth System Sciences*, 24(10). <https://doi.org/10.5194/hess-24-4853-2020>
- 540 Wriedt, G., & NLWKN. (2020). Grundwasser Grundwasserbericht Niedersachsen Sonderausgabe zur Grundwasserstandssituation in den Trockenjahren 2018 und 2019. https://www.nlwkn.niedersachsen.de/download/156169/NLWKN_2020_Grundwasserbericht_Niedersachsen_Sonderausgabe_zur_Grundwasserstandssituation_in_den_Trockenjahren_2018_und_2019_Band_41_.pdf
- Wunsch, A., Liesch, T., & Broda, S. (2020). Groundwater Level Forecasting with Artificial Neural Networks: A Comparison of LSTM, CNN and NARX. *Hydrology and Earth System Sciences Discussions*, (March 2021), 1–23. <https://doi.org/10.5194/hess-2020-552>
- 545 Wunsch, A., Liesch, T., & Broda, S. (2021). Groundwater level forecasting with artificial neural networks: A comparison of long short-term memory (LSTM), convolutional neural networks (CNNs), and non-linear autoregressive networks with exogenous input (NARX). *Hydrology and Earth System Sciences*, 25(3), 1671–1687. <https://doi.org/10.5194/hess-25-1671-2021>
- Wunsch, A., Liesch, T., & Broda, S. (2022). Deep learning shows declining groundwater levels in Germany until 2100 due to climate change. *Nat Commun*, 13. <https://doi.org/https://doi.org/10.1038/s41467-022-28770-2>
- 550 Xu, Y. S., Shen, S. L., Cai, Z. Y., & Zhou, G. Y. (2008). The state of land subsidence and prediction approaches due to groundwater withdrawal in China. *Natural Hazards*, 45(1), 123–135. <https://doi.org/10.1007/s11069-007-9168-4>
- Yang, Y., & Hyndman, R. J. (2020). tsfeatures documentation. <https://cran.r-project.org/web/packages/tsfeatures/vignettes/tsfeatures.html>
- Zanotti, C., Rotiroti, M., Sterlacchini, S., Cappellini, G., Fumagalli, L., Stefania, G. A., Nannucci, M. S., Leoni, B., & Bonomi, T. (2019). Choosing between linear and nonlinear models and avoiding overfitting for short and long term groundwater level forecasting in a
555 linear system. *Journal of Hydrology*, 578. <https://doi.org/10.1016/j.jhydrol.2019.124015>

Zhang, Q., Li, P., Ren, X., Ning, J., Li, J., Liu, C., Wang, Y., & Wang, G. (2023). A new real-time groundwater level forecasting strategy: Coupling hybrid data-driven models with remote sensing data. *Journal of Hydrology*, 625. <https://doi.org/10.1016/j.jhydrol.2023.129962>

Table 2. Overview of geospatial features considered for the performance evaluation.

Feature	Description	Source
Distance to waterworks	Distance to water supply systems up to 10 km	OSM (2022)
Distance up to to the coastline within 25 km from the coastline km	Distance to Lower Saxony coastline	OSM (2022)
CORINE land cover	Proportion in a 1 km radius of the most relevant categories: (Non-irrigated arable land, pastures, coniferous forest, Discontinuous urban fabric)	Copernicus (2018) ; Copernicus (2022)
Geomorphology	Proportion in 1 km radius of the most relevant categories: (Low Relief/medium-high SML sink	BGR2006GMK1000R2.0empty citation BGR (2006)

Table 3. Overview of time series features considered for the performance evaluation.

Feature	Description	Range of values	Implications for the GWL
Autocorrelation	Degree of similarity between a time series and a lagged version of itself. Here we used a lag of 6 time steps (6 months)	-1 – 1	Temporal dependence and persistent patterns throughout the records
Stability	Variance of the means through overlapping windows <u>of 10 values</u>	0 – ∞	GWL remains within a certain range of values without substantial variations or trends
Flat spots	The maximum number of consecutive observations within equal-sized intervals	0 – TSL	GWL relatively constant over an extended period
Longest strike below the mean	The length of the longest consecutive subsequence lower than the mean	0 – TSL	Sustained period of GWL consistently lower than the mean
Longest strike above the mean	The length of the longest consecutive subsequence higher than the mean	0 – TSL	Sustained period of GWL consistently higher than the mean
Series length	Number of observations in the time series	TSL	NA
Approximate entropy	Regularity of the time series based on the existence of patterns	0 – $+\infty$	Observations exhibit more irregular and unpredictable patterns
Number of peaks	Number of values bigger than their 2 neighbours in a 5-values subsequence	0 – (TSL-2)	Potential proxy for how directly the GWL reacts to forcings such as precipitation events. Higher values can indicate good hydraulic connection to the surface
Fourier power spectral density	Value of the power spectrum of the Fast Fourier transform at a frequency of 1/year	0 – $+\infty$	Higher values indicate a strong influence of annual climate periodicity on GWL <u>annual periodicity in GWL variability, which may be influenced by annual climatic factors</u>

*TSL- time series length