

# Investigating rough single fracture permeabilities with persistent homology

Marco Fuchs<sup>1,\*</sup>, Anna Suzuki<sup>2</sup>, Togo Hasumi<sup>2</sup>, Philipp Blum<sup>1</sup>

<sup>1</sup>Institute of Applied Geosciences, Karlsruhe Institute of Technology, Kaiserstraße 12, 76131 Karlsruhe, Germany

5 <sup>2</sup>Institute of Fluid Science, Tohoku University, 2-1-1 Katahira, Aoba-ku, Sendai, Miyagi, 980-8577, Japan

\* Corresponding author: Marco Fuchs, Email: marco.fuchs@kit.edu

## Abstract

The permeability of rock fractures is a crucial parameter for flow processes in the subsurface. In the last decades different methods were developed to investigate on permeability in fractures, such as flow through experiments, numerical flow  
10 simulations or empirical equations. In recent years, the topological method of persistent homology was also used to estimate permeability of fracture networks and porous rocks, but not for rough single fractures. Hence, we apply persistent homology analysis on a decimeter-scale, rough sandstone bedding joint. To investigate the influence of roughness, three different data sets are created to perform the analysis: (1) 200  $\mu\text{m}$  resolution, (2) 100  $\mu\text{m}$  resolution and (3) 50  $\mu\text{m}$  resolution. All estimated permeabilities were then compared to values derived by experimental air permeameter measurements and numerical flow  
15 simulation. The results reveal that persistent homology analysis is able to estimate the permeability of a single fracture even if it tends to slightly overestimate permeabilities compared to conventional methods. Previous studies using porous media showed the same overestimation trend. Furthermore, expenditure of time for persistent homology analysis as well as air permeameter measurements and numerical flow simulation was compared which showed that persistent homology analysis can be also an acceptable alternative for conventional methods in this regard.

20

## 1 Introduction

The permeability of rocks is a crucial parameter for fluid flow processes in the subsurface. While the prevailing flow processes in porous media are well understood, a different picture emerges when the flow is dominated by fractures (Suzuki et al., 2019). Although flow in geological settings controlled by fractures is occurring in both shallow aquifers (e.g. for drinking water supply) and deep reservoirs (e.g. geothermal energy production, oil and gas abstraction), fractures are often simplified as two parallel plates. In addition, due to complexity reasons, a single parameter, the hydraulic aperture, is often used to represent the permeability of a single fracture or even entire discrete fracture networks (Min et al., 2004; Blum et al., 2009; Müller et al., 2010). However, due to roughness of fracture surfaces, a single value is not sufficient to capture the flow channeling and critical flow paths (Tsang, 1992; Tsang and Neretnieks, 1998). Hence, investigations of the fracture roughness are essential, although this is more expensive in terms of costs and time (Tatone and Grasselli, 2012, 2013).

Nowadays, various methods are available to study how fluid flow is influenced by fracture roughness through single fractures. These can be divided into four major categories: (1) empirical methods, (2) experimental methods, (3) numerical methods, and (4) geometric methods.

Empirical methods are simple but also fast, cheap, and often sufficient to provide a first overview over the flow behavior of a fracture. There are different empirical models derived from flow experiments, numerical simulations or statistical models of different fracture types (Louis, 1972; Barton and Quadros, 1997; Xiong et al., 2011; Kling et al., 2017; Suzuki et al., 2017). Often, solely mechanical apertures and relative roughness depending on the standard deviation are required to calculate hydraulic apertures but also fractal dimension or Peklenik number defined as the ratio of the correlation length in x- and y-direction (Patir and Cheng, 1978; Brown, 1987).

Experimental methods provide more detailed results than empirical methods which use more simplified relations for fast practical application. The standard methodology is flow-through experiments in laboratory scale to observe flow patterns in single fractures (Brown et al., 1998; Watanabe et al., 2008; Ferer et al., 2011). In recent years, hydro-mechanical coupling (Vogler et al., 2018; Wang et al., 2021) or reactive transport are additionally performed to the exclusive investigation of flow patterns in flow-through experiments (Durham et al., 2001; Huerta et al., 2013). In addition to typical flow tests on laboratory scale, it is also possible to perform flow experiments on larger scales in the laboratory or in the field (Novakowski and

Lapcevic, 1994; Thörn and Fransson, 2015; Weede and Hötzl, 2005). Flow-through experiments allow to investigate direct fluid flow through fractures. The flow distribution and preferred flow paths can be predicted by replicating the fracture geometry in transparent materials. Beside flow-through experiments, air permeameters can be used to determine the permeability of fractures (Cheng et al., 2020; Hale et al., 2020; Hale and Blum, 2022). Air permeameters allow to measure the permeability of fractures directly on an outcrop or drilling core (Brown and Smith, 2013). In addition, it is also possible to obtain a zonal observation of the permeability, since several measurements have to be conducted along a fracture outcrop due to the measurement method (Hale et al., 2020).

Another way to investigate flow in fractures is the representation of the fracture in numerical models. For this purpose, the geometry of a fracture is either projected onto a two-dimensional surface (Pyrak-Nolte and Morris, 2000; Javanmard et al., 2021) or represented in three dimensions (Javadi et al., 2010; Xiong et al., 2011; Wang et al., 2016; Chen et al., 2021). The latter increases the computational effort considerably, but also allows a more accurate investigation of flow processes. Another major advantage is that it is possible to simulate various scenarios under different conditions, such as high confining pressures or high flow rates, which would exceed technical possible conditions in laboratory experiments. In addition, numerical models are able to consider flow effects region by region in the fracture and therefore characterize main flow paths (Marchand et al., 2020; Javanmard et al., 2021). However, the geometry of the fracture and the prevailing boundary conditions for simulations have to be precisely known in order to obtain meaningful results (Barton et al., 1985; Tatone and Grasselli, 2012).

If the focus is set on the investigation of the flow behavior and permeability distribution within the fracture, geometric methods can also be used. The Kozeny-Carman equation is well-known as a representative method for estimating flow properties from pore structures (Kozeny, 1927; Carman, 1937), and attempts have long been made to estimate permeability by extracting porosity from images without experiments or numerical simulations (Costa, 2006; Torskaya et al., 2014; Oliveira et al., 2020). More recently, attempts have been made to use machine learning or deep learning on images (Sudakov et al., 2019; Anderson et al., 2020; Araya-Polo et al., 2020; Hong and Liu, 2020; Alqahtani et al., 2021; Da Wang et al., 2021). Of course, deep learning is a powerful method, but adequate use of machine learning requires deep technical understanding, rigorous testing and sufficient amounts of training data.

70 Topological data analysis (TDA) is another way to extract information of shapes and structures from big data (Carlsson, 2009; Thiele et al., 2016). TDA is an analysis method that focuses on the structure of data within the field of algebraic topology, demonstrating particular strengths in handling data types such as images, complex structures, and networks. TDA can capture the structure of the data in a rough sense and characterize the features of connectivity and holes, therefore, ignoring noises in data and extracting important information, independent of coordinate system and number of dimensions. Persistent homology (PH), one of the most used TDAs, can capture changes and continuity of topological features by tracking algebraic descriptions called homology. This method was developed in the early 2000s (Edelsbrunner et al., 2000; Zomorodian and Carlsson, 2005) and is applied in various research fields such as materials science (Hiraoka et al., 2016), computer science (Choudhury et al., 2012), and biology (Chan et al., 2013). In geosciences, this approach has only been applied in the past decade to characterize porous rocks and to determine their permeability (Delgado-Friedrichs et al., 2014; Robins et al., 2016; Bizhani and Haeri Ardakani, 2021). Furthermore, the determination of hydro-elastic properties of porous media is possible with this method (Jiang et al., 2018). In the field of fractured rocks, persistent homology was recently also applied to study small-scale fracture networks (Suzuki et al., 2020; Suzuki et al., 2021). Based on these studies, the general application of PH for permeability estimation of fracture networks could be demonstrated. In these small-scale (millimeter to centimeter scale) studies the effect of fracture roughness was not particularly investigated (Suzuki et al., 2020; Suzuki et al., 2021). Further research is therefore 85 needed to investigate larger-scale fractured rocks, in which surface roughness has a significant effect on flow behavior. The objective of this study is the application of the persistent homology analysis on a natural, mesoscale (decimeter scale) single fracture to estimate the permeability. The focus is on the anisotropy of permeability in different flow directions as well as the influence of resolution on permeability. Therefore, three data set of the same fracture are prepared, which have different resolutions (50  $\mu\text{m}$ , 100  $\mu\text{m}$  and 200  $\mu\text{m}$ ). Finally, these results are compared with results from experimental air permeameter 90 measurements as well as numerical flow simulations.

## 2 Methods

### 2.1 Fracture Sample

The fracture sample is a natural bedding joint in a sandstone block taken from a quarry in Bebertal, Germany (Figure 1; Heidsiek et al., 2020; Hale and Blum, 2022). The sandstone is Flechtinger sandstone, an oil and gas reservoir rock in the

95 Northern German Basin. The block contains one bedding joint with a length of 120 mm in x-direction and 450 mm in y-  
direction (Figure 1). Previous studies have already characterized relevant hydro-mechanical properties of Flechtinger  
sandstone such as porosity (9-11 %), matrix and fracture permeability, Young's and bulk modulus, thermal dependencies of  
stress and strain behavior and the mineralogical composition (Frank et al., 2020; Cheng et al., 2020; Fischer et al., 2012; Hale  
and Blum, 2022; Heidsiek et al., 2020; Hale et al., 2020; Hassanzadegan et al., 2012; Blöcher et al., 2019). Of particular interest  
100 for this study is the low matrix permeability of 0.1-1 mD (Cheng et al., 2020; Hassanzadegan et al., 2012). Furthermore, the  
findings of Gutjahr et al. (2022), Hale et al. (2020) and Hale and Blum (2022) are crucial, since they performed investigations  
on fracture permeability on exactly the same fracture. Gutjahr et al. (2022) investigated on the roughness of the fracture and  
calculated the Hurst exponent for different angles. The medians of all Hurst exponents in x-direction and in y-direction are  
0.48 and 0.42, respectively. Hale et al. (2020) and Hale and Blum (2022) determined the average fracture permeability to be  
105  $5.6 \times 10^{-10} \text{ m}^2$ . In addition, they found that the center of the fracture is less permeable than the left and right side of the fracture  
(according to the front view of the sandstone block shown in Figure 1a). On the right side of the fracture, this can be explained  
by a barite vein intersecting the fracture, which was formed before the fracture opening. In the closer vicinity of the vein, the  
mechanical aperture is increased compared to central parts of the fracture. Comparing fracture and matrix permeabilities shows  
that the fracture permeability exceeds matrix permeability by more than eight orders of magnitude. Therefore, the matrix  
110 permeability is considered negligible in this study.


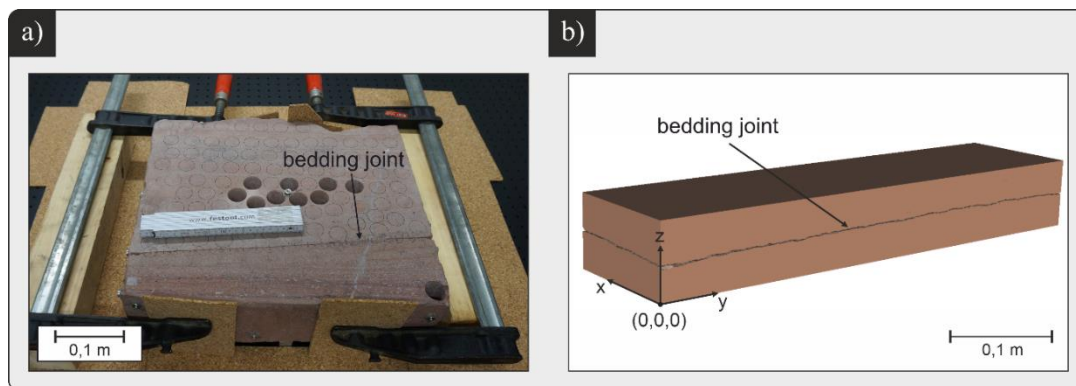


Figure 1: a) Photo of the studied sandstone block showing also the investigated bedding joint. The front surface of the real block corresponds to the y-z-plane in the digital model on the right side. b) 3D model of the bedding joint and the surrounding sandstone block.

## 115 2.2 Matching and Binary Image Generation

For data preparation, a self-developed Python code called “MatchPy” was used. This code is able to (1) match two separated and spatially uncorrelated fracture surfaces and (2) create binary cross-sections of the fracture as input for the PH analysis.

In the matching process, meshed laser scans of the bedding joint surfaces were used as input data for the Python code (Figure 2). The surfaces were scanned by a combined system of the high-resolution laser scanner Nikon ModelMaker MMDx100 and  
120 the articulated arm MCA II, on which the scanner was mounted (Nikon Metrology NV, 2010, 2018). The scanner provides a resolution of 100  $\mu\text{m}$  and a single-point-accuracy of 10  $\mu\text{m}$  (Nikon Metrology NV, 2018). The scanned point cloud was then meshed using MeshLab (Cignoni et al., 2008). Since the meshes were not spatially related, the two surfaces were roughly matched by hand to shorten the runtime of the Python code for data preparation. The exact matching was then performed stepwise by several rotation and translation steps within specified limits using the Python code. The translation limit was 3 mm  
125 total distance in each direction, in which one surface was displaced in 100  $\mu\text{m}$  steps, starting from the geometric center of the surface. In addition, there was a rotation range of  $-0.3^\circ$  to  $0.3^\circ$ , in which rotation was performed in  $0.01^\circ$  steps. The best fit was then determined by applying a minimization function of the average mechanical aperture using the arithmetic mean between the fracture surfaces.

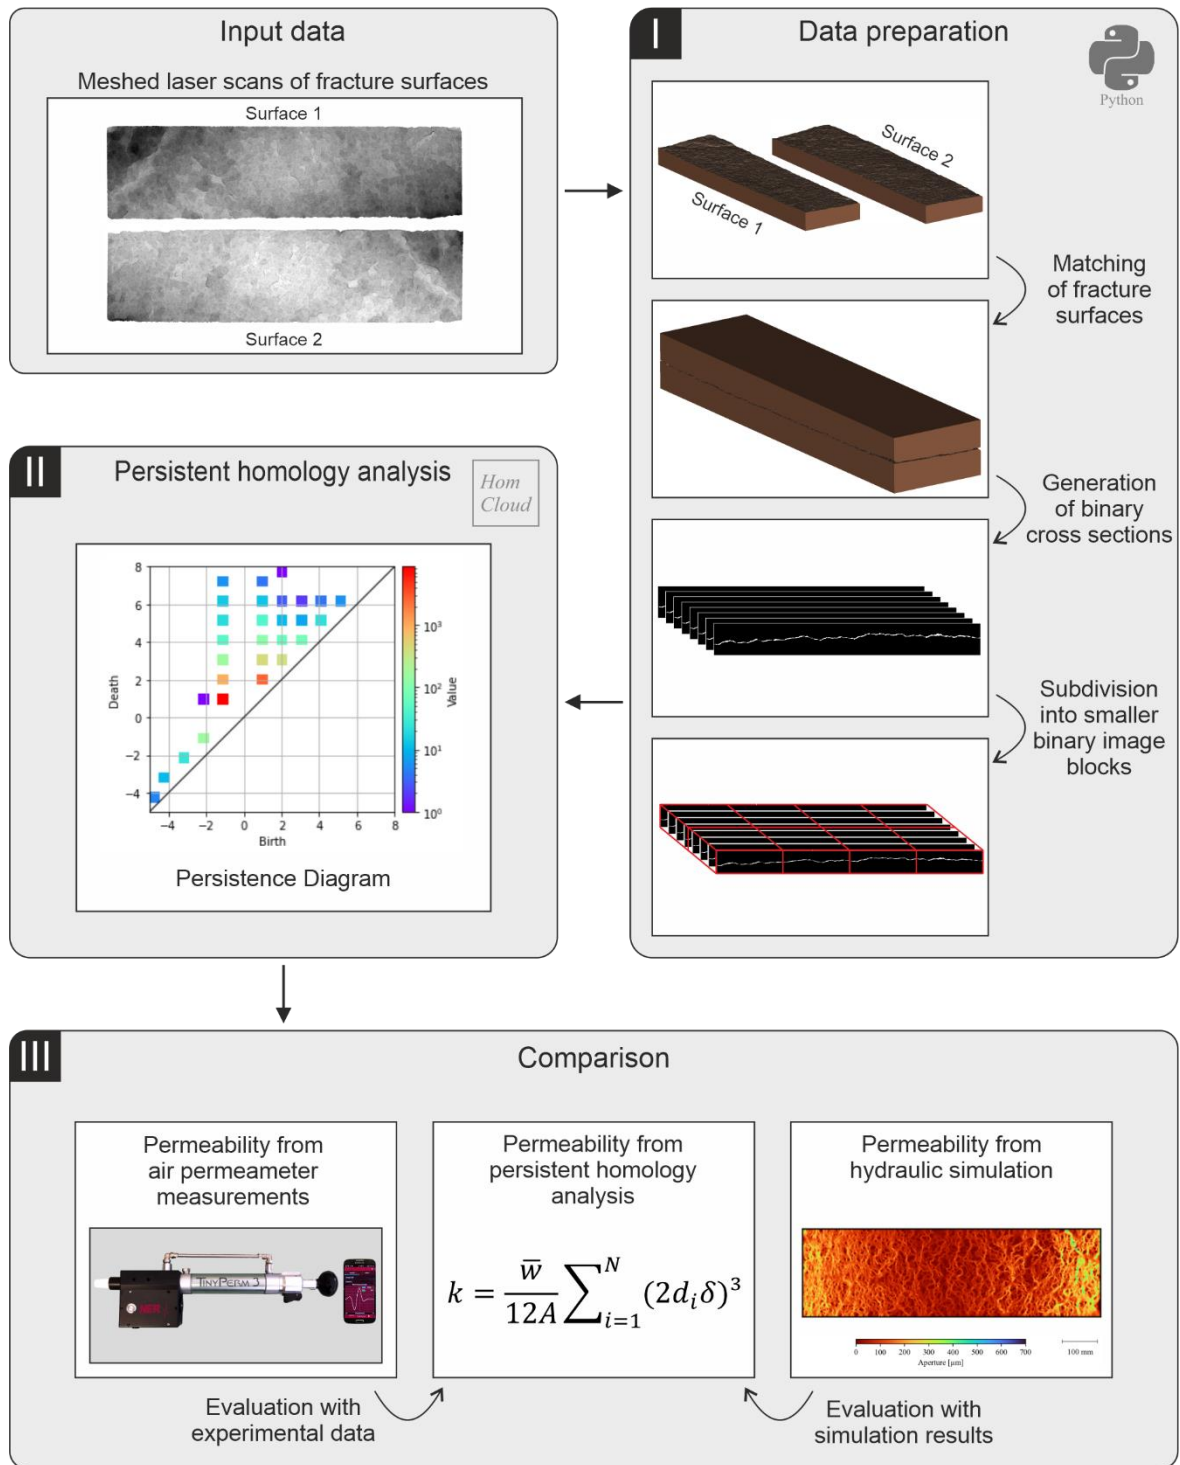

130 Figure 2: Workflow of this study with three distinct steps, which is applied on the laser scanned fracture surfaces.

### 2.3 Permeability Estimation using Persistent Homology

We apply the permeability estimation method proposed by Suzuki et al. (2021), which uses persistent homology (PH) to extract information about the flow channels from image data. The first step is to convert the fracture information prepared in Section 2.2 into a 3D binarized image datasets.

135 Three-dimensional image construction of the bedding joint and the surrounding sandstone block was generated. The image construction is a series of binary cross-sectional images of the x-z-planes along the y-axis. The size of the image area is 115 mm  $\times$  8.4 mm  $\times$  3,922 mm. Three data sets with different resolutions were generated to investigate the effect of varying resolution on permeability estimation. The first data set was created with a low resolution of 200  $\mu$ m in all spatial directions. The dataset contains 578  $\times$  1,962  $\times$  42 voxels. The second data set was generated with a medium resolution of 100  $\mu$ m in each spatial  
140 direction. The dataset contains 1,154  $\times$  3,922  $\times$  84 voxels. In the third data set, the resolution was again reduced by half to 50  $\mu$ m in all spatial directions. The dataset contains 2,308  $\times$  7,844  $\times$  169 voxels. The fracture was considered to be fully permeable with no low permeable filling or sealing. Since the matrix permeability is eight orders of magnitude lower than the fracture permeability, the matrix was considered to be fully impermeable (Cheng et al., 2020; Hassanzadegan et al., 2012). Thus, each image contains the permeable fracture in white colors (binary value = 1) and the impermeable matrix in black  
145 colors (binary value = 0).

PH analysis was then performed using HomCloud (Obayashi et al., 2022). Since HomCloud can only handle a maximum data volume of 1021<sup>3</sup> voxels in a single analysis run, the data sets were divided into several subpackages, which were processed separately (Figure 2). The dataset with low resolution (200  $\mu$ m/pixel) has 578  $\times$  1,962  $\times$  42 voxels and were split into 2 divisions in y-direction. Thus, 2 subpackages were created for the data set with low resolution, each of which contained 578  $\times$  981  $\times$  42  
150 voxels. The x-direction and y-direction for the dataset were not necessary because the length of one side of the image was < 1021 pixels. The dataset with middle resolution (100  $\mu$ m/pixel) has 1,154  $\times$  3,922  $\times$  84 voxels and were split into 2 divisions in x-direction and 4 divisions in y-direction. The dataset was divided into 8 subpackages with an average of 577  $\times$  981  $\times$  84 voxels each. The dataset with high resolution (50  $\mu$ m/pixel) has 1,154  $\times$  3,922  $\times$  84 voxels and were split into 3 divisions in x-direction and 8 divisions in y-direction. The data set was divided into 24 subpackages with an average of 769  $\times$  981  $\times$  169  
155 voxels each.

PH analysis was then performed for each subpackage. HomCloud allows to extract topological features; a 3D object can consist of three different topological features. First, 0-dimensional topological features characterise connected components such as impermeable, solid matrices without voids. Structures such as fractures or connected pores are recognized as 1-dimensional



(1D) topological features. Finally, 2-dimensional (2D) topological features are represented by enclosed pores not connecting  
160 to other flow channels. Since only fractures connected between an inlet and an outlet of the domain can serve as potential flow  
channels, this study focuses on the analysis of 1D topological features.


In HomCloud, a process called Filtration is performed to detect 1D topological features from image data. For simplicity, an  
example of a two-dimensional image is shown in Figure 3. In the binary image, the black areas are the rock matrix (binary  
value = 0), while the white areas are the void space (binary value = 1). During the filtration, the black pixels are thinned or  
165 thickened by one pixel from the boundary between the white and black pixels. The process is considered as time variation, and  
the initial image is assumed to be time 0 ( $t = 0$ ). The time change in the negative direction is to make the black pixels thin, and  
the time change in the positive direction is to make the black pixels thick. The images are stored at each time. Continuing this  
operation, if the pixels continue to be thinned (time change in the negative direction), the image becomes all white. If time is  
advanced in the positive direction from the all-white state, a channel (i.e., 1D topological feature) appears at certain times, and  
170 if time is continuously advanced in the positive direction, the channel disappears further. Note that the channel (1D topological  
feature) here is the connected shape from left to right, surrounded by black pixels. These times are called birth ( $b$ ) and death  
( $d$ ), respectively. This method is named “persistent homology” because it attempts to see how persistent topological features  
are. While other topological data analysis extracts only topological features, the advantage of PH is that by utilizing birth-  
death information, one can obtain not only topological features but also the geometric information on length.

175 In HomCloud, the output is a Persistence Diagram representing a frequency distribution of the number of birth and death pairs  
as shown in step II of Figure 2. From the definitions of birth and death, the presence of a flow channel (1D topological feature)  
in an image means that birth-time is negative and death-time is positive. Thus, the number of such pairs ( $b < 0 < d$ ) can be  
considered the number of flow channels in the image. In addition, in the case of the process of thickening the black area as  
shown in Figure 3, the fracture is closed from both sides (see the image “ $t = d$ ”). Therefore, the doubling of death and  
180 multiplying by the resolution of the image can be taken as the smallest aperture of the channel. Thus, from HomCloud, the  
frequency distribution of the number of channels present in the image and their minimum aperture widths can be obtained. It  
is important to note that the 1D topological features evaluated in PH include the aforementioned left-to-right connected shapes  
surrounded by black pixels, as well as the void ring structures that are not connected to the outside. How to remove such  
structures is described in Suzuki et al. (2021). It should also be noted that if the channels are connected like a ladder, PH may  
185 detect a large number of channels.

Suzuki et al. (2021) assumed that the channels have parallel-plate geometries and that they are parallel to each other. The permeability is estimated based on the power law as follows:

$$K = \frac{\sum_{i=1}^N w_i h_i^3}{12A} K = \sum_{i=1}^N \frac{w_i h_i^3}{12A} \quad (1)$$

190  $A$  is the surface area of the cross section of the medium and  $N$  is the number of flow channels.  $w_i$  is the depth of flow channel  $i$  and  $h_i$  is the aperture of the flow channel  $i$ . As mentioned above, the number of flow channels  $N$  was estimated from the number of birth-death pairs and the aperture  $h_i$  was estimated as  $2d_i\delta$  in PH analysis, in which  $d_i$  is the death of the flow channel  $i$  and  $\delta$  is the resolution of the images. The average of the depth of flow channel  $\bar{w}$  is determined by the cross-sectional area of the image (Suzuki et al., 2021). Thus, the above equation can be converted to the parameters from PH and image analysis.

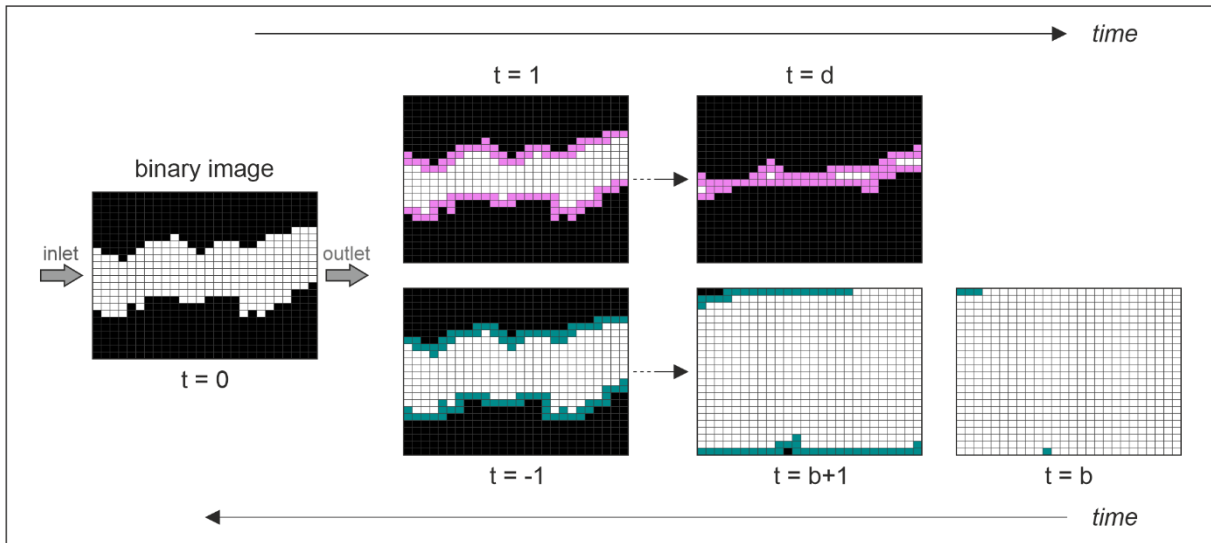

195 Figure 3: Schematic illustration of the filtration process during persistent homology analysis. The permeable area of the binary image (fracture) is thickened (cyan) and thinned (pink).

## 2.4 Experimental Measurement of the Fracture Permeability

An air permeameter was used to experimentally measure the fracture permeability. The transient air permeameter TinyPerm 3 (manufactured by New England Research Inc.) is a portable device, which is able to directly measure matrix permeabilities or  
 200 hydraulic fracture apertures on outcrops or cores (Filomena et al., 2014; Cheng et al., 2020; Hale and Blum, 2022). For this

purpose, the device is filled with air by lifting the piston and the rubber nozzle of the instrument is pressed against the fracture outlet. The measurement is started by depressing the piston in direction of the sample creating a vacuum between the fracture and the device. A microcontroller unit in the air permeameter simultaneously records the transient change in air pressure at the fracture outlet and the volume change in the device. Once the total volume of the device is compressed, the permeability is automatically determined from the recorded curve (Brown and Smith, 2013). The range of measurable permeabilities is from 1 mD to 10 D for porous rocks and hydraulic apertures of approximately 10  $\mu\text{m}$  to 2 mm for fractures (New England Research Inc., 2016). The latter corresponds to permeabilities in orders of magnitude from  $10^{-11} \text{ m}^2$  to  $10^{-7} \text{ m}^2$ .

This study uses both, existing air permeameter measurements from Hale et al. (2020) and measurements conducted in this study. In the study of Hale et al. (2020), experiments along the long edge (y-direction) of the fractured block were performed and the permeability in x-direction was measured. In addition, complementary measurements along the x-axis with permeabilities measured in y-direction were performed in the frame of this study. In total, the y-axis was divided into 21 sections, the x-axis into 4 sections. The corner areas were not included in the measurement due to breakouts from the block. Each section was measured 10 times to obtain average values. The hydraulic aperture along the y-edge in x-direction was determined to be  $81 \pm 1 \mu\text{m}$  (Hale and Blum, 2022), that along the x-edge in y-direction to be  $57 \pm 1 \mu\text{m}$ .

## 2.5 Numerical Flow Simulation

Apart from experimental air permeameter measurements, hydraulic apertures of the fracture were also determined by numerical flow simulations using the Multiphysics Object Oriented Simulation Environment (MOOSE) framework (Permann et al., 2020). Within this framework, the fluid flow through the fracture was simulated with the SaintBernard application (Schädle, 2020), which is based on the inbuilt PorousFlow module (Wilkins et al., 2020; Wilkins et al., 2021). In this application, a 3D fracture is projected on a 2D surface embedded in a 3D environment. The aperture of the fracture is assigned as a permeability parameter to each cell of the 2D mesh. The fluid flow velocity is then simulated in the lower dimension and the hydraulic aperture is calculated considering Darcy flow and the cubic law with the following equation for each cell of the mesh:

$$a_h = \sqrt[2]{\frac{12v\mu L}{\Delta p}} \quad (2)$$

In equation 2,  $a_h$  is the hydraulic aperture of the fracture,  $v$  is the fluid flow velocity,  $\mu$  is the dynamic viscosity,  $L$  is the length of the fracture (in flow direction) and  $\Delta p$  is the hydraulic pressure gradient. Further information about the numerical simulation  
225 and SaintBernard can be found in Javanmard et al. (2021).

Similar to the air permeameter measurements, numerical flow simulations were performed with fluid flow in both, x- and y-direction, to determine the permeability in each of these.

### 3 Results and Discussion


#### 3.1 Permeability Estimation from Persistent Homology Analysis

230 The prepared binary data sets were used to calculate the permeability of the fracture. The permeability was calculated in two different flow directions, for flow parallel to the x-axis and parallel to the y-axis (Figure 4). The calculated permeabilities for the 200  $\mu\text{m}$ -resolution data set are  $6.4 \times 10^{-10} \text{ m}^2$  in x-direction and  $6.2 \times 10^{-10} \text{ m}^2$  in y-direction. Using the cubic law, the calculated hydraulic apertures are 88  $\mu\text{m}$  and 86  $\mu\text{m}$ , respectively. For the data set with 100  $\mu\text{m}$  resolution, the permeabilities are  $4.4 \times 10^{-10} \text{ m}^2$  in x-direction and  $4.0 \times 10^{-10} \text{ m}^2$  in y-direction. This corresponds to hydraulic apertures of 73  $\mu\text{m}$  in x-  
235 direction and 69  $\mu\text{m}$  in y-direction. For 50  $\mu\text{m}$  resolution data set, the permeability in x-direction is  $7.0 \times 10^{-10} \text{ m}^2$  and  $3.2 \times 10^{-10} \text{ m}^2$  in y-direction, which equals hydraulic apertures of 92  $\mu\text{m}$  and 62  $\mu\text{m}$ , respectively. Comparing the three different data set shows that PH analysis for all data sets result in higher permeability in x-direction than in y-direction ( $k_x/k_y > 1.0$ ).

The  $k_x/k_y$ -ratio of the data sets with 200  $\mu\text{m}$  and 100  $\mu\text{m}$  resolution is nearly identical, 1.0 and 1.1, respectively, whereas the ratio of the 50  $\mu\text{m}$  data set shows a higher ratio of 2.2.

240 Detailed examination of the individual fracture surfaces and the matched fracture shows that the highest mechanical apertures of  $> 1 \text{ mm}$  occur mainly along the barite vein that crosses the fracture parallel to the x-direction (Figure 4). From previous studies on the fracture, it appears that this barite vein dominates the flow behavior and, thus, forms the main flow path along the fracture due to its increased mechanical aperture and lower roughness compared to other regions of the fracture (Hale et al., 2020). Hence, it serves as a preferential flow path in x-direction, whereas it acts more as a barrier or redirection for flow  
245 in y-direction. The study of Gutjahr et al. (2022) shows that, in addition to the anisotropy of the permeabilities, a slight anisotropy of the roughness can be observed. Analogous to the permeability, the Hurst exponent in x-direction is higher ( $H_x = 0.48$ ) than in y-direction ( $H_y = 0.42$ ). It is noteworthy that the ratio of the Hurst exponents ( $H_x/H_y$ ) is 1.1 and thus corresponds

well with the determined ratios for permeabilities. This is reasonable, as increased roughness tends to result in more distinct flow channels with larger mechanical apertures. Consequently, this leads to increased permeability.

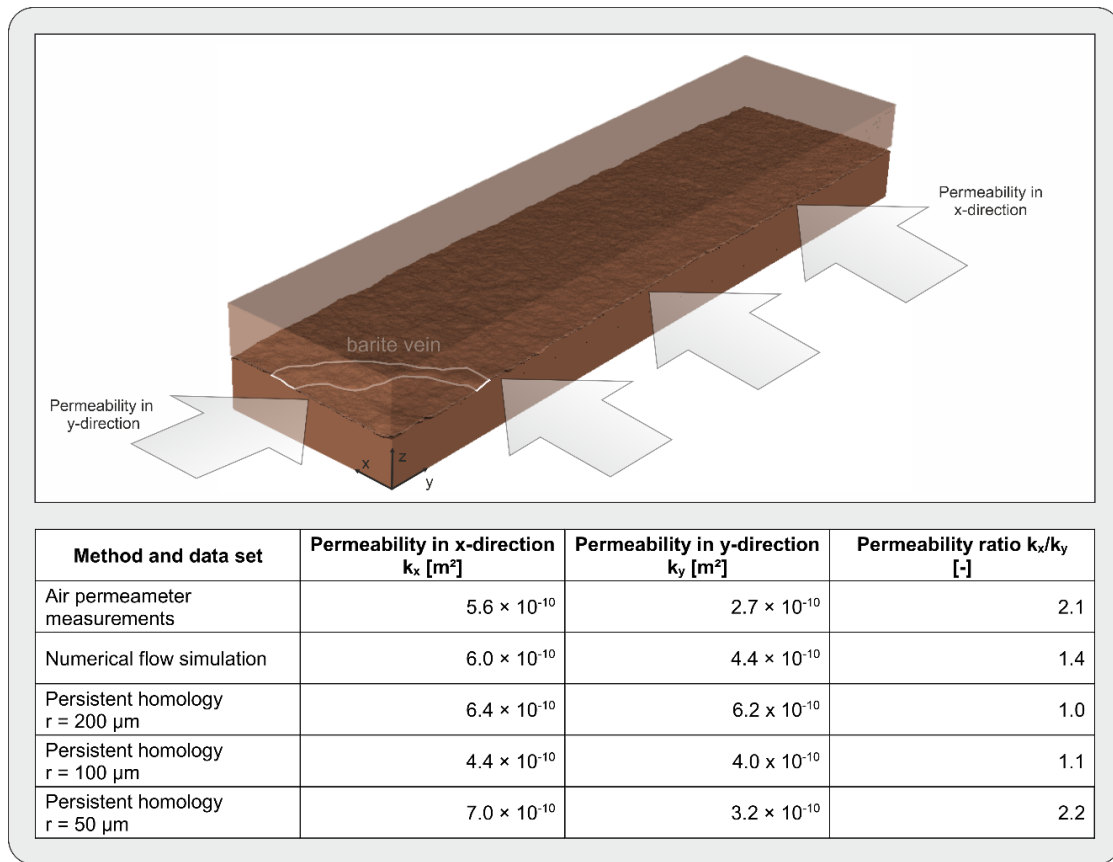

250

Figure 4: Permeability determined by air permeameter measurements, numerical flow simulations and persistent homology using data sets with resolutions of 200  $\mu\text{m}$ , 100  $\mu\text{m}$  and 50  $\mu\text{m}$ .

### 3.2 Comparison to Air Permeameter Measurements and Numerical Simulation

255

In addition to the estimation of the fracture permeability by PH, the results were also compared to permeabilities derived from alternative methods. Thus, a comparison was performed using experimental air permeameter measurements and numerical flow simulations to show the validity of the PH analysis. In Figure 4, the values for the permeability in x- and y-direction as well as the ratio of the two permeability values of air permeameter measurements and numerical simulation are also shown. All x-permeabilities differ in  $< 1.5 \times 10^{-10} \text{ m}^2$  from the experimental or numerical results. However, the permeabilities in y-

260 direction scatter slightly more. Overall, there is a good fit between PH analysis and alternative methods, which is reflected by a root mean squared error (RMSE) of  $1.5 \times 10^{-10}$  m<sup>2</sup>. Normalization with the difference between maximum and minimum of all observed permeabilities leads to a normalized root mean squared error (NRMSE) of 0.34. However, there is also the trend that the values agree increasingly better with the comparative values as the resolution of the data set increases. For example, the RMSE of x- and y-permeability between air permeameter/numerical simulation and 200  $\mu$ m resolved data set is  $2.0 \times 10^{-10}$  m<sup>2</sup>. For the 100  $\mu$ m data set, it reduces to  $1.2 \times 10^{-10}$  m<sup>2</sup> and for the 50  $\mu$ m data set, it is  $1.1 \times 10^{-10}$  m<sup>2</sup>. The NRMSE are 0.54 (200  $\mu$ m), 0.38 (100  $\mu$ m) and 0.25 (50  $\mu$ m), respectively. This trend was also shown in studies using persistent homology in porous media or fracture networks before (Moon et al., 2019; Suzuki et al., 2021). The study of Moon et al. (2019), in which fluid flow through pore spaces of different digital sandstone and chalk samples was examined, could show particularly that the number of excessively high outlier permeabilities can be prevented with higher resolution. Similar findings are shown in Suzuki et al. (2021), in which also permeabilities that are significantly higher than the comparison simulation could be reduced by improving the resolution. Conclusively, it can be stated that apart from the permeability estimation of the 50  $\mu$ m data set in x-direction, the results of the PH analysis improve with increasing resolution.

### 3.3 Evaluation of Persistent Homology Analysis


275 Since the results of three different methods for permeability determination are in good agreement (NRMSE = 0.34), a classification of the results in the context of other PH ~~analysisanalyses~~ was carried out. The study of Suzuki et al. (2021) applied PH on different data sets of porous and fractured rocks of previous studies (Andrew et al., 2014; Muljadi et al., 2016; Mehmani and Tchelepi, 2017). 16 datasets of porous media and 15 datasets of fracture networks were analyzed, each with PH and numerical flow simulation. In Figure 5, the results of this study as well as the results by Suzuki et al. (2021) are shown.

280 ~~Two main findings can be derived from this comparison: (1) The values determined in this study are in the same range of permeability as the data sets investigated in the previous study and (2) in both studies, PH tends to slightly overestimate permeability, especially at relatively lower permeabilities  $< 10^{-11}$  m<sup>2</sup>. In this study, 67 % of the PH results are higher than the comparing methodology. In the previous study, even 90 % of the PH results overestimate numerical simulation. However, overestimation of the results in this study is only minor or in the same order of magnitude compared to the results of Suzuki~~

285 et al (2021). The method of PH for permeability estimation in both studies provides comparable results to the respective reference method. The results of this study are closely scattered around the 1:1 line and thus match well with the results based on fracture networks (dark grey diamonds). It appears that the results of this study can be estimated even better than most of the data points of previous data sets, especially those generated from porous media (light grey crosses). In the latter, PH tends to overestimate the permeability, which cannot be confirmed for the data in this study. However, this study indicates that the quality of the permeability estimation is not only attributable to the type of cavity (pores, single fractures or fracture networks). Based on the results, the quality of the permeability estimation by PH is also dependent on the resolution and anisotropy of the respective data set. Nevertheless, a larger number of data sets should be examined for a more precise assessment of the various influences on the quality of the permeability estimation.

290  
295  
300  
305  
Of particular interest for this study are the permeabilities of fracture networks, which are displayed as dark gray diamonds in Figure 5, since they are also based on fractured instead of porous material. In general, it can be identified that permeabilities of fracture networks are distributed closer around the 1:1 line compared to porous media values (light gray crosses) in Figure 5. In addition, it is also not surprising that the results of this study have permeability values closer to those of fracture networks rather than porous rocks. This is due to mechanical aperture of the individual fractures, which form a fracture network, being of a similar order of magnitude to the single fracture investigated here. Since the most values from fracture networks are results of the analysis of fracture networks with plane fracture surfaces in the study of Suzuki et al. (2021), it is possible to estimate the influence of surface roughness as well. The rough single fracture studied here shows the same trend of permeabilities, the majority of which are overestimated slightly, as the planar fracture networks addressed. This suggests only a minor influence of the roughness on the final result of the PH analysis. However, it should be considered that typically fracture surfaces have roughnesses of  $H > 0.5$ , whereas the roughness of the used fracture is slightly lower ( $H_x = 0.48$  and  $H_y = 0.42$ ). Furthermore, the local cubic law, seems to be also valid for rough single fracture such as a bedding plane joint of a sandstone. This is overall in good agreement with many other studies that have investigated the influence of the application of local cubic law on permeability of rough fractures (Witherspoon et al., 1980; Brush and Thomson, 2003; Konzuk and Kueper, 2004; Qian et al., 2011). Witherspoon et al. (1980) investigated on artificially induced fractures in granite, basalt and marble and showed that independent of flow direction or closing of fracture, the cubic law stays valid. This general concept was proven by later studies,

310 but with restrictions in terms of the maximum Reynolds number to be below 1 for synthetically created random single fractures (Brush and Thomson, 2003; Qian et al., 2011) and artificially induced dolomite fractures (Konzuk and Kueper, 2004). All these studies also found an overestimation of flow through a single fracture by cubic law compared to the Stokes equations. The large proportion of overestimated permeabilities by PH analysis can be due to this.

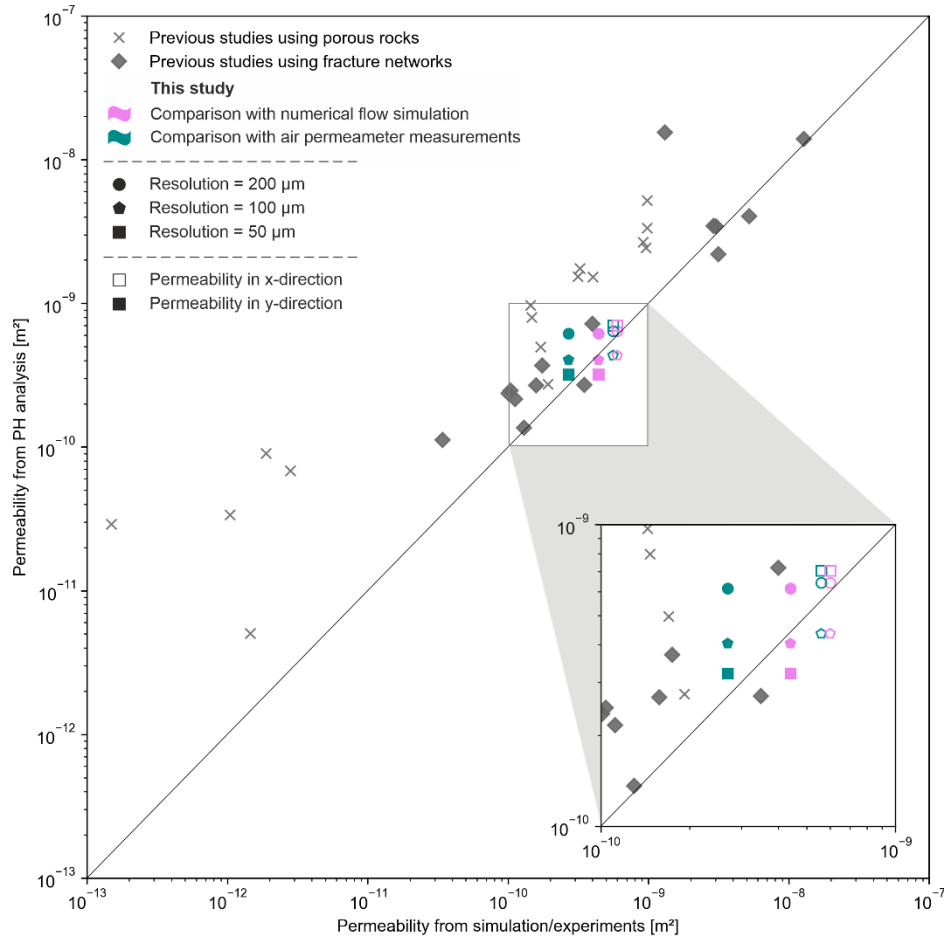

315 Figure 5: Comparison of the estimated permeabilities of this study with the estimated permeabilities for porous media (light gray crosses) and fracture networks (dark gray diamonds) of previous studies by Suzuki et al. (2021) using data of Andrew et al. (2014), Muljadi et al. (2016) and Mehmani and Tchelepi (2017)



In previous sections, it is shown that PH provides comparable results for permeability estimation of rough single fractures compared to other more conventional methods. However, for it to be an alternative, the effort and computational time also has to be considered. In Table 1, an estimation of different working steps is presented for the permeability estimation of single fractures. For PH analysis, the dependency of the time needed on the resolution is also considered. The table is divided into three working steps. The step of preparation and preprocessing contains every working step after the collection of a sample including imaging and matching of fracture surfaces, generating binary images, setting up a numerical model or initializing the air permeameter. In the second working step, the effort for the actual measurement, numerical simulation or PH analysis is considered for 1 sample. In postprocessing, all working steps recalculating the fracture permeability from the measured, simulated or analyzed results is considered. Comparing the expenditure of time for all methods and resolutions, all methods apart from PH analysis for 50  $\mu\text{m}$  data are ranging in the same order of magnitude. An increase to 50  $\mu\text{m}$  resolution demands an enormous increase in time expenditure, mainly due to the extremely high analysis time. Considering the quality of the results, the data set with 100  $\mu\text{m}$  therefore seems to be an adequate alternative to conventional methods, as it can provide high quality results with similar efforts.

Table 1: Estimation of expenditure of time in hours for air permeameter measurements, numerical flow simulation and persistent homology for three different resolution steps (200  $\mu\text{m}$ , 100  $\mu\text{m}$  and 50  $\mu\text{m}$ ).

Method		Preparation and Preprocessing	Measurements/ simulation/ analysis	Postprocessing	Total
Air permeameter measurements		1.0	4.8	0.2	6.0
Numerical flow simulation		7.0	< 0.1	0.1	7.1
Persistent homology analysis	200 $\mu\text{m}$	5.5	0.1	< 0.1	5.6
	100 $\mu\text{m}$	6.5	0.8	< 0.1	7.3
	50 $\mu\text{m}$	8.0	4.6	0.2	12.8

335

## 4 Conclusions

This study shows that persistent homology (PH) provides acceptable results for the permeability estimation of a natural bedding plane joint of a sandstone. Compared to other methods such as experimental air permeameter measurements and numerical flow simulation, it tends to slightly overestimate lower permeabilities. The overestimation of permeabilities is also traceable  
340 in previous studies using PH analysis on porous media as well as small-scale fracture networks. For single fracture application, a reason could be the application of the cubic law, which tends to overestimate the permeability in fracture networks or rough fractures.

In comparison to other methods, PH is a cheap and time-effective method. Once the geometry of a fracture is imaged (e.g. laser scanning, computed tomography, Structure from Motion), all the tools to determine permeability are open-source  
345 accessible. In contrast to most experimental methods, no laboratory is required to estimate the permeability. An exception to this is the air permeameter used here, which is even applicable in field experiments due to its portability. The advantages of PH compared to numerical modeling are, firstly, the lower required computing capacity and computing time. Furthermore, the number of parameters required to successfully perform a simulation is significantly reduced, since only the geometry is sufficient as an input parameter.

350 Suzuki et al. (2020) showed that small-scale (millimeter to centimeter-scale) discrete fracture networks (DFN) can be precisely studied by PH analysis. Our study demonstrates the applicability of the methods to a mesoscale (decimeter-scale), rough bedding joint of Flechtinger sandstone. In order to verify these results, future work should focus on other types of fractures, such as open mode or shear mode fractures, as well as different lithologies, such as fractures in granites or clay. Furthermore, the influence of roughness on the flow behavior and the permeability distribution across the fracture should be investigated.

355 In addition, a more detailed investigation of the permeabilities of different areas of this fracture could be performed on the basis of the high-resolution scans used here. This could also allow a potential scaling effect of the permeabilities to be analyzed in more detail. By combining the approach of fracture networks and rough single fractures, a long-term objective could also investigate on fracture networks at larger scales under consideration of fracture surfaces roughness. In particular, the well-functioning subdivision of the total data set into smaller, high-resolution subpackages should allow analysis of larger DFN  
360 without compromising resolution. Other potential future work could be found in the comparison of such PH analysis with

numerical DFN models. In addition, since numerical models for the accurate representation of fracture networks are computationally expensive, it is expected that PH is able to save time and costs.

## **Keywords**

365 Topological data analysis; Persistent homology; Rough single fractures; Air permeameter measurements; Numerical flow simulation

## **Acknowledgements**

Anna Suzuki was supported by JSPS KAKENHI Grant Number JP22H05108 (Japan) and JST ACT-X Grant Number JPMJAX190H (Japan). Furthermore, the authors like to thank Ruben Stemmle, Anna Albers and Hagen Steger for their support  
370 in conducting the air permeameter experiments and Keiichiro Goto for his support in performing the persistent homology analysis.

## **Competing interests**

The authors declare that they have no conflict of interest.

## **Author contribution**

375 M.F., A.S. and P.B. initiated the key concepts. M.F. prepared the data for persistent homology analysis, performed numerical simulations, conducted air permeameter measurements, and visualized the results. A.S. performed the persistent homology analysis and supervised the research. T.H. assisted the persistent homology analysis. P.B. supervised the research. M.F. wrote the original draft. All authors reviewed and edited the manuscript.

## **Code/Data availability**

380 The binary image data of this study are available from the authors upon reasonable request.

## References

- Alqahtani, N. J., Chung, T., Da Wang, Y., Armstrong, R. T., Swietojanski, P., and Mostaghimi, P.: Flow-Based Characterization of Digital Rock Images Using Deep Learning, *SPE Journal*, 26, 1800–1811, <https://doi.org/10.2118/205376-PA>, 2021.
- Anderson, T. I., Guan, K. M., Vega, B., Aryana, S. A., and Kovscek, A. R.: RockFlow: Fast Generation of Synthetic Source Rock Images Using Generative Flow Models, *Energies*, 13, 6571, <https://doi.org/10.3390/en13246571>, 2020.
- Andrew, M., Bijeljic, B., and Blunt, M. J.: Pore-scale imaging of trapped supercritical carbon dioxide in sandstones and carbonates, *International Journal of Greenhouse Gas Control*, 22, 1–14, <https://doi.org/10.1016/j.ijggc.2013.12.018>, 2014.
- Araya-Polo, M., Alpak, F. O., Hunter, S., Hofmann, R., and Saxena, N.: Deep learning–driven permeability estimation from 2D images, *Comput Geosci*, 24, 571–580, <https://doi.org/10.1007/s10596-019-09886-9>, 2020.
- Barton, N., Bandis, S., and Bakhtar, K.: Strength, deformation and conductivity coupling of rock joints, *International Journal of Rock Mechanics and Mining Sciences & Geomechanics Abstracts*, 22, 121–140, [https://doi.org/10.1016/0148-9062\(85\)93227-9](https://doi.org/10.1016/0148-9062(85)93227-9), 1985.
- Barton, N. and Quadros, E. F. de: Joint aperture and roughness in the prediction of flow and groutability of rock masses, *International Journal of Rock Mechanics and Mining Sciences*, 34, 252.e1–252.e14, [https://doi.org/10.1016/S1365-1609\(97\)00081-6](https://doi.org/10.1016/S1365-1609(97)00081-6), 1997.
- Bizhani, M. and Haeri Ardakani, O.: Pore Characterization of Organic-Rich Shales through Application of Topological Data Analysis and Persistent Homology, *Energy Fuels*, 35, 18563–18573, <https://doi.org/10.1021/acs.energyfuels.1c03255>, 2021.
- Blöcher, G., Kluge, C., Milsch, H., Cacace, M., Jacquey, A. B., and Schmittbuhl, J.: Permeability of matrix-fracture systems under mechanical loading – constraints from laboratory experiments and 3-D numerical modelling, *Adv. Geosci.*, 49, 95–104, <https://doi.org/10.5194/adgeo-49-95-2019>, 2019.
- Blum, P., Mackay, R., and Riley, M. S.: Stochastic simulations of regional scale advective transport in fractured rock masses using block upscaled hydro-mechanical rock property data, *Journal of Hydrology*, 369, 318–325, <https://doi.org/10.1016/j.jhydrol.2009.02.009>, 2009.
- Brown, S. and Smith, M.: A transient-flow syringe air permeameter, *GEOPHYSICS*, 78, D307-D313, <https://doi.org/10.1190/geo2012-0534.1>, 2013.
- Brown, S., Caprihan, A., and Hardy, R.: Experimental observation of fluid flow channels in a single fracture, *J. Geophys. Res.*, 103, 5125–5132, <https://doi.org/10.1029/97JB03542>, 1998.
- Brown, S. R.: Fluid flow through rock joints: The effect of surface roughness, *J. Geophys. Res.*, 92, 1337, <https://doi.org/10.1029/JB092iB02p01337>, 1987.
- ~~Brush, D. J. and Thomson, N. R.: Fluid flow in synthetic rough walled fractures: Navier-Stokes, Stokes, and local cubic law simulations, *Water Res.*, 39, <https://doi.org/10.1029/2002WR001346>, 2003.~~
- Carlsson, G.: Topology and data, *Bulletin of the Americal Mathmatical Society*, 255–308, <https://doi.org/10.1090/S0273-0979-09-01249-X>, 2009.
- Carman, P. C.: Fluid flow through a granular bed, *Trans. Inst. Chem. Eng.*, 150–167, 1937.
- Chan, J. M., Carlsson, G., and Rabadan, R.: Topology of viral evolution, *Proceedings of the National Academy of Sciences of the United States of America*, 110, 18566–18571, <https://doi.org/10.1073/pnas.1313480110>, 2013.

- Chen, Y., Selvadurai, A., and Zhao, Z.: Modeling of flow characteristics in 3D rough rock fracture with geometry changes under confining stresses, *Computers and Geotechnics*, 130, 103910, <https://doi.org/10.1016/j.compgeo.2020.103910>, 2021.
- Cheng, C., Hale, S., Milsch, H., and Blum, P.: Measuring hydraulic fracture apertures: a comparison of methods, *Solid Earth*, 11, 2411–2423, <https://doi.org/10.5194/se-11-2411-2020>, 2020.
- Choudhury, A. I., Wang, B., Rosen, P., and Pascucci, V.: Topological analysis and visualization of cyclical behavior in memory reference traces, in: 2012 IEEE Pacific Visualization Symposium, Songdo, Korea (South), 28 February - 2 March 2012, 9–16, 2012.
- Cignoni, P., Corsini, M., and Ranzuglia, G.: MeshLab: an Open-Source 3D Mesh Processing System, *ERCIM News*, 2008.
- Costa, A.: Permeability-porosity relationship: A reexamination of the Kozeny-Carman equation based on a fractal pore-space geometry assumption, *Geophys. Res. Lett.*, 33, <https://doi.org/10.1029/2005GL025134>, 2006.
- Da Wang, Y., Blunt, M. J., Armstrong, R. T., and Mostaghimi, P.: Deep learning in pore scale imaging and modeling, *Earth-Science Reviews*, 215, 103555, <https://doi.org/10.1016/j.earscirev.2021.103555>, 2021.
- Delgado-Friedrichs, O., Robins, V., and Sheppard, A.: Morse theory and persistent homology for topological analysis of 3D images of complex materials, in: 2014 IEEE International Conference on Image Processing (ICIP), Paris, France, 27-30 October 2014, 4872–4876, 2014.
- Durham, W. B., Bourcier, W. L., and Burton, E. A.: Direct observation of reactive flow in a single fracture, *Water Res.*, 37, 1–12, <https://doi.org/10.1029/2000WR900228>, 2001.
- Edelsbrunner, H., Letscher, D., and Zomorodian, A.: Topological persistence and simplification, in: Proceedings 41st Annual Symposium on Foundations of Computer Science, Redondo Beach, CA, USA, 12-14 Nov. 2000, 454–463, 2000.
- Ferer, M., Crandall, D., Ahmadi, G., and Smith, D. H.: Two-phase flow in a rough fracture: experiment and modeling, *Physical review. E, Statistical, nonlinear, and soft matter physics*, 84, 16316, <https://doi.org/10.1103/PhysRevE.84.016316>, 2011.
- Filomena, C. M., Hornung, J., and Stollhofen, H.: Assessing accuracy of gas-driven permeability measurements: a comparative study of diverse Hassler-cell and probe permeameter devices, *Solid Earth*, 5, 1–11, <https://doi.org/10.5194/se-5-1-2014>, 2014.
- Fischer, C., Dunkl, I., Eynatten, H. von, Wijbrans, J. R., and Gaupp, R.: Products and timing of diagenetic processes in Upper Rotliegend sandstones from Bebertal (North German Basin, Parchim Formation, Flechtingen High, Germany), *Geol. Mag.*, 149, 827–840, <https://doi.org/10.1017/S0016756811001087>, 2012.
- Frank, S., Heinze, T., Ribbers, M., and Wohnlich, S.: Experimental Reproducibility and Natural Variability of Hydraulic Transport Properties of Fractured Sandstone Samples, *Geosciences*, 10, 458, <https://doi.org/10.3390/geosciences10110458>, 2020.
- Gutjahr, T., Hale, S., Keller, K., Blum, P., and Winter, S.: Quantification of Fracture Roughness by Change Probabilities and Hurst Exponents, *Math Geosci*, 54, 679–710, <https://doi.org/10.1007/s11004-021-09985-3>, 2022.
- Hale, S. and Blum, P.: Bestimmung der hydraulischen Durchlässigkeiten eines Sandsteins mithilfe eines Luftpermeameters, *Grundwasser - Zeitschrift der Fachsektion Hydrogeologie*, <https://doi.org/10.1007/s00767-021-00504-z>, 2022.
- Hale, S., Naab, C., Butscher, C., and Blum, P.: Method Comparison to Determine Hydraulic Apertures of Natural Fractures, *Rock Mech Rock Eng*, 53, 1467–1476, <https://doi.org/10.1007/s00603-019-01966-7>, 2020.

- Hassanzadegan, A., Blöcher, G., Zimmermann, G., and Milsch, H.: Thermoporoelastic properties of Flechtinger sandstone, *International Journal of Rock Mechanics and Mining Sciences*, 49, 94–104, <https://doi.org/10.1016/j.ijrmms.2011.11.002>, 2012.
- 470 Heidsiek, M., Butscher, C., Blum, P., and Fischer, C.: Small-scale diagenetic facies heterogeneity controls porosity and permeability pattern in reservoir sandstones, *Environ Earth Sci*, 79, <https://doi.org/10.1007/s12665-020-09168-z>, 2020.
- Hiraoka, Y., Nakamura, T., Hirata, A., Escolar, E. G., Matsue, K., and Nishiura, Y.: Hierarchical structures of amorphous solids characterized by persistent homology, *Proceedings of the National Academy of Sciences of the United States of America*, 113, 7035–7040, <https://doi.org/10.1073/pnas.1520877113>, 2016.
- 475 Hong, J. and Liu, J.: Rapid estimation of permeability from digital rock using 3D convolutional neural network, *Comput Geosci*, 24, 1523–1539, <https://doi.org/10.1007/s10596-020-09941-w>, 2020.
- Huerta, N. J., Hesse, M. A., Bryant, S. L., Strazisar, B. R., and Lopano, C. L.: Experimental evidence for self-limiting reactive flow through a fractured cement core: implications for time-dependent wellbore leakage, *Environmental science & technology*, 47, 269–275, <https://doi.org/10.1021/es3013003>, 2013.
- 480 Javadi, M., Sharifzadeh, M., and Shahriar, K.: A new geometrical model for non-linear fluid flow through rough fractures, *Journal of Hydrology*, 389, 18–30, <https://doi.org/10.1016/j.jhydrol.2010.05.010>, 2010.
- Javanmard, H., Ebigbo, A., Walsh, S. D. C., Saar, M. O., and Vogler, D.: No - Flow Fraction (NFF) Permeability Model for Rough Fractures Under Normal Stress, *Water Res*, 57, <https://doi.org/10.1029/2020WR029080>, 2021.
- 485 Jiang, F., Tsuji, T., and Shirai, T.: Pore Geometry Characterization by Persistent Homology Theory, *Water Res*, 54, 4150–4163, <https://doi.org/10.1029/2017WR021864>, 2018.
- Kling, T., Schwarz, J.-O., Wendler, F., Enzmann, F., and Blum, P.: Fracture flow due to hydrothermally induced quartz growth, *Advances in Water Resources*, 107, 93–107, <https://doi.org/10.1016/j.advwatres.2017.06.011>, 2017.
- 490 ~~Konzuk, J. S. and Kueper, B. H.: Evaluation of cubic law based models describing single phase flow through a rough-walled fracture, *Water Res*, 40, <https://doi.org/10.1029/2003WR002356>, 2004.~~
- Kozeny, J.: Ueber kapillare Leitung des Wassers im Boden, *Sitzungsber. Akad. Wiss.*, 271–306, 1927.
- Louis, C.: Rock Hydraulics, in: *Rock Mechanics*, edited by: Müller, L., Springer Vienna, Vienna, 299–387, [https://doi.org/10.1007/978-3-7091-4109-0\\_16](https://doi.org/10.1007/978-3-7091-4109-0_16), 1972.
- 495 Marchand, S., Mersch, O., Selzer, M., Nitschke, F., Schoenball, M., Schmittbuhl, J., Nestler, B., and Kohl, T.: A Stochastic Study of Flow Anisotropy and Channelling in Open Rough Fractures, *Rock Mech Rock Eng*, 53, 233–249, <https://doi.org/10.1007/s00603-019-01907-4>, 2020.
- Mehmani, Y. and Tchelepi, H. A.: Minimum requirements for predictive pore-network modeling of solute transport in micromodels, *Advances in Water Resources*, 108, 83–98, <https://doi.org/10.1016/j.advwatres.2017.07.014>, 2017.
- 500 Min, K.-B., Jing, L., and Stephansson, O.: Determining the equivalent permeability tensor for fractured rock masses using a stochastic REV approach: Method and application to the field data from Sellafeld, UK, *Hydrogeology Journal*, 12, 497–510, <https://doi.org/10.1007/s10040-004-0331-7>, 2004.
- Moon, C., Mitchell, S. A., Heath, J. E., and Andrew, M.: Statistical Inference Over Persistent Homology Predicts Fluid Flow in Porous Media, *Water Res*, 55, 9592–9603, <https://doi.org/10.1029/2019WR025171>, 2019.
- 505

- Muljadi, B. P., Blunt, M. J., Raeini, A. Q., and Bijeljic, B.: The impact of porous media heterogeneity on non-Darcy flow behaviour from pore-scale simulation, *Advances in Water Resources*, 95, 329–340, <https://doi.org/10.1016/j.advwatres.2015.05.019>, 2016.
- 510 Müller, C., Siegesmund, S., and Blum, P.: Evaluation of the representative elementary volume (REV) of a fractured geothermal sandstone reservoir, *Environ Earth Sci*, 61, 1713–1724, <https://doi.org/10.1007/s12665-010-0485-7>, 2010.
- New England Research Inc.: TinyPerm 3, Product information, White River Junction, VT, 2016.
- Nikon Metrology NV: ModelMaker Handheld scanners, MCAx Articulated arms, Product information, 2018.
- Nikon Metrology NV: MCA II Articulated arms: Portable productivity, Product information, 2010.
- 515 Novakowski, K. S. and Lapcevic, P. A.: Field measurement of radial solute transport in fractured rock, *Water Res*, 30, 37–44, <https://doi.org/10.1029/93WR02401>, 1994.
- Obayashi, I., Nakamura, T., and Hiraoka, Y.: Persistent Homology Analysis for Materials Research and Persistent Homology Software: HomCloud, *J. Phys. Soc. Jpn.*, 91, <https://doi.org/10.7566/JPSJ.91.091013>, 2022.
- 520 Oliveira, G. L. P., Ceia, M. A., Missagia, R. M., Lima Neto, I., Santos, V. H., and Paranhos, R.: Core plug and 2D/3D-image integrated analysis for improving permeability estimation based on the differences between micro- and macroporosity in Middle East carbonate rocks, *Journal of Petroleum Science and Engineering*, 193, 107335, <https://doi.org/10.1016/j.petrol.2020.107335>, 2020.
- Patir, N. and Cheng, H. S.: An Average Flow Model for Determining Effects of Three-Dimensional Roughness on Partial Hydrodynamic Lubrication, *Journal of Lubrication Technology*, 100, 12–17, <https://doi.org/10.1115/1.3453103>, 1978.
- 525 Permann, C. J., Gaston, D. R., Andrš, D., Carlsen, R. W., Kong, F., Lindsay, A. D., Miller, J. M., Peterson, J. W., Slaughter, A. E., Stogner, R. H., and Martineau, R. C.: MOOSE: Enabling massively parallel multiphysics simulation, *SoftwareX*, 11, 100430, <https://doi.org/10.1016/j.softx.2020.100430>, 2020.
- 530 Pyrak-Nolte, L. J. and Morris, J. P.: Single fractures under normal stress: The relation between fracture specific stiffness and fluid flow, *International Journal of Rock Mechanics and Mining Sciences*, 37, 245–262, [https://doi.org/10.1016/S1365-1609\(99\)00104-5](https://doi.org/10.1016/S1365-1609(99)00104-5), 2000.
- ~~Qian, J., Chen, Z., Zhan, H., and Guan, H.: Experimental study of the effect of roughness and Reynolds number on fluid flow in rough-walled single fractures: a check of local cubic law, *Hydrol. Process.*, 25, 614–622, <https://doi.org/10.1002/hyp.7849>, 2011.~~
- 535 Robins, V., Saadatfar, M., Delgado - Friedrichs, O., and Sheppard, A. P.: Percolating length scales from topological persistence analysis of micro - CT images of porous materials, *Water Res*, 52, 315 – 329, <https://doi.org/10.1002/2015WR017937>, 2016.
- Schädle, P.: SaintBernard: A MOOSE Application to model flow and transport through lower dimensional rough fractures, Zenodo, 2020.
- 540 Sudakov, O., Burnaev, E., and Koroteev, D.: Driving digital rock towards machine learning: Predicting permeability with gradient boosting and deep neural networks, *Computers & Geosciences*, 127, 91–98, <https://doi.org/10.1016/j.cageo.2019.02.002>, 2019.
- Suzuki, A., Miyazawa, M., Okamoto, A., Shimizu, H., Obayashi, I., Hiraoka, Y., Tsuji, T., Kang, P. K., and Ito, T.: Inferring fracture forming processes by characterizing fracture network patterns with persistent homology, *Computers & Geosciences*, 143, 104550, <https://doi.org/10.1016/j.cageo.2020.104550>, 2020.
- 545



- Suzuki, A., Miyazawa, M., Minto, J. M., Tsuji, T., Obayashi, I., Hiraoka, Y., and Ito, T.: Flow estimation solely from image data through persistent homology analysis, *Scientific reports*, 11, 17948, <https://doi.org/10.1038/s41598-021-97222-6>, 2021.
- 550 Suzuki, A., Minto, J. M., Watanabe, N., Li, K., and Horne, R. N.: Contributions of 3D Printed Fracture Networks to Development of Flow and Transport Models, *Transp Porous Med*, 129, 485–500, <https://doi.org/10.1007/s11242-018-1154-7>, 2019.
- Suzuki, A., Watanabe, N., Li, K., and Horne, R. N.: Fracture network created by 3-D printer and its validation using CT images, *Water Res*, 53, 6330–6339, <https://doi.org/10.1002/2017WR021032>, 2017.
- 555 Tatone, B. S. A. and Grasselli, G.: An Investigation of Discontinuity Roughness Scale Dependency Using High-Resolution Surface Measurements, *Rock Mech Rock Eng*, 46, 657–681, <https://doi.org/10.1007/s00603-012-0294-2>, 2013.
- Tatone, B. S. A. and Grasselli, G.: Quantitative Measurements of Fracture Aperture and Directional Roughness from Rock Cores, *Rock Mech Rock Eng*, 45, 619–629, <https://doi.org/10.1007/s00603-011-0219-5>, 2012.
- 560 Thiele, S. T., Jessell, M. W., Lindsay, M., Ogarko, V., Wellmann, J. F., and Pakyuz-Charrier, E.: The topology of geology 1: Topological analysis, *Journal of Structural Geology*, 91, 27–38, <https://doi.org/10.1016/j.jsg.2016.08.009>, 2016.
- Thörn, J. and Fransson, Å.: A new apparatus and methodology for hydromechanical testing and geometry scanning of a rock fracture under low normal stress, *International Journal of Rock Mechanics and Mining Sciences*, 79, 216–226, <https://doi.org/10.1016/j.ijrmms.2015.08.015>, 2015.
- 565 Torskaya, T., Shabro, V., Torres-Verdín, C., Salazar-Tio, R., and Revil, A.: Grain Shape Effects on Permeability, Formation Factor, and Capillary Pressure from Pore-Scale Modeling, *Transp Porous Med*, 102, 71–90, <https://doi.org/10.1007/s11242-013-0262-7>, 2014.
- Tsang, C.-F. and Neretnieks, I.: Flow channeling in heterogeneous fractured rocks, *Rev. Geophys.*, 36, 275–298, <https://doi.org/10.1029/97RG03319>, 1998.
- 570 Tsang, Y. W.: Usage of “Equivalent apertures” for rock fractures as derived from hydraulic and tracer tests, *Water Res*, 28, 1451–1455, <https://doi.org/10.1029/92WR00361>, 1992.
- Vogler, D., Settgest, R. R., Annavarapu, C., Madonna, C., Bayer, P., and Amann, F.: Experiments and Simulations of Fully Hydro-Mechanically Coupled Response of Rough Fractures Exposed to High-Pressure Fluid Injection, *J. Geophys. Res. Solid Earth*, 123, 1186–1200, <https://doi.org/10.1002/2017JB015057>, 2018.
- 575 Wang, M., Chen, Y.-F., Ma, G.-W., Zhou, J.-Q., and Zhou, C.-B.: Influence of surface roughness on nonlinear flow behaviors in 3D self-affine rough fractures: Lattice Boltzmann simulations, *Advances in Water Resources*, 96, 373–388, <https://doi.org/10.1016/j.advwatres.2016.08.006>, 2016.
- Wang, Q., Hu, X., Zheng, W., Li, L., Zhou, C., Ying, C., and Xu, C.: Mechanical Properties and Permeability Evolution of Red Sandstone Subjected to Hydro-mechanical Coupling: Experiment and Discrete Element Modelling, *Rock Mech Rock Eng*, 54, 2405–2423, <https://doi.org/10.1007/s00603-021-02396-0>, 2021.
- 580 Watanabe, N., Hirano, N., and Tsuchiya, N.: Determination of aperture structure and fluid flow in a rock fracture by high-resolution numerical modeling on the basis of a flow-through experiment under confining pressure, *Water Res*, 44, <https://doi.org/10.1029/2006WR005411>, 2008.
- 585 Weede, M. and Hötzl, H.: Strömung und Transport in einer natürlichen Einzelkluft in poröser Matrix— Experimente und Modellierung, *Grundwasser - Zeitschrift der Fachsektion Hydrogeologie*, 10, 137–145, <https://doi.org/10.1007/s00767-005-0090-y>, 2005.

- 590 Wilkins, A., Green, C. P., and Ennis-King, J.: An open-source multiphysics simulation code for coupled problems in porous media, *Computers & Geosciences*, 154, 104820, <https://doi.org/10.1016/j.cageo.2021.104820>, 2021.
- Wilkins, A., Green, C., and Ennis-King, J.: PorousFlow: a multiphysics simulation code for coupled problems in porous media, *JOSS*, 5, 2176, <https://doi.org/10.21105/joss.02176>, 2020.
- ~~Witherspoon, P. A., Wang, J. S. Y., Iwai, K., and Gale, J. E.: Validity of Cubic Law for fluid flow in a deformable rock fracture, *Water Res.*, 16, 1016–1024, <https://doi.org/10.1029/WR016i006p01016>, 1980.~~
- 595 Xiong, X., Li, B., Jiang, Y., Koyama, T., and Zhang, C.: Experimental and numerical study of the geometrical and hydraulic characteristics of a single rock fracture during shear, *International Journal of Rock Mechanics and Mining Sciences*, 48, 1292–1302, <https://doi.org/10.1016/j.ijrmms.2011.09.009>, 2011.
- Zomorodian, A. and Carlsson, G.: Computing Persistent Homology, *Discrete Comput Geom*, 33, 249–274, <https://doi.org/10.1007/s00454-004-1146-y>, 2005.

600