

1 **REVISED**

2 **Towards a Dynamic Earthquake Risk Framework for**
3 **Switzerland**

4
5 Maren Böse^{1*}, Laurentiu Danciu¹, Athanasios Papadopoulos¹, John Clinton¹, Carlo Cauzzi¹,
6 Irina Dallo¹, Leila Mizrahi¹, Tobias Diehl¹, Paolo Bergamo¹, Yves Reuland², Andreas
7 Fichtner³, Philippe Roth¹, Florian Haslinger¹, Frederick Massin¹, Nadja Valenzuela¹, Nikola
8 Blagojević², Lukas Bodenmann², Eleni Chatzi², Donat Fäh¹, Franziska Glueer¹, Marta Han¹,
9 Lukas Heiniger¹, Paulina Janusz¹, Dario Jozinovic¹, Philipp Kästli¹, Federica Lanza¹, Timothy
10 Lee¹, Panagiotis Martakis², Michèle Marti¹, Men-Andrin Meier⁴, Banu Mena Cabrera¹, Maria
11 Mesimeri¹, Anne Obermann¹, Pilar Sanchez-Pastor¹, Luca Scarabello¹, Nicolas Schmid¹,
12 Anastasiia Shynkarenko¹, Bozidar Stojadinovic², Domenico Giardini⁴, and Stefan Wiemer¹
13
14

15 ¹ Swiss Seismological Service (SED) at ETH Zurich, Sonneggstrasse 5, 8092 Zurich, 8092, Switzerland

16 ² Institute of Structural Engineering (IBK) at ETH Zurich, Stefano-Frascini-Platz 5, 8093 Zurich, Switzerland

17 ³ Seismology and Wave Physics (SWP) at ETH Zurich, Sonneggstrasse 5, 8092 Zurich, 8092, Switzerland

18 ⁴ Seismology and Geodynamics (SEG) at ETH Zurich, Sonneggstrasse 5, 8092 Zurich, 8092, Switzerland
19
20

21 **Correspondence to:* Maren Böse (maren.boese@sed.ethz.ch)

22 **Abstract.** Scientists at ETH Zurich from different disciplines are developing a dynamic, harmonised and user-
23 centred earthquake risk framework for Switzerland, relying on a continuously evolving earthquake catalogue
24 generated by the Swiss Seismological Service (SED) using the national seismic networks. This framework uses
25 all available information to assess seismic risk at various stages and facilitates widespread dissemination and
26 communication of the resulting information. Earthquake risk products and services include Operational
27 Earthquake (Loss) Forecasting (OE[L]F), Earthquake Early Warning (EEW), ShakeMaps, Rapid Impact
28 Assessment (RIA), Structural Health Monitoring (SHM), as well as Recovery and Rebuilding Efforts (RRE).
29 Standardisation of products and workflows across various applications is essential for achieving broad adoption,
30 universal recognition, and maximum synergies. In the Swiss dynamic earthquake risk framework, the
31 harmonisation of products into seamless solutions that access the same databases, workflows, and software is a
32 crucial component. A user-centred approach utilising quantitative and qualitative social science tools like online
33 surveys and focus groups is a significant innovation featured in all products and services. Here we report on the
34 key considerations and developments of the framework and its components. **This paper may serve as a reference**
35 **guide for other countries wishing to establish similar services for seismic risk reduction.**

36 **Short Summary.** We are developing an interdisciplinary dynamic earthquake risk framework for advancing
37 earthquake risk mitigation in Switzerland. It includes various earthquake risk products and services, such as
38 Operational Earthquake Forecasting and Earthquake Early Warning. Standardisation is crucial for widespread
39 adoption and recognition, and the harmonisation of products into seamless solutions that access the same
40 databases, workflows, and software is a crucial component.

41 **Keywords:** seismic hazard, seismic risk, seismic network, earthquake forecasting, earthquake early warning,
42 rapid loss assessment, structural health monitoring, recovery and rebuilding efforts, earthquake communication
43

44 1. Introduction

45 Europe faces a significant earthquake risk due to its tectonic situation, high population density, business value,
46 and the age and condition of buildings (e.g., Danciu *et al.*, 2022; Crowley *et al.*, 2022). This includes areas with
47 moderate seismic activity, such as Switzerland, where earthquakes have the potential to cause significant loss,
48 with projected costs of major events exceeding Euro 100 billion (Wiemer *et al.*, 2016; Wiemer *et al.*, 2023).
49 Building codes and retrofitting are the most effective measures to reduce earthquake risk, but emerging
50 technologies, such as Operational Earthquake Forecasting (OEF) or Earthquake Early Warning (EEW), can also
51 improve resilience by means of reducing exposure (e.g., Cauzzi *et al.*, 2016; Papadopoulos *et al.*, 2023a).

52 The seismic risk to which a structure is exposed depends on its type, location, occupancy, and local site conditions;
53 an individual's risk is also affected by her/his exact location within the structure. Seismic risk is therefore highly
54 time-dependent (dynamic) and subject to change, because the underlying hazard, or the exposure, changes. In the
55 short term, the risk may increase during an active seismic sequence in the vicinity. On a more immediate timescale,
56 seismic risk is greatly increased once an event initiates and before the strong shaking begins. In the long term,
57 seismic risk increases with rapid urbanisation and densification of the building stock. The vulnerability of certain
58 structures may be altered by preceding events, contributing to an evolving seismic risk landscape during an
59 ongoing seismic sequence. Compared to a static approach that assumes a constant level of hazard and risk, the
60 dynamic risk approach allows for timely identification of changes, enabling more accurate estimates and thus
61 more effective mitigation measures and improved safety outcomes. Here we describe the dynamic earthquake risk
62 framework that we are implementing for Switzerland.

63 The national Seismic Hazard Model (SUIhaz2015; Wiemer *et al.*, 2016) and the recently released first national
64 Earthquake Risk Model of Switzerland (ERM-CH23; Wiemer *et al.*, 2023; Papadopoulos *et al.*, 2023b) serve as
65 the basis for tools and systems which we are developing as part of a dynamic, harmonised and user-centred
66 earthquake risk framework for Switzerland. Within our framework, earthquake risk is evaluated consistently and
67 in a harmonised manner, whether for the immediate next few seconds or projecting ahead for the next five decades.
68 The framework uses all available information to evaluate seismic risk at various stages of the earthquake cycle
69 (Figure 1), and facilitates widespread dissemination and communication of the resulting information. This
70 involves various services, products, and research developed at the Swiss Seismological Service (SED), the
71 Department of Earth Science, and the Institute of Structural Engineering (IBK) at the Eidgenössische Technische
72 Hochschule (ETH) Zurich, including Operational Earthquake (Loss) Forecasting (OE[L]F), Earthquake Early
73 Warning (EEW), ShakeMaps, Rapid Impact Assessment (RIA), Structural Health Monitoring (SHM), as well as
74 Recovery and Rebuilding Efforts (RRE).

75 Harmonisation of products and workflows across different applications is crucial to ensure broad acceptance and
76 universal recognition of products, as well as to maximise synergies and impact. The first element of our framework

77 is the high-quality characterization of seismicity in Switzerland using the Swiss Seismic Network operated by the
78 SED as the backbone (**Figure 1**) with reliable monitoring and recording of seismic events, reaching a
79 completeness magnitude of ML1.0 in most Swiss regions and ML1.5 in less densely instrumented areas. Real-
80 time waveform data and derived catalogue parameters contribute directly to EEW, ShakeMaps, and OE[L]F, and
81 play a key role in immediate disaster response and public safety measures.

82 The second element of our framework involves the assessment of ground shaking hazards. Using data from the
83 Swiss Seismic Network, we derive predictive ground motion models, which we combine with seismotectonic and
84 seismogenic sources (again strongly informed by the seismicity catalogue described above) for a comprehensive
85 long-term seismic hazard assessment. These assessments are used to update seismic design guidelines and
86 regulations, and to inform seismic risk assessment.


87 The third element of our framework focuses on assessing the consequences of earthquakes and estimating losses
88 at different levels of exposure, from the national scale down to individual communities. The RIA system
89 developed at the SED provides rapid estimates of potential structural and economic losses. The SHM and RRE
90 systems developed at the IBK are essential for post-earthquake damage assessment of structures and recovery
91 predictions.

92
93 Finally, a carefully crafted communication strategy accompanies the entire lifecycle of our initiative, from the
94 development of operational services and the construction of data models to the dissemination of data products.
95 All services and tools in our framework are based on state-of-the-art research infrastructure, including powerful
96 computational tools and databases.

97
98 A critical component of the Swiss dynamic risk framework is the standardisation into seamless products that
99 access the same databases, workflows, and software, and are based on standard models: the Swiss EEW system
100 (Massin *et al.*, 2021) uses the same ground-motion models as employed in the Swiss ShakeMaps (Cauzzi *et al.*,
101 2015; 2022); the Swiss RIA system utilises Swiss ShakeMap as input, that includes the same site amplification
102 layers (Bergamo *et al.*, 2023) used in ERM-CH23. Rapid impact is calculated using OpenQuake (Pagani *et al.*,
103 2014) for scenario products, RIA, RRE, and probabilistic products, while the impact on people and buildings is
104 determined from national building databases and their vulnerability. OELF calculations employ short-term
105 seismicity forecasts in synergy with components of the hazard and risk models utilised for long-term hazard and
106 risk calculations and RIA products. All products are informed by a single, continuously evolving earthquake
107 catalogue, as well as continuous waveforms generated by the SED, using the national seismic networks.

108 All products and services feature a significant innovation, namely a user-centred approach that utilises quantitative
109 and qualitative social science tools such as online surveys and focus groups. The visual representation of rapid
110 impact, for instance, was developed based on feedback from focus groups and discussions with stakeholders at
111 the federal and cantonal levels, and includes new visualisations of uncertainties. The risk map was adapted to the
112 needs of the public, which were assessed through a representative, nationwide survey.

113 Here we report on the main components of the Swiss dynamic earthquake risk framework, most of which have
 114 been developed within the scope of the European Union Horizon 2020 *Real-time earthquake rIsk reduction for a*
 115 *ReSilient Europe* (RISE; <http://www.rise-eu.org/home/>, last accessed November 2023) project (**Figure 1**). We
 116 start with a summary of the seismic hazard and risk in Switzerland and then continue with a description of the
 117 recent advances in seismic monitoring capabilities over the last decade, which are crucial for the downstream risk
 118 mitigation products and services that we focus on in the second part of this paper. Finally, we discuss the SED
 119 strategy for implementing and communicating earthquake hazard and risk products to the public and stakeholders
 120 in Switzerland. **Our paper may serve as a reference for other countries seeking to establish a similar framework.**

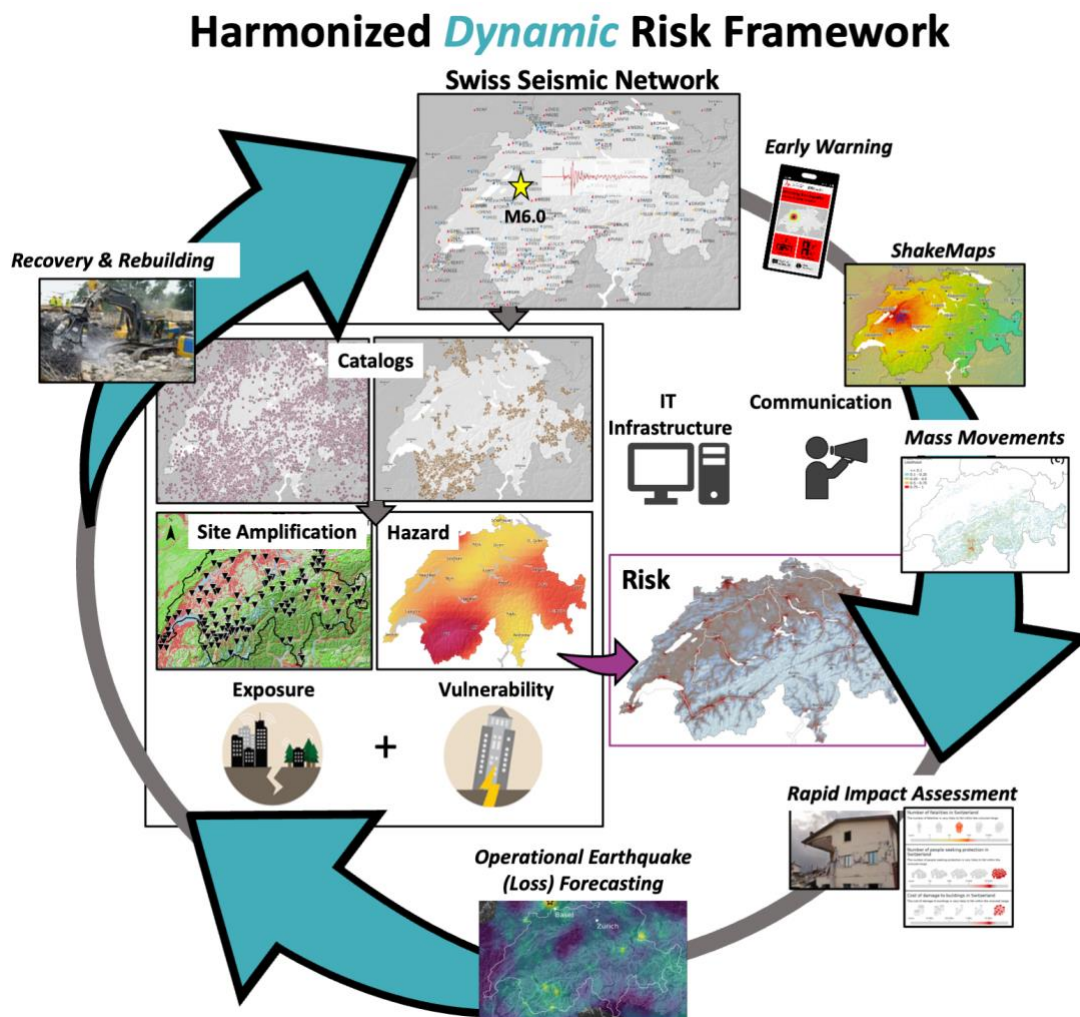

121

122 **Figure 1: Schematic representation of the dynamic risk framework.**


123

124 **1.1 Seismic Hazard and Risk in Switzerland**

125 Switzerland is exposed to a considerable threat of earthquakes. Around 1000 to 1500 earthquakes are detected in
 126 Switzerland and its neighbouring countries every year, including 10 to 20 events that are felt by the population
 127 (**Figure 2**). **The 2015 Swiss seismic hazard model**, SUIhaz2015 (**Figure 3a**; Wiemer *et al.*, 2016), which assesses

128 the likelihood of ground shaking, forecasts that earthquakes of magnitude 5 or greater are likely to occur every 8
129 to 15 years. The severity of impacts on buildings depends on the location and depth of the earthquake. Earthquakes
130 with a magnitude of 6 or greater, which can cause extensive and severe damage, occur on average every 50 to 150
131 years and can strike any part of Switzerland at any time. The last earthquake of this magnitude occurred close to
132 the town of Sierre in the Upper Valais in 1946 (Fäh *et al.*, 2011). The canton of Valais faces the highest level of
133 seismic hazard in Switzerland, followed by Basel, Grisons, the St. Gallen Rhine Valley, and Central Switzerland.

134 SUIhaz2015 has been implemented in the most recent version of Swiss building code SIA 261 (2020). It updated
135 the hazard model from 2003 (Giardini *et al.*, 2004). The first seismic hazard model for Switzerland used in Swiss
136 building codes until 2003 was the one of Sägesser & Mayer-Rosa (1978) which was based on the historical
137 catalogue available at that time, as well as on macroseismic intensity data.

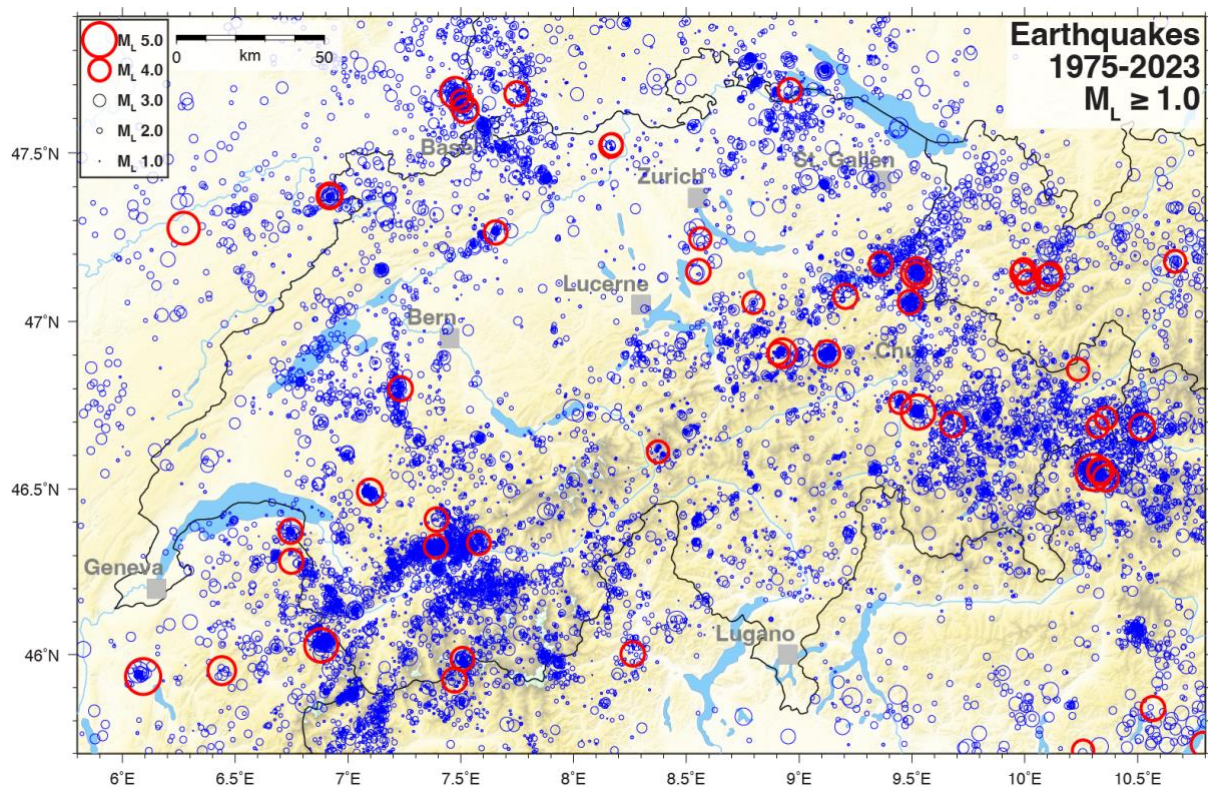


138
139 **Figure 2: Map of Switzerland and the surrounding area showing all seismicity with $M_L \geq 1.0$ since 1975 in the SED**
140 **earthquake catalogue (bulletin locations). Events with $M_L \geq 4.0$ are highlighted by bold red circles.**

141


142 Methods for estimating site-specific amplification and local seismic hazard were developed at the SED during the
143 past decades and were implemented in microzonation studies, e.g., as for the region of Basel (e.g., Fäh and
144 Huggenberger, 2006). A number of approaches were developed to estimate site-specific amplification based on
145 geophysical measurements and earthquake recordings (e.g., Edwards *et al.*, 2013; Michel *et al.*, 2017; Poggi *et al.*,
146 2017; Perron *et al.*, 2022; Panzera *et al.*, 2021, 2022). Recently, a project started to update the microzonation
147 for the Basel region. All this experience was used to define the elastic response spectra in the Swiss building code
148 (2020) and to implement a national regulation related to microzonation in SIA 261/1 (2020).

149 Geographic features, such as large and deep peri-alpine lakes, steep slopes, and alluvial basins with a high-water
150 table, make Switzerland susceptible to secondary hazards (e.g., Fritsche *et al.*, 2012; Fäh *et al.*, 2012). Using
151 geophysical imaging, seismic monitoring, numerical modelling and other techniques, the SED has been
152 conducting research on earthquake-induced hazards, including (i) rockfalls and landslides (e.g., Burjanek *et al.*,
153 2018; Kleinbrod *et al.*, 2018; Glueer *et al.*, 2021; Häusler *et al.*, 2022); (ii) lake tsunamis (e.g., Strupler *et al.*,
154 2018; Kremer *et al.*, 2022; Shynkarenko *et al.*, 2022); and (iii) liquefaction (e.g., Fritsche *et al.*, 2012; Roten *et*
155 *al.*, 2014; Janusz *et al.*, 2022; [Janusz *et al.*, 2023](#)). Findings from these studies have been incorporated into rapid
156 estimates of earthquake-induced mass movements and liquefaction probabilities via the SED ShakeMap
157 application (Cauzzi *et al.*, 2018a; Section 3.3).

(a) Hazard

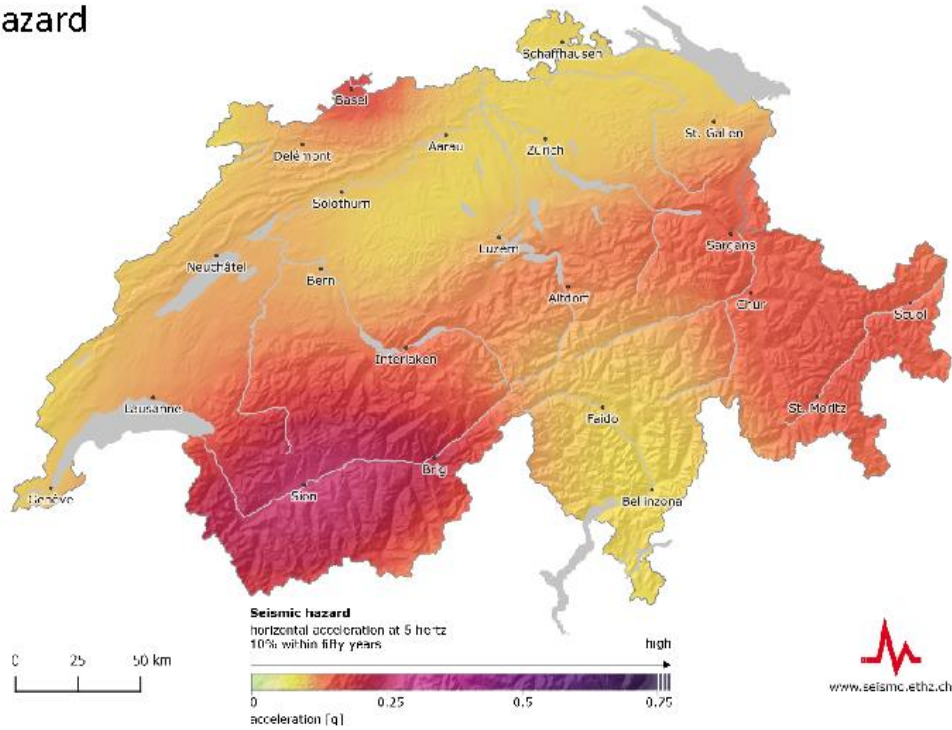

(b) Risk

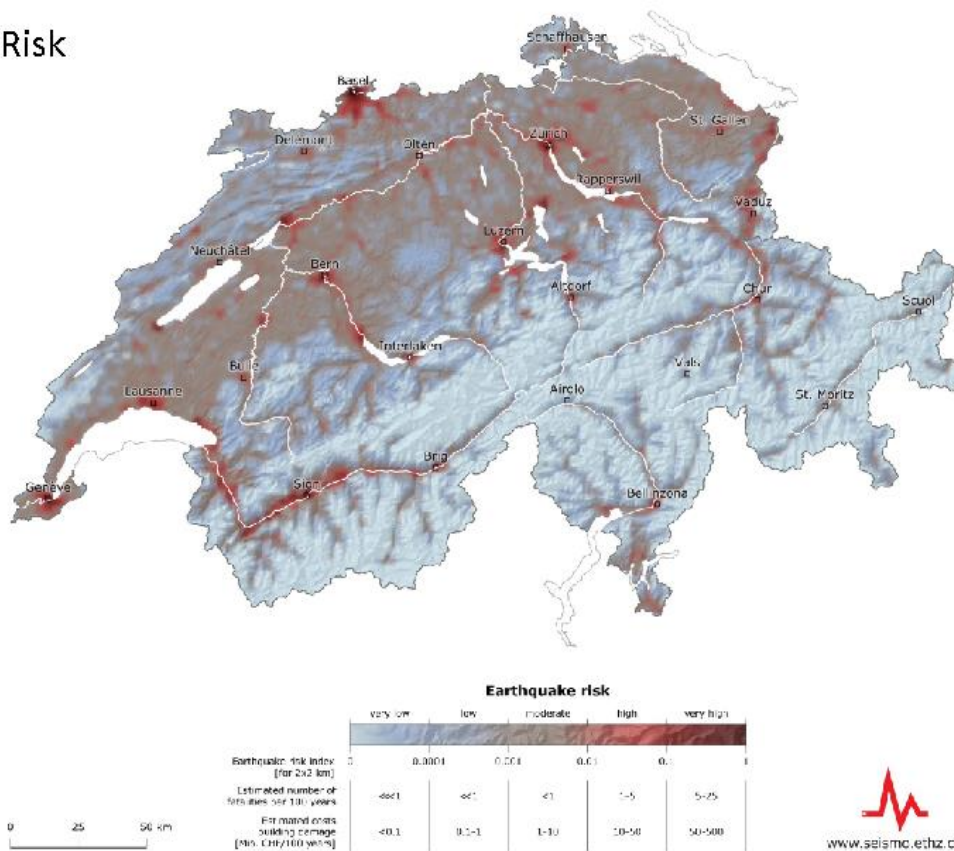

158
159
160
161
162
163
164
165

Figure 3: (a) Swiss Hazard Map (SUIhaz2015; @Swiss Seismological Service) showing the horizontal acceleration at 5 Hz; the probability of a building constructed on **rock-like ground type** experiencing this is 10% within 50 years (i.e., mean return period of 475 years). On average, 5 Hz represents the natural frequency of buildings with two to five floors, which make up the largest proportion of construction in Switzerland. 475 years is the value that underlies the Swiss Seismic Building Codes: an earthquake-resistant residential or office building should be able to withstand an earthquake that occurs where the building is situated within 475 years on average. (b) National Earthquake Risk Model of Switzerland (ERM-CH23; @Swiss Seismological Service). **The color scale refers to a composite index based on**

166 **equally-weighted, normalized average structural/nonstructural loss and fatalities during 100 years. Values are**
167 **provided in a 2 x 2 km grid. Comparatively high seismic risk is shown in dark red, lower risk is pale blue.**
168

169 While seismic hazard in Switzerland has been extensively studied, a formal effort to quantify seismic risk, which
170 assesses the potential impact of earthquakes on both people and structures, as well as the resulting financial losses,
171 was not available in the public domain until recently. In March 2023, the SED in partnership with the Federal
172 Office for the Environment (FOEN) and the Federal Office for Civil Protection (FOCP) released the first National
173 Earthquake Risk Model of Switzerland (ERM-CH23; **Figure 3b**; Wiemer *et al.*, 2023). ERM-CH23 is
174 implemented for use with OpenQuake (Pagani *et al.*, 2014), developed by the Global Earthquake Model (GEM)
175 foundation. As with most contemporary risk models, ERM-CH23 follows a modular structure (Mitchell-Wallace
176 *et al.*, 2017), with five generally decoupled components pertaining to seismic hazard on a reference rock,
177 amplification, structural vulnerability, exposure, and consequence models. These components were developed
178 through collaboration with national and international partners. Unlike past attempts that sought to assess
179 earthquake risk at a continental (Crowley *et al.*, 2021) or global scale (Silva *et al.*, 2020), ERM-CH23 is largely
180 supported by high-quality and high-resolution data.


181
182 ERM-CH23 has been developed to estimate the economic damage in Switzerland caused by earthquakes, which
183 resulted in a projected average cost of CHF 11 to 44 billion for building and contents alone, over a 100-year
184 period. Urban areas, particularly the cities of Basel, Geneva, Zurich, Lucerne, and Bern, face the greatest risk due
185 to their size and the concentration of people and assets that could be impacted by an earthquake. Additionally,
186 these cities contain numerous vulnerable buildings located on soft soil types, which can significantly amplify
187 seismic waves. As a culmination of many years of research and expertise at the SED (e.g., Michel *et al.*, 2017,
188 Hobiger *et al.*, 2021, Bergamo *et al.*, 2021), a national site amplification model (**Figure 4**) has been created as
189 part of ERM-CH23, using geo-spatial prediction techniques constrained on local site response measured at
190 instrumented sites (Bergamo *et al.*, 2023). This model is based on (i) the direct mapping of observed site
191 amplification factors at about 245 seismic stations, extracted with empirical spectral modelling technique (ESM,
192 Edwards *et al.*, 2013); and (ii) layers of site condition indicators (multi-scale topographic slope, estimated bedrock
193 depth, lithological classification of soil; **Figure 4a**). The dataset of empirical amplification factors was finally
194 interpolated over the national territory using site condition proxies as predictor variables and the regression kriging
195 algorithm (Hengl *et al.*, 2007) as a geo-spatial prediction framework. The resulting amplification model consists
196 of four soil response layers for peak ground velocity, PGV, and 5%-damped pseudo-spectral acceleration, PSA,
197 at periods of 1.0 s, 0.6 s, and 0.3 s (e.g., **Figure 4b**), each with associated maps of epistemic and aleatory variability
198 following the definition in Al Atik *et al.* (2010). The amplification maps for PGV and PSA were also converted
199 into layers of aggravation or reduction of macroseismic intensity by means of the relations of Faenza & Michelini
200 (2010, 2011).

201
202 **The exposure model represents the results of a national effort to obtain an extensive geo-referenced database of**
203 **all building objects in Switzerland. ERM-CH23 makes use of over 2.25 million building entries in the database,**
204 **after excluding close to 900'000 too small or unclassified objects. Among others, the building database contains**
205 **for each object information such as the period of construction, building function, footprint area, volume, height**
206 **or reconstruction cost (determined for each building individually and validated with data from the cantonal**

207 building insurance companies). Together with ground surveys to assess the frequency of different building
 208 materials in several cities, they underpin the ERM-CH23 exposure model. The number of occupants in each
 209 building is defined through de-aggregation of geo-referenced housing and employment statistics (Papadopoulos
 210 *et al.*, 2023b).

211
 212 Relying on the aforementioned surveys and past experience the building taxonomy proposed in Lagomarsino &
 213 Giovinazzi (2006) was found to be suitable and applicable to Switzerland, with minor modifications. Two sets of
 214 fragility curves were derived, one in terms of macroseismic intensity for the relevant part of the logic tree of the
 215 overall model and one in terms of spectral acceleration (at 0.3s or 0.6s) for the other part (Wiemer *et al.*, 2023).
 216 The former relies on the methodology described in Lagomarsino & Giovinazzi (2006) and Lagomarsino *et al.*
 217 (2021), together with engineering judgement about Swiss practice. For the development of the latter, a statistical
 218 investigation of building blueprints was first performed to identify average geometric characteristics of various
 219 building types. Capacity curves, idealised in bilinear form, were obtained from numerical models (Lestuzzi *et al.*,
 220 2017).

221

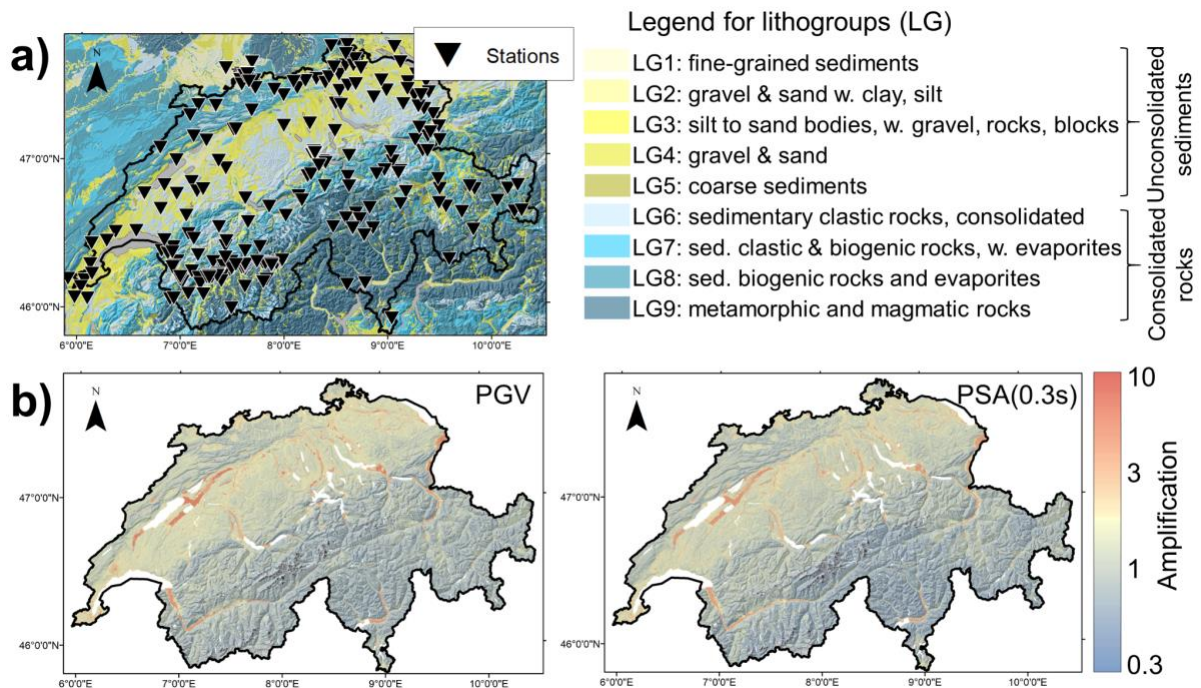

222

223 **Figure 4: (a) Geographical locations of the 243 (urban) free-field stations having recorded at least 5 earthquakes with**
 224 **signal-to-noise ratios > 3 in the period 2000 – 2021, superimposed on the lithological classification of Switzerland**
 225 **employed to derive the national soil response model. (b) PGV (left) and PSA(0.3s) (right) amplification maps (referred**
 226 **to $V_{s30} = 1105$ m/s), part of the national soil response model (Bergamo *et al.*, 2023).**

227 2. Seismic Monitoring

228 2.1 Swiss Seismic Network


229

230 The Swiss Seismic Network counts today about 220 permanent stations (network code CH; Swiss Seismological
 231 Service (SED) at ETH Zurich, 1983) with the aim of monitoring the seismic activity in Switzerland, supporting
 232 scientific research, and assessing seismic hazard and risk (Clinton *et al.*, 2011; Diehl *et al.*, 2021b; **Figure 5**). The

233 network is divided into two main groups of stations. The first group is composed of about 50 backbone broadband
234 stations (known as the ‘SDSNet’) that have very sensitive seismic sensors (broadband velocity instruments, often
235 referred to as “weak-motion”) placed in quiet areas with optimal vault conditions. These stations are evenly spread
236 throughout Switzerland and can detect and locate microseismic activity. Each of these sites also has a state-of-
237 the-art force-balance accelerometer (often referred to as “strong-motion” instrument). The second group is
238 composed of approximately 150 strong-motion stations (known as ‘SSMNet’) that are primarily located in high-
239 risk urban areas of Switzerland, such as Basel and the Rhone Valley in the Valais (e.g., Clinton *et al.*, 2011;
240 Cauzzi & Clinton, 2013). The SSMNet network is concluding a multiannual renewal project (2009 - 2023) which
241 involved the renovation and significant expansion of the network, as well as the systematic site characterization
242 of all newly instrumented sites (Michel *et al.*, 2014; Swiss Seismological Service (SED) at ETH Zurich, 2015;
243 Hobiger *et al.*, 2021). In addition to these permanent stations, the Swiss Seismic Network operates another ~70
244 temporary stations, which were installed for a variety of reasons, including the monitoring of geothermal
245 exploration (Swiss Seismological Service (SED) at ETH Zurich, 2006); aftershocks and seismic sequences (Swiss
246 Seismological Service (SED) at ETH Zurich, 2005), mass movements (Swiss Seismological Service (SED) at
247 ETH Zurich, 2012), glaciers (Swiss Seismological Service (SED) at ETH Zurich, 1985), underground rock
248 physics laboratories (Swiss Seismological Service (SED) at ETH Zurich, 2018a); as well as for risk studies (Swiss
249 Seismological Service (SED) at ETH Zurich, 2018b). The particularly dense network infrastructure in the Valais
250 is host to the Valais Near Fault Observatory (Chiaraluce *et al.*, 2022). An extra ~10 stations inside Switzerland
251 but operated by external providers are included in the SED processing to improve the detection and
252 characterization of seismic events, e.g., related to geothermal exploration (Swiss Seismological Service (SED) at
253 ETH Zurich, 2021). Around 50 stations operated by seismic agencies in neighbouring countries are also included
254 in the real-time monitoring, **which are crucial for accurate event locations and lowering the magnitude of**
255 **completeness in and around the border regions.**

256

257 The majority of broadband sensors in the Swiss Seismic Network are Streckeisen STS-2 and STS-2.5 and
258 Nanometrics T240 or T120; the Kinematics EpiSensor is deployed for strong-motion stations. The network uses
259 modern ultra-low latency digitizers (typically Nanometrics Centaur, Taurus, and Kinematics Q330), and most
260 sensors are acquired at sampling rates between 200 and 250 sps. A newly developed sensor concept allows the
261 SED to easily deploy large numbers of temporary stations rapidly in more remote locations with real-time
262 streaming. **GNSS datasets are currently not collected, processed, or integrated by the SED.**

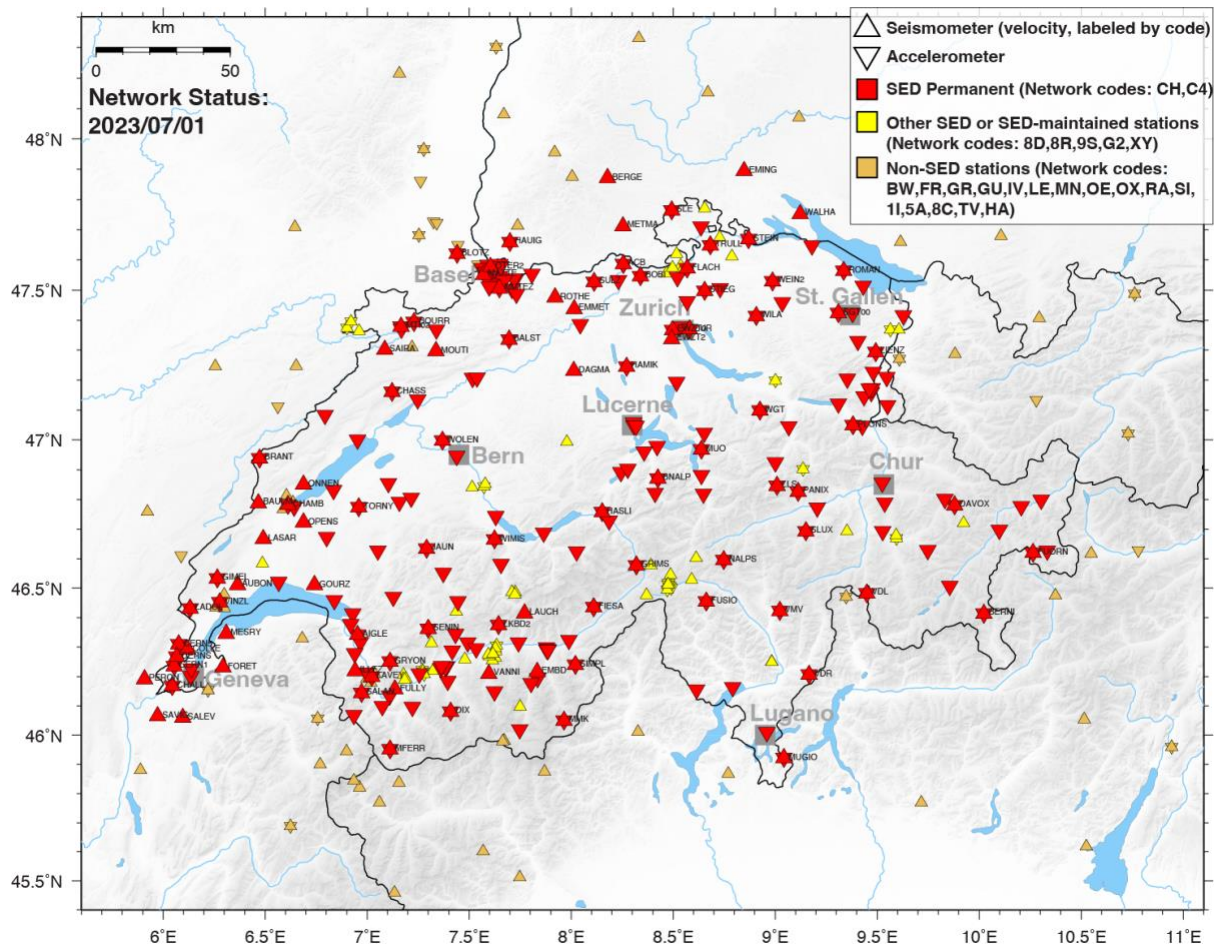

263
 264 **Figure 5: Map of Switzerland and the surrounding area showing broadband seismometers and strong-motion**
 265 **accelerometers monitored by the Swiss Seismic Network as of July 2023. The map shows permanent and temporary**
 266 **stations operated by the SED, as well as stations operated by external partners in and outside of Switzerland.**
 267
 268
 269

2.2 Seismic Data Processing

270 Over the past 20 years, the number of stations within the Swiss Seismic Network has grown steadily. Data began
 271 to be continuously archived in 1999, with the advent of the first broadband sensors. Today, continuous data is
 272 standard and the network collects around 20GB of data every day; the total archive size is currently close to
 273 100TB. The SED operates a European Integrated Data Archive (EIDA) node (Strollo *et al.*, 2021), and the
 274 majority of the waveform data, along with the SED earthquake catalogue, is open and accessible via community-
 275 standard International Federation of Digital Seismograph Networks (FDSN) web services for data access and
 276 download (**Table 1**).

277
 278 Since 2012, the Swiss Seismic Network has been utilising SeisComP (<https://www.seiscomp.de/>, last accessed
 279 **November 2023**), a software developed by the German Research Centre for Geosciences (GFZ) Potsdam and
 280 gempa GmbH (<https://www.gempa.de/>, last accessed **November 2023**), for earthquake monitoring and seismic
 281 data processing. SeisComP supports real-time data acquisition, archival, and distribution, as well as automated
 282 earthquake detection and quantification, manual earthquake review, as well as catalogue management.

283 **Detection and Location:** The real-time automated processing at the SED involves event triggering using station-
284 specific short term-average (STA)/long term-average (LTA) thresholds, refined post-picking using Baer (Baer &
285 Kradolfer, 1987) and AIC pickers, association of picks using *scautoloc* or *scanloc* (Grigoli *et al.*, 2018), and
286 location of events with *nonlinloc* (Lomax *et al.*, 2000) using Swiss-specific 1D and 3D velocity models. Several
287 projects have been initiated at the SED over the last decades to improve the existing velocity models at different
288 scales. A first 3D P-wave velocity model for Switzerland was developed by Husen *et al.* (2003), followed by a
289 regional 3D local earthquake tomography (LET) P-wave velocity model by Diehl *et al.* (2009). A refined Pg and
290 Sg LET model (parametrization 10x10x4 km) was computed by Diehl *et al.* (2021a). In their study, Diehl *et al.*
291 (2021a) demonstrated that a sub-kilometer accuracy of epicenters can be achieved in most parts of Switzerland
292 by using Pg and Sg phases in combination with an accurate 3D velocity model and the dense seismic network
293 operated by the SED. Especially in very densely instrumented parts of the network, in which the distance to the
294 closest observing station is smaller than 1.5 times the focal depth for most of the seismicity, the new velocity
295 model also achieves sub-kilometer accuracy of focal depths (Diehl *et al.*, 2021a; Lee *et al.*, 2023). This 3D velocity
296 model has been used for relocation and high-resolution seismotectonic interpretations in several recent studies
297 (e.g., Lanza *et al.*, 2022; Diehl *et al.*, 2023) and, since June 2022, is the standard model for bulletin locations by
298 the SED. Furthermore, the LET model was locally improved in southwestern Switzerland by application of a
299 staggered-grid approach, resulting in a 5x5x3 km model parametrization for the region of the Rhone-Simplon
300 Fault Zone (Lee, 2023). The SED is working on an extension of these models to the entire crust, a Swiss-wide 3D
301 Qp and Qs attenuation model, and a new Alpine-wide 3D P-wave crustal model using the data of the AlpArray
302 experiment (e.g., Hetényi *et al.*, 2018).

303 **Source Characterization:** Over the last couple of years, the SED has updated its strategy for magnitude
304 determination to align it with the latest developments in engineering seismology and seismic hazard studies in
305 Switzerland. This includes the adoption of a new local magnitude relationship MLhc (Edwards *et al.*, 2015; Racine
306 *et al.*, 2020) and the seamless computation of the moment magnitude, Mw, based on spectral fitting, MwSpec
307 (Edwards *et al.*, 2010). **In this article we use the generic “ML” notation for local magnitudes at the SED.** Station
308 corrections for local magnitudes have been included, and these changes have been implemented retrospectively
309 for all events since January 1, 2009. Since November 2021, MLhc is the authoritative Swiss-specific local
310 magnitude used by the SED, and its computation has been integrated with SeisComP. Magnitudes are provided
311 for all origins, and the preferred origin is selected using a SED developed origin score that considers the number
312 of picks, pick residuals, and azimuthal gap. For earthquakes larger than ML2.5, alerts are automatically sent to
313 federal and cantonal authorities (Section 4.2), a ShakeMap is created (Section 3.3), and the strong-motion portal
314 (<http://strongmotionportal.seismo.ethz.ch/home/>, last accessed November 2023) is populated. Manual review is
315 performed using the SeisComP *scolv* GUI. For large events with ML >3.5, manual moment tensors are calculated
316 using the *scmtv* GUI and published in the annual/bi-annual reports of the SED (e.g., Diehl *et al.*, 2021b). The
317 earthquake catalogue is curated through *scolv*. The SED is currently working on strategies to disseminate and
318 visualise its existing first-motion and moment-tensor catalogues for public access.

319

320 **Advanced Processing:** In addition to the SeisComP standard modules mentioned above, the SED has developed
321 internally, or with support from *gempa*, specific modules for advanced processing. These include

- 322 • *scwfparam* for providing engineering **intensity measures** and input to ShakeMap (Cauzzi *et al.*, 2016);
- 323 • *sceewenv*, *scvsmag*, *scfinder*, and *sceewlog* for EEW (Massin *et al.*, 2021);
- 324 • *scdetect* for earthquake detection using template matching (see below);
- 325 • *scrtDD* for real-time double difference relocation (see below).

326 *Earthquake Detection from Template Matching - scdetect*: Real-time earthquake detection is crucial for the
327 characterization of earthquake sequences. *Scdetect* is a highly configurable module for real-time earthquake
328 detection based on template matching using computationally efficient waveform cross-correlation (Armbruster *et*
329 *al.*, 2022; Mesimeri *et al.*, 2023). The workflow of *scdetect* is fully integrated with the SeisComP architecture and
330 allows users to visualize and refine the detected earthquakes using SeisComP’s built-in GUI applications. *Scdetect*
331 is currently being real-time tested in Switzerland in areas of high seismic activity using templates from past
332 earthquake sequences with the goal of detecting small magnitude earthquakes that are missed by the current
333 operational pipelines.

334
335 *Real-time Double Difference Relocation - scrtDD*: To understand the spatio-temporal evolution of natural and
336 induced seismicity, it is essential to have real-time, high-precision hypocenter locations, allowing to determine
337 the geometry and extent of seismically active faults, as well as the volume affected by stimulation procedures.
338 The spatio-temporal evolution of seismicity can also provide information about fluid-flow processes and hydraulic
339 properties, including the possible existence of hydraulic connections (e.g., Diehl *et al.*, 2017). Although relative
340 relocation procedures have been developed for decades (e.g., Console & Di Giovambattista, 1987; Waldhauser &
341 Ellsworth, 2000), they are rarely applied in routine, real-time processing. To address this, the SED has developed
342 the *scrtDD* software module (Scarabello & Diehl, 2021), which performs real-time and near-real-time double-
343 difference relocations following the procedures described in Waldhauser & Ellsworth (2000) and Waldhauser
344 (2009) within the SeisComP architecture. The module combines differential times derived from automatic and
345 manual picks as well as waveform cross-correlation with archived data from nearby past events (Scarabello *et al.*,
346 2020). The differential-time data are subsequently inverted to compute the single-event, relative location of a
347 newly detected earthquake with respect to the double-difference background catalogue following the procedure
348 of Waldhauser (2009). The module also includes the possibility to generate or update a double-difference
349 background catalogue using the standard multi-event double-difference method of Waldhauser & Ellsworth
350 (2000). To ensure that new events are continuously included in the background catalogue and that real-time
351 relocations remain accurate in areas of sparse background seismicity, the SED has implemented both single-event
352 and multi-event relocation procedures in their operational monitoring system since 2021. Currently, the SED is
353 developing and testing concepts for more advanced visualisation and dissemination of SED’s double-difference
354 catalogues.

355
356 Other advanced methods, which are currently being explored and evaluated at the SED, include

357
358 *Noise interferometry*: To monitor variations in mechanical and structural properties in the crust, the SED is
359 applying seismic noise interferometry techniques, which involve reconstructing approximative Green’s functions,
360 typically referred to as cross-correlation functions, by correlating continuous ambient seismic noise records (e.g.,

361 Nakata *et al.*, 2019). From the cross-correlation functions, ballistic waves are used to image the subsurface (e.g.,
362 Obermann *et al.*, 2016; Molinari *et al.*, 2020) and coda waves are used for time-lapse imaging (e.g., Obermann *et al.*,
363 2013, 2014). Unlike earthquakes, seismic noise offers a constant source of signals that can be recorded
364 anywhere on Earth. The spatial resolution of noise interferometry is primarily limited by the geometry and
365 aperture of the seismic network, as well as the stability in noise excitation across frequency bands. While sparse,
366 noisy stations often only allow the reconstruction of the fundamental-mode surface wave, quiet stations in dense
367 arrays allow the reconstruction of body waves with a much-increased depth resolution. In addition to the
368 monitoring of natural processes, coda wave-based noise interferometry has great potential for the time-lapse
369 monitoring of local engineering applications, such as dams, hydraulic stimulations, or carbon storage. **Changes in
370 seismic velocity and waveform similarity are proxies for aseismic stress changes in the subsurface that could
371 indicate weakening, stress build-up or imminent failure. At geothermal project sites coda wave interferometry
372 has already proven its** potential to detect unexpected reservoir dynamics earlier than the microseismic response
373 alone (Obermann *et al.*, 2015; Hillers *et al.*, 2015; Toledo *et al.*, 2022; Sánchez-Pastor *et al.*, 2019) **and as such
374 could become a valuable contributor to our earthquake risk framework in the future.**

375

376 *Fiber-optic deformation sensing:* During the past decade, fibre-optic sensing techniques, previously used mostly
377 for perimeter security and infrastructure monitoring applications, have emerged as a new seismic recording
378 paradigm. In particular, Distributed Acoustic Sensing (DAS) offers high spatial resolution at the metre scale, as
379 well as a frequency bandwidth from mHz to kHz (e.g., Lindsey *et al.*, 2020; Paitz *et al.*, 2021). Complementing
380 conventional seismometer recordings, DAS fills a niche in cases where kilometre-long fibre-optic cables can
381 either be co-used or easily deployed. The former includes fibre-optic sensing in densely populated cities (Ajo-
382 Franklin *et al.*, 2019, Spica *et al.*, 2020), under water (Spica *et al.*, 2022) or in avalanche-prone regions (Paitz *et al.*,
383 2023) with the help of telecommunication fibres. This enables urban subsurface imaging with a lateral
384 resolution on the order of 10 m, and the detection of earthquakes and avalanches for monitoring and early warning
385 purposes. On volcanoes, glaciers and ice sheets, fibre-optic cables for sensing applications can often be deployed
386 with relative ease, thereby providing new opportunities for high-resolution studies of volcanic or glacial dynamics
387 (Walter *et al.*, 2020; Klaasen *et al.*, 2021; Jousset *et al.*, 2022). More recent developments in integrated fibre-optic
388 sensing overcome the limited interrogation distance of DAS, typically several tens of kilometres, at the expense
389 of reduced spatial resolution (Marra *et al.*, 2018; Bogris *et al.*, 2022). Applications of integrated sensing for
390 seismic imaging and earthquake characterization, especially in the oceans, are promising but still in their infancy.
391 **At the current stage, fibre-optic seismology is still in exploratory mode, and the identification of clear applications
392 where it would be beneficial within an earthquake risk framework is work in progress. Specific next steps include
393 the routine incorporation of DAS data in near-real-time earthquake detections and locations, as well as the
394 detection of secondary effects, such as landslides and avalanches using existing telecom infrastructure.**

395

396 *Machine learning:* Over the last couple of years, machine learning and deep learning techniques have started to
397 rapidly transform earthquake seismology (e.g., Mousavi & Beroza, 2022). Automated seismic processing methods
398 are nowadays capable of producing large data products (such as seismicity catalogues) of high quality that match
399 or even exceed the reliability and fidelity of those made by human data processing experts. The SED is actively
400 pursuing research in deep learning-based earthquake science, including event classification, seismicity monitoring

401 methods, site-characterization, planetary seismology, and seismicity forecasts (e.g., Maranò *et al.*, 2012; Hammer
402 *et al.*, 2013; Meier *et al.*, 2019; Dahmen *et al.*, 2022). This work involves implementing various machine learning
403 models for seismic signal denoising, phase detection and arrival time estimation, signal/noise classification, phase
404 association, first motion polarity classification, and others. The SED uses non-machine learning based methods
405 as benchmarks to evaluate the effectiveness of these new approaches. For all monitoring tasks, the SED plans to
406 compare established and available models against newly-trained models and models transfer-learned using Swiss
407 data. A crucial aspect of these efforts will be the testing of the machine learning methods at various scales of
408 seismicity monitoring, including underground laboratory experiments, geothermal reservoir scales, as well as
409 national and regional monitoring scales.

410

411 3. Products and Services

412

413 3.1. Operational Earthquake (Loss) Forecasting (OEF & OELF)


414

415 Operational Earthquake Forecasting (OEF) and Operational Earthquake Loss Forecasting (OELF) are scientific
416 approaches to forecasting the short-term probability of occurrence and the associated economic and societal
417 impact of earthquakes. OEF utilises statistical analysis of historical earthquake data, seismic activity patterns, and
418 geological features in a specific region to determine the probability of earthquakes above a certain magnitude
419 occurring over a given period. OELF builds upon these OEF probabilities and assesses the potential loss of life,
420 property, and infrastructure that could result.

421 Earthquake probabilities and the resulting short-term hazard and risk can vary by several orders of magnitude
422 between quiet periods and clustered sequences, such as aftershocks sequences or swarms (van Stiphout *et al.*,
423 2010). Unlike long-term earthquake forecasts, which inform long-term risk mitigation measures such as building
424 codes, the operationally calculated short-term earthquake probabilities and the corresponding loss estimates
425 generated by OEF and OELF, respectively, provide crucial information for crisis management in case of a major
426 earthquake. To complement the long-term earthquake forecasts that are part of SUIhaz2015, the SED is therefore
427 working on an Epidemic-Type Aftershock Sequence (ETAS)-based earthquake forecasting model (Ogata, 1988)
428 for Switzerland that describes the temporal fluctuations of earthquake probabilities. ETAS models **are well suited**
429 **for this task: they are being used for OEF by agencies worldwide (Marzocchi *et al.*, 2014; Harte, 2019; van der**
430 **Elst *et al.*, 2022) and are the most extensively tested time-dependent models available (Woessner *et al.*, 2011;**
431 **Ogata *et al.*, 2013; Strader *et al.*, 2017; Savran *et al.*, 2020). Furthermore, an expert elicitation conducted within**
432 **the RISE project showed wide consensus among experts that the ETAS model shall be used as a default model**
433 **for earthquake forecasting (Mizrahi *et al.*, 2023). In ETAS, earthquakes are partitioned into background seismicity**
434 **and aftershock clusters.** In the Swiss case, the background seismicity model is based on the SUIhaz2015 time-
435 independent rate forecast, and clustered seismicity is modelled using ETAS parameters calibrated with the local
436 SED earthquake catalogue. The SED is developing and testing multiple ETAS-based models for Switzerland
437 (Mizrahi, 2022), ranging from simple models that only rely on a comprehensive earthquake catalogue as input to
438 more complex models that consider variations in catalogue completeness and additional information from

439 SUIhaz2015. To evaluate the performance of the models, pseudo-prospective forecasting experiments and
440 retrospective consistency tests (Cattania *et al.*, 2018; Nandan *et al.*, 2021; Bayliss *et al.*, 2022) are being
441 conducted.

442 Besides the scientific model to probabilistically describe future earthquake occurrence, the SED is also developing
443 the IT infrastructure required to produce automated earthquake and loss forecasts for Switzerland in real-time (see
444 example in **Figure 6**). Both systems are initially operated internally at the SED for evaluation and refinement and
445 will at a later stage be made available to the general public and federal agencies in Switzerland. In particular, the
446 OELF system will provide actionable information to individuals, public authorities, and other stakeholders, based
447 on the updated earthquake rate forecast from the OEF system and ERM-CH23. Strategies for the effective
448 communication of earthquake probabilities and uncertainties to the public are important and have been and
449 continue to be extensively studied at the SED using surveys and discussions with focus groups and stakeholders
450 at the federal and cantonal levels (Section 4.2).

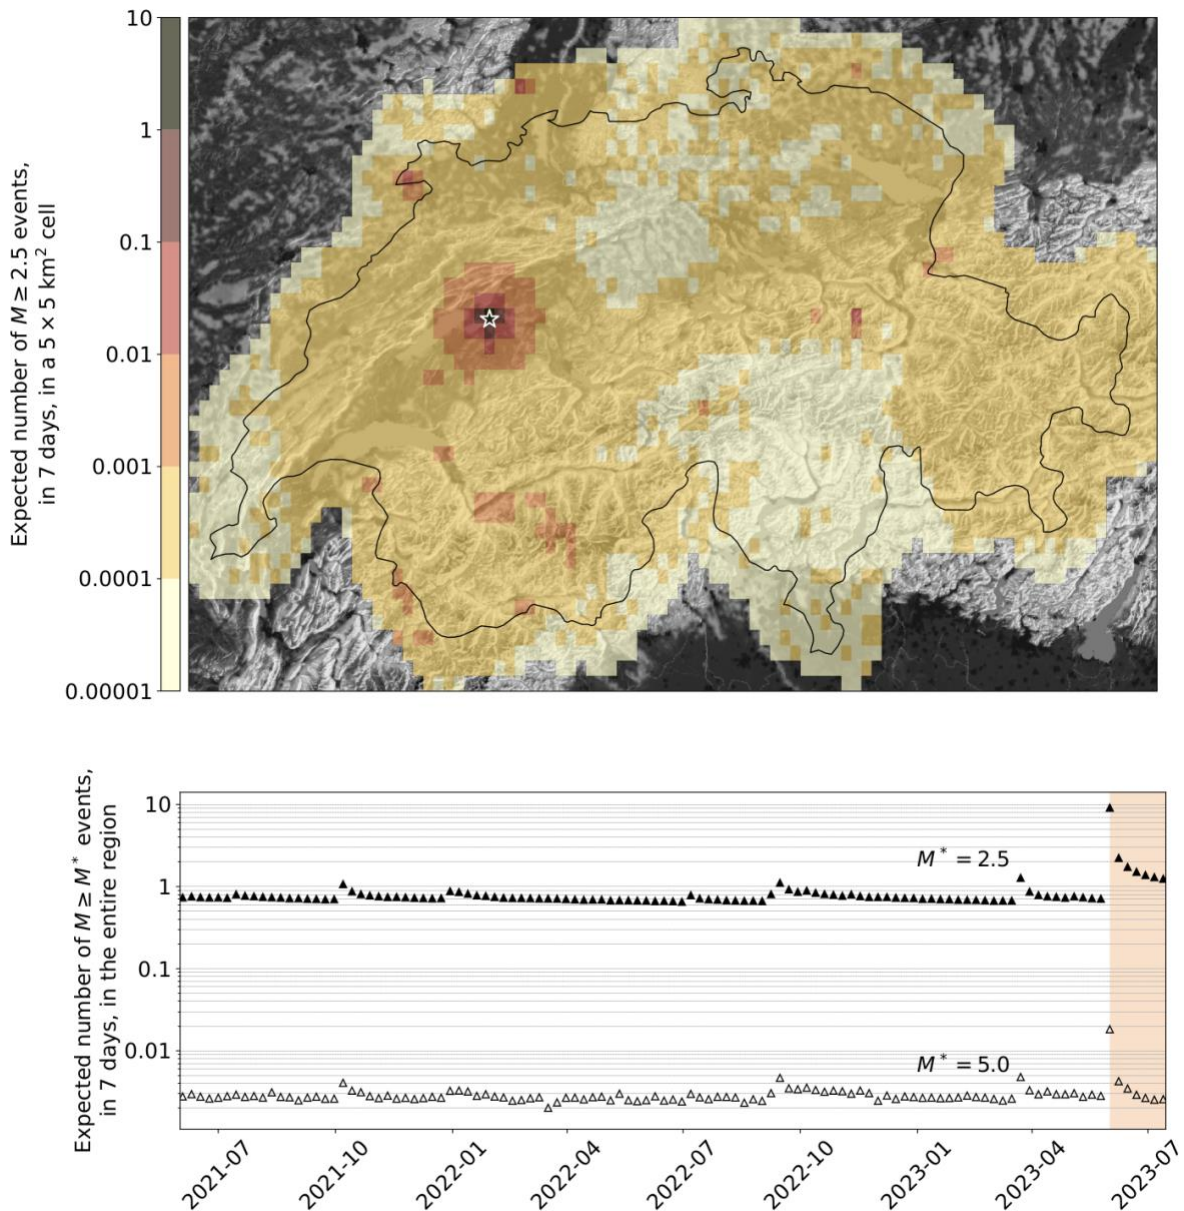

451

452 **Figure 6: Time-dependent earthquake forecast for Switzerland after a hypothetical Mw 6.0 earthquake near Bern,**
453 **Switzerland, at midnight on June 1, 2023 (white star in top panel). Top: Spatial distribution of the expected number of**
454 **felt earthquakes ($ML \geq 2.5$) in the first 7 days following the event, per $0.05^\circ \times 0.05^\circ$ grid cell (roughly 5×5 km²). Bottom:**
455 **Temporal evolution of 7-day forecasts for the entire region shown in the top panel. The filled and empty triangles**
456 **represent the expected number of $ML \geq 2.5$ and $ML \geq 5.0$ earthquakes, respectively. The shaded background marks**
457 **the time interval after the occurrence of the Mw 6.0 event.**
458

459 3.2 Earthquake Early Warning (EEW)

460

461 Earthquake early warning (EEW) systems are designed to rapidly detect earthquakes and provide people and
462 automated systems with time to prepare and take protective action before strong shaking arrives (e.g., Allen *et al.*,
463 2009; Cremen & Galasso, 2020). Although the EEW provided alert times are short (depending on the distance
464 between the earthquake and the location to be warned), they are considered sufficient to allow taking cover,
465 stopping trains or elevators, shutting down industrial processes, or triggering automated shutdown systems. EEW
466 is considered an important tool for earthquake risk reduction and disaster management, as it may help to reduce
467 the number of casualties and damage to infrastructure and buildings during an earthquake, as well as to minimise
468 social and economic disruption (e.g., Papadopoulos *et al.*, 2023a).

469

470 For around one decade, the SED has been developing open-source software and methods for EEW using a set of
471 SeisComP modules (such as *sceewenv*, *scvsmag*, and *scfinder*), known as the ETHZ-SED SeisComP EEW (ESE)
472 system (Massin *et al.*, 2021). The core of ESE is formed by the Virtual Seismologist (VS; Cua, 2005) and Finite-
473 Fault Rupture Detector (FinDer; Böse *et al.*, 2012) algorithms. VS provides fast EEW magnitudes using existing
474 SeisComP detection and location modules, while FinDer identifies fault rupture extent by matching growing
475 patterns of observed high-frequency seismic acceleration amplitudes with modelled templates. The SED is
476 currently developing a new SeisComP module to compare the observed and predicted ground-motion envelopes
477 with the goal to select origins and magnitudes from the independent VS and FinDer source parameter estimates,
478 while suppressing false alerts (Jozinović *et al.*, 2023).

479 In Switzerland, VS and FinDer are not yet used for public alerting, but rather for testing and demonstration of
480 EEW. VS uses phase picks to provide fast locations and magnitudes for any event detected by the Swiss Seismic
481 Network, while FinDer is typically activated only for earthquakes with magnitudes greater than 3.5. The median
482 delay for the first VS (since 2014) and FinDer (since 2017) alert is 8.7 and 7 seconds, respectively, but earthquakes
483 are frequently detected in as little as 4 to 6 seconds when they occur in areas with a high station density (see
484 example in **Figure 7**). Typically, it takes 3.5 seconds for the P-waves to propagate from the hypocenter to the
485 fourth closest station in the Swiss Seismic Network, the minimum number of stations required by the algorithms.
486 The SED continues to optimise the Swiss Seismic Network for EEW, although the benefit from further station
487 densification appears limited (Böse *et al.*, 2022). Despite the rare occurrence of large earthquakes in Switzerland,
488 a recent public survey shows that 70% of the Swiss population would like rapid notifications for all earthquakes
489 that are felt, even if they have a low damage potential (Dallo *et al.*, 2022a). Future mass notifications for EEW in
490 Switzerland could be enabled either through the Swiss *Alertswiss* and *MeteoSwiss* multi-hazard platforms, which
491 can receive and display push notifications on mobile devices, or through cell broadcast once available.

492


493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518

3.3 Swiss ShakeMaps

Ground-motion maps provide critical information on the severity and distribution of ground shaking generated by an earthquake. The SED has been utilising the ShakeMap® application (Worden *et al.*, 2020) in Switzerland for approximately 15 years (Cauzzi *et al.*, 2022) and is a core founder and contributor to the European ShakeMap initiative that promotes international collaboration and harmonisation of ShakeMap procedures in the greater European region (Cauzzi *et al.*, 2018b; Michelini *et al.*, 2023). ShakeMap rapidly maps seismic shaking information based on recorded and predicted intensity measures, such as peak ground acceleration (PGA), PGV, PSA, and macroseismic intensity levels, including amplification due to local site effects.

The SED ShakeMap framework is updated regularly and employs Swiss-specific ground-motion models, ground-motion-to-intensity conversion equations, and site amplification models (which are the same as those used in ERM-CH23; Section 1.1) that allow for accurate and reliable ground shaking estimates across the Swiss alpine and northern foreland regions (Cauzzi *et al.*, 2015). The SED maintains an archive of instrumental ShakeMaps for events with a magnitude larger than 2.5 that occurred since 1991 and an atlas of large historical ShakeMaps (see example in **Figure 7**). There are plans to include rapid finite-fault information in the SED ShakeMaps in the near future (Böse *et al.*, 2012).

ShakeMaps are an important tool for earthquake response and recovery efforts. At the SED, ShakeMaps serve multiple purposes. They are used (i) to inform the Swiss public about the severity of ground shaking and affected areas; (ii) to estimate the likelihood of earthquake-triggered mass movements for significant events, following a set of geospatial susceptibility proxies and PGA (Cauzzi *et al.*, 2018); and (iii) to rapidly assess the potential damage caused by ground shaking as part of the SED RIA system (Section 3.4).

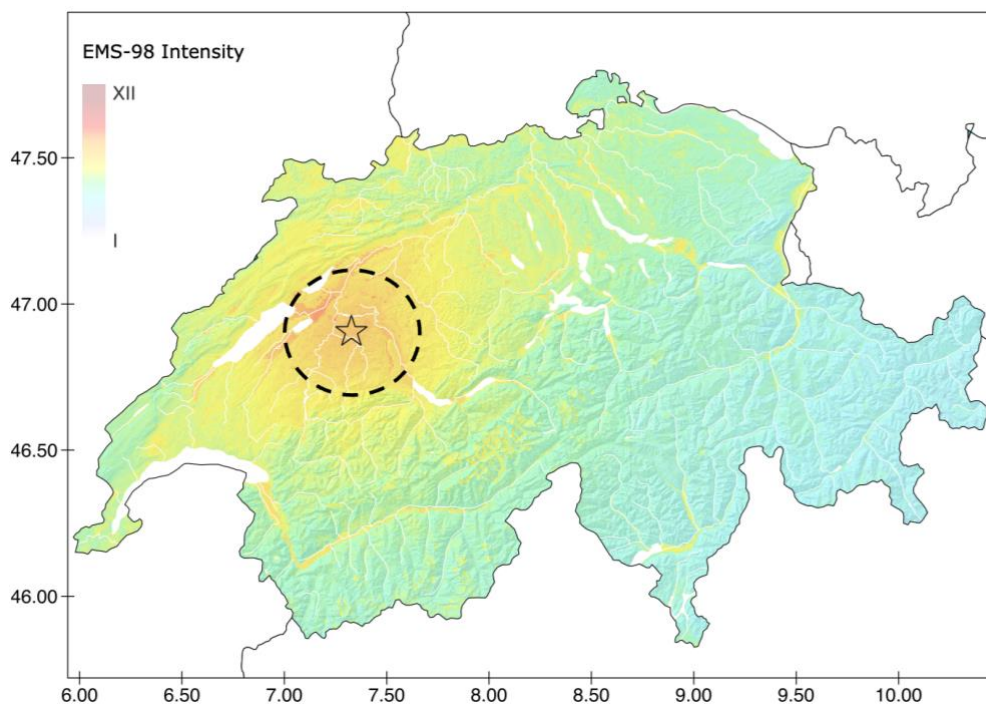

519 **Figure 7: Swiss ShakeMap for a hypothetical Mw 6.0 earthquake near Bern. Dashed circle shows the 30-km-large no-**
 520 **alert-zone centred on the epicentre where EEW could probably not be provided before strong shaking initiates.**
 521


522

523 **3.4 Rapid Impact Assessment (RIA)**

524

525 Rapid Impact Assessment (RIA) involves the gathering and analysis of information to quickly assess the damage
 526 and impact of an earthquake (or other) disaster. RIA systems shall provide decision-makers with timely and
 527 accurate information to guide their response and recovery efforts. The RIA processing chain involves (i) the
 528 assessment of the extent and severity of the damage; (ii) the evaluation of the needs of the affected population;
 529 and (iii) the identification of priority areas for response. RIA efforts in Switzerland currently focus on the first
 530 step.

531 The SED RIA system uses OpenQuake’s scenario calculator (Pagani *et al.*, 2014) and Swiss ShakeMaps (Section
 532 3.3). Once an earthquake’s location and magnitude are determined, a ShakeMap is created and the RIA calculator
 533 activated. Monte Carlo simulations are then used to generate multiple ground-motion field realisations at the
 534 location of the building assets in the ERM-CH23 exposure model. Damage and loss estimates are derived using
 535 the vulnerability functions associated with each asset and the simulated ground-motion values. The SED RIA
 536 system estimates various types of losses (damage, economic loss, injuries, deaths, and shelter needs) at the
 537 national, cantonal, and municipal levels. These estimates are compiled in a standard format (Section 4.2), which
 538 includes a map of ground shaking and visualisations of losses - along with associated uncertainties - at different
 539 scales (see example in **Figure 8**). In the future, the SED RIA system will become fully integrated and synchronised
 540 with the Swiss Seismic Network operations and perform near-real-time calculations for every earthquake with
 541 magnitude $M > 3.0$ within a specified radius around Switzerland. For now, the RIA results are shared internally
 542 at the SED for verification, but will soon be made available to the public.

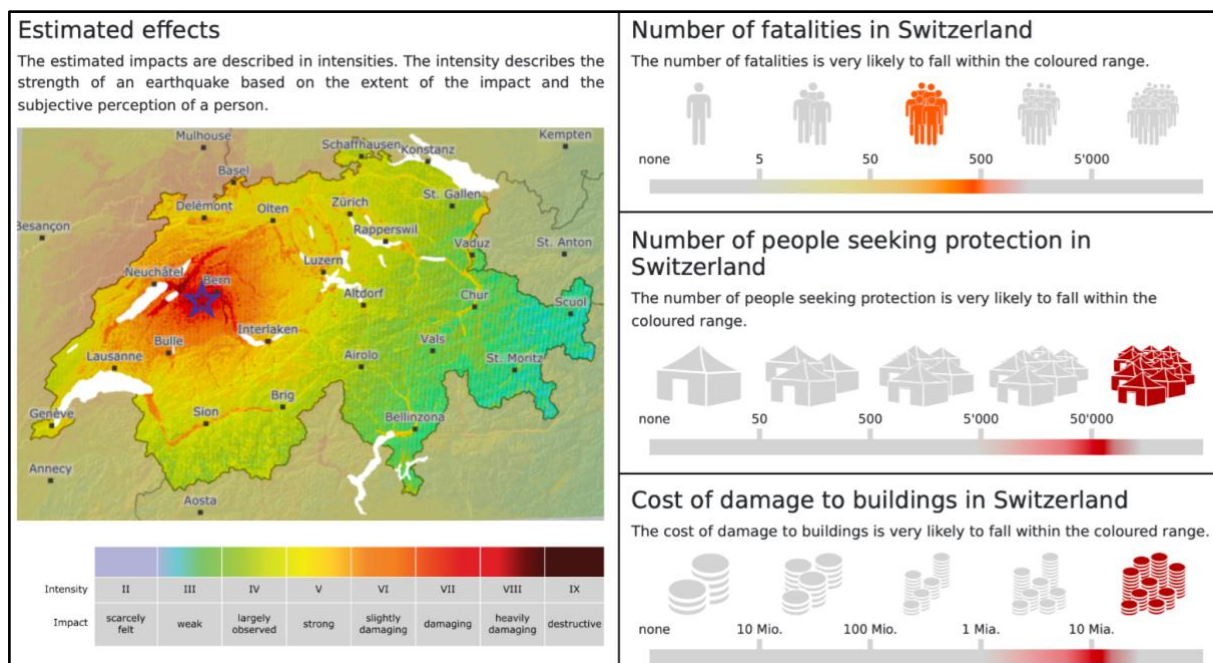

543

544 **Figure 8: Exemplary Rapid Impact Assessment (RIA; @Swiss Seismological Service) output (here national level**
545 **estimate) for a hypothetical Mw 6.0 earthquake near Bern. See [CH23/scenario/Bern_M6_0_en.pdf](http://www.seismo.ethz.ch/static/ERM-
546 <a href=) for full report.**

547

548 **3.5 Seismic Hazard Web Platform and Services**

549

550 Among other dynamic and operational earthquake-related services, the SED is actively involved in the
551 development, maintenance, and hosting of a web platform that grants access to a wide range of earthquake hazard
552 datasets, input models, results, documentation, and information at both the national and regional levels. This web
553 platform, accessible at <http://hazard.efehr.org>, is an integral part of the European Facilities of the Earthquake
554 Hazard and Risk (EFEHR) network of federated services. Moreover, the earthquake-related hazard data, products,
555 and services are designed to be interoperable with the newly developed EPOS ICS-C platform (Haslinger *et al.*,
556 2022).

557

558 The hazard platform comprises three individual web applications that enable users to interactively explore and
559 retrieve hazard curves, hazard spectra, and hazard maps. Through a user-friendly interface, users can access hazard
560 data and related metadata. The platform streamlines the retrieval of hazard maps, which can be disseminated to
561 users through multiple avenues, including customised services offering ASCII data, file downloads featuring
562 compressed ESRI shapefiles, and adherence to the OGC standards, which facilitate the distribution of projected
563 map images.

564

565 The EFEHR web portal serves as a gateway to various seismic hazard models, including the 1999 Global Hazard
566 Map of the Global Seismic Hazard Assessment Program (GSHAP, Giardini, 1999), the 2013 European Seismic
567 Hazard Model (ESHM13, Woessner *et al.*, 2015), the 2014 Earthquake Model of the Middle East (EMME14,
568 Giardini, 2017), the 2015 Swiss Hazard Model (SUIhaz15; Wiemer *et al.*, 2016), and the 2020 European Seismic
569 Hazard Model (ESHM20; Danciu *et al.*, 2021). Furthermore, this platform will be the principal repository for
570 results and datasets related to the ERM-CH23 (Wiemer *et al.*, 2023).

571

572

573 **3.6 Structural Health Monitoring (SHM)**

574

575 Due to slow retrofit and replacement rates of existing buildings, slow uptake of modern earthquake resistance
576 standards, and the intensity of extreme events, earthquakes pose a significant threat to the built environment. Post-
577 earthquake inspections are necessary to assess the damage to buildings and ensure safe shelter for the population.
578 Current expert-conducted visual inspections suffer from possible subjectivity and delay recovery. However, recent
579 advances in sensor development offer reliable and cost-effective sensing hardware, making broad monitoring of
580 multiple conventional buildings realistic. Structural Health Monitoring (SHM) provides tools to analyse these
581 sensor data and to translate vibration data into meaningful information about the structural state of a building.
582 Damage-sensitive features (DSFs) can be extracted from continuous measurements and contribute to the detection
583 and localization of earthquake-induced damage (e.g., Reuland *et al.*, 2023a).

584 Several approaches to overcome the scarcity of real-world dynamic monitoring data of both healthy and damaged
585 structures have been developed at the IBK: (i) SHM-based fragility functions relate probabilities of a structure to
586 reach a given damage state to DSFs and can provide near-real-time damage tags (Reuland *et al.*, 2021; Reuland
587 *et al.*, 2023b); (ii) a machine-learning methodology relying on domain adaptation has been successfully used to
588 transfer a damage-state classification from simulated training data to real measurements from experimentation
589 (Martakis *et al.*, 2023); and (iii) a framework for automated detection of malfunctioning sensors has also been
590 developed to ensure that sensors are functional and record valuable data during earthquakes (Martakis *et al.*,
591 2022a). Furthermore, monitoring data from buildings can contribute to earthquake preparedness by reducing
592 uncertainty and regional variability of capacity curves used to derive fragility functions (Martakis *et al.*, 2022b).
593 After successful testing on individual buildings, SHM-based rapid loss assessment has been recently integrated
594 into a regional demonstrator (Nievas *et al.*, 2023). Integrating monitoring data and engineering models into a
595 robust framework will pave the way to make SHM-based real-time building tagging operational in Switzerland
596 and elsewhere in the future.

597

598

599 **3.7 Recovery and Rebuilding Efforts (RRE)**

600

601 Recovery and Rebuilding Efforts (RRE) refer to the process of restoring a community or region to its pre-disaster
602 condition after a natural or man-made disaster. The recovery phase begins immediately after the event and focuses
603 on providing immediate assistance to affected people, restoring critical infrastructure such as power, water, and
604 transportation systems, and providing temporary housing for those displaced by the disaster. The rebuilding phase
605 involves longer-term efforts to repair or replace damaged infrastructure, such as roads, bridges, and buildings, and
606 to help affected individuals and communities recover from the economic and social impact of the disaster.

607

608 Resilient communities have the ability to quickly recover from extreme events, and retrofitting measures can help
609 decrease the risk of earthquakes and reduce repair efforts. Still, RRE is crucial to restoring community functions
610 and minimising negative social and economic impacts. Recovery models and resilience assessment tools can
611 simulate recovery trajectories and guide decision-makers towards effective actions. The iRe-CoDeS
612 (interdependent Resilience Compositional Demand and Supply) framework developed at ETH Zurich (Blagojević
613 *et al.*, 2022), offers the capacity to perform such analyses and has been integrated with OpenQuake software for
614 regional hazard and risk assessment.

615 Early loss assessment is often incomplete and imprecise, which hinders response efforts. To improve decision-
616 making, a dynamic update of regional post-earthquake damage estimates is proposed in iRe-CoDeS. Gaussian
617 process inference models are used to fuse early inspection data with a pre-existing earthquake risk model (such
618 as ERM-CH23; Bodenmann *et al.*, 2023), reducing uncertainty and improving regional building damage
619 estimates. By combining regional recovery and resilience assessment tools with this framework, uncertainty in
620 recovery trajectories can be reduced, and real-time what-if analyses can inform decision-makers on the state of
621 the community during recovery and optimal resource deployment. The iRe-CoDeS model can be updated with

622 early inspection information after an earthquake, providing recommendations for recovery efforts and remaining
623 recovery time.

624

625

626 **4. Operation and Communication**

627

628 **4.1. Operation**

629

630 Providing operational services demands a high level of service availability. To achieve this, the SED provides
631 appropriate hardware solutions, invests in professional software engineering, and provides for 24/7 IT on-call
632 duty backup. The seismic processing data centre at the SED is the operational service with the longest history and
633 most mature setup, and provides the template for new services as they are added to the operational ecosystem.
634 High availability services are achieved by operating two identical software versions on fully redundant and
635 physically separated hardware, a primary and backup system. If any issues arise on the primary system, the backup
636 system can immediately become primary. A third server is also supported for development and prototyping.
637 Databases are also fully replicated and backed-up, and when database information is provided to the public, it is
638 accessed only via replicated databases to remove the possibility of external loads compromising the operational
639 systems.

640

641 To react to operational and seismic crises, the SED operates three 24/7 on-call teams, dedicated to technical IT-
642 related issues, immediate review of all seismic events with $M > 2.5$, and for handling inquiries from authorities,
643 media and the public for Swiss and international events. To provide internal and external seismic alerts, an in-
644 house developed alarm system enables the duty seismologists to take prompt action when an earthquake occurs.
645 The seismic alerts are automatically activated when an earthquake above a specific magnitude is detected within
646 or in proximity of Switzerland. Web portals enable the public distribution of products generated by these
647 operational services via direct access or APIs.

648

649 The SED conforms to international community standards in data formats, metadata and dissemination services
650 where possible (such as FDSN mseed, stationXML and web services), and indeed is at the cutting edge in
651 developing new standards, for example the SED curates the quakeML (Schorlemmer *et al.*, 2011) data model,
652 ensuring that earthquake information is easily accessible and shareable. The integration of harmonised data and
653 processes is at the heart of effective dynamic earthquake risk management and mitigation strategies.

654

655

656 **4.2 Communication and Societal Perspective**

657

658 As a federal agency, the SED is responsible for informing the public, authorities, and media about earthquakes
659 affecting Switzerland, and providing warnings when needed. For this purpose, the SED monitors ground shaking
660 24/7 in Switzerland and neighbouring countries (Section 2.1). Details (including time, location, magnitude, and

661 possible impacts) of a detected earthquake are published on the SED webpage within 90 seconds. Federal and
662 cantonal authorities are informed automatically if the magnitude is 2.5 or larger. A team of on-call duty
663 seismologists assesses every recorded earthquake and takes further actions if needed, and is available for media
664 requests. The SED also engages in science communication during quiet times to transfer knowledge about
665 earthquakes and related topics. To ensure effective communication, the SED interacts with societal stakeholders
666 and co-develops and evaluates various information products, including those presented in this article. The SED
667 also contributes to the training of future earthquake experts through teaching efforts at ETH Zurich and beyond.

668 Recently, the SED has been shifting from hazard to risk communication, which should increase societies'
669 preparedness and disaster resilience. To ensure effectiveness, it is important that communication products are
670 designed by an interdisciplinary expert group and then tested with the relevant end-users before releasing them
671 publicly. In preparation of the ERM-CH23 release in March 2023, the SED has tested various output formats for
672 risk products with professional stakeholders of the society and the general public:

- 673 • Marti *et al.* (2023) showed that people and professionals consider RIA reports and risk scenarios to be
674 very important, although they appeared similarly challenged to correctly interpret the information
675 provided. To represent the uncertainties of the model estimates, the simplest visualisation using ranges
676 was the most understandable and the most popular (see **Figure 8**).
677
- 678 • Regarding EEW systems, a public survey conducted by the SED in Switzerland (Dallo *et al.*, 2022a),
679 revealed that the Swiss public wants to receive EEW alerts for all felt events (even if they are not
680 damaging) and their preferences align with those in other countries. EEW alerts with pictograms have
681 the strongest effect in motivating people to take action, even if that is not necessarily what they like best.
682
- 683 • The SED has collaborated with the Winton Center at the University of Cambridge to test OEF
684 communications with the general public in Italy, Switzerland, and California in the US. A survey of
685 Dryhurst *et al.* (2022) found that people in all three countries provided similar answers. Maps
686 representing OEF probabilities as different coloured isoline compartments could mislead the public. The
687 best information combination for OEF communication is a geographical map showing the forecast area,
688 textual information about the current absolute chance of an earthquake, and a risk ladder to provide
689 context.
690
- 691 • Dallo *et al.* (2022b) conducted three online surveys with various experiments and virtual focus groups
692 to improve communication of earthquake information on multi-hazard platforms, such as *MeteoSwiss*
693 and *Alertswiss* (Section 3.2). The results indicated that people prefer a combination of visual and textual
694 information, pictorial and textual behavioural recommendations, interactive features, consideration of
695 data privacy issues, messages with time indication and action-keywords, as well as clearly
696 distinguishable icons of the epicentre and the person's location (Valenzuela Rodríguez, 2021).
697

698 When designing information campaigns, it is important to consider people's personal factors, which can influence
699 their interpretation of the information provided, their design preferences, and their perceived usefulness. To

700 achieve successful campaigns, key factors to consider include regular communication, context, channel choice,
701 risk communicator training, and community-based approaches (Marti *et al.*, 2020). A significant challenge is to
702 provide personalised notifications to end-users while still addressing their concerns about data privacy.
703

704 **5. Conclusions and Outlook**

705 Earthquake hazard and risk are often assumed to be constant over time. However, because seismicity is spatially
706 and temporally clustered, and because individual exposure can change rapidly, both hazard and risk are often
707 strongly time-dependent on different time scales. In the dynamic-risk framework outlined in this paper, seismic
708 activity is continuously monitored by a regional seismic network, such as the one operated by the SED, and risk
709 assessments are dynamically adapted in response to the latest data. We believe that this dynamic concept provides
710 a more accurate and timely means of identifying potential seismic hazards and assessing risks, thereby enabling
711 more efficient mitigation strategies and improving overall safety outcomes.
712

713 As described in this paper, we have developed key operational services of a dynamic earthquake risk framework
714 for Switzerland. These include earthquake monitoring, ShakeMaps, EEW, OEF, RIA, and computational
715 infrastructure. The seismic network and the ShakeMap system are currently the most mature of these services in
716 Switzerland, followed by EEW and RIA; the OEF service is currently in a demonstration phase (**Table 1**).
717 Furthermore, the SED has a well-established communication network to provide rapid earthquake information to
718 the public over multiple channels.
719

720 Integration and interoperability are important aspects of our dynamic risk framework. Integration means that the
721 framework must be able to accommodate different components while also remaining adaptable enough to function
722 even when specific components are not connected. For example, some countries interested in establishing similar
723 services may prioritise ShakeMaps and RIA while opting not to invest in EEW. Interoperability, on the other
724 hand, entails that the various products and services within the framework should share common models and
725 databases, thus eliminating redundancy in processing and ensuring efficient utilisation of resources. For example,
726 the Swiss EEW system uses the same ground-motion models as ShakeMaps, and the Swiss RIA system uses the
727 same ShakeMaps and the same site amplification layers derived for the national risk models, and calculates
728 impacts on people and buildings based on national databases of buildings and their vulnerability.
729

730 During the development of our framework, we came across several key findings. First, the foundation of this
731 framework is highly dependent on the existence of a robust seismic monitoring network and a high-quality data
732 processing system and infrastructure. These components play a key role as they serve as the primary data sources
733 for various downstream risk-related products. Secondly, the quality and effectiveness of the underlying models
734 and methodologies are critically dependent on the incorporation of the latest scientific advances and the
735 availability of computational infrastructure. Ensuring that the framework is kept up to date with the latest research
736 is of paramount importance and may even be the greatest challenge in the long term. Thirdly, it is essential to
737 involve stakeholders and target audiences at an early stage of development to ensure that products and services
738 meet their expectations and understanding.

739
 740
 741
 742
 743
 744
 745
 746
 747
 748
 749
 750
 751

In the dynamic risk context, earthquake risk is assessed in a consistent and harmonised way for the next few seconds or for the next five decades. This not only offers great potential for synergy, but also means for comparative Cost-Benefit Analysis (CBA). While traditional CBA is useful for evaluating EEW systems (e.g., Papadopoulos *et al.*, 2023a) or OE(L)F-based alerting systems (van Stiphout *et al.*, 2010; Hermann *et al.*, 2016), alternative methods such as Multi-Criteria Decision Analysis (MCDA) have proven useful for decision-making when non-economic factors are important (e.g., Guarini *et al.*, 2018). The flexibility and transparency of MCDA allows for the consideration of a wider range of criteria beyond economic costs and benefits, including model bias, model uncertainty, time gain in emergency response, information gain etc., making it a valuable tool for assessing the cost-effectiveness of different dynamic risk products. Ongoing research aims to assess the wider benefits of these dynamic risk products for earthquake risk reduction, incorporating surveys and expert opinion to facilitate a dialogue with decision-makers and the public.

752 **Table 1:** Status of earthquake risk-related products and services in Switzerland (as of November 2023).

Product/Service	Type	Status & Availability
Earthquake Hazard and Risk Model	product	available (SUIhaz2015 and ERM-CH23) SED OpenQuake (engine <i>sed-oq-engine</i>): https://github.com/swiss-seismological-service/sed-oq-engine
Seismic Network	operational service	mature seismic stations: https://networks.seismo.ethz.ch/en/networks/ch/ http://eida.ethz.ch/fdsnws/station/1/ waveform data: http://eida.ethz.ch/fdsnws/dataselect/1/ earthquake catalogue: http://www.seismo.ethz.ch/en/earthquakes/ http://eida.ethz.ch/fdsnws/event/1/
Routine Seismic Data Processing	operational service	mature <i>scdetect</i> : earthquake detection using template matching https://scdetect.readthedocs.io <i>scrtDD</i> : real-time double difference relocation https://docs.gempa.de/scrtdd/current/ <i>scwfparam</i> : provides engineering parameters and input to ShakeMap https://www.seiscomp.de/doc/apps/scwfparam.html

Product/Service	Type	Status & Availability
		<i>sceewenv</i> , <i>scvsmag</i> , <i>scfinder</i> , <i>sceewlog</i> : EEW modules https://docs.gempa.de/sed-eew/current
ShakeMaps	operational service	mature https://github.com/DOI-USGS/ghsc-esi-shakemap
Earthquake Hazard Web-Services	operational service	mature European Facilities of the Earthquake Hazard and Risk (<i>EFEHR</i>): http://hazard.efehr.org <i>EPOS</i> ICS-C platform: https://www.epos-eu.org/integrated-core-services
Earthquake [Loss] Forecasting (OE[L]F)	demonstration service	beta RAMSIS core: (https://gitlab.seismo.ethz.ch/indu/rt-ramsis , dependencies described there) ETAS model wrapper: https://gitlab.seismo.ethz.ch/indu/ramsis-nsfm wrapped ETAS: https://github.com/swiss-seismological-service/etas/
Earthquake Early Warning (EEW)	demonstration service	beta https://docs.gempa.de/sed-eew/current
Rapid Impact Assessment (RIA)	demonstration service	beta - operational https://github.com/swiss-seismological-service/REIA
Structural Health Monitoring (SHM)	demonstration service	beta (codes not publicly available)
Recovery and Rebuilding Efforts (RRE)	demonstration software	available <i>pyrecodes</i> : open-source python library for post-disaster recovery simulation and resilience assessment (Blagojević and Stojadinović, 2023): https://nikolablagojevic.github.io/pyrecodes/html/usa/ge/what_is_pyrecodes.html

753

754 The SED continues to advance its seismic observational capabilities and risk products, including double-

755 difference earthquake catalogues, extending 3D crustal velocity models, enhancing magnitude determination, and

756 exploring new visualisation and distribution methods. They aim to provide short-term earthquake probabilities

757 and associated seismic hazards and losses, to provide rapid earthquake information and EEW to the Swiss public,

758 and to integrate the RIA system into the seismic network operations for near-real-time calculations for earthquakes
759 in and around Switzerland above magnitude 3.0. In addition, research is ongoing to determine how best to
760 communicate earthquake forecasts and support the translation of probabilities into actions.

761 We expect our framework to improve over time as individual components are improved. For example, in the near
762 future, simulation-based approaches, such as physics-based ground motion modelling, or so-called digital twin
763 components may replace certain elements of the framework. Embracing the conceptual framework of dynamic
764 risk inherently signifies a comprehensive and interdisciplinary approach to the assessment, reduction, and
765 resilience of earthquake risks. Furthermore, this framework can be easily extended to a multi-risk framework,
766 which offers significant advantages in addressing a variety of risk reduction challenges.

767

768 Future work on our framework could include (i) transitioning demonstration services to become operational; (ii)
769 continuing the development and testing of the proposed services and risk framework in a wider range of countries,
770 both in Europe and globally, as well as exploring collaborations with interested stakeholders; (iv) advancing the
771 implementation of European-level services within the European Plate Observing System (EPOS); (v) widening
772 the scope of the proposed exposure and loss models to encompass not only buildings but also critical
773 infrastructures, such as for transportation, water, or energy, as well as high-risk industries, which play an important
774 role in disaster risk management and emergency response efforts; and (vi) continuing and expanding the use of
775 promising techniques like AI and DAS.

776

777 We would like to emphasise that while we believe that the dynamic and user-centric risk framework outlined here
778 is valuable and can contribute to earthquake risk reduction, it should not detract from a strong focus on earthquake
779 engineering efforts. Building to modern seismic standards has proven to be the most valuable means of reducing
780 financial and human losses in future earthquake disasters and must remain a priority.

781

782 As data, models, and computing resources increase, dynamic and operational earthquake-related services will
783 become increasingly available and important for earthquake risk assessment and mitigation. This paper may serve
784 as a reference guide for countries wishing to establish similar tools and services in the context of dynamic risk.
785 Links to publicly available components of our framework are provided in **Table 1**.

786

787 **Acknowledgements**

788 This article was partially funded by the European Union’s Horizon 2020 research and innovation program under
789 grant agreement No. 821115 “Real-time earthquake rIsk reduction for a reSilient Europe (RISE)”
790 (<http://www.rise-eu.org>). Opinions expressed in this paper solely reflect the authors’ view; the EU is not
791 responsible for any use that may be made of the information it contains. The authors used OpenAI to improve
792 readability and language in some parts of the paper. We are grateful for the constructive feedback from three
793 anonymous reviewers and Associate Editor H. Crowley.

794

795

796 **Author contributions**

797 We use the [CRediT](#) Contributor Roles Taxonomy to categorise author contributions. **Methodology &**
798 **Investigation:** *Hazard and Risk*: LD, AP, PR, SW, PB, DF, FH, BMC, DG. *Seismic Monitoring (network &*
799 *processing)*: JC, TD, CC, FM, FH, DF, AF, MB, FG, LH, PJ, DJ, FL, TL, M-AM, AO, MS, LS, AS, SW, PK.
800 *OE(L)F*: LM, SW, MH, LD, AP, PR. *EEW*: MB, FM, JC, DJ, CC. *ShakeMaps*: CC, JC, MB, PB, DF. *RIA*: LD,
801 AP, PR, NS, SW. *SHM*: YR, EC, LB, PM, BS, NB. *RRE*: YR, EC, LB, PM, BS, NB. Operations and
802 Communication: JC, LD, PK, ID, MM, NV, LD, AP, PR. **Writing – original draft**: MB. **Writing – review &**
803 **editing**: all. **Project investigators and Funding**: DG, SW.

804 **Declaration of Competing Interests**

805 The authors acknowledge that there are no conflicts of interest recorded.
806

807 **References**

- 808 Ajo-Franklin, J., Dou, S., Lindsey, N., Monga, I., Tracy, C., Robertson, M., Rodriguez Tribaldos, V., Ulrich, C.,
809 Freifeld, B., Daley, T., and Li, X.: Distributed acoustic sensing using dark fiber for near-surface
810 characterisation and broadband seismic event detection, *Sci. Rep.*, 9, [https://doi.org/10.1038/s41598-018-](https://doi.org/10.1038/s41598-018-36675-8)
811 [36675-8](https://doi.org/10.1038/s41598-018-36675-8), 2019.
- 812 Al Atik, L., Abrahamson, N., Bommer, J. J., Scherbaum, F., Cotton, F., and Kuehn, N.: The Variability of Ground-
813 Motion Prediction Models and Its Components, *Seismological Research Letters*, 81, 794–801,
814 <https://doi.org/10.1785/gssrl.81.5.794>, 2010.
- 815 Allen, R. M., Gasparini, P., Kamigaichi, O., and Böse, M.: The status of earthquake early warning around the
816 world: an introductory overview, *Seism. Res. Lett.*, 80, 682–693, <https://doi.org/10.1785/gssrl.80.5.682>,
817 2009.
- 818 Armbruster, D., Mesimeri, M., Kaestli, P., Diehl, T., Massin, F., and Wiemer, S.: SCDetect: Near Real-Time
819 Computationally Efficient Waveform Cross-Correlation Based Earthquake Detection during Intense
820 Earthquake Sequences, *EGU GA*, <https://doi.org/10.5194/egusphere-egu22-12443>, 2022.
- 821 Bayliss, K., Naylor, M., Kamranzad, F., and Main, I.: Pseudo-prospective testing of 5-year earthquake forecasts
822 for California using inlabru, *Natural Hazards and Earth System Sciences*, 22 (10), 3231–3246, 2022.
- 823 Bear, M. and Kradolfer, U.: An automatic phase picker for local and teleseismic events, *Bull. Seismol Soc Am*,
824 77, 1437–1445, 1987.
- 825 Bergamo, P., Hammer, C., and Fäh, D.: Correspondence between Site Amplification and Topographical,
826 Geological Parameters: Collation of Data from Swiss and Japanese Stations, and Neural Networks-Based
827 Prediction of Local Response, *Bulletin of the Seismological Society of America*, 112(2), 1008–1030, 2021.
- 828 **Bergamo, P., Fäh, D., Panzera, F., Cauzzi, C., Glueer, F., Perron, V., Wiemer, S.: A site amplification model for**
829 **Switzerland based on site-condition indicators and incorporating local response as measured at seismic**
830 **stations. *Bull Earthquake Eng* 21, 5831–5865, <https://doi.org/10.1007/s10518-023-01766-z>, 2023.**
- 831 Blagojević, N., Hefti, F., Henken, J., Didier, M., and Stojadinović, B.: Quantifying disaster resilience of a
832 community with interdependent civil infrastructure systems, *Structure and Infrastructure Engineering*,
833 0(0), 1–15, <https://doi.org/10.1080/15732479.2022.2052912>, 2022.
- 834 Bodenmann, L., Reuland, Y., and Stojadinović, B.: Dynamic post-earthquake updating of regional damage
835 estimates using Gaussian processes, *Reliability Engineering & System Safety*, 234, 109201,
836 <https://doi.org/10.1016/j.ress.2023.109201>, 2023.
- 837 Bogris, A., Nikas, T., Simos, C., Simos, I., Lentas, K., Melis, N. S., Fichtner, A., Bowden, D., Smolinski, K.,
838 Mesaritakis, C., and Chochliournos, I.: Sensitive seismic sensors based on microwave frequency fiber
839 interferometry in commercially deployed cables, *Sci. Rep.*, 12, [https://doi.org/10.1038/s41598-022-18130-](https://doi.org/10.1038/s41598-022-18130-x)
840 [x](https://doi.org/10.1038/s41598-022-18130-x), 2022.

841 Böse, M., Heaton, T. H., and Hauksson, E.: Real-time Finite Fault Rupture Detector (FinDer) for large
842 earthquakes, *Geophysical Journal International*, 191, 803–812, [https://doi.org/10.1111/j.1365-](https://doi.org/10.1111/j.1365-246X.2012.05657.x)
843 [246X.2012.05657.x](https://doi.org/10.1111/j.1365-246X.2012.05657.x), 2012.

844 Böse, M., Papadopoulos, A. N., Danciu, L., Clinton, J. F., and Wiemer, S.: Loss-Based Performance Assessment
845 and Seismic Network Optimization for Earthquake Early Warning, *Bulletin of the Seismological Society*
846 *of America*, 112, 1662–1677, <https://doi.org/10.1785/0120210298>, 2022.

847 Blagojević, N., and Stojadinović, B.: pyrecodes: an open-source library for regional recovery simulation and
848 disaster resilience assessment of the built environment (v0.1.0). Chair of Structural Dynamics and
849 Earthquake Engineering, ETH Zurich. <https://doi.org/10.5905/ethz-1007-700>, 2023.

850 Burjánek, J., Gischig, V., Moore, J. R., and Fäh, D.: Ambient vibration characterization and monitoring of a rock
851 slope close to collapse, *Geophysical Journal International*, 212(1), 297–310, 2018.

852 Cattania, C., Werner, M. J., Marzocchi, W., Hainzl, S., Rhoades, D., Gerstenberger, M., Liukis, M., Savran, W.,
853 Christophersen, A., and Helmstetter, A.: The forecasting skill of physics-based seismicity models during
854 the 2010–2012 Canterbury, New Zealand, earthquake sequence, *Seismological Research Letters*, 89(4),
855 1238–1250, 2018.

856 Cauzzi, C. and Clinton, J.: A High- and Low-Noise Model for High-Quality Strong-Motion Accelerometer
857 Stations, *Earthquake Spectra*, 29(1), 85–102, <https://doi.org/10.1193/1.4000107>, 2013.

858 Cauzzi, C., Edwards, B., Fäh, D., Clinton, J., Wiemer, S., Kästli, P., Cua, G., and Giardini, D.: New predictive
859 equations and site amplification estimates for the next-generation Swiss ShakeMaps, *Geophysical Journal*
860 *International*, 200(1), 421–438, <https://doi.org/10.1093/gji/ggu404>, 2015.

861 Cauzzi, C., Behr, Y., Le Guenan, T., Douglas, J., Auclair, S., Woessner, J., Clinton, J., and Wiemer, S.: Earthquake
862 early warning and operational earthquake forecasting as real-time hazard information to mitigate seismic
863 risk at nuclear facilities, *Bulletin of Earthquake Engineering*, 14, 2495–2512,
864 <https://doi.org/10.1007/s10518-016-9864-0>, 2016a.

865 Cauzzi, C., Sleeman, R., Clinton, J., Ballesta, J. D., Galanis, O., and Kästli, P.: Introducing the European Rapid
866 Raw Strong-Motion Database, *Seismological Research Letters*, 87, 977–986,
867 <https://doi.org/10.1785/0220150271>, 2016b.

868 Cauzzi, C., Clinton, J., Faenza, L., Heimers, S., Koymans, M. R., Lauciani, V., Luzi, L., Michelini, A., Puglia,
869 R., and Russo, E.: Introducing a European integrated ShakeMap system, *Seismol. Res. Lett.*, 2018a.

870 Cauzzi, C., Fäh, D., Wald, D. J., Clinton, J., Losey, S., and Wiemer, S.: ShakeMap-based prediction of earthquake-
871 induced mass movements in Switzerland calibrated on historical observations, *Natural Hazards*, 92(2),
872 1211–1235, <https://doi.org/10.1007/s11069-018-3248-5>, 2018b.

873 Cauzzi, C. V., Clinton, J., Kaestli, P., Fäh, D., Bergamo, P., Böse, M., Haslinger, F., and Wiemer, S.: Swiss
874 Shakemap at Fifteen: Distinctive Local Features and International Outreach, in: *Seismological Society of*
875 *America Annual Meeting (SSA 2022)*, 2022.

876 Chiaraluce, L., Festa, G., Bernard, P., Caracausi, A., Carluccio, I., Clinton, J., Stefano, R., Elia, L., Evangelidis,
877 C., Ergintav, S., Jianu, O., Kaviris, G., Marmureanu, A., Sebela, S., and Sokos, E.: The Near Fault
878 Observatory community in Europe: a new resource for faulting and hazard studies, *Ann. Geophys.*, 65,
879 2022.

880 Console, R., and Di Giovambattista, R.: Local earthquake relative location by digital records. *Physics of the Earth*
881 *and Planetary Interiors*, 47I, 43–49. [https://doi.org/10.1016/0031-9201\(87\)90065-3](https://doi.org/10.1016/0031-9201(87)90065-3), 1987.

882 Clinton, J., Cauzzi, C., Fäh, D., Michel, C., Zweifel, P., Olivieri, M., Cua, G., Haslinger, F., and Giardini, D.: The
883 current state of strong motion monitoring in Switzerland, *Earthquake Data in Engineering Seismology:*
884 *Predictive Models, Data Management and Networks*, 219–233, 2011.

885 Cremen, G. and Galasso, C.: Earthquake early warning: Recent advances and perspectives, *Earth-Science*
886 *Reviews*, 205, 103184, <https://doi.org/10.1016/j.earscirev.2020.103184>, 2020.

887 Crowley, H., Dabbeek, J., Despotaki, V., Rodrigues, D., Martins, L., Silva, V., Romão, X., Pereira, N., Weatherill,
888 G., and Danciu, L.: European seismic risk model (ESRM20), EFEHR Technical Report, 2,
889 <https://doi.org/10.3929/ethz-b-000590388>, 2021.

890 Cua, G. B.: Creating the Virtual Seismologist: Developments in Ground Motion Characterization and Seismic
891 Early Warning, Dissertation (Ph.D.), California Institute of Technology, [https://doi.org/10.7907/M926-](https://doi.org/10.7907/M926-J956)
892 [J956](https://doi.org/10.7907/M926-J956).<https://resolver.caltech.edu/CaltechETD:etd-02092005-125601>, 2005.

893 Dahmen, N. L., Clinton, J. F., Meier, M. A., Stähler, S. C., Ceylan, S., Kim, D., Stott, A. E., and Giardini, D.:
894 MarsQuakeNet: A more complete marsquake catalog obtained by deep learning techniques, *Journal of*
895 *Geophysical Research: Planets*, 127(11), p.e2022JE007503, 2022.

896 Dallo, I., Marti, M., Clinton, J., Böse, M., Massin, F., and Zaugg, S.: Earthquake early warning in countries where
897 damaging earthquakes only occur every 50 to 150 years – The societal perspective, *International Journal*
898 *of Disaster Risk Reduction*, 83, 103, <https://doi.org/10.1016/j.ijdr.2022.103441>, 2022a.

899 Dallo, I., Stauffacher, M., and Marti, M.: Actionable and understandable? Evidence-based recommendations for
900 the design of (multi-)hazard warning messages, *International Journal of Disaster Risk Reduction*, 74,
901 102917, <https://doi.org/10.1016/j.ijdr.2022.102917>, 2022b.

902 Danciu, L., Nandan, S., Reyes, C., Basili, R., Weatherill, G., Beauval, C., Rovida, A., Vilanova, S., Sesetyan, K.,
903 Bard, P.-Y., Cotton, F., Wiemer, S., and Giardini, D.: The 2020 update of the European Seismic Hazard
904 Model: Model Overview, <https://doi.org/10.12686/a15>, 2021.

905 Danciu, L., Weatherill, G., Rovida, A., Basili, R., Bard, P.-Y., Beauval, C., Nandan, S., Pagani, M., Crowley, H.,
906 and Sesetyan, K.: The 2020 European seismic hazard model: milestones and lessons learned, in: *European*
907 *Conference on Earthquake Engineering and Seismology*, 3–25, 2022a.

908 Danciu, L. et al.: The 2020 European Seismic Hazard Model: Milestones and Lessons Learned, in: *Progresses in*
909 *European Earthquake Engineering and Seismology. ECEES 2022. Springer Proceedings in Earth and*
910 *Environmental Sciences*, Cham, https://doi.org/10.1007/978-3-031-15104-0_1, 2022b.

911 Diehl, T., Husen, S., Kissling, E., and Deichmann, N.: High-resolution 3-D P-wave model of the Alpine crust,
912 *Geophys. J. Int.*, 179(2), 1133–1147, <https://doi.org/10.1111/j.1365-246X.2009.04331.x>, 2009.

913 Diehl, T., Kraft, T., Kissling, E., and Wiemer, S.: The induced earthquake sequence related to the St. Gallen deep
914 geothermal project (Switzerland): Fault reactivation and fluid interactions imaged by microseismicity.
915 *Journal of Geophysical Research: Solid Earth*, 122(9), 7272–7290. <https://doi.org/10.1002/2017JB014473>,
916 2017.

917 Diehl, T., Kissling, E., Herwegh, M., and Schmid, S.: Improving Absolute Hypocenter Accuracy with 3-D Pg and
918 Sg Body-Wave Inversion Procedures and Application to Earthquakes in the Central Alps Region, *J.*
919 *Geophys. Res. Solid Earth*, 1–26, <https://doi.org/10.1029/2021jb022155>, 2021a.

920 Diehl, T., Clinton, J., Cauzzi, C., Kraft, T., Kaestli, P., Deichmann, N., Massin, F., Grigoli, F., Molinari, I., and
921 Böse, M.: Earthquakes in Switzerland and surrounding regions during 2017 and 2018, *Swiss J. Geosci.*,
922 106(3), 543–558, <https://doi.org/10.1007/s00015-013-0154-4>, 2021b.

923 Diehl, T., Madritsch, H., Schnellmann, M., Spillmann, T., Brockmann, E., & Wiemer, S.: Seismotectonic evidence
924 for present-day transtensional reactivation of the slowly deforming Hegau-Bodensee Graben in the
925 northern foreland of the Central Alps, *Tectonophysics*, 846, 229659, 2023.

926 Dryhurst, S., Mulder, F., Dallo, I., Kerr, J. R., McBride, S. K., Fallou, L., and Becker, J. S.: Fighting
927 misinformation in seismology: Expert opinion on earthquake facts vs. fiction, *Frontiers in Earth Science*,
928 10, <https://www.frontiersin.org/articles/10.3389/feart.2022.937055>, 2022.

929 Edwards, B., Allmann, B., Fäh, D., and Clinton, J.: Automatic computation of moment magnitudes for small
930 earthquakes and the scaling of local to moment magnitude, *Geophysical Journal International*, 183(1), 407–
931 420, <https://doi.org/10.1111/j.1365-246X.2010.04743.x>, 2010.

932 Edwards, B., Michel, C., Poggi, V., and Fäh, D.: Determination of Site Amplification from Regional Seismicity:
933 Application to the Swiss National Seismic Networks, *Seismological Research Letters*, 84, 611–621, 2013.

934 Edwards, B., Kraft, T., Cauzzi, C., Kastli, P., and Wiemer, S.: Seismic monitoring and analysis of deep geothermal
935 projects in St Gallen and Basel, Switzerland, *Geophysical Journal International*, 201, 1022–1039,
936 <https://doi.org/10.1093/gji/ggv059>, 2015.

937 ETH Zurich, S. S. S.: National Seismic Networks of Switzerland; ETH Zürich, Other/Seismic Network,
938 <https://doi.org/10.12686/SED/NETWORKS/CH>, 1983.

939 ETH Zurich, S. S. S.: The Site Characterization Database for Seismic Stations in Switzerland,
940 <https://doi.org/10.12686/sed-stationcharacterizationdb>, 2015.

941 Faenza, L. and Michelini, A.: Regression analysis of MCS intensity and ground motion parameters in Italy and
942 its application in ShakeMap, *Geophys. J. Int.*, 180, 1138–1152, 2010.

943 Faenza, L. and Michelini, A.: Regression analysis of MCS intensity and ground motion spectral accelerations
944 (SAs) in Italy, *Geophys. J. Int.*, 186, 1415–1430, 2011.

945 Fähr, D., and Huggenberger, P.: INTERREG III Projekt: Erdbebenmikrozonierung am südlichen Oberrhein.
946 Zusammenfassung, doi:[10.3929/ethz-a-006412199](https://doi.org/10.3929/ethz-a-006412199), 2006.

947 Fähr, D., Giardini, D., Kästli, P., Deichmann, N., Gisler, M., Schwarz-Zanetti, G., Alvarez-Rubio, S., Sellami, S.,
948 Edwards, B., Allmann, B., Bethmann, F., Wössner, J., Gassner-Stamm, G., Fritsche, S., and Eberhard, D.:
949 ECOS-09 Earthquake Catalogue of Switzerland Release 2011 Report and Database, Public catalogue, 17,
950 4, 2011.

951 Fähr, D., Moore, J. R., Burjanek, J., Iosifescu, I., Dalguer, L., Dupray, F., Michel, C., Woessner, J., Villiger, A.,
952 and Laue, J.: Coupled seismogenic geohazards in Alpine regions., *Bollettino di geofisica teorica ed*
953 *applicata*, 53, 2012.

954 Fritsche, S., Fähr, D., and Schwarz-Zanetti, G.: Historical intensity VIII earthquakes along the Rhone valley
955 (Valais, Switzerland): primary and secondary effects, *Swiss Journal of Geosciences*, 105, 1–18, 2012.

956 Giardini, D., Wiemer, S., Fähr, D., and Deichmann, N.: Seismic hazard assessment of Switzerland, 2004.
957 Publication Series of the Swiss Seismological Service, ETH Zürich, 91 pages, 2004.

958 Giardini, D.: The global seismic hazard assessment program (GSHAP)—1992/1999, *Ann Geophys*, 42(6), 1999.

959 Giardini, D., Danciu, L., Erdik, M., Sesetyan, K., Demircioglu, M., Akkar, S., Gülen, L., and Zare, M.: Seismic
960 Hazard Map of the Middle East, <https://doi.org/10.12686/a1>, 2017.

961 Glueer, F., Häusler, M., Gischig, V., and Fähr, D.: Coseismic Stability Assessment of a Damaged Underground
962 Ammunition Storage Chamber Through Ambient Vibration Recordings and Numerical Modelling,
963 *Frontiers in Earth Science*, 9, 773155, 2021.

964 Grigoli, F., Scarabello, L., Böse, M., Weber, B., Wiemer, S., Stefan, and Clinton, J. F.: Pick- and waveform-based
965 techniques for real-time detection of induced seismicity, *Geophysical Journal International*, 213(2), 868-
966 884, <https://doi.org/10.1093/gji/ggy019>, 2018.

967 Guarini, M. R., Battisti, F., and Chiovitti, A.: A Methodology for the Selection of Multi-Criteria Decision Analysis
968 Methods in Real Estate and Land Management Processes, *Sustainability*, 10, 507,
969 <https://doi.org/10.3390/su10020507>, 2018.

970 Hammer, C., Ohrnberger, M., and Fähr, D.: Classifying seismic waveforms from scratch: a case study in the alpine
971 environment, *Geophysical Journal International*, <https://doi.org/10.1093/gji/ggs036>, 2013.

972 Harte, D. S.: Evaluation of earthquake stochastic models based on their real-time forecasts: a case study of
973 Kaikoura 2016, *Geophysical Journal International*, 217(3), 1894–1914, 2019.

974 Haslinger, F., Basili, R., Bossu, R., Cauzzi, C., Cotton, F., Crowley, H., Custodio, S., Danciu, L., Locati, M.,
975 Michelini, A., Molinari, I., Ottemöller, L., and Parolai, S.: Coordinated and interoperable seismological
976 data and product services in Europe: the EPOS thematic core service for seismology, *Annals of*
977 *Geophysics*, 65(2), 213, <https://doi.org/10.4401/ag-8767>, 2022.

978 Häusler, M., Gischig, V., Thöny, R., Glueer, F., and Donat, F.: Monitoring the changing seismic site response of
979 a fast-moving rockslide (Brien/Brinzauls, Switzerland), *Geophysical Journal International*, 229, 299–310,
980 2022.

981 Hengl, T., Heuvelink, G. B. M., and Rossiter, D. G.: About regression-kriging: From equations to case studies,
982 *Computers & Geosciences*, 33(10), 1301–1315, 2007.

983 Hermann, M., Zechar, J. D., and Wiemer, S.: Communicating time-varying seismic risk during an earthquake
984 sequence, *Seismological Research Letters*, 87, 301–312, <https://doi.org/10.1785/0220150168>, 2016.

985 Hetényi, G., Molinari, I., Clinton, J., Bokelmann, G., Bondár, I., Crawford, W. C., Dessa, J.-X., Doubre, C.,
986 Friederich, W., and Fuchs, F.: The AlpArray seismic network: a large-scale European experiment to image
987 the Alpine Orogen, *Surveys in Geophysics*, 39, 1009–1033, doi:10.1007/s10712-018-9472-4, 2018.

988 Hillers, G., Husen, S., Obermann, A., Planès, T., Larose, E., and Campillo, M.: Noise-based monitoring and
989 imaging of aseismic transient deformation induced by the 2006 Basel reservoir stimulation, *Geophysics*,
990 80(4), KS51–KS68, 2015.

991 Hobiger, M., Bergamo, P., Imperatori, W., Panzera, F., Lontsi, A. M., Perron, V., C., M., J., B., and Fähr, D.: Site
992 Characterization of Swiss Strong-Motion Stations: The Benefit of Advanced Processing Algorithms,
993 *Bulletin of the Seismological Society of America*, 111(4), 1713–1739, 2021.

994 Husen, S., Kissling, E., Deichmann, N., Wiemer, S., Giardini, D., and Baer, M.: Probabilistic earthquake location
995 in complex three-dimensional velocity models: Application to Switzerland, *Journal of Geophysical*
996 *Research-Solid Earth*, 108(B2), 2003.

- 997 Janusz, P., Bonilla, L. F., and Fäh, D.: URBASIS Deliverable: A case study on non-linear soil response in urban
998 areas, <https://doi.org/10.3929/ethz-b-000575536>, 2022.
- 999 Janusz, P., Bonilla L. F., Bergamo, P., Panzera, F., Roten, D., Loviknes, K., Fäh, D., Multi-step procedure for
1000 estimating nonlinear soil response in low seismicity areas – a case study of Lucerne, Switzerland, *Soil*
1001 *Dynamics and Earthquake Engineering*, 2023, [under review]
- 1002 Jousset, P., Currenti, G., Schwarz, B., Chalari, A., Tilmann, F., Reinsch, T., Zuccarello, L., Privitera, E., and
1003 Krawczyk, C. M.: Fibre optic distributed acoustic sensing of volcanic events, *Nature communications*, 13,
1004 1753, 2022.
- 1005 Jozinović, D., Massin, F., Böse, M., and Clinton, J.: Combining earthquake early warning solutions from different
1006 algorithms: application to Switzerland, *SSA abstract*, 2023.
- 1007 Klaasen, S., Paitz, P., Lindner, N., Dettmer, J., and Fichtner, A.: Distributed Acoustic Sensing in volcano-glacial
1008 environments — Mount Meager, British Columbia, *J. Geophys. Res.*, 159,
1009 <https://doi.org/10.1029/2021JB022358>, 2021.
- 1010 Kleinbrod, U., Burjánek, J., and Fäh, D.: Ambient vibration classification of unstable rock slopes: A systematic
1011 approach, *Engineering Geology*, 249, 198–217, 2019.
- 1012 Kremer, K., Fabbri, S. C., Evers, F. M., Schweizer, N., and Wirth, S. B.: Traces of a prehistoric and potentially
1013 tsunamigenic mass movement in the sediments of Lake Thun (Switzerland), *Swiss journal of geosciences*,
1014 115, 1–20, 2022.
- 1015 Lagomarsino, S. and Giovinazzi, S.: Macroseismic and mechanical models for the vulnerability and damage
1016 assessment of current buildings, *Bull. Earthq. Eng.*, 4, 415–443, [https://doi.org/10.1007/s10518-006-9024-](https://doi.org/10.1007/s10518-006-9024-z)
1017 *z*, 2006.
- 1018 Lagomarsino, S., Cattari, S., and Ottonelli, D.: The heuristic vulnerability model: fragility curves for masonry
1019 buildings, *Bull. Earthq. Eng.*, 19, 3129–3163, <https://doi.org/10.1007/s10518-021-01063-7>, 2021.
- 1020 Lestuzzi, P., Podestà, S., Luchini, C., Garofano, A., Kazantzidou-Firtinidou, D., and Bozzano, C.: Validation and
1021 improvement of Risk-UE LM2 capacity curves for URM buildings with stiff floors and RC shear walls
1022 buildings, *Bull. Earthq. Eng.*, 15, 1111–1134, <https://doi.org/10.1007/s10518-016-9981-9>, 2017.
- 1023 Lanza, F., Diehl, T., Deichmann, N., Kraft, T., Nussbaum, C., Schefer, S., and Wiemer, S.: The Saint-Ursanne
1024 earthquakes of 2000 revisited: evidence for active shallow thrust-faulting in the Jura fold-and-thrust belt,
1025 *Swiss Journal of Geosciences*, 115, 2, doi: 10.1186/s00015-021-00400-x, 2022.
- 1026 Lee, T., Diehl, T., Kissling, E., and Wiemer, S.: New insights into the Rhône–Simplon fault system (Swiss Alps)
1027 from a consistent earthquake catalogue covering 35 yr, *Geophysical Journal International*, 232(3), 1568–
1028 1589, <https://doi.org/10.1093/gji/ggac407>, 2023.
- 1029 Lee, T.: The transition between Western and Central Alps: New seismotectonic insights from high-resolution
1030 earthquake catalogs and tomography, Ph.D. Thesis, ETH Zurich, Diss No.: 29073. doi: 10.3929/ethz-b-
1031 000613262, 2023.
- 1032 Lindsey, N., Rademacher, H., and Ajo-Franklin, J.: On the broadband instrument response of fiber-optic (DAS)
1033 arrays, *J. Geophys. Res.*, 125, <https://doi.org/10.1029/2019JB018145>, 2020.
- 1034 Lomax, A., Virieux, J., Volant, P., and Berge, C.: Probabilistic earthquake location in 3D and layered models:
1035 Introduction of a Metropolis-Gibbs method and comparison with linear locations, in: *Advances in Seismic*
1036 *Event Location*, Thurber, C.H and N. Rabinowitz (eds.), Kluwer, Amsterdam, 101-134, 2000.
- 1037 Marañón, S., Reller, C., Loeliger, H.-A., and Fäh, D.: Seismic waves estimation and wave field decomposition:
1038 Application to ambient vibrations, *Geophys. J. Int.*, 191, 175–188, 2012.
- 1039 Marra, G., Clivati, C., Lockett, R., Tampellini, A., Kronjäger, J., Wright, L., Mura, A., Levi, F., Robinson, S.,
1040 Xuereb, A., Baptie, B., and Calónico, D.: Ultrastable laser interferometry for earthquake detection with
1041 terrestrial and submarine cables, *Science*, 361, 486–490, 2018.
- 1042 Martakis, P., Movsessian, A., Reuland, Y., Pai, S. G., Quqa, S., Garcia Cava, D., Tcherniak, D., and Chatzi, E.:
1043 A semi-supervised interpretable machine learning framework for sensor fault detection, *Smart Struct. Syst.*
1044 *Int. J.*, 29, 251–266, 2022a.
- 1045 Martakis, P., Movsessian, A., Reuland, Y., Pai, S. G., Quqa, S., Garcia Cava, D., Tcherniak, D., and Chatzi, E.:
1046 A semi-supervised interpretable machine learning framework for sensor fault detection, *Smart Struct. Syst.*
1047 *Int. J.*, 29, 251–266, 2022b.

1048 Marti, M., Stauffacher, M., and Wiemer, S.: Anecdotal evidence is an insufficient basis for designing earthquake
1049 preparedness campaigns, *Seismological Research Letters*, 91, 4, <https://doi.org/10.1785/0220200010>,
1050 2020.

1051 Marti, M., Dallo, I., Roth, P., Papadopoulos, A. N., and Zaugg, S.: Illustrating the impact of earthquakes:
1052 Evidence-based and user-centered recommendations on how to design earthquake scenarios and rapid
1053 impact assessments, *International Journal of Disaster Risk Reduction*, 103674,
1054 <https://doi.org/10.1016/j.ijdrr.2023.103674>, 2023.

1055 Marzocchi, W., Lombardi, A. M., and Casarotti, E.: The establishment of an operational earthquake forecasting
1056 system in Italy, *Seismological Research Letters*, 85(5), 961–969, 2014.

1057 Massin, F., Clinton, J., and Böse, M.: Status of Earthquake Early Warning in Switzerland, *Front, Earth Sci*, 9,
1058 <https://doi.org/10.3389/feart.2021.707654>, 2021.

1059 Meier, M.-A., Ross, Z. E., Ramachandran, A., Balakrishna, A., Nair, S., Kundzicz, P., Li, Z., Andrews, J.,
1060 Hauksson, E., and Yue, Y.: Reliable real-time seismic signal/noise discrimination with machine learning,
1061 *Journal of Geophysical Research: Solid Earth*, 124, 788–800, <https://doi.org/10.1029/2018JB016661>,
1062 2019.

1063 Mesimeri, M., Armbruster, D., Kaestli, P., Scarabello, L., Diehl, T., Clinton, J., and Wiemer, S.: SCDetect: Real-
1064 time computationally efficient waveform cross-correlation based earthquake detection, To be submitted to
1065 *SRL*, 2023.

1066 Michel, C., Edwards, B., Poggi, V., Burjánek, J., and Fäh, D.: Assessment of Site Effects in Alpine Regions
1067 through Systematic Site Characterization of Seismic Stations, *Bulletin of the Seismological Society of*
1068 *America*, 104(6), 2809–2826, 2014.

1069 Michel, C., Fäh, D., Edwards, B., and Cauzzi, C. V.: Site amplification at the city scale in Basel (Switzerland)
1070 from geophysical site characterization and spectral modelling of recorded earthquakes, *Physics and*
1071 *Chemistry of the Earth*, 98, 27–40, 2017.

1072 Michelini, A., Faenza, L., Cauzzi, C., Lauciani, V., Clinton, J., Kästli, P., Haslinger, F., Wiemer, S., Melis, N.,
1073 Theodoulidis, N., Böse, M., Weatherill, G., Cotton, F., and Giardini, D.: ShakeMap-EU: an update on the
1074 shakemap service in Europe, *EGU General Assembly 2023, Vienna, Austria, 23–28 Apr 2023, EGU23-*
1075 *5937*, <https://doi.org/10.5194/egusphere-egu23-5937>, 2023.

1076 Mitchell-Wallace, K., Jones, M., Hillier, J., and Foote, M.: Natural catastrophe risk management and modelling.
1077 Natural catastrophe risk management and modelling: A practitioner’s Guide, 1st ed., John Wiley & Sons,
1078 Hoboken, NJ, <https://doi.org/10.1002/9781118906057>, 2017.

1079 Mizrahi, L.: *Towards Next Generation Time-Dependent Earthquake Forecasting* (Doctoral dissertation, ETH
1080 Zurich), 2022.

1081 Mizrahi, L., Dallo, I., Kuratle, L. D., Han, M., Marzocchi, W., Spassiani, I., Falcone, G., and Wiemer, S.: D3. 5
1082 Development, Testing, and Communicating Earthquake Fore-casts: Current Practices and Expert
1083 Recommendations. http://static.seismo.ethz.ch/rise/deliverables/Deliverable_3.5.pdf, 2023.

1084 Molinari, I., Obermann, A., Kissling, E., Hetényi, G., Boschi, L., and AlpArray-Easi Working, G.: 3D crustal
1085 structure of the Eastern Alpine region from ambient noise tomography, in: *Results in Geophysical*
1086 *Sciences*, 1–4, <https://doi.org/10.1016/j.ringps.2020.100006>, 2020.

1087 Mousavi, S. M. and Beroza, G. C.: Deep-learning seismology, *Science*, 377,
1088 <https://doi.org/10.1126/science.abm4470>, 2022.

1089 Nakata, N., Gualtieri, L., and Fichtner, A. (Eds.): *Seismic ambient noise*, Cambridge University Press, 2019.

1090 Nandan, S., Kamer, Y., Ouillon, G., Hiemer, S., and Sornette, D.: Global models for short-term earthquake
1091 forecasting and predictive skill assessment, *The European Physical Journal Special Topics*, 230, 425–449,
1092 2021.

1093 Nieves, C., Crowley, C., Reuland, Y., Weatherill, G., Baltzopoulos, G., Bayliss, K., Chatzi, E., Chioccarelli, E.,
1094 Guéguen, P., Iervolino, I., Marzocchi, W., Naylor, M., Orlacchio, M., Pejovic, J., Popovic, N., Serafini, F.,
1095 Serdar, N.: RISE deliverable 6.1: Integration of RISE Innovations in the Fields of OELF, RLA and
1096 SHM, http://static.seismo.ethz.ch/rise/deliverables/Deliverable_6.1.pdf, 2023.

1097 Obermann, A., Planès, T., Larose, E., and Campillo, M.: Imaging preeruptive and coeruptive structural and
1098 mechanical changes of a volcano with ambient seismic noise, *Journal of Geophysical Research: Solid*
1099 *Earth*, 118, 6285–6294, 2013.

- 1100 Obermann, A., Froment, B., Campillo, M., Larose, E., Planès, T., Valette, B., Chen, J. H., and Liu, Q. Y.: Seismic
1101 noise correlations to image structural and mechanical changes associated with the Mw 7.9 2008 Wenchuan
1102 earthquake, *Journal of Geophysical Research: Solid Earth*, 119, 3155–3168, 2014.
- 1103 Obermann Kraft, T., Larose, E., and Wiemer, S.: Potential of ambient seismic noise techniques to monitor the St,
1104 Gallen geothermal site (Switzerland). *Journal of Geophysical Research: Solid Earth*, 120, 4301–4316,
1105 2015.
- 1106 Obermann, A., Lupi, M., Mordret, A., Jakobsdóttir, S.S., Miller, S.A.: 3D-ambient noise Rayleigh wave
1107 tomography of Snæfellsjökull volcano, Iceland. *J. Vol. Geotherm. Res.* 317, 42–52.
1108 <https://doi.org/10.1016/j.jvolgeores.2016.02.013>, 2016.
- 1109 Ogata, Y.: Statistical models for earthquake occurrences and residual analysis for point processes, *Journal of the*
1110 *American Statistical association*, 83, 9–27, <https://doi.org/10.1080/01621459.1988.10478560v>, 1988.
- 1111 **Ogata, Y., Katsura, K., Falcone, G., Nanjo, K., and Zhuang, J.: Comprehensive and topical evaluations of**
1112 **earthquake forecasts in terms of number, time, space, and magnitude. *Bulletin of the Seismological Society***
1113 **of America**, 103(3), 1692–1708, 2013.
- 1114 Pagani, M., Monelli, D., Weatherill, G., Danciu, L., Crowley, H., Silva, V., Henshaw, P., Butler, L., Nastasi, M.,
1115 and Panzeri, L.: OpenQuake engine: An open hazard (and risk) software for the global earthquake model,
1116 *Seismological Research Letters*, 85, 692–702, 10.1785/0220130087, 2014.
- 1117 Paitz, P., Edme, P., Gräff, D., Walter, F., Doetsch, J., Chalari, A., Schmelzbach, C., and Fichtner, A.: Empirical
1118 investigations of the instrument response for distributed acoustic sensing (DAS) across 17 octaves, *Bulletin*
1119 *of the Seismological Society of America*, 111, 1–10, 2021.
- 1120 Paitz, P., Lindner, N., Edme, P., Huguenin, P., Hohl, M., Sovilla, B., Walter, F., and Fichtner, A.: Phenomenology
1121 of avalanche recordings from distributed acoustic sensing, *J. Geophys. Res.*, 128,
1122 <https://doi.org/10.1029/2022JF007011>, 2023.
- 1123 Panzera, F., Bergamo, P., and Fäh, D.: Canonical Correlation Analysis Based on Site-Response Proxies to Predict
1124 Site-Specific Amplification Functions in Switzerland. *Bulletin of the Seismological Society of America*
1125 111(4):1905–1920, 2021.
- 1126 Panzera, F., Alber, J., Imperatori, W., Bergamo, P., and Fäh D.: Reconstructing a 3D model from geophysical
1127 data for local amplification modelling: The study case of the upper Rhone valley, Switzerland. *Soil*
1128 *Dynamics and Earthquake Engineering* 155:107163, 2022.
- 1129 Papadopoulos, A. N., Böse, M., Danciu, L., Clinton, J., and Wiemer, S.: A framework to quantify the effectiveness
1130 of earthquake early warning in mitigating seismic risk, *Earthquake Spectra*, 39, 938–961,
1131 [10.1177/87552930231153424](https://doi.org/10.1177/87552930231153424), 2023a.
- 1132 **Papadopoulos, A. N., Roth, P., Danciu, L., Bergamo, P., Panzera, F., Fäh, D., Cauzzi, C., Duvernay, B.,**
1133 **Khodaverdian, A., P., L., O., O., Fagà, E., Bazzurro, P., Marti, M., Valenzuela, N., Dallo, I., Schmid, N.,**
1134 **Kästli, P., Haslinger, F., and Wiemer, S.: The Earthquake Risk Model of Switzerland ERM-CH23,**
1135 **EGUsphere [preprint], <https://doi.org/10.5194/egusphere-2023-1504>, 2023b.**
- 1136 Perron, V., Bergamo, P., and Fäh D.: Site Amplification at High Spatial Resolution from Combined Ambient
1137 Noise and Earthquake Recordings in Sion, Switzerland. *Seismological Research Letters*, 93(4):2281–2298,
1138 2022.
- 1139 Poggi, V., Edward, B., and Fäh, D.: A comparative analysis of site-specific response spectral amplification
1140 models. *Physics and Chemistry of the Earth* 98, 16–26. <http://dx.doi.org/10.1016/j.pce.2016.09.001>, 2017.
- 1141 Racine, R., Cauzzi, C., Clinton, J. et al.: Updated determination of earthquake magnitudes at the Swiss
1142 Seismological Service, EGU2020-8273, 2020.
- 1143 Reuland, Y., Martakis, P., and Chatzi, E.: Damage-sensitive features for rapid damage assessment in a seismic
1144 context, in: *Proc. of the International Conference on Structural Health Monitoring of Intelligent*
1145 *Infrastructure*, 613–619, 2021.
- 1146 **Reuland Y, Martakis P, Chatzi E. A Comparative Study of Damage-Sensitive Features for Rapid Data-Driven**
1147 **Seismic Structural Health Monitoring. *Applied Sciences*, 13(4):2708.**
1148 **<https://doi.org/10.3390/app13042708>, 2023a.**
- 1149 Reuland, Y., Khodaverdian, A., Crowley, H., Nievas, H., Martakis, P., and Chatzi, E.: Monitoring-driven post-
1150 earthquake building damage tagging, in: *10th International Conference on Experimental Vibration*
1151 *Analysis for Civil Engineering Structures*, Milano, Italy, 2023b.

1152 Roten, D., Fäh, D., and Bonilla, L. F.: Quantification of cyclic mobility parameters in liquefiable soils from
1153 inversion of vertical array records, *Bulletin of the Seismological Society of America*, 104, 3115–3138,
1154 2014.

1155 Sägesser, R. und Mayer-Rosa, D: Erdbebengefährdung in der Schweiz. Schweizerische Bauzeitung Heft 7, 1978.

1156 Sánchez-Pastor, P., Obermann, A., Schimmel, M., Weemstra, C., Verdel, A., and Jousset, P.: Short-and long-term
1157 variations in the Reykjanes geothermal reservoir from seismic noise interferometry, *Geophysical Research*
1158 *Letters*, 46, 5788–5798, doi:10.1029/2019GL082352, 2019.

1159 Savran, W. H., Werner, M. J., Marzocchi, W., Rhoades, D. A., Jackson, D. D., Milner, K., ... and Michael,
1160 A.: Pseudoprospective evaluation of UCERF3-ETAS forecasts during the 2019 Ridgecrest sequence.
1161 *Bulletin of the Seismological Society of America*, 110(4), 1799-1817, 2020.

1162 Scarabello, L., Diehl, T., Kästli, P., Clinton, J., and Wiemer, S.: Towards Real-Time Double-Difference
1163 Hypocenter Relocation of Natural and Induced Seismicity, in: EGU General Assembly Conference
1164 Abstracts, <https://doi.org/10.5194/egusphere-egu2020-13058>, 2020.

1165 Scarabello, L., and Diehl, T. (2021): [swiss-seismological-service/scrtdd](https://zenodo.org/record/5337361). Zenodo doi: 10.5281/zenodo.5337361.

1166 Schorlemmer, D., Euchner, F., Kästli, P., Saul, J., and Group, Q. W.: QuakeML: status of the XML-based
1167 seismological data exchange format, *Annals of Geophysics*, 54, doi: 10.4401/ag-4874, 2011.

1168 Shynkarenko, A., Kremer, K., Stegmann, S., Bergamo, P., Lontsi, A. M., Roesner, A., Hammerschmidt, S., Kopf,
1169 A., and Fäh, D.: Geotechnical characterization and stability analysis of subaqueous slopes in Lake Lucerne
1170 (Switzerland), *Natural Hazards*, 113, 475–505, 2022.

1171 SIA 261: Norm 261, Einwirkungen auf Tragwerke. Schweizerischer Ingenieur- und Architektenverein (SIA),
1172 Zürich, 2020.

1173 Silva, V., Amo-Oduro, D., Calderon, A., Costa, C., Dabbeek, J., Despotaki, V., Martins, L., Pagani, M., Rao, A.,
1174 and Simionato, M.: Development of a global seismic risk model, *Earthquake Spectra*, 36, 372–394, 2020.

1175 Spica, Z., Pertou, M., Martin, E., Beroza, G., and Biondi, B.: Urban seismic site characterization by fiber-optic
1176 seismology, *J. Geophys. Res.*, 125, <https://doi.org/10.1029/2019JB018656>, 2020.

1177 Spica, Z. J., Castellanos, J. C., Viens, L., Nishida, K., Akuhara, T., Shinohara, M., and Yamada, T.: Subsurface
1178 imaging with ocean-bottom distributed acoustic sensing and water phases reverberations, *Geophysical*
1179 *Research Letters*, 49, e2021GL095287, 2022.

1180 Strader, A., Schneider, M., and Schorlemmer, D.: Prospective and retrospective evaluation of five-year
1181 earthquake forecast models for California. *Geophysical Journal International*, 211(1), 239-251, 2017.

1182 Strollo, A., Cambaz, D., Clinton, J., Danecek, P., Evangelidis, C. P., Marmureanu, A., Ottemöller, L., Pedersen,
1183 H., Sleeman, R., and Stammer, K.: EIDA: The European integrated data archive and service infrastructure
1184 within ORFEUS, *Seismological Society of America*, 92, 1788–1795, 2021.

1185 Strupler, M., Hilbe, M., Kremer, K., Danciu, L., Anselmetti, F. S., Strasser, M., and Wiemer, S.: Subaqueous
1186 landslide-triggered tsunami hazard for Lake Zurich, Switzerland, *Swiss journal of geosciences*, 111, 353–
1187 371, 2018.

1188 Swiss Seismological Service (SED) At ETH Zurich: National Seismic Networks of Switzerland; ETH Zürich.
1189 Other/Seismic Network, <https://doi.org/10.12686/SED/NETWORKS/CH>, 1983.

1190 Swiss Seismological Service (SED) At ETH Zurich: Temporary deployments in Switzerland associated with
1191 glacier monitoring; ETH Zurich. Other. <https://doi.org/10.12686/SED/NETWORKS/4D>, 1985.

1192 Swiss Seismological Service (SED) At ETH Zurich: Temporary deployments in Switzerland associated with
1193 aftershocks and other seismic sequences; ETH Zurich. Other.
1194 <https://doi.org/10.12686/SED/NETWORKS/8D>, 2005.

1195 Swiss Seismological Service (SED) at ETH Zurich: GEOBEST Baseline Seismic Monitoring Networks
1196 for Deep Geothermal Energy Projects in Switzerland.; ETH Zurich. Other/Seismic network.
1197 <https://doi.org/10.12686/SED/NETWORKS/G2>, 2006.

1198 Swiss Seismological Service (SED) At ETH Zurich: Temporary deployments in Switzerland associated
1199 with landslides; ETH Zurich. Other. <https://doi.org/10.12686/SED/NETWORKS/XP>, 2012.

1200 Swiss Seismological Service (SED) at ETH Zurich: The Site Characterization Database for Seismic
1201 Stations in Switzerland. Zurich: Federal Institute of Technology. doi: 10.12686/sed-station
1202 characterization db, 2015.

1203 Swiss Seismological Service (SED) at ETH Zurich: Bedretto Underground Laboratory for Geosciences and
1204 Geoenergies (BULGG) Seismic Network, Switzerland; ETH Zurich. Other/Seismic network.
1205 <https://doi.org/10.12686/SED/NETWORKS/8R>, 2018a.

1206 Swiss Seismological Service (SED) At ETH Zurich: Stations deployed for Risk Model Switzerland; ETH Zurich.
1207 Other. <https://doi.org/10.12686/SED/NETWORKS/XY>, 2018b.

1208 Swiss Seismological Service (SED) at ETH Zurich: Temporary Deployments operated by industry partners of the
1209 Swiss Seismological Service, typically associated with geothermal monitoring projects; ETH Zurich.
1210 Other/Seismic Network. <https://doi.org/10.12686/SED/NETWORKS/5A>, 2021.

1211 Toledo, T., Obermann, A., Verdel, A., Martins, J. E., Jousset, P., Mortensen, A. K., Erbas, K., and Krawczyk, C.
1212 M.: Ambient seismic noise monitoring and imaging at the Theistareykir geothermal field (Iceland), *Journal*
1213 *of Volcanology and Geothermal Research*, 429, 107590, [10.1016/j.jvolgeores.2022.107590](https://doi.org/10.1016/j.jvolgeores.2022.107590), 2022.

1214 Valenzuela Rodríguez, N.: Die aktuelle Erdbebensituation der Schweiz visualisieren—Eine Analyse der
1215 Erdbebenkarte der MeteoSchweiz-App hinsichtlich ihrer Verständlichkeit und ihres
1216 Verbesserungspotenzials, [Master Thesis, Zurich University of Applied Sciences (ZHAW)].
1217 <https://www.polybox.ethz.ch/index.php/s/vaBmjfUr0AgaVtS>, 2021.

1218 Van der Elst, N. J., Hardebeck, J. L., Michael, A. J., McBride, S. K., and Vanacore, E.: Prospective and
1219 retrospective evaluation of the US Geological Survey Public aftershock forecast for the 2019–2021
1220 Southwest Puerto Rico Earthquake and aftershocks, *Seismological Society of America*, 93, 620–640, 2022.

1221 Van Stiphout, T., Wiemer, S., and Marzocchi, W.: Are short-term evacuations warranted? Case of the 2009
1222 L’Aquila earthquake, *Geophys. Res. Lett.*, 37, 1-5, <https://doi.org/10.1029/2009GL042352>, 2010.

1223 Waldhauser, F. and Ellsworth, W.: A Double-Difference Earthquake Location Algorithm: Method and
1224 Application to the Northern Hayward Fault, California, *Bulletin of the Seismological Society of America*,
1225 90, 1353–1368, <https://doi.org/10.1785/0120000006>, 2000.

1226 Waldhauser, F.: Near-real-time double-difference event location using long-term seismic archives, with
1227 application to Northern California, *Bull. Seismol. Soc. Am.*, 99(5), 2736–2748, doi:10.1785/0120080294,
1228 2009.

1229 Walter, F., Gräff, D., Lindner, N., Paitz, P., Köpfl, M., Chmiel, M., and Fichtner, A.: Distributed Acoustic
1230 Sensing of microseismic sources and wave propagation in glaciated terrain, *Nat. Comm.*, 11,
1231 <https://doi.org/10.1038/s41467-020-15824>, 2020.

1232 Wiemer, S., Danciu, L., Edwards, B., et al.: Seismic Hazard Model 2015 for Switzerland (SUIhaz2015),
1233 <https://doi.org/10.12686/a2>, 2016.

1234 Wiemer, S., Papadopoulos, A., Roth, P., Danciu, L., Bergamo, P., Fäh, D., Duvernay, B., Khodaverdian, A.,
1235 Lestuzzi, P., Odabaşı, Ö., Fagà, E., Bazzuro, P., Cauzzi, C., Hammer, C., Panzera, F., Perron, V., Marti,
1236 M., N., V., Dallo, I., Zaugg, S., Fulda, D., Kästli, P., Schmid, N., and Haslinger, F.: Earthquake Risk Model
1237 of Switzerland (ERM-CH23), Swiss Seismological Service, ETH Zurich, <https://doi.org/10.12686/a20>,
1238 2023.

1239 **Woessner, J., Hainzl, S., Marzocchi, W., Werner, M. J., Lombardi, A. M., Catalli, F., ... and Wiemer, S.:**
1240 **A retrospective comparative forecast test on the 1992 Landers sequence. *Journal of Geophysical Research:***
1241 ***Solid Earth*, 116(B5), 2011.**

1242 Woessner, J., Danciu, L., Giardini, D., Crowley, H., Cotton, F., Grünthal, G., Valensise, G., Arvidsson, R., Basili,
1243 R., Demircioglu, M. B., Hiemer, S., Meletti, C., Musson, R. W., Rovida, A., Sesetyan, K., and Stucchi,
1244 M.: The 2013 European Seismic Hazard Model: key components and results, *Bulletin of Earthquake*
1245 *Engineering*, 13(12), 3553–3596, <https://doi.org/10.1007/s10518-015-9795-1>, 2015.

1246 Worden, C. B., Thompson, E. M., Hearne, M., and Wald, D. J.: ShakeMap Manual Online: technical manual,
1247 user’s guide, and software guide, U. S. Geological Survey, <https://doi.org/10.5066/F7D21VPQ>, 2020.