

# 1 **Unveiling Hydrological Dynamics in Data-Scarce Regions: Experiences** 2 **from the Ethiopian Rift Valley Lakes Basin**

3 <sup>1</sup>Ayene D. Ayalew, <sup>1</sup> Paul D. Wagner, <sup>2</sup>Dejene Sahlu, and <sup>1</sup> Nicola Fohrer

4 <sup>1</sup> Department of Hydrology and Water Resources Management, Christian-Albrechts-  
5 University, Kiel, Germany

6 <sup>2</sup> Institute of Disaster Risk Management and Food Security Studies, Bahir Dar University  
7 Email: ayalew@hydrology.uni-kiel.de

8  
9 **Abstract:** The hydrological system of Rift Valley Lakes in Ethiopia has recently experienced changes  
10 since the past two decades. Potential causes for these changes include anthropogenic, hydro-climatic  
11 and geological factors. The main objective of this study was to utilize an integrated methodology to  
12 gain a comprehensive understanding of the hydrological systems and potential driving factors within a  
13 complex and data-scarce region. To this end, we integrated a hydrologic model, change point analysis,  
14 indicators of hydrological alteration (IHA), and bathymetry survey to investigate hydrological dynamics  
15 and potential causes. A hydrologic model (SWAT+) was parameterized for the gauged watersheds and  
16 extended to the ungauged watersheds using multisite regionalization techniques. The SWAT+ model  
17 performed very good to satisfactory for daily streamflow in all watersheds with respect to the objective  
18 functions, Kling–Gupta efficiency (KGE), the Nash–Sutcliffe efficiency (NSE), Percent bias (PBIAS).  
19 The findings reveal notable changes of lake inflows and lake levels over the past two decades. Chamo  
20 Lake experienced an increase in area by 30.1 km<sup>2</sup> (9.5%), in depth by 4.4 m (30.9%), and in volume by  
21 7.8 x 10<sup>8</sup> m<sup>3</sup> (27.2%). In contrast, Lake Abijata witnessed an extraordinary 68% decrease in area and a  
22 depth decrease of 1.6 m (37.2%). During the impact period, the mean annual rainfall experienced a  
23 decrease of 6.5% and 2.7% over the Abijata Lake and the Chamo Lake, respectively. Actual  
24 evapotranspiration decreased by 2.9% in Abijata Lake but increased by up to 4.5% in Chamo Lake.  
25 Surface inflow to Abijata Lake decreased by 12.5%, while Lake Chamo experienced an 80.5% increase  
26 in surface inflow. Sediment depth in Chamo Lake also increased by 0.6 m (4.2%). The results highlight  
27 that the changing hydrological regime in Chamo Lake is driven by increased surface runoff and  
28 sediment intrusion associated with anthropogenic influences. The hydrological regime of Abijata Lake  
29 is affected by water abstraction from feeding rivers and lakes for industrial and irrigation purposes. This  
30 integrated methodology provides a holistic understanding of complex data scarce hydrological systems  
31 and potential driving factors in the Rift Valley Lakes in Ethiopia, which could have global applicability.

32 **Keywords** Hydrological change; IHA; Bathymetry; Lake Chamo; Lake Abijata; SWAT+; Rift  
33 **Valley; Lake level.**

# 1 Introduction

2 Continuous anthropogenic and natural activities are adversely altering the water resources from  
3 local to global scales (Flörke et al., 2018, Sivapalan et al., 2003). Changes of lake levels  
4 influence ecosystem services worldwide (Gownaris et al., 2015, Kolding and van Zwieten,  
5 2012). In Eastern Africa, the Rift Valley Lakes are supporting eco-regions of great  
6 biodiversity, considered amongst the global 200 freshwater eco-regions of the world (O'Brien  
7 et al., 2018, Olson and Dinerstein, 2002). In this region, water resources play a crucial role for  
8 economic development through use of water for domestic supply, irrigation and industry,  
9 fishery, recreation and tourism (Cowx and Ogutu-Owhayo, 2019, Minale, 2020, White et al.,  
10 2002).

11 The Ethiopian Rift Valley Lake basin is known as the Lakes District, containing a chain of  
12 eight main lakes situated at the Rift floor. The total surface area of open waters, including  
13 wetlands of the Rift valley was 3413 km<sup>2</sup> in 2019 which is 46% of total area of open waters  
14 resources of Ethiopia (Ayalew et al., 2022a). Most of these lakes are highly productive, contain  
15 indigenous populations of edible fish, and support a variety of aquatic and terrestrial wildlife  
16 (Tudorancea and Taylor, 2002). Currently, the hydrology of the Rift Valley Lakes is changing,  
17 i.e. water levels, areal extent, and volumes are altered, affecting ecosystem services and the  
18 communities. The situation has been aggravated recently due to increasing population density,  
19 excessive water abstraction and catchment land use changes (Billi and Caparrini, 2006, Legesse  
20 and Ayenew, 2006). Because of high water abstraction for irrigation and industry, as well as  
21 climate change, the open water surface area has decreased by 2.1% in three decades (Ayalew  
22 et al., 2022a). The problem is getting worse since water abstractions is often carried out without  
23 a basic understanding of the complex hydrogeological system, and the fragile nature of the Rift  
24 ecosystem (Zinabu et al., 2002, Ayenew, 2002). The basin has become economically  
25 significant because of the development of flower and horticultural production, soda ash factory,  
26 tourism, and other human activities around the shores of the lakes. Despite the basin's  
27 significance as a vital component of the country's economy and ecological balance, the major  
28 challenge lies in the limited availability of accurate hydrological data. Previous hydrological  
29 studies conducted in the Rift Valley Lakes have predominantly focused on analyzing the impact  
30 of single drivers and have failed to provide a quantitative assessment of the respective  
31 contributions of land use and climate change on streamflow. For instance, some studies have  
32 primarily investigated the effects of high water abstraction for irrigation and industries (Kebede

1 et al., 1994, Zinabu and Elias, 1989, Legesse and Ayenew, 2006, Ayenew, 2002) ,  
2 environmental degradation (Ayalew et al., 2004, Meshesha et al., 2012, Ayenew, 2004),  
3 volcano-tectonics, and sedimentation (Le Turdu et al., 1999, Street and Grove, 1979),  
4 bathymetry analysis (Awulachew, 1999) as well as the occurrence of frequent earthquakes and  
5 faults (Ayalew et al., 2004, Ayenew, 2002, Belay, 2009). However, the hydrological system  
6 of the Rift Valley is very complex and processes within a basin are driven by the interplay of  
7 climate, LULC, topography, soil and human activities. Evaluating hydrological change  
8 typically involves assessing changes in the flow regime and water balance of a river, a lake or  
9 a reservoir. Therefore, to understand the hydrological system and driving forces that control  
10 the hydrological processes requires an integration approach. Flow regime analysis, trend  
11 analysis, time series analysis, and hydrological modelling are common methods used for  
12 hydrological change analysis (Wagener and Montanari, 2011, Hargreaves and Samani, 1985,  
13 Jain and Singh, 2019); and in regions with limited available hydrological data, the application  
14 of regionalization techniques is a commonly employed approach (Viglione et al., 2013, Pool et  
15 al., 2021, Pagliero et al., 2019).

16 The study aims to understand the changing hydrological systems and driving factors by  
17 integrating hydrological modelling, indicators of hydrological alteration (IHA), change  
18 point/break, and bathymetry survey analysis. We hypothesize that the changes in the  
19 hydrological regimes are associated with changes in high water abstraction, climate change and  
20 land use.


## 21 **Materials and methods**

### 22 **2.1. Study Area Discription**

23 The Ethiopian Rift Valley Lakes Basin is located between 36° and 40°E and 4° and 9°N. It  
24 extends from the Afar depression southwards to Kenya across the broad basins of Abijata-  
25 Ziway, Abaya-Chamo, and Segen (Fig. 1). It is 55,050 km<sup>2</sup> large and one of the most important  
26 basins in Ethiopia. The basin is characterized by diverse landscape features and climate  
27 conditions. It has a complex hydrological system and encompasses numerous lakes, springs,  
28 wetlands, and rivers.

29 The climate of the basin is dominated by semi-arid climate (BSh) and tropical wet and dry  
30 climate (Aw/As) climate, which is characterized by low rainfall, high temperature, and high

1 evapotranspiration. Three climate regions can be found in the basin (Ayalew et al., 2022a). The  
2 Abijata-Ziway subbasin which is characterized by low annual average rainfall ranging from  
3 400 mm to 860 mm with one peak in August. The second basin, Abaya-Chamo subbasin, is  
4 receives higher annual precipitation ranging from 704 mm to 1200 mm with a bimodal climate  
5 pattern with peaks in April and August. The third subbasin, Segen subbasin, is characterized  
6 by a bimodal rainfall pattern with peaks in April and October and receives an average annual  
7 precipitation ranging from 500 to 1100 mm. Temperatures within the basin exhibit a wide  
8 range, from 10°C to 36°C, with the warmest temperatures measured on the Rift Valley floor  
9 and frost-prone conditions in the Afro-alpine zone. The southern region of the Rift Valley is  
10 both lower in elevation and warmer and drier than the other areas of the basin.

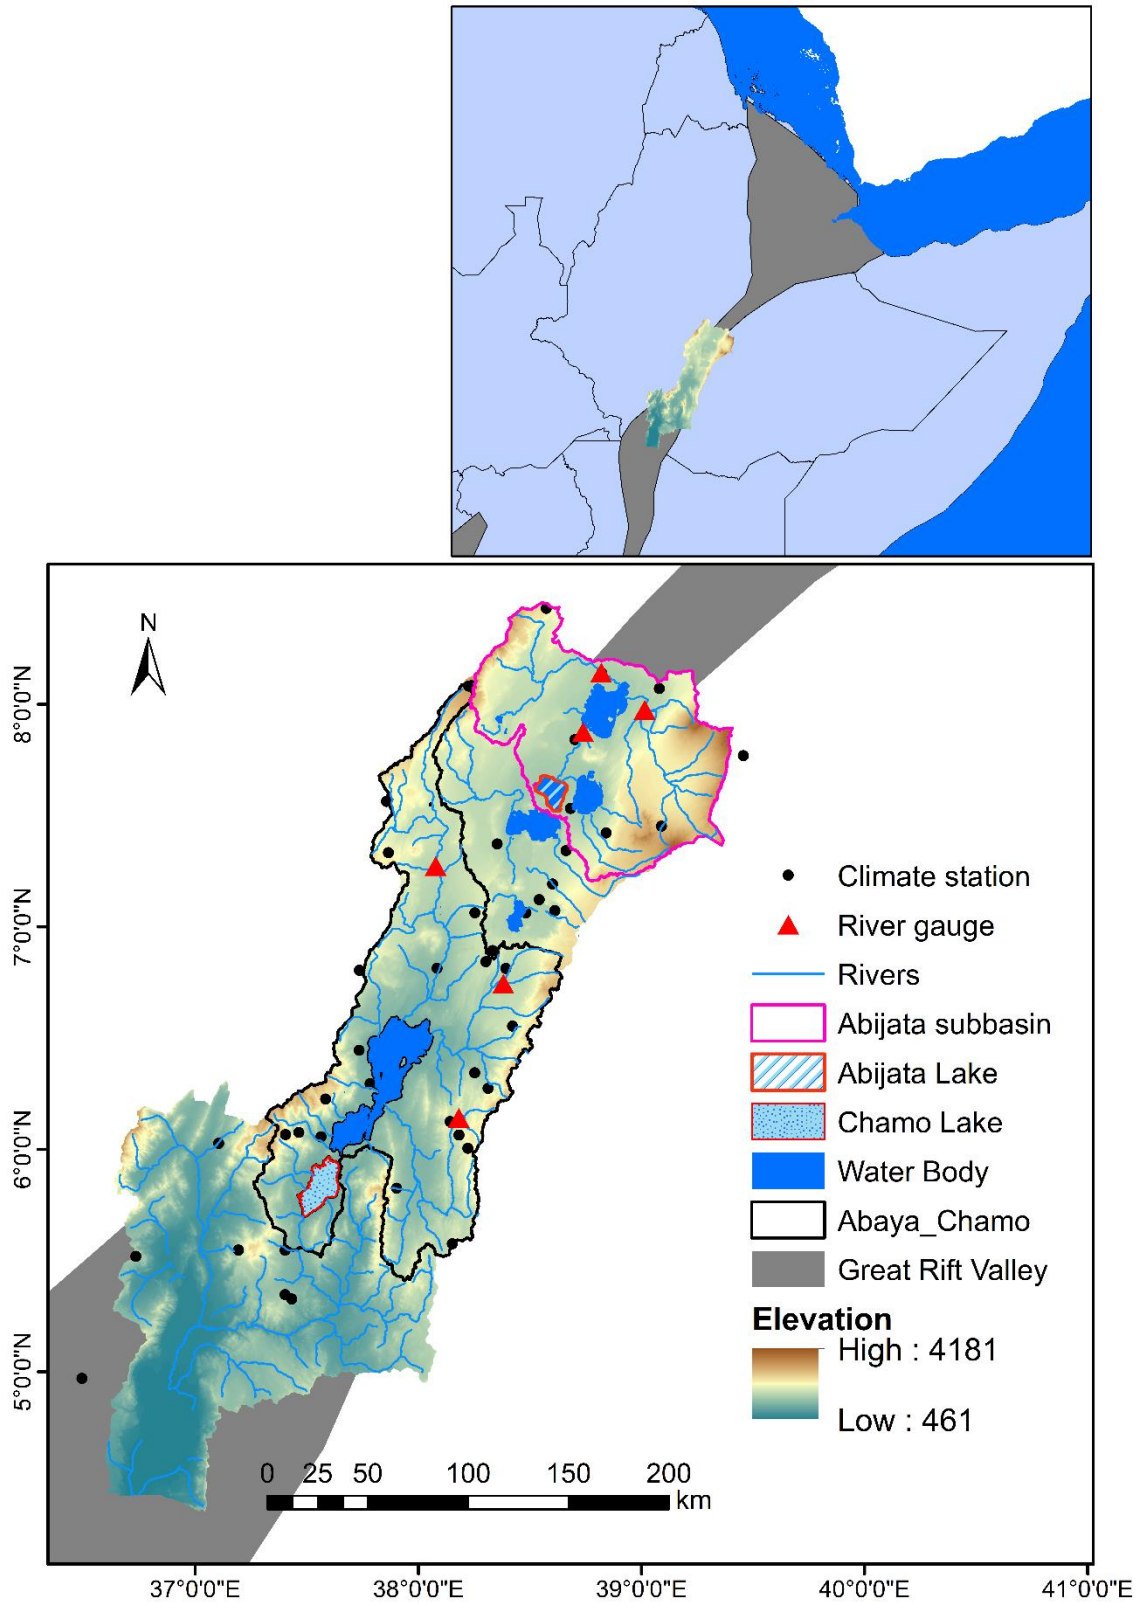

1

2 Figure 1: Topography of the Rift Valley Lakes basin as well as the river network, river and  
 3 climate stations used for modelling.

1 The basin is also characterized by a complex and rugged topography with active faults,  
 2 volcanoes and hot springs (Stamps et al., 2008). Based on the digital elevation model (USGS,  
 3 2023) data, the slope ranges from 0 to 161 %. Agricultural land is the most dominant land use  
 4 followed by semi-natural vegetation and water bodies. Two lakes were chosen from the basin  
 5 as representative examples of its hydrological system, based on their degree of impact. Lake  
 6 Abijata was selected as an example of a monomodal climate regime, while Chamo Lake was  
 7 chosen to represent a bimodal climate regime. Lake Abijata is a terminal lake of the Ziway-  
 8 Abijata subbasin and linked to Lake Ziway via the Bulbula River and to Lake Lugano via the  
 9 Hurakolo River. Lake Chamo is a terminal lake for the Abaya-Chamo subbasin and linked with  
 10 Lake Abaya via the Kulfo River.

11 **2.2. Spatial and hydroclimatic data**

12 The main hydrological characteristics of the basin have been acquired from the climate data,  
 13 topography, land use, soil properties, streamflow, lake level and bathymetry survey. Time  
 14 series of climate data for 44 stations (1981- 2018), a georeferenced Landsat image (1999),  
 15 bathymetry of Lake Chamo (1998 and 2021), streamflow of rivers (1987 – 2006), Lake level  
 16 (1987-2015) the Shuttle Radar Topography Mission digital elevation model (SRTM DEM)  
 17 (30x30) and soil data were used for this study. The SRTM DEM has been used, from which  
 18 slope, river network, and watershed boundaries are obtained. Selected soil physical properties  
 19 and the area coverage of each soil type were classified based on the requirements of the  
 20 hydrologic model. The bathymetry survey data was used to calculate the change in volume,  
 21 area and depth of a lake. It was also used to obtain information about sediment deposition in  
 22 the lake.

23 *Table 1. List of data and source used in this study*

Data	Resolut ion(m)	Access Date	Sources
Landsat 5, Thematic Mapper	30	Feb 25,1999	<a href="http://earthexplorer.usgs.gov">http://earthexplorer.usgs.gov</a>
STRM DEM	30	2014-09-23	
Soil	30	2016	Ministry of water irrigation and electricity
Stream flow	-	1987-2006	

Lake level	-	1987-2015	
Climate ( rainfall and temperature)	-	1987-2018	Ethiopian National Meteorological Agency
Lake extent shape file		1999	<a href="http://earthexplorer.usgs.gov">http://earthexplorer.usgs.gov</a>
Bathymetry survey	-	1998 & 2021	AMU-VLIR-IUC

## 1 2.3. Methodology

### 2 **Hydrological regime change analysis**

3 In this study, a common approach for analyzing hydrological regime change is utilized by  
4 combining a change point analysis and Indicators of Hydrological Alteration (IHA). The IHA  
5 can be used to assess and quantify changes in the natural flow regimes of rivers and streams. It  
6 provides a systematic way to analyze the impacts of human activities, e.g. dam construction  
7 and water withdrawals, on hydrology. A set of indicators are used to evaluate alterations in  
8 flow magnitude, frequency, duration, timing, and rate of change. Combining a change point  
9 analysis and IHA allows for a more robust and comprehensive analysis of hydrological regime  
10 change (Zhang et al., 2016, Vieceli et al., 2015, Vu et al., 2019). Change point analysis is a  
11 statistical method that is used to detect changes in the mean or variance of a time series. We  
12 used it to identify breakpoints of the Lake level. Once the break points have been identified,  
13 IHA were used to evaluate the degree of alteration of the natural flow regime. The Range of  
14 Variability Approach (RVA), Environmental Flow Components (EFC), Flow Duration Curve  
15 (FDC), Box-and-Whisker (BAW), and Percentile analysis of the IHA were used to evaluate the  
16 alteration of the hydrological regime (Gunawardana et al., 2021, Song et al., 2020).

17 The Range of Variability Approach (RVA) evaluates hydrological alterations by analyzing 33  
18 hydrological parameters, which are categorized into five groups which evaluate the magnitude,  
19 timing, frequency, duration, and rate of change (Richter et al., 1998, Shieh et al., 2007) (Table  
20 2). Group 1: The 12-monthly mean flows were computed to determine the water level. Group  
21 2: twelve parameters were used to explain the range of changes in annual extreme flows in  
22 magnitude and duration in daily, weekly, monthly, and seasonal cycles. Group 3: Julian dates  
23 for 1-day annual maximum and minimum were computed to determine the variation of timing  
24 of annual extreme flows that can be associated with extreme conditions. Group 4: four

1 parameters are categorized in this group that refers to the frequency and duration of high and  
 2 low pulses. The high pulses refer to periods within a year when the daily flows are above the  
 3 75th percentile of the data. The low pulses are periods within a year when the daily flows are  
 4 below the 25th percentile of the data. Group 5: three parameters are also categorized in this  
 5 group to understand the direction and magnitude of hydrological regime changes, including  
 6 both positive and negative changes. These parameters are important because they capture the  
 7 variability of hydrological flow over short periods, as high flow can cause erosion and sediment  
 8 transport, while low flow pulses can lead to habitat degradation and changes in water quality.

9 Table 2| Hydrologic parameters used in the RVA, and their features

General group	Regime features	Streamflow parameters used in the RVA
Group 1: Median of monthly water condition indices	Magnitude, timing	The median monthly value for each month
Group 2: Yearly extreme water conditions indices	Magnitude, duration	1-day minimum 3-day minimum 7-day minimum 30-day minimum 90-day minimum 1-day maximum 3-day maximum 7-day maximum 30-day maximum 90-day maximum Number of zero days Base flow index
Group 3: Yearly extreme water conditions indices	timing	Date of minimum Date of maximum
Group 4: High and Low pulses indices	frequency and duration	Low pulse count Low pulse duration High pulse count High pulse duration
Group 5: Water condition changes indices	rate and frequency	Rise rate Fall rate Number of reversals

10 The calculation of pulse count and pulse duration was carried out through the utilization of the  
 11 Indicators of Hydrological Alteration (IHA). A threshold for both high and low pulses is used.  
 12 Pulse count represents the number of pulses exceeding the established threshold (here the  
 13 median), while pulse duration indicates the time from the start to the end of a high or low pulse.



1 The uncertainty concerning pulse counts, determined by the threshold, stems from potential  
2 overcounting and undercounting of low and high pulses. This occurs due to the computation of  
3 the median for the data series, which includes both flood and drought years. The presence of  
4 flood and drought years in the data series influences the median value, consequently affecting  
5 the counted number of high and low pulses. Another threshold definition or other climate data  
6 will lead to different results.

7 In the annual average water balance, the flow signals are averaged and it is difficult to  
8 distinguish which flow signals affect the annual water balance. To avoid this limitation, we  
9 used FDC to evaluate the variation of streamflow for the pre-impacted and impacted periods.  
10 The shape of the curve is an index of the natural storage in the watershed, including the  
11 groundwater. Since the dry season flow consists entirely of return flow from the groundwater,  
12 i.e., the lower end of the FDC indicates the general characteristics of shallow aquifers.  
13 Therefore, flow signals were determined from the FDC based on the exceedance probability  
14 threshold. Here, low flow signals are defined as  $\geq 75\%$  of the exceedance probability, while  
15 higher flow signals are defined as  $\leq 20\%$  of the exceedance probability and the rest are mid  
16 flows. The choices of thresholds for disaggregation were based on earlier studies (Pfannerstill  
17 et al., 2014, Smakhtin, 2001).

### 18 2.3.1. Hydrologic model

19 The Soil and Water Assessment Tool Plus (SWAT+), a completely revised version of the  
20 SWAT model (Arnold et al., 1998) was built to simulate water balance fluxes in a watershed.  
21 It is more flexible than SWAT in terms of the spatial representation of interactions and  
22 processes within a watershed (Bieger et al., 2017). It simulates the hydrological processes from  
23 precipitation to streamflow using the water balance equation. There are two methods for  
24 channel routing currently implemented in SWAT+ (Muskingum and Variable Storage Routing  
25 (VSR)). In this study, the VSR, that is the standard method in SWAT+, was used for river  
26 routing. It provides a flexible representation of channel routing behavior using storage  
27 coefficients for each reach that depend on travel time and length of the time step (USDA-ARS  
28 2024). It also considers the storage-discharge relationship for each reach, allowing for a better  
29 representation of channel routing processes (Pati et al., 2018). The Soil Conservation Service  
30 (SCS) Curve Number (CN) method was employed to estimate surface runoff. The Hargraves  
31 equation was used to calculate the potential evapotranspiration, which is commonly used in  
32 data scarce regions (de Sousa Lima et al., 2013, Moeletsi et al., 2013).

1 Currently, SWAT+ is tested in few watersheds across the world, where the results from  
2 SWAT+ are favorable compared to the previous model version (Wagner et al., 2022) It can  
3 simulate the quantity and quality of water resources from a hydrological response unit to basin  
4 scale. SWAT is also suitable to assess the impact of climate change (Mahmoodi et al., 2021a),  
5 land cover change (Tigabu et al., 2019) and land use change (McGinn et al., 2021, Wagner et  
6 al., 2023), and watershed management practices on water resources (Mahmoodi et al., 2021b)  
7 Moreover, it has been proven capable of modeling in data scarce regions (Tigabu et al., 2023,  
8 Wagner et al., 2012). To depict the spatial heterogeneity of a watershed, each watershed is  
9 divided into multiple homogenous hydrological response units based on a unique combination  
10 of land-use, slope and soil characteristics (HRU).

### 11 2.2.1. Model parameterization, calibration, and validation

12 Sensitive parameters were adopted from previous research (Ayalew et al., 2023) for streamflow  
13 simulation in two subbasins (Table 3). Lakes, which are located on the main channel network  
14 of the subbasin, are accounted for during modelling. The lakes areal extent are used as input  
15 for the SWAT+ model. The default model parameters for the reservoirs are used, e.g. SWAT+  
16 assumes an average depth of 10 m to calculate the volume of the lake. During the calibration  
17 process, the lake depth was modified using bathymetric data obtained from Ethiopian ministry  
18 of water and energy.

1 *Table 3* | Calibration parameters and the upper and lower boundaries used for calibration

Parameters	Description	Limit		Change	Fitted range & value					
		Min	Max		Lake Abijata			Lake Chamo		
					Min	Max	Value	Min	Max	Value
CN2	Condition II curve number	-15	+15	abschg <sup>a</sup>	-15	-5	-1.8	-15	-10	-11.8
Sol-Awc	Available water capacity of the soil layer (mm H <sub>2</sub> O/mm soil)	-0.25	+0.25	abschg	-0.16	+0.15	-0.05	-0.16	+0.15	-0.12
ESCO	Soil evaporation compensation coefficient	0	1	absval <sup>b</sup>	0.01	0.5	0.34	0.01	0.5	0.21
SURLAG	Surface runoff lag Coefficient(days)	0	24	absval	0.1	10	6.7	0.1	10	8.4
PERCO	Percolation coefficient (mm H <sub>2</sub> O)	0	1	absval	0.01	0.95	0.91	0.01	0.3	0.17
LATQ_CO	Lateral flow contribution to reach (mm H <sub>2</sub> O)	0	1	absval	0.01	0.95	0.63	0.01	0.3	0.10
ALPHA_BF	Baseflow recession constant fast aquifer (days)	0	1	absval	0.01	0.6	0.27	0.01	0.3	0.07
k	Saturated hydraulic conductivity (mm h <sup>-1</sup> )	-45	+45	pctchg <sup>c</sup>	-10	+15	1.86	-10	+15	-3.7
EPCO	Plant uptake compensation factor	0	1	absval	0.6	0.9	0.8	0.6	0.9	0.85
z	Soil depth (mm)	-45	+45	pctchg	-15	+0	-3.7	-15	+0	-7.5
Lake depth	Average depth of a Lake (m)	10 (default)		absval	2.5	9	5.5	5	13	9.7

- 2 Where, a abschg<sup>a</sup> adds an absolute value to the initial parameter value; b absval<sup>b</sup> replaces the initial parameter value with an absolute value;
- 3 c pctchg<sup>c</sup> increases or decreases of the initial parameter value by the given percentage of the value.

1 The streamflow data at each outlet (at each gauge from 1987 to 2006 splatted in to three periods  
2 for model warm-up (one year), model calibration (1987 to 1995) and validation (1995 to 2006).  
3 For calibration, 5000 parameter sets were generated with Latin Hypercube Sampling (Soetaert  
4 and Petzoldt, 2010) using the parameter ranges given in Table 3. The model configurations  
5 were evaluated for the same 5000-parameter sets. For each parameter set a model run was  
6 performed and the final parameter fitted range was selected based on the best combined  
7  $0.6 \leq KGE \leq 1$  (Gupta et al., 2009),  $0.5 \leq NSE \leq 1$  (Nash and Sutcliffe, 1970), and percent Bias  
8  $-25 \leq (PBIAS) \leq 25$ , and  $0 \leq RMSE\text{-observations standard deviation ratio (RSR)} \leq 1$   
9 values, so that the KGE, NSE, PBIAS and RSR were filtered within this range and the model  
10 runs were accepted within these range. The best optimal value (fitted value) has selected among  
11 the best value of KGE. During calibration and validation, the water balance (total amount,  
12 distribution through time), storm sequence (time lag or shift), and shape of hydrograph (rising  
13 limb, peak, recession) are considered as key components. Calibration and validation were  
14 carried out in R using the packages FME for Latin Hypercube Sampling (Soetaert and Petzoldt,  
15 2010), hydroGOF for model evaluation (Zambrano-Bigiarini, 2018), and the packages zoo  
16 (Zeileis and Grothendieck, 2005) and xts (Ryan and Ulrich, 2011) for data processing.


17 In addition to statistical performance evaluation, visual inspection of the hydrography and flow  
18 duration curve (FDC) provide information about the overall qualitative match between  
19 measured and modeled streamflow.

### 20 2.2.2. Regionalization

21 A multisite (stepwise and pooled) regionalization method was applied to ensure that the model  
22 accurately represents the hydrological behavior of multiple locations and that the model can be  
23 used to make predictions for other locations. It improves the accuracy of the model by  
24 calibrating it with data from multiple sites (Hundecha et al., 2016). The method can also help  
25 to reduce uncertainty and improve the robustness of the model by taking into account the  
26 variability of hydrological conditions across different sites.

27 Hydrological processes are primarily controlled by rainfall, topography, soil characteristics,  
28 and land use, similarity between watersheds has been demonstrated prior to regionalization.  
29 The stepwise calibration carried out on a nested class of sub-basins for the corresponding  
30 multiple gauging stations in the sub-basin (Tsegaw et al., 2019). Multi-gauge calibration  
31 strategy involves calibrating all parameters of the model domain simultaneously against  
32 multiple streamflow gauges within the subbasin (Wi et al., 2014). This approach aims to look

1 for suitable parameters that are able to produce satisfactory model results at all neighboring  
2 gauging stations in a single implementation of optimization. Therefore, pooled regionalization  
3 technique has been chosen for this study based on its ability to predict streamflow and  
4 calibration uncertainties. To do so, Bulbula assumed to be gauged watershed and Katar at  
5 Abura and Meki were assumed ungauged watersheds for validation (Figure 2). Likewise, Kulfo  
6 at Abaya has considered as gauged watershed and Bilate, Gidabo and Upper Gelana considered  
7 as ungauged watershed (Figure 2). The gauged stations are considered as the “donor”  
8 watershed, and the ungauged stations are considered as the ‘pseudo’ watersheds. The donor  
9 watersheds are used to parameterize and calibrate the SWAT+ model parameters. The pseudo-  
10 ungauged watersheds are used to test the calibrated model. In testing the model on the pseudo  
11 ungauged watersheds, the model was run with calibrated parameters for the same period and  
12 the model performance for donor and pseudo watersheds were evaluated using the objective  
13 functions KGE, NSE, PBIAS and RSR. If the developed model for the donor watershed  
14 performed sufficiently ( $KGE \geq 0.5$ ,  $NSE = 0.5$ ,  $-25 \leq PBIAS \leq$  and  $0 \leq RSR \leq 1$ ) for the  
15 pseudo watershed, the model is considered robust and was used for regionalization. The  
16 optimal values of parameters of each catchment were transferred to the nearest ungauged  
17 catchments and reach.

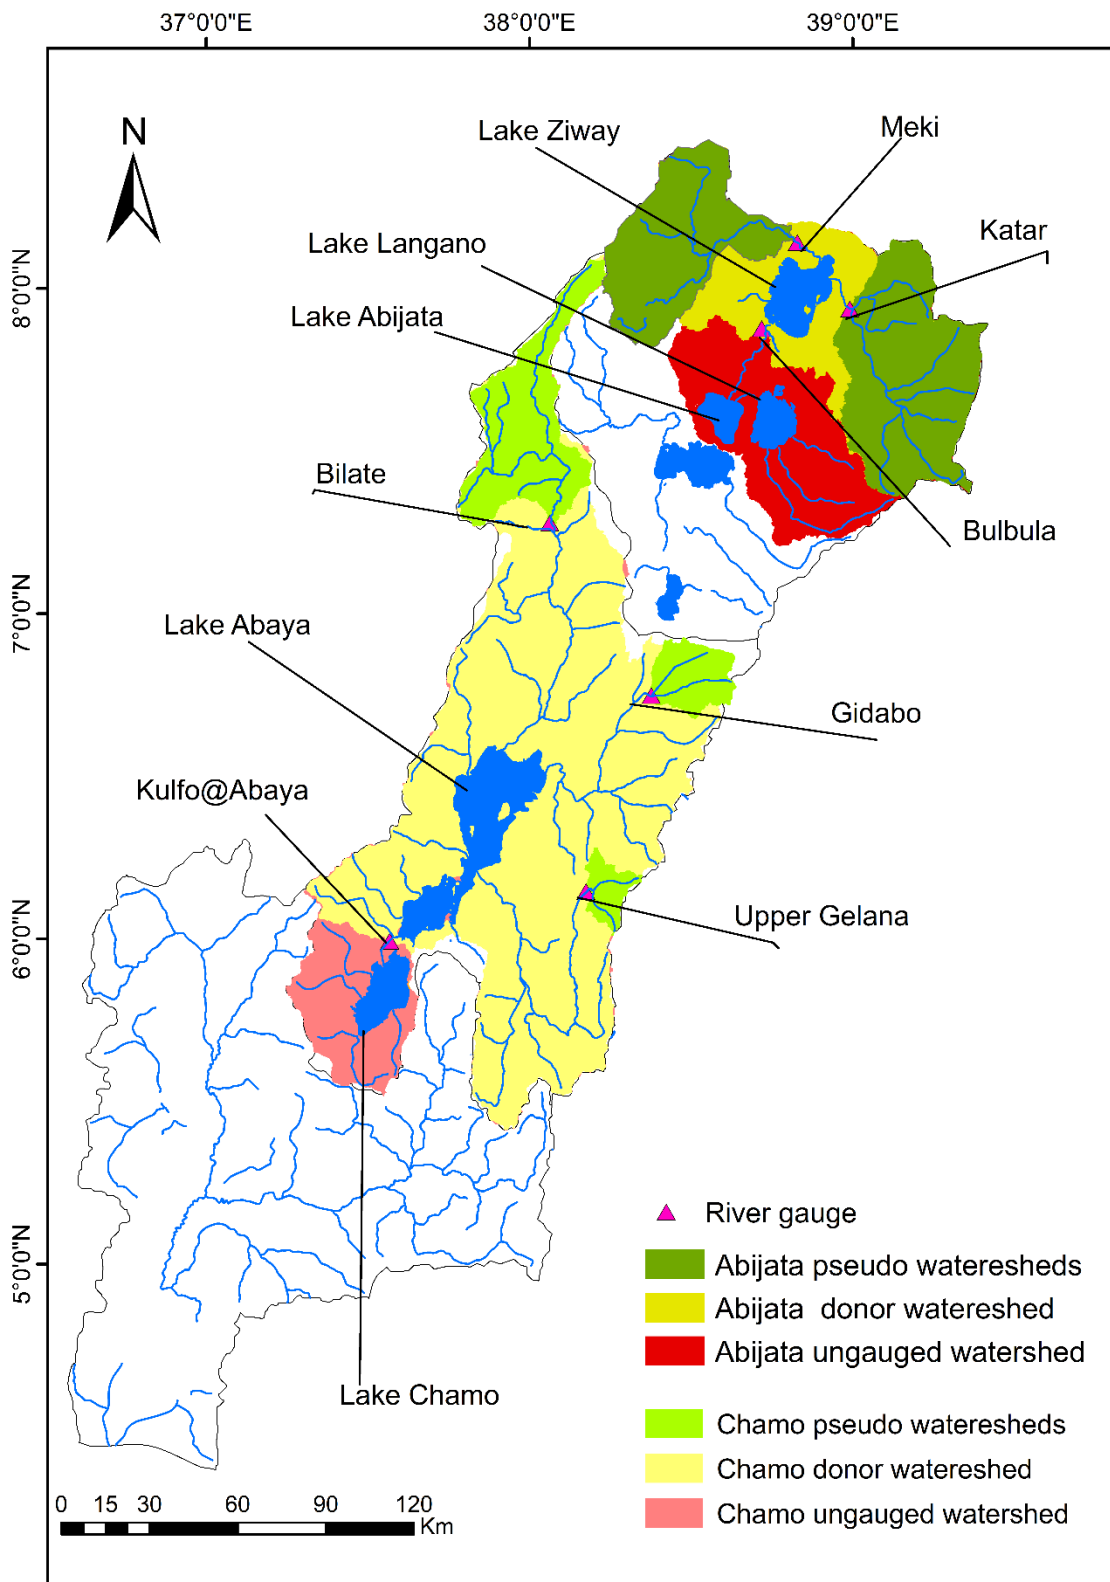


1

2 Figure 2| Multisite-pooled calibration technique to estimate flow of ungauged watersheds

### 1 2.2.3. Bathymetry analysis

2 The Lake Chamo was surveyed using Multibeam echosounder (MBES). It is sonar technology  
3 that uses a band of multiple beams to create a high-resolution 3D map of the lake bed. It is  
4 based on the principle of emitting a series of acoustic pulses and measuring the time it takes  
5 for the sound to travel to the lake bed and back. Although our hydrologic model was developed  
6 on two terminal lakes, Abijata and Chamo, we conducted a bathymetry survey only for Chamo  
7 Lake.

8 The survey was conducted during the dry season from 1 to 21 July 2021. Before the survey  
9 began, the surface elevation of the lake level was measured with a handheld GPS, which was  
10 at a level of 1110 m and used as the reference level. Following that, a continuous record of lake  
11 floor topography was measured with an MBES mounted on a motor boat at a constant speed  
12 of 5 km/h along predefined average traverse lines at 450 m spacing along a north-south  
13 direction. A crossing and recrossing survey was also performed in the same area to correct  
14 errors caused by potentially misleading reflections and variations in the speed of sound moving  
15 through the lake (Figure 3). To supplement the dataset produced by the echo sounder, zero  
16 depth coordinates were taken simultaneously with hand-held GPS along the lake's shoreline at  
17 shorter distances. Because there were no other obstacles, the true size of the lake was preserved  
18 during mapping using these border coordinates. The bathymetry data typically in the form of  
19 point data (XYZ) that represent the depth measurements at various locations within the lake  
20 was imported into Surfer20 to analyze the lake floor morphology in 2D and 3D, as well as  
21 depth, area, and volume.

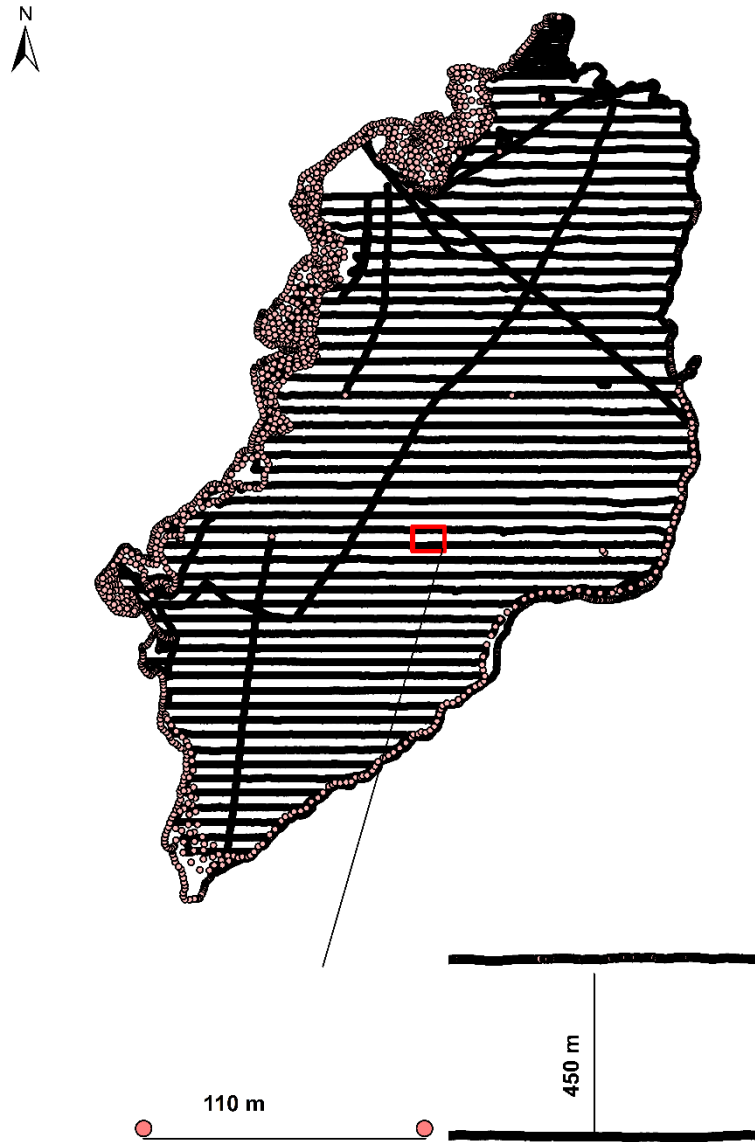

1

2 Figure 3: Bathymetry survey using multibeam echosounder (MBES) along predefined average  
3 traverse lines at 450 m spacing along a north-south direction and 110 m along east-west  
4 direction.

5

6

7




1 Results and Discussions

2 3.1. Lake water balance analysis

3 Hydrological modelling and model performance

4 The hydrographs shown in Fig. 4 indicate that the SWAT+ model was successfully calibrated  
5 and validated for each ‘donor watershed’. The relationship between the simulated and observed  
6 streamflow based on the model is statistically summarized in Table 4. The values of the  
7 objective functions indicate a strong goodness-of-fit for both ‘donor and pseudo watersheds.

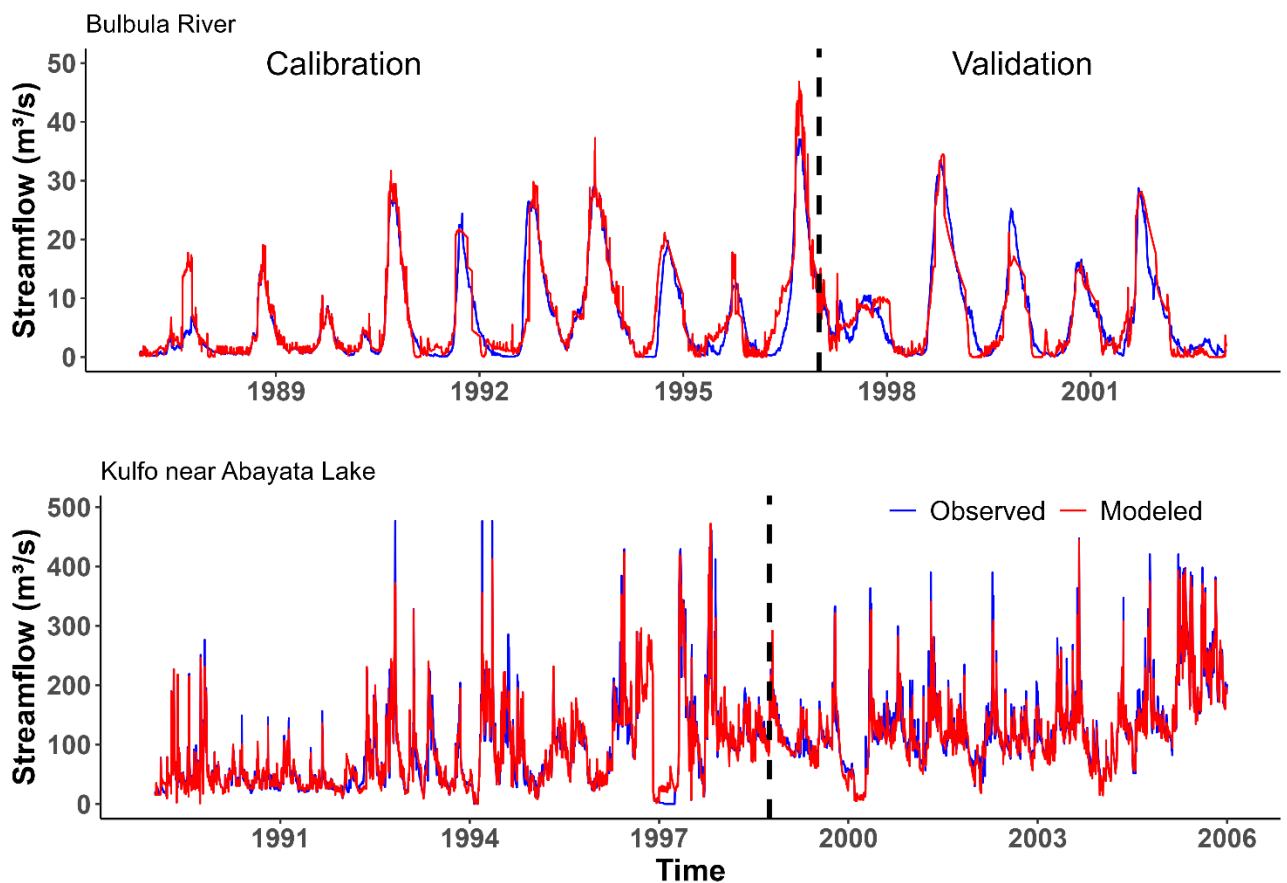

8

9 Figure 4 | Hydrograph of modeled and observed daily streamflow for calibration and validation  
10 period of the donor watersheds.


11

12

1 Table 4 | Model evaluation statistics of the daily SWAT+ for the ‘donor’ watersheds (1987-  
 2 2000)

Watershed	Method	Objective functions			
		KGE	NSE	PBIAS	RSR
<b>Bulbula</b>	Cal.	0.84	0.76	-2.1	<b>0.51</b>
	Val.	0.80	0.72	-5.4	<b>0.53</b>
<b>Kulfo@ Abayata</b>	<b>Cal.</b>	<b>0.81</b>	<b>0.68</b>	<b>3.7</b>	<b>0.56</b>

3 These two regionilization models have been tested to their respective subbasins using the  
 4 ‘pseudo’ watersheds. The hydrograph in Fig. 5 depicted the developed model's success within  
 5 each respective ‘pseudo’ watersheds. Meki and katar are ‘pseudo’ watersheds of the ‘donor’  
 6 watershed, Bulbula; and Bilate, Gidabo and Upper Gelana are ‘pseudo’ watersheds of the  
 7 ‘donor’ watershed, kulfo at Abayata. The values of the objective functions also indicate a  
 8 strong goodness-of-fit for pseudo watersheds, and statistically summarized in Table 5.

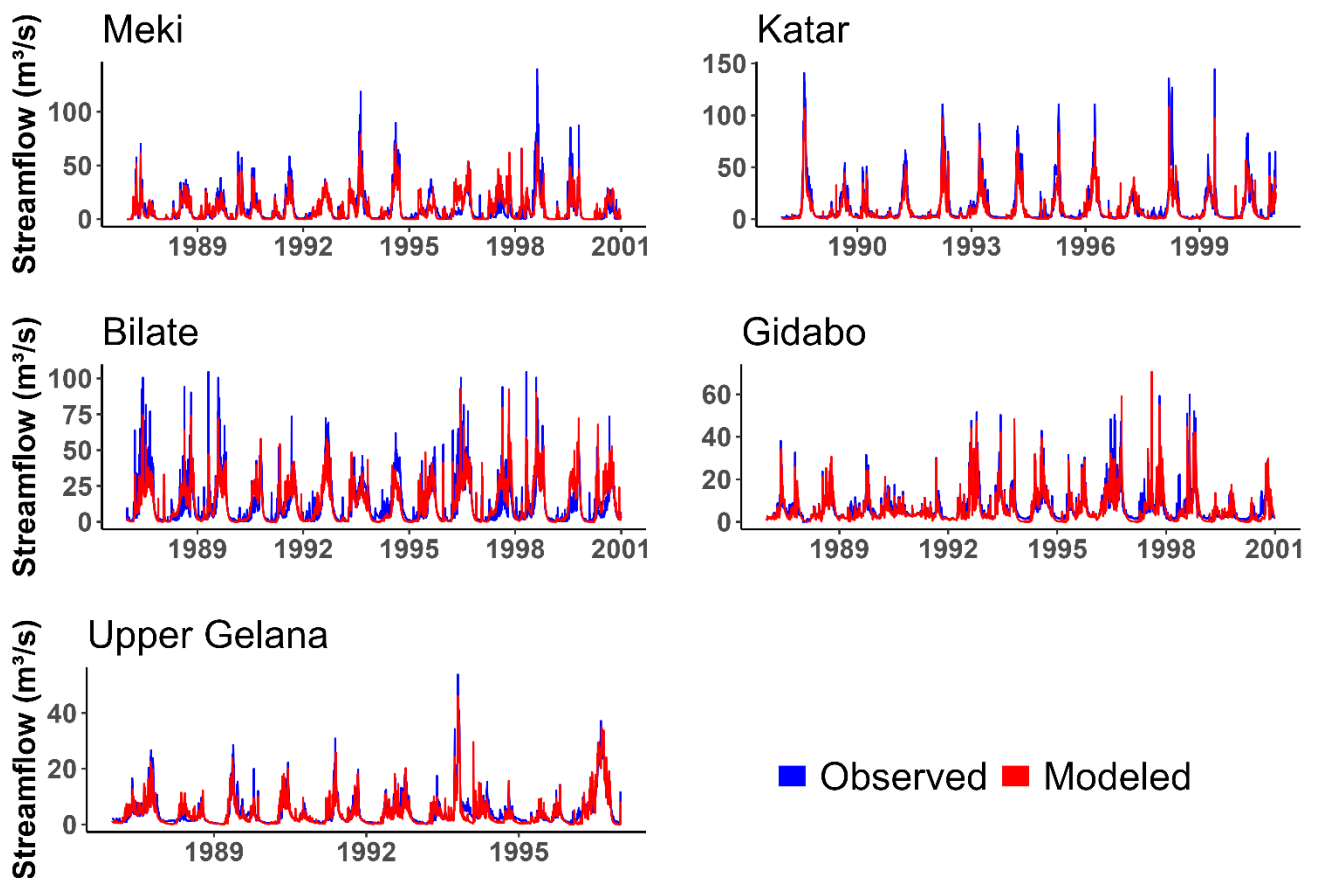

9

10 Figure 5 | Hydrograph of modeled and observed daily streamflow of the ‘pseudo’ watersheds


1

2 Table 5 | Model evaluation statistics of the daily SWAT+ for the ‘pseudo watersheds’ (1987-  
3 2000)

Watershed	Method	Objective functions			
		KGE	NSE	PBIAS	RSR
<b>Meki</b>	Test	0.71	0.63	9.2	<b>0.69</b>
<b>Katar</b>	Test	0.75	0.64	10.7	<b>0.67</b>
<b>Gidabo</b>	Test	0.70	0.59	+9.3	<b>0.75</b>
<b>Upper Gelana</b>	Test	0.67	0.61	+11.8	<b>0.73</b>
<b>Bilate</b>	<b>Test</b>	<b>0.59</b>	<b>0.53</b>	<b>+14.3</b>	<b>0.78</b>


4

5 Similarly, the FDC in Fig. 6 & 7 show that there is a good agreement between observed and  
6 the modeled discharge in both ‘donor and pseudo’ watersheds. Throughout the calibration and  
7 validation period, the model shows a slight overestimation of high, middle and low flows in  
8 Bulbul River. However, at Kulfo, high and low flows are slightly underestimated. The test of  
9 the regionalization approach shows that high flows were underestimated in all ‘pseudo’  
10 watersheds.

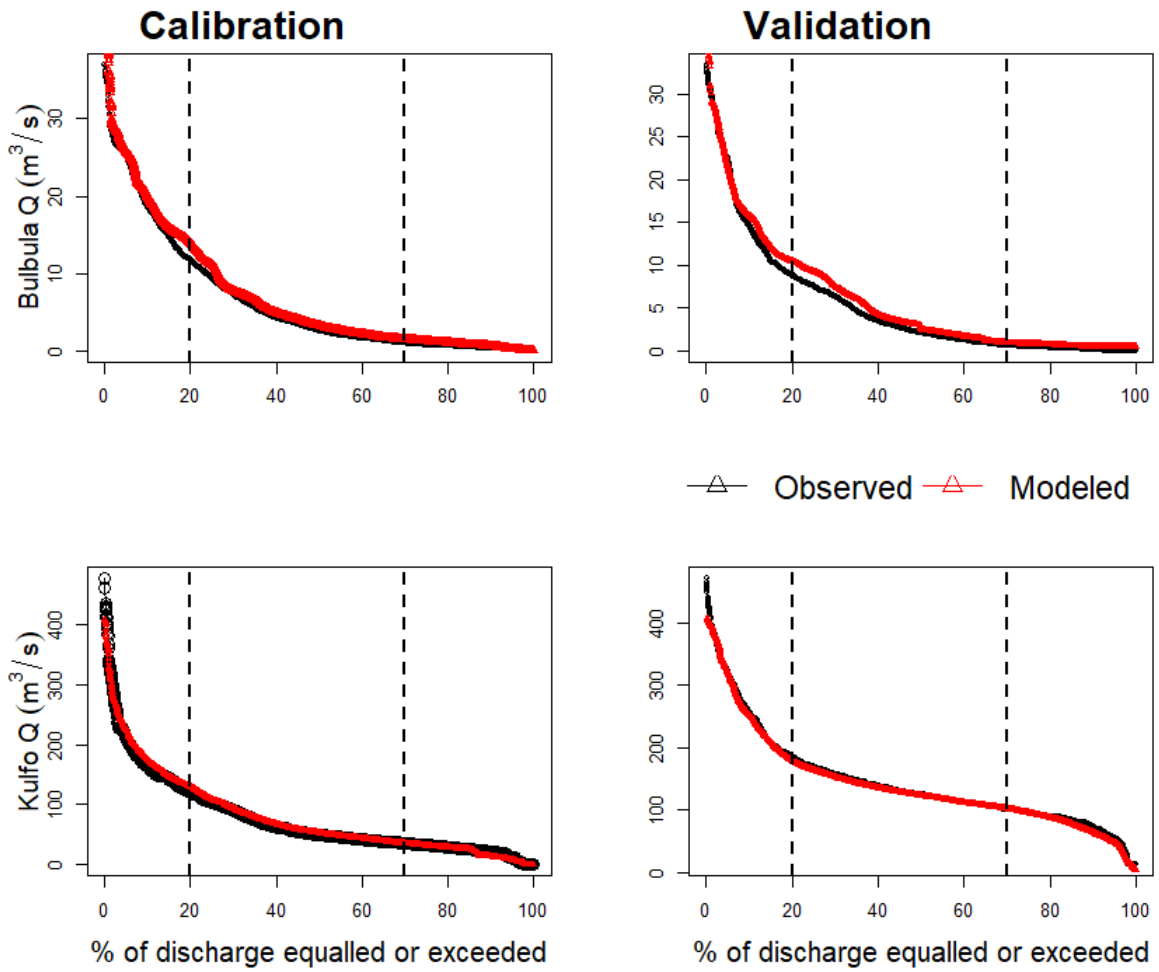

1

2 Figure 6 | Flow duration curves of observed and modeled daily streamflow for the calibration  
 3 and validation period of the ‘donor watersheds.

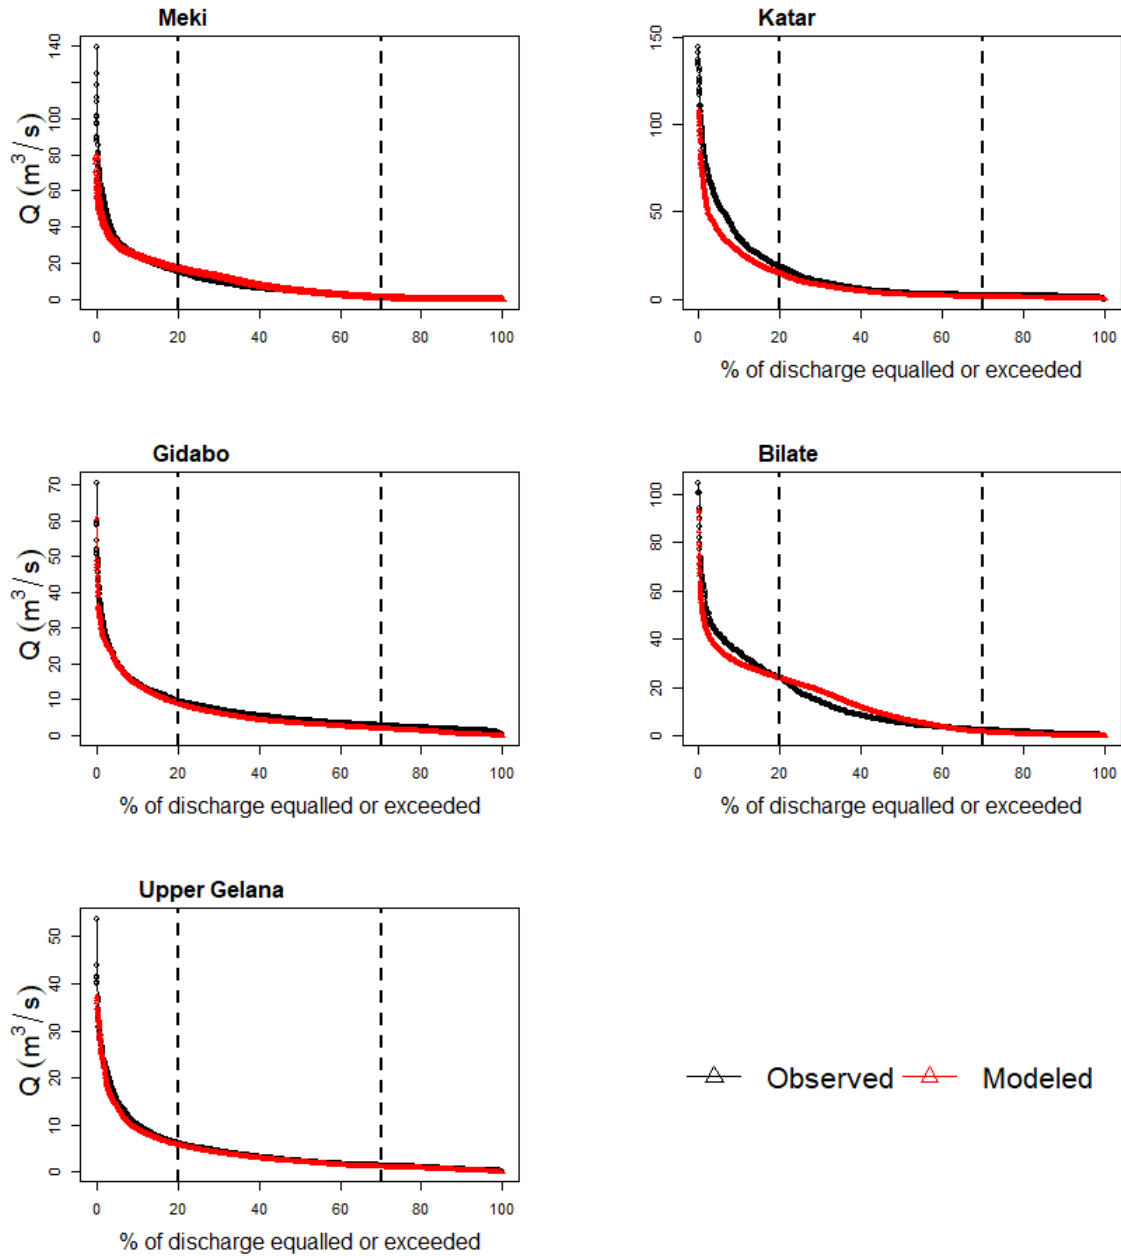

1

2 Figure 7 | Flow duration curves of observed and modeled daily streamflow of the ‘pseudo  
 3 watersheds.

#### 4 Lake water balance change

5 The water balance of Lake Abijata is controlled by rainfall and evaporation, water abstraction  
 6 from the lake by the soda ash factory, inflow from Bulbula and Horakelo Rivers, and inflow  
 7 from ungauged watersheds. The water balance of Lake Chamo is primarily controlled by  
 8 evaporation and rainfall on the lake, inflow from Kulfo River, 40 springs, and inflow from  
 9 ungauged watersheds (Sile and Elgo) (Table 5). We assumed that the groundwater flow and

1 movement influence is negligible, following findings by Ayenew (2004). The result depicted  
 2 that the surface runoff and evaporation increased in the impact period in both lakes. Abstraction  
 3 increased in the Abijata Lake (Table 5). Changes in lake level and volume reflect variations in  
 4 the inputs from rainfall, evaporation, abstraction and surface flow. Trends in the lake water  
 5 levels in both lakes are highly variable. The Abijata Lake level decreased by 2 m due to large-  
 6 scale water use for irrigation and soda abstraction in the catchment, significant changes have  
 7 been recorded in the past few decades, and by 2021, the area of Lake Abijata had been reduced  
 8 by about 68% as compared to year 1989 (Ayalew et. al, 2022) and 60% as compared to the  
 9 year 2016 (Wagaw et al., 2019). Because irrigation is highly expanding and abstraction of water  
 10 from Meki, Katar and Bulbula Rivers, and Lake Ziway for irrigation takes place year-round,  
 11 its effect on water levels is increased during dry season (Getnet et al., 2014, Jansen et al., 2007,  
 12 Wagaw et al., 2019). The water balance of the lakes in Table 5 was determined by combining  
 13 model output, including lake areal rainfall, evaporation, and inflow from both gauged and  
 14 ungauged watersheds, with recorded data such as abstraction, depth, and spring inflow.

15 Table 5: Changes of the annual water balance components in million m<sup>3</sup>

Water Balance Components	Lake Abijata			Lake Chamo		
	Pre-impact period	Impact period	$\Delta V$ , million m <sup>3</sup> /y	Pre-impact period	Impact period	$\Delta V$ , million m <sup>3</sup> /y
Lake areal rainfall	103.3	96.6	-6.7	338.4	329.4	-9.0
Lake evaporation	240.7	233.9	-6.9	496.2	518.3	2.2
Gauged river inflow	238.3	208.4	-29.8	2184.3	3943.0	1758.7
Inflow from springs	-	-	-	5.3	4.1	-1.2
Ungauged river inflow	14.7	16.3	2.4	171.6	312.1	140.5
Lake outflow	-	-	-	-	-	-
Abstraction	5	13	8	-	-	-
Enclosure term*	110.6	74.4	-35.2	2203.4	4070.3	1886.8
Change in depth (m)	4.3	2.7	-1.6	14.2	18.6	4.4

16 \* The enclosure term in this case is the water balance on the lake, which is determined by the  
 17 difference between the input and output. The magnitude of this term depends on the amount of  
 18 loss and gain.

### 19 3.2. Hydrological alteration

20 The analysis of hydrological alterations was carried out on both Lake Abijata and Lake Abaya.  
 21 The change point analysis presented in Fig. 8 shows that there is an abrupt shift in lake level


1 over the Rift Valley Lake Basin. The change point analysis results revealed that the lake level  
2 has decreased after the year 2003. Abaya Lake has experienced a decrease after a change point  
3 from the 2000s until 2009 and more recently, a large increase was observed. Based on the  
4 change point analysis, three periods have identified, the pre-impact period (1985-2003), impact  
5 period (2003 to 2009) and post-impact period (2010 to 2015).

6 The environmental flow analysis in Fig. 8 depicted that the natural flow pattern has been  
7 disrupted. The magnitude and timing, duration, seasonality and frequency of high and low  
8 flows of the impacted periods have changed compared to the pre-impact period. The extreme  
9 low flow, low flow, small floods and large flood values for the impacted period have decreased  
10 in Abijata Lake, while they have increased in the Abaya Lake.

11

12

13

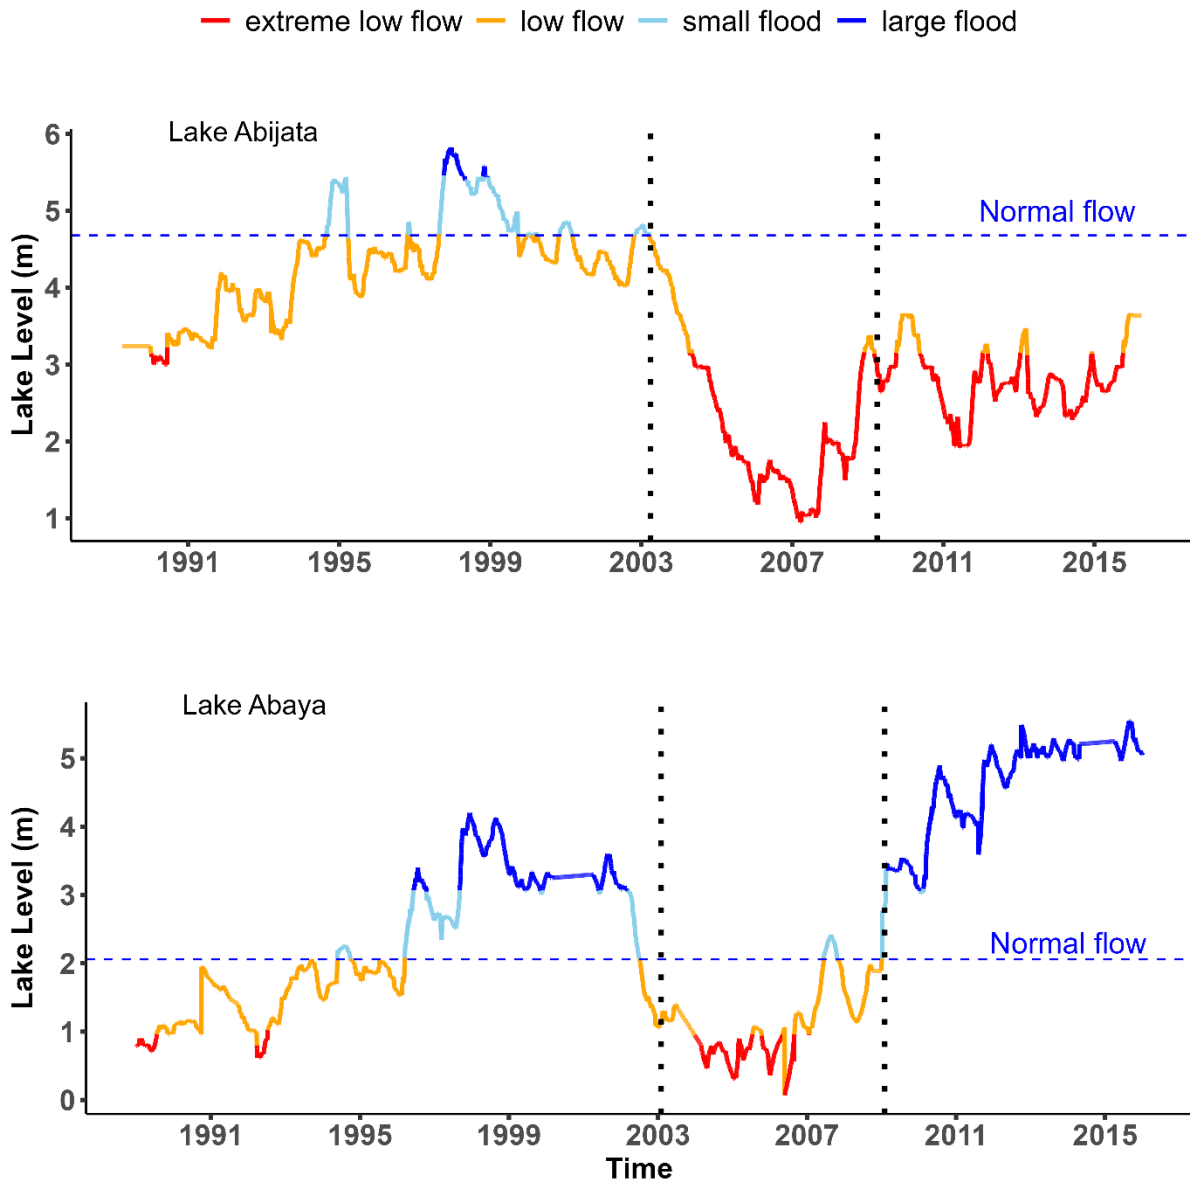


1


2 Figure 8 | Environmental flow analysis of Lake Abijata and Abaya based on observed data

3 Fig. 9 depicts the monthly median and FDC plot of Lake Abijata and Abaya in the pre-impacted  
 4 and impacted period. It is observed that the lake level and the natural regime have altered after  
 5 the year 2002/2003 in both lakes. The Abijata lake level exhibited a significant decrease during  
 6 the pre-impacted period for all months, while the Abaya Lake level showed a significant  
 7 increase during the impacted period in all months. The FDC showed an increase in the Abaya  
 8 Lake level across all flow regimes (low, middle, and high) and a decrease in the Abijata Lake  
 9 level. A high degree of alteration is observed in both lakes; but the hydrological regime of Lake  
 10 Abaya has undergone a complete change, especially during the dry season (May to September).  
 11 This is associated with a change of the rainfall pattern (Ayalew et al., 2022a).



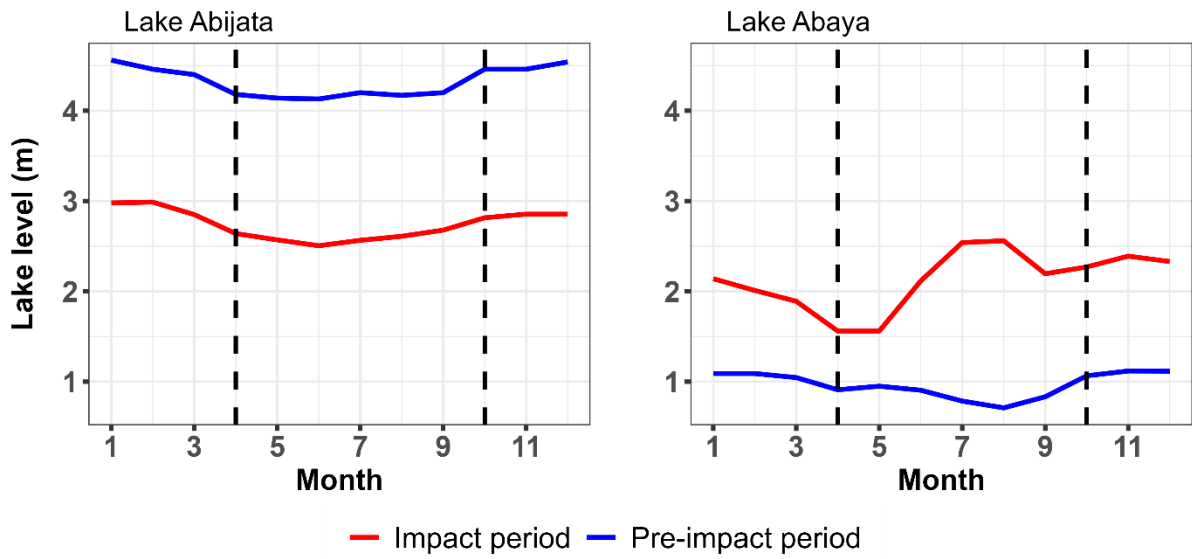

1

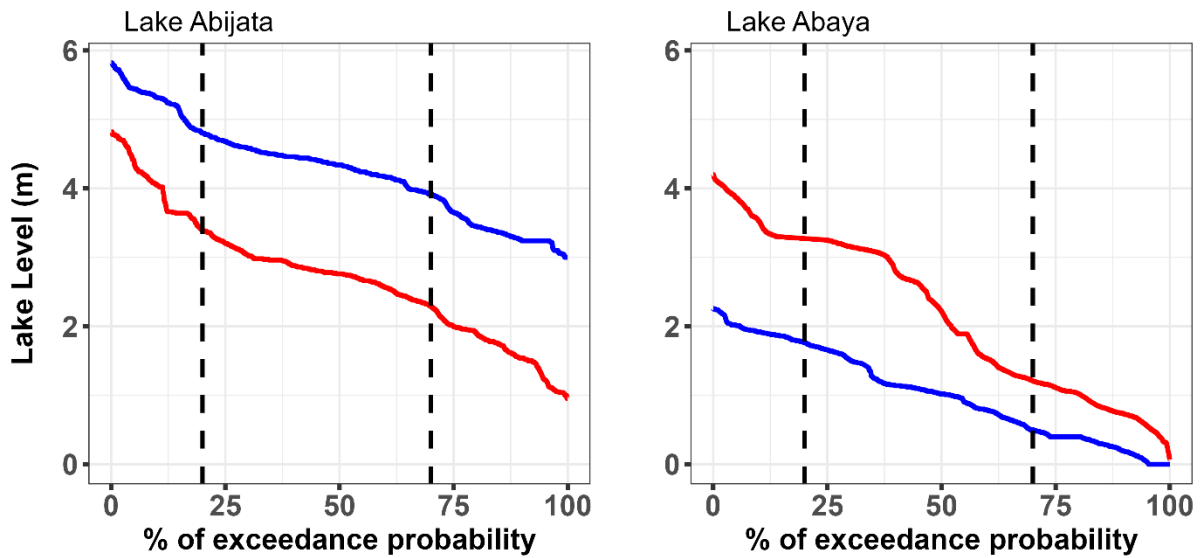

2

3 Figure 9 | Monthly median and FDC analysis of pre-impacted and impacted period

4 Median of monthly flow (RVA Group 1) throughout the impact period indicates a decreasing  
5 trend compared with the pre-impact period in the Abijata Lake. The dispersion coefficients for  
6 the pre-impact period (ranging from 0.21 to 0.33) are mostly lower than those for the impact  
7 period (ranging from 0.3 to 0.49), indicating the higher flow fluctuations in the impacted period  
8 due to the irrigation expansion and soda ash factory. Whereas in Abaya Lake, median of  
9 monthly flow depicted an increasing trend compared with the pre-impact period. The  
10 dispersion coefficients for the pre-impact period (ranging from 1.18 to 1.68) are mostly lower  
11 than those for the impact period (ranging from 0.80 to 1.5), indicating that the higher flow  
12 fluctuations in the impacted period due high runoff are associated with high deforestation

1 (Ayalew et al., 2022b, Dessie and Kleman, 2007, Garedew et al., 2009). The medians of annual  
2 1-, 3-, 7-, 30-, 90-day minimum and 1-, 3-, 7-, 30- and 90-day maximum for the impact period  
3 decrease significantly for Abijata Lake and significantly increase in the case of Abaya Lake.  
4 These results indicate that the daily, weekly, monthly and seasonal maximum/minimum flow  
5 cycles are negatively influenced by water abstraction for irrigation and factory in the case of  
6 Abijata Lake; and positively influenced by runoff increasing the case of Lake Abaya.

7 The median Julian dates for the annual 1-day minimum have shifted forward in the impacted  
8 period, moving from the 137<sup>th</sup> and 91<sup>st</sup> day in the pre-impact period to the 130<sup>th</sup> and 113<sup>th</sup> day  
9 in Lake Abijata and Abaya, respectively. Likewise, the median Julian dates for the annual 1-  
10 day maximum have also moved forward in the impact period, shifting from the 309<sup>th</sup> and 320<sup>th</sup>  
11 day to the 327<sup>th</sup> and 311<sup>st</sup> day in Lake Abijata and Abaya, respectively. The result also showed  
12 that there is no significant change on the medians of low, high pulse counts and base flow index  
13 in the impact period and in the pre-impact period, in both lakes (Figure 10).


14 The medians of low pulse durations (increased from 2 to 47) and high pulse durations  
15 (increased from 64 to 140) in the impacted period are higher than those in the pre-impact  
16 period in Abijata Lake. However, the medians of low pulse durations (decreased from 125 to  
17 36) and high pulse durations (increased from 208 to 223) in the impact period in Abaya Lake  
18 which indicates a high hydrologic alteration of low and high pulse durations. Median of high  
19 pulse durations have increased in both lakes, which is associated with increasing runoff during  
20 wet season.

21 The medians of rise rate and fall rate are the same as those in the pre-impact period in  
22 both Lakes except the number of reversals. The number of reversals are higher than in the pre-  
23 impacted period (decreased from 41 to 23) in Abaya lake; and (decreased from 88 to 78) in  
24 Abijata lake.


25 Considering all 33 parameters (Figure 10), the highest hydrologic alteration factors has  
26 occurred in low RVA category (ranging from 1 to 2.7) except fail rate and high pulse duration,  
27 which indicates annual parameter values more often fell inside the RVA target window than  
28 expected in Abijata Lake. Likewise, in this lake the second highest hydrologic alteration factors  
29 have occurred in high RVA category (ranging from -1 to -0.1) except low pulse count, which  
30 indicates annual parameter values less often fell inside the RVA target window than expected.  
31 High hydrologic alteration factor has also been observed in Abaya Lake which in the low RVA  
32 category (ranging from -1 to -0.1) except fail rate and low pulse duration, which indicates

1 annual parameter values less often fell inside the RVA target window than expected. In this  
2 lake also the second highest hydrologic alteration factor has occurred in high RVA category in  
3 group one and group two (ranging from 0.6 to 1.5), which indicates annual parameter values  
4 more often fell inside the RVA target window than expected.

Lake Abijata

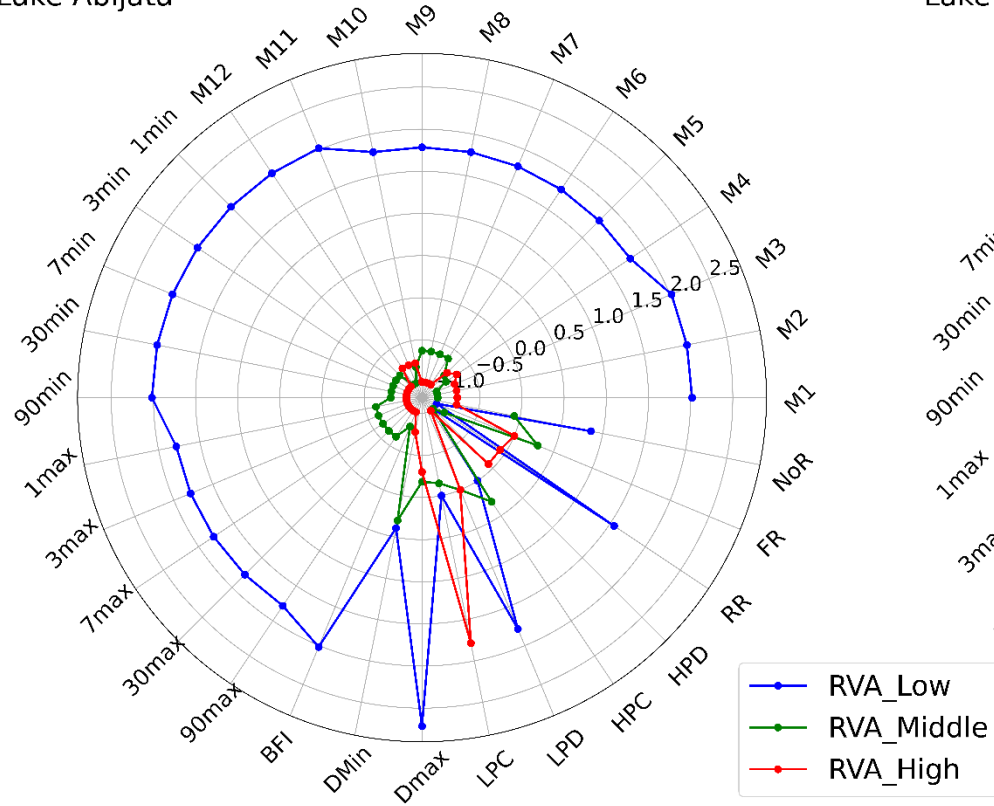

Lake Abaya

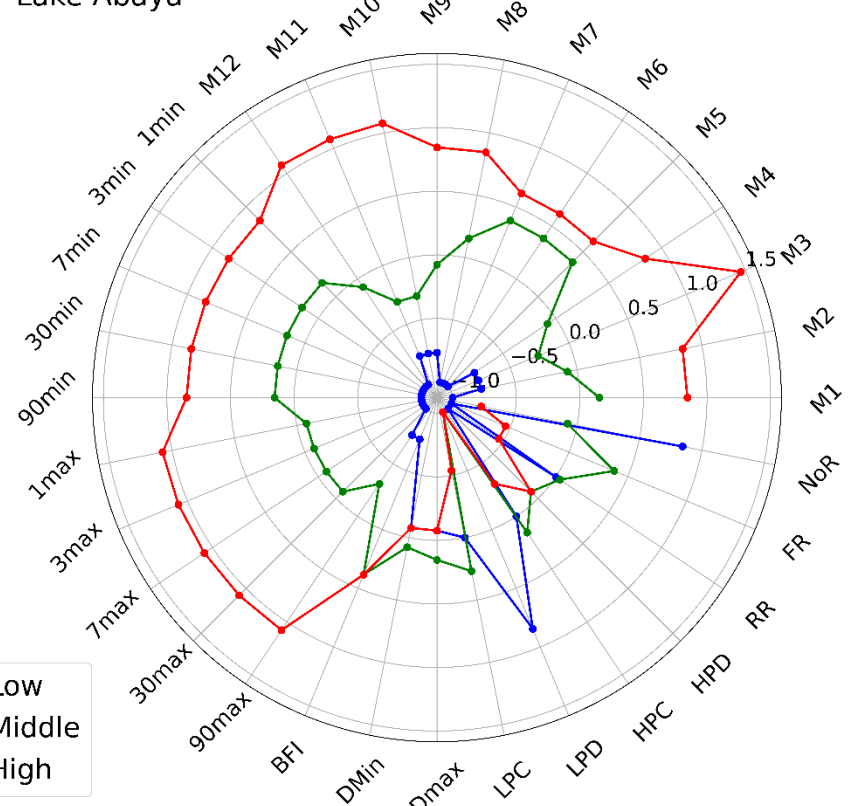

1

2

Figure 10 | Hydrological alteration analysis using RVA

3

Where, 'M1', 'M2', 'M3', 'M4', 'M5', 'M6', 'M7', 'M8', 'M9', 'M10', 'M11', 'M12', '1min', '3min', '7min', '30min', '90min', '1max', '3max', '7max', '30max', '90max', 'BFI', 'DMin', 'Dmax', 'LPC', 'LPD', 'HPC', 'HPD', 'RR', 'FR', 'NoR' are 'January', 'February', 'March', 'April', 'May', 'June', 'July', 'August', 'September', 'October', 'November', 'December', '1\_day\_min', '3\_day\_min', '7\_day\_min', '30\_day\_min', '90\_day\_min', '1\_day\_max', '3\_day\_max', '7\_day\_max', '30\_day\_max', '90\_day\_max', 'Base\_flow\_index', 'Date\_of\_min', 'Date\_of\_max', 'Low\_pulse\_count', 'Low\_pulse\_duration', 'High\_pulse\_count', 'High\_pulse\_duration', 'Rise\_rate', 'Fall\_rate', 'Number\_of\_reversals'.

6

1 Generally, results indicate that the hydrological system is changing in both lake basins but  
 2 responding differently to the changes. Changes in hydrology are mainly associated with human  
 3 activity and climate change. Apparently, the changing hydrology for the impacted period  
 4 (2003-2009) was worsen in the Abijata Lake and linked with frequent droughts and water  
 5 abstraction. Despite the fact that the Abijata Lake's level increased during the post-impacted  
 6 period, it remained lower than the lake level observed in the pre-impacted period. In contrast  
 7 to the pre-impacted period, the water level of Lake Abaya increased during the post-impacted  
 8 period.

9 Bathymetry analysis, Bathymetric characteristics of Lakes

10 **Morphometric characteristics and contour maps**

11 Morphological parameters used to characterize the morphometry of the Lake Chamo, including  
 12 area (A), Volume(V), maximum effective length (L<sub>me</sub>), maximum width (W<sub>me</sub>), mean width  
 13 (W), maximum depth(d<sub>max</sub>) and mean depth (d<sub>mean</sub>), are summarized in Table 6. The values are  
 14 presented with respect to the reference datum discussed in the methodology. The result is also  
 15 compared with the bathymetry analysis of Awulachew (2001) conducted in 1998. The  
 16 maximum depth increased by 4.4 m in the middle of the lake , the sediment thickness increased  
 17 by about 0.6 m, the area increased by 30 km<sup>2</sup> and the volume increased by 7.8 x 10<sup>8</sup> m<sup>3</sup> within  
 18 two decades (Figure 8).


19 Table 6 | Morphometric characteristics of Lake Chamo

Parameter	Chamo Lake	
	This study (2021)	Awulachew (1998)
Altitude (m)	1110 (GPS)	1107(EMA 1: 50 000 maps)
Basin area, including lakes (km <sup>2</sup> )	18 599.8 (with Lake Abaya contribution)	18 599.8 (with Lake Abaya contribution)
A, including islands (km <sup>2</sup> )	346.76	316.72
Volume (m <sup>3</sup> )	4.12× 10 <sup>9</sup>	3.24 × 10 <sup>9</sup>
L <sub>me</sub> (km)	33.93 between 5°41'36"N and 37°28'40"E to 5°58'24"N and 37°35'56"E	33.50 between 5°42'00"N and 37°39'00"E to 5°58'00"N and 37°36'00"E
W <sub>me</sub> (km)	16.07	15.5, perpendicular to L
W (km)	10.17	10.1
d <sub>max</sub> (m)	18.6	14.2, near the middle
d <sub>mean</sub> (m)	11.38	10.23

20

21 The water depth distribution obtained using Kriging interpolation method in surfer20 is shown  
 22 in Figure 9. A grid size of 110 m x 450 m bathymetric data was used to interpolate the depth


- 1 distribution of the lake. The resulting depth estimates were plotted on a contour map to
- 2 visualize the underwater topography of the lake; and we observed that the central region of the
- 3 lake had the deepest parts.

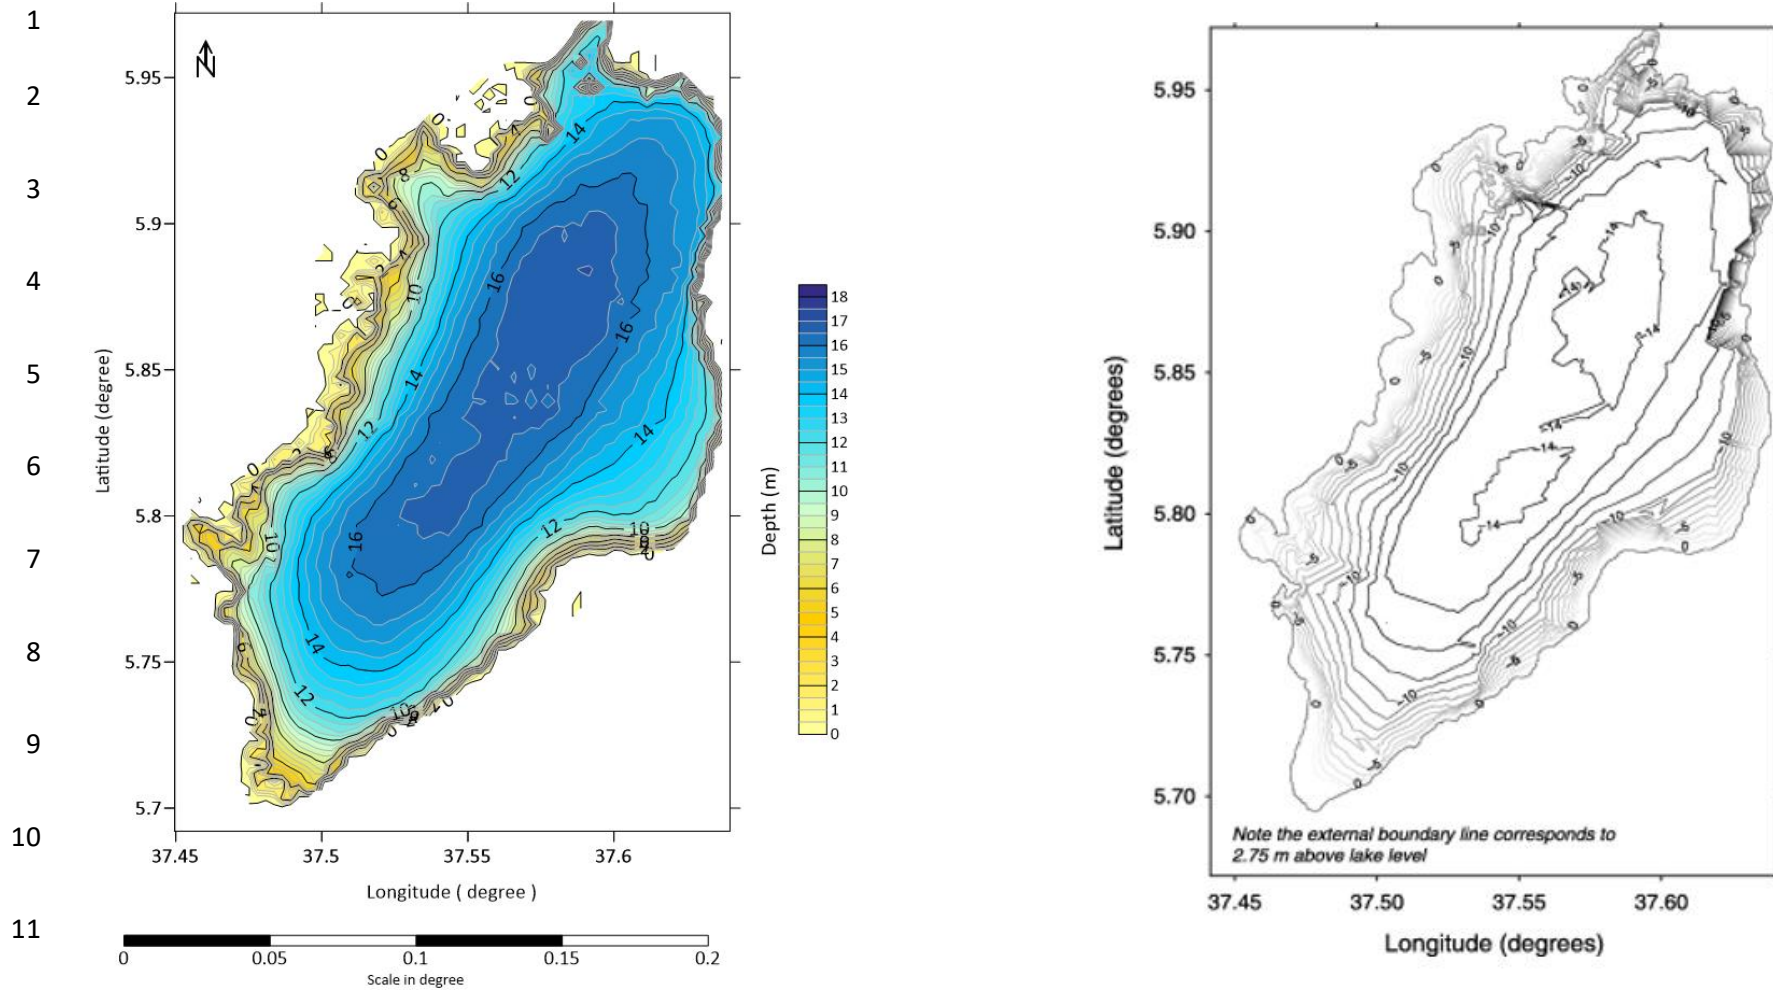

12 *Figure 11 / Bathymetric maps of Lake Chamo (a) bathymetry of this study (2021); (b) Bathymetry of Awulachew (1998)*


1 **Water level and storage change analysis**

2 Fig. 12 a & b illustrates the changes in spatio-temporal patterns of Lake Chamo depth, area and  
3 storage over a span of 20 years (1998-2021), as indicated by the depth-area and storage  
4 analysis. Specifically, the lake has experienced an expansion, gaining an area of 30 km<sup>2</sup> (9.5%),  
5 and its volume has increased by 7.8 x 10<sup>8</sup> m<sup>3</sup> (27.2%) over the same period. As the maximum  
6 depth increased by 4.4 m (31%) and the lakebed level increased by 0.6 m (4.5%) possible  
7 factors that could contribute to such changes in lake size and volume are increased runoff and  
8 sedimentation from rivers or streams that flow into the lake due to land use change,  
9 deforestation. Another reason may be changes in the underlying geology of the area, such as  
10 changes in the flow of underground water and springs, that can contribute to changes in a lake's  
11 size and volume. These changes in size and volume could have significant ecological and  
12 environmental impacts on the lake and its surrounding area.

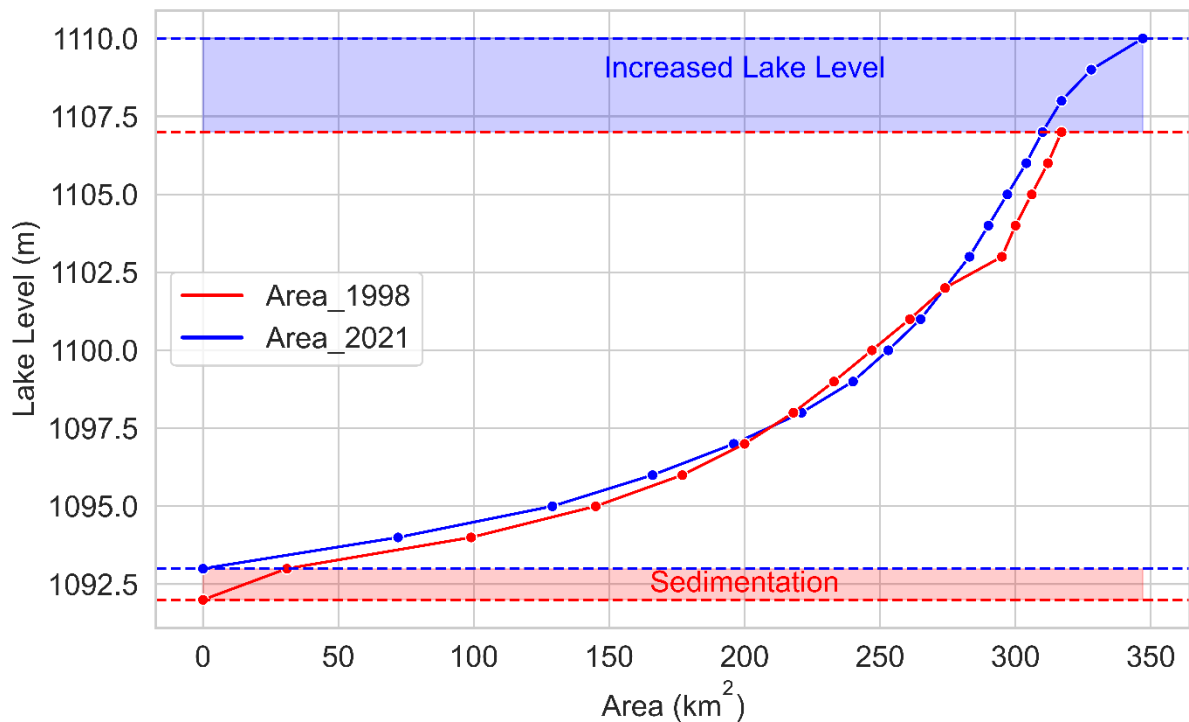

13  
14 Figure 12 a | Area-depth change analysis: blue color for the 2021; red color for 1998  
15 (Awulachew (1998))



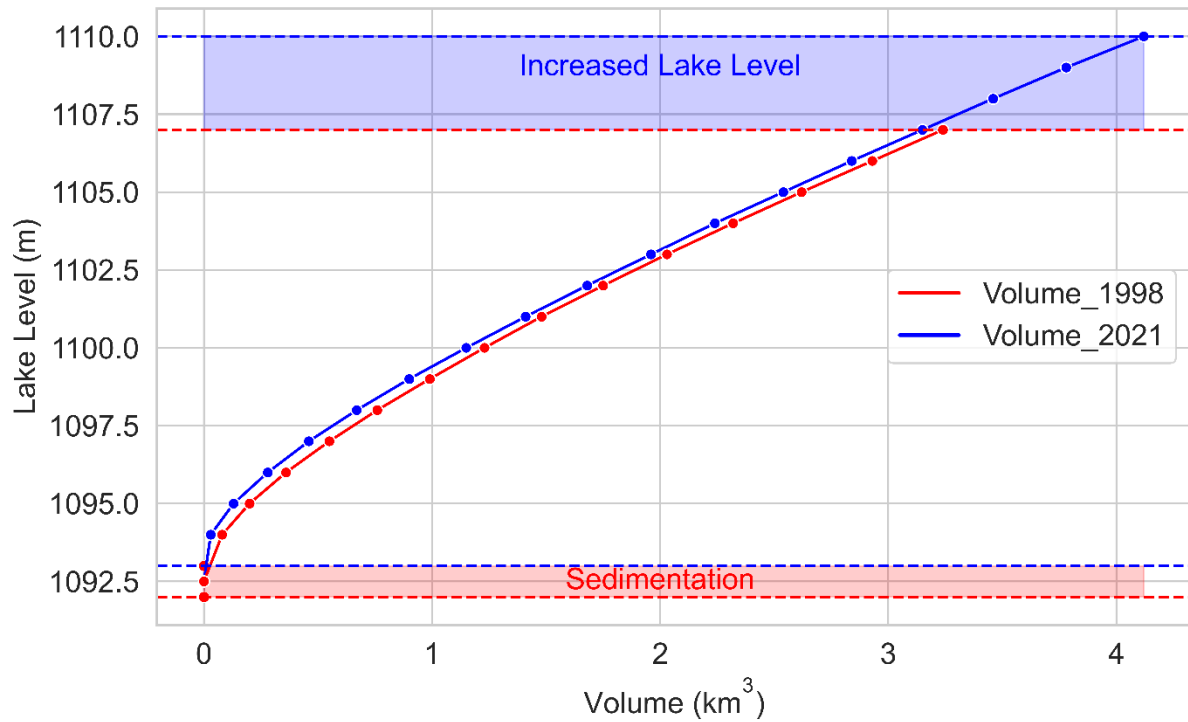

1

2 Figure 13 b | Volume-depth change analysis: blue color for the 2021; red color for 1998  
 3 (Awulachew (1998))

4 **Discussion**

5 In the context of regionalization of model parameters, our hydrological model exhibited a  
 6 performance level that aligns closely with the findings documented in the literature (Seibert,  
 7 1999, Beldring, 2002, Merz and Blöschl, 2004). Based on the evaluation using the objective  
 8 functions NSE, KGE, PBIAS and RSR, the pooled calibration technique showed a good  
 9 performance. It exhibited a remarkable ability to accurately represent observed hydrological  
 10 behavior, particularly for the closest pseudo watersheds (Gidabo, Upper Gelana, Meki, Katar,  
 11 and Bilate). This phenomenon of varying performance across spatially related watersheds has  
 12 also been noted by Merz and Blöschl (2004), who attributed it to the interplay of spatial  
 13 hydrologic variability and poor data quality. Seibert (1999) observed a decline in NSE runoff  
 14 efficiency from 0.81 to 0.79 when transitioning from calibrated to regionalized parameters  
 15 across 11 catchments and a decrease to 0.67 for a separate set of 7 catchments. Beldring (2002)  
 16 also found a NSE of 0.68 for 141 gauged catchments and 43 catchments treated as ungauged,  
 17 though approximately 20% of the latter group exhibited efficiencies below 0.3. Compared to  
 18 this the maximum decline in model performance due to regionalization in our study is observed  
 19 in the Bilate watershed with a decreased of the NSE from 0.68 (cal) /0.63 (val) in the donor  
 20 watershed to 0.53 in the pseudo watershed (Table 4). In this case the donor watershed (Chamo)  
 21 is dominated by semi-natural vegetation, whereas, the pseudo watershed (Bilate) has a larger

1 share of agricultural land. It is evident that while regionalization allows for broader model  
2 applicability, the accuracy of predictions can vary significantly depending on contextual factors  
3 and the specific characteristics of the studied watersheds.

4 The study revealed significant changes in lake levels and inflows over the past two decades in  
5 the Rift Valley Lakes. Notably, Chamo Lake experienced substantial increases in area, depth,  
6 and volume, while Lake Abijata witnessed an extraordinary decrease in area and depth. The  
7 resuly revealed that significant shifts in the hydrological system of Lake Abijata and Lake  
8 Abaya after the year 2003. Substantial decreases in lake levels were observed in both lakes  
9 from 2003 to 2009. The lake levels recovered after 2009. In the post-impact period (2010-  
10 2015), the lake level of Abaya Lake showed an increase compared to both the pre-impact  
11 (1987-2003) and impact period (2003-2009). On the contrary, during the same period, the lake  
12 level of Abijata Lake showed a noticeable decreasing trend compared to the pre-impact period.  
13 According to Ayalew et al. (2022), the significant decline in water level during the impact  
14 period (2003-2009) was primarily attributed to prolonged drought affecting both lakes. A study  
15 by Street (1979) also investigated that many of the rift lake's water level fluctuations were  
16 associated with climate conditions rather than anthropogenic factors. However, recently the  
17 changing water level is also associated with anthropogenic activities (Alemayehu et al., 2006).

18 The Range Variable Approach (RVA) analysis also revealed that the river's flow regime has  
19 deviated significantly from its natural or historical patterns. The High-RVA and Middle-RVA  
20 values are negative in Lake Abijata, which indicates that the river's flow conditions are lower  
21 than what would be expected based on historical data. The negative value of high and middle  
22 and the positive value of low level of Lake Abijata coincides with the time of high-water  
23 abstraction for soda production and water abstraction for irrigation from the upstream Lake  
24 Ziway. In the wet season, the time between May to September is a refilling period of the lake  
25 from large inflows from the Katar and Meki rivers. During the dry season (November to June),  
26 Ziway shows a net loss of storage due to high abstraction of water for irrigation. This high  
27 abstraction of water leads to shifts in the flow regime, and a positive value of low-RVA as  
28 observed. In Abaya Lake, the hydrological system responded reversely. The High-RVA and  
29 Middle-RVA values are positive, and the low-RVA value is negative. This indicates that the  
30 peak flow increased in the impact period during the wet season. Our previous work, Ayalew et  
31 al. (2023), showed an increasing surface runoff and decreasing infiltration and evaporation  
32 after 2000, which is associated with deforestation and agricultural expansion.

1 Lake Abijata is a terminal lake; it lacks any surface or groundwater outflow, making its water  
2 level and volume subject to changes in hydrological budget components such as rainfall, river  
3 inflow, and evaporation. However, recent development schemes in soda ash extraction and  
4 irrigation have also contributed to the drastic reduction of the lake level (Alemayehu et al.,  
5 2006). The main inflow is from the discharge from the Horakelo and Bulbula rivers, which are  
6 the outflows of lakes Langanano and Ziway, respectively, and direct rainfall. The total river  
7 inflow decreased by 12.5%, which is associated with water abstraction for irrigation. As it is a  
8 terminal lake, the ways of water loss from the lake are evaporation and abstraction. Therefore,  
9 the main reason for hydrological regime change was water abstraction of feeding rivers for  
10 irrigation and water abstraction for industrial purposes from the lake followed by evaporation.  
11 Alemayehu et al. (2006) also state that abstraction of Lake Ziway for irrigation also has an  
12 influence on the level of Lake Abijata. Conversely, Lake Chamo experienced an increase in its  
13 water level during the post-impact period. The lake level increased by 4.4 m, and the lake  
14 bottom elevation increased by 0.6 m. This significant water level rise is mainly due to high  
15 surface runoff and sediment transportation. The total surface inflow increased by 80.5%, which  
16 is influenced by changes in Land Use and Land Cover, particularly deforestation and  
17 agricultural expansion, which resulted in higher runoff (Ayalew et al., 2023) and enhanced  
18 sediment transportation. In contrast to many East African terminal lakes, lake Chamo has  
19 shown significant water level rise. These changes can be explained by change in Land Use and  
20 Land Cover (LULC) and climate change (Ayalew et al. 2023). Influence of human activities  
21 exerted a more significant impact compared to climate change. The hydrological regime of the  
22 lakes is affected by human-induced factors (mainly abstraction, urbanization, and  
23 deforestation) associated with rapid population growth. In the Northern part of the study area  
24 high water abstraction for irrigation and industry was the main driving factor for the changes  
25 hydrology. However, in the Southern part of the study area, high runoff and sedimentation  
26 associated with high deforestation are the main driving factors for the hydrological alterations  
27 (Ayalew et al. 2023). Even though further investigation is required, the changing hydrological  
28 system in the Rift Valley also might be linked to the geological setting. The Rift Valley is  
29 formed due to the divergent movement of tectonic plates, leading to the creation of a rift or  
30 crack in the Earth's crust. This tectonic activity results in the formation of grabens and horsts,  
31 additionally influencing the hydrological characteristics of the region (Scoon, 2018,  
32 Chorowicz, 2005).

## 1 Summary and conclusions

2 The Rift Valley Lakes in Ethiopia have experienced changes in their hydrological regime, due  
3 to anthropogenic and climate change. Integrating a physical based hydrologic model, break  
4 point analysis, indicators of hydrologic alteration (IHA) and bathymetry survey is a better  
5 approach to understand a dynamic and complex hydrological system and the potential driving  
6 factors. Indicators of hydrological alteration (IHA) were derived from lake level data that  
7 clearly showed the alterations of hydrological regime. Main water balance components were  
8 simulated using a semi-distributed Soil and Water Assessment Tool plus (SWAT+) model.  
9 Multisite regionalization techniques represent the hydrological behavior of multiple locations  
10 and that the model can be used to make predictions for other locations. The SWAT+ model  
11 performed well for daily stream flow during calibration and validation period. The pooled  
12 calibration approach showed a satisfactory performance in capturing observed hydrological  
13 behavior, both in ‘donor’ and ‘pseudo’ watersheds. The applied calibration technique was  
14 suitable for regionalization of model parameters as the rather small decrease of model  
15 performance in the pseudo ungauged watersheds showed.

16 The findings reveal notable changes over the past two decades. Chamo Lake experienced an  
17 increase in area by 11.86 km<sup>2</sup>, depth by 4.4 meters, and volume by 7.8 x 10<sup>8</sup> cubic meters. In  
18 contrast, Lake Abijata witnessed an extraordinary 68% decrease in area and a depth decrease  
19 of -1.6 meters. Mean annual rainfall decreased by 6.5% in Abijata Lake and 2.7% in Chamo  
20 Lake during the impacted period. Actual evapotranspiration decreased by 2.9% in Abijata Lake  
21 but increased by up to 0.5% in Chamo Lake. Surface inflow to Abijata Lake decreased by  
22 12.5%, while Lake Chamo experienced an 80.5% increase in surface inflow. Sediment depth  
23 in Chamo Lake also increased by 0.6 meters.

24 The results of this study highlight on the changing hydrological regime in Chamo Lake,  
25 emphasizing the role of anthropogenic influences in increasing surface runoff and sediment  
26 intrusion. Conversely, the hydrological dynamics of Abijata Lake are primarily affected by  
27 water abstraction from the rivers and lakes that serve as its water sources, driven by industrial  
28 and irrigation demands. By examining these factors, this research offers valuable insights into  
29 the evolving hydrological systems of the Rift Valley Lakes in Ethiopia, contributing to a better  
30 understanding of the driving forces behind these changes.

1 The hydrological regime of Chamo Lake has experienced changes characterized by increased  
2 area, depth, and volume, primarily influenced by heightened surface runoff and sediment  
3 intrusion.

4 Abijata Lake has undergone significant changes in its hydrological regime, marked by a  
5 substantial decrease in area and depth, resulting from water abstraction for industrial and  
6 irrigation purposes from feeding rivers and lakes.

7 The findings emphasize the importance of understanding the driving factors behind  
8 hydrological changes in Rift Valley Lakes, particularly the influence of anthropogenic  
9 activities and climatic variations. Lake level changes, whether declining or increasing, have  
10 resulted from a combination of natural and human-induced factors. These changes can have  
11 significant impacts on ecosystems, human communities, and water availability. Mitigating the  
12 impacts of these changes requires sustainable water management practices, climate change  
13 adaptation strategies, and a holistic understanding of the interconnection of ecosystems and  
14 human activities.

15 Further research and monitoring efforts are necessary to deepen our understanding of the  
16 hydrological processes and identify effective management strategies to ensure the sustainable  
17 use and conservation of the Rift Valley Lakes in Ethiopia.

18 **Acknowledgments:** The German Academic Exchange Service (DAAD) and the Ethiopian  
19 Ministry of Education supported this research. Our gratefully acknowledgment is also  
20 towards to Ethiopian Ministry of water resources for providing hydrological data; Ethiopian  
21 Meteorology Agency for providing meteorological data and Arba Minch University- Vlaamse  
22 Inter-universitaire Raad-Institutional University Cooperation (AMU-VLIR-IUC) program for  
23 funding the bathymetry survey conducted on Lake Chamo.

24

## 25 References

- 26 ARNOLD, J. G., SRINIVASAN, R., MUTTIAH, R. S. & WILLIAMS, J. R. 1998. Large area hydrologic  
27 modeling and assessment part I: model development 1. *JAWRA Journal of the American*  
28 *Water Resources Association*, 34, 73-89.  
29 AWULACHEW, S. B. J. Z. J. 1999. Physical morphometric characteristics and capacity curves of Abaya  
30 and Chamo Lakes. 16, 26-37.

- 1 AYALEW, A. D., WAGNER, P. D., SAHLU, D. & FOHRER, N. 2022a. Land use change and climate  
2 dynamics in the Rift Valley Lake Basin, Ethiopia. *Environmental Monitoring Assessment*, 194,  
3 791.
- 4 AYALEW, A. D., WAGNER, P. D., SAHLU, D., FOHRER, N. J. E. M. & ASSESSMENT 2022b. Land use  
5 change and climate dynamics in the Rift Valley Lake Basin, Ethiopia. 194, 791.
- 6 AYALEW, A. D., WAGNER, P. D., TIBEBE, B. TIGABU,, SAHLU, D., FOHRER, N. & ASSESSMENT 2023.  
7 Hydrological responses to land use and land cover change and climate dynamics in the Rift  
8 Valley Lakes Basin, Ethiopia. *Water and Climate Change*
- 9 AYALEW, L., YAMAGISHI, H. & REIK, G. 2004. Ground cracks in Ethiopian Rift Valley: facts and  
10 uncertainties. *Engineering Geology*, 75, 309-324.
- 11 AYENEW, T. 2002. Recent changes in the level of Lake Abiyata, central main Ethiopian Rift.  
12 *Hydrological sciences journal*, 47, 493-503.
- 13 AYENEW, T. 2004. Environmental implications of changes in the levels of lakes in the Ethiopian Rift  
14 since 1970. *Regional environmental change* 4, 192-204.
- 15 BELAY, E. A. 2009. *Growing lake with growing problems: integrated hydrogeological investigation on*  
16 *Lake Beseka, Ethiopia*, ZEF.
- 17 BELDRING, S. 2002. Multi-criteria validation of a precipitation–runoff model. *Journal of Hydrology*,  
18 257, 189-211.
- 19 BIEGER, K., ARNOLD, J. G., RATHJENS, H., WHITE, M. J., BOSCH, D. D., ALLEN, P. M., VOLK, M. &  
20 SRINIVASAN, R. 2017. Introduction to SWAT+, a completely restructured version of the soil  
21 and water assessment tool. *JAWRA Journal of the American Water Resources Association*,  
22 53, 115-130.
- 23 BILLI, P. & CAPARRINI, F. 2006. Estimating land cover effects on evapotranspiration with remote  
24 sensing: a case study in Ethiopian Rift Valley. *Hydrological sciences journal*, 51, 655-670.
- 25 CHOROWICZ, J. 2005. The east African rift system. *Journal of African Earth Sciences*, 43, 379-410.
- 26 COWX, I. G. & OGUTU-OWHAYO, R. 2019. Towards sustainable fisheries and aquaculture  
27 management in the African Great Lakes. *Fisheries Management Ecology*, 26, 397-405.
- 28 DE SOUSA LIMA, J. R., ANTONINO, A. C. D., DE SOUZA, E. S., HAMMECKER, C., MONTENEGRO, S. M.  
29 G. L. & DE OLIVEIRA LIRA, C. A. B. 2013. Calibration of Hargreaves-Samani equation for  
30 estimating reference evapotranspiration in sub-humid region of Brazil. *Journal of Water*  
31 *Resource Protection*, 2013.
- 32 DESSIE, G. & KLEMAN, J. 2007. Pattern and magnitude of deforestation in the South Central Rift  
33 Valley Region of Ethiopia. *Mountain research development*, 27, 162-168.
- 34 FLÖRKE, M., SCHNEIDER, C. & MCDONALD, R. I. 2018. Water competition between cities and  
35 agriculture driven by climate change and urban growth. *Nature Sustainability*, 1, 51-58.
- 36 GAREDEW, E., SANDEWALL, M., SÖDERBERG, U. & CAMPBELL, B. M. 2009. Land-use and land-cover  
37 dynamics in the central rift valley of Ethiopia. *Environmental management*, 44, 683-694.
- 38 GETNET, M., HENGSDIJK, H. & VAN ITTERSUM, M. 2014. Disentangling the impacts of climate  
39 change, land use change and irrigation on the Central Rift Valley water system of Ethiopia.  
40 *Agricultural Water Management*, 137, 104-115.
- 41 GOWNARIS, N. J., PIKITCH, E. K., OJWANG, W. O., MICHENER, R. & KAUFMAN, L. 2015. Predicting  
42 species' vulnerability in a massively perturbed system: The fishes of Lake Turkana, Kenya.  
43 *PLoS One*, 10, e0127027.
- 44 GUNAWARDANA, S. K., SHRESTHA, S., MOHANASUNDARAM, S., SALIN, K. R. & PIMAN, T. 2021.  
45 Multiple drivers of hydrological alteration in the transboundary Srepok River Basin of the  
46 Lower Mekong Region. *Journal of Environmental Management*, 278, 111524.
- 47 HARGREAVES, G. H. & SAMANI, Z. A. 1985. Reference crop evapotranspiration from temperature.  
48 *Applied engineering in agriculture*, 1, 96-99.
- 49 HUNDECHA, Y., ARHEIMER, B., DONNELLY, C. & PECHLIVANIDIS, I. 2016. A regional parameter  
50 estimation scheme for a pan-European multi-basin model. *Journal of Hydrology: Regional*  
51 *Studies*, 6, 90-111.

- 1 JAIN, S. K. & SINGH, V. P. 2019. *Engineering hydrology: an introduction to processes, analysis, and*  
2 *modeling*, McGraw-Hill Education.
- 3 JANSEN, H., HENGSDIJK, H., LEGESSE, D., AYENEW, T., HELLEGERS, P. & SPLIETHOFF 2007. Land and  
4 water resources assessment in the Ethiopian Central Rift Valley: Project: Ecosystems for  
5 water, food and economic development in the Ethiopian Central Rift Valley. Alterra.
- 6 KEBEDE, E., MARIAM, Z. G. & AHLGREN, I. 1994. The Ethiopian Rift Valley lakes: chemical  
7 characteristics of a salinity-alkalinity series. *Hydrobiologia*, 288, 1-12.
- 8 KOLDING, J. & VAN ZWIETEN, P. A. 2012. Relative lake level fluctuations and their influence on  
9 productivity and resilience in tropical lakes and reservoirs. *Fisheries Research*, 115, 99-109.
- 10 LE TURDU, C., TIERCELIN, J.-J., GIBERT, E., TRAVI, Y., LEZZAR, K.-E., RICHERT, J.-P., MASSAULT, M.,  
11 GASSE, F., BONNEFILLE, R. & DECOBERT, M. 1999. The Ziwai–Shala lake basin system, Main  
12 Ethiopian Rift: influence of volcanism, tectonics, and climatic forcing on basin formation and  
13 sedimentation. *Palaeogeography, Palaeoclimatology, Palaeoecology*, 150, 135-177.
- 14 LEGESSE, D. & AYENEW, T. 2006. Effect of improper water and land resource utilization on the  
15 central Main Ethiopian Rift lakes. *Quaternary international*, 148, 8-18.
- 16 MAHMOODI, N., KIESEL, J., WAGNER, P. D. & FOHRER, N. 2021a. Spatially distributed impacts of  
17 climate change and groundwater demand on the water resources in a wadi system.  
18 *Hydrology Earth System Sciences*, 25, 5065-5081.
- 19 MAHMOODI, N., WAGNER, P. D., KIESEL, J. & FOHRER, N. 2021b. Modeling the impact of climate  
20 change on streamflow and major hydrological components of an Iranian Wadi system.  
21 *Journal of Water Climate Change*, 12, 1598-1613.
- 22 MCGINN, A. J., WAGNER, P. D., HTIKE, H., KYU, K. K. & FOHRER, N. 2021. Twenty years of change:  
23 Land and water resources in the Chindwin catchment, Myanmar between 1999 and 2019.  
24 *Science of the Total Environment*, 798, 148766.
- 25 MERZ, R. & BLÖSCHL, G. 2004. Regionalisation of catchment model parameters. *Journal of*  
26 *hydrology*, 287, 95-123.
- 27 MESHESHA, D. T., TSUNEKAWA, A. & TSUBO, M. 2012. Continuing land degradation: cause–effect in  
28 Ethiopia's Central Rift Valley. *Land degradation development*, 23, 130-143.
- 29 MINALE, A. S. 2020. Water level fluctuations of Lake Tana and its implication on local communities  
30 livelihood, northwestern Ethiopia. *International Journal of River Basin Management*, 18,  
31 503-510.
- 32 MOELETSI, M. E., WALKER, S. & HAMANDAWANA, H. 2013. Comparison of the Hargreaves and  
33 Samani equation and the Thornthwaite equation for estimating dekadal evapotranspiration  
34 in the Free State Province, South Africa. *Physics Chemistry of the Earth, Parts A/B/C*, 66, 4-  
35 15.
- 36 O'BRIEN, G. C., DICKENS, C., HINES, E., WEPENER, V., STASSEN, R., QUAYLE, L., FOUCHY, K.,  
37 MACKENZIE, J., GRAHAM, P. M. & LANDIS, W. G. 2018. A regional-scale ecological risk  
38 framework for environmental flow evaluations. *Hydrology Earth System Sciences*, 22, 957-  
39 975.
- 40 OLSON, D. M. & DINERSTEIN, E. 2002. The Global 200: Priority ecoregions for global conservation.  
41 *Annals of the Missouri Botanical garden*, 199-224.
- 42 PAGLIERO, L., BOURAOUI, F., DIELS, J., WILLEMS, P. & MCINTYRE, N. 2019. Investigating  
43 regionalization techniques for large-scale hydrological modelling. *Journal of hydrology*, 570,  
44 220-235.
- 45 PATI, A., SEN, S. & PERUMAL, M. J. J. H. E. 2018. Modified channel-routing scheme for SWAT model.  
46 23, 04018019.
- 47 PFANNERSTILL, M., GUSE, B. & FOHRER, N. 2014. Smart low flow signature metrics for an improved  
48 overall performance evaluation of hydrological models. *Journal of Hydrology*, 510, 447-458.
- 49 POOL, S., VIS, M. & SEIBERT, J. 2021. Regionalization for ungauged catchments—lessons learned  
50 from a comparative large-sample study. *Water Resources Research*, 57, e2021WR030437.

- 1 RICHTER, B. D., BAUMGARTNER, J. V., BRAUN, D. P. & POWELL, J. 1998. A spatial assessment of  
2 hydrologic alteration within a river network. *Regulated Rivers: Research Management: An*  
3 *International Journal Devoted to River Research Management*, 14, 329-340.
- 4 RYAN, J. A. & ULRICH, J. M. 2011. xts: Extensible time series. *R package version 0.8-2*.
- 5 SCOON, R. N. 2018. The east African rift system. *Geology of National Parks of Central/Southern*  
6 *Kenya*
- 7 *Northern Tanzania*, 19-28.
- 8 SEIBERT, J. 1999. Regionalisation of parameters for a conceptual rainfall-runoff model. *Agricultural*  
9 *forest meteorology*
- 10 98, 279-293.
- 11 SHIEH, C.-L., GUH, Y.-R. & WANG, S.-Q. 2007. The application of range of variability approach to the  
12 assessment of a check dam on riverine habitat alteration. *Environmental Geology*, 52, 427-  
13 435.
- 14 SIVAPALAN, M., BLÖSCHL, G., ZHANG, L. & VERTESSY, R. 2003. Downward approach to hydrological  
15 prediction. Wiley Online Library.
- 16 SMAKHTIN, V. U. 2001. Low flow hydrology: a review. *Journal of hydrology*, 240, 147-186.
- 17 SOETAERT, K. & PETZOLDT, T. 2010. Inverse modelling, sensitivity and Monte Carlo analysis in R using  
18 package FME. *Journal of statistical software*, 33, 1-28.
- 19 SONG, X., ZHUANG, Y., WANG, X., LI, E., ZHANG, Y., LU, X., YANG, J. & LIU, X. 2020. Analysis of  
20 hydrologic regime changes caused by dams in China. *Journal of Hydrologic Engineering*, 25,  
21 05020003.
- 22 STAMPS, D. S., CALAIS, E., SARIA, E., HARTNADY, C., NOCQUET, J. M., EBINGER, C. J. & FERNANDES, R.  
23 M. 2008. A kinematic model for the East African Rift. *Geophysical Research Letters*, 35.
- 24 STREET, F. A. & GROVE, A. 1979. Global maps of lake-level fluctuations since 30,000 yr BP.  
25 *Quaternary research*, 12, 83-118.
- 26 TIGABU, T. B., WAGNER, P. D., HÖRMANN, G. & FOHRER, N. 2019. Modeling the impact of  
27 agricultural crops on the spatial and seasonal variability of water balance components in the  
28 Lake Tana basin, Ethiopia. *Hydrology Research*, 50, 1376-1396.
- 29 TIGABU, T. B., WAGNER, P. D., NARASIMHAN, B. & FOHRER, N. 2023. Pitfalls in hydrologic model  
30 calibration in a data scarce environment with a strong seasonality: experience from the  
31 Adyar catchment, India. *Environmental Earth Sciences*, 82, 367.
- 32 TSEGAW, A. T., ALFREDSSEN, K., SKAUGEN, T. & MUTHANNA, T. M. 2019. Predicting hourly flows at  
33 ungauged small rural catchments using a parsimonious hydrological model. *Journal of*  
34 *Hydrology*, 573, 855-871.
- 35 TUDORANCEA, C. & TAYLOR, W. D. 2002. *Ethiopian rift valley lakes*, Backhuys.
- 36 USGS 2023. 3D Elevation Program 1-Meter Resolution Digital Elevation Model (published 2014).
- 37 VIECELI, N., BORTOLIN, T. A., MENDES, L. A., BACARIM, G., CEMIN, G. & SCHNEIDER, V. E. 2015.  
38 Morphometric evaluation of watersheds in Caxias do Sul City, Brazil, using SRTM (DEM) data  
39 and GIS. *Environmental Earth Sciences*, 73, 5677-5685.
- 40 VIGLIONE, A., PARAJKA, J., ROGGER, M., SALINAS, J., LAAHA, G., SIVAPALAN, M. & BLÖSCHL, G. 2013.  
41 Comparative assessment of predictions in ungauged basins—Part 3: Runoff signatures in  
42 Austria. *Hydrology Earth System Sciences*, 17, 2263-2279.
- 43 VU, T. T., KIESEL, J., GUSE, B. & FOHRER, N. 2019. Analysis of the occurrence, robustness and  
44 characteristics of abrupt changes in streamflow time series under future climate change.  
45 *Climate Risk Management*, 26, 100198.
- 46 WAGAW, S., MENGISTOU, S. & GETAHUN, A. 2019. Review of anthropogenic threats and biodiversity  
47 assessment of an Ethiopian soda lake, Lake Abijata. *African Journal of Aquatic Science*, 44,  
48 103-111.
- 49 WAGENER, T. & MONTANARI, A. 2011. Convergence of approaches toward reducing uncertainty in  
50 predictions in ungauged basins. *Water Resources Research*, 47.



- 1 WAGNER, P. D., BIEGER, K., ARNOLD, J. G. & FOHRER, N. J. E. M. 2022. Representation of  
2 hydrological processes in a rural lowland catchment in Northern Germany using SWAT and  
3 SWAT+. *Hydrological Processes*, 36, e14589.
- 4 WAGNER, P. D., FIENER, P., WILKEN, F., KUMAR, S. & SCHNEIDER, K. 2012. Comparison and  
5 evaluation of spatial interpolation schemes for daily rainfall in data scarce regions. *Journal of*  
6 *Hydrology*, 464, 388-400.
- 7 WAGNER, P. D., KUMAR, S. & FOHRER, N. 2023. Integrated modeling of global change impacts on  
8 land and water resources. *Science of The Total Environment*, 892, 164673.
- 9 WHITE, G. F., BRADLEY, D. J. & WHITE, A. U. 2002. Drawers of water: domestic water use in East  
10 Africa. *Bulletin of the World Health Organization*, 80, 63-73.
- 11 WI, S., YANG, Y., STEINSCHNEIDER, S., KHALIL, A. & BROWN, C. 2014. Calibration approaches for  
12 distributed hydrologic models using high performance computing: implication for  
13 streamflow projections under climate change. *Hydrol. Earth Syst. Sci. Discuss*, 11, 10273-  
14 10317.
- 15 ZAMBRANO-BIGIARINI, M. 2018. hydroGOF: Goodness-of-Fit Functions for Comparison of Simulated  
16 and Observed Hydrological Time Series, 2017. URL [https://CRAN.R-project.org/package=](https://CRAN.R-project.org/package=hydroGOF)  
17 [hydroGOF](https://CRAN.R-project.org/package=hydroGOF). R package version 0.3-10.
- 18 ZEILEIS, A. & GROTHENDIECK, G. 2005. zoo: S3 infrastructure for regular and irregular time series.  
19 *arXiv preprint math/0505527*.
- 20 ZHANG, H., WANG, B., LAN, T., SHI, J. & LU, S. 2016. Change-point detection and variation  
21 assessment of the hydrologic regime of the Wenyu River. *Toxicological Environmental*  
22 *Chemistry*, 98, 358-375.
- 23 ZINABU, G.-M. & ELIAS, D. 1989. Water resources and fisheries management in the Ethiopian rift  
24 valley lakes. *Sinet*, 12, 95-109.
- 25 ZINABU, G., KEBEDE-WESTHEAD, E. & DESTA, Z. 2002. Long-term changes in chemical features of  
26 waters of seven Ethiopian rift-valley lakes. *Hydrobiologia*, 477, 81-91.
- 27