Skill of seasonal flow forecasts at catchment scale: an assessment across South Korea

Yongshin Lee¹, Francesca Pianosi¹, Andres Peñuela², Miguel Angel Rico-Ramirez¹

¹ School of Civil, Aerospace and Design Engineering, University of Bristol, Bristol, BS8 1TR, UK

² Department of Agronomy, Unidad de Excelencia María de Maeztu, University of Cordoba, Cordoba, 14071, Spain

Correspondence: Yongshin Lee (yongshin.lee@bristol.ac.uk)

Abstract.

1

2

4

5

7

8

9

10

11

12

13

14

15

16

17

19

32

33

35

36

37

38

39

40

41

42

43

45

46

47

48

49 50

51

Recent advancements in numerical weather predictions have improved forecasting performance at longer lead times, Seasonal weather forecasts, providing predictions of weather variables for the next several months, have gained significant attention from researchers due to their potential benefits for water resources management. Many efforts have been made to generate Seasonal Flow Forecasts (SFFs) by combining seasonal weather forecasts and hydrological models. However, producing SFFs with good skill at a finer catchment scale remains challenging, hindering their practical application and adoption by water managers. Consequently, water management decisions, both in South Korea and numerous other countries, continue to rely on worst-case scenarios and the conventional Ensemble Streamflow Prediction (ESP) method. This study investigates the potential of SFFs in South Korea at the catchment scale examining, 12 reservoir catchments of varying sizes (ranging from 59 to 6648 km2) over the last decade (2011-2020). Seasonal weather forecasts data (including precipitation, temperature and evapotranspiration) from the European Centre for Medium-Range Weather Forecasts (ECMWF system5) is used to drive the Tank model (conceptual hydrological model) for generating the flow ensemble forecasts. We assess the contribution of each weather variable to the performance of flow forecasting by isolating individual variables. In addition, we quantitatively evaluate the overall skill of SFFs, representing the probability of outperforming the benchmark (ESP), using the Continuous Ranked Probability Skill Score (CRPSS). Our results highlight that precipitation is the most important variable in determining the performance of SFFs, and temperature also plays a key role during the dry season in snowaffected catchments. Given the coarse resolution of seasonal weather forecasts, a linear scaling method to adjust the forecasts is applied, and it is found that bias correction is highly effective in enhancing the overall skill,

Keywords: Seasonal weather forecasts, Seasonal flow forecasts, Skill assessment, Ensemble Streamflow Forecast, CRPSS, Linear scaling

Furthermore, bias corrected SFFs have skill with respect to ESP up to 3 months ahead, this being particularly evident during abnormally dry years. To facilitate future applications in other regions, the code developed for

this analysis has been made available as an open-source Python package.

1. Introduction

Over the last decade, numerical weather prediction systems have improved their forecasting performance at longer lead times, ranging from 1 to several months ahead (Alley et al., 2019; Bauer et al., 2015). The water management sector may benefit considerably from these advances. In particular, predictions of weather variables such as precipitation and temperature several months ahead ('seasonal weather forecasts' from now on) might be exploited to anticipate upcoming dry periods and implement management strategies for mitigating future water supply deficits (Soares and Dessai, 2016).

To increase relevance for water resource management, seasonal weather forecasts can be translated into Seasonal Flow Forecasts (SFFs) via a hydrological model. SFFs can be provided and evaluated at different temporal and spatial resolutions: a coarser resolution, e.g., magnitude of total next-month runoff over a certain region (Arnal et al., 2018; Prudhomme et al., 2017) or a finer resolution, e.g., daily/weekly flow at a particular river section over the next month (Crochemore et al., 2016; Lucatero et al., 2018). This distinction is important here because coarser resolution SFFs can only be applied to inform water management in a qualitative way, whereas finer resolution SFFs can also be used to force a water resource system model for a quantitative appraisal of different management strategies. Proof-of-principle examples of the latter approach are provided by Boucher et al. (2012), Chiew et al. (2003), and Peñuela et al. (2020). These papers have demonstrated, through model simulations, the potential of using SFFs to improve the operation of supply reservoirs (Peñuela et al., 2020), irrigation systems (Chiew et al., 2003) and hydropower systems (Boucher et al., 2012).

Deleted: both Deleted: diverse Deleted: generating Deleted: scales such as Deleted: in practice Deleted: not only Deleted: but also in many Deleted: Deleted: examines Deleted: a Deleted: Deleted: The analysis was conducted Deleted: across Deleted: operational Deleted: various Deleted: a Formatted: Font: (Default) Times New Roman, (Asian) Times New Roman Deleted: ECMWF (Deleted: s. Deleted: is Deleted: a Deleted: to Deleted: generate **Deleted:** The actual skill of the forecasts is quantitatively evaluated using the Continuous Ranked Probability Skill Score (CRPSS), and it is probabilistically compared with ESP, which is the most popular forecasting system. Deleted: while Deleted: of SFFs Deleted: and it was Deleted: to Deleted: freely **Deleted:** available Python packages for analysing seasonal weather and flow forecasts have been made accessible.

Deleted: their

Deleted: link

Deleted: using

Deleted: for several months

Deleted: seasonal weather forecasts with

Deleted: As a result, s

Deleted:

Deleted: stream

Deleted: The Deleted: used Obviously, generating SFFs with good skill at finer scales is challenging and the lack of forecasting performance is often cited as a key barrier to real-world application of SFFs by water managers (Jackson-Blake et al., 2022; Soares and Dessai, 2016; Whateley et al., 2015). In practice, if a Water Resource System (WRS) model is used to simulate and compare different operational decisions, this is done by forcing the WRS model against a repeat of a historical low flow event ("worst-case" scenario) (Yoe, 2019) or against the Ensemble Streamflow Prediction (ESP). ESP is a widely used operational forecasting method whereby an ensemble of flow forecasts is generated by forcing a hydrological model with historical meteorological observations (Baker et al., 2021; Day, 1985). Since the hydrological model is initialised at current hydrological conditions, ESP is expected to have a certain level of performance, particularly in 'long-memory' systems where the impact of initial conditions last over long time periods (Li et al., 2009). Previous simulation studies that examined the use of SFFs to enhance the operation of water resources systems (e.g., Peñuela et al., 2020, as cited above) did indeed show that ESP serves as a 'hard-to-beat' benchmark. Similar to other countries, in South Korea, the worst-case scenario and ESP are used for informing water management activities, whereas SFFs are not currently applied. Before the use of SFFs can be proposed to practitioners, it is thus crucial to understand the skill of such products with respect to ESP.

Numerous studies were conducted on the skill of SFFs in different regions of the world. Some of these studies focused on the 'theoretical skill', which is determined by comparing SFFs with pseudo-observations produced by the same hydrological model when forced with observed temperature and precipitation. This experimental set-up enables to isolate the contribution of the weather forecast skill to the flow forecast skill, regardless of structural errors that may be present in the hydrological model. In general, most studies have found that the theoretical skill of SFFs may be only marginally better than that of ESP in specific region and lead time. For example, Yoseff et al. (2013) analysed multiple large river basins worldwide and found that SFFs generally perform worse than ESP. Likewise, the findings of Greuell et al. (2019) indicated that SFFs are more skillful than ESP for the first lead month only. Across Europe, the theoretical skill of SFFs was found to be higher than ESP in coastal and mountainous regions (Greuell et al., 2018).

Although important to how the information content of seasonal weather forecasts vary across regions with different climatic characteristics, from a water management perspective, the theoretical skill may not be the most appropriate metric, as it reflects the performance within the modelled environment (Pechlivanidis et al., 2020) rather than the real-world. The 'actual skill', which is determined by comparing SFFs to flow observations, would be more informative for water managers to decide on whether to use SFFs and when. Previous studies that investigated the actual skill showed that, as expected, the actual skill is lower than the theoretical skill due to errors in the hydrological model and in the weather input observations (Greuell et al., 2018; van Dijik et al., 2013). In addition, due to the coarse horizontal resolution of seasonal weather forecasts (around 1°×1°), the forecast skill can be significantly improved through bias correction, particularly of precipitation forecasts (e.g., Crochemore et al., 2016; Lucatero et al., 2018; Tian et al., 2018). However, even after bias correction, SFFs were found unable to surpass ESP in many previous applications (e.g., Crochemore et al., 2016; Greuell et al., 2019; Lucatero et al., 2018).

Previous studies reviewed above have mainly used the seasonal weather forecasts provided by the European Centre for Medium-Range Weather Forecasts (ECMWF). Here, it is important to note that the majority of these studies have utilized ECMWF's system 3 (e.g., Yossef et al., 2013) or 4 (e.g., Crochemore et al., 2016; Greuell et al., 2019; Lucatero et al., 2018; Tian et al., 2018). A few studies comparing the performance of SFFs and ESP have been conducted based on ECMWF's cutting-edge forecasting system 5, which became operational in November 2017. These include Peñuela et al., 2020 and Ratri et al., 2023, which however did not analyse, the skill of \$FFs in much detail but rather focused on their operational implementation. Given that the upgrade of forecasting system can lead to substantial enhancement in the performance (e.g., Johnson et al., 2019; Köhn-Reich and Bürger, 2019), it is interesting to assess whether improved skill of weather forecasts delivered by the System 5 translates into improved skill of flow forecasts.

Our previous research (Lee at al., 2023) on the skill of seasonal precipitation forecasts across South Korea showed that, among various forecasting centres, ECMWF provides the most skilful seasonal precipitation forecasts, outperforming the climatology (based on historical precipitation observations). This is particularly evident during the wet season (June to September) and in dry years, where skill can also be high at longer lead times beyond the first month. Given the significant correlation between precipitation and flow in the country (Ministry of land, infrastructure, and transportation, 2016), South Korea is an interesting test bed to investigate if the skill of seasonal precipitation forecasts is mirrored into the skill of flow forecasts at the catchment scale.

Specifically, in this study we focus on 12 catchments of various size (from 59 to 6648 km²) which include the most important multipurpose reservoirs across South Korea, and where the use of SFFs may be considered for assisting operational decisions and mitigating impacts of droughts. Given this practical long-term goal, our study focuses on assessing the 'overall skill', which represents the probability that SFFs outperform the benchmark

Deleted: use

Deleted: resources

Deleted: seasonal flow forecasts

Deleted: skill

Deleted: are

Deleted: used

Deleted: used

Deleted: research

Deleted: has been

Deleted: studied

Deleted: the theoretical skill of

Deleted: regions with long hydrological memory, and notably lower in cold and semi-arid areas (Pechlivanidis et al., 2020) as well as ...

Deleted: stream

Deleted: Only a

Deleted: version

Deleted: d

Deleted: the

Deleted: overall

Deleted: (SPFs)

Deleted: stream

(ESP) when comparing the flow forecasts with historical flow observations. As a hydrological model, we use the lumped Tank model (Sugawara et al., 1986) which is the rainfall-runoff model currently in use for the national water management and planning. For all catchments, we briefly analyse the hydrological model performance, also investigate which weather forcing input (precipitation, temperature, and potential evapotranspiration) contributes most to the performance of SFFs across different catchments, before and after bias correction. Finally, we look at how the overall skill varies across seasons, years, and catchment, to draw conclusions on when and where SFFs may be more informative than ESP for practical water resources management. In doing so, we develop a workflow for SFFs analysis, implemented in a Python Jupyter Notebook, which can be utilized by other researchers for evaluating and testing SFFs in various regions.

2. Material and methodology

2.1 Study site and data

187 **2.1.1** Study site

176

178 179

180

181

182

183

185

186

188

189

190

191

192

The spatial scope of this study is defined as 12 multi-purpose reservoir catchments across South Korea. While there are 20 multi-purpose reservoirs nationwide (K-water, 2022), we have specifically selected 12 reservoirs with at least 10 years of flow observation and no external flows from other rivers or reservoirs. The location of the catchments and the mean annual precipitation, temperature, and potential evapotranspiration (PET) are shown in Figure 1(a-c). The weather data for the selected reservoir catchments is reported in Table 1.

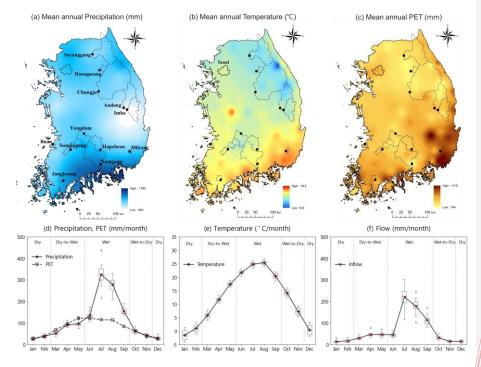


Figure 1: Top row: mean annual (a) precipitation, (b) temperature and (c) PET across South Korea over the period 1967-2020, Black lines are the boundaries of the 12 reservoir catchments analysed in this study (all maps obtained by interpolating point measurements using the inverse distance weighting method). Bottom row: (d) cumulative monthly precipitation and PET, (e) mean monthly temperature and (f) cumulative monthly flow. These three variables are averaged over the 12 reservoir catchments from 2001 to 2020. Box plots show the inter-catchment variability.

Table 1. Characteristics of the 12 multipurpose reservoirs (from North to South) and the catchments they drain (K-water, 2022). Tmin and Tmax represent mean monthly minimum and maximum temperature averaged over 2001-2020.

Deleted: our study focuses on assessing the actual skill and comparing it with ESP, which is a simpler to implement (and already in use) forecasting system.

Deleted: actual

Deleted: ,

Deleted: ,

Deleted: Deleted: peaders to

Deleted: evaluate

Deleted: in

Deleted: other

Formatted: English (United Kingdom)

Deleted: Mean annual (1967-2020) (a) precipitation (mm/year), (b) temperature (°C/year) and (c) PET (mm/year) across South Korea; the boundaries of the 12 reservoir catchments are shown in the figures. Mean monthly (d) precipitation and PET, (e) temperature and (f) flow averaged over the 12 reservoir catchments from 2001 to 2020. The grey area represents the variability of each weather variable. Note that the figures a to c were produced by interpolating the point measurements using the inverse distance weighting method for displaying purposes.

Deleted: Mean annual (2001-2020) properties of

Deleted: Here,

Deleted: .

193

195

196 197

198

Catchment		Soyanggang Hoengseong		Chungju	Andong	Imha	Yongdam	Buan	Sumjingang	Hapcheon	Milyang	Namgang	Jangheung
Area (km²)		2703	209	6648	1584	1361	930	59	763	925	95	2285	193
Mean annual	P (mm)	1220	1336	1197	1079	956	1317	1292	1343	1279	1375	1477	1439
	T (°C)	10.8	10.9	11.1	11.1	12.2	11.8	13.5	12.6	12.8	14.2	13.5	13.8
	T min	-4.2 (Jan.)	-4.0 (Jan.)	-3.2 (Jan.)	-3.5 (Jan.)	-1.6 (Jan.)	-2.3 (Jan.)	-0.1 (Jan.)	-1.5 (Jan.)	-0.8 (Jan.)	1.0 (Jan.)	0.4 (Jan.)	1.3 (Jan.)
	T max	24.0 (Aug.)	24.1 (Aug.)	25.9 (Aug.)	23.8 (Aug.)	25.1 (Aug.)	24.8 (Aug.)	26.7 (Aug.)	25.8 (Aug.)	25.5 (Aug.)	26.8 (Aug.)	26.0 (Aug.)	26.2 (Aug.)
	PET (mm)	874	870	881	896	947	884	960	919	933	993	952	896

Figure 1(d-f) shows the monthly changes in precipitation and PET (d), temperature (e) and flow (e) averaged over the 12 selected catchments from 2001 to 2020. Generally, the catchments located in the Southern region exhibit higher mean annual precipitation, temperature, and PET. In order to examine how the skill of seasonal weather and flow forecasts varies across a year, we divide a year into four seasons based on monthly precipitation (Lee et al., 2023): dry (December to February), dry-to-wet transition (March to May), wet (June to September), wet-to-dry transition (October to November). As shown in this figure, most of the total annual precipitation (and the corresponding flow) occurs during the hot and humid wet season, while the dry season is characterized by cold and dry conditions. The high inter-annual variability of precipitation and flow is a feature of South Korea's climate and is attributed to the impacts of typhoons and monsoons (Lee et al., 2023). Figure 1(d-f) also shows high inter-catchment variability during the wet season in both precipitation (d) and flow (f), whereas the inter-catchment variability in temperature (e) is more obvious during the dry season.

2.1.2 Hydrologic data and seasonal weather forecasts

Precipitation, temperature, and potential evapotranspiration are the key variables required to simulate flows using a hydrological model. To this end, daily precipitation data from 1318 in-situ stations produced by the Ministry of Environment, the Korea Meteorologic Administration (KMA), and the national water resources agency (K-water) (Ministry of Environment, 2021), and daily temperature data from 683 in-situ stations generated by KMA were obtained. Both precipitation and temperature data cover the period from 1967 to 2020 (see Figure 1). Potential evapotranspiration (PET) data was computed using the standardized Penman-Monteith method suggested by UN Food and Agriculture Organization. The precipitation and temperature measurements have been quality-controlled by the Ministry of Environment. We used the Thiessen polygon method to calculate the catchment average precipitation and temperature.

The flow data used in this study refers to the flow into the reservoir from their upstream catchment (see Tablel and Figure 1). K-water generates daily flow data through a water balance equation, which takes into account the daily changes in reservoir volume (from storage-elevation curve) caused by the water level fluctuations and water supplies. However, to date, reservoir evaporation has not been considered in the flow estimation process. In this study, quality-controlled daily flow data for each reservoir produced by K-water is used.

Several weather forecasting centres, including ECMWF, the UK Met Office and the German Weather Service provide seasonal weather forecasts datasets through the Copernicus Climate Data Store (CCDS). According to our previous study (Lee et al., 2023), ECMWF was found to be the most skilful provider of seasonal precipitation forecasts for South Korea. Since the precipitation is one of the most important weather foreings in hydrological forecasting (Kolachian and Saghafian, 2019), we have utilized the seasonal weather forecasts datasets from ECMWF System 5 (Johnson et al., 2019) in this study. Since 1993, ECMWF has been providing 51 ensemble forecasts (a set of multiple forecasts equally likely) on a monthly basis (25 ensembles prior to 2017) with an orizontal resolution of 1° × 1° and daily temporal resolution up to 7 months ahead. In this study, the time period from 1993 to 2020 was selected and the ensemble forecasts for the selected catchments have been downloaded from the CCDS. Here, we utilized data from 1993 to 2010 to generate bias correction factors, and data from 2011 to 2020 to assess the skill (see Figure S1 in the supplementary material).

2.2 Methodology

The methodology of our analysis is summarized in the schematic diagram shown in Figure 2. Firstly, we compiled seasonal weather forecasts ensemble from ECMWF for precipitation (P), temperature (T), and PET over the 12 reservoirs for 10 years from 2011 to 2020. To downscale the datasets, a linear scaling method was applied to each weather forcing (Sec. 2.2.1). Secondly, we estimated the parameters of the hydrological model and validated its

Deleted: flow (e), and

Deleted: Transition

Deleted: Transition

Deleted: Precipitation and flow show high inter-annual variability during the wet season due to the impacts of Typhoons and Monsoon. On the other hand, PET and temperature exhibit marginal inter-annual variability.

Deleted: KMA

Deleted: Specifically, t

Deleted: Streamflow data was generated via field measurement and a rating curve. flow data is

Deleted: calculated using

Deleted: mass

Deleted: the

Deleted: ng the flow of reservoirs

Deleted: in South Korea

Deleted: European Centre for Medium-Range Weather Forecasts (

Deleted:)

Deleted: (DWD)

Deleted: (


Deleted: The

Deleted:

Deleted: potential evapotranspiration (

Deleted:)

performance (Sec. 2.2.2). Utilizing the seasonal weather forecasts dataset as input data to the hydrological model, we generated an ensemble of SFFs, and using historical weather observations as input, we produced ESP. Specifically, to calculate ESP, 45 ensemble members of each weather variable were also selected from historical observations (1966-2010, see Figure S1). Each ensemble member represents the simulated flow using a hydrological model initialized with observed meteorological data to simulate current conditions and forced by historical meteorological observations for the forecasting period. The Continuous Ranked Probability Score (CRPS) and the Continuous Ranked Probability Skill Score (CRPSS) were applied (Sec. 2.2.3) to calculate the absolute performance (score) of each forecast product (Sec. 3.1 and 3.2) and the relative performance (overall skill) of SFFs with respect to ESP (Sec. 3.3, 3.4).

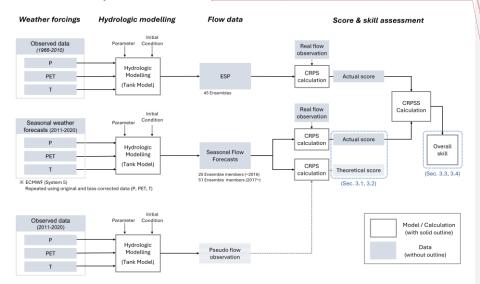

 ${\bf Figure~2:~Schematic~diagram~illustrating~analysis~method~of~the~study.}$

Specifically, in Section 3.1, we analysed the contribution of hydrological modelling uncertainty to the performance of SFFs by comparing the actual score to the theoretical score, which is calculated using pseudo flow observations. Here, pseudo-observation refers to the flow time-series obtained by feeding the hydrological model with weather observations, i.e. where errors due to hydrological model structure are removed. In Section 3.2 we investigated which weather variable mostly influence the performance of SFFs. For doing so, we first calculated the 'isolated score' of the flow forecasts generated by forcing the hydrological model with seasonal weather forecasts for one meteorological variable while using observational data for the other two variables. For instance, to assess the contribution of precipitation, we calculated the isolated score-P using seasonal precipitation forecasts, and observations for temperature and PET. Then, we computed the 'integrated score' using seasonal weather forecasts for all three variables and determined the 'relative scores' for each variable as the ratio of the isolated score over the integrated score. This workflow is illustrated in Figure S2 (supplementary material). In Sections 3.3 to 3.5, we examined the regional and seasonal variations and the characteristics of overall skill under extreme climate conditions.

2.2.1 Bias correction (Statistical downscaling)

The seasonal weather forecasts datasets from CCDS have a spatial resolution of $1^{\circ}\times 1^{\circ}$, which is too coarse for the catchment-scale analysis. Previous studies also have reported that seasonal weather forecasts generated from General Circulation Models contain systematic biases and this can cause forecast uncertainty (Manzanas et al., 2017; Maraun, 2016; Tian et al., 2018). Moreover, the usefulness of bias correction in enhancing the forecast skill has been shown in many previous studies (Crochemore et al., 2016; Ferreira et al., 2022, Pechlivanidis et al., 2020; Tian et al., 2018). Hence, it is imperative to investigate the potential enhancement in the skill of hydrological forecasts resulting from the bias correction of weather forcings.

Deleted: Additionally, t

Deleted: the Ensemble Streamflow Prediction (

Deleted:)

Deleted: generated

Deleted: using

Deleted: of ESP represents

Deleted: Secondly, we estimated the parameters of the hydrological model and validated its performance (Sec. 2.2.2). Utilizing the Seasonal weather forecasts datasets as input data to the hydrological model, we generated an ensemble of seasonal flow predictions (SFFs), and using historical weather observations as input to the hydrological model we produced the ESP.

Deleted: method was

Deleted: Skill

Deleted: actual skill (compared with observed flow data) and theoretical skill (compared with pseudo-observation flow data) (van Dijk et al., 2013)

Deleted: Here, pseudo-observation refers to the flow time-series computed based on the calibrated hydrological model and in-situ weather observations.

Formatted: Space Before: 12 pt, After: 0 pt

Deleted:

Numerous bias correction methods have been developed including linear scaling method, local intensity scaling and quantile mapping (Fang et al., 2015; Shrestha et al., 2017). Thanks to its simplicity and low computation cost (Melesse et al., 2019), the linear scaling method is widely adopted. Despite its simplicity, this method has demonstrated practical usefulness in various studies (Azman et al., 2022; Crochemore et al., 2016; Shrestha et al., 2017)including our previous study on seasonal precipitation forecasts across South Korea (Lee et al., 2023). Therefore, the linear scaling method was utilized in this study.

Previous studies found that additive correction is preferable for temperature whereas multiplicative correction is preferable for variables such as precipitation, evapotranspiration, and solar radiation (Shrestha et al., 2016). Consequently, the equations for linear scaling method for each variable can be expressed as:

[... (n ...)]

356
$$P_{forecasted}^* = P_{forecasted} \cdot (b_P)_m = P_{forecasted} \cdot \left[\frac{\mu_m(P_{observed})}{\mu_m(P_{forecasted})} \right]$$
 (1)

357
$$PET_{forecasted}^* = PET_{forecasted} \cdot (b_{PET})_m = PET_{forecasted} \cdot \left[\frac{\mu_m(pET_{observed})}{\mu_m(pET_{forecasted})} \right]$$
 (2)

358
$$T_{forecasted}^* = T_{forecasted} + (b_T)_m = T_{forecasted} + \left[\mu_m(T_{observed}) - \mu_m(T_{forecasted})\right]$$
 (3)

where $X_{forecasted}^*$ is the bias corrected forecast variable (X) at daily time scale, $Y_{forecasted}$ is the original forecast variable (Y) before bias correction, $(b_Y)_m$ is the bias correction factors for each variable at month m. μ_m represents monthly mean, and $Y_{observed}$ is the observed daily data for the variable (Y). In this study, daily precipitation forecasts were bias corrected using the monthly bias correction factor (b_m) for each month (m = 1 to 12). The bias correction factor was computed using the observations and original forecasts datasets from 1993 to 2010, and these were then applied to adjust each seasonal weather forecasts for later years (2011 to 2020).

2.2.2 Hydrologic modelling

The Tank model was first developed by Sugawara of Japan in 1961 (Sugawara et al., 1986; Sugawara, 1995) and has become a widely used conceptual hydrologic model in many countries (Goodarzi et al., 2020; Ou et al. 2017). A modified version of the Tank model, incorporating soil moisture structure and snowmelt modules, is commonly used in South Korea for long-term water resources planning and management purposes due to its higher performance (Kang et al., 2004; Lee et al., 2020). As shown in Figure 3, the modified Tank model used in this study comprises four storage tanks representing the runoff and baseflow in the target catchment (Phuong et al., 2018; Shin et al., 2010) and incorporates a water-balance module suggested by the United States Geological Survey (McCabe and Markstrom, 2007).

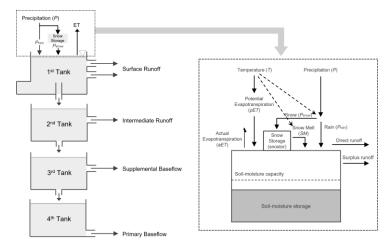


Figure 3: The structure of modified Tank model (Left) and its water -balance module (Right)

Deleted: a

Deleted: used

Deleted:

379 380 This model has 21 parameters (see Table S1 in the supplementary material), which were calibrated based on historical observations. We calibrated the model using observations for the period from 2001 to 2010, and the 381 validation was done using the time period 2011 to 2020. To estimate the model parameters, the Shuffled Complex 382 Evolution global optimization algorithm (SCE-UA), developed at the University of Arizona (Duan et al., 1992, 383 1994), is utilized. This algorithm has widely been used for the calibration of hydrologic models and has shown 384 more robust and efficient performance compared to many traditional optimization methods such as Genetic 385 Algorithm, Differential Evolution, and Simulated Annealing (Rahnamay-Naeini et al., 2019; Yapo et al., 1996). 386 The following Objective Function (OF) proposed by Sugawara (Sugawara et al., 1986), is applied for the SCE-387 UA algorithm, because a previous study demonstrated that this objective function shows superior results in

OA algorithm, because a previous study demonstrated that this objective function shows superior results in calibrating the Tank model in South Korean catchments with calibration periods longer than 5 years (Kang et al., 2004).

390 $OF = \sum_{t=1}^{N} |q_t^{obs} - q_t^{sim}| / q_t^{obs}$ (4)

391 where t, N represent time (in days) and total number of time steps, q_t^{obs} and q_t^{sim} represent the observed and 392 simulated flow at time t, respectively. The optimal parameter set is the one that produces the lowest value from

393 the objective function.

In order to evaluate the model performance in diverse perspectives, we used three different evaluation indicators:
Nash-Sutcliffe model Efficiency coefficient (*NSE*), Percentage Bias (*PBIAS*), and Ratio of Volume (*ROV*). The
calculation of each indicator was carried out as described by the following equations.

397
$$NSE = 1 - \sum_{t=1}^{N} (q_t^{obs} - q_t^{sim})^2 / \sum_{t=1}^{N} (q_t^{obs} - q_{mean}^{obs})^2$$
 (5)

398
$$PBIAS = \sum_{t=1}^{N} (q_t^{obs} - q_t^{sim})^2 / \sum_{t=1}^{N} q_t^{obs} \times 100$$
 (6)

399
$$ROV = \sum_{t=1}^{N} q_t^{sim} / \sum_{t=1}^{N} q_t^{obs}$$
 (7)

400 where t, N, q_t^{obs} and q_t^{sim} are as defined in Eq.4, and q_{mean}^{obs} represents observed mean flow across the total number of time steps (N).

The NSE can range from negative infinity to 1. A value of 1 indicates a perfect correspondence between the simulated and the observed flow. NSE values between zero and 1 are generally considered acceptable levels of performance (Moriasi et al., 2007). PBIAS is a metric used to measure the average deviation of the simulated values from the observation data. The optimal value of PBIAS is 0, and low-magnitude values indicate accurate simulation. Positive (negative) values of PBIAS indicate a tendency for overestimation (underestimation) in the hydrologic modelling (Gupta et al., 1999). ROV represents the ratio of total volume between the simulated and observed flow. An optimal ROV value is 1, and a value greater (less) than 1 suggests overestimation (underestimation) of total flow volume (Kang et al., 2004).

2.2.3 Score and skill assessment

As a score metric, we adopted the CRPS developed by Matheson and Winkler (1976) which measures the difference between the cumulative distribution function of the forecast ensemble and the observations. The CRPS has the advantage of being sensitive to the entire range of the forecast and being clearly interpretable, as it is equal to the Mean Absolute Error for a deterministic forecast (Hersbach, 2000). For these reasons, it is a widely used metric to assess the performance of ensemble forecasts (Leutbecher and Haiden, 2020). The CRPS can be calculated as:

417 CRPS =
$$\int [F(x) - H(x \ge y)]^2 dx$$
 (8)

where F(x) represents the cumulative distribution of SFFs ensemble, x and y are respectively the forecasted and observed flow, H is called the indicator function and is equal to 1 when $x \ge y$ and 0 when x < y. If SFFs were perfect, i.e., all the ensemble members exactly matched the observations, the CRPS would be equal to 0. Conversely, a higher CRPS indicates a lower the performance, as it implies that the forecast distribution is further from the observation. Note that the CRPS measures the absolute performance (score) of forecast without comparing it to a benchmark.

Deleted: the
Deleted: Supplementary
Deleted: parameters

Deleted: to estimate the parameters using **Deleted:** higher performance

Deleted: 6
Deleted: sim
Deleted: simulated

Deleted: simulation

Deleted: Skill Deleted: In this study. Deleted: Continuous Ranked Probability Score (Deleted:) Deleted: parameter of interest (the Deleted: ensemble) Deleted: Moreover Deleted: skill Deleted: Deleted: the Deleted: the Deleted: . the Deleted: skill Deleted: of the SPFs Deleted: Deleted:

402

403

404

405

406

407

408

409

410

411

412

413 414 415

416

418

419

420

421

Along with the CRPS, we also employed the CRPSs, which presents the forecast performance in a relative manner by comparing it to a benchmark forecasting method. It is defined as the ratio of the forecast and benchmark score

449 450

451 and is expressed as follows:

452

453

454

455

456

457

458 459

460

461

462 463

464 465

466

467

468

469

470

471

$$CRPSS = 1 - \frac{CRPS^{Sys}}{CRPS^{Ben}}$$
 (9)

where CRPS^{5ys} is the CRPS of the forecasting system (SFFs in our case) and CRPS^{Ben} is the CRPS of the benchmark. The values of CRPSS can range from -∞ to 1. A CRPSS value between 0 to 1 indicates that the forecasting system has skill with respect to the benchmark. Conversely, when the CRPSS is negative, i.e., from -∞ to 0, the system gives lower performances than the benchmark. Here, we utilized ESP as a benchmark due to its extensive application in flow forecasting (Pappenberger et al., 2015; Peñuela et al., 2020) and its computational efficiency (Baker et al., 2021; Harrigan et al., 2018). ESP is generated using the Tank model fed with historical daily meteorological records from 1966 to 2010. As this period covers 45 years, ESP is composed of 45 members for each catchment.

Since the CRPSS ranges from $-\infty$ to 1, simply averaging the CRPSS values over a period can result in low or no skills due to the presence few extremely negative values. To address this issue, here we employed the 'overall skill' metric introduced by Lee et al. (2023), The overall skill represents the probability with which a forecasting system (in our case, the SFFs) outperforms the benchmark (i.e., has CRPSS greater than 0) over a specific period. It is calculated as:

Overall skill (%) =
$$\frac{\sum_{y=1}^{N_y} [H(CRPSS)(y)]}{N_y} \times 100 (\%)$$
 (10)

where N_v is the total number of years, the indicator function H is equal to 1 when CRPSS (y) > 0 (SFFs have skill with respect to ESP in year y) and 0 when CRPSS (y) \leq 0 (ESP outperforms SFFs). If the overall skill is greater than 50%, we can conclude that SFFs generally have skill over ESP across the period.

3. Results

3.1 Contribution of hydrological model to the performance of SFFs

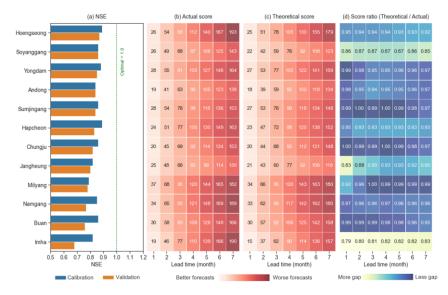


Figure 4. (a) Nash-Sutcliffe Efficiency (NSE) of the hydrological models for the 12 catchments analysed in this study; (b) actual score and (c) theoretical score of SFFs, (d) score ratio (theoretical / actual) in terms of mean CRPS at different

Deleted: The assessment of the absolute skill of ensemble climate forecasts is essential for understanding the model performance. In this study, we used the Continuous Ranked Probability Score (CRPS) as a tool to evaluate the skill of SFFs. However, interpreting the CRPS alone can be challenging in terms of determining the quality of the skill. To address this issue, w

Deleted: Continuous Ranked Probability Skill Score (

Deleted:)

Deleted: skill

Deleted: In assessing the skill, benchmarks are important to understand the performance of a forecasting system (Pappenberger et al., 2015). The Major reasons that we use ESP as a benchmark are because it is a widely used method in flow forecasting (Pappenberger et al., 2015; Peñuela et al., 2020) and also computationally inexpensive (Baker et al., 2021; Harrigan et al., 2018). Here, we

Deleted: ed

Deleted: the SPFs

Deleted:

Deleted: When

Deleted: the

Deleted: is positive, i.e., from

Deleted:

Deleted: is more skilful than

Deleted: When CRPSS is equal to zero, the forecasting system

Deleted: has a

Deleted: negative values

Deleted: and be greatly influenced by

Deleted: of some

Deleted: abnormally high or low events

Deleted: Since the CRPSS has a range from -∞ to 1, simply

Deleted: . in

Deleted: this study, we have adopted the concept of 'overall skilf'

Deleted: are more

Deleted: skilful than

Deleted: beats

Deleted: (lesser)

Deleted: the SPFs

Deleted: are

Deleted: more (less)

Deleted: fu

Deleted: than

Deleted: benchm

Deleted: ark

Deleted: (years)

Deleted: performance

Deleted: skill and

Deleted: skill

Deleted:

Deleted: the Deleted: skill

Deleted: skill

472

lead times (x-axis) (the scores are calculated before the bias correction of weather forcings). The actual score is determined by comparing SFFs to flow observations. The theoretical score is determined by comparing SFFs to pseudo-observations produced by the same hydrological model forced with observed precipitation, temperature and PET.

Figure 4(a) shows the NSE of the modified Tank model for each catchment during the calibration period 2001 -2010 (blue bars) and the validation period 2011-2020 (orange bars). As seen in this figure, the NSE values for the 12 catchments are generally high (within the range of 0.7 to 0.9) during both the calibration and validation periods, and the relative difference in performance between the two periods is small for all catchments, Specifically, the NSE results indicate a 'good' performance through comparative analysis (Chiew and Mcmahon, 1993; Moriasi et al., 2015). However, the last three catchments (Namgang, Buan and Imha) exhibit a relatively greater gap between calibration and validation periods. Among all 12 catchments, these three exhibit the most distinctive hydrological characteristics: Imha is the driest, while Namgang is the wettest catchment, and Buan is located along the coast, with the smallest catchment area. A detailed model performance evaluation, including other metrics such as PBIAS and ROV (refer to Figure \$3 in the supplementary material), also supports this result. Overall, Figure 4 demonstrates that the Tank model utilized in this study shows an excellent performance in simulating flow, with relatively higher modelling challenges observed in those three catchments,

Figures 4(b-c) represent the actual and theoretical scores (mean CRPS) over the period 2011-2020. Again, these are calculated by comparing the simulated flows with the observed flows (actual score), and with pseudoobservations (theoretical score), respectively. Since the CRPS is computed based on accumulated monthly mean flow at a given lead time, forecast errors also accumulate over time. Therefore, both scores deteriorate considerably as the lead time increases. Generally, the theoretical scores are slightly smaller than the actual scores, but the difference is marginal.

To facilitate comparison, the ratio between the actual score and theoretical score is shown in Figure 4(d). For most catchments, the ratio values are close to 1, confirming the small gap between actual and theoretical score. The noticeable exception is only seen in Imha catchment, characterised by being the direct among the catchments and exhibiting the lowest modelling performance (Figure 4(a)),

3.2 Contribution of weather forecasting to the performance of SFFs

In this section, we quantify the contribution of each weather forcing forecast to the performance of SFFs, as measured by the CRPS (see Section 2.2 and Figure S2 in the supplement material for details on the underpinning methodology). Figure 5 shows the relative scores for each non-bias corrected weather forecast across all seasons (a), dry season (b) and wet season (c) at different lead times (1, 3, and 6 months). The relative score is calculated as the ratio of the integrated score (computed using seasonal weather forecasts for all weather foreings), to the isolated score (when SFFs are computed using seasonal forecasts for one weather forcing, and observations for the other two). The closer the isolated score to the integrated score, the larger the contribution of that weather forcing to the overall performance (or lack of performance) of the SFFs

As shown in Figure 5(a), the contribution of each weather forecast to the performance of SFFs varies with catchment and lead time, but overall precipitation forecast plays a dominant role. Specifically, the contribution of precipitation forecast (red) accounts for almost 90% of the integrated score which forced by seasonal weather forecasts for all weather forcings, while PET (orange) and temperature (blue) contribute a similar level, ranging between 30% and 40%

During the dry season (Figure 5(b)) however, PET and temperature show comparable levels of contribution to precipitation. This is more evident in the Soyanggang and Hoengseong catchments, which are both located in the northernmost region of South Korea (see Figure 1). These catchments are characterized by low temperatures and heavy snowfall in the dry (winter) season. Correct prediction of temperature is thus crucial here as temperature controls the partitioning of precipitation into rain and snow, and hence the generation of a fast or delayed flow response. Further analysis (shown in the supplementary material, Figure S4), reveals that temperature forecasts in these two catchments are consistently lower than observation, which means that the hydrological model classifies rain as snow for several events, and hence retains that 'snow' in the simulated snowpack which in reality should produce a flow response. This explains the significant increase in performance when forcing the model with bias corrected temperature instead (Figure S4(b)).

Deleted: all skill values

Deleted: but the last three

Deleted: T

Deleted:

Deleted: performance

Deleted: it demonstrates

Deleted: to

Deleted: simulate

Deleted: stream

Deleted:

Deleted: skill

Deleted: measured by the

Deleted: skill Deleted: skill

Deleted: calculated

Deleted: skills

Deleted: actual skill shows slightly lower performance (higher CRPS) compared to the theoretical skill

Deleted: not notable

Deleted: skill

Deleted:

Deleted: skill

Deleted: the

Deleted:

Deleted: forcings

Deleted: skill

Deleted: of Seasonal Flow Forecasts (SFFs

Deleted:)

Deleted: In doing so, we assess and compare the skill of the flow forecasts obtained by forcing the hydrological model with seasonal weather forecasts for one meteorological variable and observational data for the other two. For instance, to assess the contribution of precipitation, we used seasonal precipitation forecasts, and observations for PET and temperature. This workflow is illustrated in Figure S2 (Supplementary material).

Deleted: skill

Deleted: of

Deleted: forcing

Deleted: to the SFFs skill

Deleted: seasons

Deleted: skill

Deleted: is Deleted: of the CRPS f

Deleted: or flow

Deleted: (P. T and PET)

Deleted: CRPS

Deleted: calculated solely based on individual weather forcing

Deleted: forcing Deleted: which

551 552

553

554 555

556

557

558

559

560

561

562 563 564

565

566

567

568

569

570 571

572

573 574 575

576

577 578

579 580

581

583

584

585

586

587

588

589

590

591

592

593


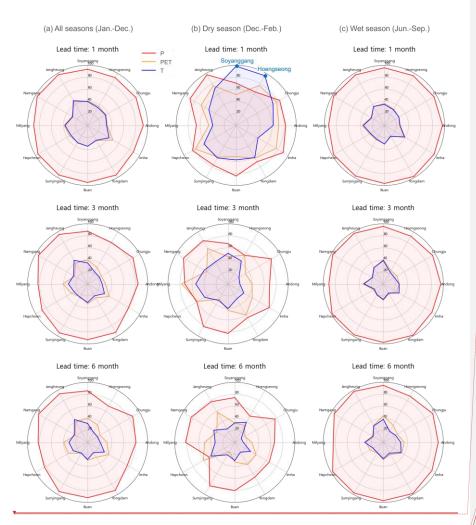


Figure 5. Relative score (%) of each weather forcings (Precipitation: red, PET: orange, Temperature: blue) before bias correction to the score of SFFs averaged over 10 years (2011-2020) during (a) all seasons, (b) dry and (c) wet season at 1, 3 and 6 lead months from the top to bottom (Catchments are ordered by their location from the northernmost (Soyanggang) to the southernmost (Jangheung) in right-angle direction, see Figure 1).

In order to enhance the forecasting performance, we applied bias correction to each weather forcing and regenerated SFFs with bias-corrected weather forcings. In most catchments and lead times, the overall skill is improved after correcting biases. The overall skill increases by 46% to 54% on average across all seasons, and more specifically from 31% to 50% in the dry season and from 54% to 55% in the wet season. The largest increase in overall skill is found in the Imha catchment, which had the lowest skill before correcting biases. For a detailed account of overall skill before and after bias correction, see Figure \$5\$ and \$6\$ in the supplementary material.

Figure 6 illustrates the change in the relative score of each weather forcing after bias correction, focusing on the dry season and the first forecasting lead month. One notable finding is that, in the snow-affected catchments (Soyanggang and Hoengseong), there is a significant decrease in the relative score of temperature after applying bias correction. As shown in detail in Figure 14 in the supplementary material, this is due to the correction of systematic underestimation biases in temperature forecasts, which lead to a more correct partition of precipitation

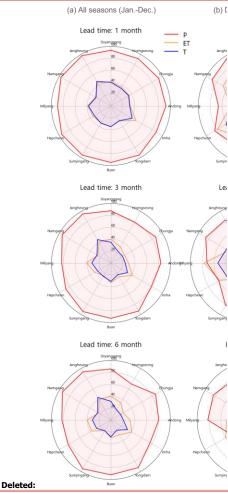

Deleted: scores ...core (%) of each weather forcings (Precipitation: red, PET: orange, Temperature: blue) before bias correction to the score

Deleted:

As shown in Figure 5(a), the contribution of each weather forcing to the skill of SFFs varies with catchment and lead time, but overall precipitation plays a dominant role. Specifically, the contribution of precipitation (red) accounts for almost 90% of the integrated score which forced by seasonal weather forecasts for all weather forcings, while PET (orange) and temperature (blue) contribute a similar level, ranging between 30% and 40%.

During the dry season (Figure 5(b)) however, PET and temperature show comparable levels of contribution to precipitation. This is more evident in the Soyanggang and Hoengseong catchments, which are both located in the northernmost region of South Korea (see Figure 1). These catchments are characterized by low temperatures and heavy snowfall in the dry (Winter) season. Correct prediction of

Deleted: s...performanceskill... we applied bias correction to each weather forcing and re-generated the ...FFs with bias-corrected weather forcings. In most catchments and lead times, the overall skill is improved after correcting biases. The overall skill ...ncreases by 46% to 54% on average across all seasons, and more specifically from 31% to 50% in the dry season and from 54% to 55% in the wet season. The largest increase in overall skill is found in the Imha catchment, which had the lowest skill before correcting biases. For a detailed account of the ...verall skill before and after bias correction, see Figure S3 ...5 and S4 ...6 in the Supplementary

Deleted: skill ...core of each weather forcing after bias correction, focusing on the dry season and the first forecasting lead month. One notable finding is that, in the snow-affected catchments (Soyanggang and Hoengseong), there is a significant decrease in the relative skill score of temperature after applying bias correction. As shown in detail in Figure S7 ...4 in the Supplementary ...upplementary Material...

763 764 765

766

767

768

into snow and rain, and thus better flow predictions. The relative score of the forecasts for all seasons and lead times after bias correction is reported in Figure 57 in the supplementary material.

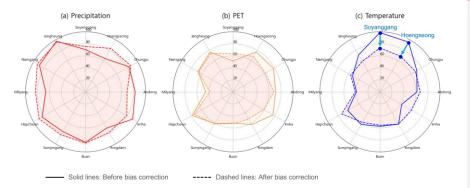


Figure 6. Relative score (%) of each weather forcings ((a) Precipitation, (b) PET, (c) Temperature), before (solid line) and after (dashed line) bias correction, to the score of SFFs averaged over 10 years (2011-2020) during the dry season and first lead month.

3.3 Comparison between SFFs and ESP across seasons and catchments

In order to comprehensively compare the <u>performance</u> of SFFs and ESP, we employed the overall skill, which quantifies the frequency with which SFFs <u>outperform</u> ESP, as outlined in section 2.2.3 (Eq.10). Figure 7 shows the seasonal and regional variations of overall skill (after bias correction) for all seasons (a), for the dry season (b) and the wet season (c). For each catchment, the results are visualised through a table showing the overall skill at lead times of 1 to 6 months. The table cells are coloured in green (pink) when SFFs <u>outperform ESP (ESP outperforms</u> SFFs). Yellow colour indicates that the system and benchmark have equivalent <u>performance</u>. In principle, this happens when the overall skill is <u>equal to 50%</u>, however in order to avoid misinterpreting small differences in <u>overall skill</u>, we classified all cases as equivalent when it is between 45% and 55%. While the choice of the range (±5%) is subjective, we find it helpful to assist analysts in avoiding spurious precision in a simple and intuitive manner.

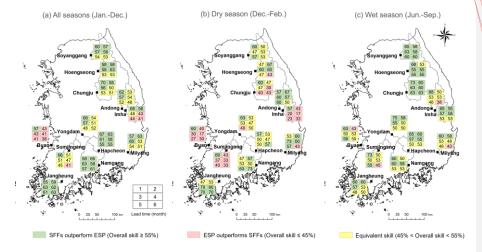


Figure 7. Map of the overall skill of bias corrected SFFs for 10 years (2011-2020) over (a) all seasons, (b) dry season and (c) wet season. The colors represent whether SFFs outperform EPS or not for each catchment and lead time (1 to 6 months).

Deleted: skill
Deleted: S5
Deleted: Supplementary

Deleted: skill

Deleted: performance

Deleted: Ensemble Streamflow Predictions (

Deleted:)

Deleted: 'skill surpasses

Deleted: 's skill

Deleted: (ESP) are more skilful than

Deleted: both

Deleted: s

Deleted: skill

Deleted: around

Deleted: decided to

Deleted: y

Deleted: all cases

Deleted: the overall skill

Deleted:

Formatted: English (United States)

777

810 811 812

813

809

818

836

As shown in Figure 7(a), the overall skill of SFFs varies according to the lead time, season and catchment. SFFs generally outperform ESP, particularly up to 3 months ahead. At longer lead times, the results vary from catchment to catchment. For instance, in some catchments generally located in the Southern region, such as Janheung, Namgang, and Hapcheon, SFFs outperform ESP for longer lead times. On the other hand, in some catchments, such as Imha and Buan, ESP generally exhibits higher performance than SFFs. In specific, two catchments, Buan, which is located in the Western coastal region and has the smallest catchment area, and Imha, which is the driest catchment, show the lowest skill. Nevertheless, we could not identify a conclusive correlation between catchment characteristics such as size or mean annual precipitation and overall skill.

Comparing the results for the dry and wet seasons, Figure 7(b-c) shows that SFFs are much more likely to outperform ESP in the wet season, and particularly in the catchments in northernmost region. During the dry season, overall skill of SFFs is lower, and particularly in the Buan, Imha and Sumjingang catchments SFFs outperform ESP only for the first lead month.

3.4 Comparison between SFFs and ESP in dry and wet years

We now assess the influence of exceptionally dry and wet conditions on the overall skill of SFFs. Based on the mean annual precipitation across 12 catchments within the period 2011-2020, we classified the years 2015 and 2017 as dry (P < 900 mm), and the years 2011 and 2020 as wet (P < 1500 mm). Figure 8 shows the overall skill of SFFs averaged over 12 catchments for the entire period (a), dry years (b), and wet years (c), during all seasons (black solid line), dry (red dashed line) and wet (blue dashed line) seasons, respectively.

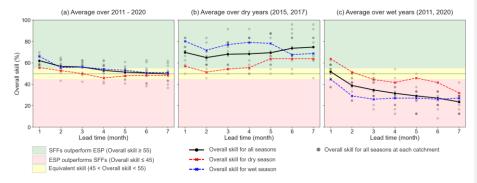


Figure 8. Overall skill of bias corrected SFFs over 12 catchments averaged over (a) all years (2011 to 2020), (b) dry years (mean annual P < 900mm) and (c) wet years (mean annual P > 1500mm) during all seasons (black lines), dry seasons (red dashed lines) and wet seasons (blue dashed lines). The pale black points represent the overall skill for all seasons at each catchment. Here, mean annual precipitation is averaged across the catchments and years.

Figure 8(a) shows that SFFs outperform ESP for lead times of up to 3 months across seasons, while maintaining equivalent performance levels thereafter. In addition, it is evident that SFFs is more skilful during the wet season than during the dry season. In dry years (Figure 8(b)), in contrast to the typical decrease in the overall skill with lead time, we find that SFFs maintain a significantly higher skill at all lead times, and particularly during the wet season (blue line). On the other hand, in wet years (Figure 8(c)), the overall skill is generally poor, and ESP $generally\ has\ higher\ \underline{performance}\ \underline{than}\ SFFs,\ especially\ during\ the\ wet\ season.$

Last, we analyse the spatial variability of the overall skill by looking at the spread of individual catchments (grey dots). We see that the spread in dry and wet years (Figure 8(b-c)) is larger than in all years (Figure 8(a)). This confirms that under extreme weather conditions, the uncertainty and variability in the forecasting performance increase depending on the catchment. A more detailed analysis of the overall skill for each catchment (described in Figure §8 in the supplementary material) shows that the catchments located in Southern region consistently exhibit higher skill, regardless of lead times and dry/wet years.

3.5 Example of flow forecasts time-series

Figure 9 shows an example of the flow into the Chungju reservoir, which holds the largest storage capacity in South Korea. The overall skill of this catchment is the highest for a 1-month lead time; however, from the second lead month onward, it shows a moderate level of overall skill compared to other catchments (see Figure S8 in the supplementary material). In this section, we compare the observed and forecasted cumulative flow forced by Deleted: In Deleted: however.

Formatted: English (United Kingdom)

Deleted: skill

Deleted: skill

Deleted: the overall skill in

Deleted:

Deleted: S6

Deleted: Supplementary

Deleted: southern

Deleted: s

seasonal weather forecasts (SFFs, green lines) and historical weather records (ESP, pink lines) for lead times of 1, 3, and 6 months from April during the wettest (2011) and the driest year (2015), respectively.

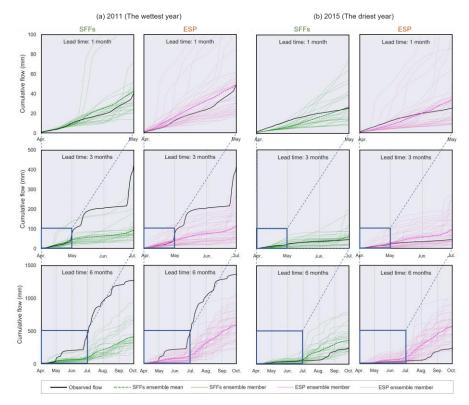


Figure 9. Observed cumulative flow (black lines) and forecasted cumulative flow representing SFFs after bias correction (left, green lines) and ESP (right, pink lines) in the Chungju reservoir for 1, 3, and 6 months of lead times over (a) the wettest year (2011, 1884mm/year), and (b) the driest year (2015, 742mm/year).

In this specific catchment and years, SFFs show equivalent or slightly higher performance than ESP at a 1-month lead time. However, as the lead time increases, the performance of both methods tends to deteriorate. Essentially, it indicates an underestimation in the wettest year and an overestimation in the driest year. In particular, considerably higher performance was found in SFFs compared to ESP in the driest year (Figure 9(b)). On the other hand, it is obvious that both methods have insufficient sharpness in forecasting flow in the wettest years for lead times of 3 and 6 months.

Examining each ensemble member of both SFFs and ESP, we found higher variability in ESP. Furthermore, since ESP utilizes the same weather forcings, the forecasted flows are generally similar in terms of its quantity and patterns, regardless of the wettest and driest years. Conversely, the forecasted flow ensemble members of SFFs show distinctive patterns for each year.

Although, these results are confined to a single catchment and specific years, this analysis is valuable in quantitatively illustrating the forecasted flow results under dry and wet conditions and different lead times. Furthermore, these features are generally shown in other catchments, and align with our previous findings in section 3.4.

4. Discussion

4.1 The skill of seasonal flow forecasts

879

880 881

882

883

884

885

886

887

888

889

890

891

892

893

894

895

896

897

898

899

904

905

906

907

908

909

This study offers a comprehensive view of overall skill of SFFs, benchmarked to the conventional – and easier to implement - ESP method. In contrast to the majority of previous studies, which assessed the skill of SFFs at continental or national level or over large river basins, our study focuses on 12 relatively small catchments (59 - 6648 km^2) across South Korea.

Lead time		All seasons			Dry season		Wet season				
(months)	Average (2011-2020)	Dry years (2015, 2017)	Wet years (2011, 2020)	Average (2011-2020)	Dry years (2015, 2017)	Wet years (2011, 2020)	Average (2011-2020)	Dry years (2015, 2017)	Wet years (2011, 2020)		
1											
2											
3											
4											
5	_										
6	_										
7	•										
■ : SFFs	s (after bias co	orrection)	(overall sk	:ill ≥ 55%)							
, , ,				kill ≤ 45%)							
Equivalent (45 < over				all skill < 55%)						

Figure 10. Summary of key findings regarding the overall skill at different lead times, seasons, and years.

Figure 10 summarizes the key findings of this study regarding the overall skill of SFFs across different seasons and years. It demonstrates that SFFs outperform ESP in almost all the cases for forecasting lead times of one month. This result is consistent with previous literature (e.g., Lucatero et al., 2018; Yossef et al., 2013). In addition, the higher skill of SFFs is also shown at lead times of 2 and 3 months in several situations as shown in Figure 10, and at even longer lead times in dry years. This is more surprising as this considerable performance of SFFs was not found in previous studies.

Similar to our study, earlier studies (Crochemore et al., 2016; Lucatero et al., 2018) have explored the skill compared with real flow observations at a catchment scale. Therefore, the comparison of their results with our findings holds interest. In brief, their results suggest that ESP remains a 'hard-to-beat' method compared to SFFs even after bias correction. Crochemore et al. (2016) showed that SFFs using bias corrected precipitation, is in equivalent level of performance with ESP up to 3 months ahead. Lucatero et al. (2018) concluded that SFFs still face difficulties in outperforming ESP, particularly at lead times longer than 1 month.

The difference of our results compared to the literature stems from a combination of several important factors. First, it is worth noting that these two previous studies were conducted at the catchment-scale, with a specific focus on Europe, namely France (Crochemore et al., 2016) and Denmark (Lucatero et al., 2018). The skill of SFFs varies according to the geographic locations, meteorological conditions of given study area, as confirmed by numerous studies (e.g., Greuell et al., 2018; Pechlivanidis et al., 2020; Yossef et al., 2013). Therefore, the skill of SFFs could also be influenced by distinct spatial and meteorological conditions between Europe and South Korea. Second, we can attribute the difference to the utilization of a more advanced seasonal weather forecasting system. Unlike previous studies which applied ECMWF system 4, our study is conducted based on ECMWF's cuttingedge forecasting system version 5. It is reported that ECMWF system 5 has many improvements compared to the previous version including the predictive skill of the El Niño Southern Oscillation (ENSO) (Johnson et al., 2019) and rainfall inter-annual variability (Köhn-Reich and Bürger, 2019). Specifically, ENSO is known to be a key driver affecting the skill of seasonal weather forecasts (Ferreira et al., 2022; Shirvani and Landman, 2015; Weisheimer & Palmer, 2014); therefore, its improvement can result in notable changes in forecasting skill. Although the relationship between seasonal weather patterns in South Korea and ENSO is not fully understood, some previous research has shown good correlations for certain regions and seasons (Lee and Julien, 2016; Noh and Ahn, 2022). While it is challenging to quantitatively evaluate the impact of system advancements in this study, given the significance of meteorological forecast in hydrological forecasts, it is highly probable that the development of the system has had a positive influence on the results. Although a few studies have analysed the skill of SFFs based on ECMWF system 5 (e.g., Peñuela et al., 2020; Ratri et al., 2023), direct comparisons with

Deleted: against

Deleted: of SFFs and ESP

Deleted: of SFFs, i.e., their chances of being skilful than ESP

Deleted: compared to ESP

Deleted: skill

Deleted: improvements in

our research were deemed difficult due to differences in spatial scale and analysis methods, such as the absence of a comparison with ESP.

Last, the performance of the hydrological model also contributes to differences in the results. To evaluate the impact of hydrological model to SFFs, we compared actual score (forecast performance compared to observed flow data) with theoretical score (forecast performance compared to pseudo flow observation) and found that the actual scores are slightly higher than theoretical scores (i.e., theoretical score shows higher performance). This finding is consistent with previous studies, and the gap between the actual and theoretical score is highly linked to the performance of hydrological model (Greuell et al., 2018; van Dijk, 2013). When a model's actual score closely approximates its theoretical score, it may suggest that the model is operating at a best possible level, given the inherent uncertainties and limitations associated with the available data and methods. Although our results demonstrated that the theoretical score shows higher performance than actual score, their difference was generally marginal. This close agreement between the two scores indicates that the model is well-calibrated and capable of effectively capturing the underlying hydrological processes in those catchments.

Our findings on the impact of bias correction quantitatively showed that generally precipitation controls the performance of SFFs, however, we also found that temperature plays a substantial role in specific seasons and catchments. Specifically, the Hoengseong and Soyanggang catchments, located in the northernmost part of South Korea and affected by snowfall in the Dry (winter) season (December to February), exhibit a higher temperature contribution than precipitation for a forecasting lead time of one month during the dry season. The main reason for this is the underestimation of temperature forecasts. Our supplementary experiments provide evidence that using bias-corrected temperature forecasts significantly improves the performance of flow forecasts (see Figure \$4\$ in the supplementary material). Although the positive impact of bias correction of precipitation forecasts in enhancing the performance of SFFs has been well-documented in numerous previous studies (Crochemore et al., 2016; Lucatero et al., 2018; Pechlivanidis et al., 2020; Tian et al., 2018), our result demonstrates the importance of bias correction of temperature too, at least in snow-affected catchments.

An alternative approach to bias correction has been proposed by (Lucatero et al., 2018; Yuan and Wood, 2012), who argue that directly correcting the biases in the flow forecasts may result in better performance at a lower computational cost. However, we tested this approach and found conflicting outcomes (Figure \$9 in the supplementary material). Therefore, caution should be exercised when directly correcting biases for flow, as this approach may exclude the contribution of initial conditions, which is one of the most crucial factors in hydrological modelling. In cases where the performance of hydrological model is the major source of error, bias correction of the flow might be useful; however, if the model shows an acceptable performance, as demonstrated in this study, incorporating bias correction for the simulated flow could add more errors.

Due to limited data availability, conducting additional validation across a larger number of extreme events is not possible. Nevertheless, our research findings suggest a potential correlation between the overall skill and dry/wet conditions, that should be further validated if new data become available. Specifically, in the period analysed here, SFFs considerably outperform ESP for all lead times during the wet season in dry years. Conversely, the overall skill during the wet season in wet years was not satisfactory. This is because the overall skill is commonly dominated by precipitation forecasting skill, and we previously found that the skill of precipitation forecasts is the lowest in wet years (Lee et al 2023). The systematic biases of seasonal precipitation forecasts, which tend to underestimate (overestimate) the precipitation during the wet (dry) season, led to the consistent results in flow forecasts. This finding also hints that SFFs hold the potential to provide valuable information for effective water resources management during dry conditions, which is crucial for drought management.

4.2 Limitations and directions for future research

In this paper, we investigated the <u>overall</u> skill of SFFs at the catchment scale using ECMWF's seasonal weather forecasts (system 5) with a spatial resolution of $1\times1^\circ$, Based on our previous research, it has been demonstrated that among four forecasting centres, ECMWF provides the most skilful seasonal precipitation forecasts (Lee et al., 2023), thus we utilized seasonal weather forecasts datasets from ECMWF in this study. However, the skill for other weather forcings such as temperature and PET, have not been tested across South Korea. Additionally, while ECMWF provides seasonal weather forecasts with high resolution (36×36 km, approximately $0.3\times0.3^\circ$), we utilized publicly available low resolution data ($1\times1^\circ$) to maintain consistency with our previous work (Lee et al., 2023). Our additional investigation indicates that the difference in weather data between high and low resolution is not substantial (see Figure S10 in the supplementary material). Nevertheless, prior studies suggest that the skill of seasonal weather forecasts may vary according to factors such as region, season, and spatial resolution. Therefore, proader research is required to determine the seasonal weather forecasts provider as well as spatial resolution that can lead to skilful hydrological forecasts in the regions or seasons of interest.

Deleted: skill Deleted: and Deleted: skill Deleted: the actual skill is generally lower than theoretical skill Deleted: difference Deleted: in skill Deleted: skills Deleted: skill Deleted: skill Deleted: showed Deleted: skill Deleted: is Deleted: skill Deleted: skills Deleted: skill Deleted: accuracy Deleted: S7 Deleted: Supplementary Deleted: skill Deleted: d Deleted: alternative Deleted: S8 Deleted: Supplementary Deleted:

Deleted: Another noteworthy finding is that **Deleted:** were

Deleted: more skilful than

Deleted: performance

Deleted: of SFFs

Deleted: SFFs

Deleted: skill of

Deleted: forecasts

Deleted: catchment

Deleted: performance

Deleted: seasonal weather forecasts

Deleted: provided by

 $\label{eq:Deleted:De$

Deleted: st

Deleted: However, the skill for other weather forcings such as temperature and PET, have not tested across South Korea. Therefore, more broadly

Deleted: needed

916

917

918

919

920

921

922 923

924

925

926

927

928

930

931

932

933 934

935

936

937

938

939

940

941

942

943

944

945

946 947

948

949

950

951

952

953

954

955

956

957

958

959

960

961

962

963

964

965

966

967

968

Given the distinct climatic conditions in South Korea, it is important to acknowledge that our results may not be applicable to other regions or countries. Therefore, further work needs to be carried out to reproduce this analysis in different regions. To facilitate this process, two Python-based toolboxes can be useful: SEAFORM (SEAsonal FORecasts Management) and SEAFLOW (SEAsonal FLOW forecasts). The SEAFORM toolbox, developed in our previous study (Lee et al., 2023), offers multiple functions for manipulating seasonal weather forecast datasets (e.g., download the datasets, time-series generation, bias correction). On the other hand, the SEAFLOW toolbox, developed in this study, is specifically designed for the analysis of SFFs based on the modified Tank model (but it could be useful to apply to other hydrologic models).

In terms of forecast skill, our study highlights the potential of SFFs at the catchment scale for real water resources management. Nevertheless, it is crucial to recognize the difference between 'skill', indicating how well hydrological forecasts mimic observed data, and 'value', referring to the practical benefits obtained from utilizing those forecasts in real world. Previous studies have addressed this issue, showing that better skill does not always result in higher value (Boucher et al., 2012; Chiew et al., 2003). While earlier findings suggest that the conventional method (ESP) generally outperforms SFFs in terms of 'skill' (e.g., Lucatero et al., 2018; Yossef et al., 2013), recent research demonstrates that, in terms of 'value,' the use of seasonal forecasts in semi-arid regions offers significant economic benefits by mitigating hydro-energy losses in a dry year (Portele et al., 2021). Therefore, our future research efforts should concentrate on a quantitative evaluation of the value of SFFs for practical reservoir operations, informing decision-making in water resources management. This evaluation is of significant importance as it directly relates to assessing the potential utilization of SFFs in practical water management.

5. Conclusions

1013

1014

1015

1016

1017

1018

1019

1024 1025

1026

1027

1028

1029

1030

1031

1032

1033

1034

1035

1036

1037

1038 1039

1040 1041

1042

1043 1044

1045

1046

1047

1048

1049

1050

1051

1052

1053

1054

This study assessed the <u>overall</u> skill of SFFs across 12 catchments in South Korea using a hydrological model forced by seasonal weather forecasts from the ECMWF (system 5). By focusing on operational reservoir catchments with relatively small sizes, our findings showed the potential of SFFs for practical water resources management.

The results first demonstrate that the performance of the hydrological model is crucial in flow forecasting with the Tank model used in this study exhibiting reliable performance. Secondly, precipitation emerges as a dominant factor influencing the performance of SFFs compared to other weather forcings, and this is more evident during the wet season. However, temperature can also be highly important in specific seasons and catchments, and this result highlights the significance of temperature bias correction as the flow simulation with the bias-corrected temperature provides higher performance. Third, at catchment scale, which is more suitable for water resources management, bias corrected SFFs have skill with respect to ESP up to 3 months ahead. Notably, the highest overall skill, during the wet season in dry years highlights the potential of SFFs to add value in drought management. Lastly, while our research emphasizes the superior performance of SFFs at the catchment scale in South Korea, it is important to note that outcomes may vary depending on factors such as the type of seasonal weather forecasts system used, the study area, and the performance of the hydrological model.

As seasonal weather forecasting technologies continue to progress, it is also crucial to concurrently pursue their application and validation in flow forecasting. We hope that our findings contribute to the ongoing validation efforts of the skill of SFFs across various regions and, furthermore, serve as a catalyst for their practical application in real-world water management. At the same time, our proposed workflow and the analysis package we have developed using Python Jupyter Notebook, can offer valuable support to water managers in gaining practical experience to utilize SFFs more effectively.

Code and data availability. The SEAFLOW (seasonal flow forecasts) and SEAFORM (seasonal forecast management) Python packages are available at https://github.com/uobwatergroup/seaflow, and https://github.com/uobwatergroup/seaflow, and https://github.com/uobwatergroup/seaflow, respectively. ECMWF's seasonal weather forecasts data are available under a range of licences from https://github.com/uobwatergroup/seaflow, and https://github.com/uobwatergroup/seaflow, and lost are available under a range of licences from https://github.com/uobwatergroup/seaflow, and lost are available at https://github.com/uobwatergroup/seaflow, and lost are available under a range of licences from https://github.com/uobwatergroup/seaflow, and lost are available under a range of licences from https://github.com/uobwatergroup/seaflow, and lost are available under a range of licences from https://github.com/uobwatergroup/seaflow, and lost are available under a range of licences from https://github.com/uobwatergroup/seaflow, and lost are available under a range of licences from https://github.com/uobwatergroup/seaflow, and lost are available under a range of licences from https://github.com/uobwatergroup/seaflow, and lost are available under a range of licences from https://github.com/uobwatergroup/seaflow, and lost are available under a range of licences from https://github.com/uobwatergroup/seaflow, and

Author contributions. YL designed the experiments, with suggestions from the other co-authors. YL developed the workflow and performed simulation. FP and MAR participated in repeated discussions on interpretations of results and suggested ways forward in the analysis. AP provided YL with modelling technical support and reviewed the manuscript.

 $1064 \qquad \textit{Competing interests}. \text{ The authors declare that they have no conflict of interest.}$

Acknowledgements. Yongshin Lee is funded through a PhD scholarship by K-water (Korea Water Resources 1066 Corporation). Andres Peñuela is funded by the European Research Executive Agency (REA) under the

Deleted: Deleted: main conclusions from this study are summarized as Deleted: Deleted: and the Deleted: demonstrates Deleted: compared to other weather forcings. Deleted: precipitation plays a dominant role in the performance of SFFs, and this is Deleted: particularly Deleted: Particularly Deleted: Deleted: of SFFs Deleted: s Deleted: although Deleted: skill Deleted: evolve Deleted: continuous

Deleted: actual

Deleted: Seasonal Flow Forecasts (

Deleted: research approach

Deleted: Inflow

Deleted: Francesca Pianosi is partially funded by the Engineering and Physical Sciences Research Council (EPSRC) "Living with Environmental Uncertainty" Fellowship (EP/R007330/1).

- 1092 HORIZON-MSCA-2021-PF-01 grant agreement 101062258. We also thank K-water and Dr. Shinuk Kang (South
- 1093 Korea, K-water Institute) for sharing data and hydrological model (modified Tank) applied in this study.
- 1094 References
- Alley, R.B., Emanuel, K.A. and Zhang, F.: Advances in weather prediction. Science, [online] 363, 342–344,
- 1096 https://doi.org/10.1126/science.aav7274, 2019.
- 1097 Arnal, L., Cloke, H.L., Stephens, E., Wetterhall, F., Prudhomme, C., Neumann, J., Krzeminski, B. and
- 1098 Pappenberger, F.: Skilful seasonal forecasts of streamflow over Europe? Hydrology and Earth System Sciences,
- 1099 22, 2057–2072, https://doi.org/10.5194/hess-22-2057-2018, 2018.
- 1100 Azman, A.H., Tukimat, N.N.A. and Malek, M.A.: Analysis of Linear Scaling Method in Downscaling
- Precipitation and Temperature, Water Resources Management, 36, 171–179, https://doi.org/10.1007/s11269-
- 1102 <u>021-03020-0</u>, 2022.
- Baker, S.A., Rajagopalan, B. and Wood, A.W.: Enhancing ensemble seasonal streamflow forecasts in the upper
- 1104 Colorado river basin using multi-model climate forecasts, Journal of the American Water Resources
- 1105 Association, **57**, 906–922, https://doi.org/10.1111/1752-1688.12960, 2021.
- 1106 Bauer, P., Thorpe, A. and Brunet, G.: The quiet revolution of numerical weather prediction. *Nature*, **525**, 47–55,
- 1107 <u>https://doi.org/10.1038/nature14956</u>, 2015.
- 1108 Boucher, M.-A., Tremblay, D., Delorme, L., Perreault, L. and Anctil, F.: Hydro-economic assessment of
- hydrological forecasting systems, *Journal of Hydrology*, **416-417**, 133–144,
- 1110 https://doi.org/10.1016/j.jhydrol.2011.11.042, 2012.
- 1111 Chiew, F.H.S., Zhou, S.L. and McMahon, T.A.: Use of seasonal streamflow forecasts in water resources
- management, Journal of Hydrology, 270, 135-144, https://doi.org/10.1016/s0022-1694(02)00292-5, 2003.
- 1113 Chiew, F. and Mcmahon, T.: Assessing the adequacy of catchment streamflow yield estimates, Soil Research,
- 1114 **31**, 665, https://doi.org/10.1071/sr9930665, 1993.
- 1115 Crochemore, L., Ramos, M.-H. and Pappenberger, F.: Bias correcting precipitation forecasts to improve the skill
- of seasonal streamflow forecasts, *Hydrology and Earth System Sciences*, **20**, 3601–3618,
- 1117 <u>https://doi.org/10.5194/hess-20-3601-2016</u>, 2016.
- 1118 Day, G.N.: Extended streamflow forecasting using NWSRFS, Journal of Water Resources Planning and
- 1119 *Management*, 111, 157–170, https://doi.org/10.1061/(asce)0733-9496(1985)111:2(157), 1985.
- Duan, Q., Sorooshian, S. and Gupta, V.K.: Effective and efficient global optimization for conceptual rainfall-
- 1121 runoff models, Water Resources Research, 28, https://doi.org/1015–1031, 10.1029/91wr02985, 1992.
- 1122 Duan, Q., Sorooshian, S. and Gupta, V.K.: Optimal use of the SCE-UA global optimization method for
- calibrating watershed models, *Journal of Hydrology*, **158**, 265–284, https://doi.org/10.1016/0022-1284
- 1124 <u>1694(94)90057-4</u>, 1994.
- 1125 Fang, G.H., Yang, J., Chen, Y.N. and Zammit, C.: Comparing bias correction methods in downscaling
- meteorological variables for a hydrologic impact study in an arid area in China. Hydrology and Earth System
- 1127 *Sciences*, **19**, 2547–2559, https://doi.org/10.5194/hess-19-2547-2015, 2015.
- 1128 Ferreira, G.W.S., Reboita, M.S. and Drumond, A.: Evaluation of ECMWF-SEAS5 seasonal temperature and
- precipitation predictions over South America, Climate, 10, 128, https://doi.org/10.3390/cli10090128, 2022.
- 1130 Goodarzi, M., Jabbarian Amiri, B., Azarneyvand, H., Khazaee, M. and Mahdianzadeh, N.: Assessing the
- performance of a hydrological Tank model at various spatial scales, Journal of Water Management Modeling,
- 1132 https://doi.org/10.14796/jwmm.c472, 2020.
- 1133 Greuell, W., Franssen, W.H.P. and Hutjes, R.W.A.: Seasonal streamflow forecasts for Europe Part 2: Sources
- 1134 of skill. Hydrology and Earth System Sciences, 23, 371–391, https://doi.org/10.5194/hess-23-371-2019, 2019.
- Greuell, W., Franssen, W.H.P., Biemans, H. and Hutjes, R.W.A.: Seasonal streamflow forecasts for Europe
- Part I: Hindcast verification with pseudo- and real observations, Hydrology and Earth System Sciences, 22,
- 1137 3453–3472, https://doi.org/10.5194/hess-22-3453-2018, 2018.
- 1138 Gupta, H.V., Sorooshian, S. and Yapo, P.O.: Status of automatic calibration for hydrologic models: Comparison
- with multilevel expert calibration, *Journal of Hydrologic Engineering*, **4**, 135–143,
- 1140 <u>https://doi.org/10.1061/(asce)1084-0699(1999)4:2(135)</u>, 1999.

- Harrigan, S., Prudhomme, C., Parry, S., Smith, K. and Tanguy, M.: Benchmarking ensemble streamflow
- prediction skill in the UK, Hydrology and Earth System Sciences, 22, 2023–2039, https://doi.org/10.5194/hess-
- 1143 <u>22-2023-2018</u>, 2018.
- 1144 Hersbach, H.: Decomposition of the Continuous Ranked Probability Score for ensemble prediction
- 1145 systems, Weather and Forecasting, 15, 559–570, https://doi.org/10.1175/1520-
- 1146 <u>0434(2000)015%3C0559:dotcrp%3E2.0.co;2</u>, 2000.
- 1147 Jackson-Blake, L., Francois Clayer, Haande, S., James Edward Sample and S. Jannicke Moe: Seasonal
- 1148 forecasting of lake water quality and algal bloom risk using a continuous Gaussian Bayesian network,
- 1149 Hydrology and Earth System Sciences, 26, 3103–3124, https://doi.org/10.5194/hess-26-3103-2022, 2022.
- 1150 Johnson, S.J., Stockdale, T.N., Ferranti, L., Balmaseda, M.A., Molteni, F., Magnusson, L., Tietsche, S.,
- Decremer, D., Weisheimer, A., Balsamo, G., Keeley, S.P.E., Mogensen, K., Zuo, H. and Monge-Sanz, B.M.:
- SEAS5: the new ECMWF seasonal forecast system, Geoscientific Model Development, 12, 1087–1117,
- 1153 <u>https://doi.org/10.5194/gmd-12-1087-2019</u>, 2019.
- 1154 Kang, S.U., Lee, D.R. and Lee, S.H.: A study on calibration of Tank model with soil moisture structure, Journal
- of Korea Water Resources Association, **37**, 133–144, 2004.
- 1156 Kolachian, R. and Saghafian, B.: Deterministic and probabilistic evaluation of raw and post processed sub-
- seasonal to seasonal precipitation forecasts in different precipitation regimes, *Theoretical and Applied*
- 1158 Climatology, 137, 1479–1493, https://doi.org/10.1007/s00704-018-2680-5, 2019.
- 1159 Köhn-Reich, L. and Bürger, G.: Dynamical prediction of Indian monsoon: Past and present skill, International
- 1160 *Journal of Climatology*, **39**, 3574–3581, https://doi.org/10.1002/joc.6039, 2019.
- 1161 K-water (Korea Water Resources Corporation): My water, [online] www.water.or.kr. Available at:
- 1|162 http://water.or.kr [Accessed 4 Oct. 2022], 2022.
- 1 Lee, J.H. and Julien, P.Y.: Teleconnections of the ENSO and South Korean precipitation patterns, Journal of
- 1 1 1 6 4 *Hydrology*, **534**, 237–250, https://doi.org/10.1016/j.jhydrol.2016.01.011, 2016.
- $1165 \qquad \text{Lee, J.W., Chegal, S.D. and Lee, S.O.: A review of Tank model and its applicability to various Korean} \\$
- 1166 catchment conditions, *Water*, **12**, 3588, https://doi.org/10.3390/w12123588, 2020.
- 1167 Lee, Y., Peñuela, A., Pianosi F. and Rico-Ramirez, M.A.: Catchment-scale skill assessment of seasonal
- 1168 precipitation forecasts across South Korea, *International Journal of Climatology*, **43**, 5092–5111,
- https://doi.org/10.1002/joc.8134, 2023.
- 1170 Leutbecher, M. and Haiden, T.: Understanding changes of the continuous ranked probability score using a
- homogeneous Gaussian approximation, *Quarterly Journal of the Royal Meteorological Society*, **147**, 425–442,
- 1172 https://doi.org/10.1002/qj.3926, 2020.
- 1173 Li, H., Luo, L., Wood, E.F. and Schaake, J.: The role of initial conditions and forcing uncertainties in seasonal
- hydrologic forecasting, Journal of Geophysical Research, 114, https://doi.org/10.1029/2008jd010969, 2009.
- 1175 Lucatero, D., Madsen, H., Refsgaard, J.C., Kidmose, J. and Jensen, K.H.: Seasonal streamflow forecasts in the
- Ahlergaarde catchment, Denmark: the effect of preprocessing and post-processing on skill and statistical consistency, *Hydrology and Earth System Sciences*, **22**, 3601–3617, https://doi.org/10.5194/hess-22-3601-2018,
- 1178 2018.
- Manzanas, R., Lucero, A., Weisheimer, A. and Gutiérrez, J.M.: Can bias correction and statistical downscaling
- methods improve the skill of seasonal precipitation forecasts? Climate Dynamics, **50**, 1161–1176,
- 1181 https://doi.org/10.1007/s00382-017-3668-z, 2017.
- 1182 Maraun, D.: Bias correcting climate change simulations a critical review, Current Climate Change Reports, 2,
- 1183 211–220, https://doi.org/10.1007/s40641-016-0050-x, 2016.
- 1184 Matheson, J.E. and Winkler, R.L.: Scoring rules for continuous probability distributions, *Management Science*,
- 1185 **22**, 1087–1096, https://doi.org/10.1287/mnsc.22.10.1087, 1976.
- 1186 McCabe, G.J. and Markstrom, S.L.: A monthly water-balance model driven by a graphical user interface, U.S.
- 1187 Geological Survey, 1–2, 2007.
- 1188 Melesse, A.M., Wossenu Abtew and Senay, G.: Extreme hydrology and climate variability: monitoring,
- 1189 modelling, adaptation and mitigation, Amsterdam, Netherlands: Elsevier, 2019.

Formatted: Justified

- 1190 Ministry of Environment.: 2020 Korea annual hydrological report. South Korea, Available at:
- 1191 https://www.mois.go.kr/frt/bbs/type001 (Accessed: 28 August 2022), 2020.
- 1192 Ministry of land, infrastructure and transportation.: Long-term Water Resources Management Master Plan
- 1193 (2001~2020), South Korea, 2016.
- 1194 Moriasi, D. N., Gitau, M. W., Pai, N. and Daggupati, P.: Hydrologic and water quality models: Performance
- 1195 measures and evaluation criteria, Journal of the ASABE, [online] 58, 1763-1785,
- 1196 https://doi.org/10.13031/trans.58.10715, 2015.
- 1197 Moriasi, D. N., Arnold, J. G., Van Liew, M. W., Bingner, R. L., Harmel R. D. and Veith T. L.: Model evaluation
- 1198 guidelines for systematic quantification of accuracy in watershed simulations, Journal of the ASABE, 50, 885-
- 1199 900, https://doi.org/10.13031/2013.23153, 2007.
- 1200 Noh, G.-H. and Ahn, K.-H.: Long-lead predictions of early winter precipitation over South Korea using a SST
- 1201 1202 anomaly pattern in the North Atlantic Ocean, Climate Dynamics, 58, 3455–3469, https://doi.org/10.1007/s00382-
- 021-06109-9, 2022
- 1203 Ou, X., Gharabaghi, B., McBean, E. and Doherty, C.: Investigation of the Tank model for urban storm water
- 1204 management, Journal of Water Management Modeling, https://doi.org/10.14796/jwmm.c421, 2017.
- 1205 Pappenberger, F., Ramos, M.H., Cloke, H.L., Wetterhall, F., Alfieri, L., Bogner, K., Mueller, A. and Salamon,
- 1206 P.: How do I know if my forecasts are better? Using benchmarks in hydrological ensemble prediction, Journal
- 1207 of Hydrology, 522, 697–713, https://doi.org/10.1016/j.jhydrol.2015.01.024, 2015.
- 1208 Pechlivanidis, I.G., Crochemore, L., Rosberg, J. and Bosshard, T.: What are the key drivers controlling the
- 1209 quality of seasonal streamflow forecasts? Water Resources Research, 56, 1-19,
- 1210 https://doi.org/10.1029/2019wr026987, 2020.
- 1211 Peñuela, A., Hutton, C. and Pianosi, F.: Assessing the value of seasonal hydrological forecasts for improving
- 1212 water resource management: insights from a pilot application in the UK, Hydrology and Earth System Sciences,
- 1213 24, 6059–6073, https://doi.org/10.5194/hess-24-6059-2020, 2020.
- 1214 Phuong, H.T., Tien, N.X., Chikamori, H. and Okubo, K.: A hydrological Tank model assessing historical runoff
- 1215 variation in the Hieu river basin, Asian Journal of Water, Environment and Pollution, 15, 75-86,
- 1216 https://doi.org/10.3233/ajw-180008, 2018.
- 1217 Portele, T., Lorenz, C., Berhon Dibrani, Laux, P., Bliefernicht, J. and Kunstmann, H.: Seasonal forecasts offer
- 1218 1219 economic benefit for hydrological decision making in semi-arid regions, Scientific Reports, 11. 10581,
- https://doi.org/10.1038/s41598-021-89564-y, 2021.
- 1220 Prudhomme, C., Hannaford, J., Alfieri, L., Boorman, D.B., Knight, J., Bell, V., Christopher A.-L. Jackson,
- 1221 Svensson, C., Parry, S., Nuria Bachiller-Jareno, Davies, H., Davis, R.A., Mackay, J.D., Andrew, Rudd, A.C.,
- 1222 Smith, K., Bloomfield, J.P., Ward, R. and Jenkins, A.: Hydrological outlook UK: an operational streamflow and
- 1223 groundwater level forecasting system at monthly to seasonal time scales, Hydrological Science Journal, 62,
- 1224 $2753-2768, \underline{https://doi.org/10.1080/02626667.2017.1395032}, 2017.$
- 1225 Rahnamay-Naeini, M. Analui, B., Gupta, H.V., Duan, Q. and Sorooshian, S.: Three decades of the Shuffled
- Complex Evolution (SCE-UA) optimization algorithm: Review and applications, Scientia Iranica, 26, 2015-
- 1226 1227 2031 2019
- 1228 Ratri, D.N., Weerts, A., Muharsyah, R., Whan, K., Tank, A.K., Aldrian, E. and Hariadi, M.H.: Calibration of
- 1229 ECMWF SEAS5 based streamflow forecast in seasonal hydrological forecasting for Citarum river basin. West
- 1230 Java, Indonesia, *Journal of Hydrology*, **45**, https://doi.org/10.1016/j.ejrh.2022.101305, 2023.
- 1231 Shin, S.H., Jung, I.W. and Bae, D.H.: Study on estimation of optimal parameters for Tank model by using SCE-
- 1232 UA, Journal of Korea Water Resources Association, 1530-1535, 2010.
- Shirvani, A. and Landman, W.A.: Seasonal precipitation forecast skill over Iran, International Journal of
- 1233 1234 Climatology, 36, 1887–1900. https://doi.org/10.1002/joc.4467, 2015.
- 1235 Shrestha, M., Acharya, S.C. and Shrestha, P.K.: Bias correction of climate models for hydrological
- 1236 modelling - are simple methods still useful? Meteorological Applications, 24, 531-539,
- 1237 https://doi.org/10.1002/met.1655, 2017.
- 1238 Shrestha, S. and Htut, A.Y.: Modelling the potential impacts of climate change on hydrology of the Bago River
- 1239 basin, Myanmar, International Journal of River Basin Management, 14, 287-297,
- 1240 $https://doi.org/10.1080/15715124.2016.1164177,\,2016.$

Formatted: Justified

Formatted: Justified

- 1241 Soares, M. B. and Dessai, S.: Barriers and enablers to the use of seasonal climate forecasts amongst
- 1242 organisations in Europe, Climatic Change, 137, 89-103, https://doi.org/10.1007/s10584-016-1671-8, 2016.
- 1243 Sugawara, M., Watanabe, I., Ozaki, E. and Katsuyama, Y.: Tank model programs for personal computer and the
- 1244 way to use, National Research Centre for Disaster Prevention, Japan, 1986.
- 1245 Sugawara, M.: "Tank model." Computer models of watershed hydrology, V. P. Singh (Ed.), Water Resources
- 1246 Publications, Highlands Ranch, Colorado, 1995.
- 1247 Tian, F., Li, Y., Zhao, T., Hu, H., Pappenberger, F., Jiang, Y. and Lu, H.: Evaluation of the ECMWF system 4
- 1248 climate forecasts for streamflow forecasting in the upper Hanjiang river basin, Hydrology Research, 49, 1864-
- 1249 1879, https://doi.org/10.2166/nh.2018.176, 2018.
- 1250 Van Dijk, A.I.J.M., Peña-Arancibia, J.L., Wood, E.F., Sheffield, J. and Beck, H.E.: Global analysis of seasonal
- 1251 1252 streamflow predictability using an ensemble prediction system and observations from 6192 small catchments
- worldwide, Water Resources Research, 49, 2729-2746, https://doi.org/10.1002/wrcr.20251, 2013.
- 1253 Whateley, S., Palmer, R.N. and Brown, C.: Seasonal hydroclimatic forecasts as innovations and the challenges
- 1254 1255 of adoption by water managers, Journal of Water Resources Planning and Management, 141,
- https://doi.org/10.1061/(asce)wr.1943-5452.0000466, 2015.
- 1256 1257 Weisheimer, A. and Palmer, T.N.: On the reliability of seasonal climate forecasts, Journal of The Royal Society
- Interface, 11, 20131162, https://doi.org/10.1098/rsif.2013.1162, 2014.
- Yapo, P.O., Gupta, H.V. and Sorooshian, S.: Automatic calibration of conceptual rainfall-runoff models:
- 1258 1259 1260 sensitivity to calibration data, Journal of Hydrology, 181, 23-48, https://doi.org/10.1016/0022-1694(95)02918-
- 1261 Yoe, C.E.: Principles of risk analysis: decision making under uncertainty, Boca Raton, Fl: Crc Press, Taylor
- 1262 And Francis, 2016.
- 1263 Yossef, N.C., Winsemius, H., Weerts, A., van Beek, R. and Bierkens, M.F.P.: Skill of a global seasonal
- 1264 streamflow forecasting system, relative roles of initial conditions and meteorological forcing, Water Resources
- 1265 Research, 49, 4687–4699, https://doi.org/10.1002/wrcr.20350, 2013.
- 1266 Yuan, X. and Wood, E.F.: Downscaling precipitation or bias-correcting streamflow? Some implications for
- 1267 coupled general circulation model (CGCM)-based ensemble seasonal hydrologic forecast, Water Resources
- Research, 48, 1–7, https://doi.org/10.1029/2012WR012256, 2012. 1268

Formatted: English (United Kingdom)

Formatted: Justified