

# Skill of seasonal flow forecasts at catchment scale: an assessment across South Korea

Yongshin Lee<sup>1</sup>, Francesca Pianosi<sup>1</sup>, Andres Peñuela<sup>2</sup>, Miguel Angel Rico-Ramirez<sup>1</sup>

<sup>1</sup> School of Civil, Aerospace and Design Engineering, University of Bristol, Bristol, BS8 1TR, UK

<sup>2</sup> Department of Agronomy, Unidad de Excelencia María de Maeztu, University of Cordoba, Cordoba, 14071, Spain

**Correspondence:** Yongshin Lee (yongshin.lee@bristol.ac.uk)

## Abstract.

Recent advancements in numerical weather predictions have improved forecasting performance at longer lead times. Seasonal weather forecasts, providing predictions of weather variables for the next several months, have gained significant attention from researchers due to their potential benefits for water resources management. Many efforts have been made to generate Seasonal Flow Forecasts (SFFs) by combining seasonal weather forecasts and hydrological models. However, producing SFFs with good skill at a finer catchment scale remains challenging, hindering their practical application and adoption by water managers. Consequently, water management decisions, both in South Korea and numerous other countries, continue to rely on worst-case scenarios and the conventional Ensemble Streamflow Prediction (ESP) method.

This study investigates the potential of SFFs in South Korea at the catchment scale, examining 12 reservoir catchments of varying sizes (ranging from 59 to 6648 km<sup>2</sup>) over the last decade (2011-2020). Seasonal weather forecasts data (including precipitation, temperature and evapotranspiration) from the European Centre for Medium-Range Weather Forecasts (ECMWF system5) is used to drive the Tank model (conceptual hydrological model) for generating the flow ensemble forecasts. We assess the contribution of each weather variable to the performance of flow forecasting by isolating individual variables. In addition, we quantitatively evaluate the overall skill of SFFs, representing the probability of outperforming the benchmark (ESP), using the Continuous Ranked Probability Skill Score (CRPSS). Our results highlight that precipitation is the most important variable in determining the performance of SFFs, and temperature also plays a key role during the dry season in snow-affected catchments. Given the coarse resolution of seasonal weather forecasts, a linear scaling method to adjust the forecasts is applied, and it is found that bias correction is highly effective in enhancing the overall skill. Furthermore, bias corrected SFFs have skill with respect to ESP up to 3 months ahead, this being particularly evident during abnormally dry years. To facilitate future applications in other regions, the code developed for this analysis has been made available as an open-source Python package.

**Keywords:** Seasonal weather forecasts, Seasonal flow forecasts, Skill assessment, Ensemble Streamflow Prediction, CRPSS, Linear scaling

## 1. Introduction

Over the last decade, numerical weather prediction systems have improved their forecasting performance at longer lead times, ranging from 1 to several months ahead (Alley et al., 2019; Bauer et al., 2015). The water management sector may benefit considerably from these advances. In particular, predictions of weather variables such as precipitation and temperature several months ahead ('seasonal weather forecasts' from now on) might be exploited to anticipate upcoming dry periods and implement management strategies for mitigating future water supply deficits (Soares and Dessai, 2016).

To increase relevance for water resource management, seasonal weather forecasts can be translated into Seasonal Flow Forecasts (SFFs) via a hydrological model. SFFs can be provided and evaluated at different temporal and spatial resolutions: a coarser resolution, e.g., magnitude of total next-month runoff over a certain region (Arnal et al., 2018; Prudhomme et al., 2017) or a finer resolution, e.g., daily/weekly flow at a particular river section over the next month (Crochemore et al., 2016; Lucatero et al., 2018). This distinction is important here because coarser resolution SFFs can only be applied to inform water management in a qualitative way, whereas finer resolution SFFs can also be used to force a water resource system model for a quantitative appraisal of different management strategies. Proof-of-principle examples of the latter approach are provided by Boucher et al. (2012), Chiew et al. (2003), and Peñuela et al. (2020). These papers have demonstrated, through model simulations, the potential of using SFFs to improve the operation of supply reservoirs (Peñuela et al., 2020), irrigation systems (Chiew et al., 2003) and hydropower systems (Boucher et al., 2012).

Formatted: Superscript

54 Obviously, generating SFFs with good skill at finer scales is challenging and the lack of forecast performance is  
55 often cited as a key barrier to real-world applications of SFFs by water managers (Jackson-Blake et al., 2022;  
56 Soares and Dessai, 2016; Whateley et al., 2015). In practice, if a Water Resource System (WRS) model is used to  
57 simulate and compare different operational decisions, this is done by forcing the WRS model against a repeat of  
58 a historical low flow event ("worst-case" scenario) (Yoe, 2019) or against the Ensemble Streamflow Prediction  
59 (ESP). ESP is a widely used operational forecasting method whereby an ensemble of flow forecasts is generated  
60 by forcing a hydrological model with historical meteorological observations (Baker et al., 2021; Day, 1985). Since  
61 the hydrological model is initialised at current hydrological conditions, ESP is expected to have a certain level of  
62 performance, particularly in 'long-memory' systems where the impact of initial conditions last over long time  
63 periods (Li et al., 2009). Previous simulation studies that examined the use of SFFs to enhance the operation of  
64 water resources systems (e.g., Peñuela et al., 2020, as cited above) did indeed show that ESP serves as a 'hard-to-  
65 beat' benchmark. Similar to other countries, in South Korea, the worst-case scenario and ESP are used for  
66 informing water management activities, whereas SFFs are not currently applied. Before the use of SFFs can be  
67 proposed to practitioners, it is thus crucial to understand the skill of such products with respect to ESP.

Deleted: ing

68 Numerous studies have been conducted on the skill of SFFs in different regions of the world. Some of these studies  
69 focused on the 'theoretical skill', which is determined by comparing SFFs with pseudo-observations produced by  
70 the same hydrological model when forced with observed temperature and precipitation. This experimental set-up  
71 enables to isolate the contribution of the weather forecast skill to the flow forecast skill, regardless of structural  
72 errors that may be present in the hydrological model. In general, most studies have found that the theoretical skill  
73 of SFFs may be only marginally better than that of ESP in specific regions and lead time. For example, Yoseff et  
74 al. (2013) analysed multiple large river basins worldwide and found that SFFs generally perform worse than ESP.  
75 Likewise, the findings of Greuell et al. (2019) indicated that SFFs are more skillful than ESP for the first lead  
76 month only. Across Europe, the theoretical skill of SFFs was found to be higher than ESP in coastal and  
77 mountainous regions (Greuell et al., 2018).

Deleted: were

78 Although important to how the information content of seasonal weather forecasts vary across regions with  
79 different climatic characteristics, from a water management perspective, the theoretical skill may not be the most  
80 appropriate metric, as it reflects the performance within the modelled environment (Pechlivanidis et al., 2020)  
81 rather than the real-world. The 'actual skill', which is determined by comparing SFFs to flow observations, would  
82 be more informative for water managers to decide on whether to use SFFs, and when. Previous studies that  
83 investigated the actual skill showed that, as expected, the actual skill is lower than the theoretical skill due to  
84 errors in the hydrological model and in the weather input observations (Greuell et al., 2018; van Dijk et al., 2013).  
85 In addition, due to the coarse horizontal resolution of seasonal weather forecasts, the forecast skill can be  
86 significantly improved through bias correction, particularly of precipitation forecasts (e.g., Crochemore et al.,  
87 2016; Lucatero et al., 2018; Tian et al., 2018). However, even after bias correction, SFFs were found unable to  
88 surpass ESP in many previous applications (e.g., Crochemore et al., 2016; Greuell et al., 2019; Lucatero et al.,  
89 2018).

Deleted: i

Deleted: (around 1°×1°)

90 Previous studies reviewed above have mainly used the seasonal weather forecasts provided by the European  
91 Centre for Medium-Range Weather Forecasts (ECMWF). Here, it is important to note that the majority of these  
92 studies have utilized ECMWF's system 3 (e.g., Yossef et al., 2013) or 4 (e.g., Crochemore et al., 2016; Greuell et  
93 al., 2019; Lucatero et al., 2018; Tian et al., 2018). A few studies comparing the performance of SFFs and ESP  
94 have been conducted based on ECMWF's cutting-edge forecasting system 5, which became operational in  
95 November 2017. These include Peñuela et al., 2020 and Ratri et al., 2023, which however did not analyse the skill  
96 of SFFs in much detail but rather focused on their operational implementation. Given that the upgrade of  
97 forecasting system can lead to substantial enhancement in the performance (e.g., Johnson et al., 2019; Köhn-Reich  
98 and Bürger, 2019), it is interesting to assess whether improved skill of weather forecasts delivered by the System  
99 5 translates into improved skill of flow forecasts.

100 Our previous research (Lee et al., 2023) on the skill of seasonal precipitation forecasts across South Korea showed  
101 that, among various forecasting centres, ECMWF provides the most skillful seasonal precipitation forecasts,  
102 outperforming the climatology (based on historical precipitation observations). This is particularly evident during  
103 the wet season (June to September) and in dry years, where skill can also be high at longer lead times beyond the  
104 first month.

105 Building on these previous findings, this study aims to investigate the performance of SFFs compared to ESP in  
106 predicting flow. Specifically, we focus on 12 catchments of various sizes (from 59 to 6648 km<sup>2</sup>) which include  
107 the most important multipurpose reservoirs across South Korea, and where the use of SFFs may be considered for  
108 assisting operational decisions and mitigating impacts of droughts. Given this practical long-term goal, our study  
109 focuses on assessing the 'overall skill', which represents the long-term probability that SFFs outperform the  
110 benchmark (ESP) when comparing the flow forecasts with historical flow observations. As a hydrological model,  
111 we use the lumped Tank model (Sugawara et al., 1986) which is the rainfall-runoff model currently in use for the

Deleted: Given the significant correlation between precipitation and flow in the country (Ministry of land, infrastructure, and transportation, 2016), South Korea is an interesting test bed to investigate if the skill of seasonal precipitation forecasts is mirrored into the skill of flow forecasts at the catchment scale.

Deleted: Specifically

Deleted: in

Deleted: we

Formatted: Space Before: 0 pt


124 national water management and planning. For all catchments, we briefly analyse the hydrological model  
 125 performance, and also investigate which weather forcing input (precipitation, temperature, and potential  
 126 evapotranspiration) contributes most to the performance of SFFs across different catchments, before and after bias  
 127 correction. Finally, we look at how the overall skill varies across seasons, years, and catchment, to draw  
 128 conclusions on when and where SFFs may be more informative than ESP for practical water resources  
 129 management. In doing so, we develop a workflow for SFFs analysis implemented in a Python Jupyter Notebook,  
 130 which can be utilized by other researchers for evaluating and testing SFFs in various regions.

## 131 2. Material and methodology

### 132 2.1 Study site and data

#### 133 2.1.1 Study site

134 The spatial scope of this study is defined as the catchments upstream of 12 multi-purpose reservoirs across South  
 135 Korea. While there are 20 multi-purpose reservoirs nationwide (K-water, 2022), we have specifically selected 12  
 136 reservoirs with at least 10 years of flow observation and no external flows from other rivers or reservoirs. The  
 137 locations of the catchments and the mean annual precipitation, temperature, and potential evapotranspiration  
 138 (PET) are shown in Figure 1(a-c). The weather data for the selected reservoir catchments is reported in Table 1.

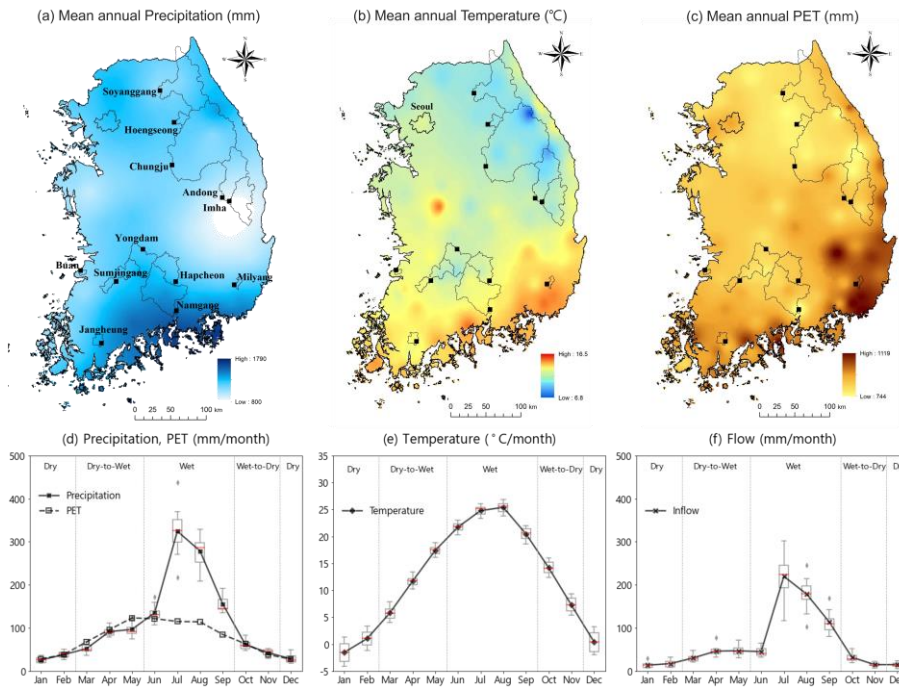

139  
 140 **Figure 1: Top row: mean annual (a) precipitation, (b) temperature and (c) PET across South Korea over the period**  
 141 **1967-2020. Black lines are the boundaries of the 12 reservoir catchments analysed in this study (all maps obtained by**  
 142 **interpolating point measurements using the inverse distance weighting method). Bottom row: (d) cumulative monthly**  
 143 **precipitation and PET, (e) mean monthly temperature and (f) cumulative monthly flow. These three variables are**  
 144 **averaged over the 12 reservoir catchments from 2001 to 2020. Box plots show the inter-catchment variability.**

145 **Table 1. Characteristics of the 12 multipurpose reservoirs (from North to South) and the catchments they drain (K-**  
 146 **water, 2022). Tmin and Tmax represent mean monthly minimum and maximum temperature averaged over 2001-**  
 147 **2020, all other meteorological variables (P: precipitation, T: temperature, PET: potential evapotranspiration) are**  
 148 **annual averages over the same period.**

Catchment	Soyanggang	Hoengseong	Chungju	Andong	Imha	Yongdam	Buan	Sumjingang	Hapcheon	Milyang	Namgang	Jangheung	
Area (km <sup>2</sup> )	2703	209	6648	1584	1361	930	59	763	925	95	2285	193	
P (mm)	1220	1336	1197	1079	956	1317	1292	1343	1279	1375	1477	1439	
T (°C)	10.8	10.9	11.1	11.1	12.2	11.8	13.5	12.6	12.8	14.2	13.5	13.8	
Mean annual	T min	-4.2 (Jan.)	-4.0 (Jan.)	-3.2 (Jan.)	-3.5 (Jan.)	-1.6 (Jan.)	-2.3 (Jan.)	-0.1 (Jan.)	-1.5 (Jan.)	-0.8 (Jan.)	1.0 (Jan.)	0.4 (Jan.)	1.3 (Jan.)
	T max	24.0 (Aug.)	24.1 (Aug.)	25.9 (Aug.)	23.8 (Aug.)	25.1 (Aug.)	24.8 (Aug.)	26.7 (Aug.)	25.8 (Aug.)	25.5 (Aug.)	26.8 (Aug.)	26.0 (Aug.)	26.2 (Aug.)
	PET (mm)	874	870	881	896	947	884	960	919	933	993	952	896

149 Figure 1(d-f) shows the monthly precipitation and PET (d), temperature (e) and flow (e) averaged over the 12  
150 selected catchments from 2001 to 2020. Generally, the catchments located in the Southern region exhibit higher  
151 mean annual precipitation, temperature, and PET. In order to examine how the skill of seasonal weather and flow  
152 forecasts vary across a year, we divide the year into four seasons based on monthly precipitation (Lee et al., 2023):  
153 dry (December to February), dry-to-wet transition (March to May), wet (June to September), wet-to-dry transition  
154 (October to November). As shown in this figure, most of the total annual precipitation (and the corresponding  
155 flow) occurs during the hot and humid wet season, while the dry season is characterized by cold and dry  
156 conditions. Figure 1(d-f) also shows high inter-catchment variability during the wet season in both precipitation  
157 (d) and flow (f), whereas the inter-catchment variability in temperature (e) is more obvious during the dry season.  
158 Additionally, there is a high inter-annual variability of precipitation and flow in South Korea, attributed to the  
159 impacts of typhoons and monsoons (Lee et al., 2023).

Deleted: changes in

Deleted: varies

Deleted: a

Deleted: The high inter-annual variability of precipitation and flow is a feature of South Korea's climate and is attributed to the impacts of typhoons and monsoons (Lee et al., 2023).

### 160 2.1.2 Hydrologic data and seasonal weather forecasts

161 Precipitation, temperature, and potential evapotranspiration are the key variables required to simulate flow, using  
162 a hydrological model. To this end, daily precipitation data from 1318 in-situ stations from the Ministry of  
163 Environment, the Korea Meteorologic Administration (KMA), and the national water resources agency (K-water)  
164 (Ministry of Environment, 2021), and daily temperature data from 683 in-situ stations from the KMA were  
165 obtained. Both precipitation and temperature data cover the period from 1967 to 2020 (see Figure 1). Potential  
166 evapotranspiration (PET) data was computed using the standardized Penman-Monteith method suggested by UN  
167 Food and Agriculture Organization (Allen et al., 1998). The precipitation and temperature measurements have  
168 been quality-controlled by the Ministry of Environment. We used the Thiessen polygon method to calculate the  
169 catchment average precipitation and temperature.  
170 The flow data used in this study refers to the flow into the reservoir from their upstream catchment (see Table 1  
171 and Figure 1). K-water generates daily inflow data through a water balance equation, which takes into account the  
172 daily changes in reservoir volume (from storage-elevation curve) caused by the water level fluctuations and  
173 releases from the reservoir. However, to date, reservoir evaporation has not been considered in the flow estimation  
174 process. In this study, quality-controlled daily flow data for each reservoir produced by K-water is used.

Deleted: s

Deleted: produced by

Deleted: generated by

Formatted: normaltexttrun, Font: Times New Roman, 10 pt, Font colour: Auto, Pattern: Clear (White)

Formatted: normaltexttrun, Font: 12 pt, Pattern: Clear (White)


Deleted: water supplies

175 Several weather forecasting centres, including ECMWF, the UK Met Office and the German Weather Service,  
176 provide seasonal weather forecasts datasets through the Copernicus Climate Data Store (CCDS). According to  
177 our previous study (Lee et al., 2023), ECMWF was found to be the most skilful provider of seasonal precipitation  
178 forecasts for South Korea. Since the precipitation is one of the most important weather forcings in hydrological  
179 forecasting (Kolachian and Saghafian, 2019), we have utilized the seasonal weather forecasts datasets from  
180 ECMWF System 5 (Johnson et al., 2019) in this study. Since 1993, ECMWF has been providing 51 ensemble  
181 forecasts (a set of multiple forecasts equally likely) on a monthly basis (25 ensembles prior to 2017) with a  
182 horizontal resolution of  $1^\circ \times 1^\circ$  and daily temporal resolution up to 7 months ahead. In this study, the time period  
183 from 1993 to 2020 was selected and the ensemble forecasts for the selected catchments have been downloaded  
184 from the CCDS. Here, we utilized data from 1993 to 2010 to generate bias correction factors, and data from 2011  
185 to 2020 to assess the skill (see Figure S1 in the supplementary material).

## 186 2.2 Methodology

187 The methodology of our analysis is summarized in the schematic diagram shown in Figure 2. Firstly, we compiled  
188 seasonal weather forecasts ensemble from ECMWF for precipitation (P), temperature (T), and PET over the 12  
189 reservoirs for 10 years from 2011 to 2020. To downscale the datasets, a linear scaling method was applied to each  
190 weather forcing (Sec. 2.2.1). Secondly, we estimated the parameters of the hydrological model and validated its  
191 performance (Sec. 2.2.2). Utilizing the seasonal weather forecasts dataset as input data to the hydrological model,  
192 we generated an ensemble of SFFs, and using historical weather observations as input, we produced ESP.  
193 Specifically, to calculate ESP, 45 ensemble members of each weather variable were also selected from historical

204 observations (1966-2010, see Figure S1). Each ensemble member represents the simulated flow using a  
 205 hydrological model initialized with observed meteorological data to simulate current conditions and forced by  
 206 historical meteorological observations for the forecasting period. The Continuous Ranked Probability Score  
 207 (CRPS) and the Continuous Ranked Probability Skill Score (CRPSS) were applied (Sec. 2.2.3) to calculate the  
 208 absolute performance (score) of each forecast product (Sec. 3.1 and 3.2) and the relative performance (overall  
 209 skill) of SFFs with respect to ESP (Sec. 3.3, 3.4).

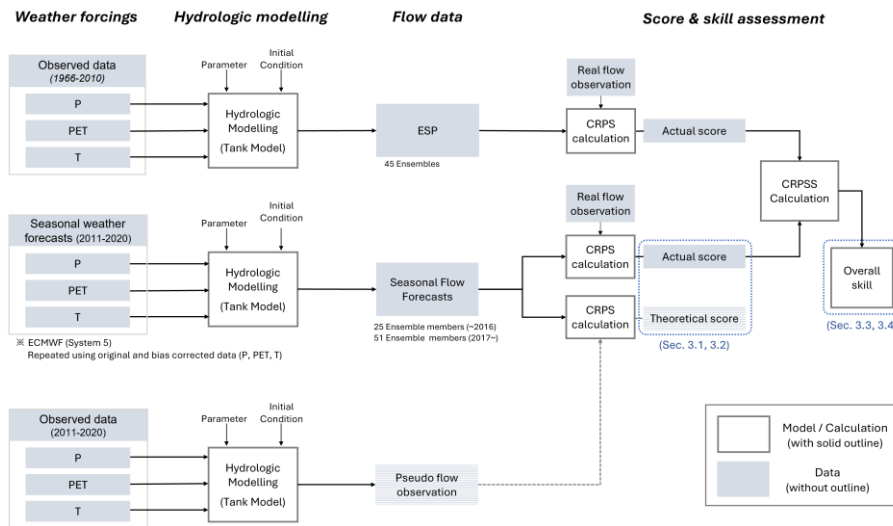

210  
 211 **Figure 2: Schematic diagram illustrating analysis method of the study.**

212 Specifically, in Section 3.1, we analyse the contribution of hydrological modelling uncertainty to the performance  
 213 of SFFs by comparing the actual score, calculated using flow observations, to the theoretical score, calculated  
 214 using pseudo flow observations. Here, pseudo-observation refers to the flow time-series obtained by feeding the  
 215 hydrological model with weather observations, i.e. where errors due to hydrological model are removed. In  
 216 Section 3.2 we investigated which weather variable mostly influences the performance of SFFs. For doing so, we  
 217 first calculated the ‘isolated score’ of the flow forecasts generated by forcing the hydrological model with seasonal  
 218 weather forecasts for one meteorological variable while using observational data for the other two variables. For  
 219 instance, to assess the contribution of precipitation, we calculated the isolated score-P using seasonal precipitation  
 220 forecasts, and observations for temperature and PET. Then, we computed the ‘integrated score’ using seasonal  
 221 weather forecasts for all three variables and determined the ‘relative scores’ for each variable as the ratio of the  
 222 isolated score over the integrated score. This workflow is illustrated in Figure S2 (supplementary material). In  
 223 Sections 3.3 to 3.5, we examined the regional and seasonal variations and the characteristics of overall skill under  
 224 extreme climate conditions.

225 **2.2.1 Bias correction (Statistical downscaling)**

226 The seasonal weather forecasts datasets from CCDS have a spatial resolution of  $1^{\circ} \times 1^{\circ}$ , which is too coarse for the  
 227 catchment-scale analysis. Previous studies also have reported that seasonal weather forecasts generated from  
 228 General Circulation Models contain systematic biases and this can cause forecast uncertainty (Manzanas et al.,  
 229 2017; Maraun, 2016; Tian et al., 2018). Moreover, the usefulness of bias correction in enhancing the forecast skill  
 230 has been shown in many previous studies (Crochemore et al., 2016; Ferreira et al., 2022, Pechlivanidis et al.,  
 231 2020; Tian et al., 2018). Hence, it is imperative to investigate the potential enhancement in the skill of hydrological  
 232 forecasts resulting from the bias correction of weather forcings.  
 233 Numerous bias correction methods have been developed including linear scaling method, local intensity scaling  
 234 and quantile mapping (Fang et al., 2015; Shrestha et al., 2017). Thanks to its simplicity and low computation cost  
 235 (Melesse et al., 2019), the linear scaling method is widely adopted. Despite its simplicity, this method has  
 236 demonstrated practical usefulness in various studies (Azman et al., 2022; Crochemore et al., 2016; Shrestha et al.,

Deleted: d  
 Deleted:  
 Deleted: which is  
 Deleted: structure

241 2017), including our previous study on seasonal precipitation forecasts across South Korea (Lee et al., 2023).  
 242 Therefore, the linear scaling method was utilized in this study.  
 243 Previous studies found that additive correction is preferable for temperature whereas multiplicative correction is  
 244 preferable for variables such as precipitation, evapotranspiration, and solar radiation (Shrestha et al., 2016).  
 245 Consequently, the equations for linear scaling method for each variable can be expressed as:

$$246 P_{forecasted}^* = P_{forecasted} \cdot (b_P)_m = P_{forecasted} \cdot \left[ \frac{\mu_m(P_{observed})}{\mu_m(P_{forecasted})} \right] \quad (1)$$


$$247 PET_{forecasted}^* = PET_{forecasted} \cdot (b_{PET})_m = PET_{forecasted} \cdot \left[ \frac{\mu_m(PET_{observed})}{\mu_m(PET_{forecasted})} \right] \quad (2)$$

$$248 T_{forecasted}^* = T_{forecasted} + (b_T)_m = T_{forecasted} + [\mu_m(T_{observed}) - \mu_m(T_{forecasted})] \quad (3)$$

249 where  $X_{forecasted}^*$  is the bias corrected forecast variable ( $X$ ) at daily time scale,  $Y_{forecasted}$  is the original forecast  
 250 variable ( $Y$ ) before bias correction,  $(b_Y)_m$  is the bias correction factors for each variable at month  $m$ .  $\mu_m$  represents  
 251 monthly mean, and  $Y_{observed}$  is the observed daily data for the variable ( $Y$ ). In this study, daily precipitation  
 252 forecasts were bias corrected using the monthly bias correction factor ( $b_m$ ) for each month ( $m = 1$  to 12). The bias  
 253 correction factor was computed using the observations and original forecast datasets from 1993 to 2010, and these  
 254 were then applied to adjust each seasonal weather forecast for later years (2011 to 2020).

### 255 2.2.2 Hydrologic modelling

256 The Tank model was first developed by Sugawara of Japan in 1961 (Sugawara et al., 1986; Sugawara, 1995) and  
 257 has become a widely used conceptual hydrologic model in many countries (Goodarzi et al., 2020; Ou et al. 2017).  
 258 A modified version of the Tank model, incorporating soil moisture structures and snowmelt modules, is commonly  
 259 used in South Korea for long-term water resources planning and management purposes due to its good  
 260 performance (Kang et al., 2004; Lee et al., 2020). As shown in Figure 3, the modified Tank model used in this  
 261 study comprises four storage tanks representing the runoff and baseflow in the target catchment (Phuong et al.,  
 262 2018; Shin et al., 2010) and incorporates a water-balance module suggested by the United States Geological  
 263 Survey (McCabe and Markstrom, 2007).

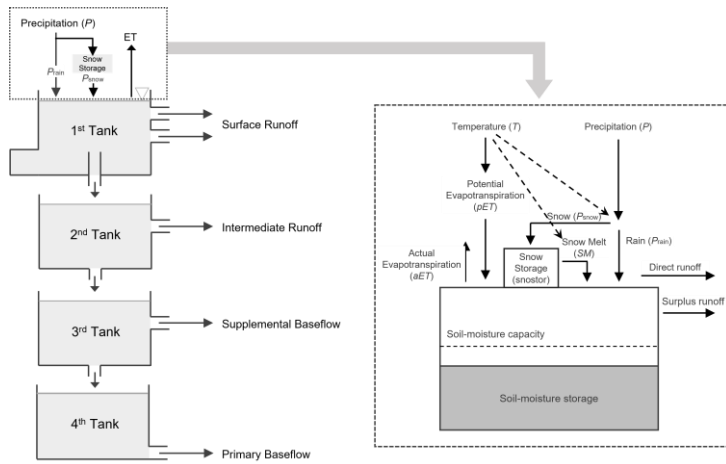

264

265 **Figure 3: The structure of modified Tank model (Left) and its water -balance module (Right)**

266 This model has 21 parameters (see Table S1 in the supplementary material), which were calibrated based on  
 267 historical observations. We calibrated the model using observations for the period from 2001 to 2010, and the  
 268 validation was done using the time period 2011 to 2020. To estimate the model parameters, the Shuffled Complex  
 269 Evolution global optimization algorithm (SCE-UA), developed at the University of Arizona (Duan et al., 1992,  
 270 1994), is utilized. This algorithm has widely been used for the calibration of hydrologic models and has shown

Deleted: s

Deleted: s

Deleted: higher

274 more robust and efficient performance compared to many traditional optimization methods such as Genetic  
 275 Algorithm, Differential Evolution, and Simulated Annealing (Rahnamay-Naeini et al., 2019; Yapo et al., 1996).  
 276 The following Objective Function (OF) proposed by Sugawara (Sugawara et al., 1986), is applied for the SCE-  
 277 UA algorithm, because a previous study demonstrated that this objective function generally shows superior results  
 278 in calibrating the Tank model in South Korean catchments with calibration periods longer than 5 years (Kang et  
 279 al., 2004).

$$280 \quad OF = \sum_{t=1}^N |q_t^{obs} - q_t^{sim}| / q_t^{obs} \quad (4)$$

281 where  $t$ ,  $N$  represent time (in days) and total number of time steps,  $q_t^{obs}$  and  $q_t^{sim}$  represent the observed and  
 282 simulated flow at time  $t$ , respectively. The optimal parameter set is the one that produces the lowest value from  
 283 the objective function.

284 In order to evaluate the model performance in diverse perspectives, we used three different evaluation indicators:  
 285 Nash-Sutcliffe model Efficiency coefficient ( $NSE$ ), Percentage Bias ( $PBIAS$ ), and Ratio of Volume ( $ROV$ ). The  
 286 calculation of each indicator was carried out as described by the following equations.

$$287 \quad NSE = 1 - \sum_{t=1}^N (q_t^{obs} - q_t^{sim})^2 / \sum_{t=1}^N (q_t^{obs} - q_{mean}^{obs})^2 \quad (5)$$

$$288 \quad PBIAS = \sum_{t=1}^N (q_t^{obs} - q_t^{sim})^2 / \sum_{t=1}^N q_t^{obs} \times 100 \quad (6)$$

$$289 \quad ROV = \sum_{t=1}^N q_t^{sim} / \sum_{t=1}^N q_t^{obs} \quad (7)$$

290 where  $t$ ,  $N$ ,  $q_t^{obs}$  and  $q_t^{sim}$  are as defined in Eq.4, and  $q_{mean}^{obs}$  represents observed mean flow across the total  
 291 number of time steps ( $N$ ).

292 The  $NSE$  can range from negative infinity to 1. A value of 1 indicates a perfect correspondence between the  
 293 simulated and the observed flow.  $NSE$  values between zero and 1 are generally considered acceptable levels of  
 294 performance (Moriasi et al., 2007).  $PBIAS$  is a metric used to measure the average deviation of the simulated  
 295 values from the observation data. The optimal value of  $PBIAS$  is 0, and low-magnitude values indicate accurate  
 296 simulation. Positive (negative) values of  $PBIAS$  indicate a tendency for overestimation (underestimation) in the  
 297 hydrologic modelling (Gupta et al., 1999).  $ROV$  represents the ratio of total volume between the simulated and  
 298 observed flow. An optimal  $ROV$  value is 1, and a value greater (less) than 1 suggests overestimation  
 299 (underestimation) of total flow volume (Kang et al., 2004).

### 300 2.2.3 Score and skill assessment

301 As a score metric, we adopted the CRPS developed by Matheson and Winkler (1976) which measures the  
 302 difference between the cumulative distribution function of the forecast ensemble and the observations. The CRPS  
 303 has the advantage of being sensitive to the entire range of the forecast and being clearly interpretable, as it is equal  
 304 to the Mean Absolute Error for a deterministic forecast (Hersbach, 2000). For these reasons, it is a widely used  
 305 metric to assess the performance of ensemble forecasts (Leutbecher and Haiden, 2020). The CRPS can be  
 306 calculated as:

$$307 \quad CRPS = \int [F(x) - H(x \geq y)]^2 dx \quad (8)$$

308 where  $F(x)$  represents the cumulative distribution of SFFs ensemble,  $x$  and  $y$  are respectively the forecasted and  
 309 observed flow,  $H$  is called the Heaviside function, and is equal to 1 when  $x \geq y$  and 0 when  $x < y$ . If SFFs were  
 310 perfect, i.e., all the ensemble members would exactly match the observations, and CRPS would equal to 0.  
 311 Conversely, a higher CRPS indicates a lower performance, as it implies that the forecast distribution is further  
 312 from the observation. Note that the CRPS measures the absolute performance (score) of forecast without  
 313 comparing it to a benchmark.

314 Along with the CRPS, we also employed the CRPSS, which presents the forecast performance in a relative manner  
 315 by comparing it to a benchmark forecast. It is defined as the ratio of the forecast and benchmark score and is  
 316 expressed as follows:

$$317 \quad CRPSS = 1 - \frac{CRPS^{Sys}}{CRPS^{Ben}} \quad (9)$$

Deleted: shows

Deleted: indicator

Deleted: ed

Deleted: the

Deleted: be

Deleted: the

Deleted: it

Deleted: ing method

where  $CRPS^{Sys}$  is the CRPS of the forecasting system (SFFs in our case) and  $CRPS^{Ben}$  is the CRPS of the benchmark. The values of CRPSS can range from  $-\infty$  to 1. A CRPSS value between 0 to 1 indicates that the forecasting system has skill with respect to the benchmark. Conversely, when the CRPSS is negative, i.e., from  $-\infty$  to 0, the system has a lower performance than the benchmark. Here, we utilized ESP as a benchmark due to its extensive application in flow forecasting (Pappenberger et al., 2015; Peñuela et al., 2020) and its computational efficiency (Baker et al., 2021; Harrigan et al., 2018). ESP is generated using the Tank model fed with historical daily meteorological records from 1966 to 2010. As this period covers 45 years, ESP is composed of 45 members for each catchment.

Since the CRPSS ranges from  $-\infty$  to 1, simply averaging the CRPSS values over a period can result in low or no skill due to the presence of few extremely negative values. To address this issue, here we employed the 'overall skill' metric introduced by Lee et al. (2023). The overall skill represents the probability with which a forecasting system (in our case, the SFFs) outperforms the benchmark (i.e., has CRPSS greater than 0) over a specific period. It is calculated as:

$$\text{Overall skill (\%)} = \frac{\sum_{y=1}^{N_y} [H(CRPSS)(y)]}{N_y} \times 100 (\%) \quad (10)$$

where  $N_y$  is the total number of years, the Heaviside function  $H$  is equal to 1 when  $CRPSS(y) > 0$  (SFFs have skill with respect to ESP in year  $y$ ) and 0 when  $CRPSS(y) \leq 0$  (ESP outperforms SFFs). If the overall skill is greater than 50%, we can conclude that SFFs generally have skill over ESP across the period.

### 3. Results

#### 3.1 Contribution of hydrological model to the performance of SFFs

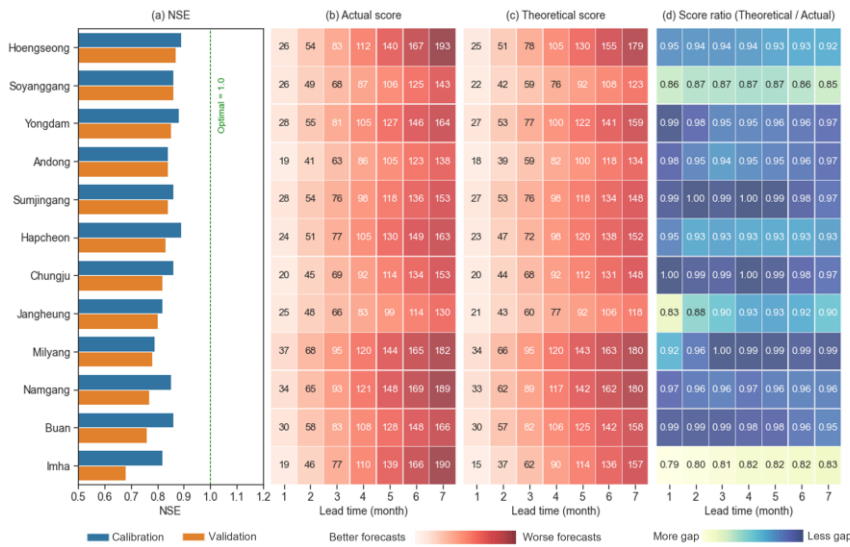


Figure 4. (a) Nash-Sutcliffe Efficiency (NSE) of the hydrological models for the 12 catchments analysed in this study; (b) actual score and (c) theoretical score of SFFs, (d) score ratio (theoretical / actual) in terms of mean CRPS at different lead times (x-axis) (the scores are calculated before the bias correction of weather forcings). The actual score is determined by comparing SFFs to flow observations. The theoretical score is determined by comparing SFFs to pseudo-observations produced by the same hydrological model forced with observed precipitation, temperature and PET.

Figure 4(a) shows the NSE of the modified Tank model for each catchment during the calibration period 2001-2010 (blue bars) and the validation period 2011-2020 (orange bars). As seen in this figure, the NSE values for the 12 catchments are generally high (within the range of 0.7 to 0.9) during both the calibration and validation periods,

Deleted: gives

Deleted: s

Deleted: s

Deleted: indicator



358 and the relative difference in performance between the two periods is small for all catchments. Specifically, the  
359 NSE results indicate a 'good' performance through comparative analysis (Chiew and McMahon, 1993; Moriasi et  
360 al., 2015). However, the last three catchments (Namgang, Buan and Imha) exhibit a relatively greater gap between  
361 calibration and validation periods. Among all 12 catchments, these three exhibit the most distinctive hydrological  
362 characteristics: Imha is the driest, while Namgang is the wettest catchment, and Buan is located along the coast,  
363 with the smallest catchment area. A detailed model performance evaluation, including other metrics such as  
364 PBIAS and ROV (refer to Figure S3 in the supplementary material), also supports this result. Overall, Figure 4  
365 demonstrates that the Tank model utilized in this study shows an excellent performance in simulating flow, with  
366 relatively higher modelling challenges observed in those three catchments.  
367 Figures 4(b-c) represent the actual and theoretical scores (mean CRPS) over the period 2011-2020. Again, these  
368 are calculated by comparing the simulated flows with the observed flows (actual score), and with pseudo-  
369 observations (theoretical score), respectively. Since the CRPS is computed based on accumulated monthly flow  
370 at a given lead time, forecast errors also accumulate over time. Therefore, both scores deteriorate considerably as  
371 the lead time increases. Generally, the theoretical scores are slightly smaller than the actual scores, but the  
372 difference is marginal.

373 To facilitate comparison, the ratio between the actual score and theoretical score is shown in Figure 4(d). For most  
374 catchments, the ratio values are close to 1, confirming the small gap between actual and theoretical score. The  
375 noticeable exception is only seen in Imha catchment, characterised by being the driest among the catchments and  
376 exhibiting the lowest modelling performance (Figure 4(a)).

### 377 3.2 Contribution of weather forcings to the performance of SFFs

378 In this section, we quantify the contribution of each weather forcing forecast to the performance of SFFs, as  
379 measured by the CRPS (see Section 2.2 and Figure S2 in the supplementary material for details on the underpinning  
380 methodology). Figure 5 shows the relative scores for each non-bias corrected weather forcing across all seasons  
381 (a), dry season (b) and wet season (c) at different lead times (1, 3, and 6 months). The relative score is calculated  
382 as the ratio of the integrated score (computed using seasonal weather forecasts for all weather forcings), to the  
383 isolated score (when SFFs are computed using seasonal forecasts for one weather forcing, and observations for  
384 the other two). The closer the isolated score to the integrated score, the larger the contribution of that weather  
385 forcing to the overall performance (or lack of performance) of the SFFs.

386 As shown in Figure 5(a), the contribution of each weather forcing to the performance of SFFs varies with  
387 catchment and lead time, but overall precipitation forecast plays a dominant role. Specifically, the contribution of  
388 precipitation forecast (red) accounts for almost 90% of the integrated score, which is forced by seasonal weather  
389 forecasts for all weather forcings. Meanwhile, PET (orange) and temperature (blue) contribute a similar level,  
390 ranging between 30% and 40%.

391 During the dry season (Figure 5(b)) however, PET and temperature show comparable levels of contribution to  
392 precipitation. This is more evident in the Soyanggang and Hoengseong catchments, which are both located in the  
393 northernmost region of South Korea (see Figure 1). These catchments are characterized by low temperatures and  
394 heavy snowfall in the dry (winter) season. Correct prediction of temperature is thus crucial here as temperature  
395 controls the partitioning of precipitation into rain and snow, and hence the generation of a fast or delayed flow  
396 response. Further analysis (shown in the supplementary material, Figure S4), reveals that temperature forecasts in  
397 these two catchments are consistently lower than observation, which means that the hydrological model classifies  
398 rain as snow for several events, and hence retains that 'snow' in the simulated snowpack which in reality should  
399 produce a flow response. This explains the significant increase in performance when forcing the model with bias  
400 corrected temperature instead (Figure S4(b)).

Deleted: mean


Deleted: i

Deleted: forecasting

Deleted: forecast

Deleted: forecast

Deleted: .

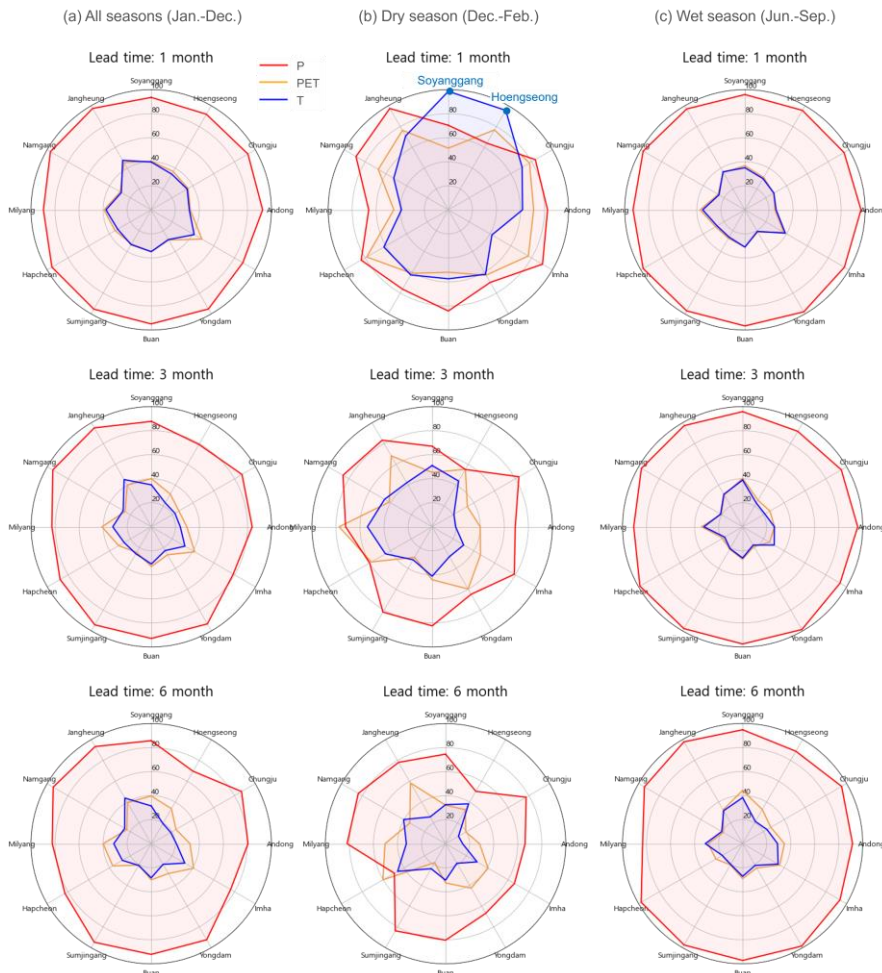


407  
 408 **Figure 5. Relative score (%) of each weather forcings (Precipitation: red, PET: orange, Temperature: blue) before bias**  
 409 **correction to the score of SFFs averaged over 10 years (2011-2020) during (a) all seasons, (b) dry and (c) wet season at**  
 410 **1, 3 and 6 lead months from the top to bottom (Catchments are ordered by their location from the northernmost**  
 411 **(Soyanggang) to the southernmost (Jangheung) in right-angle direction, see Figure 1).**

412 In order to enhance the forecasting performance, we applied bias correction to each weather forcing and re-  
 413 generated SFFs with bias-corrected weather forcings. In most catchments and lead times, the overall skill is  
 414 improved after correcting biases. The overall skill increases by 46% to 54% on average across all seasons, and  
 415 more specifically from 31% to 50% in the dry season and from 54% to 55% in the wet season. The largest increase  
 416 in overall skill is found in the Imha catchment, which had the lowest skill before correcting biases. For a detailed  
 417 account of overall skill before and after bias correction, see Figure S5 and S6 in the supplementary material.

418 Figure 6 illustrates the change in the relative score of each weather forcing after bias correction, focusing on the  
 419 dry season and the first forecasting lead month. One notable finding is that, in the snow-affected catchments  
 420 (Soyanggang and Hoengseong), there is a significant decrease in the relative score of temperature after applying  
 421 bias correction. As shown in detail in Figure S4 in the supplementary material, this is due to the correction of  
 422 systematic underestimation biases in temperature forecasts, which leads to a more correct partitioning of

423 precipitation into snow and rain, and thus better flow predictions. The relative score of the forecasts for all seasons  
 424 and lead times after bias correction is reported in Figure S7 in the supplementary material.

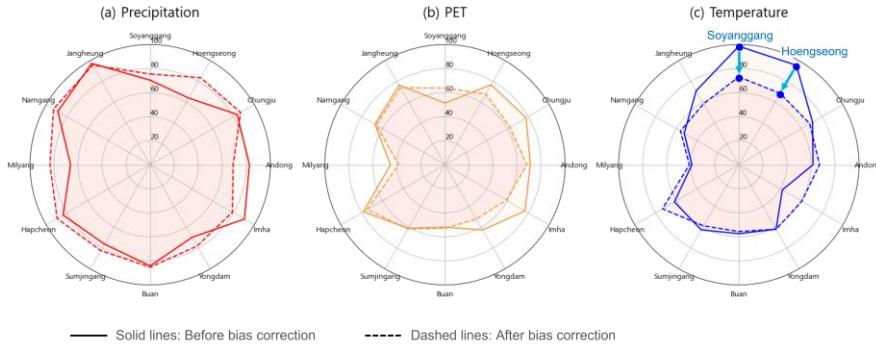


425  
 426 **Figure 6. Relative score (%) of each weather forcings ((a) Precipitation, (b) PET, (c) Temperature), before (solid line)**  
 427 **and after (dashed line) bias correction, to the score of SFFs averaged over 10 years (2011-2020) during the dry season**  
 428 **and first lead month.**

429 **3.3 Comparison between SFFs and ESP across seasons and catchments**

430 In order to comprehensively compare the performance of SFFs and ESP, we employed the overall skill, which  
 431 quantifies the frequency with which SFFs outperform ESP, as outlined in section 2.2.3 (Eq.10). Figure 7 shows  
 432 the seasonal and regional variations of overall skill (after bias correction) for all seasons (a), for the dry season (b)  
 433 and the wet season (c). For each catchment, the results are visualised through a table showing the overall skill at  
 434 lead times of 1 to 6 months. The table cells are coloured in green (pink) when SFFs outperform ESP (ESP  
 435 outperforms SFFs). Yellow colour indicates that the system and benchmark have equivalent performance. In  
 436 principle, this happens when the overall skill is equal to 50%, however in order to avoid misinterpreting small  
 437 differences in overall skill, we classified all cases as equivalent when it is between 45% and 55%. While the choice  
 438 of the range ( $\pm 5\%$ ) is subjective, we find it helpful to assist analysis in avoiding spurious precision in a simple  
 439 and intuitive manner.

Deleted: ts

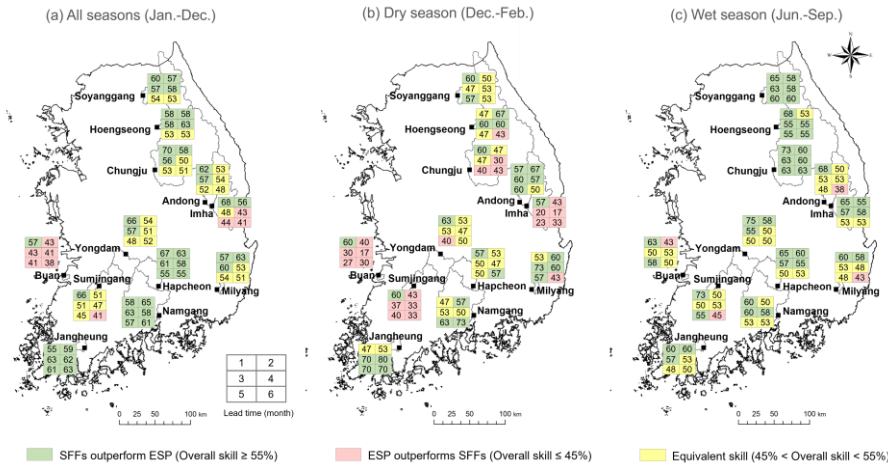


440  
 441 **Figure 7. Map of the overall skill of bias corrected SFFs for 10 years (2011-2020) over (a) all seasons, (b) dry season**  
 442 **and (c) wet season. The colors represent whether SFFs outperform EPS or not for each catchment and lead time (1 to**  
 443 **6 months).**

445 As shown in Figure 7(a), the overall skill of SFFs varies according to the lead time, season and catchment. SFFs  
 446 generally outperform ESP, particularly up to 3 months ahead. At longer lead times, the results vary from catchment  
 447 to catchment. For instance, in some catchments generally located in the Southern region, such as Janheung,  
 448 Namgang, and Hapcheon, SFFs outperform ESP for longer lead times. On the other hand, in some catchments,  
 449 such as Imha and Buan, ESP generally exhibits higher performance than SFFs. In specific, two catchments, Buan,  
 450 which is located in the Western coastal region and has the smallest catchment area, and Imha, which is the driest  
 451 catchment, show the lowest skill. Nevertheless, we could not identify a conclusive correlation between catchment  
 452 characteristics such as size or mean annual precipitation and overall skill.  
 453 Comparing the results for the dry and wet seasons, Figure 7(b-c) shows that SFFs are much more likely to  
 454 outperform ESP in the wet season, and particularly in the catchments in northernmost region. During the dry  
 455 season, overall skill of SFFs is lower, and particularly in the Buan, Imha and Sumjingang catchments SFFs  
 456 outperform ESP only for the first lead month.

### 457 3.4 Comparison between SFFs and ESP in dry and wet years

458 We now assess the influence of exceptionally dry and wet conditions on the overall skill of SFFs. Based on the  
 459 mean annual precipitation across 12 catchments within the period 2011-2020, we classified the years 2015 and  
 460 2017 as dry ( $P < 900$  mm), and the years 2011 and 2020 as wet ( $P > 1500$  mm). Figure 8 shows the overall skill  
 461 of SFFs averaged over 12 catchments for the entire period (a), dry years (b), and wet years (c), during all seasons  
 462 (black solid line), dry (red dashed line) and wet (blue dashed line) seasons, respectively.

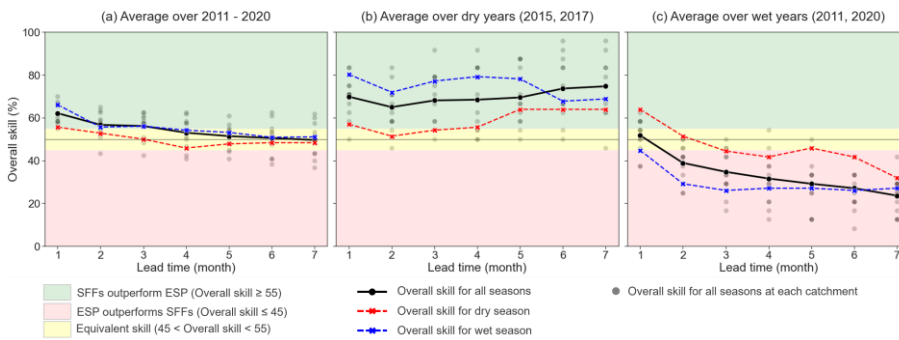

463  
 464 **Figure 8. Overall skill of bias corrected SFFs over 12 catchments averaged over (a) all years (2011 to 2020), (b) dry**  
 465 **years (mean annual  $P < 900$ mm) and (c) wet years (mean annual  $P > 1500$ mm) during all seasons (black lines), dry**  
 466 **seasons (red dashed lines) and wet seasons (blue dashed lines). The pale black points represent the overall skill in each**  
 467 **catchment. Here, mean annual precipitation is averaged across the catchments and years.**

468 Figure 8(a) shows that SFFs generally outperform ESP for lead times of up to 3 months, while maintaining  
 469 equivalent performance levels thereafter. In addition, it is evident that SFFs are more skilful during the wet season  
 470 than during the dry season. In dry years (Figure 8(b)), in contrast to the typical decrease in the overall skill with  
 471 lead time, we find that SFFs maintain a significantly higher skill at all lead times, and particularly during the wet  
 472 season (blue line). On the other hand, in wet years (Figure 8(c)), the overall skill is generally poor, and ESP  
 473 generally has higher performance than SFFs, especially during the wet season.  
 474 Last, we analyse the spatial variability of the overall skill by looking at the spread of individual catchments (grey  
 475 dots). We see that the spread in dry and wet years (Figure 8(b-c)) is larger than in all years (Figure 8(a)). This  
 476 confirms that under extreme weather conditions, the uncertainty and variability in the forecasting performance  
 477 increase depending on the catchment. A more detailed analysis of the overall skill for each catchment (described  
 478 in Figure S8 in the supplementary material) shows that the catchments located in the Southern region consistently  
 479 exhibit higher skill, regardless of lead times and dry/wet years.

### 480 3.5 Example of flow forecasts time-series


481 Figure 9 shows an example of the flow into the Chungju reservoir, which holds the largest storage capacity in  
 482 South Korea. The overall skill of this catchment is the highest for a 1-month lead time; however, from the second  
 483 lead month onward, it shows a moderate level of overall skill compared to other catchments (see Figure S8 in the  
 484 supplementary material). In this section, we compare the observed and forecasted cumulative flow forced by

Deleted: The pale black points represent the overall skill for all seasons at each catchment.

Deleted: across seasons

Deleted: is

489 seasonal weather forecasts (SFFs, green lines) and historical weather records (ESP, pink lines) for lead times of  
 490 1, 3, and 6 months from April during the wettest (2011) and the driest year (2015), respectively.

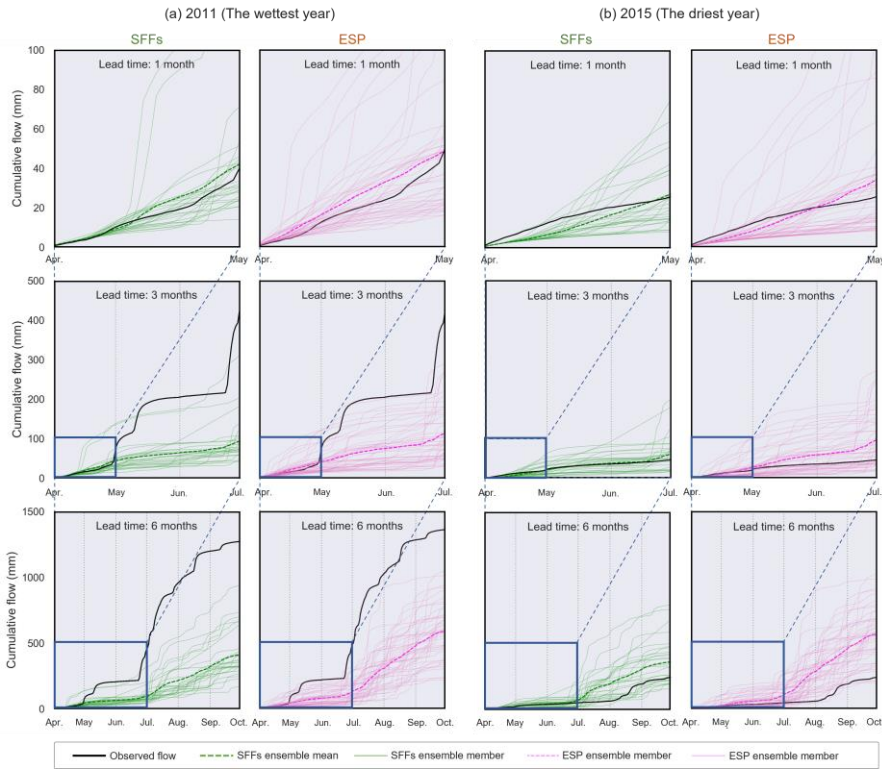

491  
 492 **Figure 9. Observed cumulative flow (black lines) and forecasted cumulative flow representing SFFs after**  
 493 **bias correction (left, green lines) and ESP (right, pink lines) in the Chungju reservoir for 1, 3, and 6 months**  
 494 **of lead times over (a) the wettest year (2011, 1884mm/year), and (b) the driest year (2015, 742mm/year).**

495 In this specific catchment and years, SFFs show equivalent or slightly higher performance than ESP at a 1-month  
 496 lead time. However, as the lead time increases, the performance of both methods tends to deteriorate. Essentially,  
 497 there is an underestimation in the wettest year (2011), and an overestimation in the driest year (2015), at the scale  
 498 of the season. In particular, considerably higher performance was found in SFFs compared to ESP in the driest  
 499 year (Figure 9(b)). On the other hand, it is obvious that both methods have insufficient performance in forecasting  
 500 flow in the wettest year, for lead times of 3 and 6 months.

501 Examining each ensemble member of both SFFs and ESP, we found higher variability in ESP. Furthermore, since  
 502 ESP utilizes the same weather forcings, the forecasted flows are generally similar in terms of its quantity and  
 503 patterns, regardless of the wettest and driest years. Conversely, the forecasted flow ensemble members of SFFs  
 504 show distinctive patterns for each year.

505 Although, these results are confined to a single catchment and specific years, this analysis is valuable in  
 506 quantitatively illustrating the forecasted flow results under dry and wet conditions and different lead times.  
 507 Furthermore, these features are generally shown in other catchments, and align with our previous findings in  
 508 section 3.4.

509 **4. Discussion**


510 **4.1 The skill of seasonal flow forecasts**

Deleted: it indicates

Deleted: sharpness

Deleted: s

514 This study offers a comprehensive view of overall skill of SFFs, benchmarked to the conventional – and easier to  
 515 implement - ESP method. In contrast to the majority of previous studies, which assessed the skill of SFFs at  
 516 continental or national level or over large river basins, our study focuses on 12 relatively small catchments (59 -  
 517 6648 km<sup>2</sup>) across South Korea.

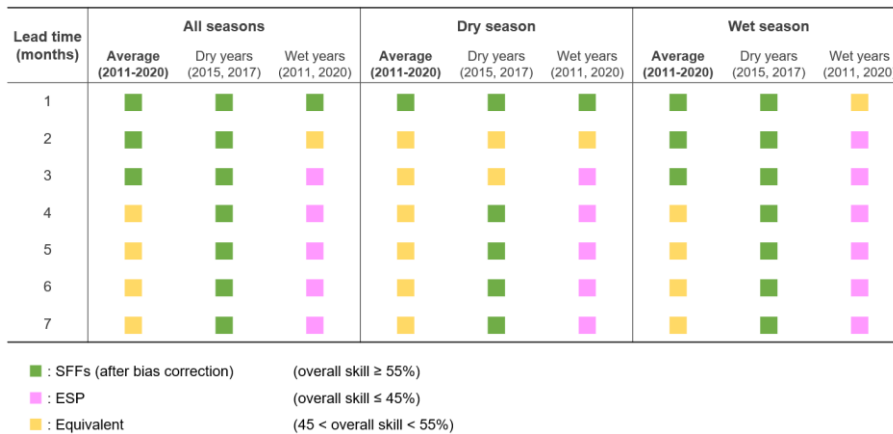

518  
 519 **Figure 10. Summary of key findings regarding the overall skill at different lead times, seasons, and years.**

520 Figure 10 summarizes the key findings of this study regarding the overall skill of SFFs across different seasons  
 521 and years. It demonstrates that SFFs outperform ESP in almost all the cases for forecasting lead times of one  
 522 month. This result is consistent with previous literature (e.g., Lucatero et al., 2018; Yossef et al., 2013). In  
 523 addition, the higher skill of SFFs is also shown at lead times of 2 and 3 months in several situations as shown in  
 524 Figure 10, and at even longer lead times in dry years. This is more surprising as this considerable performance of  
 525 SFFs was not found in previous studies.

526 Similar to our study, earlier studies (Crochemore et al., 2016; Lucatero et al., 2018) have explored the skill  
 527 compared with real flow observations at a catchment scale. Therefore, the comparison of their results with our  
 528 findings holds interest. In brief, their results suggest that ESP remains a ‘hard-to-beat’ method compared to SFFs  
 529 even after bias correction. Crochemore et al. (2016) showed that SFFs using bias corrected precipitation, has an  
 530 equivalent level of performance with ESP up to 3 months ahead. Lucatero et al. (2018) concluded that SFFs still  
 531 face difficulties in outperforming ESP, particularly at lead times longer than 1 month.

532 The difference of our results compared to the literature stems from a combination of several important factors.  
 533 First, it is worth noting that these two previous studies were conducted at the catchment-scale, with a specific  
 534 focus on Europe, namely France (Crochemore et al., 2016) and Denmark (Lucatero et al., 2018). The skill of SFFs  
 535 varies according to the geographic locations, meteorological conditions of given study area, as confirmed by  
 536 numerous studies (e.g., Greuell et al., 2018; Pechlivanidis et al., 2020; Yossef et al., 2013). Therefore, the skill of  
 537 SFFs could also be influenced by distinct spatial and meteorological conditions between Europe and South Korea.  
 538 Second, we can attribute the difference to the utilization of a more advanced seasonal weather forecasting system.  
 539 Unlike previous studies which applied ECMWF system 4, our study is conducted based on ECMWF’s cutting-  
 540 edge forecasting system version 5. It is reported that ECMWF system 5 has many improvements compared to the  
 541 previous version including the predictive skill of the El Niño Southern Oscillation (ENSO) (Johnson et al., 2019)  
 542 and rainfall inter-annual variability (Köhn-Reich and Bürger, 2019). Specifically, ENSO is known to be a key  
 543 driver affecting the skill of seasonal weather forecasts (Ferreira et al., 2022; Shirvani and Landman, 2015;  
 544 Weisheimer & Palmer, 2014); therefore, its improvement can result in notable changes in forecasting skill.  
 545 Although the relationship between seasonal weather patterns in South Korea and ENSO is not fully understood,  
 546 some previous research has shown good correlations for certain regions and seasons (Lee and Julien, 2016; Noh  
 547 and Ahn, 2022). In this study, it is challenging to quantitatively evaluate the impact of system advancements.  
 548 However, given the significance of meteorological forecast in hydrological forecasts, it is highly probable that the  
 549 development of the system has had a positive influence on the results. Although a few studies have analysed the  
 550 skill of SFFs based on ECMWF system 5 (e.g., Peñuela et al., 2020; Ratri et al., 2023), direct comparisons with

Deleted: ,  
 Deleted: is  
 Deleted: in

Deleted: While i  
 Deleted: in this study  
 Deleted: ,  
 Deleted: given the significance of meteorological forecast in hydrological forecasts,

559 our research were deemed difficult due to differences in spatial scale and analysis methods, such as the absence  
560 of a comparison with ESP.  
561 Last, the performance of the hydrological model also contributes to differences in the results. To evaluate the  
562 impact of hydrological model to SFFs, we compared the actual score (forecast performance compared to observed  
563 flow data) with the theoretical score (forecast performance compared to pseudo flow observation) and found that  
564 the actual scores are slightly higher than theoretical scores (i.e., theoretical score shows higher performance). This  
565 finding is consistent with previous studies, and the gap between the actual and theoretical score is highly linked  
566 to the performance of hydrological model (Greuell et al., 2018; van Dijk, 2013). When a model's actual score  
567 closely approximates its theoretical score, it may suggest that the model is operating at a best possible level, given  
568 the inherent uncertainties and limitations associated with the available data and methods. Although our results  
569 demonstrated that the theoretical score shows higher performance than actual score, their difference was generally  
570 marginal. This close agreement between the two scores indicates that the model is well-calibrated and capable of  
571 effectively capturing the underlying hydrological processes in those catchments.

572 Our findings on the impact of bias correction quantitatively showed that generally precipitation controls the  
573 performance of SFFs, however, we also found that temperature plays a substantial role in specific seasons and  
574 catchments. Specifically, the Hoengseong and Soyanggang catchments, located in the northernmost part of South  
575 Korea and affected by snowfall in the Dry (winter) season (December to February), exhibit a higher temperature  
576 contribution than precipitation for a forecasting lead time of one month during the dry season. The main reason  
577 for this is the underestimation of temperature forecasts. Our supplementary experiments provide evidence that  
578 using bias-corrected temperature forecasts significantly improves the performance of flow forecasts (see Figure  
579 S4 in the supplementary material). Although the positive impact of bias correction of precipitation forecasts in  
580 enhancing the performance of SFFs has been well-documented in numerous previous studies (Crochemore et al.,  
581 2016; Lucatero et al., 2018; Pechlivanidis et al., 2020; Tian et al., 2018), our result demonstrates the importance  
582 of bias correction of temperature too, at least in snow-affected catchments.  
583 An alternative approach to bias correction has been proposed by (Lucatero et al., 2018; Yuan and Wood, 2012),  
584 who argue that directly correcting the biases in the flow forecasts may result in better performance at a lower  
585 computational cost. However, we tested this approach and found conflicting outcomes (Figure S9 in the  
586 supplementary material). Therefore, caution should be exercised when directly correcting biases for flow, as this  
587 approach may exclude the contribution of initial conditions, which is one of the most crucial factors in  
588 hydrological modelling. In cases where the performance of hydrological model is the major source of error, bias  
589 correction of the flow might be useful; however, if the model shows an acceptable performance, as demonstrated  
590 in this study, incorporating bias correction for the simulated flow could add more errors.

591 Due to limited data availability, conducting additional validation across a larger number of extreme events is not  
592 possible. Nevertheless, our research findings suggest a potential correlation between the overall skill and dry/wet  
593 conditions, that should be further validated if new data become available. Specifically, in the period analysed here,  
594 SFFs considerably outperform ESP for all lead times during the wet season in dry years. Conversely, the overall  
595 skill during the wet season in wet years was not satisfactory. This is because the overall skill is commonly  
596 dominated by precipitation forecasting skill, and we previously found that the skill of precipitation forecasts is the  
597 lowest in wet years (Lee et al 2023). The systematic biases of seasonal precipitation forecasts, which tend to  
598 underestimate (overestimate) the precipitation during the wet (dry) season, led to the consistent results in flow  
599 forecasts. This finding also hints that SFFs hold the potential to provide valuable information for effective water  
600 resources management during dry conditions, which is crucial for drought management.

#### 601 4.2 Limitations and directions for future research

602 In this paper, we investigated the overall skill of SFFs at the catchment scale using ECMWF's seasonal weather  
603 forecasts (system 5) with a spatial resolution of  $1 \times 1^\circ$ . Based on our previous research, it has been demonstrated  
604 that among four forecasting centres, ECMWF provides the most skilful seasonal precipitation forecasts (Lee et  
605 al., 2023), thus we utilized seasonal weather forecasts datasets from ECMWF in this study. However, the skill for  
606 other weather forcings such as temperature and PET, have not been tested across South Korea. Additionally, while  
607 ECMWF originally generates seasonal weather forecasts with high resolution ( $36 \times 36 \text{ km}$ , approximately  
608  $0.3 \times 0.3^\circ$ ), we utilized publicly available low resolution data ( $1 \times 1^\circ$ ), publicly provided through CCDS, to maintain  
609 consistency with our previous work (Lee et al., 2023). Our additional investigation indicates that the difference in  
610 weather data between high and low resolution is not substantial (see Figure S10 in the supplementary material).  
611 Nevertheless, prior studies suggest that the skill of seasonal weather forecasts may vary according to factors such  
612 as region, season, and spatial resolution. Therefore, broader research is required to determine the seasonal weather  
613 forecasts provider as well as spatial resolution that can lead to skilful hydrological forecasts in the regions or  
614 seasons of interest.

Deleted: provides

616 Given the distinct climatic conditions in South Korea, it is important to acknowledge that our results may not be  
617 applicable to other regions or countries. Therefore, further work needs to be carried out to reproduce this analysis  
618 in different regions. To facilitate this process, two Python-based toolboxes can be useful: SEAFORM (SEAsonal  
619 FORecasts Management) and SEAFLOW (SEAsonal FLOW forecasts). The SEAFORM toolbox, developed in  
620 our previous study (Lee et al., 2023), offers multiple functions for manipulating seasonal weather forecast datasets  
621 (e.g., download the datasets, time-series generation, bias correction). On the other hand, the SEAFLOW toolbox,  
622 developed in this study, is specifically designed for the analysis of SFFs based on the modified Tank model (but  
623 it could be useful to apply to other hydrologic models).  
624 In terms of forecast skill, our study highlights the potential of SFFs at the catchment scale for real water resources  
625 management. Nevertheless, it is crucial to recognize the difference between 'skill', indicating how well  
626 hydrological forecasts mimic observed data, and 'value', referring to the practical benefits obtained from utilizing  
627 those forecasts in the real world. Previous studies have addressed this issue, showing that better skill does not  
628 always result in higher value (Boucher et al., 2012; Chiew et al., 2003). While earlier findings suggest that the  
629 conventional method (ESP) generally outperforms SFFs in terms of 'skill' (e.g., Lucatero et al., 2018; Yossef et  
630 al., 2013), recent research demonstrates that, in terms of 'value,' the use of seasonal forecasts in semi-arid regions  
631 offers significant economic benefits by mitigating hydro-energy losses in a dry year (Portele et al., 2021).  
632 Therefore, our future research efforts should concentrate on a quantitative evaluation of the value of SFFs for  
633 practical reservoir operations, informing decision-making in water resources management. This evaluation is of  
634 significant importance as it directly relates to assessing the potential utilization of SFFs in practical water  
635 management.

## 636 5. Conclusions

637 This study assessed the overall skill of SFFs across 12 catchments in South Korea using a hydrological model  
638 forced by seasonal weather forecasts from the ECMWF (system 5). By focusing on operational reservoir  
639 catchments with relatively small sizes, our findings showed the potential of SFFs for practical water resources  
640 management.

641 The results first demonstrate that the performance of the hydrological model is crucial in flow forecasting with  
642 the Tank model used in this study exhibiting reliable performance. Secondly, precipitation emerges as a dominant  
643 factor influencing the performance of SFFs compared to other weather forcings, and this is more evident during  
644 the wet season. However, temperature can also be highly important in specific seasons and catchments, and this  
645 result highlights the significance of temperature bias correction as the flow simulation with the bias-corrected  
646 temperature provides higher performance. Third, at catchment scale, which is more suitable for water resources  
647 management, bias corrected SFFs have skill with respect to ESP up to 3 months ahead. Notably, the highest overall  
648 skill during the wet season in dry years highlights the potential of SFFs to add value in drought management.  
649 Lastly, while our research emphasizes the superior performance of SFFs at the catchment scale in South Korea,  
650 it is important to note that outcomes may vary depending on factors such as the type of seasonal weather forecasts  
651 system used, the study area, and the performance of the hydrological model.

652 As seasonal weather forecasting technologies continue to progress, it is also crucial to concurrently pursue their  
653 application and validation in flow forecasting. We hope that our findings contribute to the ongoing validation  
654 efforts of the skill of SFFs across various regions and, furthermore, serve as a catalyst for their practical application  
655 in real-world water management. At the same time, our proposed workflow and the analysis package we have  
656 developed using Python Jupyter Notebook, can offer valuable support to water managers in gaining practical  
657 experience to utilize SFFs more effectively.

658 *Code and data availability.* The SEAFLOW (SEAsonal FLOW forecasts) and SEAFORM (SEAsonal FORecast  
659 Management) Python packages are available at <https://github.com/uobwatergroup/seafLOW>, and  
660 <https://github.com/uobwatergroup/seaform>, respectively. ECMWF's seasonal weather forecasts data are available  
661 under a range of licences from <https://cds.climate.copernicus.eu/>. Reservoir and flow data are made available by  
662 the K-water and can be downloaded from <https://www.water.or.kr/>.

663 *Author contributions.* YL designed the experiments, with suggestions from the other co-authors. YL developed  
664 the workflow and performed simulation. FP and MAR participated in repeated discussions on interpretations of  
665 results and suggested ways forward in the analysis. AP provided YL with modelling technical support and  
666 reviewed the manuscript.

667 *Competing interests.* The authors declare that they have no conflict of interest.

668 *Acknowledgements.* Yongshin Lee is funded through a PhD scholarship by K-water (Korea Water Resources  
669 Corporation). Francesca Pianosi is partially funded by the Engineering and Physical Sciences Research Council



670 (EPSRC) “Living with Environmental Uncertainty” Fellowship (EP/R007330/1). Andres Peñuela is funded by  
671 the European Research Executive Agency (REA) under the HORIZON-MSCA-2021-PF-01 grant agreement  
672 101062258. We also thank K-water and Dr. Shinuk Kang (South Korea, K-water Institute) for sharing data and  
673 hydrological model (modified Tank) applied in this study.

#### 674 References

675 [Allen, R.G., Pereira, L.S., Raes, D. and Smith, M.: \*Crop evapotranspiration: Guidelines for computing crop\*  
676 \*water requirements\*. United Nations Food and Agriculture Organization, Irrigation and drainage paper 56,  
677 Rome, Italy, 1998.](#)

678 Alley, R.B., Emanuel, K.A. and Zhang, F.: Advances in weather prediction. *Science*, [online] 363, 342–344,  
679 <https://doi.org/10.1126/science.aav7274>, 2019.

680 Arnal, L., Cloke, H.L., Stephens, E., Wetterhall, F., Prudhomme, C., Neumann, J., Krzeminski, B. and  
681 Pappenberger, F.: Skilful seasonal forecasts of streamflow over Europe? *Hydrology and Earth System Sciences*,  
682 22, 2057–2072, <https://doi.org/10.5194/hess-22-2057-2018>, 2018.

683 Azman, A.H., Tukimat, N.N.A. and Malek, M.A.: Analysis of Linear Scaling Method in Downscaling  
684 Precipitation and Temperature, *Water Resources Management*, 36, 171–179, <https://doi.org/10.1007/s11269-021-03020-0>, 2022.

686 Baker, S.A., Rajagopalan, B. and Wood, A.W.: Enhancing ensemble seasonal streamflow forecasts in the upper  
687 Colorado river basin using multi-model climate forecasts, *Journal of the American Water Resources*  
688 *Association*, 57, 906–922, <https://doi.org/10.1111/1752-1688.12960>, 2021.

689 Bauer, P., Thorpe, A. and Brunet, G.: The quiet revolution of numerical weather prediction. *Nature*, 525, 47–55,  
690 <https://doi.org/10.1038/nature14956>, 2015.

691 Boucher, M.-A., Tremblay, D., Delorme, L., Perreault, L. and Anctil, F.: Hydro-economic assessment of  
692 hydrological forecasting systems, *Journal of Hydrology*, 416–417, 133–144,  
693 <https://doi.org/10.1016/j.jhydrol.2011.11.042>, 2012.

694 Chiew, F.H.S., Zhou, S.L. and McMahon, T.A.: Use of seasonal streamflow forecasts in water resources  
695 management, *Journal of Hydrology*, 270, 135–144, [https://doi.org/10.1016/S0022-1694\(02\)00292-5](https://doi.org/10.1016/S0022-1694(02)00292-5), 2003.

696 Chiew, F. and McMahon, T.: Assessing the adequacy of catchment streamflow yield estimates, *Soil Research*,  
697 31, 665, <https://doi.org/10.1071/sr9930665>, 1993.

698 Crochemore, L., Ramos, M.-H. and Pappenberger, F.: Bias correcting precipitation forecasts to improve the skill  
699 of seasonal streamflow forecasts, *Hydrology and Earth System Sciences*, 20, 3601–3618,  
700 <https://doi.org/10.5194/hess-20-3601-2016>, 2016.

701 Day, G.N.: Extended streamflow forecasting using NWSRFS, *Journal of Water Resources Planning and*  
702 *Management*, 111, 157–170, [https://doi.org/10.1061/\(asce\)0733-9496\(1985\)111:2\(157\)](https://doi.org/10.1061/(asce)0733-9496(1985)111:2(157)), 1985.

703 Duan, Q., Sorooshian, S. and Gupta, V.K.: Effective and efficient global optimization for conceptual rainfall-  
704 runoff models, *Water Resources Research*, 28, <https://doi.org/10.1029/91wr02985>, 1992.

705 Duan, Q., Sorooshian, S. and Gupta, V.K.: Optimal use of the SCE-UA global optimization method for  
706 calibrating watershed models, *Journal of Hydrology*, 158, 265–284, [https://doi.org/10.1016/0022-1694\(94\)90057-4](https://doi.org/10.1016/0022-1694(94)90057-4), 1994.

708 Fang, G.H., Yang, J., Chen, Y.N. and Zammit, C.: Comparing bias correction methods in downscaling  
709 meteorological variables for a hydrologic impact study in an arid area in China. *Hydrology and Earth System*  
710 *Sciences*, 19, 2547–2559, <https://doi.org/10.5194/hess-19-2547-2015>, 2015.

711 Ferreira, G.W.S., Reboita, M.S. and Drumond, A.: Evaluation of ECMWF-SEAS5 seasonal temperature and  
712 precipitation predictions over South America, *Climate*, 10, 128, <https://doi.org/10.3390/cli10090128>, 2022.

713 Goodarzi, M., Jabbarian Amiri, B., Azarneyvand, H., Khazaee, M. and Mahdianzadeh, N.: Assessing the  
714 performance of a hydrological Tank model at various spatial scales, *Journal of Water Management Modeling*,  
715 <https://doi.org/10.14796/jwmm.c472>, 2020.

716 Greuell, W., Franssen, W.H.P. and Hutjes, R.W.A.: Seasonal streamflow forecasts for Europe – Part 2: Sources  
717 of skill. *Hydrology and Earth System Sciences*, 23, 371–391, <https://doi.org/10.5194/hess-23-371-2019>, 2019.

Deleted: Alley, R.B., Emanuel, K.A. and Zhang, F.: Advances in weather prediction. *Science*, [online] 363, 342–344, <https://doi.org/10.1126/science.aav7274>, 2019.

Formatted: Font: Italic

Deleted: ¶

722 Greuell, W., Franssen, W.H.P., Biemans, H. and Hutjes, R.W.A.: Seasonal streamflow forecasts for Europe –  
723 Part I: Hindcast verification with pseudo- and real observations, *Hydrology and Earth System Sciences*, **22**,  
724 3453–3472, <https://doi.org/10.5194/hess-22-3453-2018>, 2018.

725 Gupta, H.V., Sorooshian, S. and Yapo, P.O.: Status of automatic calibration for hydrologic models: Comparison  
726 with multilevel expert calibration, *Journal of Hydrologic Engineering*, **4**, 135–143,  
727 [https://doi.org/10.1061/\(asce\)1084-0699\(1999\)4:2\(135\)](https://doi.org/10.1061/(asce)1084-0699(1999)4:2(135)), 1999.

728 Harrigan, S., Prudhomme, C., Parry, S., Smith, K. and Tanguy, M.: Benchmarking ensemble streamflow  
729 prediction skill in the UK, *Hydrology and Earth System Sciences*, **22**, 2023–2039, [https://doi.org/10.5194/hess-](https://doi.org/10.5194/hess-22-2023-2018)  
730 [22-2023-2018](https://doi.org/10.5194/hess-22-2023-2018), 2018.

731 Hersbach, H.: Decomposition of the Continuous Ranked Probability Score for ensemble prediction  
732 systems, *Weather and Forecasting*, **15**, 559–570, [https://doi.org/10.1175/1520-](https://doi.org/10.1175/1520-0434(2000)015%3C0559:dotcrp%3E2.0.co;2)  
733 [0434\(2000\)015%3C0559:dotcrp%3E2.0.co;2](https://doi.org/10.1175/1520-0434(2000)015%3C0559:dotcrp%3E2.0.co;2), 2000.

734 Jackson-Blake, L., Clayer, F., Haande, S., James E.S. and Moe, S.J.: Seasonal forecasting of lake water quality  
735 and algal bloom risk using a continuous Gaussian Bayesian network, *Hydrology and Earth System Sciences*, **26**,  
736 3103–3124, <https://doi.org/10.5194/hess-26-3103-2022>, 2022.

737 Johnson, S.J., Stockdale, T.N., Ferranti, L., Balsamada, M.A., Molteni, F., Magnusson, L., Tietsche, S.,  
738 Decremer, D., Weisheimer, A., Balsamo, G., Keeley, S.P.E., Mogensen, K., Zuo, H. and Monge-Sanz, B.M.:  
739 SEAS5: the new ECMWF seasonal forecast system, *Geoscientific Model Development*, **12**, 1087–1117,  
740 <https://doi.org/10.5194/gmd-12-1087-2019>, 2019.

741 Kang, S.U., Lee, D.R. and Lee, S.H.: A study on calibration of Tank model with soil moisture structure, *Journal*  
742 *of Korea Water Resources Association*, **37**, 133–144, 2004.

743 Kolachian, R. and Saghafian, B.: Deterministic and probabilistic evaluation of raw and post processed sub-  
744 seasonal to seasonal precipitation forecasts in different precipitation regimes, *Theoretical and Applied*  
745 *Climatology*, **137**, 1479–1493, <https://doi.org/10.1007/s00704-018-2680-5>, 2019.

746 Köhn-Reich, L. and Bürger, G.: Dynamical prediction of Indian monsoon: Past and present skill, *International*  
747 *Journal of Climatology*, **39**, 3574–3581, <https://doi.org/10.1002/joc.6039>, 2019.

748 K-water (Korea Water Resources Corporation): *My water*, [online] [www.water.or.kr](http://www.water.or.kr). Available at:  
749 <http://www.water.or.kr> [Accessed 4 Oct. 2022], 2022.

750 Lee, J.H. and Julien, P.Y.: Teleconnections of the ENSO and South Korean precipitation patterns, *Journal of*  
751 *Hydrology*, **534**, 237–250, <https://doi.org/10.1016/j.jhydrol.2016.01.011>, 2016.

752 Lee, J.W., Chegal, S.D. and Lee, S.O.: A review of Tank model and its applicability to various Korean  
753 catchment conditions, *Water*, **12**, 3588, <https://doi.org/10.3390/w12123588>, 2020.

754 Lee, Y., Peñuela, A., Pianosi F. and Rico-Ramirez, M.A.: Catchment-scale skill assessment of seasonal  
755 precipitation forecasts across South Korea, *International Journal of Climatology*, **43**, 5092–5111,  
756 <https://doi.org/10.1002/joc.8134>, 2023.

757 Leutbecher, M. and Haiden, T.: Understanding changes of the continuous ranked probability score using a  
758 homogeneous Gaussian approximation, *Quarterly Journal of the Royal Meteorological Society*, **147**, 425–442,  
759 <https://doi.org/10.1002/qj.3926>, 2020.

760 Li, H., Luo, L., Wood, E.F. and Schaake, J.: The role of initial conditions and forcing uncertainties in seasonal  
761 hydrologic forecasting, *Journal of Geophysical Research*, **114**, <https://doi.org/10.1029/2008jd010969>, 2009.

762 Lucatero, D., Madsen, H., Refsgaard, J.C., Kidmose, J. and Jensen, K.H.: Seasonal streamflow forecasts in the  
763 Ahlrigaarde catchment, Denmark: the effect of preprocessing and post-processing on skill and statistical  
764 consistency, *Hydrology and Earth System Sciences*, **22**, 3601–3617, <https://doi.org/10.5194/hess-22-3601-2018>,  
765 2018.

766 Manzanas, R., Lucero, A., Weisheimer, A. and Gutiérrez, J.M.: Can bias correction and statistical downscaling  
767 methods improve the skill of seasonal precipitation forecasts? *Climate Dynamics*, **50**, 1161–1176,  
768 <https://doi.org/10.1007/s00382-017-3668-z>, 2017.

769 Maraun, D.: Bias correcting climate change simulations - a critical review, *Current Climate Change Reports*, **2**,  
770 211–220, <https://doi.org/10.1007/s40641-016-0050-x>, 2016.

771 Matheson, J.E. and Winkler, R.L.: Scoring rules for continuous probability distributions, *Management Science*,  
772 **22**, 1087–1096, <https://doi.org/10.1287/mnsc.22.10.1087>, 1976.

773 McCabe, G.J. and Markstrom, S.L.: A monthly water-balance model driven by a graphical user interface, *U.S.*  
774 *Geological Survey*, 1–2, 2007.

775 Melesse, A.M., Wossenu Abteu and Senay, G.: *Extreme hydrology and climate variability : monitoring,*  
776 *modelling, adaptation and mitigation*, Amsterdam, Netherlands: Elsevier, 2019.

777 Ministry of Environment.: *2020 Korea annual hydrological report*. South Korea, Available at:  
778 <https://www.mois.go.kr/firt/bbs/type001> (Accessed: 28 August 2022), 2020.

779 Moriasi, D. N., Gitau, M. W., Pai, N. and Daggupati, P.: Hydrologic and water quality models: Performance  
780 measures and evaluation criteria, *Journal of the ASABE*, [online] **58**, 1763–1785,  
781 <https://doi.org/10.13031/trans.58.10715>, 2015.

782 Moriasi, D. N., Arnold, J. G., Van Liew, M. W., Bingner, R. L., Harmel R. D. and Veith T. L.: Model evaluation  
783 guidelines for systematic quantification of accuracy in watershed simulations, *Journal of the ASABE*, **50**, 885–  
784 900, <https://doi.org/10.13031/2013.23153>, 2007.

785 Noh, G.-H. and Ahn, K.-H.: Long-lead predictions of early winter precipitation over South Korea using a SST  
786 anomaly pattern in the North Atlantic Ocean, *Climate Dynamics*, **58**, 3455–3469, [https://doi.org/10.1007/s00382-](https://doi.org/10.1007/s00382-021-06109-9)  
787 021-06109-9, 2022.

788 Ou, X., Gharabaghi, B., McBean, E. and Doherty, C.: Investigation of the Tank model for urban storm water  
789 management, *Journal of Water Management Modeling*, <https://doi.org/10.14796/jwmm.c421>, 2017.

790 Pappenberger, F., Ramos, M.H., Cloke, H.L., Wetterhall, F., Alfieri, L., Bogner, K., Mueller, A. and Salamon,  
791 P.: How do I know if my forecasts are better? Using benchmarks in hydrological ensemble prediction, *Journal*  
792 *of Hydrology*, **522**, 697–713, <https://doi.org/10.1016/j.jhydrol.2015.01.024>, 2015.

793 Pechlivanidis, I.G., Crochemore, L., Rosberg, J. and Bosshard, T.: What are the key drivers controlling the  
794 quality of seasonal streamflow forecasts? *Water Resources Research*, **56**, 1–19,  
795 <https://doi.org/10.1029/2019wr026987>, 2020.

796 Peñuela, A., Hutton, C. and Pianosi, F.: Assessing the value of seasonal hydrological forecasts for improving  
797 water resource management: insights from a pilot application in the UK, *Hydrology and Earth System Sciences*,  
798 **24**, 6059–6073, <https://doi.org/10.5194/hess-24-6059-2020>, 2020.

799 Phuong, H.T., Tien, N.X., Chikamori, H. and Okubo, K.: A hydrological Tank model assessing historical runoff  
800 variation in the Hieu river basin, *Asian Journal of Water, Environment and Pollution*, **15**, 75–86,  
801 <https://doi.org/10.3233/ajw-180008>, 2018.

802 Portele, T., Lorenz, C., Berhon Dibrani, Laux, P., Bliefernicht, J. and Kunstmann, H.: Seasonal forecasts offer  
803 economic benefit for hydrological decision making in semi-arid regions, *Scientific Reports*, **11**, 10581,  
804 <https://doi.org/10.1038/s41598-021-89564-y>, 2021.

805 Prudhomme, C., Hannaford, J., Alfieri, L., Boorman, D.B., Knight, J., Bell, V., Christopher A.-L. Jackson,  
806 Svensson, C., Parry, S., Nuria Bachiller-Jareno, Davies, H., Davis, R.A., Mackay, J.D., Andrew, Rudd, A.C.,  
807 Smith, K., Bloomfield, J.P., Ward, R. and Jenkins, A.: Hydrological outlook UK: an operational streamflow and  
808 groundwater level forecasting system at monthly to seasonal time scales, *Hydrological Science Journal*, **62**,  
809 2753–2768, <https://doi.org/10.1080/02626667.2017.1395032>, 2017.

810 Rahnamay-Naeini, M. Analui, B., Gupta, H.V., Duan, Q. and Sorooshian, S.: Three decades of the Shuffled  
811 Complex Evolution (SCE-UA) optimization algorithm: Review and applications, *Scientia Iranica*, **26**, 2015–  
812 2031, 2019.

813 Ratri, D.N., Weerts, A., Muharsyah, R., Whan, K., Tank, A.K., Aldrian, E. and Hariadi, M.H.: Calibration of  
814 ECMWF SEAS5 based streamflow forecast in seasonal hydrological forecasting for Citarum river basin, West  
815 Java, Indonesia, *Journal of Hydrology*, **45**, <https://doi.org/10.1016/j.ejrh.2022.101305>, 2023.

816 Shin, S.H., Jung, I.W. and Bae, D.H.: Study on estimation of optimal parameters for Tank model by using SCE-  
817 UA, *Journal of Korea Water Resources Association*, 1530–1535, 2010.

818 Shirvani, A. and Landman, W.A.: Seasonal precipitation forecast skill over Iran, *International Journal of*  
819 *Climatology*, **36**, 1887–1900. <https://doi.org/10.1002/joc.4467>, 2015.

820 Shrestha, M., Acharya, S.C. and Shrestha, P.K.: Bias correction of climate models for hydrological  
821 modelling - are simple methods still useful? *Meteorological Applications*, **24**, 531–539,  
822 <https://doi.org/10.1002/met.1655>, 2017.

**Deleted:** Ministry of land, infrastructure and transportation.: *Long-term Water Resources Management Master Plan (2001–2020)*, South Korea, 2016.¶

826 Shrestha, S. and Htut, A.Y.: Modelling the potential impacts of climate change on hydrology of the Bago River  
827 basin, Myanmar, *International Journal of River Basin Management*, **14**, 287–297,  
828 <https://doi.org/10.1080/15715124.2016.1164177>, 2016.

829 Soares, M. B. and Dessai, S.: Barriers and enablers to the use of seasonal climate forecasts amongst  
830 organisations in Europe, *Climatic Change*, **137**, 89–103, <https://doi.org/10.1007/s10584-016-1671-8>, 2016.

831 Sugawara, M., Watanabe, I., Ozaki, E. and Katsuyama, Y.: *Tank model programs for personal computer and the*  
832 *way to use*, National Research Centre for Disaster Prevention, Japan, 1986.

833 Sugawara, M.: “*Tank model.*” *Computer models of watershed hydrology*, V. P. Singh (Ed.), Water Resources  
834 Publications, Highlands Ranch, Colorado, 1995.

835 Tian, F., Li, Y., Zhao, T., Hu, H., Pappenberger, F., Jiang, Y. and Lu, H.: Evaluation of the ECMWF system 4  
836 climate forecasts for streamflow forecasting in the upper Hanjiang river basin, *Hydrology Research*, **49**, 1864–  
837 1879, <https://doi.org/10.2166/nh.2018.176>, 2018.

838 Van Dijk, A.I.J.M., Peña-Arancibia, J.L., Wood, E.F., Sheffield, J. and Beck, H.E.: Global analysis of seasonal  
839 streamflow predictability using an ensemble prediction system and observations from 6192 small catchments  
840 worldwide, *Water Resources Research*, **49**, 2729–2746, <https://doi.org/10.1002/wrcr.20251>, 2013.

841 Whateley, S., Palmer, R.N. and Brown, C.: Seasonal hydroclimatic forecasts as innovations and the challenges  
842 of adoption by water managers, *Journal of Water Resources Planning and Management*, **141**,  
843 [https://doi.org/10.1061/\(asce\)wr.1943-5452.0000466](https://doi.org/10.1061/(asce)wr.1943-5452.0000466), 2015.

844 Weisheimer, A. and Palmer, T.N.: On the reliability of seasonal climate forecasts, *Journal of The Royal Society*  
845 *Interface*, **11**, 20131162, <https://doi.org/10.1098/rsif.2013.1162>, 2014.

846 Yapo, P.O., Gupta, H.V. and Sorooshian, S.: Automatic calibration of conceptual rainfall-runoff models:  
847 sensitivity to calibration data, *Journal of Hydrology*, **181**, 23–48, [https://doi.org/10.1016/0022-1694\(95\)02918-](https://doi.org/10.1016/0022-1694(95)02918-4)  
848 4, 1996.

849 Yoe, C.E.: *Principles of risk analysis : decision making under uncertainty*, Boca Raton, FL: Crc Press, Taylor  
850 And Francis, 2019.

851 Yossef, N.C., Winsemius, H., Weerts, A., van Beek, R. and Bierkens, M.F.P.: Skill of a global seasonal  
852 streamflow forecasting system, relative roles of initial conditions and meteorological forcing, *Water Resources*  
853 *Research*, **49**, 4687–4699, <https://doi.org/10.1002/wrcr.20350>, 2013.

854 Yuan, X. and Wood, E.F.: Downscaling precipitation or bias-correcting streamflow? Some implications for  
855 coupled general circulation model (CGCM)-based ensemble seasonal hydrologic forecast, *Water Resources*  
856 *Research*, **48**, 1–7, <https://doi.org/10.1029/2012WR012256>, 2012.