

Simulation analysis of 3D stability of a landslide with a locking segment: A case study of the Tizicao landslide in Maoxian County, southwest China

Yuntao Zhou^{1,3,4}, Xiaoyan Zhao^{1*}, Guangze Zhang², Bernd Wünnemann¹, Jiajia Zhang³, Minghui Meng⁵

¹Department of Geology Engineering, Faculty of Geosciences and Environmental Engineering, Southwest Jiaotong University, Chengdu, 611756, Sichuan, China

²China Railway Eryuan Engineering Group Co., Ltd., Chengdu, 610031, Sichuan, China

³Institute of Exploration Technology, Chinese Academy of Geological Sciences, Chengdu, 611734, Sichuan, China

⁴Technology innovation center for risk prevention and mitigation of geohazard, Ministry of Natural Resources, Chengdu, 611734, Sichuan, China

⁵Sichuan Huadi Construction Engineering Co., Ltd., Chengdu, 610081, Sichuan, China

Correspondence: Xiaoyan Zhao (xyzhao2@swjtu.edu.cn)

Abstract. Rock bridges, also known as locking masses in landslides, affect the three-dimensional (3D) stability and deformation patterns of landslides. However, it is always difficult to simulate rock bridges with continuous grid models in three-dimensional landslides due to their discontinuous deformations. Tizicao landslide, located in Maoxian County, southwest China, is a typical landslide with a super-large rock mass volume of about $1,388.2 \times 10^4 \text{ m}^3$ and a locking segment. To explore a better rock bridge model used to simulate 3D stability and deformations of the Tizicao landslide, this study introduced three rock bridge models into the FLAC3D program, including the intact rock mass model (IRMM), the Jennings model (JM), and the contact surface model with high strength parameters (CSM-HSP). The CSM-HSP model was eventually used in the FLAC3D program to obtain the 3D deformation characteristics of the landslide. In addition, the two-dimensional (2D) stability of the Tizicao landslide was analyzed using the GeoStudio program. The simulation results indicate that the Tizicao landslide is generally stable under current conditions owing to the existence of the locking segment in its southern front. This inference is consistent with the field deformation and monitoring data. It was found that the general stability and local deformations of the landslide are influenced by the locking segment according to the comparison between the 2D and 3D stability. There was a linear relationship between the locking ratio and the factor of safety (Fos), which applies to the 2D stability analysis of the landslides with a locking segment each, while there existed an approximate quadratic parabola suitable for the 3D stability of the landslides. Finally, this study analyzed the laws of the 3D Fos varying with the locking ratio and strength parameters of the locking masses and the sliding surface. Furthermore, it explored the advantages and disadvantages of the three rock bridge models in the simulation of the 3D stability of landslides with a locking segment.

1. Introduction

A landslide with a locking segment refers to a geological phenomenon in which a locking segment exists along the sliding surface of a landslide and the critical failure of the landslide is controlled by the shear properties of the locking segment (Xu et al., 2010; Huang, 2012; Lin et al., 2018). A landslide of this type usually holds huge potential energy (Huang, 2012), which will be suddenly released once the locking masses of the landslide are cut off. As a result, a mass of fragmental materials from the landslide will affect the residential areas and infrastructures below the landslide, thus frequently resulting in catastrophic effects and severe casualties (Yin et al., 2011; Lin et al., 2018; Wang et al., 2019). The analysis of locking

1 masses is the key to the analysis of the stability of a landslide with a locking segment. However, the locking segment in the
2 landslide is characterized by uncertain positions, irregular shapes, and varying curvatures, which make the analysis of the 2D
3 stability of the landslide more difficult. Meanwhile, the 2D stability analysis is often applied to engineering reinforcement
4 design and is relatively conservative, and the analytical results can represent only the local stability of a landslide (Li et al.,
5 2010; Park et al., 2017). Therefore, 3D stability analysis plays a critical role in assessing and predicting the overall stability
6 of the landslide with a locking segment.

7 At present, the commonly used methods for the 3D stability analysis of landslides include limit equilibrium and
8 numerical simulation. Many 3D limit equilibrium methods have been proposed to account for the 3D stability of slopes
9 (Hovland, 1977; Leshchinsky et al., 1986; Hungr et al., 1989; Lam and Fredlund, 1993). However, most of them are simply
10 based on the extension of the 2D limit equilibrium slice methods proposed by Bishop (1955), Morgenstern and Price (1965),
11 or Spencer (1967), thus remaining the inherent limitations of the deformation and failure mode analysis. Fortunately, the
12 simulation methods provide a simple and useful way of analyzing both the 3D stability and the deformation and failure
13 tendency of landslides and have been employed to determine the 3D stability of slopes/landslides (Deng et al., 2011; Wang et
14 al., 2013; Zhang et al., 2013; Ma et al., 2020). Nevertheless, the numerical simulations of the 3D stability analysis of
15 landslides mostly ignore the rock bridge effect. As indicated by simulation studies of 2D or 3D planar stability, the stability
16 and the failure mode of slopes/landslides with rock bridges are determined by their rock bridges (Stead et al., 2006; Huang et
17 al., 2015; Glueer and Loew, 2015). In addition, several problems related to rock bridges are yet to be solved, including the
18 response of the 3D stability of landslides to rock bridges, the controlling effects of rock bridges on slope deformation, and
19 the simulation of rock bridges in numerical simulation software.

20 Some researchers have found that the stability of slopes/landslides with rock bridges is closely related to the length,
21 penetration rate, strength parameters, joint strength parameters, relative positions (direction, coplane, or non-coplane), and
22 shape of rock bridges (Einstein et al., 1983; Tuckey and Stead, 2016; Romer and Ferentinou, 2019; Zhang et al., 2020) and
23 determined the qualitative relationships between the 2D stability of slopes/landslides and these parameters. However, there is
24 a lack of in-depth quantitative study on these relationships, especially on the 3D stability of slopes/landslides.

25 The objective of this work is to present improved rock bridge models and to simulate 3D stability and deformation
26 behaviors of the Tizicao landslide using the model. A large amount of field investigation data and monitoring data show that
27 the Tizicao landslide is a typical landslide with a locking segment, which controls the 3D stability of the landslide (Zhou et
28 al., 2022). Three rock bridge models were introduced into the FLAC3D program in this study, namely IRMM, JM, and
29 CSM-HSP. Meanwhile, the differences between the overall stability and the local stability of the landslide were determined
30 by comparing the results of the 3D stability analysis with those of the 2D stability analysis, which were obtained using the
31 GeoStudio program. In addition, to explore the effects of the locking masses on the 3D stability of the landslide, this study
32 analyzed the laws of the 3D Fos varying with the locking ratios and strength parameters of the locking masses and sliding
33 surface. Furthermore, it explored the advantages and disadvantages of the three rock bridge models in the simulation of the
34 3D stability of landslides with a locking segment through a comparative analysis.

35 2. Study site

36 The Tizicao landslide is located in Maoxian County, Sichuan Province, southwest China (Fig. 1), with geographical
37 coordinates of 31°53'14.89"N and 103°40'51.12"E. It lies on the right bank of the Minjiang River and faces Shidaguan Town
38 on the left bank of the river (Fig. 2a). The Tizicao landslide has a length of about 680 m, a width of 570 m (Fig. 2a), an
39 average thickness of about 39.1 m, and a volume of $1,388.2 \times 10^4 \text{ m}^3$. This landslide has a huge gravitational potential
40 energy due to the relative elevation difference of 220 m between the toe of the landslide and the lower riverside of the
41 Minjiang River (Fig. 2a).

1 Moderately high mountains and river valleys occur in the area of the Tizicao landslide. This area is largely a part of the
2 Minshan Mountain of the Qionglai Mountains, and its southeastern boundary belongs to the final segment of the Longmen
3 Mountains (Wang et al., 2019). Moreover, this area exhibits steep and dangerous valleys and slopes, narrow river valleys,
4 and deeply downcutting rivers. The Minjiang River flows through this area in a nearly N-E direction. The main body of the
5 Tizicao landslide consists primarily of silty clay (Q_4^{del}) on the surface and broken phyllite below, which has poor physical
6 and mechanical properties and poses risks of failure, sliding, and deformation during rainy seasons. Its sliding bed mainly
7 comprises intact carbonaceous phyllite of the Devonian Weiguan Group (Dwg^2).

8 According to the field survey by Zhou et al. (2022), the middle-front part of the Tizicao landslide began to deform in
9 2013, when the houses on the slope started to crack and dislocate downward. In September 2014, the middle part of the
10 landslide's front gradually collapsed. As a result, a flow area with a width of about 60 m and a height of 200 m (Fig. 2d) was
11 formed. As a result, the accumulation body fell into the Minjiang River, forming a landslide dam. Meanwhile, the landslide's
12 rear (Fig. 2c) began to crack. From August to September 2015, the landslide deformed more apparently and severely,
13 resulting in additional wide and long cracks. After continuous deformations during the rainy season in 2016–2017, the rear
14 and front of the landslide had dislocated downward for more than 10 m locally by July 2017. The collapse with a volume of
15 about $6.0 \times 10^4 \text{ m}^3$ occurred in the northern front of the landslide body, blocking the Minjiang River for several hours.
16 Fortunately, no casualties occurred. Since October 2017, the deformation of the landslide has slowed down and tended to
17 stabilize (Fig. 3c). However, once a large-scale slide occurs, this landslide would directly threaten the lives of 30 people on
18 the slope body, even seriously threatening the lives of 113 people in Shidaguan Town (Fig. 2a) below the landslide.
19 Moreover, more than 30 buildings and the 2-km-long National Highway G213 will also be destroyed.

20 The Tizicao landslide can be divided into three areas according to the aerial photographs obtained using
21 high-performance unmanned aerial vehicles, field surveys, and deformation data monitored (Figs. 2b and 3a):

22 (a) The north sliding area. This area is rectangular and covers an area of $11.15 \times 10^4 \text{ m}^2$. It has a longitudinal length of
23 600 m, a transverse width of 258 m, and a sliding direction of 78° . A notable sliding failure has occurred in this area, as
24 shown in Fig. 4a. Specifically, significant tensional deformations are visible at the landslide's rear in this area, forming a rear
25 wall with a height of about 10 m (Fig. 2c). Moreover, a deep and large tension crack (crack L04, Fig. 3a) and a pinnate shear
26 crack (crack L11, Fig. 3a) have developed in the middle part of this area. All these contribute to a sliding displacement of
27 about 10.5 m overall in this area. The slope in the landslide's front is subjected to the most severe deformations. It has
28 dislocated downward for up to more than 40 m, with about $6 \times 10^4 \text{ m}^3$ of landslide masses having collapsed into the
29 Minjiang River (Fig. 2d).

30 (b) The middle deformation area. This area is in the shape of a long strip and covers an area of $6.42 \times 10^4 \text{ m}^2$. It has a
31 longitudinal length of 568 m, a transverse width of 138 m, and a sliding direction of 78° . As shown in Fig. 4c, the landslide's
32 rear in this area exhibits severe deformations, forming a 5-m-high rear wall (crack L07, Fig. 3a). Multistage cracking and
33 depression deformations (cracks LF03, LF05, LF06, and LF07; Fig. 3a) have occurred in the middle part of the landslide in
34 this area, with an overall displacement of about 8 m. Compression cracks and bulge-induced cracks (Fig. 3a) have formed in
35 the landslide's front under the resistance of locking masses.

36 (c) The south deformation area. This area is in the shape of a long strip and covers an area of $13.21 \times 10^4 \text{ m}^2$. It has a
37 longitudinal length of 700 m, a transverse width of 192 m, and a sliding direction of 85° . As shown in Fig. 4d, the landslide's
38 rear in this area is controlled by cracks L07 and L08 and has dislocated downward for about 3 m. The displacement of the
39 middle part of the landslide is about 1.5 m. The compression-induced longitudinal tension cracks (Cracks L09 and L10; Fig.
40 3a) have mainly developed in the landslide's front in this area, while large-scale sliding has not occurred.

41 Zhou et al. (2022) identified and analyzed the locking segment of the Tizicao landslide. As indicated by their analytical
42 results of the landform, spatial-temporal deformations, surface cracks, and rock quality in the landslide area, the locking
43 segment of the Tizicao landslide lies at the south slope toe (Figs. 2a-b; Fig. 3b). The locking segment covers an area of about

1 $4.69 \times 10^4 \text{ m}^2$, accounting for 15.2% of the total area of the landslide. As shown in Fig. 4, the anti-dip carbonaceous phyllites
2 of the Devonian Weiguan Group (Dwg²) develop in the landslide area, and they exhibit different deformation characteristics
3 in the locking segment and the non-locking segment subjected to landslide deformation and unloading effect. For the locking
4 segment in the landslide area, the surface layer consists of a loose accumulation body, which is composed primarily of
5 grayish-yellow silty soil mixed with fragments and has a thickness of about 3–5 m. The lower sliding body consists of
6 moderately to slightly weathered carbonaceous phyllites with attitudes of $190^\circ\text{--}260^\circ \angle 36^\circ\text{--}60^\circ$ (Fig. 5a). The sliding bed is
7 composed of the slightly weathered carbonaceous phyllites with attitudes of $190^\circ\text{--}260^\circ \angle 60^\circ\text{--}80^\circ$. The slightly weathered
8 carbonaceous phyllites have straight and smooth bedding planes, without any fillings or with a small amount of quartz veins
9 with hard structural planes. These phyllites have a joint spacing of 0.05–1.2 m, and their rock masses have rock quality
10 designation (RQD) values of 68.0%–76.8%. The anti-dip phyllites tend to deform along the slope direction, and the dip
11 angles of their bedding planes decrease gradually with a decrease in the depth (Fig. 6). Furthermore, the anti-dip phyllites are
12 less affected by landslide deformation with an increase in the depth. For example, the phyllites at a depth of 50 m in the
13 drilling borehole (Fig. 6c) exhibit intact cores, high-strength rock mass, and attitudes consistent with the slightly deformed
14 anti-dip rock masses at the landslide's back (Fig. 5b). According to stereographic projections (Figs. 6d–f), the dip angle of
15 the bedding plane and the stability of the landslide increase with an increase in the depth. Correspondingly, the anti-dip rock
16 mass, which is similar to the rock bridge and is referred to as the locking segment herein, is the key block that prevents
17 further landslide sliding. Only when the locking masses are cut off, does the overall landslide failure occur.

18 According to the discussion of Zhou et al. (2022), the locking masses of the Tizicao landslide occur on the convex bank,
19 while the non-locking masses have developed on the concave bank, indicating that the locking masses are directly related to
20 the S-shaped river valley under the landslide. From a geomorphological point of view, landslides rarely occur on convex
21 banks but occur more frequently on concave banks. From a topographical perspective, a convex slope is more stable than a
22 concave slope under the same conditions. Noticeably, the concave and convex banks of the S-shaped valley under the
23 Tizicao landslide differ greatly in slope and lithology. Therefore, the rock masses on the south side of the landslide above the
24 convex bank are intact and constitute the potential locking segment of the landslide.

25 For the non-locking segment in the area of the Tizicao landslide, its surface layer is composed of grayish-yellow silty
26 soil mixed with fractured rocks, with a thickness of about 6–8 m. Below the surface layer are the strongly weathered
27 carbonaceous phyllites with a thickness of 25–33 m. The soils in the sliding zone can also be observed in the non-locking
28 segment, with a thickness of about 0.5–1.2 m. Below the sliding zone are moderately weathered phyllites with attitudes of
29 $252^\circ\text{--}260^\circ \angle 65^\circ\text{--}73^\circ$, joint space of 0.5–1.2 m, and RQD values of 15.0%–54.5%. Owing to the large deformation in the
30 non-locking segment, the phyllites exhibit severe deformations, as manifested by the sliding of the phyllites along the slope
31 direction after the stratum toppling (Figs. 7b–c, 8a). As shown in Fig. 8, the bedding planes of rock masses within the drilling
32 depth (0–13 m) are along the slope direction, while the rock masses at a depth of more than 13 m are inclined in the opposite
33 direction. The attitudes of rock masses below the sliding surface roughly remain unchanged. Therefore, the shear failure of
34 the anti-dip phyllites is the fundamental cause of the large deformation in the north sliding area (Fig. 3a).

35 **3. Methods**

36 **3.1 Rock bridge models in the simulation program**

37 The FLAC3D program is used to simulate the 2D and 3D stability and deformation of landslides (Titti et al., 2020; Zhang et
38 al., 2013; Zhou et al., 2020). To investigate the 3D stability and deformation behaviors of the Tizicao landslide, this study
39 introduced three rock bridge models into the FLAC-3D program, namely IRMM (Kemeny, 2005; Zhang et al., 2020), JM

(Bonilla-Sierra et al., 2015; Jennings, 1970), and CSM-HSP (Huang et al., 2015; Scholtès and Donze, 2015), as shown in Fig. 9.

The IRMM model (Fig. 9a) is used to simulate the deformation and failure characteristics of rock bridges in rock masses. This model can effectively reveal the behaviors of stress concentration, cracking, extension, and penetration (Tang et al., 2001; Zhang et al., 2006). In the simulation of a landslide with a locking segment, the rock bridge (S1), which is an intact rock mass, was simulated using the tetrahedral elements in the FLAC3D program, the sliding surface (S2) was simulated using the contact surface model in FLAC3D program, and the sliding body (Block A) and the sliding bed (Block B) were linked with the continuous rock bridge (S1).

For the JM model, the limit equilibrium method is initially employed to calculate the 2D stability of rock slopes with discontinuous joints. Specifically, the slope stability is calculated by assigning the equivalent shear strength corresponding to different penetration rates to the potential sliding surface. The equivalent shear strength parameters can be calculated as follows:

$$c_{eq} = (1-k)c_r + kc_j \quad (1)$$

$$\tan \varphi_{eq} = (1-k) \tan \varphi_r + k \tan \varphi_j \quad (2)$$

where c_{eq} and φ_{eq} are the equivalent cohesion and the equivalent friction angle, respectively; φ_r and φ_j represent the friction angles of an intact rock and joints, respectively, and c_r and c_j are the cohesion of an intact rock and joints, respectively.

Considering that co-planar joints are separated by the intact rock bridge, the relative quantity of intact rocks along the sliding surface can be expressed as the ratio k , which is defined as follows (Jennings, 1970):

$$k = \frac{\sum A_j}{\sum A_j + \sum A_r} = 1 - k_L \quad (3)$$

where $\sum A_j$ denotes the surface area of joints, $\sum A_r$ is the surface area of the rock bridge, and k_L is the locking ratio (the ratio of the surface area of the rock bridge to the total sliding surface area).

The Fos can be calculated using equation (4):

$$FOS = \frac{\tau_f}{\tau} = \frac{N \tan \varphi_{eq} + c_{eq} A}{F_g \sin \theta} \quad (4)$$

where τ_f is the shear force along the joint surface with normal force N , A is the sliding surface area, θ is the inclination angle of the planar surface, and τ is the sine component of the gravitational force F_g .

Bonilla-Sierra et al. (2015) and Scholtès and Donze (2015) introduced the Jennings model into the 3D planar sliding analysis of slopes with rock bridges. They concluded that the rock bridges have notable control effects on the stability and failure of the slopes. However, the stability of a true 3D landslide with a locking segment is to be further studied. In this study, the JM model was introduced into the FLAC3D program. Then, the 3D stability of the whole landslide was simulated by assigning equivalent shear strength parameters to the contact surface model (S3), as shown in Fig. 9b.

As shown in Fig. 9c, two contact surface models, one with high strength parameters and the other with low strength parameters, were used to simulate the rock bridge (S4) and sliding surface (S5), respectively. The strength parameters of an intact rock mass were adopted for the rock bridge. In addition, shear stiffness and normal stiffness higher than those of the sliding surface (Huang et al., 2015) were required in the CSM-HSP model to simulate the real resistance characteristics of the rock bridge.

3.2 3D stability simulations

The 3D mesh model of the Tizicao landslide (Fig. 10) was established using the FLAC3D program. It was composed of a sliding bed, a sliding body, and a sliding surface, with a length of 1,100 m, a width of 700 m, and a height of 800 m. In this model, the sliding bed and sliding body were established using tetrahedral elements. The sliding surface was established

1 using contact surface elements, which allow the contact surface to slide. The geometric size and shape of the 3D sliding
2 surface were deduced according to the depth of the sliding zone soil obtained by drilling. The parameters such as the area
3 and the position of the locking segment were obtained by Zhou et al. (2022). The constitutive model of Mohr-Coulomb was
4 used in the simulation. The bottom was fixed as a boundary, while the top surface was set as a free boundary. The other four
5 surfaces were set as boundaries with fixed perpendicular displacement. Given that the simulations in this study are only
6 aimed at exploring the deformation and the overall stability of the landslide, the sliding body and sliding bed were supposed
7 to be heterogeneous, while factors such as joints and heterogeneity of rock masses were temporarily not considered. The
8 simulation parameters of the sliding body, sliding bed, and sliding surface in the model were obtained through indoor
9 geotechnical tests (Table 1). Among them, the rock density was obtained using the wax-sealing method; the Young's
10 modulus, Poisson's ratio, internal friction angle, and cohesion of rocks were collected from the triaxial test; and the tensile
11 strength was obtained from the Brazilian test.

12 The simulation analysis of the Tizicao landslide was conducted using the three rock bridge models mentioned above. As
13 revealed by site drilling, the rock masses in the locking segment have the same intact degree as the phyllites in the sliding
14 bed. Therefore, the strength parameters of the rock bridges were set at the same values as those of the rock masses in the
15 sliding bed (locking masses) in the IRMM model. Meanwhile, the shear stiffness and normal stiffness of the sliding surface
16 in this model were both set at 2.0 MPa/m to simulate the sliding state of the landslide. For the JM model, the rock bridge and
17 sliding surface were both simulated using the contact surface model. According to the site survey, the area of the locking
18 segment accounts for 15.2% of the total area of the landslide. The equivalent internal friction angle and equivalent cohesion
19 were determined at 35.68° and 503.24 kPa, respectively by solving equations (1) and (2). The tensile strength, shear stiffness,
20 and normal stiffness of the sliding surface were set at 0.18 MPa, 1800 MPa/m, and 1800 MPa/m, respectively in the JM
21 model. For the CSM-HSP model, the locking masses were replaced with the contact surface model, whose strength and
22 stiffness were both higher than those of the sliding surface. Their strength parameters were set at the same values as those of
23 the sliding bed. Meanwhile, the shear stiffness and normal stiffness of the contact surface of the rock bridge were both set at
24 2000 MPa/m. The strength parameters and stiffness coefficients of the sliding surface in the CSM-HSP were set at the same
25 values as those of the sliding surface in the IRMM since the sliding surface models were the same in FLAC3D.

26 **3.3 2D stability simulation**

27 To compare the differences between the 2D and 3D stability of the Tizicao landslide, this study conducted the 2D stability
28 analysis of four sections of the landslide (Fig. 4) using the SLOPE/W module of the program GeoStudio 2012. Meanwhile,
29 the JM model was introduced into Bishop's algorithm of the GeoStudio program. Bishop's algorithm is a limit equilibrium
30 method for stability calculations. According to the JM model, the equivalent shear strength parameters were determined
31 based on penetration rates using equations (1) and (2). Then, these parameters were assigned to the sliding surface to
32 calculate the 2D Fos using Bishop's algorithm. The simulation parameters of the sliding body, sliding surface, and locking
33 masses are shown in Table 1. According to the site survey, sections A-A', B-B', C-C', and D-D' have k_L values of 0, 0, 0.23,
34 and 0.26, respectively, and the 2D stability factors calculated are shown in Table 2 and Fig. 11.

35 **4. Results**

36 **4.1 Comparative analysis of 2D and 3D stability**

37 Table 2 shows the 3D Fos of the Tizicao landslide obtained using the three models and the 2D Fos of the landslide calculated
38 by using the JM model. The 3D Fos values obtained using the IRMM, JM, and CSM-HSP models were 1.780 ± 0.2 , $1.950 \pm$
39 0.3 , and 1.710 ± 0.2 , respectively, which are almost equal and average 1.813. These results indicate that the Tizicao landslide
40 is stable and large-scale sliding will not occur under current conditions. The state of the landslide is consistent with the

1 displacement monitored in the field (Fig. 3c). As shown in Fig. 11, sections A-A', B-B', C-C', and D-D' of the Tizicao
2 landslide had 2D Fos values of 0.978 ± 0.15 , 0.924 ± 0.1 , 1.888 ± 0.23 , and 2.075 ± 0.20 , respectively. Therefore, the
3 landslide is unstable along sections A-A' and B-B', which is consistent with the large-scale collapse in the northern front of
4 the landslide (Fig. 2d). In contrast, the landslide is stable along sections C-C' and D-D', and this result agrees well with the
5 middle and south deformation areas of the landslide. The difference in the landslide stability between the north (sections
6 A-A' and B-B') and south (sections C-C' and D-D') sides of the landslide is primarily caused by the existence of the locking
7 masses in the southern front of the landslide (Fig. 2b). According to Table 2, the 3D Fos of the Tizicao landslide differ
8 greatly from its 2D Fos. For the landslide sections with severe deformation (sections A-A' and B-B'), their 2D Fos values
9 were lower than their 3D Fos values. However, for the landslide sections with slight deformation (sections C-C' and D-D'),
10 their 2D Fos values were significantly greater than their 3D Fos values, especially for the landslide sections with the locking
11 segment. The relatively conservative 2D stability analysis (Li et al., 2010; Park et al., 2017) makes the 2D Fos values usually
12 lower than the 3D Fos values. Nonetheless, for the landslide sections with rock bridges, their 2D Fos values may exceed
13 their 3D Fos values (Table 2). The overall stability of a landslide with rock bridges should be assessed using 3D Fos since
14 the 2D Fos represents only the local stability of the landslide.

15 **4.2 Analysis of landslide deformations**

16 According to the above analysis, all the IRMM, JM, and CSM-HSP models can be used to effectively simulate the overall
17 stability of 3D landslides and obtain their 3D Fos. However, the JM model cannot simulate real 3D deformation behaviors of
18 landslides since it uses equivalent strength parameters. Meanwhile, the IRMM model is subjected to rather complex
19 modeling although it can be used to obtain real 3D deformation characteristics of landslides. Therefore, the CSM-HSP model
20 was selected to simulate the deformation trend of the Tizicao landslide. Figs. 12a–d show the total displacement contours of
21 the sliding body, the shear displacement contours and the sliding state of the sliding surface, and the sliding velocity vectors
22 of the sliding surface, respectively.

23 As shown in the isoline map of surface displacement (Fig. 3b), a sliding event occurred in a general northeast direction
24 (closer to the north) from August 13, 2017 to January 25, 2018. In this event, the maximum surface displacement (1210 mm)
25 occurred at the northern toe, which coincided with the location where the front collapsed (Fig. 2d). The landslide's rear and
26 middle parts showed similar surface displacement of 150–300 mm in the sliding event, indicating that they slid as a whole.
27 The minimum surface displacement of 30–150 mm occurred in the southern area of the slope toe throughout the whole
28 sliding event. Therefore, the southern area serves as the anti-sliding area of the whole landslide.

29 As shown in Fig. 12a, the total displacement contours of the sliding body show significantly different deformation
30 zones, namely the intense deformation zone from the rear to the north side wall of the landslide, the moderate deformation
31 zone from the middle part of the landslide to the northern part of the landslide front, and the slight deformation zone in the
32 middle and southern parts of the landslide front. The maximum displacement of the sliding body is 10.69 m at the landslide's
33 rear (Fig. 12a), which agrees with the width of crack L07 (Fig. 13). Fig. 12a shows that the Tizicao landslide tends to slide
34 northeastward generally owing to the sliding resistance of the locking segment. This tendency is consistent with the crack
35 distribution (Fig. 3a) and the isoline map of surface displacement (Fig. 3b). Figs. 12a and 3a show different displacement
36 values because the monitoring data obtained from August 13, 2017 to January 25, 2018 (after the large deformation in July
37 2017) were not the complete deformation data of the landslide. In contrast, Figs. 12a and 3a reflect the same deformation
38 tendency.

39 Fig. 12b shows that the shear deformation of the sliding surface agrees well with the total displacement contours (Fig.
40 12a). According to this figure, the shear displacement of the sliding surface is 0 at the position of the locking segment. Fig.
41 12c shows the sliding state when the Tizicao landslide is in equilibrium under current conditions. The red, blue, and green
42 zones in Fig. 12c represent the sliding surface areas where sliding has not occurred, is occurring, and has occurred,

1 respectively. Therefore, no shear displacement occurs in the locking segment on the sliding surface, and the 3D locking
2 segment along the sliding surface can be observed. The sliding velocity vector diagram of the sliding surface (Fig. 12d)
3 indicates that the sliding velocity is low and tends to be 0 in the locking segment. Therefore, the existence of the locking
4 segment is the fundamental reason for the absence of large-scale sliding in the whole landslide.

5 **5. Discussion**

6 **5.1 Effects of the locking ratio on 3D stability**

7 To establish landslide models with different locking ratios, rectangular wireframes were used to cover the outline of the
8 landslide (Fig. 14), and the lengths and widths of the wireframes and their ratios were obtained. Rectangles with increasing
9 lengths and widths but a fixed length/width ratio were used to gradually match the landslide from the southern part of the
10 front to the rear in the north. Then, the coverage areas and positions of the 3D sliding surface were obtained as the actual
11 locking ratio changed from 0 to 1 (interval: 0.1). Accordingly, the 3D modeling of the Tizicao landslide was conducted using
12 the three rock bridge models.

13 Fig. 15 shows the 3D Fos curves of the landslide under different locking ratios. According to this figure, the 3D Fos
14 curves obtained using the three rock bridge models were roughly the same. In detail, they were parabolas overall, and all the
15 Fos first increased and then tended to be stable as the locking ratio increased. According to the field survey, the Tizicao
16 landslide has an actual locking ratio of 0.152, corresponding to the 3D Fos values of 1.71–1.95. When the locking area of the
17 landslide decreased gradually to 0 (no locking segment), the 3D Fos of the landslide would be 1.215, decreasing by
18 29.0%–37.7% compared to the 3D Fos under current conditions. In this case, the landslide would be unstable. This indicates
19 that the locking segment has significant effects on the overall stability of the landslide.

20 According to Equation (4), there exists a linear relationship between the locking ratio and the Fos, which applies to the
21 2D stability of landslides subjected to planar sliding (Jennings, 1970). However, the Fos of 3D landslides with a locking
22 segment varied with the locking ratio in the form of an approximate quadratic parabola under the influence of the positions
23 of locking masses and the curvature of the sliding surface (Fig. 15).

24 As shown in Fig. 15, the 3D Fos curves are significantly piecewise, and two linear fitting curves (black dashed lines) of
25 the 3D Fos were determined. The varying rate of the 3D Fos under a locking ratio of less than 0.6 was significantly higher
26 (about six times) than that under a locking ratio of more than 0.6. Therefore, in the case of a high locking ratio (a low
27 penetration rate) of the landslide, the change in the locking ratio has a small impact on the overall stability of the landslide.
28 In contrast, the overall stability of the landslide would decrease significantly as the locking ratio decreased to less than 0.6.
29 This is the immediate cause of the result that the Fos of the landslide decreases rapidly and the landslide suffers a dramatic
30 failure under the critical failure condition.

31 **5.2 Effects of the strength parameters of the sliding surface and locking masses on 3D stability**

32 To estimate the effects of the strength parameters of the sliding surface and locking masses on the 3D stability of the
33 landslide, the strength parameters were obtained through the direct shear test of soils or cores drilled. The cohesion and
34 internal friction angle of the locking masses were determined at 10–20000 kPa and 20°–65°, respectively, while those of the
35 sliding surface were calculated at 6–1000 kPa and 5°–35°, respectively. Then, the 3D Fos curves under different strength
36 parameters and a locking ratio of 0.5 were derived from the three rock bridge models, as shown in Fig. 16. According to Fig.
37 16a, the 3D Fos increased rapidly when the cohesion of the locking masses was 10–1000 kPa, and then became stable when
38 the cohesion exceeded 1000 kPa. Therefore, the 3D Fos was sensitive to the cohesion of the locking masses in the range of
39 10–1000 kPa but did not significantly vary when the cohesion was greater than 1000 kPa. The cohesion of the sliding surface
40 on 3D Fos exhibited different effects (Fig. 16c). With an increase in the cohesion of the sliding surface, the 3D Fos obtained

1 using IRMM and CSM-HSP first increased non-linearly and then stabilized, while the 3D Fos obtained using the JM
2 increased at a decreased acceleration rate.

3 As shown in Fig. 16b, the 3D Fos of the landslide first increased non-linearly and then stabilized with an increase in the
4 internal friction angle of the locking masses. It increased from 2.49 to 4.53 (1.82 times) as the friction angle of the locking
5 mass increased from 20° to 65°, with an average growth rate of 0.045. The 3D Fos of the landslide varied with the internal
6 friction angle of the sliding surface in a similar trend (Fig. 16d). Specifically, the 3D Fos increased from 3.20 to 4.58 (4.13
7 times) as the internal friction angle of the sliding surface increased from 5° to 35°, showing an average growth rate of 0.046.
8 The comparison of the average growth rates reveals that the internal friction angles of both the locking masses and the
9 sliding surface have almost the same effects on the 3D Fos of the landslide.

10 **5.3 Comparative analysis of the three rock bridge models in the numerical simulation program**

11 The IRMM, JM, and CSM-HSP models yielded almost equal 3D Fos values (Fig. 15), indicating that the three models can be
12 used to effectively simulate the overall stability of a landslide with a locking segment. The IRMM model (Fig. 9a) is
13 frequently used to simulate the stability and the deformation and failure behaviors of 2D and 3D rock slopes with rock
14 bridges (Zhang et al., 2014; Hu et al., 2018). This model can simulate the actual deformation process of the slopes and is one
15 of the most effective models in the simulation of rock slopes/landslides. However, the IRMM model requires accurate
16 information such as the area and position of a locking segment. Accordingly, it is necessary to identify a locking segment of
17 a landslide in detail before stability analysis, which is quite difficult due to the concealment of locking masses (Elmo et al.,
18 2018; Guerin et al., 2019). Meanwhile, the uncertain position and irregular geometric size of a locking segment also pose
19 great difficulties for landslide modeling. The JM model (Fig. 9b) cannot be used to further analyze the deformation and
20 failure behaviors of landslides and obtain actual deformation since it ignores the positions of rock bridges and the response
21 of rock bridges to the landslide deformation (Einstein et al., 1983). However, the 3D Fos of landslides (Figs. 15–16) can be
22 obtained using this model. Therefore, the JM model can be used to only analyze the macroscopic 3D stability of landslides.
23 For the CSM-HSP model (Fig. 9c), two contact surface models, one with high strength parameters and the other with low
24 strength parameters, can be used to simulate the rock bridge and the sliding surface, respectively. This model integrates the
25 advantages of the IRMM model in terms of simulating the actual deformation of slopes with rock bridges and the advantages
26 of the JM model in terms of modeling. Using this model, the overall deformation and Fos of landslides can be obtained, and
27 the position and area of a locking segment can be changed at will, thus greatly reducing the workload in the modeling of
28 landslides with rock bridges. The CSM-HSP model outperforms the other two models in simulating both the 3D stability and
29 the deformation and failure behaviors of landslides with a locking segment.

30 **6. Conclusions**

31 All the IRMM, JM, and CSM-HSP models can be used to obtain the 3D Fos of landslides with a locking segment each,
32 providing convenient and effective simulation approaches for assessing and predicting the 3D stability of the landslides. The
33 simulation results indicate that the Tizicao landslide is generally stable under current conditions owing to the existence of the
34 locking segment in the southern front. This conclusion is consistent with the deformation and failure characteristics, the
35 position and area of the locking segment, and the site monitoring data of the Tizicao landslide. As indicated by the
36 comparison between the results of 3D and 2D stability analyses of the Tizicao landslide, the 2D stability analysis is suitable
37 only for local stability, while the 3D stability represents the overall stability of landslides with a locking segment each. As
38 shown by the discussion, there is a linear relationship between the locking ratio and 2D Fos of landslides with a locking
39 segment each that are subjected to planar sliding, while there exists an approximate quadratic parabola between the locking
40 ratio and 3D Fos of landslides with a locking segment each under the influence of the positions of the locking masses and the

1 curvature of the sliding surface. The increase in the strength parameters of both the locking segment and the sliding surface
2 can improve the stability of landslides non-linearly. The 3D Fos of the landslides is sensitive to the cohesion of both the
3 locking segment and the sliding surface in the range of 10–1000 kPa. The internal friction angles of the locking masses and
4 the sliding surface have almost the same effects on the 3D Fos of landslides. The CSM-HSP model integrates the advantages
5 of the IRMM model in terms of simulating the actual deformation of slopes with rock bridges and the advantages of the JM
6 model in terms of modeling. Therefore, this model outperforms the other two models in simulating both the 3D stability and
7 the deformation and failure behaviors of landslides with a locking segment each.

8
9 *Data availability.* The research data on landslides used in the paper are derived mainly from Zhou et al. (2022), as well as the site survey
10 conducted by the team of the authors.

11 *Competing interests.* The authors declare that they have no conflict of interest.

12 *Author contribution.* Yuntao Zhou developed the model code, performed the simulations, and prepared the manuscript draft; Xiaoyan
13 Zhao and Bernd Wünnemann reviewed and edited the manuscript; Guangze Zhang, Jiajia Zhang, and Minghui Meng conducted the
14 landslide investigations.

15 *Acknowledgments.* This study was supported by the National Natural Science Foundation of China (grant no.: 41672295), the Ministry of
16 Science and Technology of China (grant no.: 2019YFC1509904), and the China Geological Survey (grant no.: DD20230450). The authors
17 are grateful to the editors and reviewers for their kind and constructive suggestions.

18 **References**

19 Bishop, A. W.: The use of slip circle in stability analysis of slopes, *Géotechnique*, 5, 7–17,
20 <https://doi.org/10.1680/geot.1955.5.1.7>, 1955.

21 Bonilla-Sierra, V., Scholtès, L., Donze, F., Elmoutie, M.: DEM analysis of rock bridges and the contribution to rock slope
22 stability in the case of translational sliding failures, *Int. J. Rock Mech. Min. Sci.*, 80, 67–78,
23 <https://doi.org/10.1016/j.ijrmms.2015.09.008>, 2015.

24 Deng, J., Tham, L., Lee, C., Yang, Z.: Three-dimensional stability evaluation of a preexisting landslide with multiple sliding
25 directions by the strength-reduction technique, *Can. Geotech. J.*, 44, 343–354, <https://doi.org/10.1139/t06-115>, 2011.

26 Einstein, H. H., Veneziano, D., Baecher, G. B., O'Reilly, K. J.: The effect of discontinuity persistence on rock slope stability,
27 *Int. J. Rock Mech. Min. Sci. & Geomech. Abstr.* 20, 227–236, [https://doi.org/10.1016/0148-9062\(83\)90003-7](https://doi.org/10.1016/0148-9062(83)90003-7), 1983.

28 Elmo, D., Donati, D., Stead, D.: Challenges in the characterisation of intact rock bridges in rock slopes, *Eng. Geol.*, 245,
29 81–96, <https://doi.org/10.1016/j.enggeo.2018.06.014>, 2018.

30 Google Earth Pro, https://www.google.com/intl/en_in/earth/versions/#earth-pro, 2021.


31 Guerin, A., Jaboyedoff, M., Collins, B., Derron, M. H., Stock, G., Matasci, B., Boesiger, M., Lefevre, C., Podladchikov, Y.:
32 Detection of rock bridges by infrared thermal imaging and modeling, *Sci. Rep.*, 9, 13138,
33 <https://doi.org/10.1038/s41598-019-49336-1>, 2019.

34 Hovland, H.J.: Three-dimensional slope stability analysis method, *J. Geotech. Eng. Div., ASCE*, 103, 971–986,

- 1 <https://doi.org/10.1061/AJGEB6.0000709>, 1977.
- 2 Hu, Q. J., Shi, R. D., Zheng, L. N., Cai, Q. J., Du, L. Q., He, L. P.: Progressive failure mechanism of a large bedding slope
3 with a strain-softening interface. *B. Eng. Geol. Environ.*, 77, 69–85, <https://doi.org/77.10.1007/s10064-016-0996-x>,
4 2018.
- 5 Huang, R. Q.: Mechanisms of large-scale landslides in China. *B. Eng. Geol. Environ.*, 71, 161–170,
6 <https://doi.org/10.1007/s10064-011-0403-6>, 2012.
- 7 Huang, D., Cen, D. F., Ma, G. W., Huang, R. Q.: Step-path failure of rock slopes with intermittent joints, *Landslides*, 12,
8 911–926, <https://doi.org/10.1007/s10346-014-0517-6>, 2015.
- 9 Hungr, O., Salgado, F. M., Byrne, P. M.: Evaluation of a three-dimensional method of slope stability analysis. *Can. Geotech.*
10 *J.*, 26, 679–686, <https://doi.org/10.1139/t89-079>, 1989.
- 11 Jennings, J. E.: A mathematical theory for the calculation of the stability of open cast mines. In: van Rensburg P. (Eds.),
12 *Planning open pit mines: Proceedings of the Symposium on the Theoretical Background to the Planning of Open Pit*
13 *Mines with Special Reference to Slope Stability*. Johannesburg, Republic of South Africa; August, 87–102, 1970.
- 14 Kemeny, J. Time-dependent drift degradation due to the progressive failure of rock bridges along discontinuities, *Int. J. Rock*
15 *Mech. Min. Sci.*, 42, 35–46, <https://doi.org/10.1016/j.ijrmms.2004.07.001>, 2005.
- 16 Lam, L., Fredlund, D. G.: A general limit equilibrium model for three-dimensional slope stability analysis, *Can. Geotech. J.*,
17 30, 905–919, <https://doi.org/10.1139/t93-089>, 1993.
- 18 Leshchinsky, D., Baker, R., Silver, M.L.: Three dimensional analysis of slope stability. *Int. J. Numer. Anal. Met.*, 9, 199–223,
19 <https://doi.org/10.1002/nag.1610090302>, 1986.
- 20 Li, A. J., Merifield, R., Lyamin, A.: Three-dimensional stability charts for slopes based on limit analysis methods. *Can.*
21 *Geotech. J.*, 47, 1316–1334, <https://doi.org/10.1139/T10-030>, 2010.
- 22 Lin, F., Wu, L. Z., Huang, R. Q., Zhang, H.: Formation and characteristics of the Xiaoba landslide in Fuquan, Guizhou,
23 China, *Landslides*, 15, 669–681, <https://doi.org/10.1007/s10346-017-0897-5>, 2018.
- 24 Ma, Y. C., Su, P. D., Li, Y. G.: Three-dimensional nonhomogeneous slope failure analysis by the strength reduction method
25 and the local strength reduction method, *Arab. J. Geosci.*, 13, 21, <https://doi.org/10.1007/s12517-019-5000-1>, 2020.
- 26 Morgenstern, N. R., Price, V. E.: The analysis of the stability of general slip surfaces, *Geotechnique*, 15, 79–93,
27 <https://doi.org/10.1680/geot.1965.15.1.79>, 1965.
- 28 Park, D., Michalowski, R. L. Three-dimensional stability analysis of slopes in hard soil/soft rock with tensile strength cut-off,
29 *Eng. Geol.*, 229, 73–84, <http://dx.doi.org/10.1016/j.enggeo.2017.09.018>, 2017.
- 30 Romer, C., Ferentinou, M.: Numerical investigations of rock bridge effect on open pit slope stability. *J. Rock Mech. Geotech.*,
31 11, 1184–1200, <https://doi.org/11.10.1016/j.jrmge.2019.03.006>, 2019.



- 1 Scholtès, L., Donze, F. V.: A DEM analysis of step-path failure in jointed rock slopes, *Comptes Rendus Mécanique*, 343,
2 155–165, <https://doi.org/10.1016/j.crme.2014.11.002>, 2015.
- 3 Spencer, E.: A method of analysis of the stability of embankments assuming parallel inter-slice forces, *Géotechnique*, 17,
4 11–26, <https://doi.org/10.1680/geot.1967.17.1.11>, 1967.
- 5 Stead, D., Eberhardt, E., Coggan, J. S.: Development in the characterization of complex rock slope deformation and failure
6 using numerical modeling techniques, *Eng. Geol.*, 83, 217–235, <https://doi.org/10.1016/j.enggeo.2005.06.033>, 2006.
- 7 Tang, C. A., Lin, P., Wong, R. H. C., Chau, K. T.: Analysis of crack coalescence in rock-like materials containing three flaws
8 - Part II: Numerical approach, *Int. J. Rock Mech. Min. Sci.*, 38, 925–939,
9 [https://doi.org/10.1016/S1365-1609\(01\)00065-X](https://doi.org/10.1016/S1365-1609(01)00065-X), 2001.
- 10 Titti, G., Bossi, G., Zhou, G. G. D., Marcato, G., Pasuto, A.: Backward automatic calibration for three-dimensional landslide
11 models, *Geosci. Front.*, 12, 231–241, <https://doi.org/10.1016/j.gsf.2020.03.011>, 2020.
- 12 Tuckey, Z., Stead, D.: Improvements to field and remote sensing methods for mapping discontinuity persistence and intact
13 rock bridges in rock slopes, *Eng. Geol.*, 208, 136–153, <https://doi.org/10.1016/j.enggeo.2016.05.001>, 2016.
- 14 Wang, W. P., Yin, Y. P., Yang, L. W., Zhang, N., Wei, Y.J.: Investigation and dynamic analysis of the catastrophic rockslide
15 avalanche at Xinmo, Maoxian, after the Wenchuan Ms 8.0 earthquake, *B. Eng. Geol. Environ.*, 79, 495–512,
16 <https://doi.org/10.1007/s10064-019-01557-4>, 2019.
- 17 Wang, H. L., Xu, W. Y.: Stability of Liangshuijing landslide under variation water levels of Three Gorges Reservoir, *Eur. J.*
18 *Environ. Civ. Eng.*, 17, 158–173, <https://doi.org/10.1080/19648189.2013.834592>, 2013.
- 19 Xu, Q., Fan, X. M., Huang, R. Q., Yin, Y. P., Hou, S. S., Dong, X. J., Tang, M. G.: A catastrophic landslide-debris flow in
20 Wulong, Chongqing, China in 2009: background, characterization, and causes, *Landslides*, 7, 75–87,
21 <https://doi.org/10.1007/s10346-009-0179-y>, 2010.
- 22 Yin, Y. P., Sun, P., Zhang, M., Li, B.: Mechanism on apparent dip sliding of oblique inclined bedding rockslide at Jiweishan,
23 Chongqing, China, *Landslides*, 8, 49–65, <https://doi.org/10.1007/s10346-010-0237-5>, 2011.
- 24 Zhang, H. Q., Zhao, Z. Y., Tang, C. A., Song, L.: Numerical study of shear behavior of intermittent rock joints with different
25 geometrical parameters, *Int. J. Rock Mech. Min. Sci.*, 43, 802–816, <https://doi.org/10.1016/j.ijrmms.2005.12.006>,
26 2006.
- 27 Zhang, K., Cao, P., Meng, J. J., Li, K. H., Fan, W. C.: Modeling the progressive failure of jointed rock slope using fracture
28 mechanics and the strength reduction method, *Rock Mech. Rock Eng.*, 48, 771–785,
29 <https://doi.org/10.1007/s00603-014-0605-x>, 2014.
- 30 Zhang, K., Chen, Y. L., Fan, W. C., Liu, X. H., Luan, H. B., Xie, J. B.: Influence of intermittent artificial crack density on
31 shear fracturing and fractal behavior of rock bridges: Experimental and numerical studies. *Rock Mech. Rock Eng.*, 53,

- 1 1–16, <https://doi.org/10.1007/s00603-019-01928-z>, 2020.
- 2 Zhang, Y. B., Chen, G. Q., Zheng, L., Li, Y. G., Zhuang, X. Y.: Effects of geometries on three-dimensional slope stability,
3 *Can. Geotech. J.*, 50, 233–249, <https://doi.org/10.1139/cgj-2012-0279>, 2013.
- 4 Zheng, H.: A three-dimensional rigorous method for stability analysis of landslides, *Eng. Geol.*, 145–146, 30–40,
5 <https://doi.org/10.1016/j.enggeo.2012.06.010>, 2012.
- 6 Zhou, Y. T., Shi, S. W., Tang, H. M., Wang, L. F.: Assessment of rockfall hazards of Moziyan in Hechuan District,
7 Chongqing, China. *Geotechnical and Geological Engineering*, 38, 5805–5817,
8 <https://doi.org/10.1007/s10706-020-01394-3>, 2020.
- 9 Zhou, Y. T., Zhao, X. Y., Zhang, J. J., Meng, M. H.: Identification of a locking segment in a high-locality landslide in
10 Shidaguan, Southwest China, *Nat. Hazards*, 111, 2909–2931, <https://doi.org/10.1007/s11069-021-05162-1>, 2022.

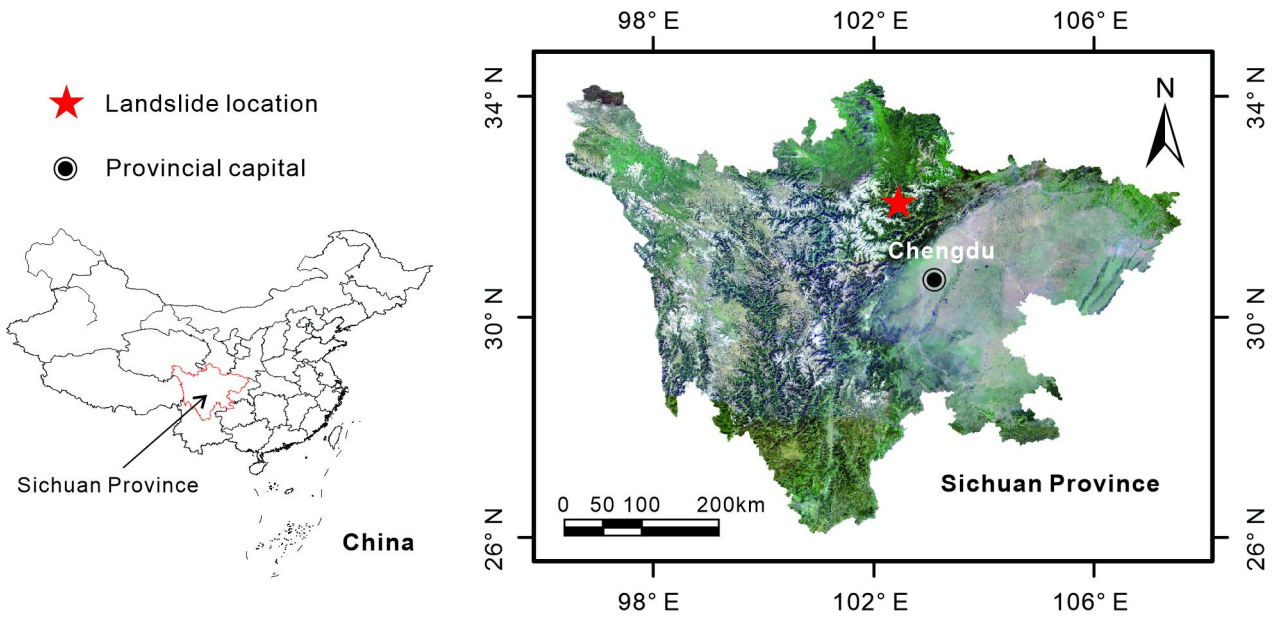


1


2 **Figure 1: Location of the Tizicao landslide in Sichuan Province, southwest China. Source: ©Google Earth Pro 2021.**

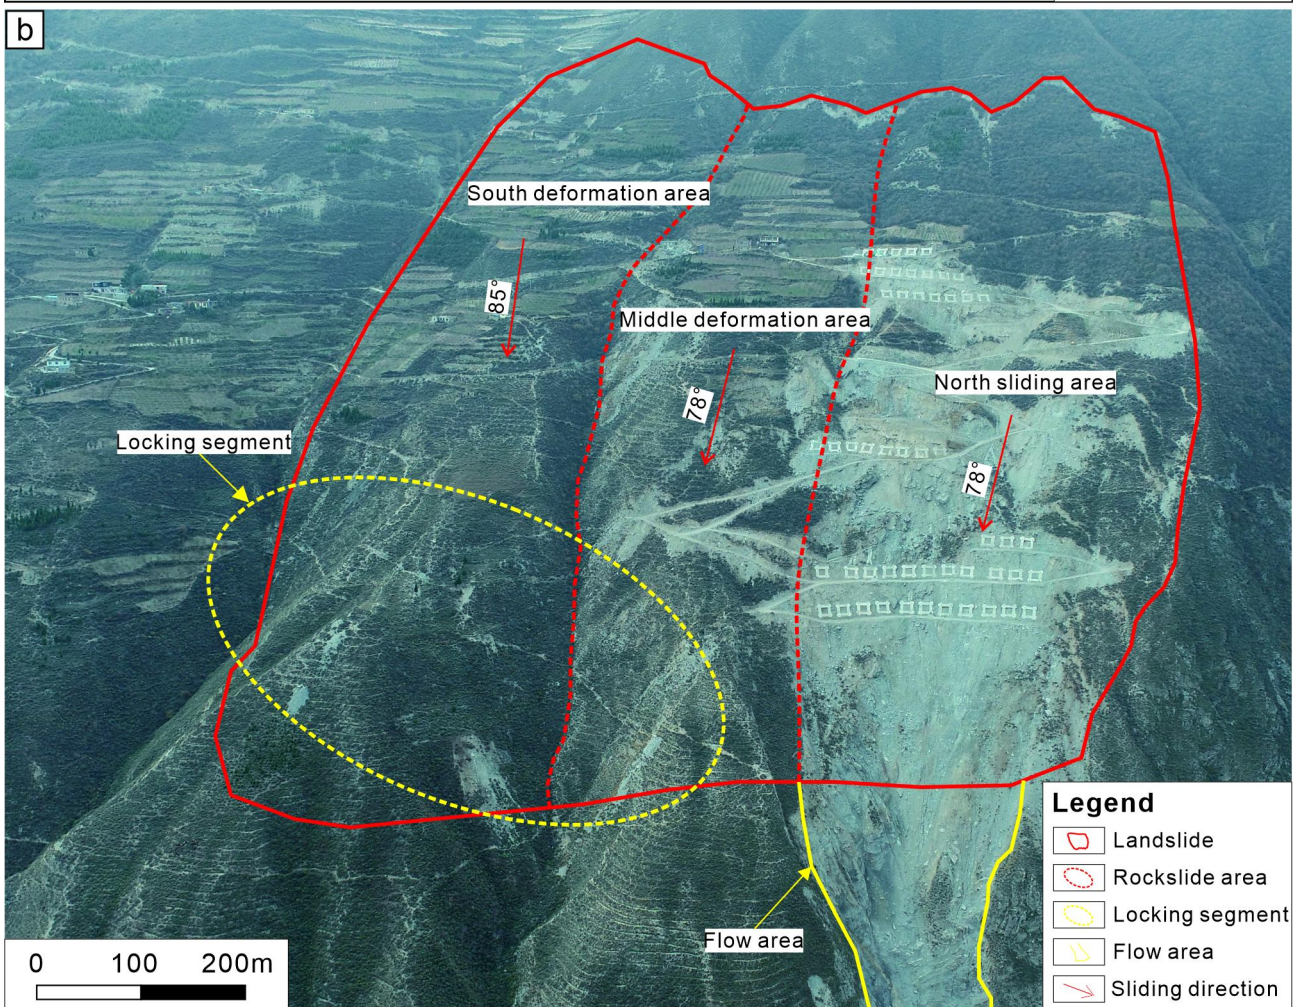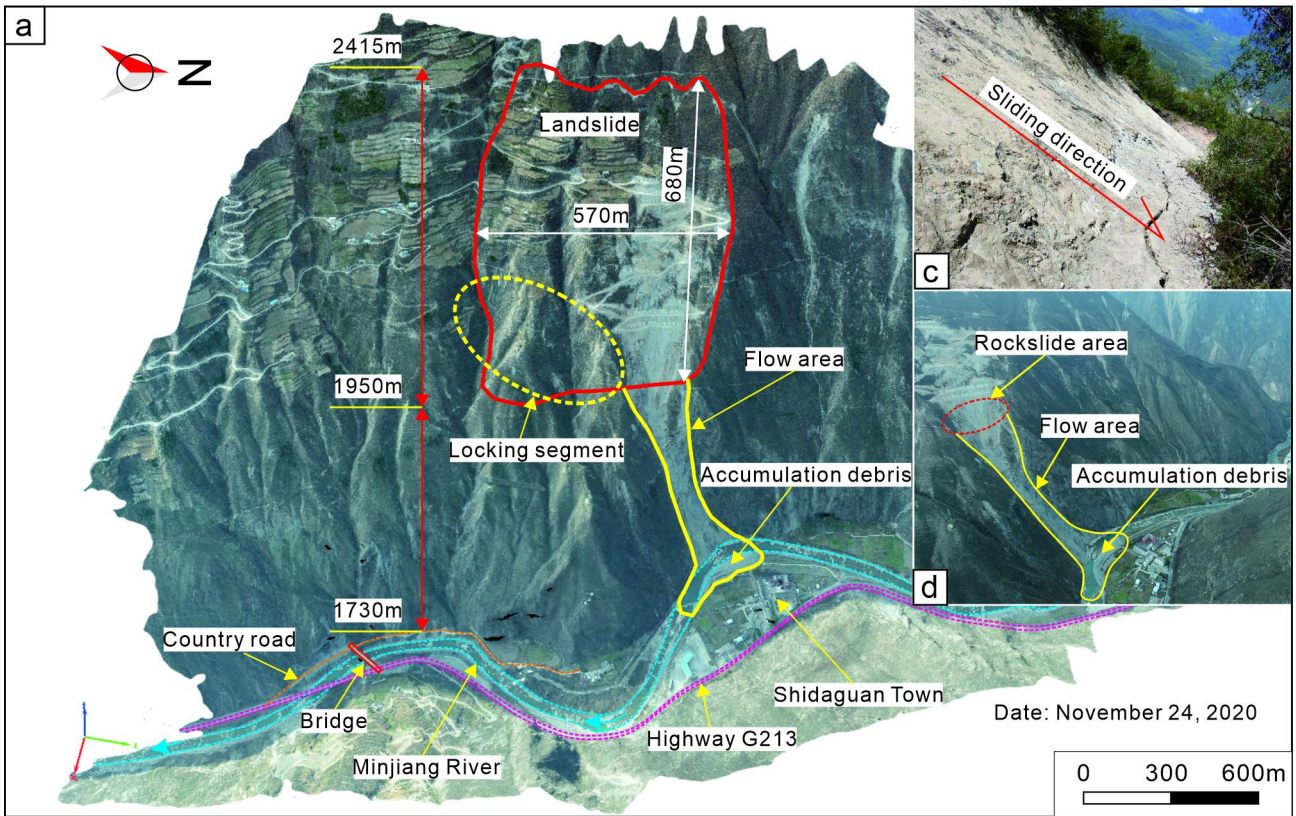


1
2 **Figure 2: Overall perspective of the site area of the Tizicao landslide (after Zhou et al., 2022).** a An orthoimage of the landslide site
3 area taken on November 24, 2020, with a resolution of 3840×2160 . b Three deformation areas of the Tizicao landslide. The red
4 dashed line denotes the boundary of the deformation area. c Rear wall. d Rockslide area, flow area, and accumulated debris.

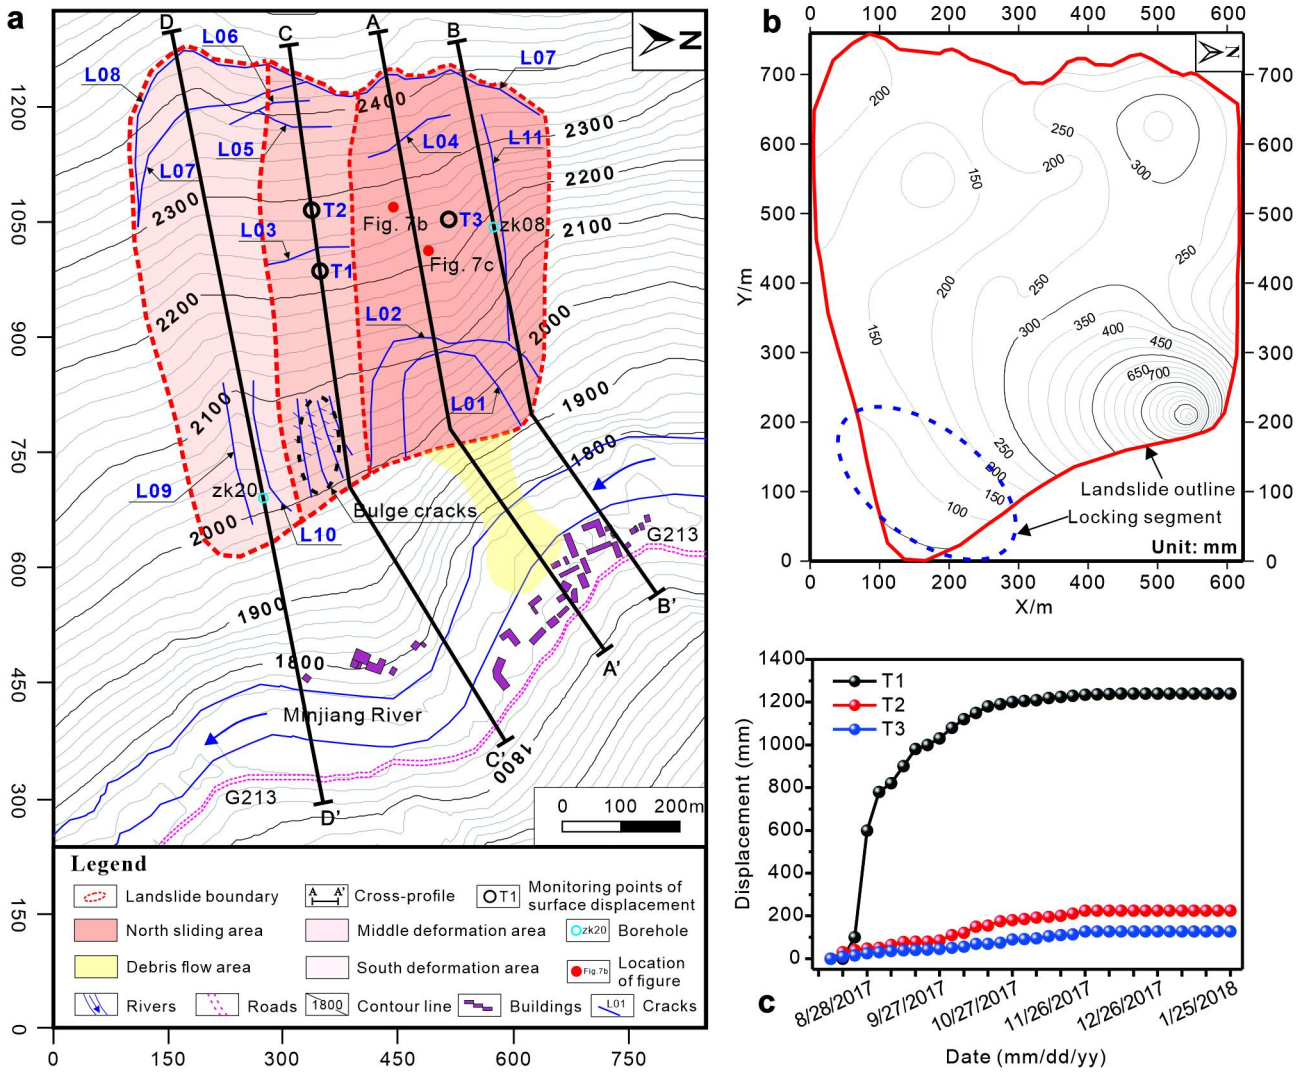



1
2 **Figure 3: The topographic plan, isoline map of surface displacement, and displacement monitoring curves of the Tizicao landslide.**
3 **a** Topographic plan of the deformation areas, the crack distribution, and the locations of engineering-geotechnical sections (after
4 **Zhou et al., 2022).** **b** Isoline map of the surface displacement of the Tizicao landslide from August 13, 2017 to January 25, 2018
5 **(Zhou et al., 2022); c** Displacement monitoring curves of the landslide surface (from August 13, 2017 to January 25, 2018).

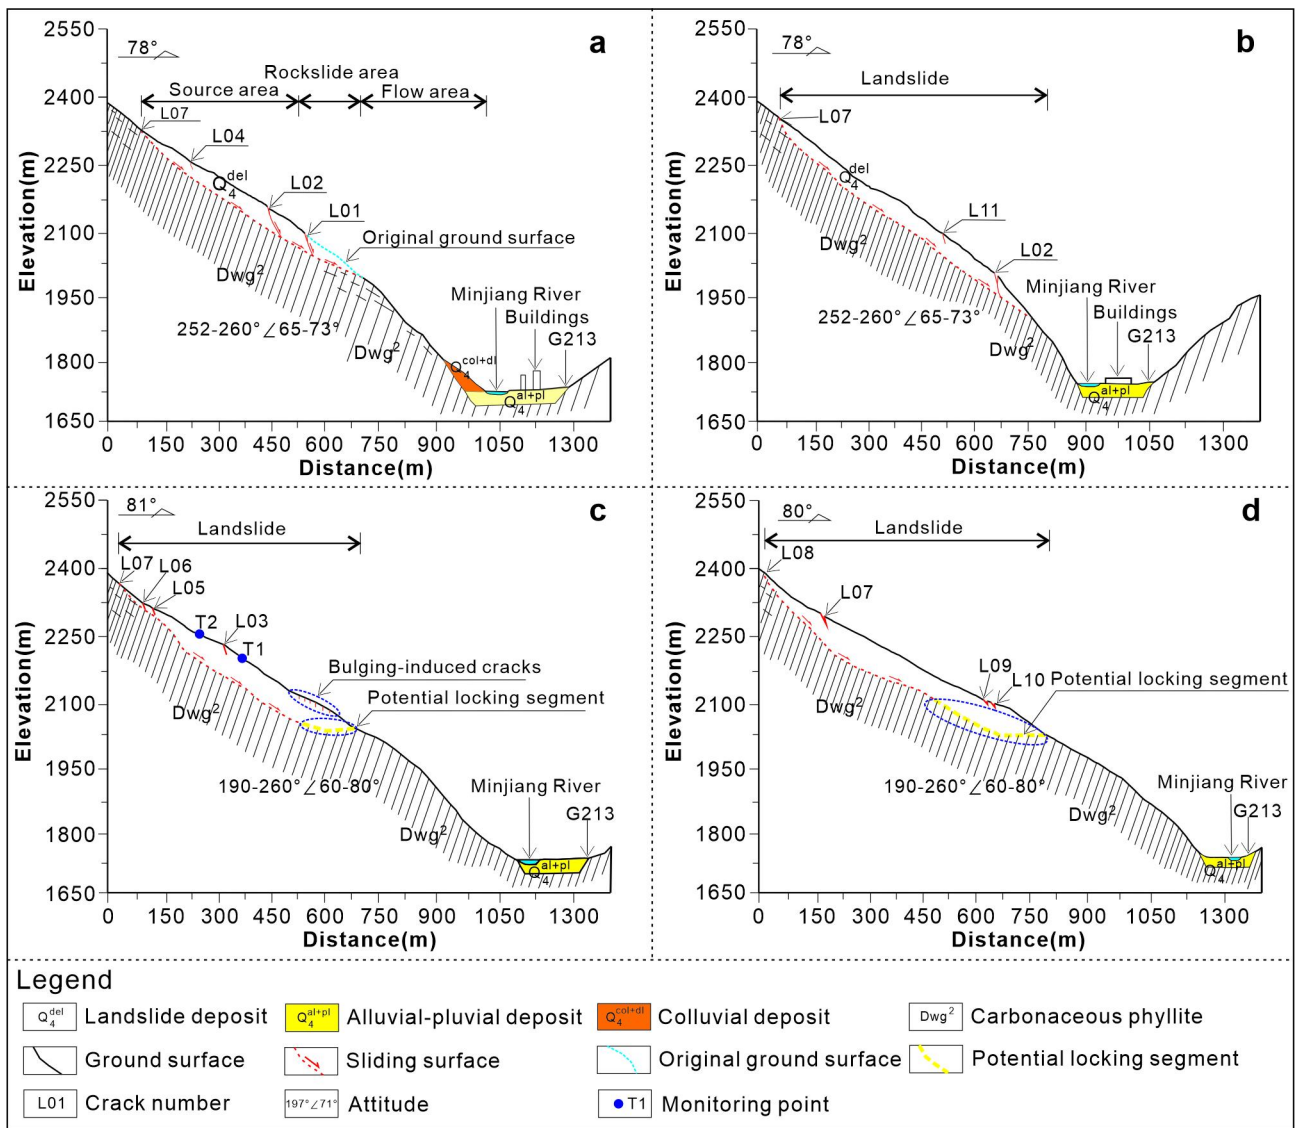

1
2 **Figure 4: Engineering-geotechnical sections of the Tizicao landslide. a Section A-A'. b Section B-B'. c Section C-C'. d Section D-D'**
3 **(after Zhou et al., 2022).**

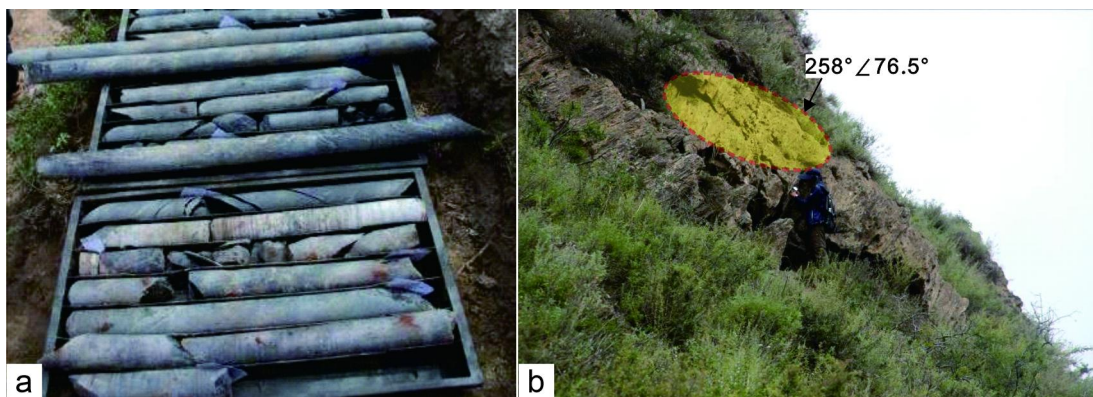


4
5
6 **Figure 5: Rock cores drilled from borehole zk20 and exposed phyllites at the back of the landslide. a Intact rock cores (Zhou et al.,**
7 **2022). b Exposed phyllites with an attitude of 258° / 76.5°.**

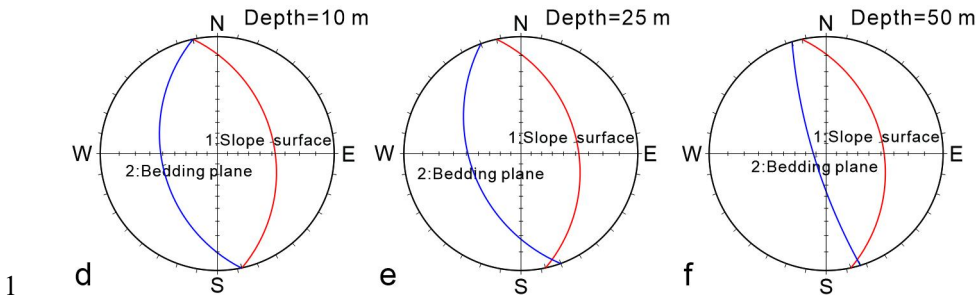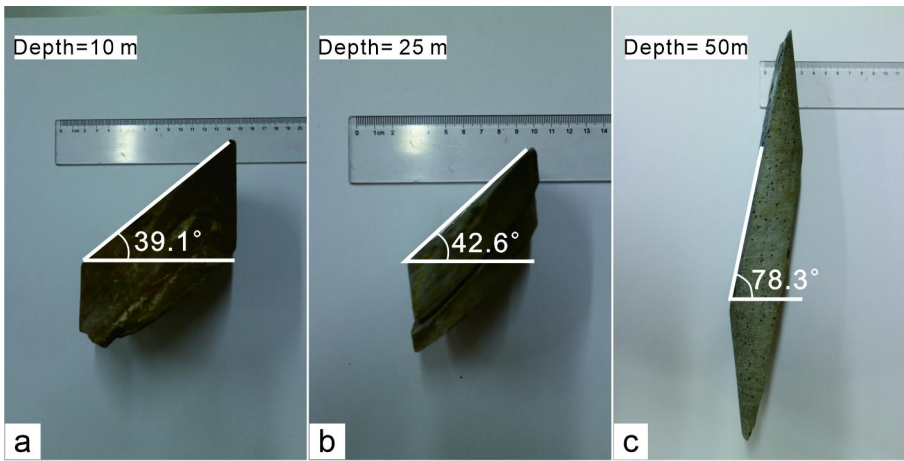


1
2 **Figure 6: Rock cores and stereographic projections at different depths. a–c** Rock cores at the depth of 10 m, 25 m, and 50 m,
3 **respectively in borehole zk20. The diameters of the drilling hole are 100 mm and 60 mm at the depth of 0–15 m and 15–70 m,**
4 **respectively. d–f** Stereographic projections at the depths of 10 m, 25 m, and 50 m, respectively.

5

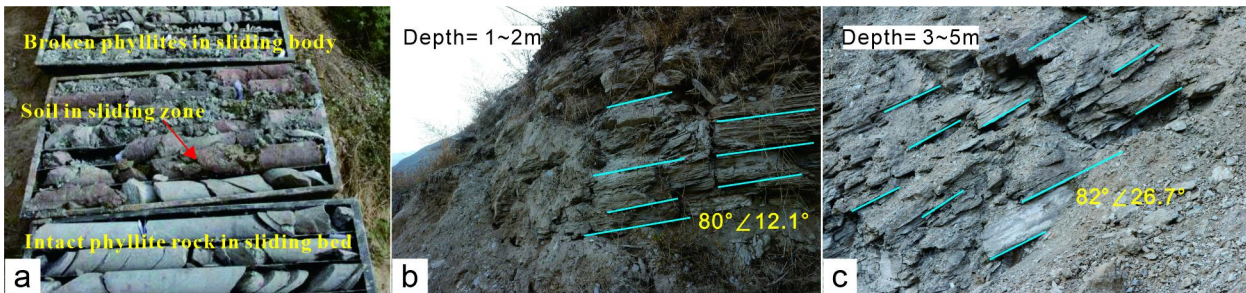


6
7 **Figure 7: Rock cores drilled from borehole zk08 and extremely broken phyllites exposed due to construction excavation in the**
8 **non-locking segment of the landslide. a** Broken phyllites, soils in the sliding zone, and relatively intact phyllites in the sliding bed
9 **(Zhou et al., 2022). b** Exposed phyllites with an attitude of $80^\circ \angle 12.1^\circ$ at the depth of 1–2 m. **c** Exposed phyllites with an attitude of
10 $82^\circ \angle 26.7^\circ$ at the depth of 3–5 m. Cyan lines represent the bedding planes of the phyllites.

11

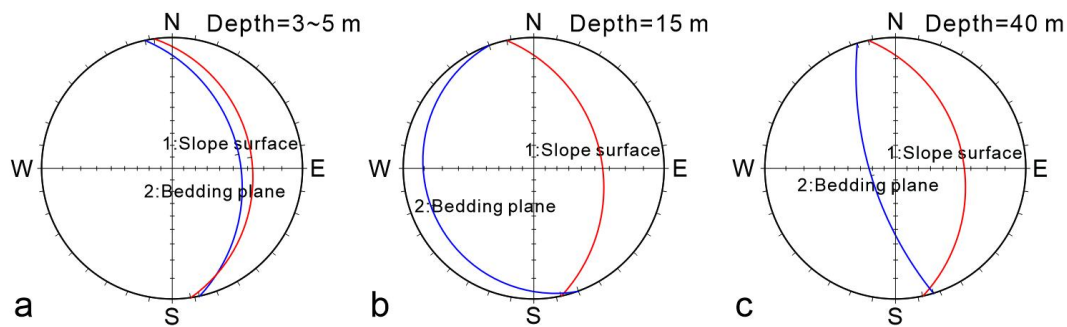

12
13 **Figure 8: Stereographic projections at the depths of 3-5 m, 15 m, and 40 m (a–c, respectively).**

1

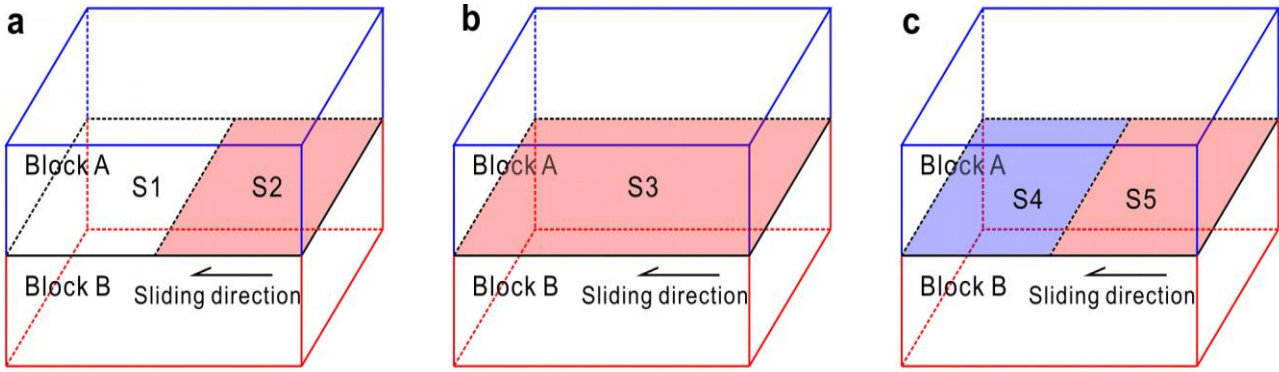

Block A: sliding body
 Block B: sliding bed
 S1: rock bridge
 S2: sliding surface

Block A: sliding body
 Block B: sliding bed
 S3: sliding surface with the equivalent strength parameters

Block A: sliding body
 Block B: sliding bed
 S4: rock bridge replaced by sliding surface with high strength parameters
 S5: sliding surface


2

3

Figure 9: Three rock bridge models used in the FLAC3D program. a Intact rock mass model (IRMM). b Jennings model (JM). c contact surface model with high strength parameters (CSM-HSP).

4

5

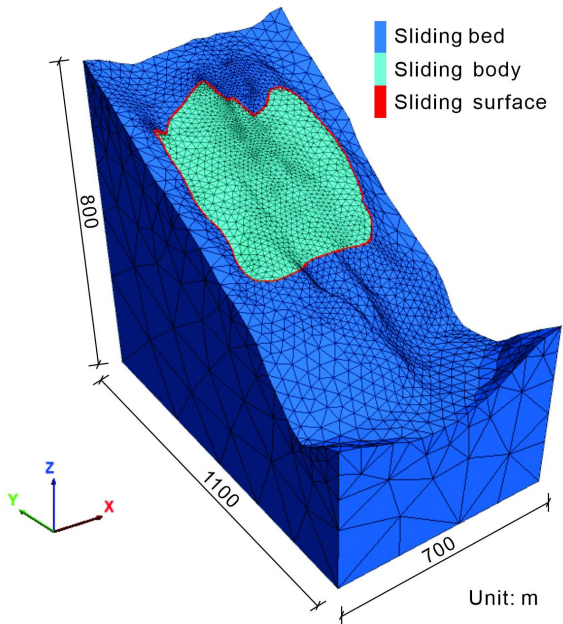

6



7

Figure 10: The mesh model and geometry of the Tizicao landslide.

8



0.978

0.924

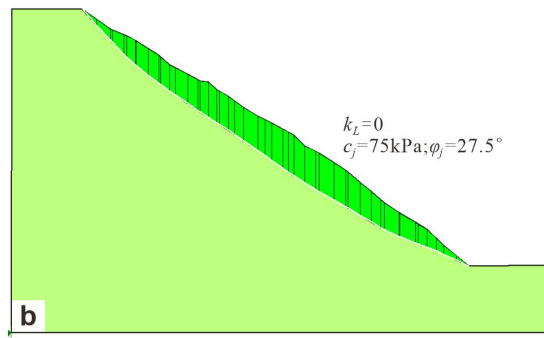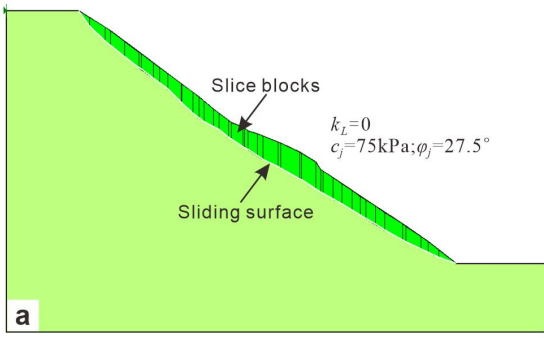


1.888

2.075

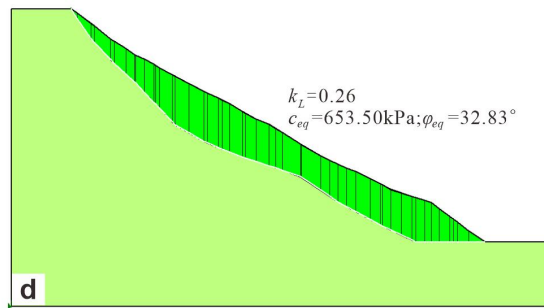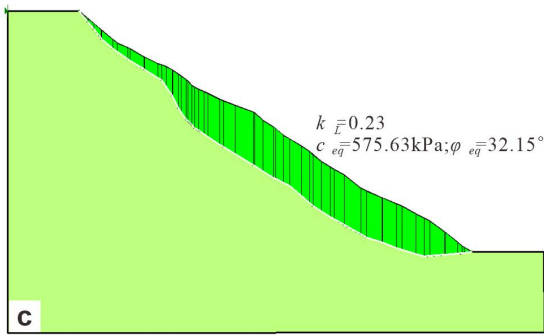


1
2
3

Figure 11: 2D Fos of different sections. a Section A-A'. b Section B-B'. c Section C-C'. d Section D-D'.

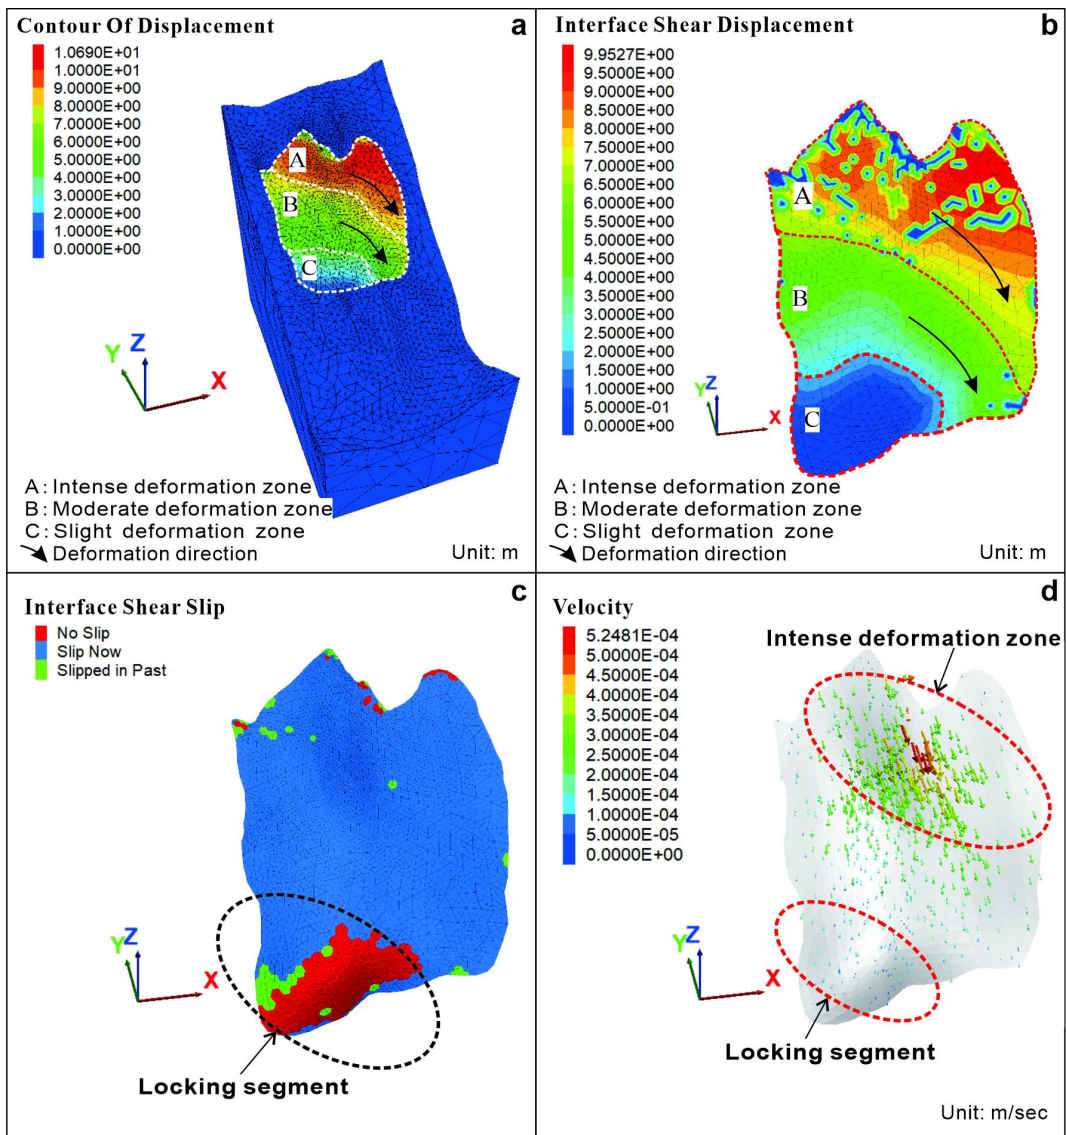


1
 2 **Figure 12: Simulation results of the Tizicao landslide. a Total displacement contours. b Shear displacement contours of the sliding**
 3 **surface. c Sliding state of the sliding surface. d Sliding velocity vectors of the sliding surface.**

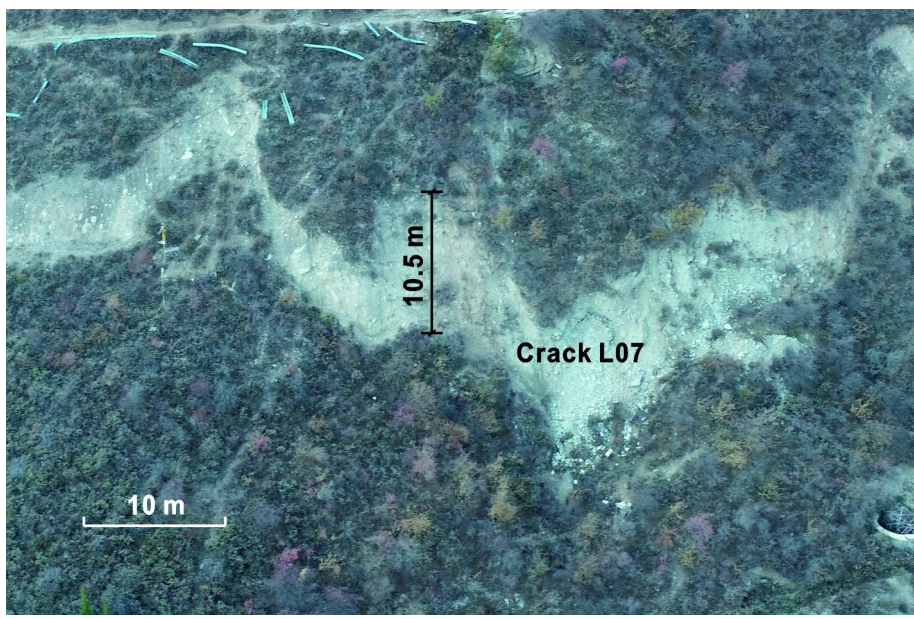

5
 6 **Figure 13: Crack L07 at the rear of the landslide. The width of crack L07 is 10.5 m in the direction of the landslide.**


1

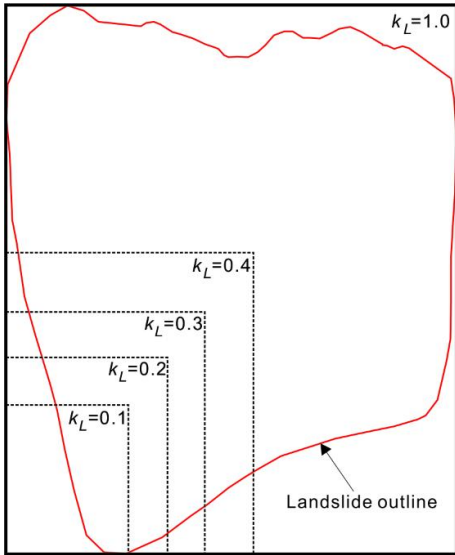

2

3 **Figure 14: Locking areas under different locking ratios.**

4

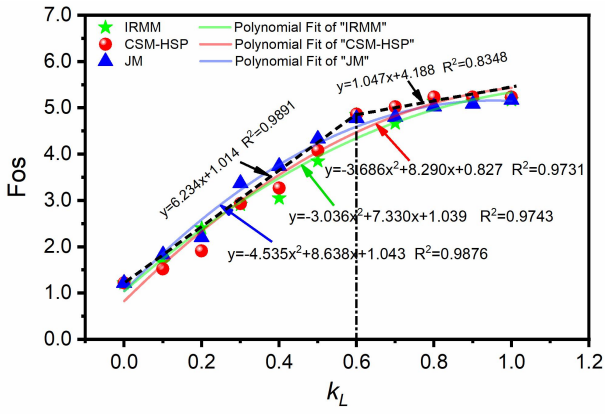

5

6 **Figure 15: 3D Fos curves under different locking ratios obtained using three rock bridge models.**

