

Retrieval of temperature and humidity profiles from ground-based high-resolution infrared observations using an adaptive fast iterative algorithm

Wei Huang¹, Lei Liu², Bin Yang¹, Shuai Hu², Wanying Yang², Zhenfeng Li¹, Wantong Li³, Xiaofan Yang¹

¹The State Key Laboratory of Complex Electromagnetic Environment Effects on Electronic and Information System, Luoyang 471003, China

²College of Meteorology and Oceanography, National University of Defense Technology, Changsha 410073, China

³Tianjin Meteorological Radar Research & Trial Centre, Tianjin 300061, China

Correspondence to: Lei Liu (liulei17c@nudt.edu.cn)

Abstract. Various retrieval algorithms have been developed for retrieving temperature and water vapor profiles from the Atmospheric Emitted Radiance Interferometer (AERI) observations. The physical retrieval algorithm, named AERI Optimal Estimation (AERIOe), outperforms other retrieval algorithms in many aspects except the retrieval time, which is significantly increased due to the complex radiative transfer process. The calculation of the Jacobian matrix is the most computationally intensive step of the physical retrieval algorithm. Analysis of the change of AERI observations' information content with Jacobians revealed that the performance of AERIOe algorithm had little dependence on Jacobians. Thus, the Jacobian matrix could remain unchanged when the variation of atmospheric state is small in the retrieval process to reduce the most time consuming computation. On the basis of the above findings, a fast physical-iterative retrieval algorithm was proposed by adaptively recalculating Jacobians in keeping with the changes of the atmospheric state. The performance of the algorithm was evaluated using synthetic ground-based infrared spectra observations. The retrieval speed was significantly improved compared with the original AERIOe algorithm under the condition that the parameters of the computing platform remain unchanged, resulting in an average retrieval time reduction by 58.82%. The retrieval results of the fast retrieval model are comparable to that of AERIOe, with maximum root-mean-square errors of less than 0.95 K and 0.22 log(ppmv) for heights below 3 km for the temperature and water vapor, respectively. Results based on synthetic observations revealed that the fast retrieval algorithm reached an acceptable convergence rate of 98.67%, which is slightly lower than the 99.88% convergence rate of AERIOe for the 826 cases used in this study.

1 Introduction

High-quality profiles of atmospheric constituents are required for many endeavors, including radiative transfer, cloud process research, and assimilation into mesoscale models to improve forecasts (Turner et al., 2000). The accuracy of the initial field

30 provided by observation networks is becoming a key factor restricting the skill of numerical weather prediction (NWP) models ([Romine et al., 2013](#); [Li et al., 2016](#)). The existing observation networks are insufficient to meet the needs of convective scale numerical weather prediction systems, especially in the prediction of convection initiation convective processes ([Kain et al., 2013](#); [Wagner et al., 2019](#); [Geerts et al., 2018](#)). As the spatiotemporal resolution is too coarse, radiosonde profiles cannot capture the atmospheric phenomena in detail. Space-based detection equipment observes
35 atmospheric upwelling radiance, which demonstrates some drawbacks in the detection of the planetary boundary layer (PBL) owing to the influence of the cloud layer or the underlying surface. A promising solution is the ground-based thermal infrared spectrometers that measure downwelling spectral infrared radiance, which show good skill at retrieving the temperature and humidity profiles of the PBL. The assimilation of ground-based infrared hyperspectral data can significantly improve the abilities of convective scale prediction systems for convection initiation ([Coniglio et al., 2019](#); [Hu et al., 2019](#)).

40 The commonly used ground-based infrared hyperspectral equipment mainly includes Fourier Transform Infrared (FTIR) instruments of the Karlsruhe Institute of Technology deployed in the Detection of Atmospheric Composition Change (NDACC) ([De Mazière et al., 2018](#)) and AERI developed by the University of Wisconsin Space Science and Engineering Center (UW-SSEC) deployed in the Atmospheric Radiation Measurement (ARM) program ([Knuteson et al., 2004](#)). The FTIR instrument observes near-infrared and mid-infrared high-resolution solar spectra, which are mainly used to retrieve
45 water vapor ([Schneider et al., 2006a, b](#); [Schneider and Hase, 2009](#)), water isotopologues ([Schneider et al., 2006a](#); [Barthlott et al., 2017](#)) and various trace gas ([Gardiner et al., 2008](#); [Kiel et al., 2016](#); [Zhou et al., 2018](#); [Yin et al., 2020](#); [Yin et al., 2021a](#); [Yin et al., 2021b](#); [Viatte et al., 2014](#)) profiles or total columns. The spectral region of AERI covers the range of 520-3000 cm^{-1} , containing a 15 μm absorption band of CO_2 commonly used for the retrieval of temperature profiles, which makes it more advantageous in detecting thermodynamic profiles ([Rowe et al., 2006](#)). Specific retrieval algorithms, capable of being
50 divided into statistical retrieval algorithms and physical retrieval algorithms as per different principles, are required to extract large amounts of information on the required atmospheric profiles from rich infrared hyperspectral radiance data. The physical retrieval algorithm includes the radiative transfer process, which enables it to provide thermodynamic profiles with higher accuracy than the statistical retrieval algorithm ([Yang and Min, 2018](#); [Cimini et al., 2010](#)). Two physical retrieval algorithms, named AERIprof ([Smith et al., 1999](#); [Feltz et al., 1998](#)) and AERIOe ([Turner and Löhnert, 2014](#); [Turner and
55 Blumberg, 2019](#); [Turner and Löhnert, 2021](#)), has been successively adopted in the AERI equipment to derive thermodynamic profiles. Based on the "onion peeling" algorithm, the former is used to adjust the first-guess profile from bottom to top with the iterative algorithm to minimize the difference between the calculated and observed radiation. Given that the algorithm only needs to calculate the diagonal elements in the Jacobian matrix, its retrieval speed is faster than that of the optimal estimation method (OEM) ([Rodgers, 2000](#)).

60 However, the AERIpof algorithm has several significant drawbacks, such as its high dependence on the first-guess profile and inability to provide uncertainty estimates for retrieval results ([Turner and Löhnert, 2014](#); [Blumberg et al., 2017](#); [Blumberg et al., 2015](#)). The limitations of AERIpof could be overcome by the AERIOe optimal-estimation retrieval algorithm, which was designed as an alternative to the previous physical algorithm. One of the important improvements remains to reduce the dependence on the first-guess profile by introducing regularization parameters in the AERIOe
65 algorithm to balance the observation and the prior information. The AERIOe algorithm sets regularization parameters as fixed values from large to small to achieve good stability and accuracy, which makes the algorithm require at least 7 iterations. The Jacobian matrix should be recalculated for each iteration due to the dependence on the current state vector, which significantly increases the amount of calculation and results in a high retrieval time.

A fast physical-iterative retrieval method, henceforth called Fast AERIOe, is proposed to address the limitation of long
70 retrieval time of AERIOe. The original AERIOe algorithm was modified to allow Jacobians to be recalculated adaptively without manual intervention by monitoring the change of atmospheric state. Thus the retrieval speed of AERIOe can be improved due to the reduction of computation amount. In this study, only temperature and water vapor profiles are retrieved from Fast AERIOe, and cases of cloudy situations will be handled in a future work. Last, the retrieval time, convergence characteristics and accuracy of the new algorithm are presented using radiosonde observations at the same station.

75 **2 Data**

The data used in the study are from the ARM program supported by the U. S. Department of Energy, which aims to quantitatively study the atmospheric radiation budget and develop and verify the parameterization scheme of the numerical model ([Revercomb et al., 2003](#); [Ellingson et al., 2016](#)). This program mainly focuses on the long-term observation of atmospheric states and radiative fluxes, providing information to researchers around the world to inform and validate
80 predictive models of climate and weather. We will use data collected at the Southern Great Plain (SGP) site, which is located at 36.61 ° N and 149.88 ° W, near Lamont, Oklahoma, USA ([Sisterson et al., 2016](#)). These data mainly include ground-based infrared spectra obtained by AERI and radiosonde profiles, with the former used to retrieve the temperature and water vapor profiles and the latter mainly used to evaluate the accuracy of the retrieval results.

2.1 AERI

85 AERI can continuously receive downwelling atmospheric infrared radiance from 3.3-19.2 μm ($520\text{-}3000\text{ cm}^{-1}$) with a spectral resolution better than 1 cm^{-1} , among which the infrared radiation of $520\text{-}1800\text{ cm}^{-1}$ band is obtained by the mercury cadmium telluride (HgCdTe) detector, and $1800\text{-}3020\text{ cm}^{-1}$ band is obtained by the indiumantimonide (InSb) detector. The

AERI front-end optics include a scene mirror and two calibrated blackbodies, one of which changes with the temperature of the surrounding environment, while the other maintains at a fixed temperature (60 °C). AERI achieved a calibration accuracy of better than 1% by viewing two high-precision blackbodies and a nonlinearity correction for the detectors ([Knuteson et al., 2004](#)). The temporal resolution of the AERI standard remains approximately 8 minutes, including a 3-minute sky dwell period and the subsequent observation of the two blackbodies.

Table 1. Spectral regions used for retrieving temperature and water vapor profiles in the AERIOe algorithm

Temperature	Water Vapor
612-618 cm ⁻¹	538-588 cm ⁻¹
624-660 cm ⁻¹	
674-713 cm ⁻¹	

AERI has many observation channels, including not only temperature and humidity profile information but also trace gas information such as ozone, methane, and redundant data. Therefore, appropriate channels must be selected when retrieving temperature and humidity profiles. The retrieval of humidity profiles generally adopts water vapor-sensitive channels, and the temperature profiles could be retrieved from channels sensitive to a uniformly mixed gas (such as CO₂). The spectral regions used in the retrieval process are consistent with AERIOe v1.2, which used only the 538–588 cm⁻¹ band for water vapor profiling to exclude scattering effects from clouds ([Turner and Blumberg, 2019](#)). Specific wavenumbers used to perform the retrieval are shown in Table 1, among which the spectral region used for temperature retrieval includes 167 channels, and the water vapor includes 104 channels.

2.2 Radiosonde data

Radiosondes have been used for decades to provide humidity, temperature and wind profiles throughout the troposphere, which is considered to be the most accurate means to detect the vertical structure of the atmosphere. It is often used to evaluate the accuracy of other detection methods. Located 150 m to the north of the AERI equipment, the closer radiosonde release point can ensure the comparability of radiosonde profiles and AERI retrieval results ([Wakefield et al., 2021](#)). The radiosonde data at the SGP site were obtained by Vaisala RS92 since 2002 ([Turner et al., 2016](#)), including temperature, humidity, pressure, wind direction and wind speed. It was regularly launched four times a day at 05:30 UTC, 11:30 UTC, 17:30 UTC and 23:30 UTC.

We collected radiosonde profiles and AERI radiation data of 2012, screening 826 groups of qualified data samples through quality control, spatiotemporal matching, and clear sky recognition. On the basis of the above datasets, we calculated the simulated AERI spectrum corresponding to 826 sets of radiosonde profiles using the line-by-line radiative transfer model (LBLRTM), with parameter settings consistent with Sect. 3.1.

3 Methodology

115 3.1 Retrieval configuration

The AERIOe algorithm, based upon the optimal estimation method, iteratively searching for the atmospheric state that most conforms to the observation and prior constraints.


$$\mathbf{X}_{n+1} = \mathbf{X}_a + (\mathbf{K}_n^T \mathbf{S}_e^{-1} \mathbf{K}_n + \gamma \mathbf{S}_a^{-1})^{-1} \mathbf{K}_n^T \mathbf{S}_e^{-1} \times (\mathbf{Y}^m - F(\mathbf{X}_n) + \mathbf{K}_n (\mathbf{X}_n - \mathbf{X}_a)), \quad (1)$$

120 Here, \mathbf{X} is the profile of the atmospheric state to be retrieved, \mathbf{X}_a is the prior profile of the atmosphere, \mathbf{S}_a is the a priori covariance matrix, \mathbf{Y}^m is the observed radiance vector, $F(\mathbf{X})$ is the computed radiance for \mathbf{X} , \mathbf{S}_e is the observation error covariance matrix, and n denotes the iteration number. The superscripts T and -1 imply the matrix transpose and inverse, respectively.

To improve the stability of the retrieval algorithm, the regularization parameter γ was introduced in Formula (1), which is set as fixed values from large to small ([1000, 300, 100, 30, 10, 3, 10, 1]). As γ decreases with iterations, more observation information is introduced to improve the retrieval accuracy. Iterations are continued until γ decreases to 1 and the following convergence criterion is satisfied.

$$convergence_index = \frac{(\mathbf{X}_n - \mathbf{X}_{n+1})^T \mathbf{S}_e^{-1} (\mathbf{X}_n - \mathbf{X}_{n+1})}{N} \leq 1, \quad (2)$$

N represents the dimension of the retrieved atmospheric state vector.

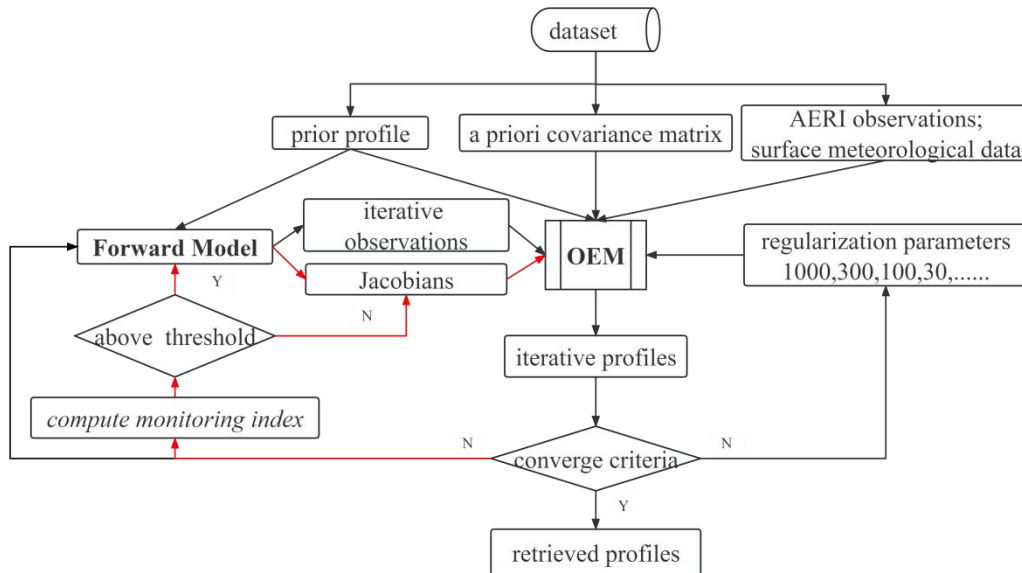

130 **Figure 1.** Flowchart of the Fast AERIOe retrieval process. Note that the red line indicates the Jacobian updating process. The iterative profiles and observations are defined as temperature and water vapor profiles at iteration n and computed radiance for \mathbf{X}_n , respectively. The monitoring index is used to derive the variations of \mathbf{X}_n .

Note that \mathbf{K} depends on \mathbf{X} used for estimating the Jacobian, which means that \mathbf{K} must be recomputed for every iteration step. The updating of the Jacobians in the above retrieval process requires the calculation of the optical thickness or radiance (intensity) with respect to different atmospheric constituents at each height, which might be computationally expensive depending on the lengths of \mathbf{X} and \mathbf{Y}^m (Maahn et al., 2020). Owing to the constraints of γ , the decrease of the difference between simulated and observed radiation is not very much in the adjustment of individual iterations to the retrieval profile. At this time, the change in the Jacobian calculated as per the iteration profile is negligible. Backed by the above analysis, a fast iterative algorithm called Fast AERIOe is proposed on the basis of the AERIOe algorithm. The flowchart of Fast AERIOe is shown in Fig. 1, most of the configurations are consistent with AERIOe described by Turner and Löhnert (2014), except some modifications highlighted as follows:

a. atmospheric configurations: The height grid of \mathbf{X} is consistent with AERIOe, but the maximum retrieval height is limited to 3 km. This is done because the variations of \mathbf{K} above 3 km is negligible due to the fact that most of the information in AERI spectrum lies in the lowest 2 km of the atmosphere for temperature and water vapor profiles (Turner and Löhnert, 2014). The cloud properties were excluded from the state vector \mathbf{X} , which is beyond the scope of this study. The corresponding priori profile \mathbf{X}_a and the priori covariance matrices represented by \mathbf{S}_a are modified to be consistent with \mathbf{X} .

b. observational vector \mathbf{Y} : Spectral regions that sensitive to cloud properties were removed from the observational vector \mathbf{Y} to be consistent with the state vector \mathbf{X} . Furthermore, additional observations including surface temperature and water vapor were incorporated into the observation vector, details are described by Turner and Blumberg (2019).

c. Jacobian matrix \mathbf{K} : \mathbf{K} is derived from LBLRTM, which is the same as AERIOe except the version (12.8 instead of 12.1). Another modification is that \mathbf{K} is not recomputed to improve the retrieval speed of the algorithm when the variations of the iterative profile \mathbf{X}_n is small.

3.2 Adaptive recalculation of Jacobian

The method to reduce the calculation of \mathbf{K} is the key to speed up the AERIOe algorithm. The Jacobians are dependent on the atmospheric constituents, which means that \mathbf{K} must be recalculated for every iteration step. The question arises as to under what circumstances \mathbf{K} does not need to be recalculated. Therefore, the dependence of the retrieval capability on Jacobians must be analyzed and indicators that reflect the changes of Jacobians should be figured out to determine whether \mathbf{K} recalculated or not.

160 3.2.1 Quantification of algorithm retrieval capability

The retrieval accuracy of the atmospheric profile depends on the amount of atmospheric information in the hyperspectral data. Shannon Information Content (*SIC*) and Degrees of Freedom for Signal (*DFS*), as important indicators to describe the effective information contained in hyperspectral data (Rodgers, 1998), can quantitatively describe the detector's retrieval ability for specific atmospheric constituents. *SIC* represents the reduction of uncertainty in the retrieved profiles contributed by the observation, with the calculation formula shown in (3). *DFS* provides the number of independent pieces of information contained in the measured radiation, with the calculation formula shown in (4).

$$IC = \frac{1}{2} \ln \det(\hat{\mathbf{S}}^{-1} \mathbf{S}_a), \quad (3)$$

$$DFS = \text{Trace}(\mathbf{B}^{-1} \mathbf{K}_n^T \mathbf{S}_e^{-1} \mathbf{K}_n), \quad (4)$$

Here, $\hat{\mathbf{S}}$ is the posterior error covariance matrix, also known as the analysis error covariance matrix. Its diagonal element is the standard deviation of the retrieval error, with the calculation formula $\hat{\mathbf{S}}$ as follows:

$$\hat{\mathbf{S}} = \mathbf{B}^{-1} (\mathbf{K}^T \mathbf{S}_e^{-1} \mathbf{K} + \gamma^2 \mathbf{S}_a^{-1}) \mathbf{B}^{-1}, \quad (5)$$


Among which,

$$\mathbf{B} = (\gamma \mathbf{S}_a^{-1} + \mathbf{K}_n^T \mathbf{S}_e^{-1} \mathbf{K}_n), \quad (6)$$

3.2.2 Analysis of the dependence of AERIOe on Jacobians

It can be seen from equations (3) and (4) that *SIC* and *DFS* are determined by \mathbf{S}_e , \mathbf{S}_a , \mathbf{K} and γ . However, \mathbf{S}_a and \mathbf{S}_e remain unchanged during retrieval, which makes *SIC* and *DFS* change with iteration due to variations in γ and \mathbf{K} . As γ drops to 1 at the final iteration, the values of *SIC* and *DFS* are only dependent on \mathbf{K} . Owing to the difficulty of quantifying the change in the two-dimensional Jacobian caused by the iteration profiles, a monitoring index, henceforth called *K_Index*, is designed and used to characterize the change of the profiles at various iterations. The calculation of *K_Index* comes from the convergence criteria *convergence_index*, which contains not only the difference between the iteration profiles but also the posterior dominated by Jacobian. The introduced *K_Index* should reflect the changes in the temperature and humidity profile, which means that the influence of the Jacobian should be excluded. Then, the *convergence_index* was degenerated into the *K_Index* as follows.

$$K_Index = \frac{(\mathbf{X}_n - \mathbf{X}_n)^T (\mathbf{X}_n - \mathbf{X}_n)}{N}, \quad (7)$$

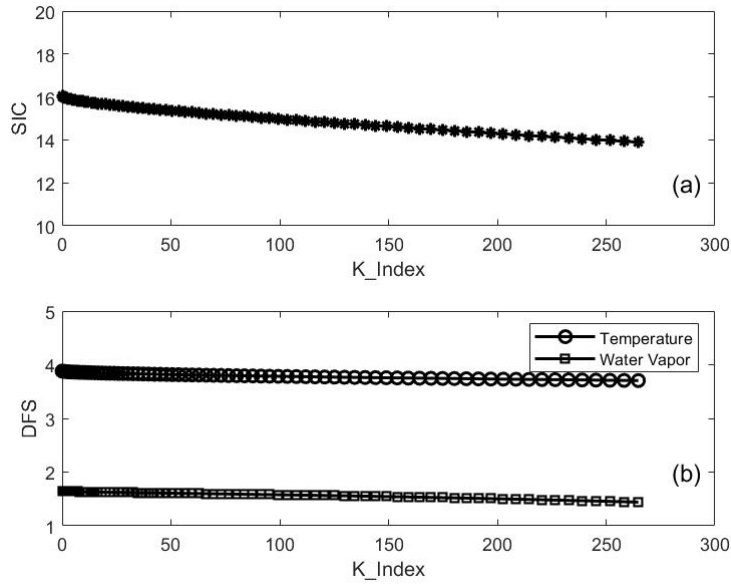

185

Figure 2. (a) The change of SIC with K_Index . (b) The change of DFS with K_Index for temperature (unfilled circles) and water vapor (open squares), respectively.

The values of K_Index in Fig. 2, which covers most of the K_Index during AERIOe retrieval process (ranged from 0 to 260, see Fig. 3), were obtained by multiplying the prior profile by different scale factors. The atmosphere dependent \mathbf{K} were computed by LBLRTM with the prior profiles above, and SIC and DFS were calculated using equations (3) and (4) with different Jacobians, respectively. Both SIC and DFS change slowly with K_Index as shown in Fig. 2, with the variation of SIC within 13.46% (from 13.89 to 16.05), and DFS within 4.38% (from 3.71 to 3.88) for temperature and within 12.73% (from 1.44 to 1.65) for water vapor, which demonstrates that SIC and DFS remain almost unchanged on the condition that the value of K_Index is small. This provides an effective means to improve the retrieval speed of AERIOe by recalculating \mathbf{K} selectively when \mathbf{X} is not changing much or K_Index is small. This could be achieved by comparing the value of K_Index with its threshold at each iteration to determine whether \mathbf{K} is recalculated or not.

195

3.2.3 Determination of the K_Index threshold

The selection of the threshold for K_Index is very important for the Fast AERIOe algorithm: if the threshold remains too large, too many Jacobians will stop updating, resulting in the decline of retrieval accuracy or even the non-convergence of the retrieval process; while the threshold value remains too small, most Jacobians need to be recalculated, which cannot effectively shorten the retrieval time.

200

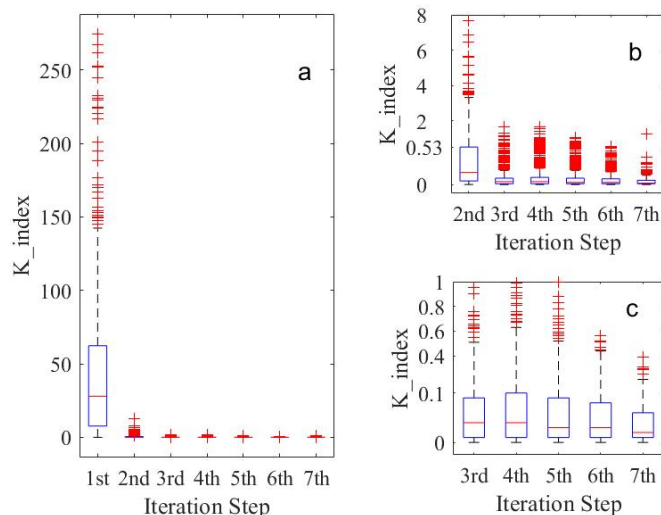


Figure 3. Box-and-whisker plots for K_Index values at different iterations in the retrieval process of AERIOe. (a) K_Index values calculated using 826 samples at iterations 1-7, (b) and (c) are same as (a), but for iterations 2-7 and iterations 3-7, respectively. The boxes show upper-quartile, median (the red line through the middle of the box), and lower-quartile values for K_Index . The whiskers extend to the 1.5 times the inter quartile range (IQR). Any outliers above or below the whiskers are plotted as red symbols ‘+’.

Fig. 3 shows the histogram of the K_Index distribution for each iteration in the retrieval process, with the K_Index values at each iteration calculated using the clear sky data for 2012. Since the climatological mean profile was used as the first-guess, which has a large deviation from the real atmospheric state, a larger value of K_Index was demonstrated in the first step of the retrieval. The K_Index value decreases significantly from the second iteration (see Fig. 3a), indicating that the adjustment of the iterative profile remains very small and the retrieval process tends to be stable relative to the first iteration. As the retrieval proceeds, the iteration profile gradually approaches the truth, and the K_Index box gradually shortens to below 0.5 (see Fig. 3b). Using this value as the threshold for K_Index , most of the Jacobian after the second iteration does not need to be recalculated, and the retrieval time could be effectively reduced. However, the K_Index in iteration 7 shows larger outliers, indicating that the instability of the retrieval algorithm increases when the γ factor decreases to 1. To reduce the impact of the Jacobian on the convergence of the algorithm, the threshold for the K_Index after iteration 6 is set to 0.1 according to Fig. 3c, of which the K_Index box at iteration 7 is within 0.1. It should be noted that the threshold of K_Index used in the Fast AERIOe algorithm is dependent on the datasets used in the retrieval. They are presented ‘as is’ and are not intended to be directly applied by the reader. We encourage readers to develop their own indicator to reduce the recalculation of Jacobians based on the atmospheric constituents they intend to retrieve.

4 Results and discussions


The simulated AERI radiation is used for retrieval to better analyze the performance of Fast AERIOe and eliminate the interference of other factors. An advantage of using synthetic observations is that the true atmospheric state is known, which

can be used to evaluate the retrieval accuracy. Second, the errors caused by parameters in the forward model, such as the deviation of trace gas content, the strength and temperature dependence of the water vapor continuum absorption, and the half-widths of absorption lines, could be eliminated (Maahn et al., 2020). Third, we can control the noise level in the synthetic measurement.


4.1 Retrieval process

Examples of the Fast AERIOe retrieval using the simulated spectra at various iterations are shown in Fig. 4. These profiles represent the typical performance of each retrieval configuration at the SGP site. The entire retrieval process took 3.59 min with 7 iterations, in which only Jacobians of the first and second iterations were updated. The retrieved profiles converged quickly below 1 km, with little adjustment of the temperature and humidity profile following the first iteration. For the upper atmosphere above 1.5 km, the temperature and humidity profiles have a relatively large adjustment and gradually approach the radiosonde profile with the iterations. This feature of the Fast AERIOe retrieval process is very similar to AERIOe, which is determined by the information content of the AERI spectra. The information content is concentrated near the surface, which leads to a more rapid convergence in the lowest portions of the profile. The information content of the upper layer is less, and as such, it is necessary to reduce the value of γ to introduce more observation information so that the retrieved profiles are refined to approach the radiosonde profile as the iterations are continued.

One advantage of the optimal estimation method remains that the posterior error covariance matrix of the solution $\hat{\mathbf{S}}$ can be obtained to estimate the uncertainty of the retrieval results of each sample. The temperature and water vapor profile show a strong correlation for the correlation coefficient matrix of \mathbf{S}_a (see Fig. 5a and Fig. 5c), especially the temperature profile, which has a high correlation coefficient above 0.6 between any two layers because of the relatively stable vertical gradient of the temperature profile. The non-diagonal elements below 1 km in the correlation coefficient matrix of $\hat{\mathbf{S}}$ results from Fast AERIOe show a much lower correlation than that of \mathbf{S}_a (see Fig. 5b and Fig. 5d), which means that the retrieved profiles in the lower atmosphere are dominated by AERI observations. However, with the increase of height, the correlation of the area near the diagonal increases significantly. Therefore, the retrieval algorithm will rely more on the constraint of prior information at the upper layer of PBL. The $1-\sigma$ uncertainty lines, which is the square root of the diagonal of the covariance matrices for the prior (blue shaded area) and the posterior (black horizontal line) in Fig. 4, demonstrates that the retrieved profile has a much smaller uncertainty than the prior. Therefore, the Fast AERIOe algorithm can effectively reduce the impact of uncertainties in the first-guess profile on the retrieval results. As the height increases, the black horizontal line segment becomes longer either for the temperature profile or water vapor profile, indicating that the uncertainty in the retrieved profiles increases at upper PBL.

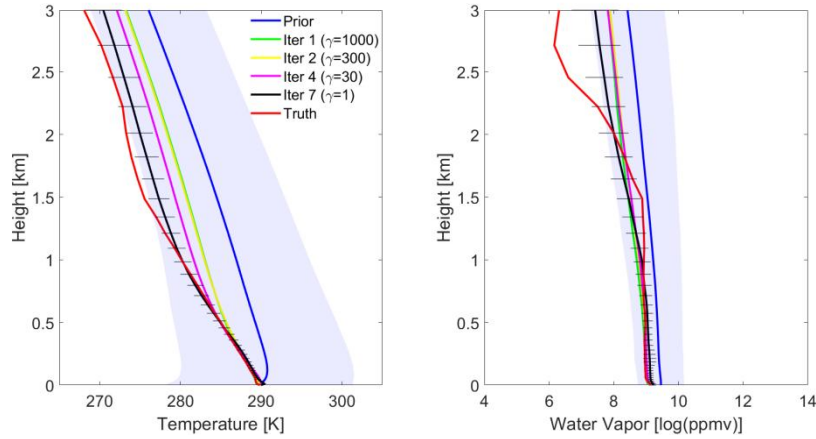

255 **Figure 4.** Retrieved (left) temperature and (right) water vapor profiles at various iterations from the simulated AERI observations, where the simulated observations were computed from a radiosonde (shown in red curves) launched at the SGP site at 11:30 UTC 20 Apr 2012. The prior mean profile (blue) was used as the first guess, and the blue-shaded area illustrates the 1- σ uncertainties in the prior. The profiles at iterations 1, 2, and 7 was shown in solid blue, yellow, purple, and black (with 1- σ error bars derived from \hat{S}) lines, and the γ were set to 1000, 300, 30 and 1 for above iterations, respectively.

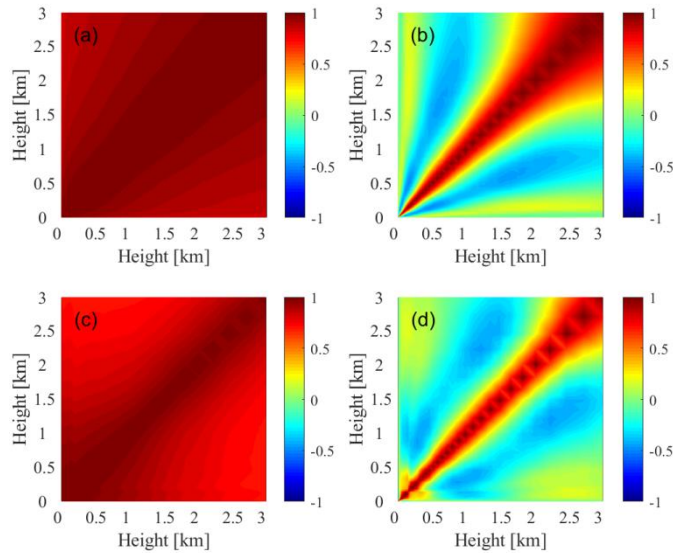

260 **Figure 5.** The level-to-level correlation of the prior (left) and posterior (right) for temperature (top row) and water vapor (bottom row) at 11:30 UTC 20 Apr 2012.

4.2 Performance

4.2.1 Retrieval time

265 Both AERIOe and Fast AERIOe algorithms were used to retrieve 826 groups of simulated AERI radiation data at SGP stations in 2012 to evaluate the retrieval performance of Fast AERIOe. The codes for the retrieval algorithm are written in MATLAB language and runs on a Lenovo Aircross 510P computer, of which the CPU is Intel Core i7-7700 and the operating system is Ubuntu 14.04. To analyze the code timing of the retrieval algorithm, the code was divided into the following sections: preparation, iteration 1, iteration 2, iteration 3,... and iteration final. The preparation section mainly consists of atmosphere construction, observation vector construction and pre-calculated variables importation. The iteration sections include the

270 recalculation of \mathbf{K} and $F(\mathbf{X})$ and the inversion using equation (1). Note that iteration 1 does not need to calculate \mathbf{K} and $F(\mathbf{X})$ because the prior profile \mathbf{X}_a is fixed (mean value of the atmosphere), and the \mathbf{K} and $F(\mathbf{X})$ associated with it are pre-calculated. The time consumed by each section was analyzed both for AERIoe and Fast AERIoe, results for an arbitrarily selected case are provided in Table 2. The recalculation of $F(\mathbf{X})$ and \mathbf{K} consumed an immense amount of time in the retrieval process of AERIoe, and the latter is the most time consuming section. Therefore, by reducing the recalculation of \mathbf{K} , the retrieval time
 275 of Fast AERIoe is greatly reduced compared to AERIoe.

Table 2. List of time consumption (units: s) by the sections of AERIoe and Fast AERIoe. The sections denoted with superscript “*” indicate that \mathbf{K} is not recalculated during Fast AERIoe retrieval process.


Sections		AERIoe	Fast AERIoe
	preparation	0.29	0.22
iteration 1	inversion	0.29	0.22
	recalculation of $F(\mathbf{X})$	17.11	16.69
iteration 2	recalculation of \mathbf{K}	68.76	70.27
	inversion	0.31	0.27
	recalculation of $F(\mathbf{X})$	17.18	17.04
iteration 3	recalculation of \mathbf{K}	70.55	0.00
	inversion	0.22	0.22
	recalculation of $F(\mathbf{X})$	17.71	16.36
iteration 4	recalculation of \mathbf{K}^*	70.07	0.00
	inversion	0.25	0.21
	recalculation of $F(\mathbf{X})$	16.97	17.38
iteration 5	recalculation of \mathbf{K}^*	68.93	0.00
	inversion	0.21	0.25
	recalculation of $F(\mathbf{X})$	16.08	15.08
iteration 6	recalculation of \mathbf{K}^*	68.23	0.00
	inversion	0.24	0.24
	recalculation of $F(\mathbf{X})$	15.91	18.45
iteration final	recalculation of \mathbf{K}^*	68.11	0.00
	inversion	0.28	0.23

The average retrieval time of Fast AERIoe for the 826 cases used in the study is 3.69 min, which is more than 50% shorter than that of AERIoe, with an average retrieval time of 8.96 min, which is beyond the temporal resolution (about 8 min) of
 280 AERI observations. All of the samples of AERIoe consumed more than 8 minutes, while only 10 cases exceeded the temporal resolution of AERI for Fast AERIoe algorithm. Note that the retrieval time is dependent on the computing platform and the method used to compute Jacobians and are not intended to be directly applied by the reader.

Table 3. The number of samples of different classes, which are classified according to K_diff

Classification	K_diff	Sample Numbers
Class1	1	8

Class2	2	15
Class3	3	60
Class4	4	193
Class5	5	471
Class6	6	73
Class7	7	1

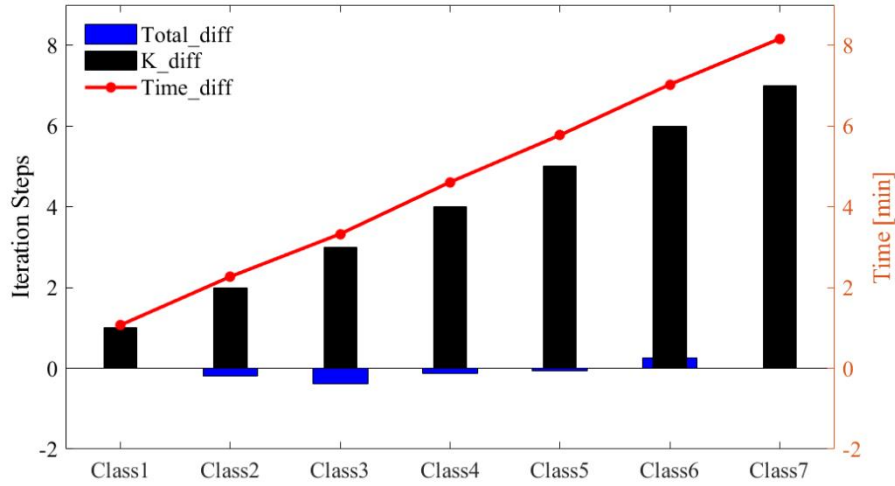

285 **Figure 6.** The distribution of K_diff , $Total_diff$ and $Time_diff$ with different classes.

Besides the recalculation of \mathbf{K} , the retrieval time is also affected by the total iteration steps. Therefore, statistics of the average retrieval time difference ($Time_diff$ for short) caused by \mathbf{K} recalculation step difference (K_diff for short) and average total iteration step difference ($Total_diff$ for short) are provided in this study. The retrieval samples are divided into 7 categories (shown in Table 3) in keeping with K_diff between AERIOe and the Fast AERIOe. On this basis, $Time_diff$ and $Total_diff$ between the two retrieval algorithms for various samples are calculated. As shown in Fig. 6, with an increase in K_diff , $Time_Diff$ also increased gradually, showing a strong positive correlation. Compared with K_diff , the value of $Total_diff$ is very small, and its impact on the retrieval time is also minimal, only having a slight negative and positive effect on the $Time_diff$ of Class3 and Class6. Therefore, the improvement in the retrieval speed of Fast AERIOe is mainly due to the recalculation of Jacobians.

295 4.2.2 Convergence characteristics

825 samples of the 826 data sets using the AERIOe algorithm achieved convergence, with the convergence rate reaching 99.88%. The Fast AERIOe algorithm has 815 groups of samples to achieve convergence, with the convergence rate reaching 98.7%, which is lower than that of AERIOe. Among the 11 sets of retrieval samples that did not achieve convergence, the K_Index of most of them did not change much after the γ was dropped to 1, indicating that the subsequent iterations had little effect on the adjustment of the profiles, so the iterative profile corresponding to the minimum $convergence_index$ could

be taken as the retrieval results instead of criterion (2). Fig. 7a shows the comparison between the retrieved profiles from AERIOe using criteria (2) and Fast AERIOe using the new convergence criteria with 11 sets of non-converged samples. The temperature profiles obtained by the two algorithms are virtually identical, with an R-square of 0.99. For water vapor mixing ratio (WVMR), the introduction of the new convergence criteria reduces the value of R-square but still reaches 0.84, indicating that the two datasets still have a strong correlation. The above results indicate that the method of using the minimum *convergence_index* to obtain the retrieval profiles is a reasonable and feasible method, as the Fast AERIOe algorithm cannot achieve convergence.

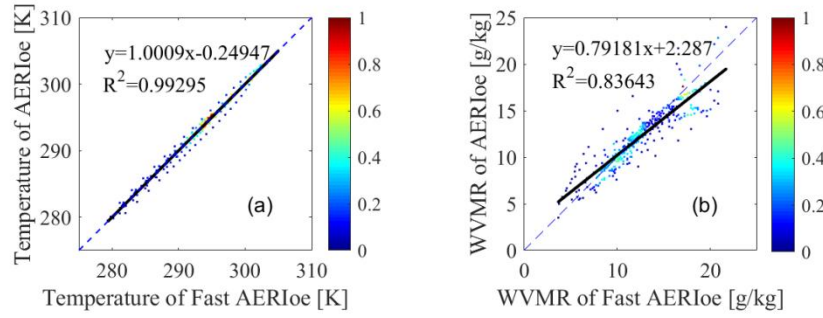


Figure 7. Scatter plots between the retrieval results of the non-converged samples with AERIOe and Fast AERIOe. (a) Temperature profiles, (b) WVMR profiles.

4.2.3 Accuracy

Traditional methods used to evaluate the accuracy of retrieved profiles against radiosondes compute the BIAS and Root Mean Square Error (RMSE), with the calculation formula as follows:

$$BIAS(i) = \frac{\sum_{j=1}^M (\mathbf{X}_{sonde}^{smooth}(i, j) - \mathbf{X}_{retrieval}(i, j))}{M}, \quad (8)$$

$$RMSE(i) = \sqrt{\frac{\sum_{j=1}^M (\mathbf{X}_{sonde}^{smooth}(i, j) - \mathbf{X}_{retrieval}(i, j))^2}{M}}, \quad (9)$$

Where i and j represent the serial numbers of vertical stratification and samples, respectively, with M being the number of samples. $\mathbf{X}_{retrieval}$ is defined as retrieved profiles, $\mathbf{X}_{sonde}^{smooth}$ is radiosonde observations which are smoothed with the averaging kernel \mathbf{A} by the following multiplication to reduce the vertical representativeness errors

$$\mathbf{X}_{sonde}^{smoothed} = \mathbf{A}(\mathbf{X}_{sonde} - \mathbf{X}_a) + \mathbf{X}_a, \quad (10)$$

320

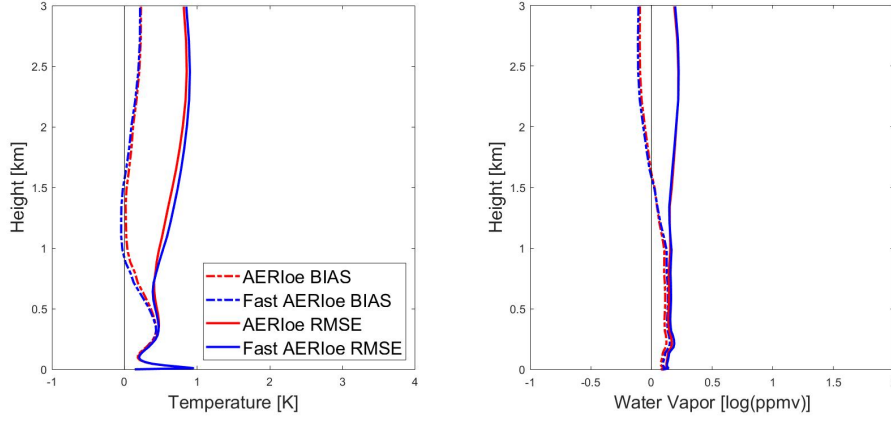


Figure 8. Bias (solid curves) and RMSE (dashed curves) profiles for clear-sky comparisons of the AERIOe (red curves) and Fast AERIOe (blue curves) retrievals with radiosondes. (Left) Temperature profile, (right) Water Vapor profiles.

The BIAS and RMSE of AERIOe and Fast AERIOe are calculated for 826 sets of samples using the above equations within the altitude range of 0-3 km, and the results are shown in Fig. 8. The temperature profile below 1.0 km and the water vapor profile below 1.5 km have obvious positive deviations, with the maximum deviation reaching 1.0 K and 0.2 log(ppmv), respectively. However, the BIAS and RMSE at the bottom are significantly reduced due to the constraint of the surface observations, indicating that the introduction of surface meteorological observation data in the observation vector has an obvious positive effect. The Fast AERIOe retrieved temperature profiles shows a negative deviation of 0.05K between 1.0 km and 1.5 km and a maximum increase of RMSE within 0.08 K above 1.0 km when compared with AERIOe. For the water vapor profile, the BIAS and RMSE profiles of Fast AERIOe are in good agreement with AERIOe, except for a maximum increase of BIAS within 0.03 log(ppmv) below 1.0 km. When considering the magnitude of the temperature (roughly on the order of 300 K) and water vapor (roughly on the order of 5-10 log(ppmv)) profiles, the differences between the retrieved profiles are negligible, indicating that the retrieval results of Fast AERIOe are comparable to that of AERIOe.

The comparison of the profiles retrieved by the two algorithms can be demonstrated more clearly by the modified Taylor plots (Turner and Löhnert, 2014), which are used to evaluate how well each retrieved profile can capture the vertical shapes of its true profile, as BIAS and RMSE can only describe the average accuracy of the whole dataset at each height. These Taylor diagrams show Pearson's correlation coefficient between two datasets on the y-axis and the ratio of the standard deviation on the x-axis. Each retrieval/sonde pair is used to derive the correlation coefficient (r) from Eq. (11) and the ratio of the standard deviations from Eq.(12), both are used by Turner and Löhnert (2014).

$$r = \frac{\frac{1}{N} \sum_{z=0}^{z=h} [s(z) - \bar{s}][a(z) - \bar{a}]}{\sigma_s \sigma_a}, \quad (11)$$

$$SDR = \sigma_a / \sigma_s, \quad (12)$$

Within the equations, $s(z)$ and $a(z)$ are defined as the radiosonde observations and retrieved profiles between 0 and 3 km, (\bar{s}, \bar{a}) and (σ_s, σ_a) are the mean values and standard deviations at the same height range.

Retrievals that have a correlation coefficient of 1 and a standard deviation ratio (SDR) of 1 mean that the two datasets match perfectly. Fig. 9a and Fig. 9b show these plots for the clear-sky AERIOe and fast AERIOe retrievals. For the temperature retrievals, both the Fast AERIOe and the AERIOe perform well, with 90 percent of correlation coefficients above 0.9 and the intersection of the arms close to 1. Fig. 9b shows that retrieving the water vapor structure is much more difficult with both algorithms; the spread in the correlation coefficient and SDR are much larger for water vapor than for temperature. Most of the blue and red symbols '×' in Fig. 9, which indicate the scores for the individual profiles of the two algorithms, are closed to each other both for temperature and water vapor profile. Therefore, the modified Taylor plots also confirms the conclusion that the retrieval results of the AERIOe and Fast AERIOe algorithms are comparable.

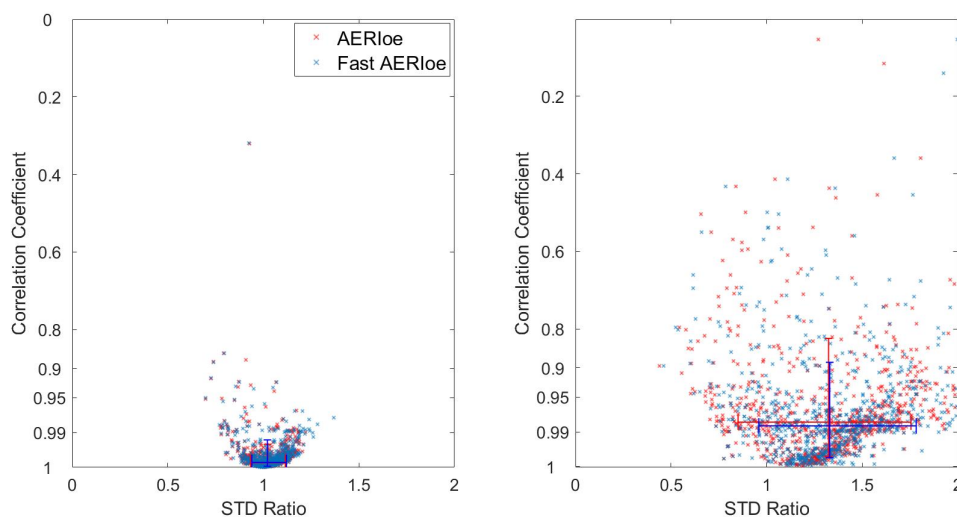


Figure 9. Modified Taylor plots showing the correlation coefficient and standard deviation ratio between the smoothed radiosondes and the retrieved clear-sky (a) temperature and (b) water vapor using AERIOe (red symbols) and Fast AERIOe (blue symbols). There are 826 cases from the SGP site within 2012. Each symbol indicates the score for an individual profile. The arms of the plotted crosses span the 10th–90th percentiles for the correlation coefficient (vertical arms) and the standard deviation ratio (horizontal arms).

4.3 Real observations

Since the clouds overhead have an significant influence on the infrared spectra, the primary problem is how to screen clear-sky samples when using the measured AERI data to retrieve the temperature and humidity profile. The contribution of clouds to infrared radiation not only interferes with the inversion of temperature and humidity profile, but also provides technical means for obtaining cloud macro parameters. Fig. 10 shows the AERI observed spectrum under cloudy and clear sky conditions. The AERI observations under the two conditions remain highly different, indicating that the AERI observed spectrum can be adopted directly to determine whether clouds or clear skies are present. To establish an accurate cloud recognition model, we adopted the cloud fraction data obtained from the all-sky image at the same site as the label for

365 training, where the sample with a cloud fraction less than 30% is marked as 0, indicating clear sky, while the sample with a
cloud fraction greater than 30% is marked as 1, indicating that there is cloud over head. Using the above mentioned method,
the cloud fraction of the all-sky image from March to May 2010 was labeled and temporally matched with the AERI
observed radiance to form a training data set, based on which a cloud recognition model was established by training the back
propagation (BP) neural network, with the final cross-validation accuracy reaching 94.3%. Compared with the recognition
370 method by radiosonde, the BP cloud recognition model has greatly improved the discrimination accuracy without requiring
additional detection equipment. The BP cloud recognition model was applied to the 178 groups of AERI observations
collected on October 21, 2012, with 168 groups of clear sky samples screened in total.

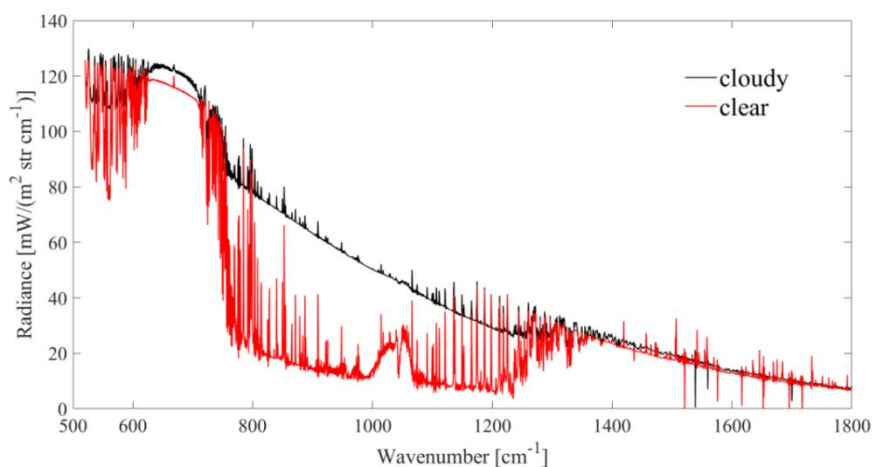


Figure 10. AERI observations in clear and cloudy sky conditions.

375 Benefiting from good retrieval accuracy and high temporal resolution, AERI instruments can be used to monitor
thermodynamic temporal structures that may not be resolved by infrequent radiosonde launches. Fig. 11 shows the
time–height cross sections of temperature and WVMR profiles derived from the Fast AERIoe retrievals. It can be seen from
Fig. 11 that AERI resolved the temperature inversion prior to approximately 15:00 UTC, and the height of the inversion layer
gradually rising over time. After 15:00 UTC, the temperature near the surface increases significantly, accompanied by the
380 disappearance of the inversion layer. From the comparisons with radiosonde profiles shown in Fig. 12, the retrieval results of
Fast AERIoe are well matched with radiosonde profiles, especially the temperature profiles, which demonstrates the ability
of the algorithm to resolve the inversion layer.

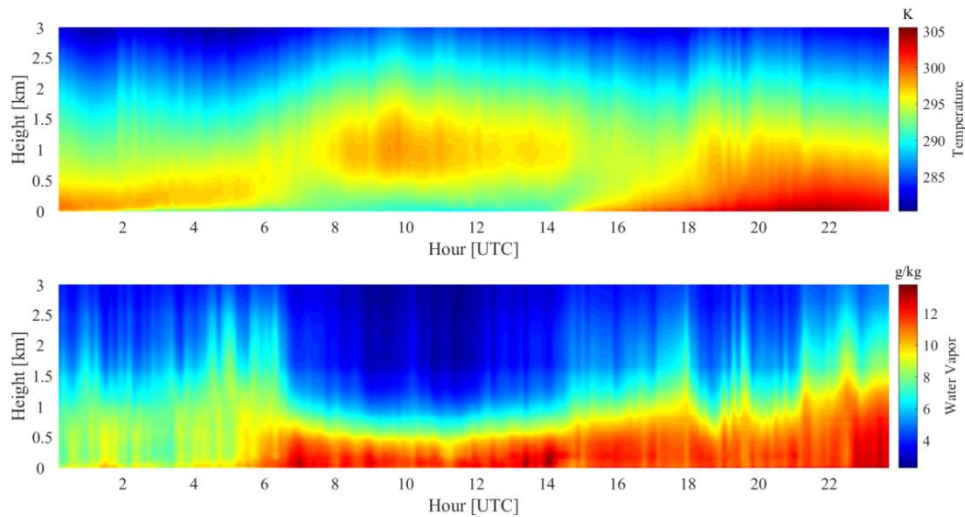


Figure 11. Time-height cross sections of temperature (top) and water vapor (bottom) on Oct. 21, 2012.

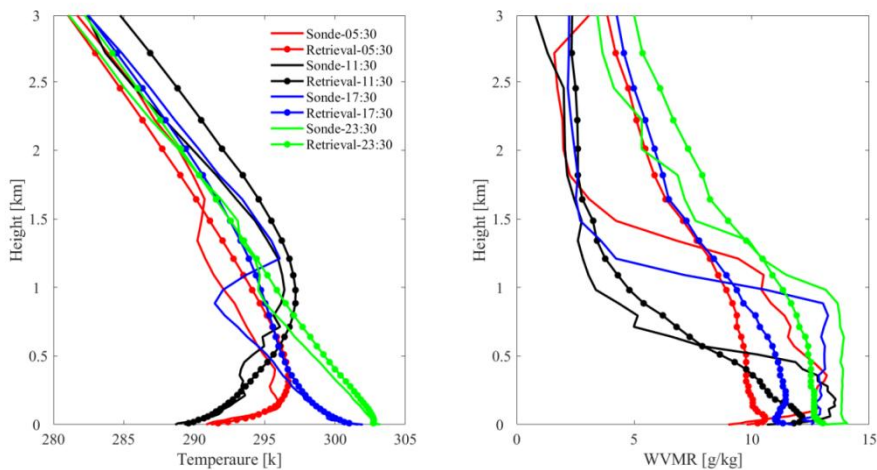


Figure 12. Comparisons between retrieved thermodynamic profiles and the coincident radiosonde profiles at 05:30 UTC, 11:30 UTC, 17:30 UTC and 23:30 UTC on Oct. 21, 2012. (Left) Temperature profiles, (right) WVMR profiles.

5 Conclusions

The AERIOe algorithm retrieves atmospheric temperature and humidity profiles on the basis of the optimal estimation algorithm, which can make full use of information in the infrared spectrum and give the uncertainty of each retrieval results. AERIOe reduces the dependence on the first-guess profile by introducing regularization parameters, but at the same time, it also requires more iterative steps, which increases the calculation amount and retrieval time of the algorithm. In this paper, a fast retrieval method called Fast AERIOe is established on the basis of AERIOe by adaptively recalculating the Jacobians. Based on the statistical comparison of the two methods (AERIOe and Fast AERIOe) with radiosonde observations, the retrieval performance of Fast AERIOe are summarized as follows:

1. The retrieval speed of the Fast AERIOe is significantly improved compared with AERIOe while keeping the parameters of the computing platform unchanged, with the average retrieval time reduced by more than 50%. The

temperature and water vapor profiles derived from Fast AERIOe is almost unchanged compared with AERIOe, illustrating that the retrieval results of Fast AERIOe is comparable to that of AERIOe.

400 2. As for the convergence characteristics, 825 out of 826 samples adopted AERIOe meets the convergence criterion, while the sample adopted Fast AERIOe converged over 98% of the time. The method of recalculating Jacobians in Fast AERIOe slightly reduces the convergence of the retrieval algorithm. Despite this, the Fast AERIOe algorithm have demonstrated the ability to retrieve reliable temperature and water vapor profiles more quickly, which is fast enough for real-time processing.

405 3. When the Fast AERIOe is adopted to measured AERI spectrum, a cloud recognition model without additional detection equipment is established based on the BP neural network algorithm to remove cloudy-sky cases. Compared with the commonly used cloud recognition method by radiosonde observations, the BP cloud recognition model has greatly improved the discrimination accuracy. It should be noted that the hyperspectra under the two weather conditions of clear sky with high humidity and few clouds are relatively close, while the above two weather conditions are far from further
410 distinguished when building the BP cloud recognition model, which may reduce the discriminative accuracy of the model.

A single instrument always has some defects at the vertical coverage, vertical resolution, temporal resolution and accuracy in obtaining the vertical distribution of atmospheric constituents ([Barrera-Verdejo et al., 2016](#)). The combination of multiple remote sensing devices in an optimal retrieval algorithm can overcome the shortcomings of a single device, making full use of each measurement to achieve the purpose of enhancing their benefits. However, the increase in observation
415 equipment will inevitably lead to more complex calculations of the forward model and Jacobian, which will lead to a significant increase in the amount of calculation and retrieval time. Therefore, it is particularly necessary to carry out research on fast retrieval in case of joint retrieval. Apart from the influence of the Jacobian on the retrieval time, so does the number of iterations required by the retrieval algorithm, which is dominated by the regularization parameter. Future work will focus on the application of Fast AERIOe in the combination of different observations and the selection of regularization
420 parameters to permit the retrieval algorithm to converge more efficiently.

Data availability. The data used in the manuscript (including AERI, radiosonde, etc) are available from the ARM Data Archive (<https://adc.arm.gov/discovery/#/>, accessed on 19 January 2022). The code for recalculating Jacobians are not publicly available at this time but may be obtained from the authors upon reasonable request.

425 *Author contributions.* LL, BY and WH determined the main goal of this study. WH developed the approach, analyzed the data, and visualized the results of the experiments. LL prepared the paper with contributions from all co-authors. SH acquired funding and edited the paper. WL and WY prepared the various data sets. ZL and XY provided guidance on

algorithmic procedures. All the co-authors reviewed the paper.

430

Competing interests. The contact author has declared that none of the authors has any competing interests.

Acknowledgments. The authors thank the U. S. Department of Energy (DOE) Atmospheric Radiation Measurement (ARM) Program for providing meteorological data online for free. The authors are deeply grateful to Atmospheric and Environmental Research (AER) Inc. for providing the LBLRTM codes online for free.

435

Financial support. This work is supported by the National Natural Science Foundation of China (Grant No. 42175154 and Grant No. 62105367) and Natural Science Foundation of Hunan Province (Grant No. 2020JJ4662).

440 **References**

Barrera-Verdejo, M., Crewell, S., Löhnert, U., Orlandi, E., and Di Girolamo, P.: Ground-based lidar and microwave radiometry synergy for high vertical resolution absolute humidity profiling, *Atmospheric Measurement Techniques*, 9, 4013-4028, <https://doi.org/10.5194/amt-9-4013-2016>, 2016.

445

Barthlott, S., Schneider, M., Hase, F., Blumenstock, T., Kiel, M., Dubravica, D., García, O. E., Sepúlveda, E., Mengistu Tsidu, G., Takele Kenea, S., Grutter, M., Plaza-Medina, E. F., Stremme, W., Strong, K., Weaver, D., Palm, M., Warneke, T., Notholt, J., Mahieu, E., Servais, C., Jones, N., Griffith, D. W. T., Smale, D., and Robinson, J.: Tropospheric water vapour isotopologue data (H₂16O, H₂18O, and HD16O) as obtained from NDACC/FTIR solar absorption spectra, *Earth Syst. Sci. Data*, 9, 15-29, <https://doi.org/10.5194/essd-9-15-2017>, 2017.

450

Blumberg, W., Wagner, T., Turner, D., and Correia Jr, J.: Quantifying the accuracy and uncertainty of diurnal thermodynamic profiles and convection indices derived from the Atmospheric Emitted Radiance Interferometer, *Journal of Applied Meteorology and Climatology*, 56, 2747-2766, <https://doi.org/10.1175/JAMC-D-17-0036.1>, 2017.

Blumberg, W. G., Turner, D. D., Löhnert, U., and Castleberry, S.: Ground-Based Temperature and Humidity Profiling Using Spectral Infrared and Microwave Observations. Part II: Actual Retrieval Performance in Clear-Sky and Cloudy Conditions, *Journal of Applied Meteorology and Climatology*, 54, 2305-2319, <https://doi.org/10.1175/jamc-d-15-0005.1>, 2015.

455

Cimini, D., Westwater, E. R., and Gasiewski, A. J.: Temperature and Humidity Profiling in the Arctic Using Ground-Based Millimeter-Wave Radiometry and 1DVAR, *IEEE Transactions on Geoscience and Remote Sensing*, 48, 1381-1388, <https://doi.org/10.1109/TGRS.2009.2030500>, 2010.

Coniglio, M. C., Romine, G. S., Turner, D. D., and Torn, R. D.: Impacts of targeted AERI and Doppler lidar wind retrievals

on short-term forecasts of the initiation and early evolution of thunderstorms, *Monthly Weather Review*, 147, 1149-1170,
460 <https://doi.org/10.1175/MWR-D-18-0351.1>, 2019.

De Mazière, M., Thompson, A. M., Kurylo, M. J., Wild, J. D., Bernhard, G., Blumenstock, T., Braathen, G. O., Hannigan, J.
W., Lambert, J. C., Leblanc, T., McGee, T. J., Nedoluha, G., Petropavlovskikh, I., Seckmeyer, G., Simon, P. C., Steinbrecht,
W., and Strahan, S. E.: The Network for the Detection of Atmospheric Composition Change (NDACC): history, status and
perspectives, *Atmos. Chem. Phys.*, 18, 4935-4964, <https://doi.org/10.5194/acp-18-4935-2018>, 2018.

465 Ellingson, R. G., Cess, R. D., and Potter, G. L.: The atmospheric radiation measurement program: Prelude, *Meteorological
Monographs*, 57, 1.1-1.9, <https://doi.org/10.1175/AMSMONOGRAPHS-D-15-0029.1>, 2016.

Feltz, W. F., Smith, W. L., Knuteson, R. O., Revercomb, H. E., Woolf, H. M., and Howell, H. B.: Meteorological applications
of temperature and water vapor retrievals from the ground-based Atmospheric Emitted Radiance Interferometer (AERI),
Journal of Applied Meteorology, 37, 857-875, [https://doi.org/10.1175/1520-0450\(1998\)037<0857:MAOTAW>2.0.CO;2](https://doi.org/10.1175/1520-0450(1998)037<0857:MAOTAW>2.0.CO;2),
470 1998.

Gardiner, T., Forbes, A., de Mazière, M., Vigouroux, C., Mahieu, E., Demoulin, P., Velazco, V., Notholt, J., Blumenstock, T.,
Hase, F., Kramer, I., Sussmann, R., Stremme, W., Mellqvist, J., Strandberg, A., Ellingsen, K., and Gauss, M.: Trend analysis
of greenhouse gases over Europe measured by a network of ground-based remote FTIR instruments, *Atmos. Chem. Phys.*, 8,
6719-6727, <https://doi.org/10.5194/acp-8-6719-2008>, 2008.

475 Geerts, B., Raymond, D. J., Grubišić, V., Davis, C. A., Barth, M. C., Detwiler, A., Klein, P. M., Lee, W.-C., Markowski, P. M.,
Mullendore, G. L., and Moore, J. A.: Recommendations for In Situ and Remote Sensing Capabilities in Atmospheric
Convection and Turbulence, *Bulletin of the American Meteorological Society*, 99, 2463-2470,
<https://doi.org/10.1175/bams-d-17-0310.1>, 2018.

Hu, J., Yussouf, N., Turner, D. D., Jones, T. A., and Wang, X.: Impact of ground-based remote sensing boundary layer
480 observations on short-term probabilistic forecasts of a tornadic supercell event, *Weather and Forecasting*, 34, 1453-1476,
<https://doi.org/10.1175/WAF-D-18-0200.1>, 2019.

Kain, J. S., Coniglio, M. C., Correia, J., Clark, A. J., Marsh, P. T., Ziegler, C. L., Lakshmanan, V., Miller, S. D., Dembek, S.
R., and Weiss, S. J.: A feasibility study for probabilistic convection initiation forecasts based on explicit numerical guidance,
Bulletin of the American Meteorological Society, 94, 1213-1225, <https://doi.org/10.1175/BAMS-D-11-00264.1>, 2013.

485 Kiel, M., Wunch, D., Wennberg, P. O., Toon, G. C., Hase, F., and Blumenstock, T.: Improved retrieval of gas abundances
from near-infrared solar FTIR spectra measured at the Karlsruhe TCCON station, *Atmos. Meas. Tech.*, 9, 669-682,
<https://doi.org/10.5194/amt-9-669-2016>, 2016.

Knuteson, R., Revercomb, H., Best, F., Ciganovich, N., Dedecker, R., Dirks, T., Ellington, S., Feltz, W., Garcia, R., and

Howell, H.: Atmospheric emitted radiance interferometer. Part I: Instrument design, *Journal of Atmospheric and Oceanic Technology*, 21, 1763-1776, <https://doi.org/10.1175/JTECH-1662.1>, 2004.

Li, J., Wang, P., Han, H., Li, J., and Zheng, J.: On the assimilation of satellite sounder data in cloudy skies in numerical weather prediction models, *Journal of Meteorological Research*, 30, 169-182, <https://doi.org/10.1007/s13351-016-5114-2>, 2016.

Maahn, M., Turner, D. D., Löhnert, U., Posselt, D. J., Ebell, K., Mace, G. G., and Comstock, J. M.: Optimal Estimation Retrievals and Their Uncertainties: What Every Atmospheric Scientist Should Know, *Bulletin of the American Meteorological Society*, 101, E1512-E1523, <https://doi.org/10.1175/bams-d-19-0027.1>, 2020.

Revercomb, H. E., Turner, D. D., Tobin, D. C., Knuteson, R. O., Feltz, W. F., Barnard, J., Bösenberg, J., Clough, S., Cook, D., Ferrare, R., Goldsmith, J., Gutman, S., Halthore, R., Lesht, B., Liljegren, J., Linné, H., Michalsky, J., Morris, V., Porch, W., Richardson, S., Schmid, B., Splitt, M., Van Hove, T., Westwater, E., and Whiteman, D.: The Arm Program's Water Vapor Intensive Observation Periods: Overview, Initial Accomplishments, and Future Challenges, *Bulletin of the American Meteorological Society*, 84, 217-236, <https://doi.org/10.1175/bams-84-2-217>, 2003.

Rodgers, C. D.: Information content and optimisation of high spectral resolution remote measurements, *Advances in Space Research*, 21, 361-367, [https://doi.org/10.1016/S0273-1177\(97\)00915-0](https://doi.org/10.1016/S0273-1177(97)00915-0), 1998.

Rodgers, C. D.: Inverse methods for atmospheric sounding: theory and practice, World scientific, 119-120 pp., ISBN9814498688, 2000.

Romine, G. S., Schwartz, C. S., Snyder, C., Anderson, J. L., and Weisman, M. L.: Model bias in a continuously cycled assimilation system and its influence on convection-permitting forecasts, *Monthly weather review*, 141, 1263-1284, <https://doi.org/10.1175/MWR-D-12-00112.1>, 2013.

Rowe, P. M., Walden, V. P., and Warren, S. G.: Measurements of the foreign-broadened continuum of water vapor in the 6.3 μm band at $-30\text{ }^{\circ}\text{C}$, *Applied Optics*, 45, 4366-4382, <https://doi.org/10.1364/AO.45.004366>, 2006.

Schneider, M. and Hase, F.: Ground-based FTIR water vapour profile analyses, *Atmospheric Measurement Techniques*, 2, 609-619, <https://doi.org/https://doi.org/10.5194/amt-2-609-2009>, 2009.

Schneider, M., Hase, F., and Blumenstock, T.: Ground-based remote sensing of HDO/H₂O ratio profiles: introduction and validation of an innovative retrieval approach, *Atmospheric Chemistry and Physics*, 6, 4705-4722, <https://doi.org/https://doi.org/10.5194/acp-6-4705-2006>, 2006a.

Schneider, M., Hase, F., and Blumenstock, T.: Water vapour profiles by ground-based FTIR spectroscopy: study for an optimised retrieval and its validation, *Atmospheric Chemistry and Physics*, 6, 811-830, <https://doi.org/10.5194/acp-6-811-2006>, 2006b.

- Sisterson, D., Pepler, R., Cress, T., Lamb, P., and Turner, D.: The ARM southern great plains (SGP) site, *Meteorological Monographs*, 57, 6.1-6.14, <https://doi.org/10.1175/AMSMONOGRAPHIS-D-16-0004.1>, 2016.
- Smith, W. L., Feltz, W. F., Knuteson, R. O., Revercomb, H. E., Woolf, H. M., and Howell, H. B.: The retrieval of planetary boundary layer structure using ground-based infrared spectral radiance measurements, *Journal of Atmospheric and Oceanic Technology*, 16, 323-333, [https://doi.org/10.1175/1520-0426\(1999\)016<0323:TROPBL>2.0.CO;2](https://doi.org/10.1175/1520-0426(1999)016<0323:TROPBL>2.0.CO;2), 1999.
- Turner, D. D. and Blumberg, W. G.: Improvements to the AERIOe Thermodynamic Profile Retrieval Algorithm, *IEEE Journal of Selected Topics in Applied Earth Observations and Remote Sensing*, 12, 1339-1354, <https://doi.org/10.1109/JSTARS.2018.2874968>, 2019.
- Turner, D. D. and Löhnert, U.: Information Content and Uncertainties in Thermodynamic Profiles and Liquid Cloud Properties Retrieved from the Ground-Based Atmospheric Emitted Radiance Interferometer (AERI), *Journal of Applied Meteorology and Climatology*, 53, 752-771, <https://doi.org/10.1175/jamc-d-13-0126.1>, 2014.
- 530 Turner, D. D. and Löhnert, U.: Ground-based temperature and humidity profiling: combining active and passive remote sensors, *Atmospheric Measurement Techniques*, 14, 3033-3048, <https://doi.org/10.5194/amt-14-3033-2021>, 2021.
- Turner, D. D., Feltz, W. F., and Ferrare, R. A.: Continuous water vapor profiles from operational ground-based active and passive remote sensors, *Bulletin of the American Meteorological Society*, 81, 1301-1318, [https://doi.org/10.1175/1520-0477\(2000\)081<1301:CWBPF0>2.3.CO;2](https://doi.org/10.1175/1520-0477(2000)081<1301:CWBPF0>2.3.CO;2), 2000.
- 535 Turner, D. D., Mlawer, E. J., and Revercomb, H. E.: Water Vapor Observations in the ARM Program, *Meteorological Monographs*, 57, 13.11-13.18, <https://doi.org/10.1175/amsmonographs-d-15-0025.1>, 2016.
- Viatte, C., Strong, K., Walker, K. A., and Drummond, J. R.: Five years of CO, HCN, C₂H₆, C₂H₂, CH₃OH, HCOOH and H₂CO total columns measured in the Canadian high Arctic, *Atmos. Meas. Tech.*, 7, 1547-1570, <https://doi.org/10.5194/amt-7-1547-2014>, 2014.
- 540 Wagner, T. J., Klein, P. M., and Turner, D. D.: A new generation of ground-based mobile platforms for active and passive profiling of the boundary layer, *Bulletin of the American Meteorological Society*, 100, 137-153, <https://doi.org/10.1175/BAMS-D-17-0165.1>, 2019.
- Wakefield, R. A., Turner, D. D., and Basara, J. B.: Evaluation of a Land–Atmosphere Coupling Metric Computed from a Ground-Based Infrared Interferometer, *Journal of Hydrometeorology*, 22, 2073-2087, <https://doi.org/10.1175/jhm-d-20-0303.1>, 2021.
- 545 Yang, J. and Min, Q.: Retrieval of atmospheric profiles in the New York State Mesonet using one-dimensional variational algorithm, *Journal of Geophysical Research: Atmospheres*, 123, 7563-7575, <https://doi.org/10.1029/2018JD028272>, 2018.
- Yin, H., Sun, Y., Liu, C., Wang, W., Shan, C., and Zha, L.: Remote Sensing of Atmospheric Hydrogen Fluoride (HF) over

Hefei, China with Ground-Based High-Resolution Fourier Transform Infrared (FTIR) Spectrometry, *Remote Sensing*, 13, 550 791, <https://doi.org/https://doi.org/10.3390/rs13040791>, 2021a.

Yin, H., Sun, Y., Wang, W., Shan, C., Tian, Y., and Liu, C.: Ground-based high-resolution remote sensing of sulphur hexafluoride (SF₆) over Hefei, China: characterization, optical misalignment, influence, and variability, *Optics Express*, 29, 34051-34065, <https://doi.org/10.1364/OE.440193>, 2021b.

Yin, H., Sun, Y., Liu, C., Lu, X., Smale, D., Blumenstock, T., Nagahama, T., Wang, W., Tian, Y., Hu, Q., Shan, C., Zhang, H., 555 and Liu, J.: Ground-based FTIR observation of hydrogen chloride (HCl) over Hefei, China, and comparisons with GEOS-Chem model data and other ground-based FTIR stations data, *Optics Express*, 28, 8041-8055, <https://doi.org/10.1364/OE.384377>, 2020.

Zhou, M., Langerock, B., Vigouroux, C., Sha, M. K., Ramonet, M., Delmotte, M., Mahieu, E., Bader, W., Hermans, C., Kumps, N., Metzger, J. M., Dufлот, V., Wang, Z., Palm, M., and De Mazière, M.: Atmospheric CO and CH₄ time series and 560 seasonal variations on Reunion Island from ground-based in situ and FTIR (NDACC and TCCON) measurements, *Atmos. Chem. Phys.*, 18, 13881-13901, <https://doi.org/10.5194/acp-18-13881-2018>, 2018.