

Uncertainty Assessment of Satellite Remote Sensing-based Evapotranspiration Estimates: A Systematic Review of Methods and Gaps

Bich Tran^{1,2}, Johannes van der Kwast¹, Solomon Seyoum¹, Remko Uijlenhoet², Graham Jewitt^{2,3}, Marloes Mul¹

¹Land and Water Management Department, IHE Delft Institute for Water Education, Delft, 2611 AX, the Netherlands

²Department of Water Management, Delft University of Technology, Delft, 2628 CN, the Netherlands

³Water Resources and Ecosystems Department, IHE Delft Institute for Water Education, Delft, 2611 AX, the Netherlands

Correspondence to: Bich N. Tran (b.tran@un-ihe.org)

10 **Abstract.** Satellite remote sensing (RS) data are increasingly being used to estimate total evaporation, ~~often referred to as~~ ~~or~~ evapotranspiration (ET), over large regions. Since RS-based ET (RS-ET) estimation inherits uncertainties from several sources, many available studies have assessed these uncertainties using different methods ~~and reference data~~. However, the suitability of methods and reference data subsequently affects the validity of these evaluations. This study summarizes the status of the various methods applied for uncertainty assessment of RS-ET estimates, discusses the advances and caveats of
15 these methods, identifies assessment gaps, and provides recommendations for future studies. We systematically reviewed ~~601~~ ~~676~~ research papers published from 2011 to 2021 that assessed the uncertainty or accuracy of RS-ET estimates. We categorized and classified them based on (i) the methods used to assess uncertainties, (ii) the context where uncertainties were evaluated, and (iii) the metrics used to report uncertainties. Our quantitative synthesis shows that the uncertainty assessments of RS-ET estimates are not consistent and comparable in terms of methodology, reference data, geographical distribution, and uncertainty
20 presentation. Most studies used validation methods using Eddy Covariance (EC) based ET estimates as reference. However, in many regions such as Africa and the Middle East, other references are often used due to the lack of EC stations. The accuracy and uncertainty of RS-ET estimates are most often described by Root-Mean-Squared Error (RMSE). When validating against EC-based estimates, the RMSE of daily RS-ET varies greatly among different locations and levels of temporal support, ranging from 0.01 to 6.65 mm/day with a mean of ~~1.42-18~~ mm/day. We conclude that future studies need to report the context of
25 validation, the uncertainty of the reference datasets, the mismatch in temporal and spatial scales of reference datasets to that of the RS-ET estimates, and multiple performance metrics with their variation in different conditions and statistical significance to provide a comprehensive interpretation to assist potential users. We provide specific recommendations in this regard. Furthermore, extending the application of RS-ET to regions that lack validation will require obtaining additional ground-based data and combining different methods for uncertainty assessment.

30 1 Introduction


Evapotranspiration (ET) is the key variable linking the water, energy, and carbon cycles of the Earth (Fisher et al., 2017). In the ~~continental-terrestrial~~ water cycle, it is the second-largest flux after precipitation (Korzoun et al., 1978), which predominates the demand side of water resources. It is associated with latent heat flux in the surface energy balance. ET combines evaporation of water from soil, free water surfaces and plants and thus, depends on many factors, such as the atmospheric and vegetation conditions, the availability of water in the soil, water bodies, canopy, and surface roughness (Monteith, 1965; Shuttleworth and Wallace, 1985). The complexity of measuring ET directly makes it difficult and expensive to routinely measure and capture its spatial variation, as this requires a dense network of *in-situ* gauging stations. Therefore, satellite remote sensing (RS) observations have been increasingly used for estimating ET spatially.

As ET cannot be directly measured by sensors from space, retrieval algorithms or models are needed to estimate ET from other variables observed by RS (Fisher et al., 2017). These models estimate ET from ~~optical-visible~~ and/or thermal ~~infrared~~ RS data, and include now well-known models such as SEBAL (Bastiaanssen et al., 1998), TSEB (Kustas and Norman, 1999), SEBS (Su, 2002), METRIC (Allen et al., 2007), ~~and~~-ALEXI (Anderson et al., 2011), ~~PT-JPL~~ (Fisher et al., 2008), and GLEAM (Miralles et al., 2011a). ~~These diverse~~-The diversity of models, ~~parameters~~, input RS data sources, and processing techniques result in a wide range of RS-based ET estimates (Jimenez et al., 2011, Long et al., 2014, Chen et al., 2014).

While many studies have evaluated the performance of RS-based ET (RS-ET) models, none of them has concluded that a single model performs best in all situations (e.g., Ferguson et al., 2010; Vinukollu et al., 2011a). Furthermore, ~~the accessibility and uncertainty lead to significant challenges to operational applications (e.g., irrigation scheduling and drought monitoring) using output from these models. For some models, r~~etrieving ET estimates requires access to ~~the data, software or source code, and~~ ~~and~~ expertise in these models. ~~The limited accessibility of RS-ET models leads to significant challenges to operational applications of RS-ET estimates (e.g., irrigation scheduling and drought monitoring).~~ Driven by community needs, several projects have provided platforms to increase public access to various ~~RS-ET~~-data products ~~which are generated by these RS-ET models~~. These projects and outputs include MODIS16 (Mu et al., 2011), SSEBop (Senay et al., 2013), GLEAM (Miralles et al., 2011a), WaPOR (FAO, 2018), ~~ECOSTRESS~~ (Fisher et al., 2020), and OpenET (Melton et al., 2021). ~~With the evolution of these now widely accessible~~Given that more RS-ET data products ~~are becoming available, characterizing and quantifying information about~~ the uncertainties ~~associated with these data products in RS-ET estimates becomes is~~ important for data users (i.e., water managers and policymakers) ~~to apply them properly~~. Uncertainty assessment helps data users know what level of confidence they can have in ET estimates and the inferred information about water resources (e.g., crop water consumption, water depletion). ~~Inferences based on RS-ET data products are limited by their spatio-temporal resolution, latency, and specifications.~~

Previous reviews have discussed RS-ET estimates and uncertainty, which are relevant to this review (Figure 1). Table S2 in Supplementary Information summarizes the ~~foe~~~~i~~main topics of these reviews. Many of these reviews focused on outlining the methods to estimate ET using RS-based models (e.g., Kustas and Norman, 1996; Courault et al., 2005; Wang and Dickinson,

2012; Zhang et al., 2016) and sometimes discussed the uncertainties in the estimation (Kalma et al., 2008; Glenn et al., 2011; Karimi and Bastiaanssen, 2015). However, none of these explored how uncertainties of RS-ET estimates are currently being assessed, which is an important issue in remote sensing and the production of spatial data production (Bielecka and Burek, 2019; Wu et al., 2019; Mayr et al., 2019). In an overview of global RS-based Essential Climate Variables (ECVs), Bayat et al. (2021) concluded that RS-ET data products lack a good practice protocol for operational validation, compared to other ECV-variables. Meanwhile, *in-situ* measurements of ET also suffer from errors and uncertainty (Allen et al., 2011a) and, thus, require complete documentation that provides sufficient information to ascertain the expected accuracy and representativeness of the reported ET estimates (Allen et al., 2011b).

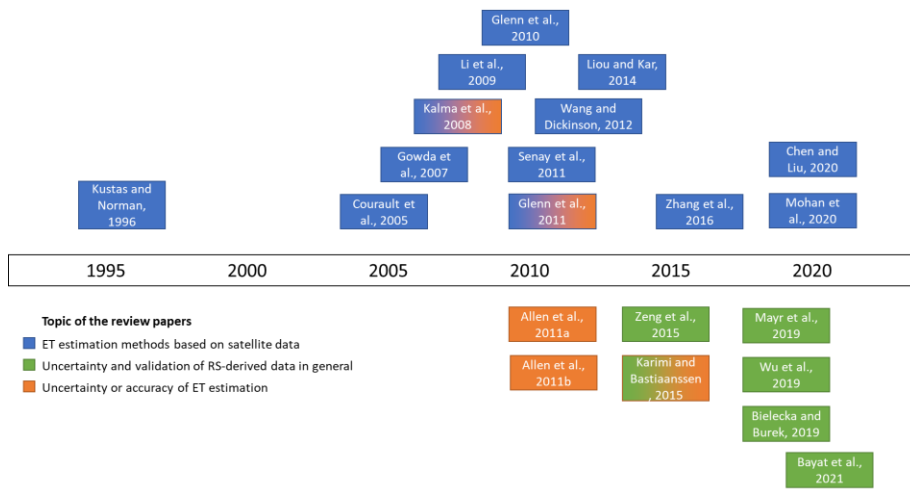

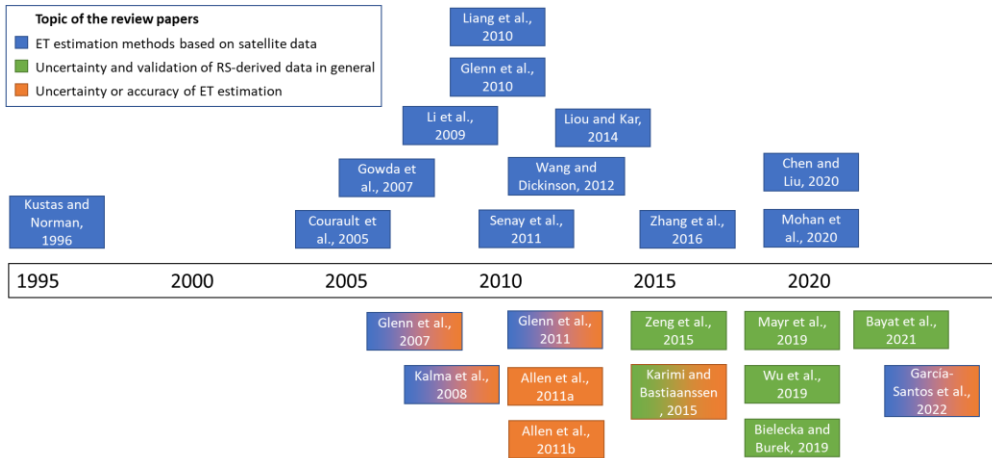


Figure 1: Previous literature reviews on RS-ET estimation, uncertainty, and validation of RS-derived data.

75 These reviews highlight the need to better advance the uncertainty assessment of RS-ET, leading to the following research questions:

- What are the common and emerging methods used to assess uncertainty in RS-ET estimates?
- In which contexts are the uncertainties of RS-ET assessed with these methods?
- What is the typical range of uncertainty in RS-ET estimates globally based on previous studies?

80 To answer these questions and build on existing literature, we surveyed previous studies that assessed the uncertainty or accuracy of RS-ET models or the output data products of these models. Given that many literature reviews on the uncertainty or accuracy of ET estimation have been published until 2011 (Figure 1), we focus on the period from 2011 to evaluate whether the studies in this period adopted the valuable contributions and recommendations from these previous reviews. Given the growing volume of literature published in the field, we followed a systematic quantitative review approach to avoid subjectivity or a bias towards particular products, authors or approaches. We identified research articles with a set of predetermined criteria and categorized these articles based on (i) the methods used to assess uncertainties, (ii) the context where uncertainties were evaluated, and (iii) the metrics used to report uncertainties. We then quantified the number of articles per category to identify any trends or gaps in literature. Furthermore, we appraised the advances and caveats of the existing methods and provided recommendations for future studies.

90 The rest of this paper is organized as follows: Section 2 provides the theoretical basis for the research and clarifies the key terms that we use to analyze literature using the methods described in Section 3. The results of the literature analysis, concerning assessment methods and the context when these methods are used are discussed in Section 4 and 5. Based on the

categorized literature, Section 6 discusses the use of uncertainty metrics and shows the typical range of uncertainty in RS-ET estimates. Finally, Section 7 summarizes the key points and recommendations for future research.

95 2 Theoretical frameworks

2.1 Uncertainty definition and representation

Uncertainty is generally defined as the state of being not completely confident or sure of something. The terms ‘error’, ‘accuracy’, ‘bias’, and ‘precision’ are sometimes used to characterize the uncertainty associated with a measurement or model output. In this study, we consider all these terms as quantifiable information about what is certain or uncertain. However, it is important to clarify these terms since they are different from ‘uncertainty’ by definition (Foody and Atkinson, 2003; Heuvelink, 1998; Loew et al., 2017).

Error represents the difference between what is measured and its true value in metrology (i.e., the science of measurement) (JCGM, 2012). The true value is the exact (but mostly unknown) value according to the theoretical definition of the variable being measured or estimated. If a true value is perfectly known, the error of a measurement is surely known. Then, there cannot be any uncertainty because we are certain of all values. Therefore, if we perfectly know the true value, we have no measurement error, which eliminates uncertainty. Therefore, uncertainty is associated with a set of stems from unknown true values and unknown errors. Since the true value of a quantity intended to be measured or estimated is practically unknown

When a measurement can be repeated, the uncertainty (described by inaccuracy and imprecision) of a measuring instrument can be described using probability distributions of the measured values or measurement errors compared to a reference (Montanari, 2007; Foody and Atkinson, 2003; Povey and Grainger, 2015) estimated from repeated measurements of a known quantity (standard reference), before measuring an unknown quantity. Figure 2 illustrates the relationship how other terms are related to between uncertainty and other related terms (i.e. when uncertainty is described by the probability distribution of measured value or error). ‘error’ and ‘uncertainty’ are often used interchangeably (e.g. in the work of Heuvelink, 1998).

The definition of ‘accuracy’ seems more disputable than ‘error’. Loew et al. (2017) used a definition grounded in metrology (JCGM, 2012) and noted that accuracy is not given a numerical value. Meanwhile, ‘accuracy’ is Foody and Atkinson (2003) defined accuracy as “the expectation (i.e., expected value) of overall error” (e.g., Foody and Atkinson, 2003). Both Foody and Atkinson (2003) and Heuvelink (1998) considered the Root Mean Squared Error (RMSE) as a measure of accuracy. ‘Bias’ (i.e., the difference between the expected value of an estimator and the true value of a parameter) (i.e., the difference between the expected value of an estimator and the true value of a parameter) is considered a measure of inaccuracy. High bias indicates inaccuracy and low bias indicates better accuracy. Likewise, ‘precision’ can be described using we consider standard deviation and variance as numerical quantities of imprecision of the probability distribution of measured values since they both describe denote error spread around the mean the spread of errors around the mean error.

Formatted: Space Before: 12 pt

125 Because uncertainty is related to unknown errors in many fields of science, it is often described using probability distributions (Montanari, 2007; Foody and Atkinson, 2003). In metrology, measurement uncertainty is a non-negative parameter that determines the probability distribution of the (possible) values attributed to the measurand (i.e., the quantity intended to be measured) (JCGM, 2012; Loew et al., 2017). Uncertainty can also be characterized by the probability distribution of the error (instead of the measured value) (Povey and Grainger, 2015). The uncertainty (described by inaccuracy and imprecision) of a measuring instrument can be estimated from repeated measurements of a known quantity (standard reference), before measuring an unknown quantity. Figure 2 illustrates how other terms are related to uncertainty (i.e. the probability distribution of measured value or error).

Mean of measured values

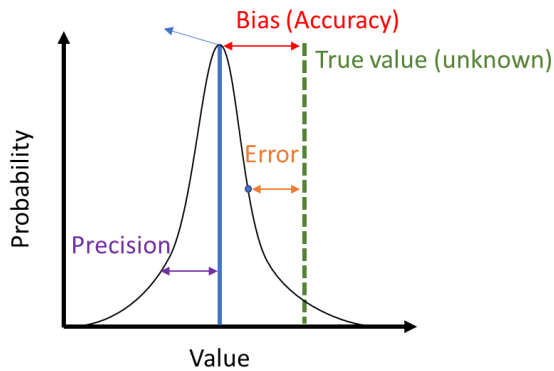


Figure 2: Uncertainty as described by the probability distribution of measured values. Adapted from Povey and Grainger (2015) and JCGM (2012).

135 Some uncertainties cannot always be described using a probability distribution function in modeling or measurement. These are called Povey and Grainger (2015) called these types of uncertainty in remote sensing the 'known, unquantifiable unknowns' (i.e., what we know to exist but are not able to quantify) and the 'unknown unknowns' (i.e., what we do not know to exist because we cannot observe) (Povey and Grainger, 2015). The suitability of probability theory to for quantifying uncertainty has been intensively discussed by many authors is widely debated in hydrological science (e.g., Beven, 2016; Nearing et al., 2016). For example, Nearing et al. (2016) argued that there is epistemological uncertainty preceding the moment at which we select before selecting probability theory as the framework (i.e., our choice of epistemology) to estimate epistemic uncertainty (i.e., what we do not know certainly). Their classification of uncertainty classification includes philosophical and linguistic types of uncertainty, which are that are hardly quantifiable. Quantifiable errors are a consequence of intrinsic variability in the observation and propagated errors from auxiliary data. The 'unknown' errors are due to model approximation,

simplification of reality, and sampling resolution of an instrument. Typically, uncertainty reported with Uncertainty assessment of satellite remote sensing data typically reports only quantifiable errors but not the 'unknown' and 'unquantifiable' errors (Povey and Grainger, 2015).

2.2 Sources of uncertainties in RS-ET data production

Raw satellite imagery undergoes a chain of processing and analysis (retrieval model) to generate useful data and information for applications (Figure 3). The ET are-is not directly measured by sensors but is derived result from models; thus, it is -or reanalyzes, and thus, RS-ET data products are considered high-level of processing by data providers (ESA, 2021; NASA, 2021). Satellite sensors measure the radiation reflected or emitted from the earth's surface or atmosphere in different regions of the electromagnetic spectrum. The retrieval models of it should also be noted that 'directly measured' also involves a measurement model (i.e., the way we relate the numerical output of a measuring instrument to the underlying physical state of the object that we want to measure). Raw digital imagery acquired by sensors on satellites must undergo a chain of processing and analysis to derive useful data and information for applications (Figure 3). low-level data (e.g., radiance, vegetation indices) share common formulas and usually requires only raw satellite images. High-level data like RS-ET relies on various models with different concepts, assumptions and data sources. Therefore, the uncertainty of RS-ET data products is strongly linked strongly links to with the total uncertainty in the model model uncertainty (from model conceptualization and parameters) and in the used satellite input data uncertainty.

RS-ET data are typically acquired during satellite passes over specific areas of interest, resulting in essentially instantaneous estimates of remote sensing-based evapotranspiration (RS-ET). Because many operational applications necessitate ET estimates over longer time intervals, such as daily, 10-day, or monthly totals, various methods have been developed to upscale these instantaneous RS-ET estimates to daily values (Jiang et al., 2021). Moreover, the designated resolution and the return interval of satellites might not be suitable for operational applications, thus, gap-filling and spatial downscaling steps are common in many RS-ET retrieval models.

Uncertainty in input data and model parameters can propagate through model to output. In addition, uncertainty due to the eChanges of spatial and temporal support scale¹(i.e., the area and time period over which a variable is measured), and gap filling can occur during data pre-processing or post-processing steps also depending on the models introduces more uncertainty. Modeled estimates are typically validated with against a more accurate reference that is considered the "true" value. The differences errors between the former and the latter compared to the reference is referred to as 'compound uncertainty' in this research since it compounds aggregates all sources of uncertainty. Meanwhile, if the modeled estimates

¹ Scale (both spatial and temporal) is best described as a triplet of support (or grain), spacing and extent. Support is the volume, shape, size, and orientation that a measurement represents. In the realm of RS, the spatial support of pixel values can be equivalent to the resolution of RS image, which is the (average) size of its constituent pixels.

are compared with other equivalent estimates, the differences are considered result in 'relative uncertainty'. Although since reference data is imperfect validation essentially yields 'relative uncertainty' due to imperfection in reference data, compound uncertainty is essentially relative uncertainty except that we trust our reference to represent "true" value 'compound uncertainty' more than other estimates.

175

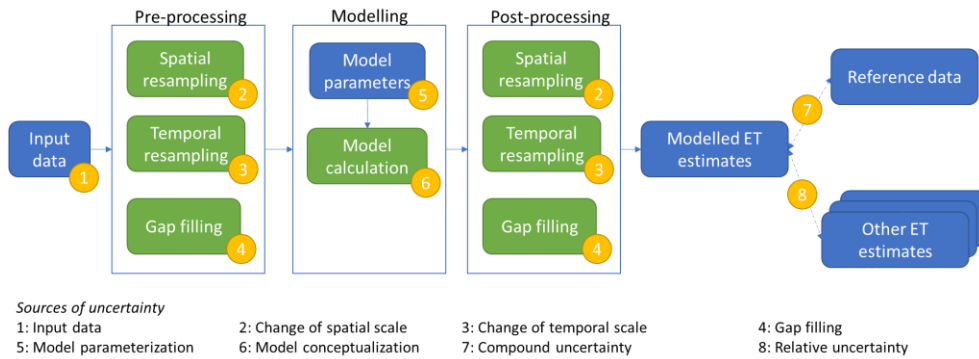
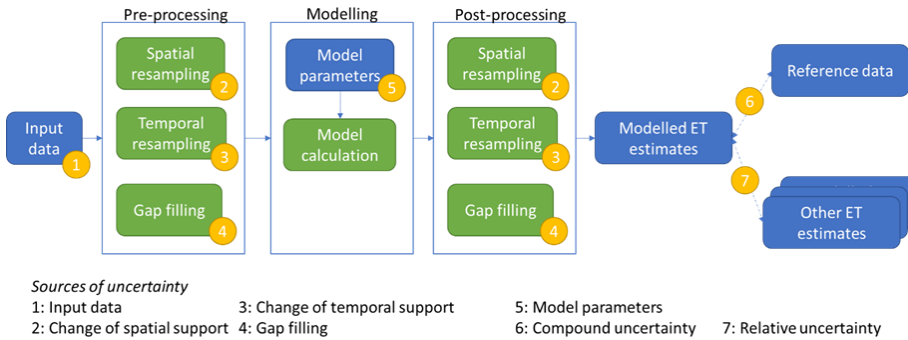


Figure 3: The sources of uncertainty in ET estimates from the typical workflow in remote sensing-based models. Compound uncertainty is the aggregation of all uncertainties from input data, change of temporal and spatial scale, gap filling, model parameterization, and model conceptualization.

180

2.3 Uncertainty assessment

Uncertainty assessment refers to the estimation of quantifiable uncertainties. The uncertainty from input factors (e.g., parameters and input data) can be quantified with uncertainty analysis, also called uncertainty propagation or error propagation (Crosetto et al., 2001; Heuvelink, 1998; Wadoux et al., 2020). There are many techniques for uncertainty propagation and their

Formatted: Normal

185 suitability depends on several factors, including the number of uncertain inputs, uncertainty distribution and correlation of
input variables, and model linearity (Mohammadi and Cremaschi, 2022). For RS-based models, analytical techniques which
are based on the law of variance propagation of moments formulas (Taylor, 1997) are often not suitable because these models
are essentially nonlinear have complex relationships and input uncertainty is not always normally distributed functions.
Numerical techniques that use such as the Monte Carlo method (MCM), numerical approximation for uncertainty propagation
190 are generally applicable to RS-based models (Heuvelink, 1998, Crosetto et al., 2001). In MCM, the model inputs are randomly
sampled from their distributions and fed into the model to generate outputs repeatedly. The variance of the output distribution
will be then considered the uncertainty in the model output (i.e., ET estimate) associated with the input variables.

The contribution of each input factor to the total uncertainty in the model output is determined by sensitivity analysis (Crosetto
et al., 2001; Saltelli et al., 2021). Such analysis is primarily used to identify the factors that contribute most to the model
uncertainty (Saltelli et al., 2019). There are two main approaches to sensitivity analysis (SA): local and global sensitivity
analysis. Local sensitivity analysis (LSA) defines the model's sensitivity to an input factor (e.g., parameter or variable) as
the first-order partial derivative of the model with respect to this input factor (Saltelli et al., 2019). In contrast, global SA
(GSA) sensitivity analysis explores the whole variation range of the input factors (Razavi and Gupta, 2015). Several global SA
techniques have been developed and used in scientific modeling (Razavi and Gupta, 2015; Saltelli et al., 2008).

200 Due to large volumes of data and spatio-temporal dimensions, vValidation is often applied to confirm a data product's fit-for-
purpose instead of sensitivity analysis and uncertainty analysis of its retrieval model (Crosetto et al., 2001). Validation, by
common sense, is proving the validity of something. However, theThe definition of validation in modeling is context-
dependent and has changed become more well-defined over time and is context-dependent (Bellocchi et al., 2011). The RS-
derived data products are often the output of models, but validation often only refers to the data itself and not the model (Bayat
205 et al., 2021; Loew et al., 2017; Wu et al., 2019a). Model validation does not prove that the model is true but rather proves that
it is empirically adequate (Oreskes et al., 1994). A valid model is one that does not contain known or detectable flaws and is
internally consistent, rather than being an assertion of the actual reality. Meanwhile, validation of model results Validation of
RS-derived data products involves quantifying the accuracy compared to a reference (often *in-situ* datasets), which proves the
validity of the data for its intended application. In RS, validation often only refers to the data itself and not the model (Bayat
210 et al., 2021; Loew et al., 2017; Wu et al., 2019a). Because RS-derived data products are model results, their validation depends
on the quality and quantity of input parameters and the accuracy of auxiliary hypotheses that were used to derive them (Oreskes
et al., 1994). Therefore,

Since RS-ET retrieval models can be used with different sets of satellite data, model validation and data (i.e., model result or
output) validation should be distinguished. Scientific models are often considered hypotheses, and thus, can only be falsified
215 rather than proven. Therefore, model validation does not prove the model is true but rather proves that it is empirically adequate
by evaluating its relative performance with respect to observations, other models, and theoretical expectations (Oreskes et al.,
1994). A valid model means that the model does not contain known or detectable flaws and is internally consistent. Meanwhile,
validation of model results depends on the quality and quantity of input parameters and the accuracy of auxiliary hypotheses

that were used to derive them (Oreskes et al., 1994). If a model was validated/validating a RS-ET model using a set of input satellite data, it does not guarantee/imply that the model output can be applied with any forcing data or settings to produce accurate output/will have the same quality when it is applied using a different dataset. Therefore, RS-derived data product validation is still needed even if the retrieval model has been "validated" before.

3 Systematic quantitative literature review method

In this literature review, we specifically focus on how the quantifiable uncertainty in the RS-ET estimate has been assessed in recent years (2011-2021). In this paper, we employed ~~There are various literature review methods that differ in search, appraisal, synthesis, and analysis approach (Grant and Booth, 2009). T Pickering and Byrne's (2014) the systematic quantitative literature review (SQLR) method described by Pickering and Byrne (2014), which can consider a large body of research literature by applying~~ includes a systematic search, and literature categorization and quantification of literature. We chose this approach to objectively highlight ~~The quantitative results from SQLR provide subjective evidence of the trends and gaps in the literature. Therefore, this approach was selected to evaluate the current RS-ET uncertainty assessment methods to assess the uncertainty in RS-ET estimation through quantitative results. The literature search is systematic, but undeniably not exhaustive; thus, certain papers may be omitted if they do not meet the specified inclusion criteria.~~

3.1 Identification and database search

The academic electronic databases Web of Science (WoS) and Scopus were searched (last access: 24/07/2023 21-9-2021) using the combination of the three search terms: "evapotranspiration", "remote sensing", and "uncertainty", or their variants (Table 1). The term "transpiration" and "interception" were not used since they only represent components of total evaporation/ET, which is often referred to as evapotranspiration in remote sensing. Since different authors might use different terms for satellite remote sensing, evaporation, and uncertainty can be used in the title and abstract, the variants of search terms were identified based on a set of 34 prior articles (Annex 1 in Supplementary Information).

Table 1: Search terms and variants. Search terms were combined using AND operator and variants were combined using OR operator. The asterisk * was used to include similar terms.

Variants combined by < OR >	Search terms combined by < AND >		
	Evaporation	Remote sensing	Uncertainty
Evapotranspiration	Remotely-sensed	Accuracy	
Latent heat	Remotely sensed	Data quality	
	Earth observation	Variability	
	Satellite*	Reliability	
	Global ** product	Evaluat*	
	Global ** data*	Validat*	
		Performance	

Formatted Table

~~Since different authors might use different terms for satellite remote sensing, evaporation, and uncertainty in the title and abstract, the variants of search terms were identified based on a set of 34 prior articles (Annex 1 in Supplementary Information).~~

245 The search result was limited to a publication date from 2011 ~~onward to 2021 and duplicates were removed and then refined using the available filters of Scopus and WoS.~~ Only English articles (>99% of results) that reported original research and were published in scientific peer-reviewed journals were considered. Review papers, ~~and~~ conference proceedings ~~and gray literature~~ were not included because they have different formats and provide ~~no or few~~ limited details of the methods used for uncertainty assessment. ~~Gray literature was not included since its quality was not assured by the scientific peer reviewing system. Finally, we removed duplicates from the search result.~~

3.2 Relevance and eligibility screening

From the search result, we identified papers that attempted to assess the accuracy or uncertainty of one or more satellite remote sensing-based estimations, ~~models, or datasets~~ of terrestrial ET, ~~either from model simulations or analysis-ready data products.~~ The models of interest were diagnostic RS-ET models², ~~such as the models that were reviewed as defined~~ by Courault et al. (2005), Zhang et al. (2016), and Chen and Liu (2020). ~~We screened the title and abstract of each paper. To identify the objective and methods of the research relevant papers, we screened the title and abstract.~~

~~Due to the large number of articles in our search results, we applied a screening process using the ASReview software, a semi-automated screening system that incorporates an active learning classifier to predict rank the order of papers based on their relevance from text to the articles that were included previously (van de Schoot et al., 2021) [Website: <https://asreview.nl/>].~~

260 ~~ASReview can help find 95% of the eligible studies after screening between only 8% to 33% of the studies (van de Schoot et al., 2021). Based on the number of articles and the efficiency of ASReview. In the ASReview screening interface, the user decides whether an article is relevant based on only the title and abstract, then ASReview shows the next articles in the order of relevance to the selected articles. The screening interface does not show authors and affiliations to avoid subjective bias. Moreover we established criteria to stop screening, we could find relevant articles from the search result faster by stopping the screening process when predefined criteria are met. These “stopping” criteria are based on the number of articles and the efficiency of ASReview. Since ASReview can help find 95% of the eligible studies after screening between only 8% to 33% of the studies (van de Schoot et al., 2021), we stopped screening when 100 (3%) irrelevant records had been found consecutively (3% of the total records) and at least 10% of the total records had been screened. By After screening titles and abstracts, we found 639 relevant articles from 3276 records (Figure 4). Even when screened with both abstract and title, without reading the full text articles some non eligible papers were still included. For example, some studies used handheld radiometers, tower remote sensors, or airborne sensors, but only mentioned “remote sensing” in the abstract and title. Therefore, we assessed the eligibility of each paper by reading 639 the full-text articles and finally included 601/676 articles in~~

² Diagnostic RS-ET models are static models that estimate ET at single period of time (snapshot) using satellite data as the primary inputs for independent variables in the models.

Formatted: Space After: 12 pt

our review (Figure 4). For more information about the journals, authors, and year of publication, a brief bibliometric analysis of these 601 articles is provided in Annex 2 (Supplementary Information).

275

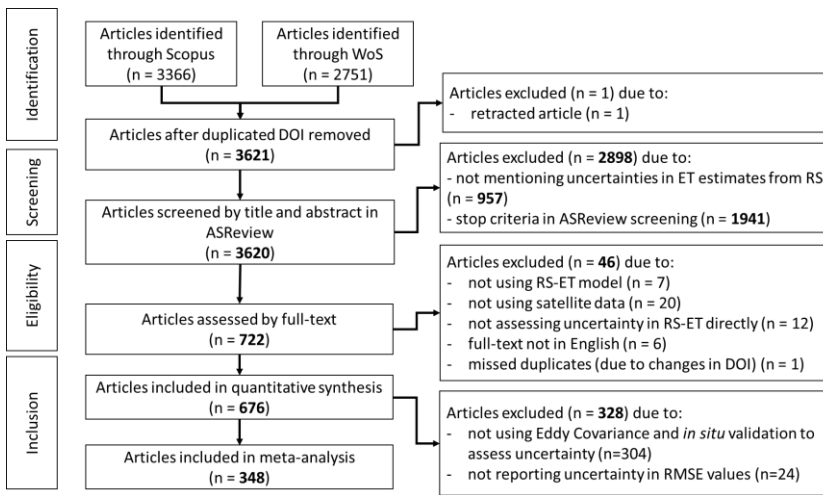
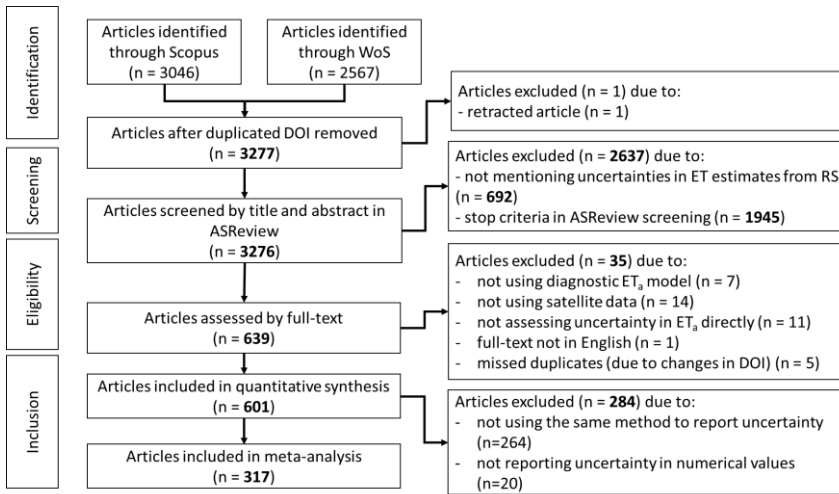


Figure 4: Results of article selection from database search (identification), title and abstract screening (screening), and full-text assessment (eligibility).

280 Even when screened with both abstract and title, without reading the full-text articles some non-eligible papers were still included. For example, some studies used handheld radiometers, tower remote sensors, or airborne sensors, but only mentioned

“remote sensing” in the abstract and title. Therefore, we assessed the eligibility of each paper by reading 639 full-text articles and finally included 601 articles in our review (Figure 4). For more information about the journals, authors, and year of publication, a brief bibliometric analysis of these 601 articles is provided in Annex 2 (Supplementary Information).

285 **3.3 Article organization and analysis**

From each included article, the items of information about the paper were recorded in a spreadsheet and were classified into categories based on methods, subject objectives of research the study, and results (Table 2). The total number and percentage of research papers per category were then synthesized from the literature database, and the patterns and trends in assessing the uncertainty of RS-ET were discerned. In addition, the most common method for uncertainty assessment was identified and articles that used this method were included in a metanalysis to derive the typical range of uncertainty in RS-ET estimates.

290 **Table 2: Categories and subcategories used to organize the included papers.**



Category group Type of categories	Categories
Objective of the study Full-reference details Year Journal title Authors	Model development, Model improvement, Model implementation, Product evaluation, Models evaluation
Sources of uncertainty	Compound uncertainty, Relative uncertainty, Change of spatial scale, Change of temporal scale, Model parameterization, Input data, Gap filling
Objective of the study	Model development Model improvement Model implementation
Types of approach Sources of uncertainties	Product evaluation Models evaluation Sensitivity analysis, Uncertainty propagation, Validation, Inter- comparison, Others Compound (Compared to reference) Relative (Compared to other estimates) Change of spatial support Change of temporal support Model parameterization Input data Gap filling
Uncertainty metrics Types of approach	RMSE, bias, variance, ... Sensitivity analysis Uncertainty analysis Validation Inter-comparison Others

Formatted Table

Types of reference metrics	of	<i>In-situ</i> measurement (EC, lysimeter...) Catchment water balance <i>In-situ</i> measurement (EC, lysimeter...) Water balance
Temporal support	Temporal support	Sub-daily, daily, from 5 to 16 days, monthly, season, annual Sub-daily, daily, from 5 to 16 days, monthly, season, annual
Spatial support	Spatial support	Less than 100 m, from 100 m to 500 m, from 500 m to 5km, from 5 km to 1°, more than 1°, basin, continent, global Less than 100 m, from 100 m to 500 m, from 500 m to 5km, from 5 km to 1°, more than 1°, basin, continent, global
Spatial coverage	Spatial coverage	Field, region, continent, global Field, region, continent, global

4 Review of methods for RS-ET uncertainty assessment

The selected articles assess uncertainty in RS-ET using mainly 8 approaches: (1) validation, (2) intercomparison, (3) sensitivity analysis, (4) evaluation of input data, (5) uncertainty propagation, (6) three-cornered hat and triple collocation (TCH/TC), (7) physical consistency, (8) ensemble of estimates. Figure 5 shows the upset plot (Lex et al., 2014) of all reviewed articles by the approach of uncertainty assessment and the intersections of more than one approach. The majority of articles (532 out of 601) used a validation approach. There are a few Other approaches that were much less frequently used and often in combination with validation, as shown by the number of intersections with 'Validation' (Figure 5).

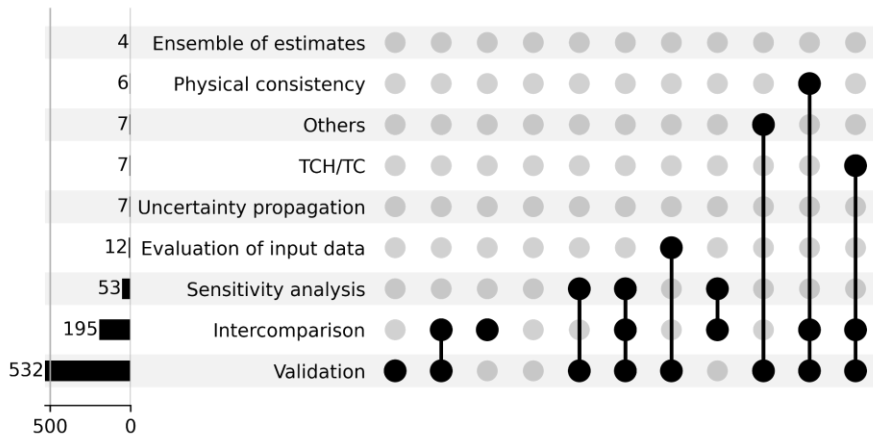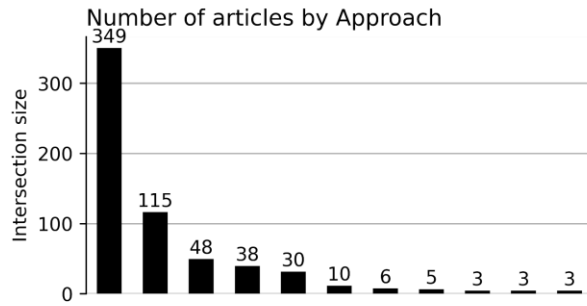

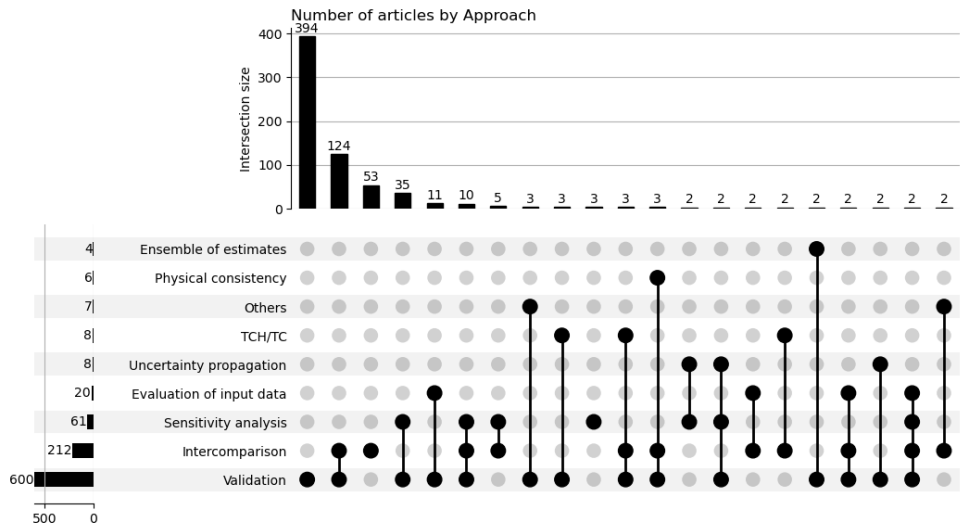


Figure 5: Uncertainty assessment approaches used in the reviewed articles (N=604676). The horizontal bar chart displays the number of articles using specific approaches (categories), while the vertical bar chart represents article counts within the intersections of multiple categories. Each vertical bar corresponds to an intersection in the column beneath it. Black circles denote the categories on the respective rows present in the intersection, while gray circles signify categories absent from the intersection. Intersections with less than 3-2 articles were excluded from the graph for improved presentation. TCH/TC stands for 'Three-Cornered Hat/Triple Collocation'. 'Others' are approaches that are used only once, which are recorded in Data Availability.

Except for the validation and intercomparison approach, other approaches showed no increasing or a decreasing proportion in selected literature from 2011 to 2021 (Figure 6). Approaches other than validation and intercomparison have only been used by a small group of researchers and not applied widely or increasingly. This-The following sub-sections will discuss the application of these-the most common uncertainty assessment approaches.



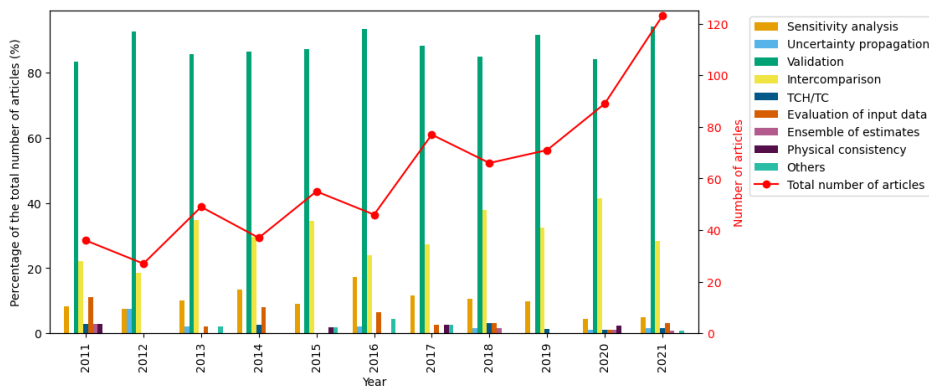


Figure 6: The proportion of reviewed articles per year for each approach to assessing RS-ET uncertainties.

4.1 Validation

In validation, RS-ET model results are compared to a ‘reference’ method that is considered by the researcher as the ‘best’ or most valid measure. The choice of the ‘reference’ method introduces subjectivity into the model evaluation (Melsen et al., 2019). In the case of RS-ET, three types of ‘reference’ are typically used: 1) *in-situ* measurements ($N = 572$), 2) [catchment](#)


water balance (N = 83) (e.g., river basin, agricultural district), and 3) output from models run with ground-based input data (N = 9). Almost all articles that used the validation approach considered an *in-situ* measurement as their reference (Figure 7) (509 out of 532), while other types of reference data were much less considered.

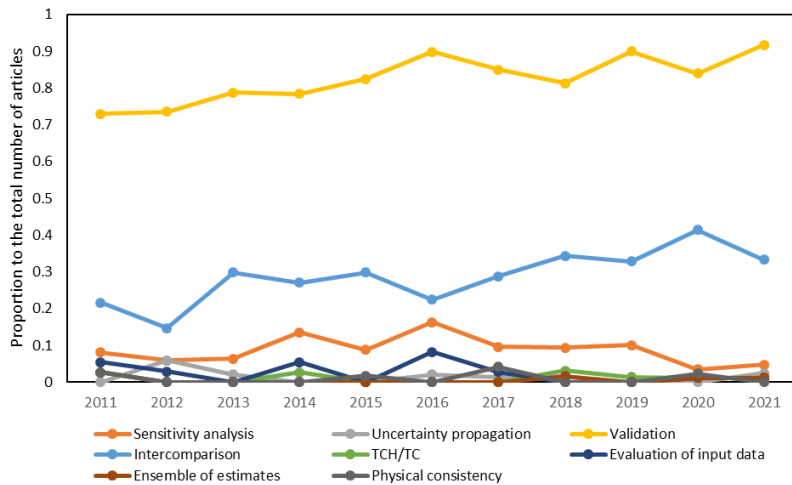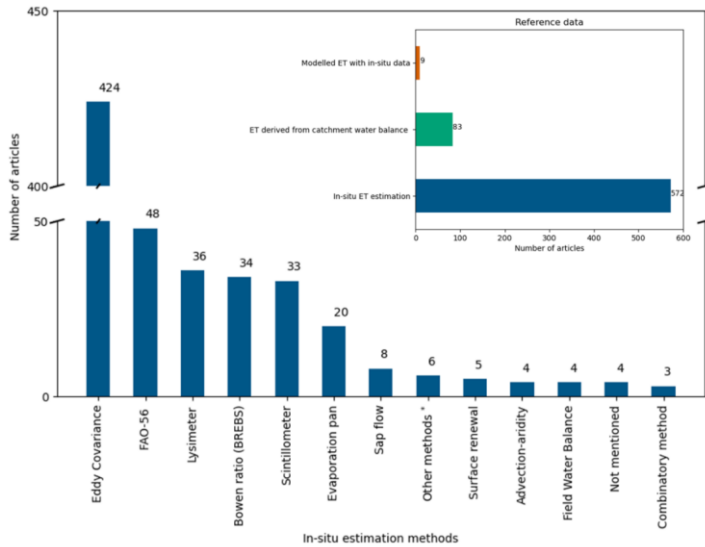

325 **Figure 7: Different reference data and *in-situ* methods used for RS-ET validation in reviewed articles (N = 600).** *Other methods for *in-situ* ET estimation include volumetric soil water content difference (N = 1), canopy temperature and meteorology monitoring system (N = 1), portable chamber (N = 1), atmometer (N = 1), Open Top Chamber (N = 1), and crop coefficient method using Reference ET equations other than FAO-56 (N = 1).

330 4.1.1 Using *in-situ* measurement as the validation reference

Several *in-situ* methods have been developed to observe-estimate ET on the ground, including Eddy Covariance (EC), lysimeters, the Bowen ratio energy balance system (BREBS), etc. (Table S3 in Supplementary Information). These measurements are often considered the ‘observation’ or ‘reference’ to validate RS-ET. Among these, EC is the predominant method for validation and was considered in 386-424 out of 509-600 articles (Figure 7). Four factors explain the popularity of the EC method: 1) its relatively large network of stations, 2) long-term temporal coverage of flux towers, 3) open access of data (e.g., FLUXNET, EuroFlux, AmeriFlux, and OzFlux) and 4) direct measurement of water vapor concentration and vertical wind speed of the air parcels to calculate latent heat flux.

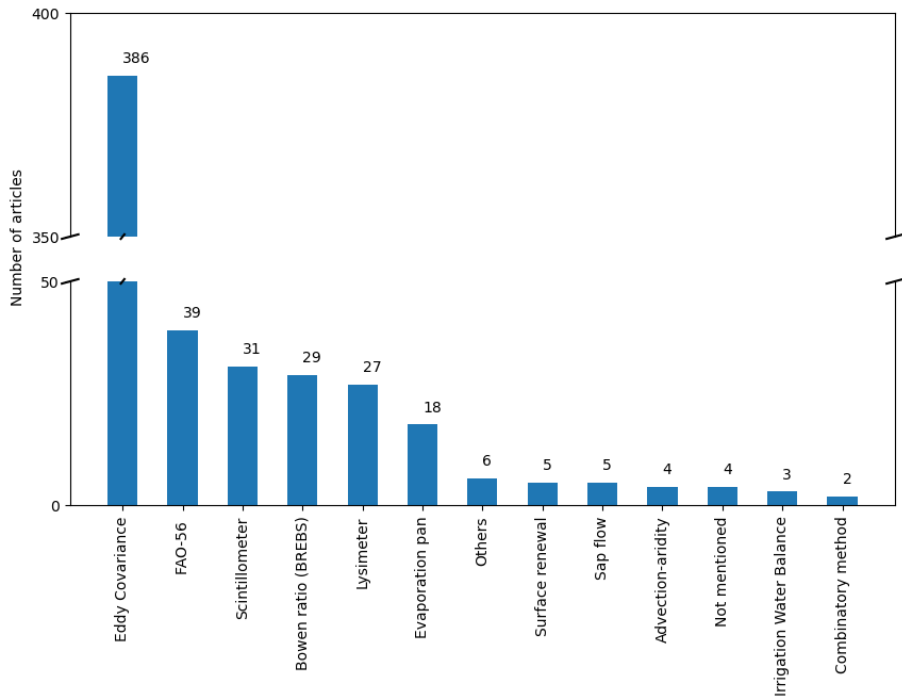

340 **Figure 7: Different *in-situ* methods used in reviewed articles (N = 509).**

Using *in-situ* methods for validation faces three main challenges: 1) the cost to set up and maintain measuring stations; 2) the mismatch between the source area of measurement and the spatial resolution of an RS-based estimate, and 3) errors in measurements and assumptions. For example, the cost of a complete EC system is about ten times the cost of a weather station with basic meteorological instruments. Although the EC method can be used to monitor other fluxes (e.g., carbon dioxide and nitrogen oxide), the high cost of the EC system still limits the number of sampling points and regions (Oliphant, 2012; FLUXNET, 2017). The low sampling density can be compensated with low-cost systems (Markwitz and Siebickeor, 2019) but at the expense of lower accuracy. In order to obtain validation data at global scale, EC networks need to be expanded in many regions (e.g., Africa, South Asia, the Middle East, and South America).

345
350 Spatial support of *in-situ* measurements often does not overlap with the pixel footprint of the RS images (i.e., the area the pixel value represents). The spatial support of *in-situ* measurements varies among methods, from 1 m² (micro-lysimetry) to a few

km² depending on wind speed and wind direction (eddy covariance and scintillometry). [Certain methods for measuring components of ET have more limited spatial support \(e.g., sap-flow measurement for transpiration\)](#). For homogeneous pixels (with the same geophysical and ecological characteristics), *in-situ* measurements can be representative of an entire pixel. However, when the pixel covers a large area, RS-ET validation frequently involves heterogeneous pixels. Therefore, multiple sites and upscaling methods are required to best aggregate site-specific to pixel-scale information (e.g., Liu et al., 2016; Li et al., 2018).

Every *in-situ* measurement technique is subject to uncertainty and error. Even the most widely used technique, the EC flux tower, has limitations in terms of measurement (10–20% error) and spatial support (Glenn et al., 2011; Wang et al., 2015). All methods have common sources of error and uncertainty, such as sensor response (detection limit), calibration error (sensor drift over time), noise (spurious random spikes in the signal from the sensor), and poor installation and maintenance (Allen et al., 2011a). Additionally, each method has specific sources of error and uncertainty due to its theoretical assumptions. For example, the EC method requires fully developed turbulent fluxes to ensure that the net vertical transfer of water vapor is caused by eddies, and the area must be horizontal and uniform. Moreover, the lack of energy balance closure in EC measurements needs particular attention, since the gap can be up to 30% of available energy (Wilson et al., 2002; Vendrame et al., 2020, Bambach et al., 2022, Allen et al., 2011b). The problem is due to scale mismatch of energy balance components and unaccounted exchange fluxes on heterogenous landscapes (Foken, 2008).

Dealing with scale mismatch and uncertainty of reference *in-situ* measurements is challenging and there is no consistent method in the reviewed literature. Some studies only mentioned these issues when discussing the validation result. The information about the spatial support and uncertainty of *in-situ* measurements is not always available to researchers if they acquire reference data from other sources. However, without reporting the spatial support and uncertainty of measurements, we might easily draw biased conclusions: when the validation results are good, we conclude that the model is good without questioning the quality of our reference, but when the results are not so good, we conclude that it is because of the imperfect reference measurements that the model still is good. Hence, it is important to accompany validation results with the best knowledge about the uncertainty and scale mismatch of reference datasets.

4.1.2 Using the residual of the water balance as the validation reference

ET of an area can be estimated as the residual of the water balance (WB) when the inflow (e.g., precipitation, irrigation supply), change in storage, and outflows of water (e.g., runoff, water conveyance) of that area are known. This approach is mainly used for assessment at a river basin scale. It assumes that the residual from the basin WB should be the total ET of the basin: $ET = P - Q - dS/dt$, where P is precipitation, Q is river discharge, and dS/dt is the total change in basin water storage over the time period. [This water balance approach assumes that there are no other water inflow or outflow across the catchment boundary. In some studies, \$dS/dt\$ is assumed to be negligible over a long period of time \(a year or longer\), which results in a more simplified water balance \$ET = P - Q\$.](#)

385 For long-term periods (e.g., years, decades), total water storage change (TWSC) over time (ds/dt) is assumed to be zero, such
that ET estimates are then validated with only $P-Q$ (e.g., Vinukollu et al., 2011a). However, this assumption does not hold true
in many regions of the world where groundwater is being overexploited at an accelerated rate. For short-term periods (i.e.,
months), TWSC is often estimated from GRACE RS-based total water storage anomaly (TWSA) products. However, the
GRACE-TWSA products only cover the period from 2002 with a gap of 11 months from 2017 to 2018 ~~due to the~~
~~discontinuation of between~~ the GRACE ~~and~~ GRACE-FO missions. ~~Although Some~~ techniques ~~are being have been~~ developed
to reconstruct this gap in the GRACE time series (e.g., Yang et al., 2021). ~~However, the the uncertainties accuracy of in gap-~~
390 ~~filled~~ ds/dt estimates ~~from GRACE is are~~ still less known ~~than uncertainties in the initial estimates from GRACE and GRACE-~~
~~FO~~ (Boergens et al., 2022).

The uncertainty in ET estimated by this approach depends on the choice and data quality of other variables (e.g., precipitation
and river discharge) in the WB (Senay et al., 2011). Lehman et al. (2022) have compared the residual calculated from 1694
combinations of P , Q , and ET datasets with ds/dt derived from GRACE and found that none of these combinations can close
395 the WB in all tested basins. They also suggested that using some combinations of P , Q , and ET datasets cancels out their errors
in the GRACE-based WB. Because of the errors in the P , Q , and ds/dt components, studies that use WB-derived ET as a
reference to validate ET without accounting for uncertainties in the P , Q , and ds/dt components risk biased conclusions.

In order to account for errors in P , Q , and ds/dt , some researchers have tried to use multiple datasets (e.g., Weerasinghe et al.,
2020). Recently, Schoups and Nasser (2021) proposed treating uncertainties in datasets as unknown random variables. Instead
400 of using the WB to determine these uncertainties, they estimated ET (and other water fluxes) by combining WB constraints
and uncertainty estimation into a comprehensive probabilistic model. Although only applicable for river basins where GRACE
resolution is suitable, this could be a good direction for future research on these water fluxes.

4.2 Intercomparison

Intercomparison is the second most widely used method (~~195-212~~ out of ~~604-76~~ studies). In intercomparison, the RS-ET
405 estimates from multiple models are compared without assuming a superior one. This approach is mainly used to evaluate the
relative uncertainty of a model compared to others (~~155-170~~ out of ~~195-212~~ studies). Intercomparison has also been used to
evaluate other sources of uncertainty. For example, uncertainty from a change of spatial support can be evaluated by comparing
model outputs using different input upscaling methods (e.g., Ershadi et al., 2013; Sharma et al., 2016). Intercomparison has
also been used to evaluate uncertainty due to the choice of input datasets (e.g., Long et al., 2011; Wang et al., 2016; Badgley
410 et al., 2015).

Since the RS-ET datasets have both temporal and spatial dimensions, comparing RS-ET models or products is usually done
by aggregating over one or two dimensions (i.e., resampling to a lower resolution). The simplest method of intercomparison
involves aggregating ET estimates both temporally and spatially into one value (e.g., global annually averaged ET) and then
comparing this value from different models or products (e.g., Mueller et al., 2013; Pan et al., 2020). Other methods of
415 intercomparison involve comparing time series of spatially aggregated ET (e.g., monthly basin-scale ET). Aggregating over

one of the two spatial dimensions is sometimes applied (e.g., Pan et al., 2020; Chen et al., 2019). The time series can also be aggregated by land cover classes (e.g., Weerasinghe et al., 2020) or climate zones (e.g., Trambauer et al., 2013), describing how RS-ET uncertainty varies in different conditions. For spatial intercomparison, temporally aggregated RS-ET maps can be compared visually (e.g., Weerasinghe et al., 2020) or by using simple map algebra (e.g., Jung et al., 2019). Only a few studies have applied metrics to evaluate the spatial similarity between two datasets, such as the Spatial Efficiency metric (SPAEF) (Stisen et al., 2021; Jung et al., 2019) and the degree correlation measure of spherical harmonic coefficients (López et al., 2017). None of these methods can characterize uncertainty in RS-ET fully, thus, combining them would provide a more comprehensive intercomparison.

4.3 Sensitivity analysis and uncertainty propagation

Sensitivity analysis (SA) is the third most used approach in the reviewed literature, but is only applied in a small proportion of the reviewed studies (53-61 out of 60476 articles). Out of these, only 67 studies applied global sensitivity analysis (GSA). Sobol's (2001) method was applied to the parameters of the MODIS16 algorithm (Zhang et al., 2019), the TSEB model (Burchard-Levine et al., 2020), and three RS-ET models (PT-DTsR, MODIS16 algorithm, and PML) (Cao et al., 2021). This method was also applied to input variables of RS-ET models alone (e.g., Gomis-Cebolla et al., 2019). Elhag (2016) applied a similar variance-based sensitivity measure for the SEBS model but did not refer to Sobol's method. The Extended Fourier Amplitude Sensitivity Test (EFAST) has also been applied for GSA (García et al., 2013). This limited number of studies shows the application of GSA onto RS-ET models has been under-researched during the last decade, despite the importance of GSA in environmental modeling (Saltelli et al., 2021).

The majority of articles that applied sensitivity analysis (47-54 out of 6153) did not mention or apply a GSA method and thus, were considered to be local sensitivity analysis (LSA). In most of these studies, LSA was done by changing one parameter at a time (One-at-A-Time or OAT) and calculating the ratio of change in ET over change in parameter (e.g., Long et al., 2011). In the reviewed articles, the One-at-A-Time OAT method has been implemented differently in terms of three factors: 1) the selection of parameters for LSA according to their importance judged by the researchers, 2) the range of values over which parameters are allowed to vary, and 3) the calculation of sensitivity for specific land covers. This suggests that LSA is influenced by the subjectivity of the researchers.

4.4 Evaluation of input data

The uncertainties of key input datasets are sometimes evaluated by researchers in studies that assess uncertainty in RS-ET without explicitly being propagated to model outputs. This approach ranked fourth in the number of articles with 12-20 out of 60476. The key input datasets considered by researchers include air temperature, incoming shortwave radiation, incoming longwave radiation, wind speed, and land surface temperature (e.g., Vinukollu et al., 2011; Pardo et al., 2014; Peng et al., 2016; Li et al., 2017). Input datasets were evaluated through validation with their *in-situ* counterpart. Although other input datasets like Vegetation Indices are also important in RS-ET models, the *in-situ* measurements of these are often not available

for evaluation (Vinukollu et al., 2011). Some of the forcing datasets of RS-ET models are not remotely sensed data but are products from atmospheric data assimilation systems (e.g., Global Land Data Assimilation System (GLDAS) and ECMWF atmospheric reanalysis (ERA)), which are sometimes provided with uncertainty estimates from data providers. Evaluating the input data provides crucial *a priori* information for propagating uncertainty to ET estimates. Furthermore, even if uncertainty propagation is not conducted, these assessments can help to identify sources of uncertainty in RS-ET; as the saying goes, “garbage in, garbage out”.

4.5 Uncertainty propagation

Only 8 out of 676 articles applied the uncertainty propagation approach, mainly the Monte Carlo Methods (MCMs), to evaluate uncertainty in RS-ET. In MCMs, the model inputs are randomly sampled from their distributions and fed into the model to generate outputs repeatedly. The variance of the output distribution will then be considered the uncertainty in the model output (i.e., ET estimate) associated with the input variables. The limited application of uncertainty propagation can be attributed to its complexity and computational demand. Sensitivity analysis and uncertainty propagation are ideally carried out in tandem (Crosetto et al., 2001; Saltelli et al., 2019), but only 5 out of 8 articles combined these approaches. The uncertainty propagation approach was also used for investigations beyond uncertainty quantification. For example, Talsma et al. (2018) used MCM to determine the uncertainties in ET partitioning (i.e., soil evaporation, interception, and transpiration) in 3 RS-ET models (MOD16, PT-JPL, and GLEAM) due to the relative uncertainty in the key variables.

In the reviewed studies, uncertainty propagation was done only at one or a few fixed locations by assuming the probability distribution of the input variables, then simulating a range of ET values at these locations. This approach is computationally inexpensive but does not fully characterize uncertainties in a spatial field of ET. To fully quantify uncertainty in a scene, Cawse-Nicholson et al. (2020) introduced a method based on MCM and spatial-statistical models (Cressie, 1993). With this method, the probability distribution of ET per pixel in a satellite scene can be quantified and presented as percentile maps. This distribution was almost always non-Gaussian for all pixels in ET scenes, which means simple linear error propagation is not possible (Cawse-Nicholson et al., 2020). Future studies of RS-ET would benefit from the development of new methods to quantify uncertainty spatially.

4.6 Triple Collocation and Three-cornered hat method

The ~~Three-cornered~~ Cornered hat method (TCH) (Premoli et Tavella, 1994) and ~~triple~~ Triple collocation (TC) (Stoffelen, 1998; McColl et al., 2014) are related to the intercomparison approach in the sense that these techniques assess the relative uncertainty of three datasets without assuming one is the best. Therefore, these techniques are useful when there lacks a high-quality reference dataset. Both TC and TCH methods require a set of three datasets with the assumption that their errors are independent (Sjoberg et al., 2021). The difference between TCH and TC is that TC can only be used to assess uncertainties of uncorrelated datasets, while TCH can be used when there are correlations with proper constraints (Xu et al., 2019; Sjoberg et al., 2021). However, to date few studies have evaluated uncertainties in RS-ET using TC (Miralles et al., 2011b; Barraza

Formatted: Normal

480 Bernadas et al., 2017; Khan et al., 2018; and Kibria et al., 2021) and TCH (Long et al., 2014; Xu et al., 2019; and He et al.,
2020). The proportion of studies that used these methods is less than 52% of the total reviewed articles and is not increasing
(Figure 6). This low adoption might be attributed to the limitations of these methods: 1) the lack of information about biases
and only estimation of random errors (e.g., RMSE, standard deviation, or variances), 2) the required conditions to achieve
reliable error estimates (large samples, similar scales and magnitudes of errors between datasets) (Sjoberg et al., 2021), and 3)
485 the reliability of TCH as an alternative to direct validation (Wu et al., 2019b).

4.6.7 Physical consistency

Physical consistency can be understood as the plausibility that an ET estimate is consistent with the physical conditions or
characteristics of the area it represents. Consistency check or physical validation was proposed by Zeng et al. (2015) as the
final step in a general validation process for big remote sensing datasets. When there is limited reference data and ground-
490 based measurements, physical validation is critical to assess the quality of data products (Blatchford et al., 2020). Although
physical validation does not quantify uncertainty using metrics, it provides an evaluation of the data quality. This is useful to
identify the regions and conditions in which RS estimates are more uncertain and where more effort in direct validation
approaches is required.

Only 6 studies in the selected literature have attempted to quantify this plausibility (Figure 6), but they defined physical
consistency differently. For example, Rwasoka et al. (2011) used FAO Penman-Monteith potential ET estimates as a threshold
495 to decide whether ET estimates from the SEBS model were physically inconsistent. Blatchford et al. (2020) used the ET/P
ratio and water availability ($P-Q$) to evaluate the physical consistency of the WaPOR ET product. López et al., (2017)
developed a technique to assess the hydrological consistency of ET by transforming both ET and P data into spherical
harmonics and then using spherical harmonic coefficients to calculate the degree correlation. These studies are not the same
500 as validating RS-ET with $P-Q$ or $P-Q-dS/dt$ as discussed previously, since these residuals were not considered the best
reference of ET.

Another method to assess physical plausibility without explicit water balance is through the Budyko curve. The Budyko curve
describes the semi-empirical relationship between long-term ET and its limiting factors, i.e., precipitation and potential ET
(PET), for river basins (Budyko, 1974). Koppa et al., (2017) validated the physical consistency of ET by calculating the RMSE
505 of the Euclidean distance between the data points and the Budyko curve in ET/P and PET/P space. Weerasinghe et al., (2020)
simply calculated the mean difference (bias) between RS-ET and Budyko-derived ET to evaluate which RS-ET product
exceeds the energy and water limit defined by the Budyko curve. They also noticed that if a data point does not align with the
Budyko curve, it might also mean that the ET of the basin exceeds the water or energy limit, for example, due to human
activities. Therefore, the interpretation of physical plausibility needs to consider the actual knowledge about water resources
510 in the basin, instead of focusing only on model generated numbers.

4.7.8 Using Ensemble of RS-ET estimates

Intercomparison studies sometimes lead to ensemble-mean products of all available products, on the basis of the assumption that no model performs best, so an ensemble of them would be preferable (Bhattarai et al., 2019; Elnashar et al., 2021). This approach has been used the least in the reviewed articles (Figure 6). Some researchers have evaluated the uncertainty in an ensemble (a set) of RS-ET estimates from different models by calculating the average and range of all members in the ensemble (Vinukollu et al., 2011b; Elnashar et al., 2021; Guo et al., 2020). This approach is the same as the multi-model ensembles in climate modeling. The model structural uncertainty can only be quantified if independent models are sampled from the entire possible model space and avoid the over-representation of one model structure (Abramowitz and Gupta, 2008). For example, Vinukollu et al. (2011b) selected three RS-ET models, namely SEBS (Su, 2002), PM-Mu or MODIS16 (Mu et al., 2007), PT-Fi or PT-JPL (Fisher et al., 2008), which are based on distinct equations used to estimate ET.

The ensemble approach Using ensemble of RS-ET estimates provides uncertainties of the ensemble but not each individual member of the ensemble. Thus, some studies went further by merging the datasets of the ensemble and calculating the difference between this merged dataset with each ensemble member (Baik et al., 2018; Elnashar et al., 2021). If simply averaging all the ET products, the bias of different models can be canceled in regions where they perform differently but accumulated in regions where they perform in the same manner. Hence, the ensemble products may arguably produce better estimation in some areas (Yao et al., 2017), but not a better understanding of the physical processes and drivers needed to improve RS-ET (Yao et al., 2014; Zhang et al., 2016). Therefore, it is considered more useful to use the range of the ensemble to identify the outlier data products or the uncertainty of all data products.


5 Context of RS-ET uncertainty assessment

The context in which the uncertainty of RS-ET is assessed determines which method is selected and how it is applied. This context includes the objective of the RS-ET estimates, the spatial and temporal support at which ET is assessed, geographic location, and the availability of reference datasets. This section describes the context in which 604-676 reviewed articles assessed uncertainties in RS-ET.

5.1 Research Objectives of the reviewed articles

The review shows that uncertainties in RS-ET estimates were assessed at all stages, from developing a new model to evaluating its data product. Uncertainty in RS-ET was assessed in the context of model implementation (343% of reviewed articles), model development (4213% of all reviewed articles), model improvement (17%), model evaluation (19%), and product evaluation (4716%) (Figure 8). Here, model implementation means that a pre-existing model was applied to new case studies or to achieve some specific research objective without considerable modification or further development of the model. The prominence of model implementation as the main objective in the reviewed articles could be due to a perceived need to assess the uncertainty of RS-ET estimates for each application despite previous validation. This is an important attitude in the research

community since it helps to provide feedback on appropriate application, and improvement of RS-ET models. Therefore, studies in the context of model implementation should not be overlooked.

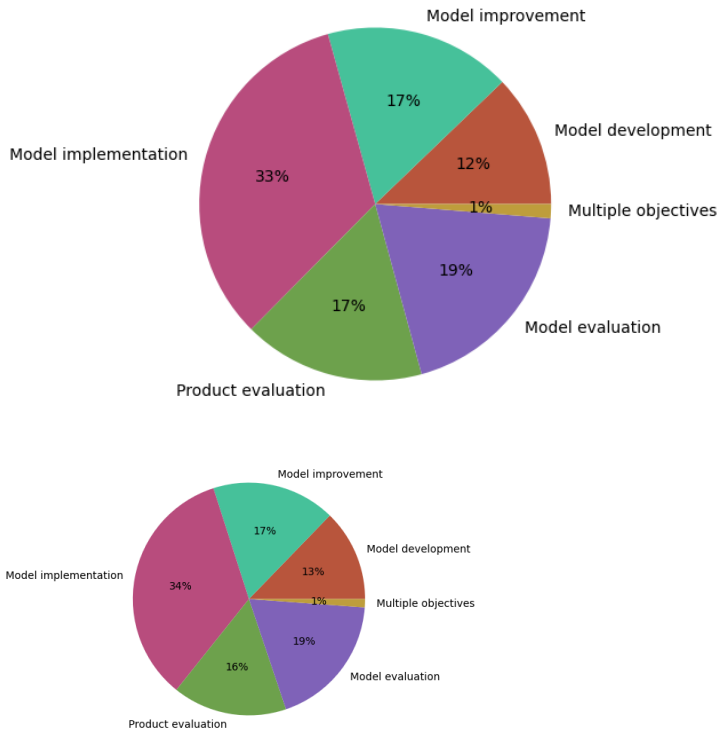



545 **Figure 8: Research objective of the reviewed articles (N=604676).**

5.2 Sources of uncertainty evaluated

550 The reviewed articles evaluated all sources of uncertainty as categorized in the theoretical framework (Figure 3), with strong focus on compound uncertainty. Figure 9 shows that the majority (360406 out of 604676) of reviewed articles assess only compound uncertainty without disaggregating into other sources. The second largest set of articles assessed both compound uncertainty and the relative uncertainty of RS-ET estimates. Other sources of uncertainty are remarkably less evaluated in the selected literature. According to the number of articles in each set (Figure 9), the level of interest in different sources of

uncertainty can be ranked as follows: compound, relative, input data, model parameterization, change of spatial support, change of temporal support, and finally gap filling. This does not necessarily show the ranking of importance of the uncertainty sources, but rather the availability of methods and data needed to assess them.

555

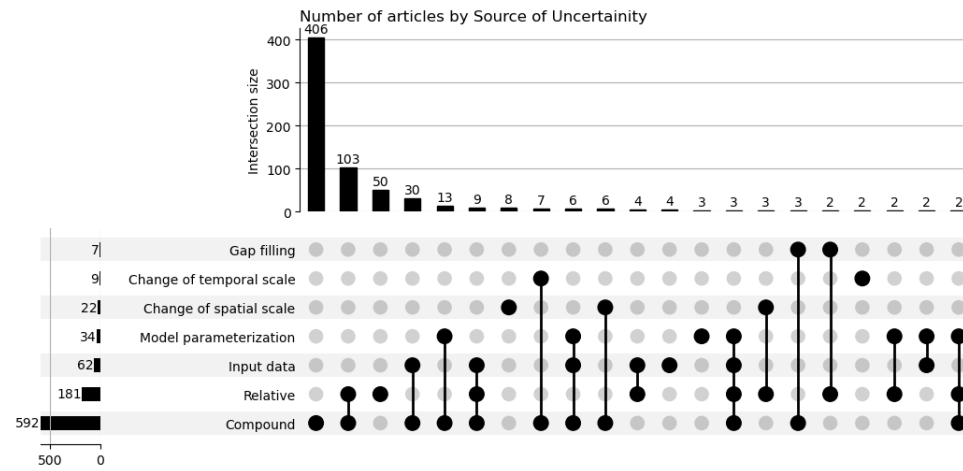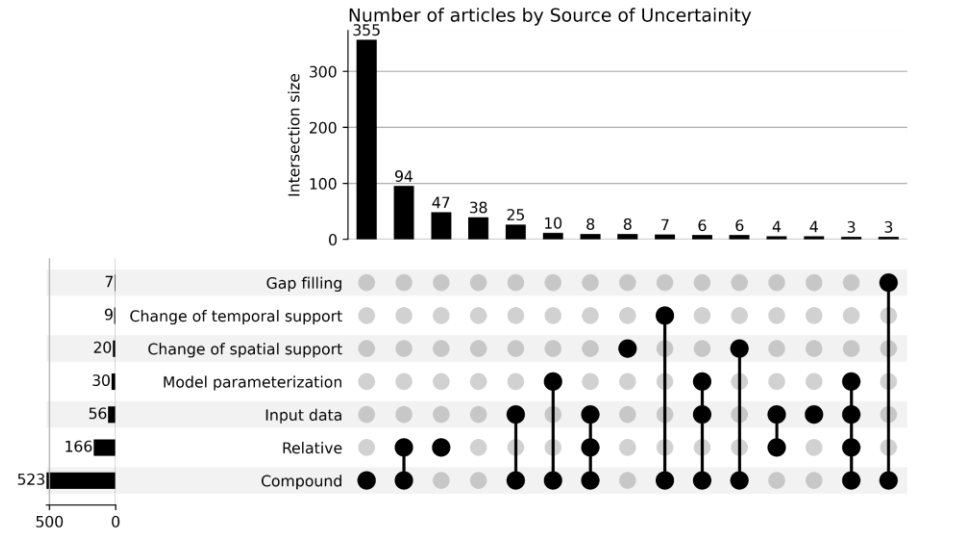

560 **Figure 9: The source of uncertainty assessed in reviewed articles (N=604676). The horizontal bar chart displays the number of articles assessing specific sources of uncertainty (categories), while the vertical bar chart represents article counts within the intersections of multiple categories. Each vertical bar corresponds to an intersection in the column beneath it. Black circles denote the categories on the respective rows present in the intersection, while gray circles signify categories absent from the intersection. Intersection with less than 3-2 articles were excluded from the graph for improved presentation.**

565 The uncertainties due to temporal upscaling are affected by several factors related to location (Jiang et al., 2021). These factors includes vegetation cover, soil moisture (Gentine et al., 2007, and Hoedjes et al., 2008), cloud coverage (as discussed in research by Van Niel et al., 2012), cloud frequency (as explored in studies by Xu et al., 2015), air pollution effects (as indicated in research by Zhang et al., 2013), the return interval of the satellite (Alfieri et al., 2017), the timing-of-overpass (Jiang et al., 2021), and the number of instantaneous values used for upscaling (Liu et al., 2021). Consequently, applying a single temporal upscaling method for the entire globe results in spatially varying uncertainties in RS-ET estimates.



570 5.3 Spatial and temporal support of uncertainty assessment

575 Uncertainties in RS-ET estimates are specific for different spatial and temporal supports. The reviewed studies evaluated RS-ET uncertainties at spatial supports ranging from less than 100 m up to global, and temporal support ranging from sub-daily to annual (Figure 10). Most studies evaluated RS-ET uncertainties at spatial supports of 500 m to 5 km (244-268 out of 60476) and less than 100 m (19164 out of 604676). This can be attributed to the availability of RS datasets that are widely used to estimate ET, such as MODIS (250 m to 1 km) and Landsat (30 m to 100 m). In the case of validation, the spatial support of uncertainty assessment was determined by the spatial support of the ground truth reference. For temporal support, uncertainty was mostly evaluated by daily ET (32865 out of 60476), although RS datasets provide observations at the time of satellite overpass with a temporal resolution of 5-16 days. ~~Thus, RS-ET models must estimate instantaneous ET and then upscale to daily ET, which is more useful in ET applications (e.g., irrigation monitoring).~~ This shows that the temporal support of uncertainty assessment is driven more by practical needs and less by the availability of datasets.

580

Formatted: Normal

Formatted: Space Before: 12 pt

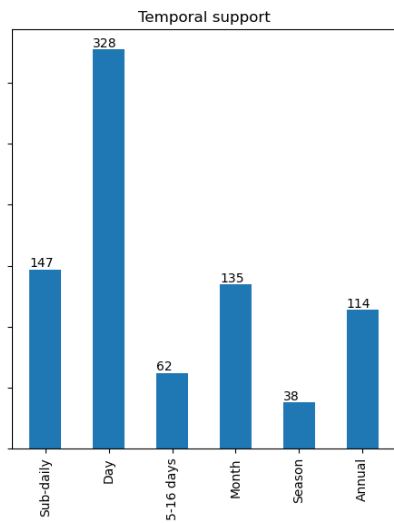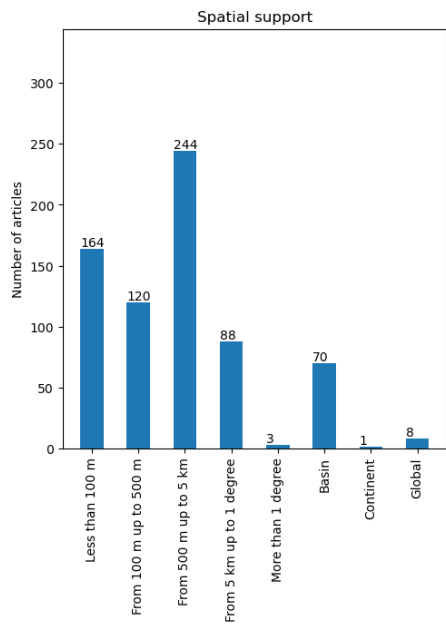


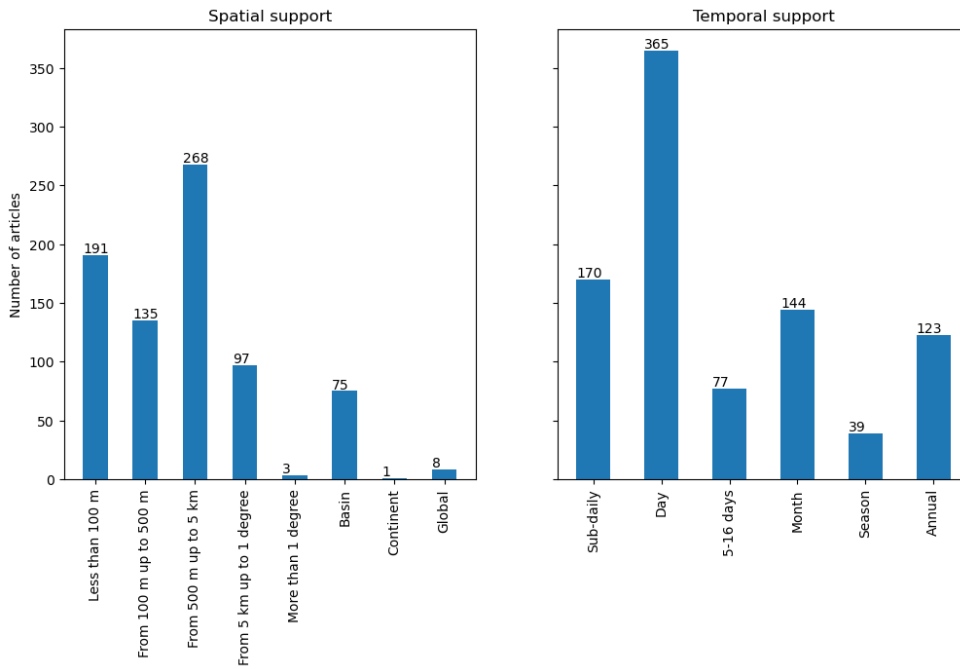


Figure 2010: Number of articles per range of spatial and temporal support at which uncertainty in RS-ET was assessed (total number of articles N=604676).

5.4 Geographical distribution

Assessment of RS-ET uncertainties is not evenly distributed over the globe. The number of articles per country where uncertainties in RS-ET were assessed is shown in Figure 11. Each article was tagged by the country where the sites of study is located. The highest number of articles assessed ET in China. Because the most common approach is validation and the most common reference used is EC measurements, ET was mainly assessed where there are EC stations (i.e., AmeriFlux, AsiaFlux, ChinaFlux, OzFlux, EuroFlux, FLUXNET). Even when the studies aimed to validate RS-ET globally, the estimated uncertainty is not universal since these networks do not cover many regions. These studies were also included in Figure 11.

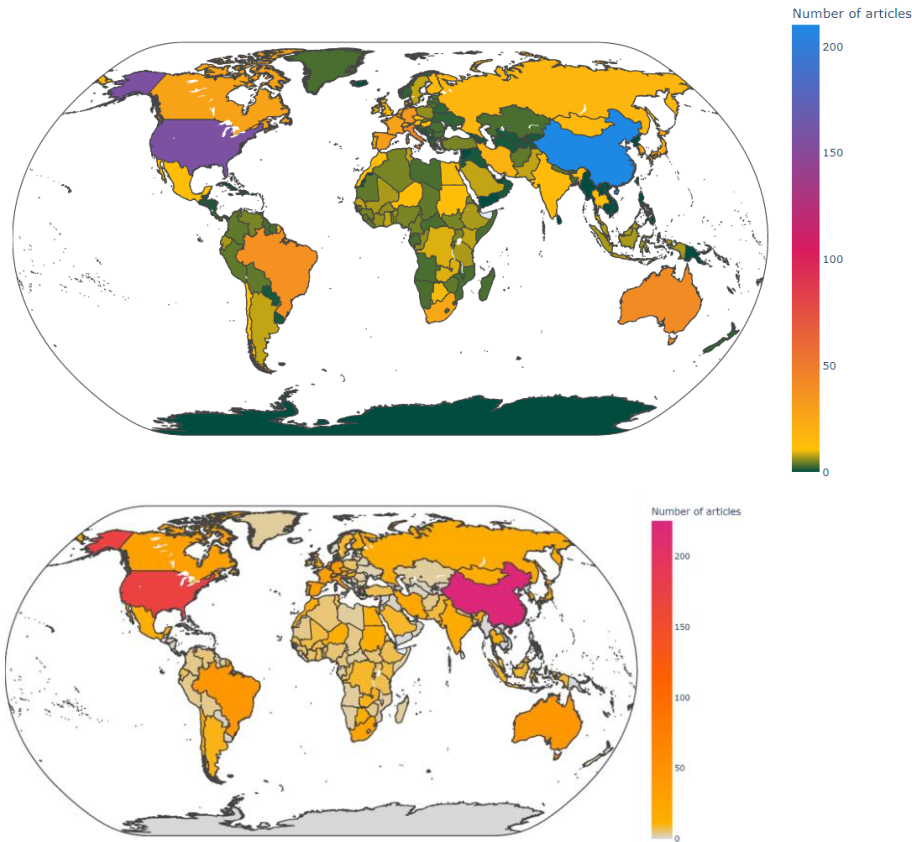

595 **Figure 11: Number of articles per country where uncertainties in RS-ET were assessed.**

Based on its popularity, EC can be considered the de facto standard ET estimation approach for validation of RS-ET. However, this popularity is mainly driven by the number of publications in countries where EC towers are more densely distributed (e.g., China and the United States of America). In countries where there are very few or no EC towers available, the most common reference used for validation of RS-ET is the water balance method (Figure 12). In a few countries in North Africa and the Middle East, the most common method is to use the FAO-56 method (Allen et al., 1998) in combination with crop coefficients to estimate ground-based references for validation (e.g., Egypt and Iran).

600

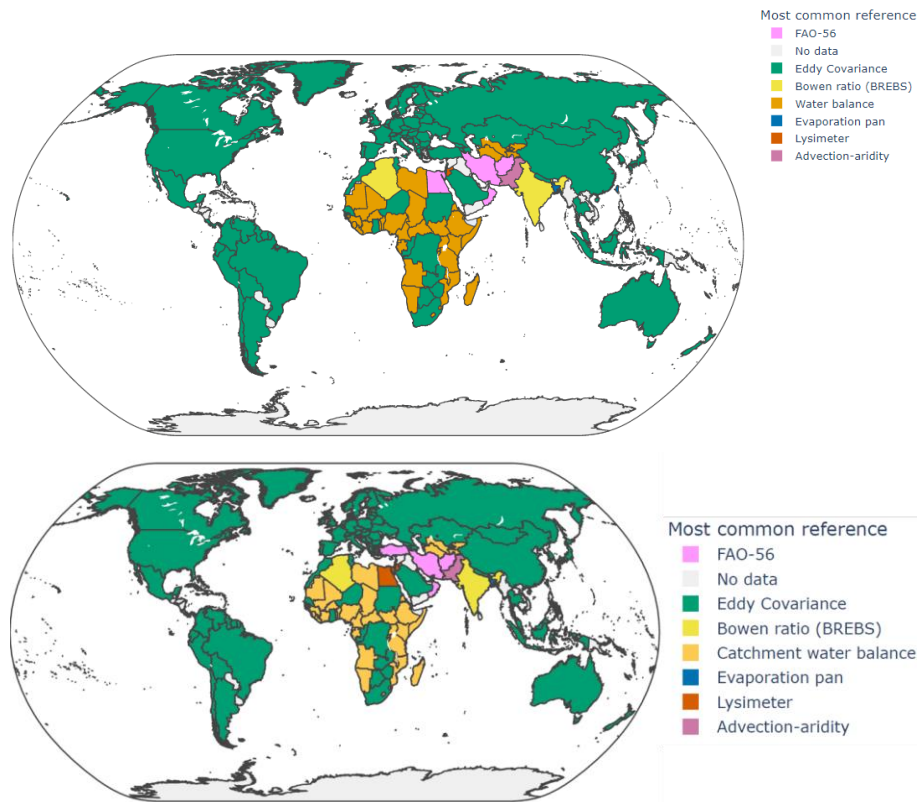


Figure 12: The most common reference used for validation of RS-ET per country.

605 6 Results of RS-ET uncertainty assessment

6.1 Uses of uncertainty metrics

The reviewed articles that assess uncertainty in RS-ET mainly report accuracy (RMSE), bias (mean error), and the goodness-of-fit with a reference dataset (R^2) (Figure 13). Although quantifiable uncertainty in measurement is theoretically represented as a probability distribution, this has rarely been done in the literature. The reviewed studies used a wide range of metrics to report their uncertainty assessment (33 metrics). Most studies used three metrics, while some used up to twelve. Larger number of metrics provide more description of uncertainty, but some metrics might be challenging to interpret.

610

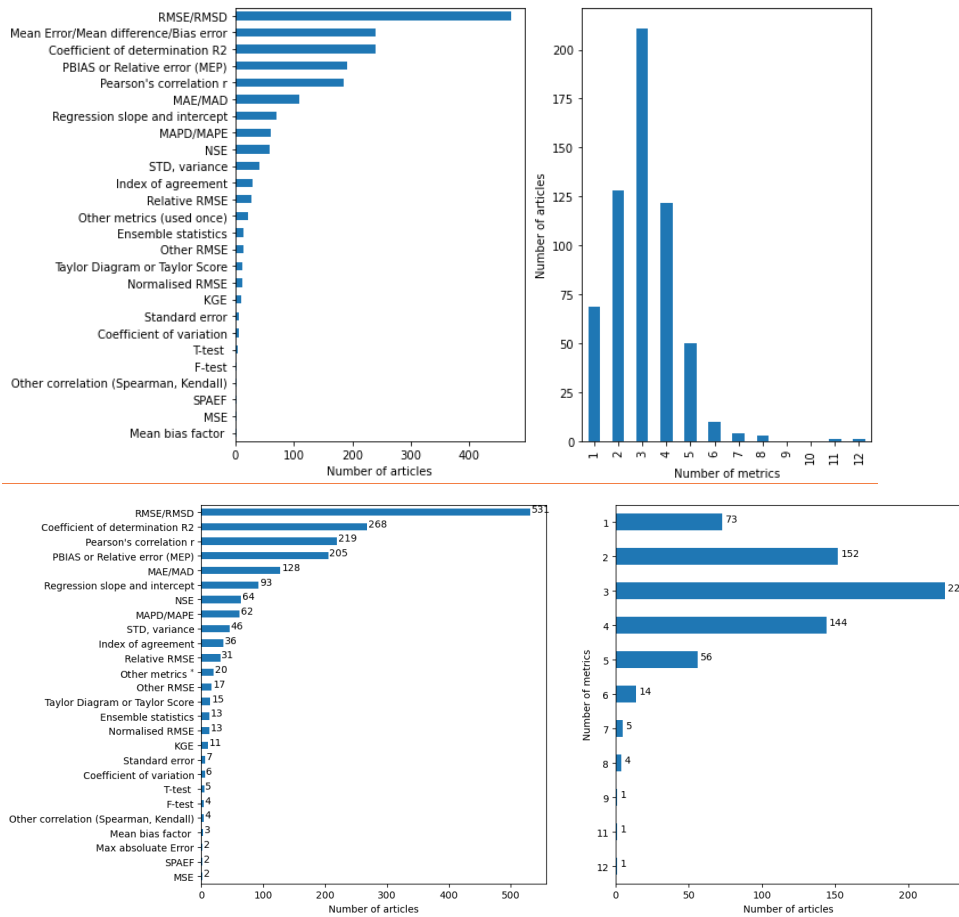


Figure 13: Number of studies per choice of metric to report uncertainty and the number of metrics used.

615 Root Mean Square Error (RMSE) is the most widely used metric in the reviewed articles (467-531 out of 604-76 articles). Metrics related to RMSE include normalized RMSE (normalized by standard deviation) and relative RMSE (as a percentage of mean ET). Very few studies (13-17 articles) used modified RMSE to report more robust results and few consider random error and systematic error, such as robust RMSE (Bisquet et al., 2016), systematic and unsystematic RMSE (Yebra et al.,

2013), biased and unbiased RMSE (Martens et al. 2017). RMSE has the unit of the estimates, so it can be expressed in mm for ET or Wm^{-2} for latent heat flux. Therefore, to compare reported RMSE between different studies, unit conversion is needed.

Inconsistent use of metrics such as R^2 might cause misinterpretation of results, especially when comparing studies. For example, the second most used evaluation metric was referred to using many names including mean error, mean difference, bias error, or bias. Meanwhile, the coefficient of determination (R^2) has the opposite issue, in which the same term was used with different formulas. R^2 is a measure of goodness-of-fit for regression models. There are at least 8 formulas for R^2 in the literature (Kvålseth, 1985), but only one formula can be used for any type of model fitting (i.e., R_1^2 in Kvålseth, 1985). Since many studies did not report which formula they used, we did not distinguish between different R^2 formulas in Figure 13. Nevertheless, we observed that at least four different formulas of R^2 were used in the reviewed articles including the squared coefficient of correlation (Table S4 in Supplementary Information).

No matter which metrics are used, the validation metrics that compare estimate with reference only represent actual error if the reference is the absolute truth. This is never the case because *in-situ* measurements and upscaling methods are never perfect. Wu et al. (2019a) suggested that validation should be performed in conjunction with uncertainty associated with *in-situ* measurements and the statistical significance of performance metrics.

6.2 Synthesizing reported RS-ET uncertainty from reviewed studies

Although there are a large number of papers assessing uncertainty of RS-ET data, only a few attempted to synthesize their results. For example, a review by Karimi and Bastiaanssen (2015) used meta-analysis (i.e., using statistical methods to synthesize results of independent studies) to estimate the probability density function of mean absolute percentage error (MAPE) in 46 studies that validate RS-ET estimates in seasonal cycles. Kalma et al. (2008) summarized the relative error and RMSE of RS-ET reported in 30 studies. These syntheses are limited in number of studies (<50) and the selection of studies were not systematic. Another limitation of synthesizing these results is that the selected studies used different validation data and field instruments, which do not have equivalent spatial support and accuracy.

Synthesizing results of the reviewed articles in this study will provide a useful reference for future studies to evaluate the results of RS-ET uncertainty assessment. For a meta-analysis, selected studies should use the same validation data and report the same metric, thus, we selected the most used validation data and metric. Since the majority of studies used EC flux towers and RMSE to report uncertainty (337-372 out of 604-676), we selected these studies for meta-analysis of reported RS-ET uncertainty. From 337-372 articles, 318-48 articles that reported RMSE of RS-ET from validation with EC flux tower were included. The remainder were excluded because the RMSE was not reported in figures with extractable values (Figure 4). RMSE values in units other than mm/day were converted to mm/day assuming constant rate of ET over the temporal support. For example, 365 mm/year was converted to 1 mm/day and 0.1 mm/hour was converted to 2.4 mm/day.

Formatted: Space Before: 12 pt

Formatted: Space Before: 12 pt

The reported RMSE values for daily ET (N = 23,407,167) range from 0.01 to 6.65 mm/day with the mean value of 1.128 mm/day (Table 34), which is comparable with RMSE previously reported by Kalma et al. (2008). When converting RMSE values from the reported unit to a common unit of mm/day, the mean RMSE is the highest for validation of instantaneous RS-ET (2.81 mm/day) and the lowest for monthly (0.5078 mm/day). In general, studies with larger temporal support of validation have lower mean RMSE in mm/day. For the validation at temporal support of 3-hour, 10-day, and week, less can be concluded due to small number of studies and records. Overall, the decrease of RMSE with increasing temporal support is due to the averaging and corrective effect of temporal upscaling. Therefore, improving temporal upscaling and gap-filling methods are crucial for reducing uncertainty in RS-ET estimates.


Table 34: Descriptive statistics of reported RMSE values (in mm/day) in reviewed articles (N=347,348) with validation of RS-ET with EC flux towers.


Temporal support	Number of records	median	mean	standard deviation	min	25th percentile	75th percentile	max
instantaneous	680703	0.932-64	2.812-81	1.461-47	0.200-20	1.671-65	3.613-62	8.638-63
30-min	130	1.591-58	1.661-66	0.800-80	0.160-16	0.100-99	2.162-16	4.134-13
hour	449135	0.620-56	1.030-88	1.030-97	0.160-16	0.400-35	1.291-14	6.005-99
3-hour	18	2.482-48	2.582-58	0.800-80	1.441-44	1.921-92	3.113-11	4.544-54
day	24073167	0.930-94	1.181-12	0.820-71	0.010-01	0.700-71	1.301-27	6.656-65
week	43237	0.760-63	0.820-49	0.350-29	0.020-02	0.580-17	1.000-71	2.610-81
8-day	454528	0.750-75	0.870-88	0.470-48	0.020-04	0.560-56	1.101-11	3.403-40
10-day	1522	0.930-90	1.041-04	0.430-46	0.40-40	0.80-80	1.181-16	2.202-20
16-day	5353	0.490-49	0.500-50	0.140-14	0.220-22	0.400-40	0.620-62	0.890-89
month	469499	0.620-60	0.820-74	0.350-53	0.020-03	0.580-38	1.000-97	2.64-96
year	7171	0.830-83	0.800-80	0.310-31	0.150-15	0.610-61	1.021-02	1.491-49
overall	44295563	0.970-95	1.311-31	1.071-06	0.010-01	0.670-67	1.501-49	8.63

Formatted Table

Figure 14 shows that very high RMSE values were mainly from validation approaches that used a single EC site. Validation based on using data from a large-greater number of EC sites are more likely to result in yield lower RMSE values. This might be attributed to the fact that when papers only report average RMSE values across multiple EC sites, the average RMSE is lower than the highest individual RMSE. Moreover, the random errors at each site are likely to be uncorrelated or partially cancel each other out when averaging them and further reduces the overall RMSE. As RMSE is inherently dependent on the scale of ET, sites with lower ET values or the practice of averaging ET across multiple sites are more likely to exhibit lower average RMSE values. Unfortunately, only a limited number of studies provided information on relative RMSE or the average ET corresponding to RMSE values, which hindered the derivation of scale-independent RMSE values across all studies.

670 As shown in this study, the distribution of validation sites is concentrated in regions where EC flux towers are available. The results of the validation, thus, are not necessarily transferable to other areas because the control factors of ET and uncertainty in their estimates are not the same globally (Zhang et al., 2016). As the distribution of validation sites is concentrated in regions where EC flux towers are available (Figure 12), the results of the validation, thus, are not necessarily transferable to other areas. Therefore, when interpreting the uncertainty of RS-ET based on validation, we should consider the validation metrics at each site individually and the variation of these metrics among all locations.

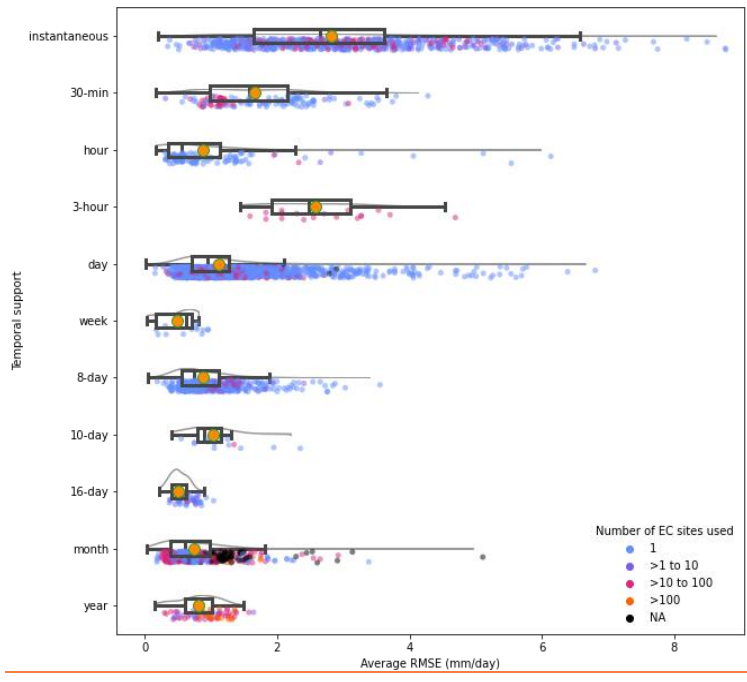

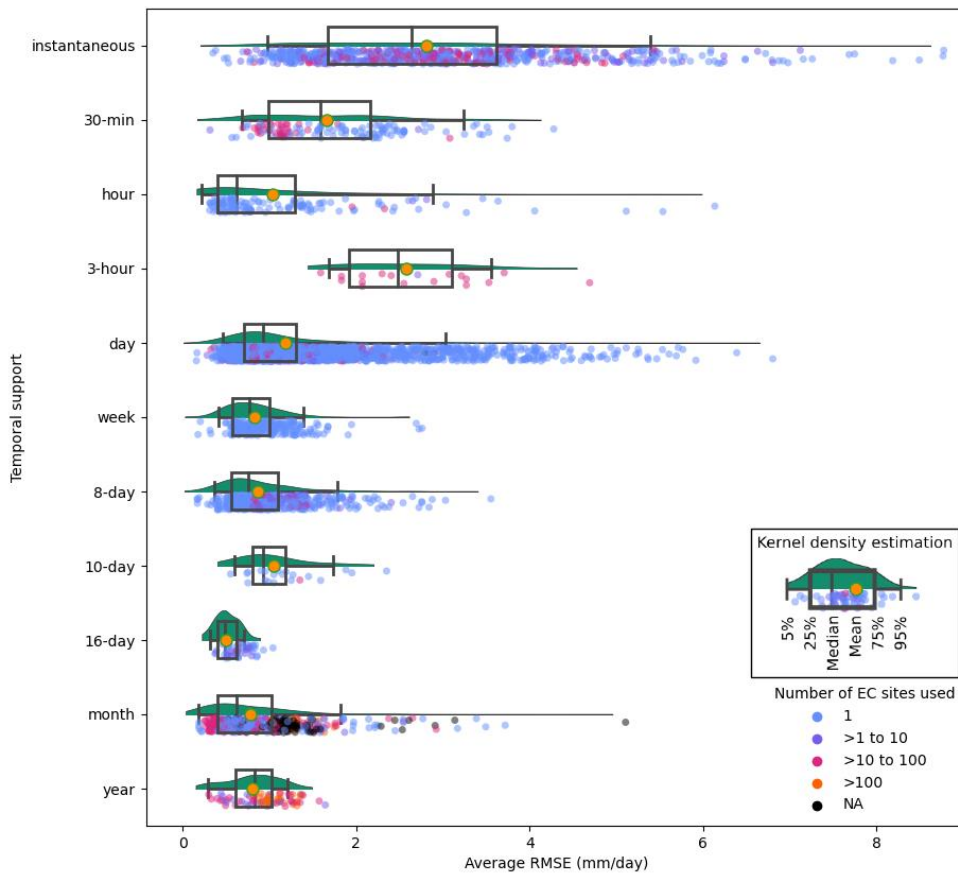

675

Figure 14: RMSE (mm/day) of RS-ET based on validation with Eddy Covariance (EC) observations in reviewed articles (N= 31487). Each The scattered dots represents one RMSE values reported in articles. The dot color shows the number of EC sites used in validation. The green area under the curve represents the kernel density estimation of the underlying probability distribution. The box-and-whisker plot represents 5th, 25th, 50th (median), 75th, and 95th percentiles of the distribution. The orange circle inside the box-and-whisker plot represents mean value.

680

The large range of RMSE obtained from the meta-analysis can be explained by the diversity of reviewed studies in terms of models, resampling methods, and validation context (e.g., temporal scales, land cover, climate, amount of data). For example, some studies validate RS-ET estimates from global products, while others validate RS-ET estimates from models that were

calibrated to reduce RMSE. Moreover, many studies reported RMSE of latent heat flux (in Wm^{-2} or $\text{MJm}^{-2}\text{day}^{-1}$) averaged from estimates at the time of satellite overpass. The accuracy of RS-ET varies at different times of the day due to weather condition, and is, thus, not representative of the entire day. We converted these values to mm/day (Table 34) only for comparison between different temporal supports. The range of RMSE presented in Figure 14 and Table 3 should only be considered as a baseline for typical error in RS-ET. Using only RMSE to compare RS-ET model performance across different studies or validation sites is not recommended.

Formatted: Superscript

Formatted: Superscript

Formatted: Superscript

7. Summary

This paper identifies and appraises methods for uncertainty assessment of RS-ET estimates. ~~We applied by applying the~~ systematic quantitative literature review (SQLR) approach ~~to identify the number of original research papers in distinct categories of studies, which includes scale, region, source of uncertainty, and method.~~ The majority of reviewed articles assess uncertainty in RS-ET estimates by validation against EC measurements. In regions where *in-situ* measurements are limited, most studies used the residual of the water balance as a reference for validation. Making use of existing EC networks is important for global validation of RS-ET estimates. However, there is still a gap in the availability of *in-situ* data for global validation, as most are concentrated in North America, East Asia, and Europe. Moreover, the challenges in energy balance closure and scale mismatch persists ~~through the~~ reviewed studies. The future of RS-ET is geared toward enhancing spatiotemporal resolutions (Fisher et al., 2017) thanks to progresses in thermal infrared missions (e.g., ECOSTRESS, LSTM, SBG, TRISHNA, and Hydrosat), along with the development of small satellite constellations (e.g., Landsat Next and Copernicus Contributing Missions). Consequently, there is a need for methods to resample *in-situ* measurements to the spatiotemporal resolution of these satellite systems to assess uncertainties of RS-ET data derived from these sources. ~~In regions where *in-situ* measurements are limited, most studies used the residual of the water balance as a reference for validation.~~

Formatted: Space Before: 12 pt

Since the uncertainty in RS-ET in literature is most often reported in terms of the RMSE of RS-ET estimates compared to EC observations, The uncertainties of RS-ET are not easy to quantify and characterize in a single study. Future research should combine local and global evaluation efforts. Combining multiple approaches for uncertainty assessment of spatiotemporal RS-ET data is recommended due to limitations of validation datasets. Approaches other than direct validation includes intercomparison, sensitivity analysis, uncertainty propagation, physical consistency check, evaluation of input, triple collocation, and the ensemble of estimates. Both sensitivity analysis and uncertainty propagation approaches were shown to be useful for the advancement of RS-ET techniques by identifying and quantifying the sources of uncertainty. However, applying uncertainty and sensitivity analysis approaches to remote sensing retrieval models over a large spatial extent is computationally demanding. We showed in our review that there are very few studies that applied sensitivity analysis and uncertainty propagation techniques for RS-ET estimates and that their methods are limited to less computationally demanding options. This impedes the ability to assess a detailed spatiotemporal distribution of RS-ET uncertainty. Therefore, future

715 research on uncertainty in RS-ET estimates needs to develop and apply more advanced sensitivity analysis and uncertainty propagation methods.

720 ~~As the majority of reviewed articles used validation, we~~ provide the typical range of uncertainty in RS-ET based on a meta-analysis of 317 articles that reported this metric uncertainty in RS-ET as the RMSE compared to EC observations. The RMSE range reported in our study can be used in future research to compare and evaluate results with the majority of validation studies. RMSE varies a lot among validation sites and temporal supports studies due to different models, resampling methods, and site conditions. Moreover, validation with ~~more than multiple one station sites~~ reported lower ~~value average~~ and smaller variation of RMSE than validation at single site. ~~Therefore, validation metrics only reflect uncertainty of RS-ET at specific locations. While RMSE stands as the most commonly employed metric in the literature, it is unsuitable for comparing uncertainties in RS-ET across different studies due to its inherent scale-dependency. Therefore, validation metrics only reflect uncertainty of RS-ET at specific locations. The RMSE range reported in our study should be only used as a baseline for future studies that validate RS-ET estimates using EC.~~

730 Comparing performance of RS-ET models and investigating the sources and geographical distribution of uncertainty in their ET estimates remains an important research for many applications. Global assessments provide a broad perspective on RS-ET uncertainties by considering factors that affect data quality on a large scale, such as satellite sensor characteristics, model characteristics, geographical and climatic factors. Local assessments, on the other hand, focus on specific study areas, which may have unique conditions and sources of uncertainty that are overlooked in global assessments. Therefore, future research should combine local and global evaluation efforts.

735 For ~~future researches that validate~~ validation of RS-ET estimates with *in-situ* methods, we provide specific recommendations:

- ~~The uncertainty of the reference datasets, including correction for surface energy balance closure, should be~~ evaluated and reported.
- ~~RS-ET estimates should be converted to values at the temporal and spatial scale of reference datasets. Temporal and spatial support of reference datasets should be matched as much as possible to that of the RS-ET estimates.~~
- ~~Multiple metrics should be used to better characterize uncertainties in RS-ET estimates.~~
- ~~The four common metrics (RMSE, bias/mean error, correlation coefficient, coefficient of determination) and, mean ET, the number of data points, and statistical significance test should be reported in validation studies.~~
- ~~The statistical significance of validation metrics should be tested and the number of data points used should be reported.~~
- ~~In addition, uncertainties in RS-ET estimates should be characterized using multiple metrics that are scale-independent to facilitate comparison of RS-ET uncertainty across regions with different ET ranges.~~

Formatted: List Paragraph, Bulleted + Level: 1 + Aligned at: 0.63 cm + Indent at: 1.27 cm

Formatted: Indent: Left: 0.63 cm, First line: 0 cm

Formatted: List Paragraph, Bulleted + Level: 1 + Aligned at: 0.63 cm + Indent at: 1.27 cm

- Validation of RS-ET models and data products should be reported at different levels of spatial and temporal scales, covering multiple locations.

Formatted: Bulleted + Level: 1 + Aligned at: 0.63 cm + Indent at: 1.27 cm

750 We recommend combining multiple approaches for uncertainty assessment of spatiotemporal RS-ET data when validation datasets are limited. These approaches include intercomparison, sensitivity analysis, uncertainty propagation, physical consistency check, evaluation of input, triple collocation, and the ensemble of estimates. Both sensitivity analysis and uncertainty propagation approaches were shown to be useful for the advancement of RS-ET techniques by identifying and quantifying the sources of uncertainty. However, our review shows that there are very few studies that applied sensitivity analysis and uncertainty propagation techniques for RS-ET estimates and that most studies employed less computationally demanding options. This impedes the ability to assess a detailed spatiotemporal distribution of RS-ET uncertainty. Therefore, future research on uncertainty in RS-ET estimates needs to develop or apply more advanced sensitivity analysis and uncertainty propagation methods.

- ~~Validation results should be reported at various levels of spatial and temporal support and at multiple locations with different characteristics~~
- ~~The statistical significance of validation metrics should be tested and the number of data points used should be reported.~~

Formatted: Indent: Left: 0 cm, First line: 0 cm

765 Since uncertainty in RS-ET is an attribute of any spatiotemporal dataset, the remaining challenge is to characterize uncertainty spatially and temporally. This means not only quantifying the overall expected errors of the dataset but also identifying where and when high uncertainty is most likely to occur. Several studies have aimed to offer spatially explicit uncertainty in thematic classification, such as land cover and soil type. These studies, like the ones mentioned by Woodcock (2002), have primarily focused on qualitative mapping techniques. However, for quantitative remote sensing, which involves mapping continuous variables like ET, there is a need for methods that can effectively characterize spatially explicit uncertainty. Therefore, we strongly recommend the development and application of methods to evaluate spatiotemporal uncertainty in RS-ET datasets. Several studies in remote sensing have attempted to provide spatially explicit uncertainty of thematic classification (e.g. land cover, soil type), such as the studies listed by Woodcock (2002). For quantitative remote sensing, which is the mapping of continuous variables like ET, methods to characterize spatially explicit uncertainty are desirable but have not been developed as much as thematic mapping (e.g. pattern recognition, feature extraction). Therefore, we recommend that methods that evaluate spatiotemporal uncertainty need to be developed and applied to RS-ET datasets.

Formatted: Space Before: 12 pt

Data availability

775 The systematic categorization and analysis of the reviewed articles are available at <https://doi.org/10.4121/797dcaff-56e3-45ae-a931-f6f4a3135d26.v1+2>

The reported RMSE data from the reviewed articles that used Eddy Covariance to validate Remote Sensing-based estimates of Evapotranspiration are available at <https://doi.org/10.4121/e6e1713a-0c2b-4775-a7f4-9e6e0b2cf40f.v42>

Author contribution

780 BT and JvdK conceptualized the review approach; BT, JvdK, SS, MM, and GJ designed the methodology; BT collected and categorized literature; BT and MM conducted data collection for meta-analysis; BT analyzed the data; BT and SS visualized the results; BT wrote the manuscript draft; BT, JvdK, SS, MM, GJ, and RU reviewed and edited the manuscript; GJ, MM and RU supervised the research activities; MM acquired funding and managed the project.

Competing interests

785 One of the authors is a member of the editorial board of Hydrology and Earth System Sciences.

Financial support

This work was supported by the Ministry of Foreign Affairs of the Netherlands through the project “Monitoring land and water productivity by Remote Sensing (WaPOR phase 2) project” (GCP/INT/729/NET).

790 **Acknowledgement**

[This manuscript was improved with comments and suggestions from Joshua B. Fisher and two anonymous reviewers. We also thank Claire I. Michailovsky for the discussions that led to many improvements of the manuscript.](#)

References

- Abramowitz, G. and Gupta, H.: Toward a model space and model independence metric. Geophys. Res. Lett., 35(5).
795 <https://doi.org/10.1029/2007GL032834>, 2008.
- Allen, R. G., Pereira, L. S., Howell, T. A., & Jensen, M. E.: Evapotranspiration information reporting: I. Factors governing measurement accuracy. Agr. Water Manage., 98(6), 899-920. <https://doi.org/10.1016/j.agwat.2010.12.015>, 2011a.
- Allen, R. G., Pereira, L. S., Howell, T. A., & Jensen, M. E.: Evapotranspiration information reporting: II. Recommended documentation. Agr. Water Manage., 98(6), 921-929. <https://doi.org/10.1016/j.agwat.2010.12.016>, 2011b.
- 800 Allen, R.G., Pereira, L.S., Raes, D. and Smith, M.: Crop evapotranspiration - Guidelines for computing crop water requirements-FAO Irrigation and drainage paper 56. Fao, Rome, 300(9), p.D05109. <https://www.fao.org/3/x0490e/x0490e00.htm>, 1998.

- Allen, R.G., Tasumi, M., Trezza, R.: Satellite-Based Energy Balance for Mapping Evapotranspiration with Internalized Calibration (METRIC)—Model. *J. Irrig. Drain. Eng.* 133, 380–394. [https://doi.org/10.1061/\(ASCE\)0733-9437\(2007\)133:4\(380\)](https://doi.org/10.1061/(ASCE)0733-9437(2007)133:4(380)), 2007.
- 805 Anderson, M.C., Kustas, W.P., Norman, J.M., Hain, C.R., Mecikalski, J.R., Schultz, L., González-Dugo, M.P., Cammalleri, C., d’Urso, G., Pimstein, A., Gao, F.: Mapping daily evapotranspiration at field to continental scales using geostationary and polar orbiting satellite imagery. *Hydrol. Earth. Syst. Sci.* 15, 223–239. <https://doi.org/10.5194/hess-15-223-2011>, 2011.
- 810 Badgley, G., Fisher, J.B., Jiménez, C., Tu, K.P. and Vinukollu, R.: On uncertainty in global terrestrial evapotranspiration estimates from choice of input forcing datasets. *J. Hydrometeorol.*, 16(4), pp.1449-1455. <https://doi.org/10.1175/JHM-D-14-0040.1>, 2015.
- Baik, J., Liaqat, U.W. and Choi, M.: Assessment of satellite-and reanalysis-based evapotranspiration products with two blending approaches over the complex landscapes and climates of Australia. *Agr. Forest Meteorol.*, 263, pp.388-398. <https://doi.org/10.1016/j.agrformet.2018.09.007>, 2018.
- 815 Baldocchi, D., Falge, E., Gu, L., Olson, R., Hollinger, D., Running, S., Anthoni, P., Bernhofer, C., Davis, K., Evans, R., Fuentes, J., Goldstein, A., Katul, G., Law, B., Lee, X., Malhi, Y., Meyers, T., Munger, W., Oechel, W., U, K.T.P., Pilegaard, K., Schmid, H.P., Valentini, R., Verma, S., Vesala, T., Wilson, K., Wofsy, S.: FLUXNET: A New Tool to Study the Temporal and Spatial Variability of Ecosystem-Scale Carbon Dioxide, Water Vapor, and Energy Flux Densities. *Bull. Am. Meteorol. Soc.* 82, 2415–2434. [https://doi.org/10.1175/1520-0477\(2001\)082<2415:FANTTS>2.3.CO;2](https://doi.org/10.1175/1520-0477(2001)082<2415:FANTTS>2.3.CO;2), 2001.
- 820 Bambach, N., Kustas, W., Alfieri, J., Prueger, J., Hipps, L., McKee, L., Castro, S.J., Volk, J., Alsina, M.M., McElrone, A.J.: Evapotranspiration uncertainty at micrometeorological scales: the impact of the eddy covariance energy imbalance and correction methods. *Irrig. Sci.* <https://doi.org/10.1007/s00271-022-00783-1>, 2022.
- Barraza Bernadas, V., Grings, F., Restrepo-Coupe, N. and Huete, A.: Comparison of the performance of latent heat flux products over southern hemisphere forest ecosystems: estimating latent heat flux error structure using in situ measurements and the triple collocation method. *Int. J. Remote Sens.*, 39(19), pp.6300-6315. <https://doi.org/10.1080/01431161.2018.1458348>, 2018.
- 825 Bastiaanssen, W.G.M., Menenti, M., Feddes, R.A., Holtslag, A.A.M.: A remote sensing surface energy balance algorithm for land (SEBAL). 1. Formulation. *J. Hydrol.* 212–213, 198–212. [https://doi.org/10.1016/S0022-1694\(98\)00253-4](https://doi.org/10.1016/S0022-1694(98)00253-4), 1998.
- 830 Bayat, B., Camacho, F., Nickeson, J., Cosh, M., Bolten, J., Vereecken, H., Montzka, C.: Toward operational validation systems for global satellite-based terrestrial essential climate variables. *Int. J. Appl. Earth Obs. Geoinf.* 95, 102240. <https://doi.org/10.1016/j.jag.2020.102240>, 2021.
- Bellocchi, G., Rivington, M., Donatelli, M., Matthews, K.: Validation of Biophysical Models: Issues and Methodologies, in: Lichtfouse, E., Hamelin, M., Navarrete, M., Debaeke, P. (Eds.), *Sustainable Agriculture Volume 2*. Springer Netherlands, Dordrecht, pp. 577–603. https://doi.org/10.1007/978-94-007-0394-0_26, 2011.
- 835 Beven, K.: Facets of uncertainty: epistemic uncertainty, non-stationarity, likelihood, hypothesis testing, and communication. *Hydrol. Sci. J.* 61, 1652–1665. <https://doi.org/10.1080/02626667.2015.1031761>, 2016.

- Bielecka, E., Burek, E.: Spatial data quality and uncertainty publication patterns and trends by bibliometric analysis. *Open Geosci.* 11, 219–235. <https://doi.org/10.1515/geo-2019-0018>, 2019.
- 840 Bisquert, M., Sánchez, J.M., López-Urrea, R. and Caselles, V.: Estimating high resolution evapotranspiration from disaggregated thermal images. *Remote sensing of environment*, 187, pp.423-433, 2016.
- Budyko, M.I.: *Climate and life*. Academic press, 1974.
- Burchard-Levine, V., Nieto, H., Riaño, D., Migliavacca, M., El-Madany, T.S., Perez-Priego, O., Carrara, A. and Martín, M.P.: Seasonal adaptation of the thermal-based two-source energy balance model for estimating evapotranspiration in a semiarid tree-grass ecosystem. *Remote Sensing*, 12(6), p.904, 2020.
- 845 Cao, M., Wang, W., Xing, W., Wei, J., Chen, X., Li, J. and Shao, Q. Multiple sources of uncertainties in satellite retrieval of terrestrial actual evapotranspiration. *J. Hydrol.*, 601, p.126642. <https://doi.org/10.1016/j.jhydrol.2021.126642>, 2021.
- Cawse-Nicholson, K., Braverman, A., Kang, E.L., Li, M., Johnson, M., Halverson, G., Anderson, M., Hain, C., Gunson, M. and Hook, S.: Sensitivity and uncertainty quantification for the ECOSTRESS evapotranspiration algorithm—DisALEXI. *Int. J. Appl. Earth Obs. Geoinf.*, 89, p.102088, 2020.
- 850 Chen, J.M., Liu, J.: Evolution of evapotranspiration models using thermal and shortwave remote sensing data. *Remote Sensing of Environment* 237, 111594. <https://doi.org/10.1016/j.rse.2019.111594>, 2020.
- Chen, X., Su, Z., Ma, Y. and Middleton, E.M.: Optimization of a remote sensing energy balance method over different canopy applied at global scale. *Agr. Forest Meteorol.*, 279, p.107633. <https://doi.org/10.1016/j.agrformet.2019.107633>, 2019.
- 855 Chen, Y., Xia, J., Liang, S., Feng, J., Fisher, J.B., Li, X., Li, Xianglan, Liu, S., Ma, Z., Miyata, A., Mu, Q., Sun, L., Tang, J., Wang, K., Wen, J., Xue, Y., Yu, G., Zha, T., Zhang, L., Zhang, Q., Zhao, T., Zhao, L., Yuan, W.: Comparison of satellite-based evapotranspiration models over terrestrial ecosystems in China. *Remote Sensing of Environment* 140, 279–293. <https://doi.org/10.1016/j.rse.2013.08.045>, 2014.
- Courault, D., Seguin, B., Olioso, A.: Review on estimation of evapotranspiration from remote sensing data: From empirical to numerical modeling approaches. *Irrig Drainage Syst* 19, 223–249. <https://doi.org/10.1007/s10795-005-5186-0>, 2005.
- 860 Cressie, N.A.C.: *Statistics for Spatial Data (Revised Edition)*, John Wiley Sons, Inc., 1993.
- Crosetto, M., Moreno Ruiz, J.A., Crippa, B.: Uncertainty propagation in models driven by remotely sensed data. *Remote Sens. Environ.* 76, 373–385. [https://doi.org/10.1016/S0034-4257\(01\)00184-5](https://doi.org/10.1016/S0034-4257(01)00184-5), 2001.
- Elhag, M.: Inconsistencies of SEBS model output based on the model inputs: global sensitivity contemplations. *Journal of the Indian Society of Remote Sensing*, 44(3), pp.435-442, 2016.
- 865 Elnashar, A., Wang, L., Wu, B., Zhu, W. and Zeng, H.: Synthesis of global actual evapotranspiration from 1982 to 2019. *Earth System Science Data*, 13(2), pp.447-480, 2021.
- Ershadi, A., McCabe, M.F., Evans, J.P. and Walker, J.P.: Effects of spatial aggregation on the multi-scale estimation of evapotranspiration. *Remote Sensing of Environment*, 131, pp.51-62. <https://doi.org/10.1016/j.rse.2012.12.007>, 2013.
- European Space Agency (ESA): *User Guides - Sentinel-2 MSI - Processing Levels [WWW Document]*. URL <https://sentinels.copernicus.eu/web/sentinel/user-guides/sentinel-2-msi/processing-levels> (accessed 22.02.2023), 2021.
- 870

- Food and Agriculture Organization of the United Nations (FAO): WaPOR Database Methodology: Level 2. Remote Sensing for Water Productivity. Rome, 2018.
- Ferguson, C.R., Sheffield, J., Wood, E.F., Gao, H.: Quantifying uncertainty in a remote sensing-based estimate of evapotranspiration over continental USA. *Int. J. Remote Sens.* 31, 3821–3865.
875 <https://doi.org/10.1080/01431161.2010.483490>, 2010.
- Fisher, J.B., Tu, K.P. and Baldocchi, D.D.: Global estimates of the land–atmosphere water flux based on monthly AVHRR and ISLSCP-II data, validated at 16 FLUXNET sites. *Remote Sensing of Environment*, 112(3), pp.901-919, 2008.
- [Fisher, J.B., Melton, F., Middleton, E., Hain, C., Anderson, M., Allen, R., McCabe, M.F., Hook, S., Baldocchi, D., Townsend, P.A. and Kilic, A.: The future of evapotranspiration: Global requirements for ecosystem functioning, carbon and climate feedbacks, agricultural management, and water resources. *Water resources research*, 53\(4\), pp.2618-2626, 2017.](#)
880 [Fisher, J.B., Lee, B., Purdy, A.J., Halverson, G.H., Dohlen, M.B., Cawse-Nicholson, K., Wang, A., Anderson, R.G., Aragon, B., Arain, M.A. and Baldocchi, D.D.: ECOSTRESS: NASA's next generation mission to measure evapotranspiration from the international space station. *Water Resources Research*, 56\(4\), p.e2019WR026058, 2020.](#)
- FLUXNET: Site Summary [WWW Document]. FLUXNET. URL <https://fluxnet.org/sites/site-summary/> (last accessed 1.20.23), 2017.
885
- Foken, T.: The energy balance closure problem: An overview. *Ecological Applications*, 18(6), pp.1351-1367.
<https://www.jstor.org/stable/40062260>, 2008.
- Foody, G.M., Atkinson, P.M.: *Uncertainty in Remote Sensing and GIS*. John Wiley & Sons, 2003.
- García, M., Sandholt, I., Ceccato, P., Ridler, M., Mougín, E., Kergoat, L., Morillas, L., Timouk, F., Fensholt, R. and Domingo, F.: Actual evapotranspiration in drylands derived from in-situ and satellite data: Assessing biophysical constraints. *Remote Sensing of Environment*, 131, pp.103-118, 2013.
890
- [García-Santos, V., Sánchez, J.M., Cuxart, J.: Evapotranspiration Acquired with Remote Sensing Thermal-Based Algorithms: A State-of-the-Art Review. *Remote Sens.* 14, 3440. <https://doi.org/10.3390/rs14143440>, 2022.](#)
- ~~Glenn, E.P., Doody, T.M., Guerschman, J.P., Huete, A.R., King, E.A., McVicar, T.R., Dijk, A.I.J.M.V., Niel, T.G.V., Yebra, M., Zhang, Y.: Actual evapotranspiration estimation by ground and remote sensing methods: the Australian experience. *Hydrol. Process.* 25, 4103–4116. <https://doi.org/10.1002/hyp.8391>, 2011.~~
895 ~~[Glenn, E.P., Huete, A.R., Nagler, P.L., Hirschboeck, K.K., Brown, P.: Integrating Remote Sensing and Ground Methods to Estimate Evapotranspiration. *Crit. Rev. Plant Sci.* 26, 139–168. <https://doi.org/10.1080/07352680701402503>, 2007.](#)~~
- Glenn, E.P., Nagler, P.L., Huete, A.R.: Vegetation Index Methods for Estimating Evapotranspiration by Remote Sensing. *Surv Geophys* 31, 531–555. <https://doi.org/10.1007/s10712-010-9102-2>, 2010.
900
- ~~[Glenn, E.P., Doody, T.M., Guerschman, J.P., Huete, A.R., King, E.A., McVicar, T.R., Dijk, A.I.J.M.V., Niel, T.G.V., Yebra, M., Zhang, Y.: Actual evapotranspiration estimation by ground and remote sensing methods: the Australian experience. *Hydrol. Process.* 25, 4103–4116. <https://doi.org/10.1002/hyp.8391>, 2011.](#)~~

- 905 Gokool, S., Chetty, K.T., Jewitt, G.P.W., Heeralal, A.: Estimating total evaporation at the field scale using the SEBS model and data infilling procedures. *Water SA* 42, 673–683. <https://doi.org/10.4314/wsa.v42i4.18>, 2016.
- Gomis-Cebolla, J., Jimenez, J.C., Sobrino, J.A., Corbari, C. and Mancini, M.: Intercomparison of remote-sensing based evapotranspiration algorithms over amazonian forests. *Int. J. Appl. Earth Obs. Geoinf.*, 80, pp.280-294. <https://doi.org/10.1016/j.jag.2019.04.009>, 2019.
- 910 Gowda, P.H., Chávez, J.L., Colaizzi, P.D., Evett, S.R., Howell, T.A., Tolk, J.A.: Remote sensing based energy balance algorithms for mapping ET: current status and future challenges. *TRANSACTIONS OF THE ASABE* 50, 6, 2007.
- ~~Grant, M.J., Booth, A.: A typology of reviews: an analysis of 14 review types and associated methodologies. *Health Information & Libraries Journal* 26, 91–108. <https://doi.org/10.1111/j.1471-1842.2009.00848.x>, 2009.~~
- Guillevic, P.C., Olioso, A., Hook, S.J., Fisher, J.B., Lagouarde, J.P. and Vermote, E.F.: Impact of the revisit of thermal infrared remote sensing observations on evapotranspiration uncertainty—A sensitivity study using AmeriFlux Data. *Remote Sensing*, 11(5), p.573. <https://doi.org/10.3390/rs11050573>, 2019.
- 915 Guo, X., Yao, Y., Zhang, Y., Lin, Y., Jiang, B., Jia, K., Zhang, X., Xie, X., Zhang, L., Shang, K. and Yang, J.: Discrepancies in the simulated global terrestrial latent heat flux from glass and merra-2 surface net radiation products. *Remote sensing*, 12(17), p.2763, 2020.
- 920 He, X., Xu, T., Xia, Y., Bateni, S.M., Guo, Z., Liu, S., Mao, K., Zhang, Y., Feng, H. and Zhao, J.: A Bayesian three-cornered hat (BTCH) method: improving the terrestrial evapotranspiration estimation. *Remote Sensing*, 12(5), p.878, 2020.
- Heuvelink, G.B.M.: *Error Propagation in Environmental Modelling with GIS*. CRC Press, London. <https://doi.org/10.4324/9780203016114>, 1998.
- Jiang, L., Zhang, B., Han, S., Chen, H. and Wei, Z.: Upscaling evapotranspiration from the instantaneous to the daily time scale: Assessing six methods including an optimized coefficient based on worldwide eddy covariance flux network. *J. Hydrol.*, 596, p.126135. <https://doi.org/10.1016/j.jhydrol.2021.126135>, 2021.
- 925 Jiménez, C., Prigent, C., Mueller, B., Seneviratne, S.I., McCabe, M.F., Wood, E.F., Rossow, W.B., Balsamo, G., Betts, A.K., Dirmeyer, P.A., Fisher, J.B., Jung, M., Kanamitsu, M., Reichle, R.H., Reichstein, M., Rodell, M., Sheffield, J., Tu, K., Wang, K.: Global intercomparison of 12 land surface heat flux estimates. *Journal of Geophysical Research: Atmospheres* 116. <https://doi.org/10.1029/2010JD014545>, 2011.
- 930 Joint Committee for Guides in Metrology (JCGM): *International vocabulary of metrology—Basic and general concepts and associated terms*, BIPM. Sèvres, France, 2012.
- Jung, H.C., Getirana, A., Arsenault, K.R., Holmes, T.R. and McNally, A.: Uncertainties in evapotranspiration estimates over West Africa. *Remote Sensing*, 11(8), p.892. <https://doi.org/10.3390/rs11080892>, 2019.
- 935 Jung, M., Koirala, S., Weber, U., Ichii, K., Gans, F., Camps-Valls, G., Papale, D., Schwalm, C., Tramontana, G. and Reichstein, M.: The FLUXCOM ensemble of global land-atmosphere energy fluxes. *Scientific data*, 6(1), pp.1-14. <https://doi.org/10.1038/s41597-019-0076-8>, 2019.

- Kalma, J.D., McVicar, T.R., McCabe, M.F.: Estimating Land Surface Evaporation: A Review of Methods Using Remotely Sensed Surface Temperature Data. *Surv. Geophys.* 29, 421–469. <https://doi.org/10.1007/s10712-008-9037-z>, 2008.
- 940 Karimi, P., Bastiaanssen, W.G.M.: Spatial evapotranspiration, rainfall and land use data in water accounting - Part 1: Review of the accuracy of the remote sensing data. *Hydrol. Earth. Syst. Sci.* 19, 507–532. <https://doi.org/10.5194/hess-19-507-2015>, 2015.
- Khan, M.S., Liaqat, U.W., Baik, J. and Choi, M., 2018. Stand-alone uncertainty characterization of GLEAM, GLDAS and MOD16 evapotranspiration products using an extended triple collocation approach. *Agr. Forest Meteorol.*, 252, pp.256-268.
- 945 268.
- Kibria, S., Masia, S., Sušnik, J., & Hessels, T. M.: Critical comparison of actual evapotranspiration estimates using ground based, remotely sensed, and simulated data in the USA. *Agr. Water Manage.*, 248, 106753. <https://doi.org/10.1016/j.agwat.2021.106753>, 2021.
- Koppa, A. and Gebremichael, M.: A framework for validation of remotely sensed precipitation and evapotranspiration based on the Budyko hypothesis. *Water Resources Research*. 53(10), pp.8487-8499, 2017.
- 950 on the Budyko hypothesis. *Water Resources Research*. 53(10), pp.8487-8499, 2017.
- Korzoun, V.I., Sokolov, A.A., Budyko, M.I., Voskresensky, K.P., Kalinin, G.P., Konoplyantsev, A.A., Korotkevich, E.S., Kuzin, P.S., Lvovich, M.I.: *World water balance and water resources of the earth*. Stud. Rep. Hydrol. UNESCO, 1978.
- Kustas, W.P., Norman, J.M.: Use of remote sensing for evapotranspiration monitoring over land surfaces. *Hydrol. Sci. J.* 41, 495–516. <https://doi.org/10.1080/02626669609491522>, 1996.
- 955 Kustas, W.P., Norman, J.M.: Evaluation of soil and vegetation heat flux predictions using a simple two-source model with radiometric temperatures for partial canopy cover. *Agr. Forest Meteorol.* 94, 13–29. [https://doi.org/10.1016/S0168-1923\(99\)00005-2](https://doi.org/10.1016/S0168-1923(99)00005-2), 1999.
- Kvålseth, T.O.: Cautionary Note about R 2. *Am. Stat.* 39, 279–285. <https://doi.org/10.1080/00031305.1985.10479448>, 1985.
- Lehmann, F., Vishwakarma, B.D. and Bamber, J.: How well are we able to close the water budget at the global scale?. *Hydrol. Earth. Syst. Sci.*, 26(1), pp.35-54. <https://doi.org/10.5194/hess-26-35-2022>, 2022.
- 960 Earth. Syst. Sci., 26(1), pp.35-54. <https://doi.org/10.5194/hess-26-35-2022>, 2022.
- Lex A., Gehlenborg N., Strobel H., Vuilleumot R., Pfister H.: UpSet: Visualization of Intersecting Sets *IEEE Transactions on Visualization and Computer Graphics (InfoVis)*, 20(12): 1983--1992, <https://doi.org/10.1109/TVCG.2014.2346248>, 2014
- Li, X., Liu, S., Li, H., Ma, Y., Wang, J., Zhang, Y., Xu, Z., Xu, T., Song, L., Yang, X., Lu, Z., Wang, Z., Guo, Z.: Intercomparison of Six Upscaling Evapotranspiration Methods: From Site to the Satellite Pixel. *Journal of Geophysical Research: Atmospheres* 123, 6777–6803. <https://doi.org/10.1029/2018JD028422>, 2018.
- 965 Research: Atmospheres 123, 6777–6803. <https://doi.org/10.1029/2018JD028422>, 2018.
- Li, X., Xin, X., Jiao, J., Peng, Z., Zhang, H., Shao, S. and Liu, Q.: Estimating subpixel surface heat fluxes through applying temperature-sharpening methods to MODIS data. *Remote Sensing*, 9(8), p.836, 2017.
- Li, Z.-L., Tang, R., Wan, Z., Bi, Y., Zhou, C., Tang, B., Yan, G., Zhang, X.: A Review of Current Methodologies for Regional Evapotranspiration Estimation from Remotely Sensed Data. *Sensors* 9, 3801–3853. <https://doi.org/10.3390/s90503801>, 2009.
- 970 2009.

[Liang, S., Wang, K., Zhang, X., Wild, M.: Review on Estimation of Land Surface Radiation and Energy Budgets From Ground Measurement, Remote Sensing and Model Simulations. IEEE J. Sel. Top. Appl. Earth Obs. Remote Sens. 3, 225–240. <https://doi.org/10.1109/JSTARS.2010.2048556>, 2010.](#)

- 975 Liou, Y.-A., Kar, S.K.: Evapotranspiration Estimation with Remote Sensing and Various Surface Energy Balance Algorithms—A Review. *Energies* 7, 2821–2849. <https://doi.org/10.3390/en7052821>, 2014.
- Liu, S., Xu, Z., Song, L., Zhao, Q., Ge, Y., Xu, T., Ma, Y., Zhu, Z., Jia, Z., Zhang, F.: Upscaling evapotranspiration measurements from multi-site to the satellite pixel scale over heterogeneous land surfaces. *Agr. Forest Meteorol., Oasis-desert system* 230–231, 97–113. <https://doi.org/10.1016/j.agrformet.2016.04.008>, 2016.
- 980 Liu, Z.: The accuracy of temporal upscaling of instantaneous evapotranspiration to daily values with seven upscaling methods. *Hydrol. Earth. Syst. Sci.*, 25(8), pp.4417–4433. <https://doi.org/10.5194/hess-25-4417-2021>, 2021.
- Loew, A., Bell, W., Brocca, L., Bulgin, C.E., Burdanowitz, J., Calbet, X., Donner, R.V., Ghent, D., Gruber, A., Kaminski, T., Kinzel, J., Klepp, C., Lambert, J.-C., Schaepman-Strub, G., Schröder, M., Verhoelst, T.: Validation practices for satellite-based Earth observation data across communities. *Rev. Geophys.* 55, 779–817. <https://doi.org/10.1002/2017RG000562>, 2017.
- 985 Long, D., Longuevergne, L., Scanlon, B.R.: Uncertainty in evapotranspiration from land surface modeling, remote sensing, and GRACE satellites. *Water Resources Research* 50, 1131–1151. <https://doi.org/10.1002/2013WR014581>, 2014.
- Long, D., Singh, V.P. and Li, Z.L.: How sensitive is SEBAL to changes in input variables, domain size and satellite sensor?. *Journal of Geophysical Research: Atmospheres*, 116(D21). <https://doi.org/10.1029/2011JD016542>, 2011.
- López, O., Houborg, R. and McCabe, M.F.: Evaluating the hydrological consistency of evaporation products using satellite-based gravity and rainfall data. *Hydrol. Earth. Syst. Sci.*, 21(1), pp.323–343, 2017.
- 990 Markwitz, C., Siebicke, L.: Low-cost eddy covariance: a case study of evapotranspiration over agroforestry in Germany. *Atmospheric Measurement Techniques* 12, 4677–4696. <https://doi.org/10.5194/amt-12-4677-2019>, 2019.
- Marshall, M., Tu, K. and Andreo, V.: On parameterizing soil evaporation in a direct remote sensing model of ET: PT-JPL. *Water resources research*, 56(5), p.e2019WR026290. <https://doi.org/10.1029/2019WR026290>, 2020.
- 995 Martens, B., Miralles, D.G., Lievens, H., Van Der Schalie, R., De Jeu, R.A., Fernández-Prieto, D., Beck, H.E., Dorigo, W.A. and Verhoest, N.E.: GLEAM v3: Satellite-based land evaporation and root-zone soil moisture. *Geoscientific Model Development*, 10(5), pp.1903–1925, 2017.
- Mayr, S., Kuenzer, C., Gessner, U., Klein, I., Rutzinger, M.: Validation of Earth Observation Time-Series: A Review for Large-Area and Temporally Dense Land Surface Products. *Remote Sensing* 11, 2616. <https://doi.org/10.3390/rs11222616>, 2019.
- 1000 McColl, K.A., Vogelzang, J., Konings, A.G., Entekhabi, D., Piles, M. and Stoffelen, A.: Extended triple collocation: Estimating errors and correlation coefficients with respect to an unknown target. *Geophys. Res. Lett.*, 41(17), pp.6229–6236, 2014.

- Melsen, L.A., Teuling, A.J., Torfs, P.J.J.F., Zappa, M., Mizukami, N., Mendoza, P.A., Clark, M.P., Uijlenhoet, R.: Subjective modeling decisions can significantly impact the simulation of flood and drought events. *J. Hydrol.* 568, 1093–1104. <https://doi.org/10.1016/j.jhydrol.2018.11.046>, 2019.
- Melton, F.S., Huntington, J., Grimm, R., Herring, J., Hall, M., Rollison, D., Erickson, T., Allen, R., Anderson, M., Fisher, J.B., Kilic, A., Senay, G.B., Volk, J., Hain, C., Johnson, L., Ruhoff, A., Blankenau, P., Bromley, M., Carrara, W., Daudert, B., Doherty, C., Dunkerly, C., Friedrichs, M., Guzman, A., Halverson, G., Hansen, J., Harding, J., Kang, Y., Ketchum, D., Minor, B., Morton, C., Ortega-Salazar, S., Ott, T., Ozdogan, M., ReVelle, P.M., Schull, M., Wang, C., Yang, Y., Anderson, R.G.: OpenET: Filling a Critical Data Gap in Water Management for the Western United States. *JAWRA Journal of the American Water Resources Association* n/a. <https://doi.org/10.1111/1752-1688.12956>, 2021.
- Miralles, D.G., Holmes, T.R.H., De Jeu, R.A.M., Gash, J.H., Meesters, A.G.C.A. and Dolman, A.J.: Global land-surface evaporation estimated from satellite-based observations. *Hydrol. Earth. Syst. Sci.*, 15(2), pp.453-469, 2011a.
- Miralles, D.G., De Jeu, R.A.M., Gash, J.H., Holmes, T.R.H. and Dolman, A.J.: Magnitude and variability of land evaporation and its components at the global scale. *Hydrol. Earth. Syst. Sci.*, 15(3), pp.967-981, 2011b.
- [Mohammadi, S. and Cremaschi, S.: Efficiency of uncertainty propagation methods for moment estimation of uncertain model outputs. *Computers & Chemical Engineering*, p.107954. https://doi.org/10.1016/j.compchemeng.2022.107954, 2022.](https://doi.org/10.1016/j.compchemeng.2022.107954)
- Mohan, M.M.P., Kanchirapuzha, R., Varma, M.R.R., 2020. Review of approaches for the estimation of sensible heat flux in remote sensing-based evapotranspiration models. *JARS* 14, 041501. <https://doi.org/10.1117/1.JRS.14.041501>
- Montanari, A.: What do we mean by ‘uncertainty’? The need for a consistent wording about uncertainty assessment in hydrology. *Hydrol. Process.* 21, 841–845. <https://doi.org/10.1002/hyp.6623>, 2007.
- [Monteith, J.L.: Evaporation and environment. In *Symposia of the society for experimental biology \(Vol. 19, pp. 205-234\)*. Cambridge University Press \(CUP\) Cambridge, 1965.](https://doi.org/10.1017/9780521876223.010)
- Mu, Q., Heinsch, F.A., Zhao, M. and Running, S.W.: Development of a global evapotranspiration algorithm based on MODIS and global meteorology data. *Remote sensing of Environment*, 111(4), pp.519-536, 2007.
- Mu, Q., Zhao, M. and Running, S.W.: Improvements to a MODIS global terrestrial evapotranspiration algorithm. *Remote sensing of environment*, 115(8), pp.1781-1800, 2011.
- Mueller, B., Hirschi, M., Jimenez, C., Ciais, P., Dirmeyer, P.A., Dolman, A.J., Fisher, J.B., Jung, M., Ludwig, F., Maignan, F. and Miralles, D.G.: Benchmark products for land evapotranspiration: LandFlux-EVAL multi-data set synthesis. *Hydrol. Earth. Syst. Sci.*, 17(10), pp.3707-3720. <https://doi.org/10.5194/hess-17-3707-2013>, 2013.
- The National Aeronautics and Space Administration (NASA): Data Processing Levels | Earthdata [WWW Document]. URL <https://earthdata.nasa.gov/collaborate/open-data-services-and-software/data-information-policy/data-levels/> (accessed 22.02.23) , 2021.
- Nearing, G.S., Tian, Y., Gupta, H.V., Clark, M.P., Harrison, K.W., Weijs, S.V.: A philosophical basis for hydrological uncertainty. *Hydrol. Sci. J.* 61, 1666–1678. <https://doi.org/10.1080/02626667.2016.1183009>, 2016.

- Oliphant, A.J.: Terrestrial ecosystem-atmosphere exchange of CO₂, water and energy from FLUXNET; review and meta-analysis of a global in-situ observatory. *Geography Compass*, 6(12), pp.689-705. <https://doi.org/10.1111/gec3.12009>, 2012.
- 1040 Oreskes, N., Shrader-Frechette, K., Belitz, K.: Verification, Validation, and Confirmation of Numerical Models in the Earth Sciences. *Science* 263, 641–646. <https://doi.org/10.1126/science.263.5147.641>, 1994.
- Pan, S., Pan, N., Tian, H., Friedlingstein, P., Stith, S., Shi, H., Arora, V.K., Haverd, V., Jain, A.K., Kato, E. and Lienert, S.: Evaluation of global terrestrial evapotranspiration using state-of-the-art approaches in remote sensing, machine learning and land surface modeling. *Hydrol. Earth. Syst. Sci.*, 24(3), pp.1485-1509. <https://doi.org/10.5194/hess-24-1485-2020>, 2020.
- 1045 Pardo, N., Sánchez, M.L., Timmermans, J., Su, Z., Pérez, I.A. and García, M.A.: SEBS validation in a Spanish rotating crop. *Agr. Forest Meteorol.*, 195, pp.132-142, 2014.
- Peng, Z.Q., Xin, X., Jiao, J.J., Zhou, T. and Liu, Q.: Remote sensing algorithm for surface evapotranspiration considering landscape and statistical effects on mixed pixels. *Hydrol. Earth. Syst. Sci.*, 20(11), pp.4409-4438, 2016.
- 1050 Pickering, C., Byrne, J.: The benefits of publishing systematic quantitative literature reviews for PhD candidates and other early-career researchers. *High. Educ. Res. Dev.* 33, 534–548. <https://doi.org/10.1080/07294360.2013.841651>, 2014.
- Povey, A.C., Grainger, R.G.: Known and unknown unknowns: uncertainty estimation in satellite remote sensing. *Atmospheric Meas. Tech.* 8, 4699–4718. <https://doi.org/10.5194/amt-8-4699-2015>, 2015.
- Premoli, A. and Tavella, P.: A revisited three-cornered hat method for estimating frequency standard instability. *IEEE Transactions on instrumentation and measurement*, 42(1), pp.7-13, 1993.
- 1055 Razavi, S., Gupta, H.V.: What do we mean by sensitivity analysis? The need for comprehensive characterization of “global” sensitivity in Earth and Environmental systems models. *Water Resour. Res.* 51, 3070–3092. <https://doi.org/10.1002/2014WR016527>, 2015.
- Rwasoka, D.T., Gumindoga, W. and Gwenzi, J.: Estimation of actual evapotranspiration using the Surface Energy Balance System (SEBS) algorithm in the Upper Manyame catchment in Zimbabwe. *Physics and Chemistry of the Earth, Parts A/B/C*, 36(14-15), pp.736-746, 2011.
- 1060 Saltelli, A., Aleksankina, K., Becker, W., Fennell, P., Ferretti, F., Holst, N., Li, S., Wu, Q.: Why so many published sensitivity analyses are false: A systematic review of sensitivity analysis practices. *Environ. Model. Softw.* 114, 29–39. <https://doi.org/10.1016/j.envsoft.2019.01.012>, 2019.
- 1065 Saltelli, A., Jakeman, A., Razavi, S., Wu, Q.: Sensitivity analysis: A discipline coming of age. *Environmental Modelling & Software* 146, 105226. <https://doi.org/10.1016/j.envsoft.2021.105226>, 2021.
- ~~Saltelli, A., Ratto, M., Andres, T., Campolongo, F., Cariboni, J., Gatelli, D., Saisana, M., Tarantola, S.: *Global Sensitivity Analysis: The Primer*. John Wiley & Sons, 2008.~~
- Schoups, G. and Nasserli, M.: GRACEfully closing the water balance: A data-driven probabilistic approach applied to river basins in Iran. *Water Resources Research*, 57(6), p.e2020WR029071. <https://doi.org/10.1029/2020WR029071>, 2021.
- 1070

- Senay, G.B., Bohms, S., Singh, R.K., Gowda, P.H., Velpuri, N.M., Alemu, H. and Verdin, J.P.: Operational evapotranspiration mapping using remote sensing and weather datasets: A new parameterization for the SSEB approach. *JAWRA Journal of the American Water Resources Association*, 49(3), pp.577-591. <https://doi.org/10.1111/jawr.12057>, 2013.
- 1075 Senay, G.B., Leake, S., Nagler, P.L., Artan, G., Dickinson, J., Cordova, J.T., Glenn, E.P.: Estimating basin scale evapotranspiration (ET) by water balance and remote sensing methods. *Hydrological Processes* 25, 4037–4049. <https://doi.org/10.1002/hyp.8379>, 2011.
- Sharma, V., Kilic, A. and Irmak, S.: Impact of scale/resolution on evapotranspiration from Landsat and MODIS images. *Water Resources Research*, 52(3), pp.1800-1819. <https://doi.org/10.1002/2015WR017772>, 2016.
- 1080 [Shuttleworth, W.J. and Wallace, J.S.: Evaporation from sparse crops-an energy combination theory. *Quarterly Journal of the Royal Meteorological Society*, 111\(469\), pp.839-855, 1985.](https://doi.org/10.1002/2015WR017772)
- Singh, R.K., Liu, S., Tieszen, L.L., Suyker, A.E. and Verma, S.B.: Estimating seasonal evapotranspiration from temporal satellite images. *Irrigation Science*, 30(4), pp.303-313. <https://doi.org/10.1007/s00271-011-0287-z>, 2012.
- Sjoberg, J.P., Anthes, R.A. and Rieckh, T.: The three-cornered hat method for estimating error variances of three or more atmospheric datasets. Part I: overview and evaluation. *Journal of Atmospheric and Oceanic Technology*, 38(3), pp.555-572, 2021.
- 1085 Sobol, I.M.: Global sensitivity indices for nonlinear mathematical models and their Monte Carlo estimates. *Mathematics and computers in simulation*, 55(1-3), pp.271-280, 2001.
- Stisen, S., Soltani, M., Mendiguren, G., Langkilde, H., Garcia, M. and Koch, J.: Spatial patterns in actual evapotranspiration climatologies for europe. *Remote Sensing*, 13(12), p.2410. <https://doi.org/10.3390/rs13122410>, 2021.
- 1090 Stoffelen, A.: Toward the true near-surface wind speed: Error modeling and calibration using triple collocation. *Journal of geophysical research: oceans*, 103(C4), pp.7755-7766, 1998.
- Su, Z.: The Surface Energy Balance System (SEBS) for estimation of turbulent heat fluxes. *Hydrol. Earth. Syst. Sci.* 6, 85–100. <https://doi.org/10.5194/hess-6-85-2002>, 2002.
- Talsma, C.J., Good, S.P., Miralles, D.G., Fisher, J.B., Martens, B., Jimenez, C. and Purdy, A.J.: Sensitivity of evapotranspiration components in remote sensing-based models. *Remote Sensing*, 10(10), p.1601, 2018.
- 1095 Tang, R. and Li, Z.L.: Estimating daily evapotranspiration from remotely sensed instantaneous observations with simplified derivations of a theoretical model. *Journal of Geophysical Research: Atmospheres*, 122(19), pp.10-177. <https://doi.org/10.1002/2017JD027094>, 2017.
- Tang, R., Li, Z.L. and Sun, X.: Temporal upscaling of instantaneous evapotranspiration: An intercomparison of four methods using eddy covariance measurements and MODIS data. *Remote Sensing of Environment*, 138, pp.102-118. <https://doi.org/10.1016/j.rse.2013.07.001>, 2013.
- 1100 Taylor, J.: *Introduction to Error Analysis, the Study of Uncertainties in Physical Measurements*, 2nd Edition, Published by University Science Books, 1997.

- Trambauer, P., Dutra, E., Maskey, S., Werner, M., Pappenberger, F., Van Beek, L.P.H. and Uhlenbrook, S.: Comparison of
1105 different evaporation estimates over the African continent. *Hydrol. Earth. Syst. Sci.*, 18(1), pp.193-212.
<https://doi.org/10.5194/hess-18-193-2014>, 2014.
- van de Schoot, R., de Bruin, J., Schram, R., Zahedi, P., de Boer, J., Weijdema, F., Kramer, B., Huijts, M., Hoogerwerf, M.,
Ferdinands, G., Harkema, A., Willemsen, J., Ma, Y., Fang, Q., Hindriks, S., Tummers, L., Oberski, D.L.: An open source
1110 machine learning framework for efficient and transparent systematic reviews. *Nat. Mach. Intell.* 3, 125–133.
<https://doi.org/10.1038/s42256-020-00287-7>, 2021.
- Vendrame, N., Tezza, L., Pitacco, A.: Comparison of sensible heat fluxes by large aperture scintillometry and eddy covariance
over two contrasting-climate vineyards. *Agr. Forest Meteorol.* 288–289, 108002.
<https://doi.org/10.1016/j.agrformet.2020.108002>, 2020.
- 1115 Vinukollu, R.K., Wood, E.F., Ferguson, C.R. and Fisher, J.B.: Global estimates of evapotranspiration for climate studies using
multi-sensor remote sensing data: Evaluation of three process-based approaches. *Remote Sensing of Environment*, 115(3),
pp.801-823, 2011a.
- Vinukollu, R.K., Meynadier, R., Sheffield, J. and Wood, E.F.: Multi-model, multi-sensor estimates of global
evapotranspiration: Climatology, uncertainties and trends. *Hydrological Processes*, 25(26), pp.3993-4010, 2011b.
- 1120 Wadoux, A.M.J.-C., Heuvelink, G.B.M., Uijlenhoet, R., de Bruin, S.: Optimization of rain gauge sampling density for river
discharge prediction using Bayesian calibration. *PeerJ* 8, e9558. <https://doi.org/10.7717/peerj.9558>, 2020.
- Wang, J., Zhuang, J., Wang, W., Liu, S., Xu, Z.: Assessment of Uncertainties in Eddy Covariance Flux Measurement Based
on Intensive Flux Matrix of HiWATER-MUSOEXE. *IEEE Geoscience and Remote Sensing Letters* 12, 259–263.
<https://doi.org/10.1109/LGRS.2014.2334703>, 2015.
- 1125 Wang, K., Dickinson, R.E.: A review of global terrestrial evapotranspiration: Observation, modeling, climatology, and climatic
variability. *Rev. Geophys.* 50. <https://doi.org/10.1029/2011RG000373>, 2012.
- Wang, Y.Q., Xiong, Y.J., Qiu, G.Y. and Zhang, Q.T.: Is scale really a challenge in evapotranspiration estimation? A multi-
scale study in the Heihe oasis using thermal remote sensing and the three-temperature model. *Agr. Forest Meteorol.*, 230,
pp.128-141. <https://doi.org/10.1016/j.rse.2012.12.007>, 2016.
- 1130 Weerasinghe, I., Bastiaanssen, W., Mul, M., Jia, L. and Van Griensven, A.: Can we trust remote sensing evapotranspiration
products over Africa?. *Hydrol. Earth. Syst. Sci.*, 24(3), pp.1565-1586, 2020.
- Wilson, K., Goldstein, A., Falge, E., Aubinet, M., Baldocchi, D., Berbigier, P., Bernhofer, C., Ceulemans, R., Dolman, H.,
Field, C. and Grelle, A.: Energy balance closure at FLUXNET sites. *Agr. Forest Meteorol.*, 113(1-4), pp.223-243, 2002.
- Woodcock, C.E.: Uncertainty in Remote Sensing, in: Foody, G.M., Atkinson, P.M. (Eds.), *Uncertainty in Remote Sensing and*
1135 *GIS*. John Wiley & Sons Inc, 2002.
- Wu, X., Xiao, Q., Wen, J., You, D., Hueni, A.: Advances in quantitative remote sensing product validation: Overview and
current status. *Earth-Science Reviews* 196, 102875. <https://doi.org/10.1016/j.earscirev.2019.102875>, 2019a.

- 1140 Wu, X., Xiao, Q., Wen, J. and You, D.: Direct comparison and triple collocation: Which is more reliable in the validation of coarse-scale satellite surface albedo products. *Journal of Geophysical Research: Atmospheres*, 124(10), pp.5198-5213. <https://doi.org/10.1029/2018JD029937>, 2019b.
- Xu, T., Guo, Z., Xia, Y., Ferreira, V.G., Liu, S., Wang, K., Yao, Y., Zhang, X. and Zhao, C.: Evaluation of twelve evapotranspiration products from machine learning, remote sensing and land surface models over conterminous United States. *J. Hydrol.*, 578, p.124105, 2019.
- 1145 Yang, X., Tian, S., You, W. and Jiang, Z.: Reconstruction of continuous GRACE/GRACE-FO terrestrial water storage anomalies based on time series decomposition. *J. Hydrol.*, 603, p.127018, 2021.
- [Yao, Y., Liang, S., Li, X., Hong, Y., Fisher, J.B., Zhang, N., Chen, J., Cheng, J., Zhao, S., Zhang, X. and Jiang, B.: Bayesian multimodel estimation of global terrestrial latent heat flux from eddy covariance, meteorological, and satellite observations. *Journal of Geophysical Research: Atmospheres*, 119\(8\), pp.4521-4545. <https://doi.org/10.1002/2013JD020864>, 2014.](https://doi.org/10.1002/2013JD020864)
- 1150 [Yao, Y., Liang, S., Li, X., Zhang, Y., Chen, J., Jia, K., Zhang, X., Fisher, J.B., Wang, X., Zhang, L. and Xu, J.: Estimation of high-resolution terrestrial evapotranspiration from Landsat data using a simple Taylor skill fusion method. *Journal of Hydrology*, 553, pp.508-526. <https://doi.org/10.1016/j.jhydrol.2017.08.013>, 2017.](https://doi.org/10.1016/j.jhydrol.2017.08.013)
- Yeber, M., Van Dijk, A., Leuning, R., Huete, A. and Guerschman, J.P.: Evaluation of optical remote sensing to estimate actual evapotranspiration and canopy conductance. *Remote Sensing of Environment*, 129, pp.250-261, 2013.
- 1155 Zeng, Y., Su, Z., Calvet, J.-C., Manninen, T., Swinnen, E., Schulz, J., Roebeling, R., Poli, P., Tan, D., Riihelä, A., Tanis, C.-M., Arslan, A.-N., Obregon, A., Kaiser-Weiss, A., John, V.O., Timmermans, W., Timmermans, J., Kaspar, F., Gregow, H., Barbu, A.-L., Fairbairn, D., Gelati, E., Meurey, C.: Analysis of current validation practices in Europe for space-based climate data records of essential climate variables. *Int. J. Appl. Earth Obs. Geoinf.* 42, 150-161. <https://doi.org/10.1016/j.jag.2015.06.006>, 2015.
- Zhang, K., Kimball, J.S., Running, S.W.: A review of remote sensing based actual evapotranspiration estimation. *Wiley Interdisciplinary Reviews: Water* 3, 834-853. <https://doi.org/10.1002/wat2.1168>, 2016.
- 1160 Zhang, K., Zhu, G., Ma, J., Yang, Y., Shang, S. and Gu, C.: Parameter analysis and estimates for the MODIS evapotranspiration algorithm and multiscale verification. *Water Resources Research*, 55(3), pp.2211-2231. <https://doi.org/10.1029/2018WR023485>, 2019.
- 1165 Zhang, L. and Lemeur, R.: Evaluation of daily evapotranspiration estimates from instantaneous measurements. *Agr. Forest Meteorol.*, 74(1-2), pp.139-154. [https://doi.org/10.1016/0168-1923\(94\)02181-I](https://doi.org/10.1016/0168-1923(94)02181-I), 1995.
- Zhang, L., Marshall, M., Nelson, A. and Vrieling, A.: A global assessment of PT-JPL soil evaporation in agroecosystems with optical, thermal, and microwave satellite data. *Agr. Forest Meteorol.*, 306, p.108455. <https://doi.org/10.1016/j.agrformet.2021.108455>, 2021.