

Application of regional meteorology and air quality models based on MIPS and LoongArch CPU Platforms

Zehua Bai^{1,2}, Qizhong Wu^{1,2}, Kai Cao^{1,2}, Yiming Sun³, Huaqiong Cheng^{1,2}

¹College of Global Change and Earth System Science, Faculty of Geographical Science, Beijing Normal University, Beijing 100875, China.

²Joint Center for Earth System Modeling and High Performance Computing, Beijing Normal University, Beijing 100875, China.

³Beijing Institute of Talent Development Strategy, Beijing 100032, China.

Correspondence: Qizhong Wu (wqizhong@bnu.edu.cn)

Abstract. The Microprocessor without interlocked piped stages (MIPS) and LoongArch are Reduced Instruction Set Computing (RISC) processor architectures, which have advantages in terms of energy consumption and efficiency. There are few studies on the application of MIPS and LoongArch CPUs in the geoscientific numerical models. In this study, Loongson 3A4000 CPU platform with MIPS64 architecture and Loongson 3A6000 CPU platform with LoongArch architecture were used to establish the runtime environment for the air quality modelling system Weather Research and Forecasting–Comprehensive Air Quality Model with extensions (WRF-CAMx) in Beijing-Tianjin-Hebei region. The results show that the relative errors for the major species (NO₂, SO₂, O₃, CO, PNO₃ and PSO₄) between the MIPS and X86 benchmark platform are within $\pm 0.1\%$. The maximum Mean Absolute Error (MAE) of major species ranged to 10^{-2} ppbV or $\mu\text{g m}^{-3}$, the maximum Root Mean Square Error (RMSE) ranged to 10^{-1} ppbV or $\mu\text{g m}^{-3}$, and the Mean Absolute Percentage Error (MAPE) remained within 0.5%. The CAMx takes about 195 minutes on Loongson 3A4000 CPU, 71 minutes on Loongson 3A6000 CPU and 66 minutes on Intel Xeon E5-2697 v4 CPU, when simulating a 24h-case with four parallel processes using MPICH. As a result, the

30 single-core computing capability of Loongson 3A4000 CPU for the WRF-CAMx
31 modeling system is about one-third of Intel Xeon E5-2697 v4 CPU and Loongson
32 3A6000 CPU is slightly lower than Intel Xeon E5-2697 v4 CPU, but the thermal design
33 power (TDP) of Loongson 3A4000 is 40W, while the Loongson 3A6000 is 38W, only
34 about one-fourth of Intel Xeon E5-2697 v4, whose TDP is 145W. The results also verify
35 the feasibility of cross-platform porting and the scientific usability of the ported model.
36 This study provides a technical foundation for the porting and optimization of
37 numerical models based on MIPS, LoongArch or other RISC platforms.

38

39 **1 Introduction**

40 In the recent years, with the increasing demand for high-performance computing
41 resources and rapid development in the computer industry, especially supercomputer,
42 central processing unit (CPU) has undergone significant advancements in logical
43 structure, operational efficiency, and functional capabilities, making it the core
44 component of current computer technology development. There are two main types:
45 one is complex instruction set computer (CISC) CPU (George, 1990; Shi, 2008), mainly
46 using X86 architecture, representative vendors including Intel, AMD, etc., and widely
47 used in high-performance computing platforms. The other is reduced instruction set
48 computer (RISC) CPU (Mallach, 1991; Liu et al.,2022), mainly using ARM, MIPS,
49 RISC-V and other architectures, representative vendors including Loongson, etc., and
50 mainly used in high-performance computing platforms, which have high efficiency,
51 excellent stability and scalability. The Microprocessor without interlocked piped stages
52 (MIPS) architecture is one of the significant representatives of RISC architecture. MIPS
53 was originally developed in the early 1980s by Professor Hennessy at Stanford
54 University and his group (Hennessy et al., 1982). The simplicity of the MIPS instruction
55 set contributes to its ability to process instructions quickly, thus achieving higher
56 performance even in low-power conditions. In 1999, MIPS Technology Inc. released
57 the MIPS32 and MIPS64 architecture standard (MIPS Technology Inc., 2014).
58 Compared to the CISC CPUs, RISC CPUs demonstrate excellent performance and

59 power efficiency, which have gained popularity among chip manufacturers.

60 The Loongson processor family developed by Loongson Technology is mainly
61 designed using MIPS architecture and Linux operating system (Hu et al, 2011), which
62 has rich application tools in Linux open-source projects. The main reason that currently
63 restricts the development of CPUs that implement non-X86 instruction set architecture
64 such as MIPS64 is the immature software ecosystem (Hu et al., 2016). Based on the
65 strategy of open-source software, Loongson platform has gained abundant software
66 tools, making it possible to further develop scientific computing and numerical models.

67 Air quality model (AQM) systems use mathematical equations and algorithms to
68 simulate and predict the pollutant concentration in the atmosphere. The current AQMs
69 have become more complex, incorporating numerous factors such as emissions from
70 industrial sources, vehicle traffic, and natural sources, as well as meteorological
71 conditions, including modeling meteorology, emissions, chemical reactions, and
72 removal processes (Zhang et al., 2012). Regional-scale AQMs have been widely used
73 to predict air quality in cities, formulate emission reduction strategies, and evaluate the
74 effectiveness of control policies (Wang et al., 2023), including the Community
75 Multiscale Air Quality (CMAQ) modelling system (Appel et al., 2017; Appel et al.,
76 2021), the Comprehensive Air Quality Model with extensions (CAMx; RAMBOLL
77 ENVIRON Inc., 2014), and the Nested Air Quality Prediction Modeling System (Wang
78 et al., 2006; Chen et al., 2015). Due to the requirement of meteorological input,
79 commonly used offline meteorological models such as WRF (Michalakes et al., 2001)
80 are coupled offline with the regional AQMs to provide meteorological and chemical
81 forecast as the WRF-AQM modeling system, such the WRF-CMAQ modeling system
82 (Wu et al., 2014).

83 Both the meteorological and air quality numerical simulation rely heavily on high-
84 performance computing systems. The WRF-AQM systems can run stably on high-
85 performance computing platforms based on X86 or X86-compatible instruction set
86 architecture (ISA) CPUs, which account for the highest percentage among the main
87 processors of current high performance computing platforms. There are relatively
88 limited researches on the application of WRF-AQM system on MIPS and LoongArch


89 CPU platforms at present, this study focuses on the application of WRF-CAMx model
90 on Loongson CPU platform based on the MIPS and LoongArch architectures. A
91 simulation case covering the Beijing-Tianjin-Hebei region was set up to evaluate the
92 differences and performance between MIPS and X86 platforms. This study validated
93 the stability of scientific computing on MIPS and LoongArch CPU platform, and it
94 offered technical references and evaluation methods for the porting and application of
95 numerical models on non-X86 platforms.

96 Section 2 provides the model descriptions of the Weather Research and
97 Forecasting–Comprehensive Air Quality Model with extensions (WRF-CAMx)
98 modeling system, and the descriptions of MIPS, LoongArch and benchmark platforms.
99 The configuration of the air quality numerical simulation system and simulation case
100 are also presented in Section 2. Section 3 describes porting and optimization of the
101 WRF-CAMx modelling system on MIPS and LoongArch CPU platforms. Section 4
102 analyzes the differences of model results between MIPS CPU platform and the
103 benchmark platform. Section 5 discusses MIPS and LoongArch CPUs performance in
104 scientific computing. The conclusions are presented in Section 6.

105

106 **2 Model and Porting Platform Description**

107 The air quality modeling system was constructed using the WRF v4.0 model
108 developed by National Center for Atmospheric Research (NCAR) (Skamarock et al.,
109 2019), and the CAMx v6.10 developed by Ramboll Environment (RAMBOLL
110 ENVIRON Inc., 2014), as shown in Figure 1. And the Loongson 3A4000 CPU platform
111 was chosen for the porting work in the study. This study introduced the porting of WRF-
112 CAMx modeling system to MIPS and LoongArch CPU platforms.

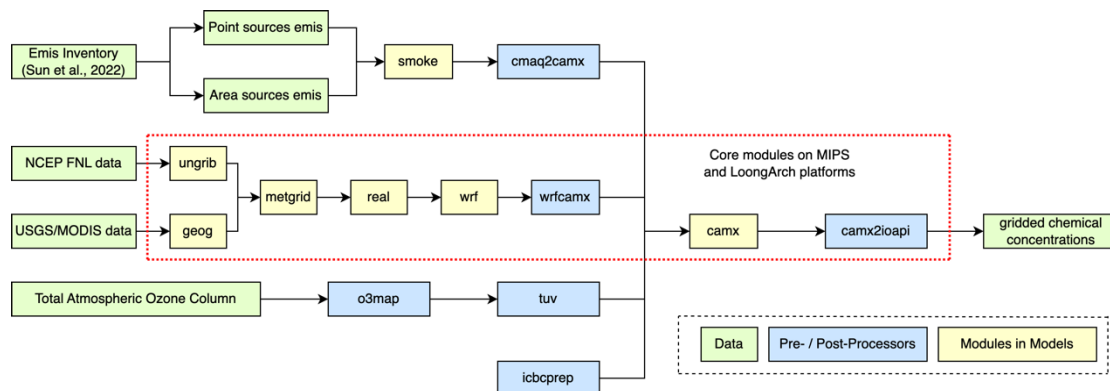

113

114 **Figure 1.** Framework of WRF-CAMx modeling system. The core modules have been
 115 ported to MIPS and LoongArch CPU platforms. The core modules are framed by red
 116 dashed line in the figure.

117 In Xi'an, China and Milan, Italy, the WRF-CAMx modelling system was applied ,
 118 enabling high-resolution hourly model output of pollutant concentration within specific
 119 local urban areas (Pepe et al., 2016; Yang et al., 2020). The modeling system is widely
 120 used to study the spatial-temporal variation of pollutant concentration and source
 121 apportionment, analyze the contribution of regional transport to pollution and
 122 investigate the impact of initial conditions and emissions on pollution simulation in key
 123 regions such as the North China Plain, Sichuan Basin, and Fenwei Plain (Bai et al.,
 124 2021; Zhen et al., 2023; Zhang et al., 2022; Xiao et al., 2021).

125

126 2.1 Description of WRF-CAMx modeling system

127 WRF and CAMx serve as the core components of the modeling system. WRF is a
 128 mesoscale numerical weather prediction system designed for atmospheric research and
 129 operational forecasting applications. Distinguished by its high temporal and spatial
 130 resolution, WRF is suitable for multi-scale simulations of short-term weather forecast,
 131 atmospheric process, and long-term climate, making it an essential tool in the
 132 meteorological and atmospheric research communities (Powers et al., 2017). In the
 133 modeling system, WRF provided gridded meteorological field data for air quality
 134 model CAMx. The relative humidity, a meteorological variable used in result validation
 135 is calculated using the wrf-python package (Official website: [https://wrf-](https://wrf-python.readthedocs.io)
 136 [python.readthedocs.io](https://wrf-python.readthedocs.io), last access: October 2023). CAMx is an atmospheric pollutant


137 calculation model, which can be utilized for simulating and predicting the
138 concentrations of various air pollutants. The WRF and CAMx models are distinguished
139 by modularity and parallelism, using MPI in parallel computing, making them efficient
140 (Skamarock et al., 2019; RAMBOLL ENVIRON Inc., 2014).

141 In the modeling system, the SMOKE model and cmaq2camx program are used to
142 process emission data and provide model-ready gridded emission data for the CAMx
143 model. The wrfcamx program converts the WRF results into meteorological input files
144 which are compatible with CAMx. TUV is a radiation transfer model capable of
145 producing clean sky photolysis rate input files for the chemical mechanisms in CAMx,
146 and the o3map program prepares ozone column input files for TUV and CAMx. The
147 icbcprep program prepares initial and boundary condition files for CAMx with the
148 profile, and the effects of initial conditions have been studied by Xiao et al. (2021). The
149 camx2ioapi program converts the CAMx output files into netCDF format following the
150 Models-3/IO-API convention, and then uses NCL or other softwares to analyses the
151 model results.

152

153 **2.1.1 Model domain setup**

154 The model domain focusing on the Beijing-Tianjin-Hebei region has been set up
155 in this study. The WRF model has three nested domains with horizontal resolutions of
156 27km (D1), 9km (D2), and 3km (D3), as shown in Figure 2. The outer domain (D1)
157 covers most parts of China, and the inner domain (D3) covers Beijing, Tianjin, and
158 Hebei Province. The model domain is centered at (35°N, 110°E), with two true latitudes
159 located at 20°N and 50°N. The vertical resolution of WRF is 34 vertical layers. The
160 CAMx model has only one model domain, which is the innermost grid with a resolution
161 of 3km (D3), mainly covering the Beijing-Tianjin-Hebei region. The vertical resolution
162 of CAMx is 14 vertical layers, which is extracted from the WRF output files using the
163 wrfcamx module, and the lower seven layers of CAMx are same as those in the WRF
164 model.

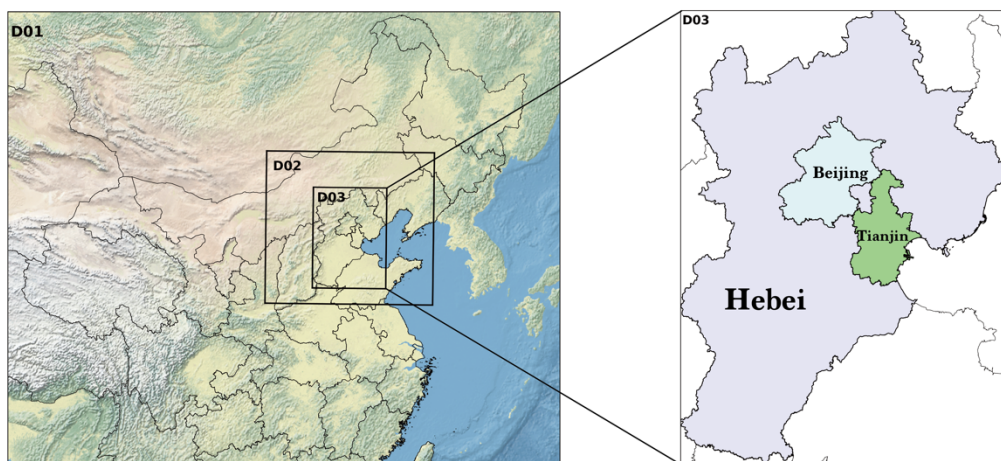

165

166 **Figure 2.** The domains of three-level nested grids in the WRF-CAMx modelling system.
 167 The respective horizontal resolutions are 27 km × 27 km (D1), 9 km × 9 km (D2), and
 168 3 km × 3 km (D3).

169

170 **2.1.2 Model configuration**

171 Starting from 00:00 on November 3, 2020, until 24:00 on November 5, 2020, the
 172 modelling system simulated the meteorological and air quality for a period of 72 hours.
 173 In the research of Wang et al. in 2019, a 72h test case was set for the scientific validation
 174 and performance evaluation of the chemistry transport models. A 72h case represents a
 175 moderate-sized real scientific workload, which allows for simulating in a short time to
 176 validate the results and assess computational efficiency on the MIPS and LoongArch
 177 platforms. For the meteorological model, the global meteorological initial and boundary
 178 fields for the WRF model are derived from the NCEP Global Final Reanalysis Data
 179 (FNL), with a spatial resolution of 0.5° x 0.5° and a temporal resolution of 6 hours. And
 180 the parameterization schemes of the WRF model used in the simulation case are shown
 181 in Table 1.

182 For the air quality model, the meteorological files are provided by the WRF model
 183 are used for the chemical transport module in CAMx. The emission inventory used in
 184 the simulation case was obtained from Sun et al. (2022a). It contains basic emissions
 185 from Sun et al. (2022b) and fugitive dust emission from bare ground surfaces. The
 186 SMOKE model (v2.4) is used to process the emission inventory and provide gridded

187 emissions for CAMx. The parameterization schemes of the CAMx model used in the
 188 simulation case are shown in Table 2.

189

190 **Table 1.** Parameterization schemes of WRF in research case.

Parameterization process	Scheme
Microphysics	WSM3
Longwave radiation	RRTM
Shortwave radiation	Dudhia
Land surface	Noah
Planetary boundary layer	YSU
Cumulus parameterization	Kain-Fritsch(new Eta)

191

192 **Table 2.** Parameterization schemes of CAMx in research case.

Parameterization process	Scheme
Horizontal Diffusion	PPM
Vertical Diffusion	K-theory
Dry Deposition	Zhang03
Gas-phase chemical mechanism	CB05
Aqueous aerosol chemistry	RADM-AQ
Inorganic gas-aerosol partitioning	ISORROPIA

193

194 2.1.3 Statistical indicators for model results

195 To quantify the differences in the model results between the MIPS and benchmark
 196 platform, three statistical indicators are used to analyze the differences of concentration
 197 time series: Mean Absolute Error (MAE), Root Mean Square Error (RMSE), and Mean
 198 Absolute Percentage Error (MAPE). The MAPE quantifies the deviation between
 199 computational differences and simulated values. The smaller these indicators, the better
 200 accuracy and stability of scientific computing of the modeling system on the MIPS
 201 platform. The calculation formulas for these statistical indicators are provided in
 202 equations (1) to (3).

$$203 \quad MAE = \frac{1}{n} \sum_{i=1}^n |MIPS(i) - Base(i)| \quad (1)$$

$$204 \quad RMSE = \left[\frac{1}{n} \sum_{i=1}^n (MIPS(i) - Base(i))^2 \right]^{\frac{1}{2}} \quad (2)$$

$$205 \quad MAPE = \frac{1}{n} \sum_{i=1}^n \left| \frac{MIPS(i) - Base(i)}{MIPS(i)} \right| \times 100\% \quad (3)$$

206 In the equations, n represents the number of grids in the domain. $MIPS(i)$ represents the
207 simulated value of a certain grid on the MIPS platform, and $Base(i)$ represents the
208 baseline value of a certain grid on the benchmark platform.

209

210 **2.2 MIPS and LoongArch CPU platforms description**

211 Loongson CPU platform was chosen for the porting work in the study. Currently,
212 the Loongson processor family has three generations of CPU products, evolving from
213 single-core to multi-cores architectures and from experimental prototypes to mass-
214 produced industrial products (Hu et al., 2011). The Loongson-2 processor is a 64-bit
215 general-purpose RISC processor series which is compatible with MIPS instruction set.
216 It can be used in personal computers, mobile terminals, and various embedded
217 applications, running many operating systems such as Linux and Android smoothly
218 (Zhi et al., 2012). Wu et al. (2019) reports the application of the mesoscale model on
219 Loongson 2F CPU platform. The Loongson-3 processor features a scalable multi-core
220 architecture, targeting high-throughput data centers, high-performance scientific
221 computing, and other applications, with the significant advantage of achieving a high
222 peak performance-to-power ratio and striking a well-balanced trade-off between
223 performance and power consumption (Hu et al., 2009).

224 The Loongson 3A series are multi-core processors designed for high-performance
225 computers, featuring with high bandwidth, and low power consumption. The efficient
226 design solution and the advantage of high energy efficiency ratio make servers based
227 on Loongson CPUs highly competitive in performance, power consumption, and cost-
228 effectiveness (Li et al., 2014; Wang et al., 2014). In this study, the Loongson platform
229 uses the Debian Linux operating system, commercially known as Tongxin UOS
230 (<https://www.uniontech.com>, last access: January, 2024), and the Loongson 3A4000
231 processor, which is the first quad-core processor based on GS464v 64-bit
232 microarchitecture in Loongson 3 Processor Family. The main technical parameters of
233 Loongson 3A4000 CPU are shown in Table 3. Compared to previously released CPUs,
234 the processor improves frequency and performance by optimizing on-chip interconnect
235 and memory access path, integrating 64-bit DDR4 memory controller and on-chip

236 security mechanism. The Loongson 3A6000 CPU platform uses Loongnix, the open-
 237 source community edition operating system released by Loongson
 238 (<https://www.loongson.cn/system/loongnix>, last access: January, 2024), and the latest
 239 released Loongson 3A46000 processor, which is a quad-core processor based on LA664
 240 microarchitecture. The main technical parameters of Loongson 3A6000 CPU are shown
 241 in Table 3. The processor supports the LoongArch™ instruction set and hyper-threading,
 242 and the performance has significantly improved compared to the previously released
 243 processors (Hu et al., 2022).

244

245 **Table 3.** Main Parameters of Loongson 3A4000 CPU and Loongson 3A6000 CPU*

Main Parameters	Loongson 3A4000 CPU	Loongson 3A6000 CPU
Main Frequency	1.8GHz–2.0GHz	2.0GHz–2.5GHz
Peak Computing Speed	128Gflops@2.0GHz	240Gflops
Transistor Technology	28nm	12nm
Number of Cores	4	4(Physical) 8(Logical)
Processor Cores	MIPS64 compatible Support 128/256-bit vector instructions	support LoongArch™ Support 128/256-bit vector instructions
High-speed I/O	2 x 16-bit HyperTransport 3.0 control	1 x HyperTransport 3.0 control
Typical Power Consumption	<30W@1.5GHz <40W@1.8GHz <50W@2.0GHz	38W@2.5GHz

246 *source: <https://www.loongson.cn>, last access: January, 2024.

247

248 2.3 Benchmark platform description

249 This study uses an X86 CPU platform as benchmark platform compared to the
 250 MIPS and LoongArch CPU platforms. The benchmark platform is powered by Intel
 251 Xeon E5-2697 v4 CPU, with strong floating-point performance and many technical
 252 features such as Intel Turbo Boost Technology (Intel Inc., 2023). The Intel Xeon E5-
 253 2697 v4 CPU has 18 cores, with 2.3GHz base frequency and 3.6GHz maximum Turbo
 254 Boost frequency, 45 MB Intel Smart Cache and 145W design power consumption. The
 255 operating system is CentOS Linux 7.4.1708. The main information for all platforms is

256 shown in Table 4.

257

258 **Table 4.** The comparison of main configuration between MIPS, LoongArch and X86
259 platforms.

	MIPS Platform	LoongArch Paltform	X86 platform
CPU	Loongson 3A4000	Loongson 3A6000	Intel Xeon E5-2697 v4
Number of CPUs	1	1	1
Number of CPU cores	4	8	18
CPU Frequency	1.8GHz	2.0Ghz	2.3GHz
CPU instruction set	MIPS64	LoongArch™	X86_64
Operating system	Tongxin UOS	Loongnix	CentOS Linux 7.4.1708
Operating system kernel (Linux version)	4.19.0-loongson-3- desktop	4.19.0-19- loongson-3	3.10.0- 957.1.3.el7.x86_64

260

261

262 **2.4 The difference between MIPS, LoongArch and X86 platforms**

263 In this study, the numerical model's source code is written in Fortran, and
264 commonly used compilers for X86 architecture include Intel Compiler, PGI and GNU
265 Compiler. The compiler for MIPS platform is built using GCC 8.3 MIPS GNU/Linux
266 cross-toolchain based on the open-source GNU Project, called MIPS GNU, and the
267 latest version is 8.3. And the compiler for LoongArch platform is built using GCC 8.3
268 LoongArch GNU/Linux cross-toolchain based on the open-source GNU Project, called
269 LoongArch GNU, and the latest version is 8.3. The compiler for the benchmark
270 platform is set to X86 GNU, and the version is also 8.3. Table 5 shows the differences
271 between all platforms' GNU compilers in terms of applicable platforms. Compared to
272 X86 GNU, the default compilation options of MIPS GNU compiler not only specify
273 the platform architecture but also include additional instruction sets, such as atomic

274 operation instruction set LLSC, shared library instruction set PLT, etc., which can
 275 optimize target programs compiled by GNU for MIPS architecture and improve
 276 computational efficiency. And the default compilation options of LoongArch GNU
 277 compiler not only specify the platform architecture but also include target
 278 microarchitecture tuning option, which can also optimize target programs compiled by
 279 GNU for LoongArch architecture.

280 **Table 5.** Comparison of GNU compiler between MIPS, LoongArch and X86 CPU
 281 platforms.

Artitecture	MIPS64	LoongArch	x86_64
Compiler	MIPS GNU Fortran	LoongArch GNU Fortran	X86 GNU Fortran
Version	8.3	8.3	8.3
Target	mips64el-linux-gnuabi64	loongarch64-linux-gnu	x86_64-redhat-linux
Options (Architecture)	-march=mips64r2 -mabi=64	-march=loongarch64 -mabi=lp64d	-march=x86-64 -mtune=generic
Options (Instruction set)	-mllsc -mplt - mmadd4	-mtune=loongarch64	/
FLAGS(WRF)	-fconvert=big-endian -frecord-marker=4 -ffree-line-length-none -O2 -ftree-vectorize -funroll-loops		
FLAGS(CAMx)	-fconvert=big-endian -frecord-marker=4 -ffixed-line-length-none -fno-align-commons -O2		

282 The WRF-CAMx modeling system depends on several scientific computing
 283 libraries. Firstly, the general data format libraries netCDF and HDF5 are required to
 284 store the large-scale gridded data for the modeling system. NetCDF is a self-describing
 285 data format developed by NCAR/Unidata, primarily used for storing multidimensional
 286 array data in fields like meteorology and earth sciences (UCAR/Unidata, 2021). HDF5
 287 is a data format developed by HDF GROUP that supports complex data structures with
 288 multiple data types and multi-dimensional datasets (The HDF Group, 2019). In this
 289 study, netCDF-C (v4.8.1), netCDF-Fortran (v4.5.3), HDF5 (v1.12.1) and IOAPI (v3.1)
 290 were successfully installed on MIPS and LoongArch platforms by building from their
 291 sources, which are obtained from the official website.

292 The MPICH library is required to support parallel computing in the modeling
 293 system. In order to fully utilize computing resources, the method of MPI message

294 communication is used in WRF and CAMx model (Wu et al., 2012). MPICH is an
295 open-source, portable parallel computing library for implementing the MPI standard
296 (Amer et al., 2021). It supports inter-process communication and data exchange in the
297 parallel computing environment. Similarly, this study successfully installed MPICH
298 (v3.4) on MIPS and LoongArch platforms by building from its source. During the
299 compilation and installation of the mentioned libraries above, the configure tool was
300 used to check the basic information of the platform's CPU and compiler, and prepare
301 for compatibility with platform before compilation, the GNU compiler is used to
302 compile the source code of libraries, and the cmake tool is used to install the libraries.
303 Additionally, the same runtime environment as MIPS platform was also built on the
304 benchmark platform.

305

306 **3 Porting the WRF-CAMx modelling system on MIPS and LoongArch** 307 **CPU platforms**

308 The simulation result is influenced by several factors including processor
309 architecture, operating system, compiler, parallel environment, and scientific
310 computing libraries. In order to ensure stability and accuracy of numerical simulation,
311 the models should be adapted to the new runtime environment when porting across
312 platforms. Additionally, various operating systems have different tools, software and
313 libraries, which may impact the results of numerical simulations.

314 In this study, the runtime environment for WRF-CAMx modeling system was built
315 on MIPS and LoongArch platforms, including parallel computing libraries such as
316 MPICH3 (v3.4) and data format libraries such as HDF5 (v1.15.1) and NETCDF (C-
317 v4.8.1, Fortran-v4.5.3). These libraries do not support the architecture (mips64el and
318 LoongArch) and GNU compiler of Loongson platform. Relevant information needs to
319 be added to the free software config.guess and config.sub provided by GNU org. Part
320 of the information is shown in subfigure a) in Figure 3, which can help identify the
321 platform architecture and system during the compilation and installation of libraries
322 using Configure and Make tools. The configuration files for making the models were

323 modified to fit the compilers of the Linux system on MIPS and LoongArch platforms.
324 In order to verify the stability of scientific computing on MIPS and LoongArch
325 platforms, a control experiment was set up on the benchmark platform, minimizing the
326 impact of other factors on simulation results of both platforms.

327 The WRF v4.0 and CAMx v6.10 were successfully deployed on MIPS and
328 LoongArch platforms through source code compilation and installation. In the WRF
329 model, the default options for GNU compiler which are suitable for MIPS and
330 LoongArch architecture CPUs are not provided in the configure file of the source code
331 package, and it is necessary to incorporate architecture-specific settings for the model.
332 For example, the architecture presets are stored in the configure.defaults file, but
333 settings about the Loongson platform is not included. Specific architecture details,
334 including CPU architecture, GNU compiler and compilation flags, need to be added,
335 which can ensure the correct display of configuration during building WRF model, and
336 part of information is shown in subfigure b) in Figure 3. Table 5 provides the detailed
337 information added in the configure file, mainly about MIPS and LoongArch GNU
338 Fortran. When compiling Fortran programs on MIPS and LoongArch platforms, the
339 MIPS and LoongArch GNU Fortran and necessary compilation flags must be specified.
340 These flags include common Fortran file format flags such as `-fconvert=big-endian` and
341 `-frecord-marker=4`, as well as optimization flags such as `-O2 -ftree-vectorize -funroll-`
342 `loops`. By specifying the appropriate compiler and flags for MIPS and LoongArch
343 architectures, the configure tool will provide necessary settings to compile WRF.
344 Correspondingly, when compiling WRF on the benchmark platform, the compilation
345 flags are strictly consistent with those of MIPS and LoongArch CPU platforms, which
346 ensures that differences in simulation results of two platforms are primarily attributed
347 to the underlying hardware architecture rather than changes in compilation settings.

348 In the CAMx model, the makefile provides information about parallelism and
349 compilers. Similarly, information about the CPU architecture, GNU compiler, and
350 compilation flags on MIPS and LoongArch platforms also needs to be added in the
351 makefile. For the detailed information added in the makefile, please refer to Table 5.
352 Additionally, the code of CAMx was modified to make it run smoothly on MIPS and

353 LoongArch platform. Taking some function in the CAMx model for example, the model
354 frequently uses the “write” function for formatted output. The format specifiers in the
355 parameters consist of data types (I, F, E, A, X, etc.) followed by a character width. In
356 the CAMx model, the format specifiers in the write function mostly default to character
357 width, but there is a compilation issue with MIPS GNU, requiring character width
358 descriptors. It is also essential to ensure consistency with the default precision. A
359 specific example is illustrated in the figure below. A specific example is showed in in
360 subfigure c) in Figure 3. So far, the WRF-CAMx model has been successfully compiled
361 and installed on the MIPS and LoongArch platforms after modifications of the
362 configuration files mentioned above.

```
a)
''
loongarch32:Linux:*:*) | loongarch64:Linux:*:*)
  GUESS=$UNAME_MACHINE-unknown-linux-$LIBC
  ;;
''
mips64el:Linux:*:*)
  GUESS=$UNAME_MACHINE-unknown-linux-$LIBC
  ;;
```

```
b)
#ARCH      Linux mips64, gfortran compiler with gcc #serial smpar dmpar dm+sm
#
DESCRIPTION = GNU ($SFC/$SCC)
DMPARALLEL  = # 1
OMPCPP      = # -D_OPENMP
OMP         = # -fopenmp
OMPCC       = # -fopenmp
SFC         = gfortran
SCC         = gcc
CCOMP       = gcc
DM_FC       = mpif90 -f90=$(SFC)
DM_CC       = mpicc -cc=$(SCC)
FC          = CONFIGURE_FC
CC          = CONFIGURE_CC
LD          = $(FC)
RWORDSIZE  = CONFIGURE_RWORDSIZE
PROMOTION  = #-fdefault-real-8
ARCH_LOCAL  = -DNONSTANDARD_SYSTEM_SUBR -DWRF_USE_CLM
CFLAGS_LOCAL = -w -O3 -c
LDFLAGS_LOCAL =
CPLUSPLUSLIB =
ESMF_LDFLAG = $(CPLUSPLUSLIB)
FCOPTIM     = -O2 -ftree-vectorize -funroll-loops
FCREDUCEOPT = $(FCOPTIM)
FCNOOPT     = -O0
```

```
c)
Before modification:
  write (iout,'(a,2a)') ' spec','total [ug/m3]','c* [ug/m3] '
  write (iout,'(i5,2e)') (idx(i),sctot(i),scsat(i),i=1,nsol)
  write (iout,'(a,2e)') ' cpre,cpx ',cpre,cpx
After modification:
  write (iout,'(a5,2a15)') ' spec','total [ug/m3]','c* [ug/m3] '
  write (iout,'(i5,2e15.7)') (idx(i),sctot(i),scsat(i),i=1,nsol)
  write (iout,'(a5,2e15.7)') ' cpre,cpx ',cpre,cpx
```

363

364 Figure 3. Sample codes containing configure index, architecture-specific settings and
 365 functions in the WRF-CAMx model. Panel a) provides architecture information for
 366 configuration. Panel b) shows architecture-specific settings for WRF. Panel c)
 367 illustrates the sample code of functions in the CAMx before and after modification.


368 4 The differences of model results on the two platforms

369 4.1 Validation of the spatial distribution

370 A 72h simulation case has been designed to test the stability and availability of the
 371 WRF-CAMx modeling system on the MIPS CPU platform in Beijing. By analyzing the
 372 differences in simulation results and computing time, the accuracy and performance of

373 the modeling system on MIPS platform were evaluated, which further verifies the
 374 feasibility and stability of the modeling system after porting to the MIPS platform.

375 Common meteorological variables, including 2-meter temperature, land surface
 376 pressure, and relative humidity were selected to verify the WRF model results. Figure
 377 4 shows the spatial distribution of the four meteorological variables after 72 hours
 378 simulation on different platforms, as well as the absolute errors (AEs). The
 379 meteorological variables from the modeling system on the different platforms exhibit a
 380 generally consistent spatial distribution in the Beijing-Tianjin-Hebei regions shown in
 381 Figure 4.

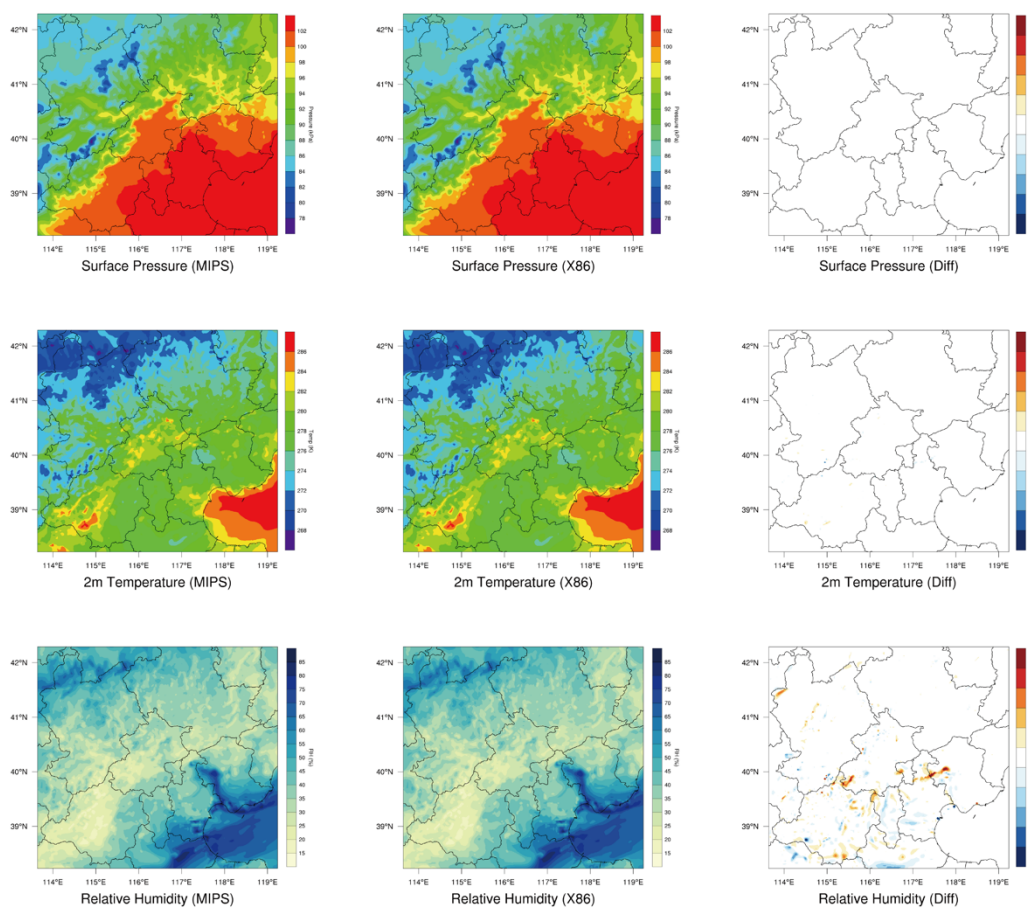


382
 383 **Figure 4.** Spatial distribution of 2m temperature, surface pressure, relative humidity
 384 from WRF. Left column, MIPS platform. Middle, the X86 platform. Right, the
 385 differences between the MIPS and benchmark(X86) platform.

386

387 Similarly, the NO₂, SO₂, O₃, CO, PNO₃ and PSO₄ were selected to verify the

388 CAMx model results on the MIPS platform. Figure 5 shows the spatial distribution of
389 the six species, as well as the absolute errors (AEs) between the two platforms after 72
390 hours simulation. Simulating the 72h-case with four parallel processes using MPICH,
391 CAMx takes about 9h on Loongson 3A4000 CPU and 2.6h on Intel Xeon E5-2697 v4
392 CPU. As shown in Figure 5, the spatial distribution of air pollution concentrations from
393 the different platforms is essentially consistent, appearing very similar visually.

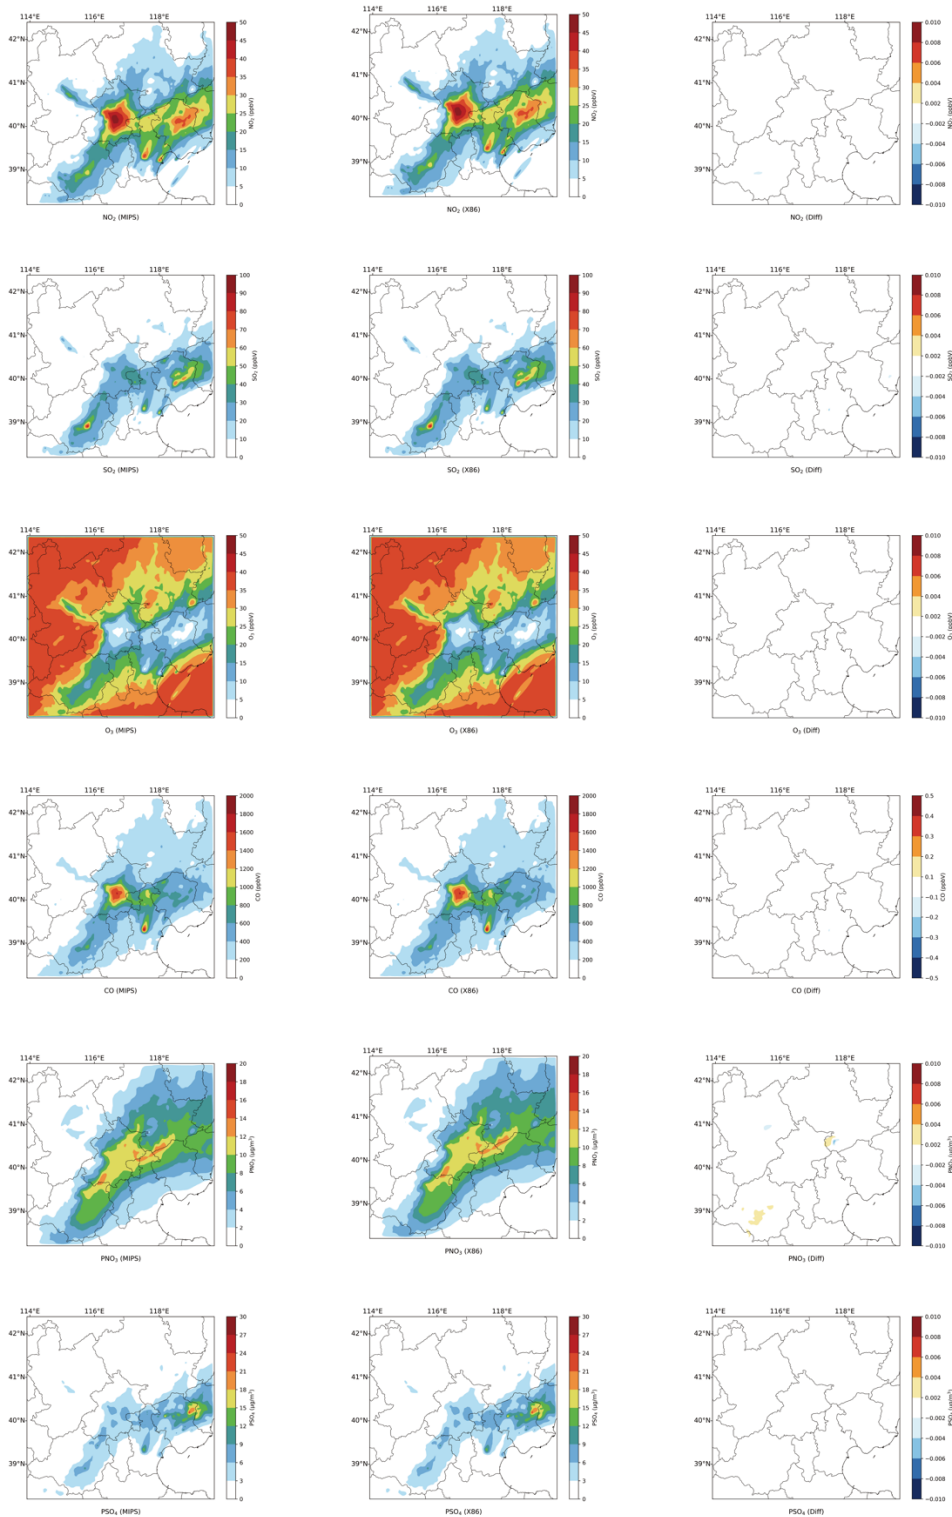


394

395 **Figure 5.** Spatial distribution of NO₂, SO₂, O₃, CO, PNO₃ and PSO₄ from CAMx on
 396 MIPS and benchmark platform. Left column, MIPS platform. Middle, the X86 platform.
 397 Right, the differences between the MIPS and benchmark(X86) platform.

398

As shown in Figure 6, the scatter plots between the two platform, it can be seen


399 that for the total of 22,765 grids within the 145x157 simulation domain, the root mean
 400 square errors (RMSEs) of the six species between the MIPS platform and benchmark
 401 platform are close to 0.001, which is essentially 0. The linear regression model was
 402 used to fit the scatters, and the regression slopes for each species are nearly 1, with
 403 intercepts close to 0, and the R2 values used for the goodness of fit are nearly 1. The
 404 fitted lines closely coincide with the “y=x” line, indicating that the differences between
 405 the MIPS and X86 platform for each species are minimal to negligible.

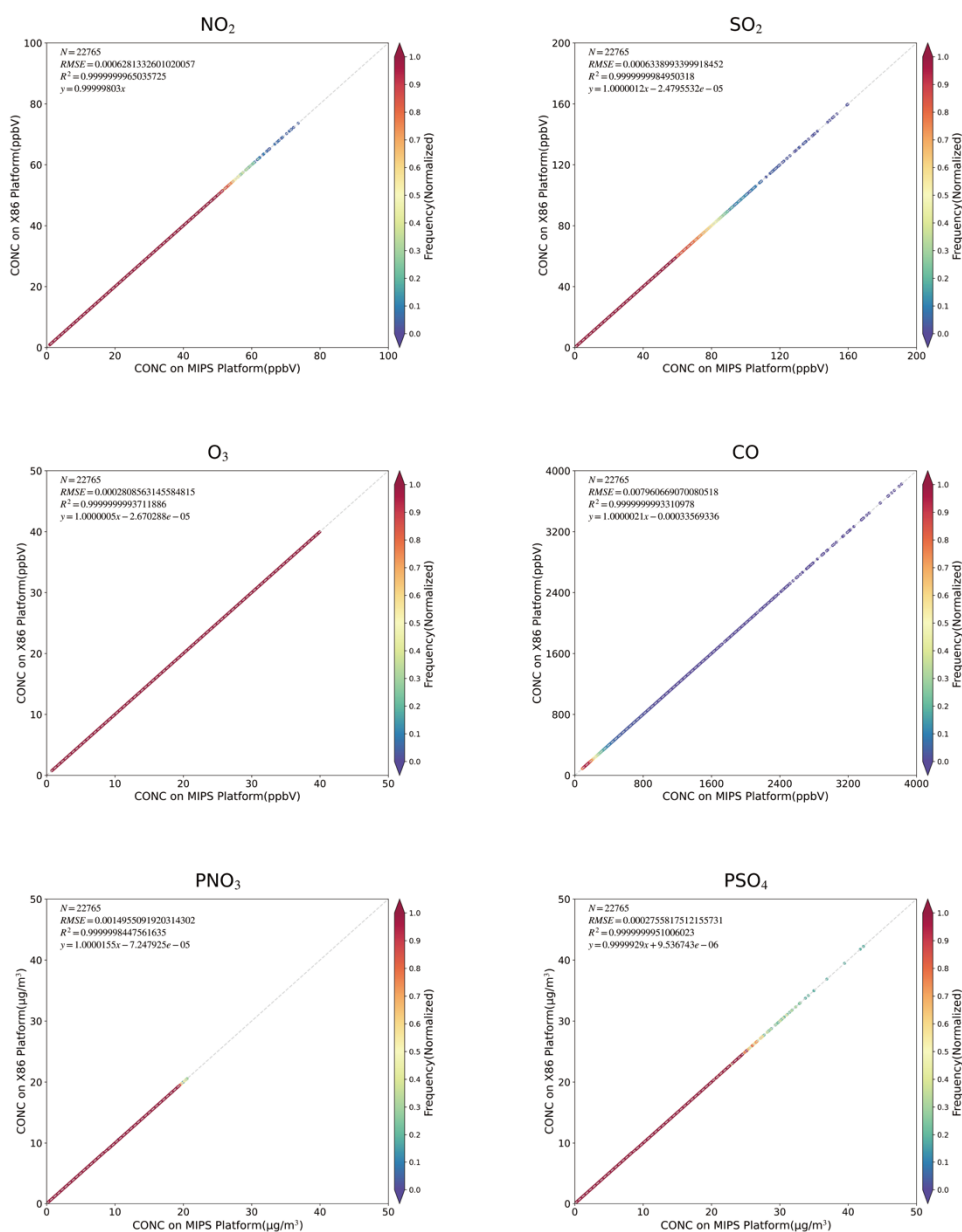

406
 407 **Figure 6.** Scatter of grid concentrations for NO₂, SO₂, O₃, CO, PNO₃ and PSO₄ from
 408 CAMx on the MIPS and benchmark platform. The density of scatters is represented by

409 the colors.

410 Figure 7 is the boxplots which show the absolute errors (AE) and relative errors
411 (RE) of the six species between MIPS and benchmark platform. According to Figure 7,
412 the absolute errors of the six species are generally in the range of $\pm 10^{-3}$ ppbv (parts per
413 billion by volume; the unit of NO₂, SO₂, O₃ and CO concentration) or $\mu\text{g m}^{-3}$ (the unit
414 of particle composition PNO₃ and PSO₄), and the relative errors are generally in the
415 range of $\pm 0.01\%$. Specially for CO, it exhibits more pronounced AEs compared to other
416 species. In some grid boxes, the AEs between MIPS and benchmark platform exceed
417 the range of $\pm 10^{-3}$ ppbv, but they remain in the range of $\pm 10^{-2}$ ppbv. In summary, there
418 are some errors between the results of the modeling system on the MIPS and benchmark
419 platform during the porting process. However, these errors are relatively minor
420 compared to the numerical values. The reasons are attributed to the differences in the
421 CPU architecture and compiler characteristics between the two platforms, such as data
422 operations and precision running on different CPUs, which are primarily responsible
423 for the observed errors.

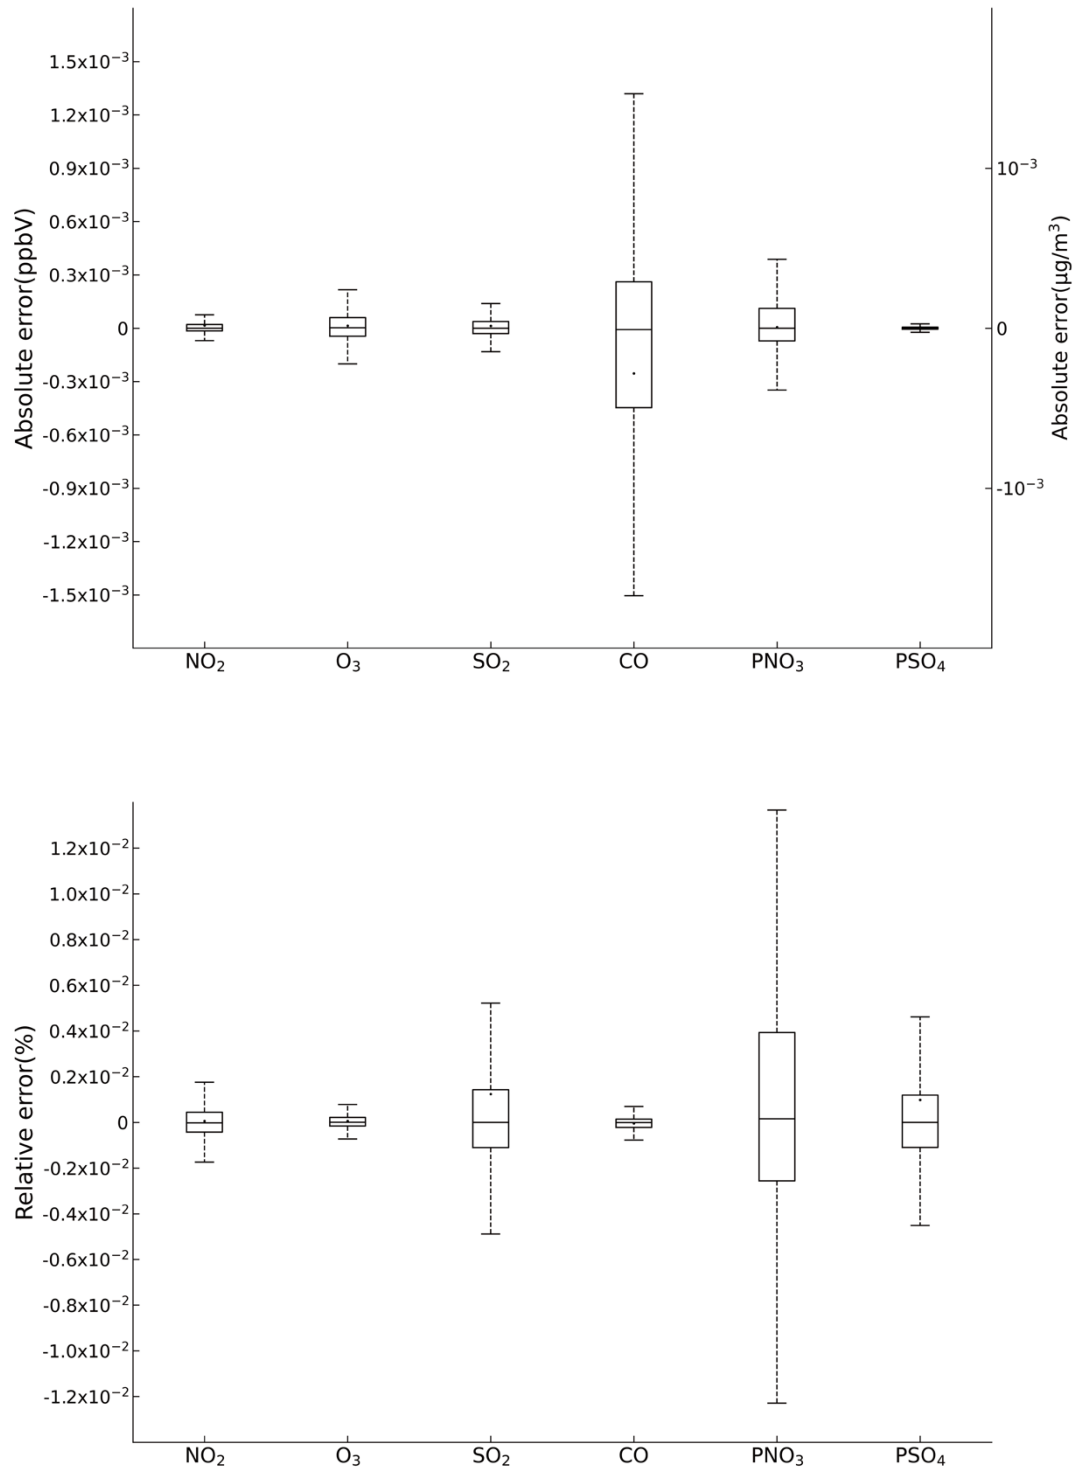

424

425 **Figure 7.** The absolute errors and relative errors for NO₂, SO₂, O₃, CO, PNO₃ and PSO₄
 426 concentration in all grids between the MIPS and benchmark platform.


427 Additionally, random grids in the domain were selected to assess the precision of
 428 simulation results in localized regions. The positions of these grids were determined

429 based on 32 observation stations in Beijing, and the nearest grid was determined using
430 the Euclidean Shortest Distance in the domain. The station map is presented in Figure
431 S1 in the Supplement. The Taylor diagram is used to assess the precision of
432 concentrations for six species near the observation stations, and the scatters
433 representing the six species at 32 stations are highly overlapping. Statistical parameters
434 used in the Taylor diagram, such as the correlation coefficient (R) approaching 1,
435 normalized standard deviation (NSD) and normalized root mean square error (NRMSE)
436 approaching 0, indicate high precision of the simulation results at specific stations on
437 the MIPS platform.

438

439 **4.2 Validation of the temporal distribution from the two platform**

440 The time series of computational differences also be evaluated in this study.
441 Random grid in the domain was selected to examine the hourly concentrations of the
442 six species. Taking the example of the Beijing Olympic Center station (116.40°E,
443 39.99°N) from the National Standard Air Quality (NSAQ) stations, the time series of
444 hourly concentrations in the grid of the Beijing Olympic Center station and relative
445 errors between the MIPS and benchmark platform over the 72-hour period were shown
446 in Figure 8. As shown in Figure 8, it can be seen that the time series of the air pollutant
447 concentrations were highly consistent between the two platforms. In the 72-hour period,
448 the relative errors for NO₂, SO₂, CO and PSO₄ remain in ±0.025%. For PNO₃, the
449 relative errors remain in ±0.05%, and for O₃, they remain in ±0.1%. This indicates that
450 the errors caused by different architectures are within a reasonable range.

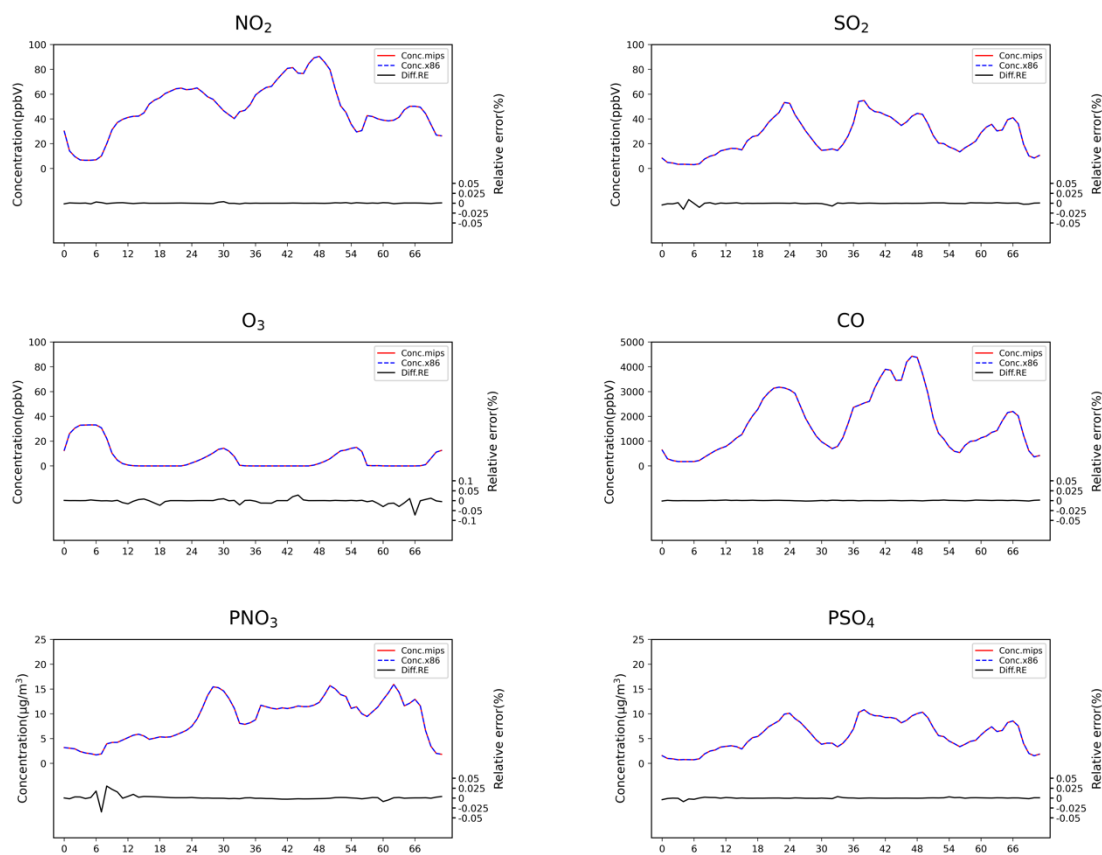


451

452 **Figure 8.** Time-series of NO₂, SO₂, O₃, CO, PNO₃ and PSO₄ concentrations and its
 453 relative errors (RE) at the Beijing Olympic Sports Center site between the MIPS and
 454 X86 platform. The red solid line and the blue dashed line, the CAMx model results on
 455 MIPS platform and X86 platform. The black solid line shows the relative errors (RE)
 456 between the MIPS and X86 platform.

457

458 Figure 9 shows the time series of the concentration and their statistical indicators,
 459 MAE, RMSE, and MAPE during the 72-hour simulation. As show in the figure, for
 460 NO₂, SO₂, O₃, and PSO₄, the MAEs are all below 10⁻³ ppbv (µg m⁻³), and the RMSEs
 461 are all below 10⁻³. The MAEs for CO and PNO₃ are below 10⁻² ppbv (µg m⁻³), and the
 462 RMSEs for PNO₃ are below 10⁻², while the RMSEs for CO are below 10⁻¹. This is
 463 because that PNO₃ and CO have relatively higher background concentrations compared
 464 to the other species. The MAPE of PNO₃ concentration mainly ranging in 0-0.5%, while
 465 the MAPE of CO concentration has the lowest values below 0.001%, and the other
 466 species are in the range of 0-0.01%. Overall, the above time-series analysis verifies the
 467 accuracy and stability of the modeling system on the MIPS platform.

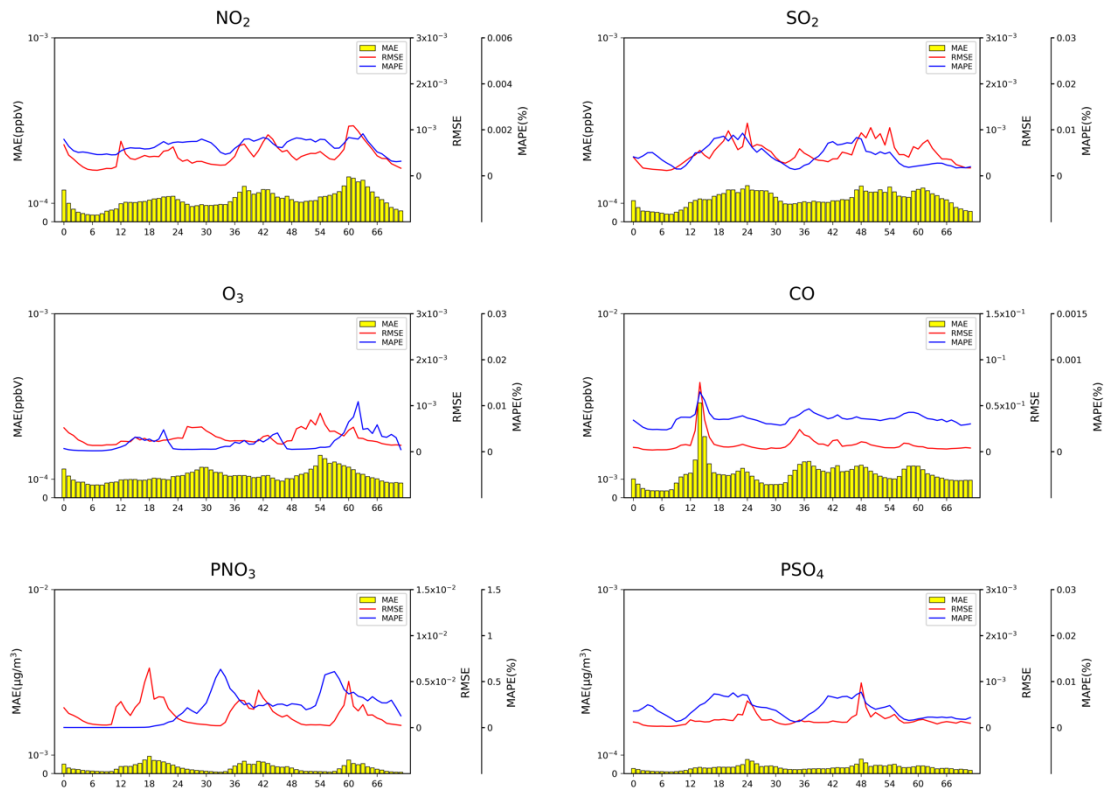

468

469 **Figure 9.** Time series of MAEs, RMSEs and MAPEs for NO₂, SO₂, O₃, CO, PNO₃ and
 470 PSO₄ concentration in the 72h simulation. The yellow bar, the MAE. The red lines,
 471 RMSE, the blue lines, MAPE.

472

473 In this study, the evaluation method proposed by Wang et al. (2021) was also used
 474 to assess the scientific applicability of the model results on the MIPS platform. The
 475 Root Mean Square Errors (RMSEs) for NO₂, SO₂, O₃, CO, PNO₃ and PSO₄
 476 concentration between the MIPS and benchmark platform were computed, along with
 477 the standard deviations (stds) used to describe the spatial variation of species, and the
 478 ratio of RMSE to std, as shown in Table 6. The differences of the four species between
 479 the two platforms are negligible compared to their own spatial variations. Therefore,
 480 the results on the MIPS platform meet the accuracy requirements for research purpose.

481

482 **Table 6.** RMSE, std, RMSE/std for NO₂, SO₂, O₃, CO, PNO₃ and PSO₄.

	Differences in results	Spatial variation	RMSE/std
	RMSE	std	
NO ₂	6.3×10^{-7}	0.01	5.9×10^{-5}

O₃	2.8×10^{-7}	0.01	2.5×10^{-5}
SO₂	6.3×10^{-7}	0.02	3.9×10^{-5}
CO	7.9×10^{-6}	0.30	2.6×10^{-5}
PNO₃	1.5×10^{-3}	3.8	3.9×10^{-4}
PSO₄	2.7×10^{-4}	3.9	6.9×10^{-5}

483

484 In fact, the differences in model results cannot be completely eliminated, primarily
485 due to the varying CPU architectures and compilers. In the practical applications,
486 compared with the errors arising from the inherent uncertainties of the modeling system
487 and the input data, the differences of model results between different platforms can even
488 be considered negligible. The comprehensive analysis demonstrates that the results of
489 the WRF-CAMx modeling system on the MIPS CPU platform are reasonable.

490


491 **5 The evaluation about computational performance**

492 Scientific computing involves a significant amount of floating-point operations,
493 and the floating-point computational capability is a crucial indicator for CPU
494 performance. In this study, the simulation case was configured to conduct parallel
495 computing tests on the MIPS, LoongArch and benchmark platform. These tests
496 included assessing the CPU's single-core performance with the non-parallel model and
497 the platform's parallel performance with the parallel model using multiple processes.
498 The time of CAMx model running simulation case for 24 hours in the modeling system
499 are shown in Figure 10. From the figure, it can be observed that under single-core
500 conditions, the computing capability of the MIPS platform for CAMx is approximately
501 one-third of the X86 benchmark platform, and the LoongArch platform is slightly lower
502 than the X86 benchmark platform.


503 It's worth noting that the simulation time of the CAMx model for running with two
504 processes in parallel and running in non-parallel remains approximately consistent. This
505 is because the MPI used in CAMx is designed using a "master/slave" parallel processing
506 approach, and a process is allocated for input/output and message communication
507 during the runtime (Cao K et al., 2023). This process doesn't perform any simulation in
508 the model. Therefore, the time required for parallelism of two processes is comparable

509 to the non-parallelism, and in some cases, it might even be slightly longer due to the
510 overhead of MPI communication. Compared to non-parallel, the speedup of the MIPS
511 platform with four-process parallelism using MPICH3 is approximately 2.8, while
512 using OpenMP is about 2.9, and the speedup of the LoongArch platform with four-
513 process parallelism using MPICH3 is approximately 2.8, while using OpenMP is about
514 2.9. For the X86 benchmark platform, running with four processes in parallel using
515 MPICH3 has a speedup of approximately 2.7.

516 Additionally, the performance of the MIPS platform significantly decreases when
517 the number of parallel processes exceeds 4. This is because the modeling system
518 involves compute-intensive tasks. The Loongson 3A4000 CPU has four cores, and
519 when the number of processes called by MPI matches the number of CPU cores, the
520 CPU utilization can approach 100%. Further increasing the number of processes, the
521 cores will compete for CPU resources, resulting in additional overhead and reduced
522 computational efficiency. As for LoongArch platform, the performance slightly
523 decreases when the number of parallel processes exceeds 4. The Loongson 3A6000
524 CPU has four physical cores and eight logical cores, and when the number of processes
525 called by MPI matches the number of physical cores, the computational load is evenly
526 distributed across each core. Although the Loongson 3A6000 supports hyper-threading,
527 further increasing the number of processes, CPU starts to schedule logical cores to
528 allocate computational load. Thread scheduling will result in additional overhead and
529 reduced computational efficiency. This explains why the elapsed time is slightly higher
530 when CAMx running with 5 parallel processes compared to 4 parallel processes as
531 shown in the section 2 of Supplementary Material.

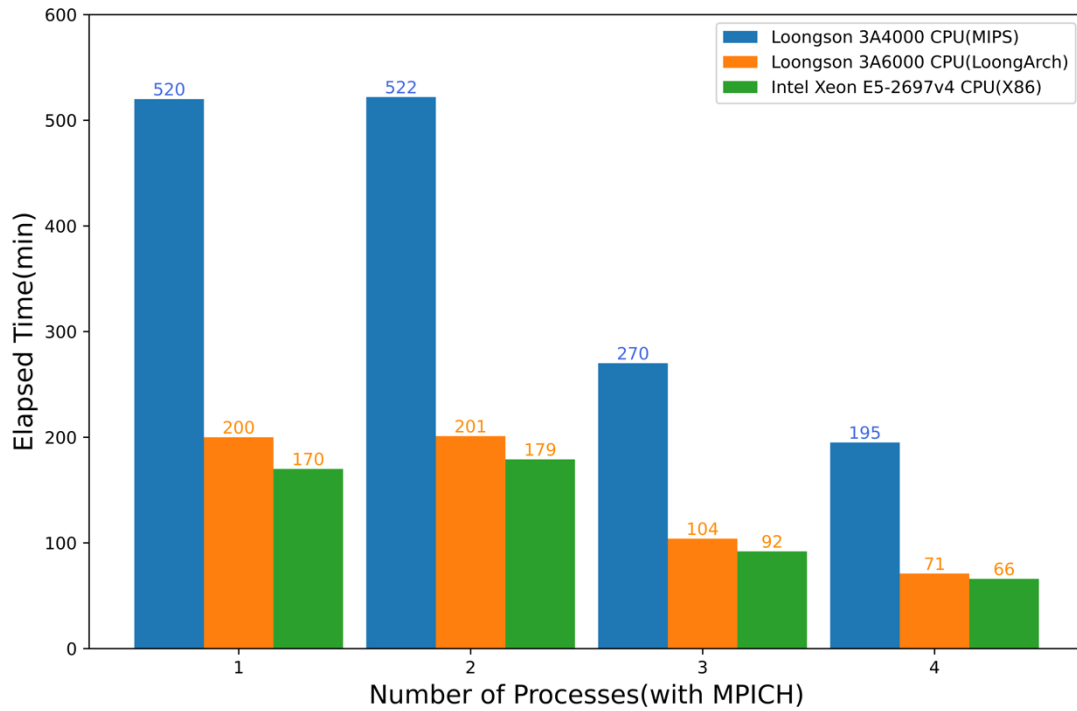

532

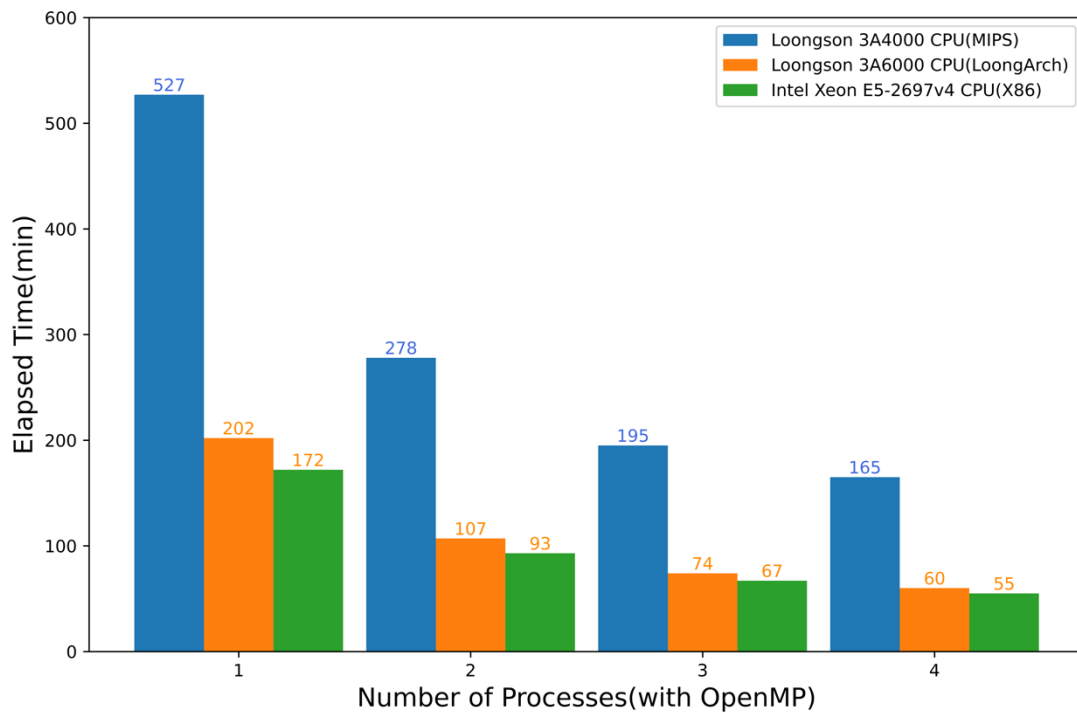

533

534 **Figure 10.** Elapsed time of CAMx model running simulation case with MPICH and
 535 OpenMP for 24 hours on the MIPS, LoongArch and benchmark platforms.

536

537 In the recent years, the Loongson CPUs have been continuously upgraded.
 538 Compared to the previous generations of products, the performance of Loongson CPUs
 539 has shown significant improvement. Wu et al. (2019) simulated a nested domain

540 covering Beijing for 48 hours using the MM5 model on the Loongson 3A quad-core
541 CPU platform. The results showed that the computational capacity of the Loongson 3A
542 platform for the MM5 model is approximately equivalent to around 1/12 of the Intel
543 Core 2 Q8400 quad-core CPU, which was released in the same year. In the study of
544 Luo et al. (2011), a comparison between Loongson 3A and Intel i5 was made by running
545 NPB benchmark on each platform. The results shows that the performance of the 3A is
546 nearly one-tenth of that of the i5. The rapid development of Loongson CPUs has
547 provided a strong hardware foundation for the application of numerical simulation and
548 scientific computing on MIPS and LoongArch architecture CPU platforms. Based on
549 the performance evaluation of WRF-CAMx modeling system on Loongson 3A4000
550 and Loongson 3A6000 platform, it could be found that the computing capability nearly
551 tripled while maintaining similar power consumption. The adaptation and optimization
552 of the models based on RISC CPUs will also be an important research direction in the
553 future. Many factors influencing parallel performance, such as computing scale, I/O,
554 multiprocessor, etc., will be considered to evaluate on platforms with stronger
555 performance and more processors in the future.

556

557 **6 Conclusion**

558 This study describes the application of the WRF-CAMx model on the MIPS CPU
559 platform. The platform used in this study is Loongson 3A4000 quad-core CPU with the
560 main frequency of 1.8-2.0GHz, which can offer a peak operational speed of 128GFlops.
561 It is equipped with the MIPS GNU compiler. The benchmark platform used the Intel
562 Xeon E5-2697 v4 CPU along with the same version of X86 GNU compiler. Based on
563 the characteristics of CPU architecture and compiler, this study has successfully
564 completed the construction of runtime environment for the WRF-CAMx modeling
565 system. The application of an air quality modelling system based on WRF-CAMx was
566 successfully tested using a 72-hour simulation case in the Beijing-Tianjin-Hebei region.

567 The results showed that the spatial distribution of the meteorological variables and
568 air pollutant species was nearly identical, with relative errors in the range of $\pm 0.1\%$.

569 Statistically, the maximum MAEs of major species ranged from 10^{-3} to 10^{-2} ppbv (μg
570 m^{-3}), the maximum RMSEs ranged from 10^{-2} to 10^{-1} ppbv (μg m^{-3}), and the MAPEs
571 remained within 0.5%, that the differences caused by the architectures and compilers
572 were within a reasonable range. Simulating a 2h-case with four parallel processes using
573 MPICH, CAMx takes about 15.2min on Loongson 3A4000 CPU and 4.8 min on Intel
574 Xeon E5-2697 v4 CPU. In terms of single-core CPU performance, the single-core
575 computing capability of Loongson 3A4000 CPU for the WRF-CAMx modeling system
576 is about one-third of Intel Xeon E5-2697 v4 CPU.

577 Currently, Loongson Technology has focused on the LoongArch architecture and
578 it has been used in the latest product. It is foreseeable that the LoongArch architecture
579 will lead to more significant performance improvements. In the future, as the numerical
580 models become more complex and computational scales become larger, more models
581 will be tested on high-performance computing platforms equipped with the LoongArch
582 architecture CPUs.

583

584 ***Code and data availability.*** The source codes of CAMx version 6.10 are available at
585 <https://camx-wp.azurewebsites.net/download/source> (ENVIRON, 2023). The datasets
586 related to this paper and the binary executable files of CAMx for MIPS and LoongArch
587 CPUs are available online via ZENODO (<https://doi.org/10.5281/zenodo.10722127>).

588

589 ***Supplement.*** The supplement related to this article is available on-line.

590

591 ***Author contributions.*** ZB and QW conducted the simulation and prepared the materials.
592 QW planned and organized the project. ZB and QW completed the porting and
593 application of the model for MIPS and LoongArch CPUs. YS collected and prepared
594 the emission data for the simulation. ZB, QW, KC, and HC participated in the
595 discussion.

596

597 ***Acknowledgements.*** The National Key R&D Program of China (2020YFA0607804)
598 and the Beijing Advanced Innovation Program for Land Surface funded this work. The

599 research is supported by the High Performance Scientific Computing Center (HSCC)
600 of Beijing Normal University.

601

602 **Competing interests.** The contact author has declared that none of the authors has any
603 competing interests.

604

605 **References**

- 606 Amer, A., Balaji, P., Bland, W., Gropp, W., Guo, Y., Latham, R., Lu, H., Oden, L., Pena, A. J.,
607 Raffenetti, K., Seo, S., Si, M., Thakur, R., Zhang, J., and Zhao, X.: MPICH User's Guide
608 Version 3.4, available at: <https://www.mpich.org/static/downloads/3.4/mpich-3.4-userguide.pdf>,
609 2021.
- 610 Appel, K. W., Napelenok, S. L., Foley, K. M., Pye, H. O. T., Hogrefe, C., Luecken, D. J., Bash, J.
611 O., Roselle, S. J., Pleim, J. E., Foroutan, H., Hutzell, W. T., Pouliot, G. A., Sarwar, G., Fahey, K.
612 M., Gantt, B., Gilliam, R. C., Heath, N. K., Kang, D., Mathur, R., and Schwede, D. B.: Description
613 and evaluation of the Community Multiscale Air Quality (CMAQ) modeling system version 5.1,
614 Geoscientific Model Development, 10, 1703–1732, <https://doi.org/10.5194/gmd-10-1703-2017>,
615 2017.
- 616 Appel, K. W., Bash, J. O., Fahey, K. M., Foley, K. M., Gilliam, R. C., Hogrefe, C., Hutzell, W. T.,
617 Kang, D., Mathur, R., Murphy, B. N., Napelenok, S. L., Nolte, C. G., Pleim, J. E., Pouliot, G. A.,
618 Pye, H. O. T., Ran, L., Roselle, S. J., Sarwar, G., Schwede, D. B., Sidi, F. I., Spero, T. L., and
619 Wong, D. C.: The Community Multiscale Air Quality (CMAQ) model versions 5.3 and 5.3.1:
620 system updates and evaluation, Geoscientific Model Development, 14, 2867–2897,
621 <https://doi.org/10.5194/gmd-14-2867-2021>, 2021.
- 622 Bai, X., Tian, H., Liu, X., Wu, B., Liu, S., Hao, Y., Luo, L., Liu, W., Zhao, S., Lin, S., Hao, J., Guo,
623 Z., and Lv, Y.: Spatial-temporal variation characteristics of air pollution and apportionment of
624 contributions by different sources in Shanxi province of China, Atmospheric Environment, 244,
625 117926, <https://doi.org/10.1016/j.atmosenv.2020.117926>, 2021.
- 626 Cao, K., Wu, Q., Wang, L., Wang, N., Cheng, H., Tang, X., Li, D., and Wang, L.: GPU-HADVPPM
627 V1.0: a high-efficiency parallel GPU design of the piecewise parabolic method (PPM) for
628 horizontal advection in an air quality model (CAMx V6.10), Geosci. Model Dev., 16, 4367–4383,
629 <https://doi.org/10.5194/gmd-16-4367-2023>, 2023.
- 630 Chen, H. S., Wang, Z. F., Li, J., Tang, X., Ge, B. Z., Wu, X. L., Wild, O., and Carmichael, G. R.:
631 GNAQPMS-Hg v1.0, a global nested atmospheric mercury transport model: model description,
632 evaluation and application to trans-boundary transport of Chinese anthropogenic emissions,
633 Geoscientific Model Development, 8, 2857–2876, <https://doi.org/10.5194/gmd-8-2857-2015>,
634 2015.
- 635 George, A. D.: An overview of RISC vs. CISC, in: [1990] Proceedings. The Twenty-Second
636 Southeastern Symposium on System Theory, The Twenty-Second Southeastern Symposium on
637 System Theory, Cookeville, TN, USA, 436–438, <https://doi.org/10.1109/SSST.1990.138185>,
638 1990.

639 Hennessy, J., Jouppi, N., Przybylski, S., Rowen, C., Gross, T., Baskett, F., and Gill, J.: MIPS: A
640 microprocessor architecture, SIGMICRO Newsl., 13, 17–22,
641 <https://doi.org/10.1145/1014194.800930>, 1982.

642 Hu, W., Wang, J., Gao, X., Chen, Y., Liu, Q., and Li, G.: Godson-3: A Scalable Multicore RISC
643 Processor with x86 Emulation, IEEE Micro, 29, 17–29, <https://doi.org/10.1109/MM.2009.30>,
644 2009.

645 Hu, W., Zhang, Y., and Fu, J.: An introduction to CPU and DSP design in China, Sci. China Inf. Sci.,
646 59, 1–8, <https://doi.org/10.1007/s11432-015-5431-6>, 2016.

647 Hu, W., Gao, X., and Zhang, G.: Building the software ecosystem for the Loongson instruction set
648 architecture, Information and Communications Technology and Policy, 43–48, 2022 (in Chinese).

649 Hu, W.-W., Gao, Y.-P., Chen, T.-S., and Xiao, J.-H.: The Godson Processors: Its Research,
650 Development, and Contributions, J. Comput. Sci. Technol., 26, 363–372,
651 <https://doi.org/10.1007/s11390-011-1139-2>, 2011.

652 Intel Inc.: Intel® 64 and IA-32 Architectures Software Developer’s Manual, Volume 1: Ba
653 sic Architecture, available at: [https://www.intel.com/content/www/us/en/developer/articles/te
654 chnical/intel-sdm.html](https://www.intel.com/content/www/us/en/developer/articles/technical/intel-sdm.html), 2023.

655 Li, L., Chen, Z., and Wang, S.: Power Consumption and Analysis of Server Based on Loongson
656 CPU No. 3, Information Technology & Standardization, 46–50, 2014 (in Chinese).

657 Liu, Y., Ye, K., and Xu, C.-Z.: Performance Evaluation of Various RISC Processor Systems: A Case
658 Study on ARM, MIPS and RISC-V, in: Cloud Computing – CLOUD 2021, Cham, 61–74,
659 https://doi.org/10.1007/978-3-030-96326-2_5, 2022.

660 Luo, Q., Kong, C., Cai, Y., and Liu, G.: Performance Evaluation of OpenMP Constructs and Kernel
661 Benchmarks on a Loongson-3A Quad-Core SMP System, in: 2011 12th International Conference
662 on Parallel and Distributed Computing, Applications and Technologies, 2011 12th International
663 Conference on Parallel and Distributed Computing, Applications and Technologies, 191–196,
664 <https://doi.org/10.1109/PDCAT.2011.66>, 2011.

665 Mallach, E. G.: RISC: Evaluation and Selection, Journal of Information Systems Management, 8,
666 8–16, <https://doi.org/10.1080/07399019108964978>, 1991.

667 Michalakes, J., Chen, S., Dudhia, J., Hart, L., Klemp, J., Middlecoff, J., and Skamarock, W.:
668 Development of a next-generation regional weather research and forecast model, in:
669 Developments in Teracomputing, WORLD SCIENTIFIC, 269–276,
670 https://doi.org/10.1142/9789812799685_0024, 2001.

671 MIPS Technology Inc.: MIPS Architecture For Programmers Volume I-A, available at:
672 <https://www.mips.com/products/architectures/mips64>, 2014.

673 Pepe, N., Pirovano, G., Lonati, G., Balzarini, A., Toppetti, A., Riva, G. M., and Bedogni, M.:
674 Development and application of a high resolution hybrid modelling system for the evaluation of
675 urban air quality, Atmospheric Environment, 141, 297–311,
676 <https://doi.org/10.1016/j.atmosenv.2016.06.071>, 2016.

677 Powers, J. G., Klemp, J. B., Skamarock, W. C., Davis, C. A., Dudhia, J., Gill, D. O., Coen, J. L.,
678 Gochis, D. J., Ahmadov, R., Peckham, S. E., Grell, G. A., Michalakes, J., Trahan, S., Benjamin,
679 S. G., Alexander, C. R., Dimego, G. J., Wang, W., Schwartz, C. S., Romine, G. S., Liu, Z., Snyder,
680 C., Chen, F., Barlage, M. J., Yu, W., and Duda, M. G.: The Weather Research and Forecasting
681 Model: Overview, System Efforts, and Future Directions, Bulletin of the American
682 Meteorological Society, 98, 1717–1737, <https://doi.org/10.1175/BAMS-D-15-00308.1>, 2017.

683 RAMBOLL ENVIRON Inc.: CAMx User's Guide Version 6.1, available at: <https://camx->
684 [wp.azurewebsites.net/Files/CAMxUsersGuide_v6.10.pdf](https://camx-wp.azurewebsites.net/Files/CAMxUsersGuide_v6.10.pdf), 2014.

685 Shi, Z.: Technology comparison and research of RISC and CISC, China Science and Technology
686 Information, 131–132, 2008 (in Chinese).

687 Skamarock, C., Klemp, B., Dudhia, J., Gill, O., Liu, Z., Berner, J., Wang, W., Powers, G., Duda, G.,
688 Barker, D., and Huang, X.: A Description of the Advanced Research WRF Model Version 4,
689 <https://doi.org/10.5065/1dfh-6p97>, 2019.

690 Sun Y.: Research on the contribution of soil fugitive dust in Beijing based on satellite identification
691 and numerical simulation technology, Master, Beijing Normal University, <https://etdlib.bnu.edu.cn>,
692 2022a.

693 Sun, Y., Wu, Q., Wang, L., Zhang, B., Yan, P., Wang, L., Cheng, H., Lv, M., Wang, N., and Ma, S.:
694 Weather Reduced the Annual Heavy Pollution Days after 2016 in Beijing, Sola, 18, 135–139,
695 <https://doi.org/10.2151/sola.2022-022>, 2022b.

696 The HDF Group: HDF5 User's Guide Version 1.1, available at:
697 <https://portal.hdfgroup.org/display/HDF5/HDF5+User+Guides>, 2019.

698 UCAR/Unidata: NetCDF User's Guide Version 1.1, available at: <https://docs.unidata.ucar.edu/nug> ,
699 2021.

700 Wang, H., Lin, J., Wu, Q., Chen, H., Tang, X., Wang, Z., Chen, X., Cheng, H., and Wang, L.: MP
701 CBM-Z V1.0: design for a new Carbon Bond Mechanism Z (CBM-Z) gas-phase chemical
702 mechanism architecture for next-generation processors, Geoscientific Model Development, 12,
703 749–764, <https://doi.org/10.5194/gmd-12-749-2019>, 2019.

704 Wang, K., Gao, C., Wu, K., Liu, K., Wang, H., Dan, M., Ji, X., and Tong, Q.: ISAT v2.0: an
705 integrated tool for nested-domain configurations and model-ready emission inventories for WRF-
706 AQM, Geoscientific Model Development, 16, 1961–1973, [https://doi.org/10.5194/gmd-16-1961-](https://doi.org/10.5194/gmd-16-1961-2023)
707 [2023](https://doi.org/10.5194/gmd-16-1961-2023), 2023.

708 Wang, P., Jiang, J., Lin, P., Ding, M., Wei, J., Zhang, F., Zhao, L., Li, Y., Yu, Z., Zheng, W., Yu, Y.,
709 Chi, X., and Liu, H.: The GPU version of LASG/IAP Climate System Ocean Model version 3
710 (LICOM3) under the heterogeneous-compute interface for portability (HIP) framework and its
711 large-scale application, Geosci. Model Dev., 14, 2781–2799, [https://doi.org/10.5194/gmd-14-](https://doi.org/10.5194/gmd-14-2781-2021)
712 [2781-2021](https://doi.org/10.5194/gmd-14-2781-2021), 2021.

713 Wang, S., Li, L., and Chen, Z.: The Test and Analysis on Memory Access Performance Based on
714 Loongson CPU, Information Technology & Standardization, 32–36, 2014 (in Chinese).

715 Wang, Z., Xie, F., Wang, X., An, J., and Zhu, J.: Development and Application of Nested Air Quality
716 Prediction Modeling System, Chinese Journal of Atmospheric Sciences, 778–790,
717 <http://dx.doi.org/10.3878/j.issn.1006-9895.2006.05.07>, 2006.

718 Wu, Q. and Cheng, H.: Transplantation and application of mesoscale mode on Loongson CPU
719 platform, Journal of Beijing Normal University (Natural Science), 55, 11–18,
720 <https://doi.org/10.16360/j.cnki.jbnuns.2019.01.002>, 2019.

721 Wu, Q., Xu, W., Shi, A., Li, Y., Zhao, X., Wang, Z., Li, J., and Wang, L.: Air quality forecast of
722 PM10 in Beijing with Community Multi-scale Air Quality Modeling (CMAQ) system: emission
723 and improvement, Geoscientific Model Development, 7, 2243–2259,
724 <https://doi.org/10.5194/gmd-7-2243-2014>, 2014.

725 Wu, Y., Xu, G., Zhao, Y., and Tan, Y.: Parallel Processing on WRF Meteorological Data Using
726 MPICH, in: 2012 Sixth International Conference on Internet Computing for Science and

727 Engineering, 2012 Sixth International Conference on Internet Computing for Science and
728 Engineering, titleTranslation:, 262–265, <https://doi.org/10.1109/ICICSE.2012.12>, 2012.

729 Xiao, H., Wu, Q., Yang, X., Wang, L., and Cheng, H.: Numerical study of the effects of initial
730 conditions and emissions on PM_{2.5} concentration simulations with CAMx v6.1: a Xi'an case
731 study, *Geoscientific Model Development*, 14, 223–238, [https://doi.org/10.5194/gmd-14-223-](https://doi.org/10.5194/gmd-14-223-2021)
732 [2021](https://doi.org/10.5194/gmd-14-223-2021), 2021.

733 Yang, X., Xiao, H., Wu, Q., Wang, L., Guo, Q., Cheng, H., Wang, R., and Tang, Z.: Numerical study
734 of air pollution over a typical basin topography: Source appointment of fine particulate matter
735 during one severe haze in the megacity Xi'an, *Science of The Total Environment*, 708, 135213,
736 <https://doi.org/10.1016/j.scitotenv.2019.135213>, 2020.

737 Zhang, Y., Bocquet, M., Mallet, V., Seigneur, C., and Baklanov, A.: Real-time air quality forecasting,
738 part I: History, techniques, and current status, *Atmospheric Environment*, 60, 632–655,
739 <https://doi.org/10.1016/j.atmosenv.2012.06.031>, 2012.

740 Zhang, Z., Wang, X., Cheng, S., Guan, P., Zhang, H., Shan, C., and Fu, Y.: Investigation on the
741 difference of PM_{2.5} transport flux between the North China Plain and the Sichuan Basin,
742 *Atmospheric Environment*, 271, 118922, <https://doi.org/10.1016/j.atmosenv.2021.118922>, 2022.

743 Zhen, J., Guan, P., Yang, R., and Zhai, M.: Transport matrix of PM_{2.5} in Beijing-Tianjin-Hebei and
744 Yangtze River Delta regions: Assessing the contributions from emission reduction and
745 meteorological conditions, *Atmospheric Environment*, 304, 119775,
746 <https://doi.org/10.1016/j.atmosenv.2023.119775>, 2023.

747 Zhi, Y. and Xu, J.: Android transplantation and analysis based on Loongson, in: 2012 International
748 Conference on Information Management, Innovation Management and Industrial Engineering,
749 2012 International Conference on Information Management, Innovation Management and
750 Industrial Engineering, 59–61, <https://doi.org/10.1109/ICIM.2012.6339777>, 2012.