

Quantitative estimate of several sources of uncertainty in drone-based methane emission measurements

Tannaz H. Mohammadloo¹, Matthew Jones¹, Bas van de Kerkhof¹, Kyle Dawson², Brendan James Smith², Stephen Conley³, Abigail Corbett^{2, 4}, and Rutger IJzermans¹

¹Shell Global Solutions International B.V, Amsterdam, The Netherlands

²SeekOps Inc., Austin, Texas, United States of America

³Scientific Aviation, A Division of ChampionX, Boulder, Colorado, United States of America

⁴Current address: GTI Energy, Chicago, Illinois, United States of America

Correspondence: Rutger IJzermans (Rutger.IJzermans@shell.com)

Abstract. Site level measurements of methane emissions are used by operators for reconciliation with bottom-up emission inventories with the aim to improve accuracy, thoroughness and confidence in reported emissions. In that context it is of critical importance to avoid measurement errors, and to understand the measurement uncertainty. Remotely piloted aircraft systems (commonly referred to as ‘drones’) can play a pivotal role in the quantification of site-level methane emissions. Typical implementations use the ‘mass balance method’ to quantify emissions, with a high-precision methane sensor mounted on a quadcopter drone flying in a vertical curtain pattern; the total mass emission rate can then be computed post hoc from the measured methane concentration data and simultaneous wind data. Controlled release tests have shown that errors with the mass balance method can be considerable. For example, Liu et al. (2023) report absolute errors for more than 100% for the two drone solutions tested; on the other hand, errors can be much smaller, of the order of 16% root-mean-square errors in Corbett & Smith (2022), if additional constraints are placed on the data, restricting the analysis to cases where the wind field was steady. In this paper we present a systematic error analysis of physical phenomena affecting the error in the mass balance method for parameters related to the acquisition of methane concentration data and to postprocessing. The sources of error are analysed individually, and it must be realised that individual errors can accumulate in practice, and they can also be augmented by other sources that are not included in the present work. Examples of these sources include the uncertainty in methane concentration measurements by a sensor with finite precision or the method used to measure the unperturbed wind velocity at the position of the drone. We find that the most important source of error considered is the horizontal and vertical spacings in the data acquisition as a coarse spacing can result in missing a methane plume. The potential error can be as high as 100% in situations where the wind speed is steady and the methane plume has a coherent shape, contradicting the intuition of some operators in the industry. The likelihood of the extent of this error can be expressed in terms of a dimensionless number defined by the spatial resolution of the methane concentration measurements and the downwind distance from the main emission sources. The learnings from our theoretical error analysis are then applied to a number of historical measurements in a controlled release setting. We show how the learnings on the main sources of error can be used to eliminate potential errors during the

25 postprocessing of flight data. Second, we evaluate an aggregated data set of 1,001 historical drone flights; our analysis shows that the potential errors in the mass balance method can be of the order of 100% on occasions, even though the individual errors can be much smaller in the vast majority of the flights. The discussion section provides some guidelines to industry on how to avoid or minimize potential errors in drone measurements for methane emission quantification.

30 1 Introduction

Methane is a much more potent greenhouse gas than carbon dioxide when comparing global warming potential (GWP). Methane has a GWP of 86 over the first 20 years since its atmospheric injection, and a GWP of 28 over a 100-year time frame (IPCC , 2014). Since the lifetime of methane in the atmosphere is just over 12 years (relatively short compared to CO₂'s lifetime of hundreds of years), reducing methane emissions now offers great potential for
35 delivering substantial reductions in global warming on a timescale compatible with the 2015 Paris Agreement goals. The average background level of methane in the atmosphere is about 1.9 ppm globally, increasing at about 0.01 ppm/year due to human activity (Nisbet et al. , 2019). According to bottom-up estimates over the period 2008-2017 by (Saunio et al. , 2020), about half of total methane emission sources are anthropogenic (366 Tg/y out of 737 Tg/y), predominantly from agriculture and waste (206 Tg/y); oil and gas production accounts for 22 % of total
40 anthropogenic emissions (80 Tg/y). Although all these numbers are subject to high uncertainty, the estimates do show that reducing methane emissions from the oil and gas industry can have a significant effect on limiting climate change in the coming decades.

Best practices for reporting of methane emissions are proposed in the OGMP2.0 reporting framework (United Nations Environment Programme , 2020); a voluntary, comprehensive, measurement-based reporting framework
45 for the oil and gas industry. At the highest reporting level OGMP2.0 recommends building a measurement-based source-level inventory of emissions, performing an independent site-level emission measurement – and reconciliation of the two. The aim of reconciliation is to help improve accuracy in reported emissions as well as identifying emission reduction opportunities. In this context it is important for operators to understand sources of error and uncertainty ranges in measurement techniques used. Sources of measurement errors should be avoided where possible
50 and practical, and remaining uncertainties should be understood and correctly estimated. Site-level quantification is typically done with airborne methane measurements (e.g., on remotely piloted aircraft systems or on manned aircraft). Liu et al. (2023) note that the errors in quantification can be considerable: although many systems can quantify “within an order of magnitude of the controlled release rate”, the absolute errors reported varied between 19% and 239%. The two remotely piloted aircraft systems (drones) tested even reported results with errors of 140%
55 and 239%. Corbett & Smith (2022) present the results from another controlled release campaign: they report errors in the methane emission rate up to 115%, but they also show that the errors can be much reduced, to about 16%,

by considering only measurements during the time that the wind conditions were favorable. Still, Corbett & Smith (2022) do not give a systematic analysis into the causes why some measurements are more successful than others.

The present paper provides a framework that allows quantitative assessment of errors in methane emission rate measurements using the mass balance method. We present a theoretical framework that provides an explanation for the various sources of uncertainty considered, and highlights which of these effects have a particularly large impact on uncertainty – and thus are those effects that should be managed most carefully when setting up a drone survey campaign. The focus will be on the uncertainty related to the flight path and the variability of the wind; we do not take into account additional uncertainty associated with limited precision of the methane concentration sensor and the method used to determine the wind vector at the position of the drone (including anemometer precision).

The second part of this paper illustrates the various sources of uncertainty with real-life examples. Data from a controlled release experiment acquired by Scientific Aviation are analyzed to illustrate potential uncertainties and subtleties associated with the data analysis process. In addition, a data set of 1,001 historic flights acquired by SeekOps is analyzed with regards to the variations in the wind speed and direction during the survey time, and the potential effect of the choices for the drone’s flight path on the quality of the results.

This paper intends to provide guidelines to prevent avoidable errors in data collection and data analysis of drone-based measurements of methane emissions from industrial facilities. Although a number of obvious sources of potential error have been included in our analysis, it must be recognized that other errors may also occur in practice. This means that the actual uncertainty in measurement results will always depend on the particular deployment of a solution at a given site on a certain day. Examples of these additional sources of error are a reduced performance of the sensor(s) due to weather conditions or external damage, and complications associated with turbulent air flow around buildings and pieces of equipment, and the method used to measure the unperturbed wind velocity at the position of the drone.

2 Methods

2.1 Coordinate system definition

Before describing the methods that are used for quantification of methane emissions, we first introduce the coordinate systems that will be used in the remainder of this paper.

The first coordinate system is the Local Geodetic Coordinate System (XYZ), with X -axis pointing to the East direction and Y -axis pointing to the North direction. Z -axis is defined such that a right-handed coordinates system is obtained.

The second coordinate system is aligned with the wind direction and referred to as $(\xi\eta z)$. This means that the horizontal direction of the wind field is aligned with the ξ -axis, the direction perpendicular to it is given by η -axis. The z -axis is defined such that a right-handed system is obtained. The coordinate system is defined such that the

emission source is located at $\xi = 0$, $\eta = 0$ and $z = H$ with H being the height of the source from the ground level
 90 ($z = 0$), see Figure C2 in the Supplementary Information.

The third coordinate system is defined to represent the drone measurements and is a 2-dimensional coordinate
 system that captures the trajectory flown by the drone. In case of a ‘curtain’ flight path (a vertical plane), each
 coordinate on the curtain is expressed in Pz coordinate system with P -axis parallel to the ground and z -axis the
 vertical direction. In case of cylindrical flight paths, polar coordinates θz are used with z the vertical direction and
 95 θ the angular position in radians which can be converted to distance using the radius of the cylinder.

2.2 Mass balance method for methane emission quantification

The mass conservation equation for the methane mass concentration c (mass of methane per volume air) is (Stockie
 , 2011):

$$\frac{\partial c}{\partial t} + \nabla \cdot (c\mathbf{u}) = \nabla \cdot (K\nabla c) + \sum_i^{N_{\text{sources}}} \dot{m}_i \delta(\mathbf{x} - \mathbf{x}_{s,i}) \quad (1)$$

100 where $\mathbf{u}$ is the wind field vector and K is the molecular diffusivity of scalar c . The mass emission rate of point source
 i located at $\mathbf{x}_{s,i} = [x_{s,i}, y_{s,i}, z_{s,i}]$ is denoted by $\dot{m}_i$; δ denotes the Dirac delta function. The first term on the left-hand
 side denotes the change of concentration in time, whereas the second term denotes the change due to advection;
 the first term on the right hand side indicates molecular diffusion and the second term accounts for the presence of
 point sources.

110 The methane mass concentration c is related to the molar volume of methane in air, c' (with unit [ppmv]), through:

$$c = \frac{c'}{10^6} \times \frac{M_{\text{CH}_4}}{M_{\text{air}}} \times \rho_{\text{air}} \quad (2)$$

where M_{CH_4} is the molar mass of methane (16.04 kg/kmol) and M_{air} is the molar mass of dry air (typically about
 28.95 kg/kmol). The mass density of air, ρ_{air} , will change with differences in ambient temperature and pressure (i.e.,
 $\rho_{\text{air}}(T, P)$).

110 We can obtain the mass balance equation for a volume by integrating:

$$\int_V \frac{\partial c}{\partial t} dV + \int_V \nabla \cdot (c\mathbf{u}) dV = \int_V \nabla \cdot (K\nabla c) dV + \int_V \sum_i^{N_{\text{sources}}} \dot{m}_i \delta(\mathbf{x} - \mathbf{x}_{s,i}) dV \quad (3)$$

where the integrals on both sides have units of [kg/s]. The total methane emission from all sources inside the volume
 combined can be estimated by applying the divergence theorem (Katz , 1979):

$$\dot{m} = \sum_i^{N_{\text{sources}}} \dot{m}_i = \int_V \frac{\partial c}{\partial t} dV + \oint_{\partial V} c\mathbf{u} \cdot \mathbf{n} dS - \oint_{\partial V} K\mathbf{n} \cdot \nabla c dS \quad (4)$$

115 Usually, the situation is considered where the main contribution on the right-hand-side comes from the advection term (i.e., the wind vector is aligned with the normal vector $\mathbf{n}$ at the surface where the concentration flows out, and $|\mathbf{c}\mathbf{u} \cdot \mathbf{n}| \gg |K\mathbf{n} \cdot \nabla c|$, so that the diffusion term can be neglected (Conley et al. , 2017). When the process is assumed to be statistically stationary (i.e. the statistical properties of the process do not change with time, $\frac{\partial c}{\partial t}$), it is possible to derive the mass balance equation (Conley et al. , 2017) for the total methane emission rate:

$$120 \quad \dot{m} \approx \oint_{\partial V} \mathbf{c}\mathbf{u} \cdot \mathbf{n} dS = 10^{-6} \frac{M_{\text{CH}_4}}{M_{\text{air}}} \oint_{\partial V} c' \rho_{\text{air}} \mathbf{u} \cdot \mathbf{n} dS, \quad (5)$$

where the latter part is obtained by substituting Equation (2).

We observe some inconsistencies in the presentation of the mass balance calculation in existing literature, for instance with regards to the molar mass used (Corbett & Smith , 2022) or the distinction between concentrations by weight and by volume (Negron et al , 2020). We hope to avoid further ambiguities by the full derivation of the
125 mass balance method, leading up to Equation (5).

2.3 Drone-based methane measurements

The relationship in Equation (5) does not require that dispersion happens in a particular way (e.g., a Gaussian plume), nor that there is only one source within the volume. To apply this form of the mass concentration equation to real problems, a flight path needs to be defined that approximates the boundary integral. In a common scenario,
130 the measurements are taken downwind of an equipment area under the assumption that everything entering the upstream volume (behind the source) is atmospheric background, c_0 . In some deployments, a cylindrical flight pattern is followed that circumscribes the facility of interest (Corbett & Smith , 2022).

The atmospheric background can be c_0 calculated statistically (e.g., some low percentile of the concentration measurements), (McKain et al. , 2015) and (Plant et al. , 2022), or spatially (e.g. from grid cells at the edges of the
135 plane), (Mays et al. , 2009) and (Conley et al. , 2017). We use the former approach in this paper.

The terms inside the integral of Equation (5) must generally be approximated, owing to the discrete nature of real concentration and wind measurements. We assume that the bounding surface (e.g., a cylinder or box around a region of interest, or a plane downwind of a point of interest) can be partitioned into a two-dimensional regular grid in the horizontal and vertical directions with spacings equal δP and δz respectively. The exact details of this grid
140 will depend on the flight trajectory under consideration. Approximating Equation (5) directly gives:

$$\dot{m} \approx \sum_{k=1}^{n_z} \sum_{j=1}^{n_P} (c_{j,k} - c_0) [\mathbf{u}_{j,k} \cdot \mathbf{n}_{j,k}] \delta P \delta z \quad (6)$$

where $c_{j,k}$ and $\mathbf{u}_{j,k}$ denote the methane mass concentration and the wind field interpolated onto the grid at location $\mathbf{x}_{j,k}$ (either measured directly or interpolated onto a grid) and $\mathbf{u}_{j,k}$ denotes the wind field at the same location. $\mathbf{n}_{j,k}$ is the normal vector at the surface at location $\mathbf{x}_{j,k}$. n_z and n_P are the number of cells in the P and z directions

145 respectively. For molar concentration measurements, the calculation should be modified to take account of the density of methane, as in Equation (5)

$$\dot{m} \approx 10^{-6} \frac{M_{\text{CH}_4}}{M_{\text{air}}} \sum_{k=1}^{n_z} \sum_{j=1}^{n_P} (c'_{j,k} - c'_0) \rho_{\text{air},j,k} [\mathbf{u}_{j,k} \cdot \mathbf{n}_{j,k}] \delta P \delta z \quad (7)$$

where $\rho_{\text{air},j,k}$ represents the air density at the location $\mathbf{x}_{j,k}$, which may be estimated using the local temperature and pressure.

150 Equation (6) and Equation (7) describe the calculation procedure in the mass balance method for one single flight spanning the vertical plane of interest. If a similar trajectory along the vertical plane is flown multiple times, then the mass emission rate can be obtained by averaging. The exact choice of averaging procedure is important for the final result. Two common choices are:

1. $\dot{m}_\ell$ for each curtain ℓ separately using Equation (7), and then take the average of these values:

$$155 \quad \dot{m}_{av,1} = \frac{1}{N_{\text{curtain}}} \sum_{\ell=1}^{N_{\text{curtain}}} \dot{m}_\ell \quad (8)$$

2. First compute the horizontal flux per altitude, ϕ_k , i.e., $\phi_k = 10^{-6} \frac{M_{\text{CH}_4}}{M_{\text{air}}} \sum_{j=1}^{n_y} (c'_{j,k} - c'_0) \rho_{\text{air},j,k} [\mathbf{u}_{j,k} \cdot \mathbf{n}_{j,k}] \delta P \delta z$. If multiple horizontal fluxes are available per an altitude, the median is taken $\tilde{\phi}_k = \text{median}(\phi_k)$. With median horizontal flux, the emission rate is calculated as

$$\dot{m} = \sum_{k=1}^{n_z} \tilde{\phi}_k \delta z \quad (9)$$

160 The two methods are equivalent when the exact same trajectory is flown for each curtain. If there are gaps in the data in the vertical direction, however, the two methods may result in different calculated methane emission rates.

Usually, a drone flies at a speed between 1 m/s to 5 m/s to acquire data, and methane concentration measurements with a frequency between 1 Hz and 10 Hz. The average horizontal spatial resolution is roughly $\frac{v}{f}$ where v is the flight speed of the drone and f is the measurement frequency. Additionally, drones typically have their own LiDAR (Light
165 Detection and Ranging) sensor to measure altitude above ground level, a GPS sensor and telemetry relay. The maximum flight time of a drone is typically limited to about 40 min. More detail on the hardware is given in the Supplementary Information.

The mass balance method equation, Equation (5), is based on simultaneous information on both the methane concentration and the wind velocity vector in the flux plane. Hence, it is the best practice to measure the wind
170 velocity at the position of the drone. Scientific Aviation derive the wind speed at the location of the drone from the drone's GPS data, the rotor thrust data and the drone's orientation at any moment in time. SeekOps have recently adopted a similar strategy, but in the historic data discussed in this paper the wind measurements were taken by a stationary, on-site anemometer at approximately 2 m above the ground surface; the wind speed at the drone altitude is derived by applying a wind profile model that has been optimized for the local surface roughness
175 and drone-derived aerodynamic wind speed.

2.4 Numerical simulations

Numerical simulations will be used for a systematic analysis of physical phenomena affecting the error in the mass balance method. This section describes the methods employed in the numerical simulations.

The coordinate of the drone at each time stamp is simulated based on a curtain or cylindrical flight pattern. The horizontal spacing between two consecutive measurements is determined by the speed of the drone, frequency of the measurements and the battery life. In the simulation, for the sake of simplicity this coupling has not been taken into consideration. This means that we simply assume the frequency of 10 Hz .

The methane mass concentration above background in kg/m^3 at each location $\mathbf{x}$ is simulated from the Gaussian plume model (Stockie , 2011). In the simulations, either a constant or a time-varying but spatially uniform wind field will be assumed. Using $\xi\eta z$ coordinate frame, the concentration profile downwind of the source (ξ) is then given by:

$$c(\xi, \eta, z) = \frac{\dot{m}}{\pi|\mathbf{u}|\sigma_h\sigma_v} \exp\left(-\frac{\eta^2}{2\sigma_h^2}\right) \left[\exp\left(-\frac{(z-H)^2}{2\sigma_v^2}\right) + \exp\left(-\frac{(z+H)^2}{2\sigma_v^2}\right) \right] \quad (10)$$

where $|\mathbf{u}|$ denotes the absolute value of the wind speed. The first exponent in (10) expresses the Gaussian cross-sectional shape at fixed height. The second exponent illustrates the Gaussian vertical shape at a given ξ which is modified by the third exponent (the ground reflection term). The concentration field is assumed to change immediately with a change of wind. The parameters σ_h and σ_v denote the standard deviation of the plume in horizontal and vertical direction, respectively. Stockie (2011) explains that these parameters can be tuned to fit a certain situation of atmospheric dispersion. In our present model, we assume that the standard deviations are proportional to the distance from source in the direction of the wind:

$$\sigma_h = \xi \tan(\omega_h), \quad (11a)$$

$$\sigma_v = \xi \tan(\omega_v). \quad (11b)$$

The angles ω_h and ω_v denote the opening angles of the plume in horizontal and vertical direction, respectively.

To compute the emission rate using the mass balance Equation (6), a grid is defined with horizontal spacing δP and vertical spacing δz (equidistant spacing between consecutive points in both directions). The normal to the grid, $\mathbf{n}_{j,k}$ at each point $\mathbf{x}_{j,k}$ is obtained by considering the normal vector to the tangent to the grid at each point ($\mathbf{n}_{j,k}^\perp$). To calculate the tangent to the grid at each point, the edges of each cell in the grid are considered and the first and last edges are calculated separately based on the type of the grid. The normal vector is then obtained from

$$\langle \mathbf{n}_{j,k}, \mathbf{n}_{j,k}^\perp \rangle = 0 \quad (12)$$

The measured wind field is interpolated onto this grid using Nearest Neighbor method and referred to as $\mathbf{u}_{j,k}$ (Sibson , 1981). Interpolating the concentration on the plane (referred to as $c_{j,k}$ and) can be achieved using different approaches depending on the spatial distribution of the drone measurements, for drone measurement with equidistant

spacings in horizontal and vertical directions and lying on a plane, the Nearest Neighbor interpolation method can be used. However, for non-equidistant distributed drone measurements in a semi-random flight patterns, a more advanced interpolation technique are preferred, as the Nearest Neighbor might give a too large or too small concentration depending on the location of point in query and the drone measurement, as an example a Gaussian smoother or Gaussian process, (Price , 2012) and Rasmussen and Williams (2006). The emission rate is then obtained by substituting these interpolated values in Equation (6). It should be highlighted that if the plume is missed, the emission rate will be underestimated irrespective of the interpolation technique.

We modeled the time-varying wind direction and wind speeds using Ornstein-Uhlenbeck process, Equation (13). This is a random diffusion process that is stationary, Gaussian and Markovian (Kampen , 2007) where the incremental evolution of any random variable χ is then given by:

$$d\chi = -\frac{(\chi - \mu_\chi)}{\tau}dt + \sqrt{\frac{2\sigma_\chi^2}{\tau}}dW \quad (13)$$

where μ_χ is the mean value of χ , and σ_χ is the standard deviation of the probability distribution of χ . The parameter dW is an increment of the Wiener process (e.g., Brownian motion), and dt is the time increment; the current notation is used because the time derivative of the Wiener process, dW/dt , is not defined (Kampen , 2007). The physical meaning of Equation (13) is that the Wiener process provides a forcing to the random walk process away from the mean, whereas the first term brings the process back to the mean with a time scale τ . The advantage of using an Ornstein-Uhlenbeck process for our simulations is that, in the limit of infinitely many Markov steps, the long-term probability distribution of the variable χ is a stationary Gaussian distribution with mean μ_χ and a variance σ_χ^2 that is an independent parameter of the problem. The uncertainty in the mass balance calculations can thus be determined as a function of the variability of the wind field.

3 Simulation results

In this section, results from the simulation of the 2-D curtain drone flight for different scenarios are presented (similar simulations for cylindrical flight patterns are contained in the appendix). The objective is to assess the importance of various sources of uncertainty on the calculated emission rate. The following sources of uncertainty are considered: a) the choice of data density, i.e., horizontal, and vertical spacing between coordinates, Sections 3.2; b) the angle of the flight lines with respect to the main wind direction, Section 3.3; c) the variation in wind, Section 3.4. In practice, errors often compound, and there may be a combined effect of multiple errors. However, testing out all permutations and interactions would lead to an intractable number of permutations of parameter settings. It would also complicate the evaluation of which effects have the largest impact on the overall uncertainty, which is the goal of our simulations. Therefore, we limit the analysis to the uncertainty sources presented above.

It is assumed that the concentration field is stationary during the time of the measurements. This might correspond to a constant Gaussian plume travelling horizontally, in a time-averaged horizontal wind field with speeds that can vary as a function of the vertical coordinate. The plume opening angle and the wind field used in the simulation are
 240 chosen such that they reflect a situation encountered in practice. A source at location $\mathbf{x}_{j,k}$ with the emission rate of $\dot{m}_{\text{true}} = 5 \text{ kg/h}$ is considered. For the true emission rate $\dot{m}_{\text{true}}$ and the calculated emission rate $\dot{m}$, the relative error in the calculated emission rate is defined as $\epsilon = \frac{\dot{m}}{\dot{m}_{\text{true}}} - 1$.

3.1 Ideal case

We will first demonstrate that it is possible to recover the mass emission rate of a source to high accuracy using
 245 Equation (6) in an idealised situation. To this end, we consider an ideal case with the following parameters: a) constant wind field with westerly wind with the speed of 5 m/s; b) one flight line passing through the center of the plume; c) the 2-D curtain located at downwind distance of 5 m; d) horizontal and vertical opening angles of 5°; e) equidistant measurements in the horizontal and equidistant measurements in the vertical directions, i.e., $\Delta P = \text{const}$ and $\Delta z = \text{const}$; f) flight curtain perpendicular to the wind direction; g) no measurement error in the
 250 simulated concentration, the wind field and the location of the drone.

Figure 1 shows the methane concentration as measured during the simulated flat 2-D curtain flight. The vertical and horizontal spacing of 0.3 m and 0.09 m are chosen such that a dense grid in both directions is obtained. In practice, it is easier to control flight velocity rather than grid spacing.

Figure 2 illustrates the concentration measurements in Pz plane along with the calculated emission rate for the
 255 source considered in Figure 1 for coarse and fine vertical spacing. The quality of the emission rate estimate degrades with increasing coarseness of the flight lines in the vertical direction, resulting in a deviation of 0.229 kg/h (4.6% relative error) for a vertical spacing of 1.0 m.

3.2 Horizontal and vertical spacings of the curtain drone measurements

3.2.1 Non-equidistant vertical spacing

260 In Section 3.1, the horizontal and vertical spacings between the flight coordinates are assumed to be constant. In practice, however, the assumption of equidistant spacing is easily violated. Here we assess the effect of varying spacing in the vertical direction on the emission rate error. For L number of flight lines, L random samples from a Gaussian distribution with zero mean and a standard deviation σ_l are drawn as

$$l_i \sim \mathcal{N}(0, \sigma_l^2), \quad i = 1, 2, \dots, L \quad (14)$$

265 where σ_l^2 equals a percentage (ranging from 1% to 100%) of the vertical spacing. For a flight line i , l_i is added to the simulated vertical coordinates of the drone measurements (z). This means the drone measurements on the flight line

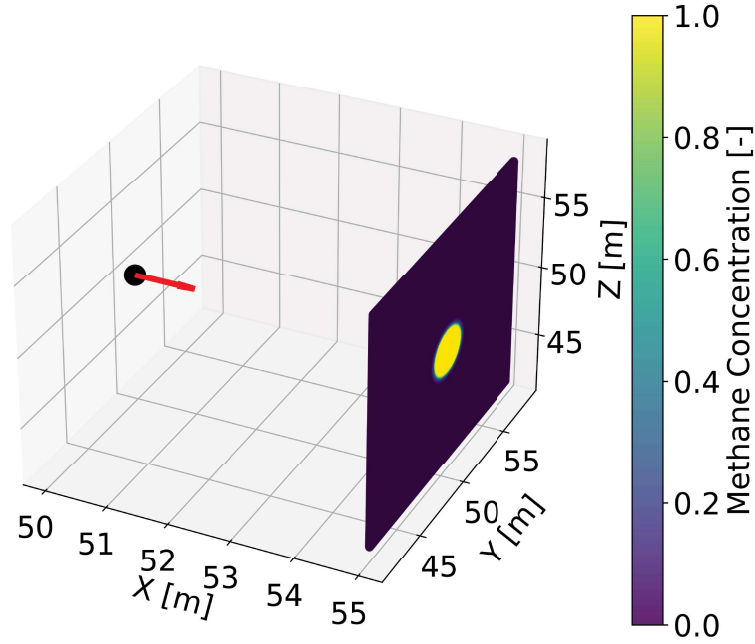



Figure 1. 3-dimensional normalized methane concentration above background on a curtain flight located at 5 m downwind distance of the source (shown by black). The wind velocity is shown with a red vector. The Gaussian plume is assumed to have 5° horizontal and vertical opening angles. There is a horizontal spacing of 0.09 m between the measurement points and a vertical spacing of 0.3 m vertical flight lines.

$i, i = 1, 2, \dots, L$ are all shifted equally. For each simulation scenario (i.e., each standard deviation) 300 independent runs are considered.


Figure 3 shows the box-whisker plot for the emission rate percentage error for non-equidistant vertical spacing. There is no bias in the calculated emission rate with increasing variation in the vertical spacing, but individual measurements cases can have errors up to almost 40% if the standard deviation in the vertical spacing is equal to the nominal vertical spacing. Non-equidistant vertical flight lines introduce the possibility of missing the plume. Having a larger percentage of the vertical spacing as the standard deviation of the Gaussian distribution, means that the non-homogeneity between the vertical flight lines becomes more pronounced. This means that one might miss the plume by larger extent.

3.2.2 Missing the plume center in relation to horizontal and vertical spacings

In Section 3.1, it is assumed that one flight line passes through the centre of the plume in the vertical direction and there exists a concentration point on this flight line corresponding to the maximum concentration of the plume on the 2-D curtain. In practice, these assumptions are easily violated as the location of the source is not exactly

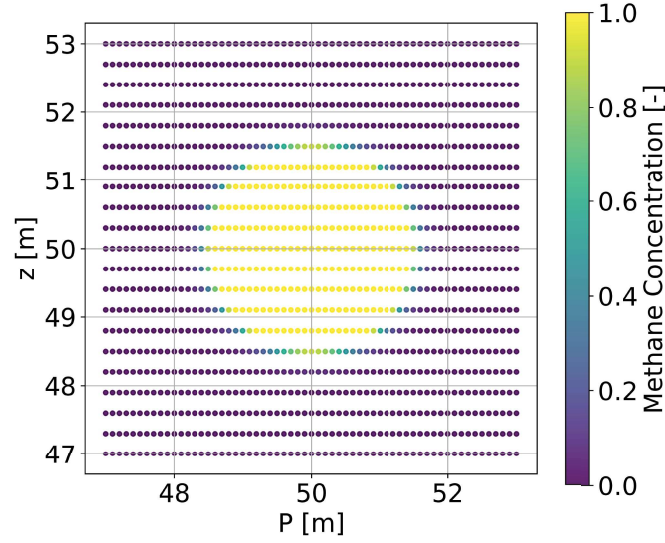

(a)

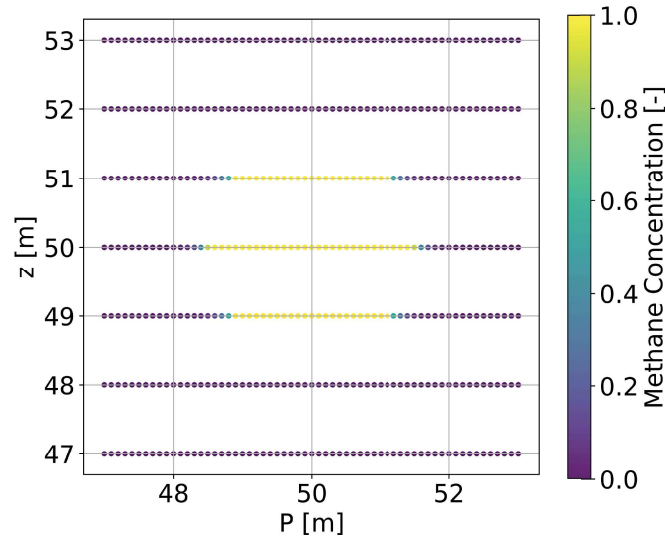

(b)

Figure 2. 2D illustration (Pz plane) of the normalized methane concentration above background simulated using Gaussian plume for a 2-D curtain flight at 5 m downwind distance from the source, horizontal spacing of 0.09 m between the coordinates and vertical spacing of a) 0.3 m with the calculated emission rate equaling 5 kg/h and b) 1.0 m with the calculated emission rate equaling 5.229 kg/h.

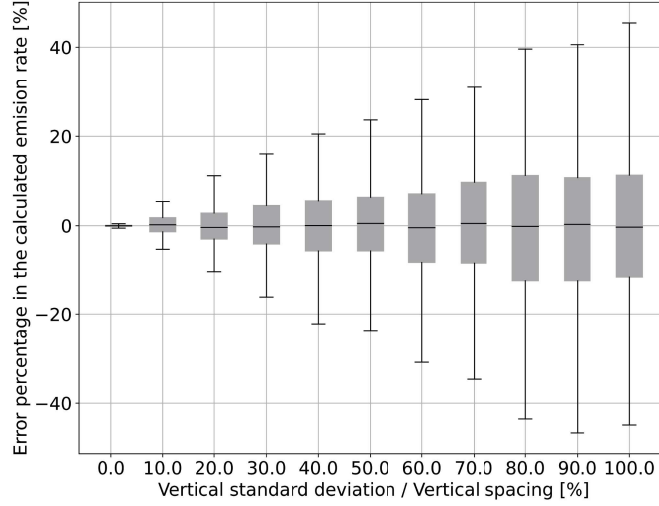


Figure 3. Box-whisker plots for the calculated emission rate error for increasing standard deviation of the vertical spacing between flight lines. Here and henceforth, the gray bars denote the 25 %(Q_1)-75%(Q_3) quantile range; the lower and upper whiskers show the $Q_1 - 1.5IQR$ and $Q_3 + 1.5IQR$ with IQR being the inter-quartile range of the values simulated.

known. Therefore, here we will assess the potential uncertainty induced by missing the maximum concentration of the plume for different horizontal and vertical spacing of the drone measurements. The resulting error is a function of the horizontal and vertical spacings as the drone is more likely to miss the highest concentration of a plume if the horizontal and vertical spacing is large. To assess the effect of missing the plume, for each horizontal (ΔP) and vertical (Δz) spacing of the drone measurements, 15 different shift values relative to the plume center (projected on the curtain) ranging from $-\frac{\Delta P}{2}$ to $+\frac{\Delta P}{2}$ in the horizontal and from $-\frac{\Delta z}{2}$ to $+\frac{\Delta z}{2}$ in the vertical directions are considered. For each shifted location, the emission rate error is calculated, i.e., 225 (15×15) instances of calculated emission rate errors. For all the locations except the one where one flight line passes the centre of the plume, the maximum concentration is missed. Therefore, the emission rate is usually underestimated and the maximum error representing the worst situation is considered for each combination of horizontal and vertical spacings.

For a plume with a known opening angle in the horizontal and vertical directions (ω_h and ω_v), the calculated emission rate remains unchanged for varying downwind distance d if the horizontal and vertical spacings are scaled according to the opening angle of the plume. In order to have a generic representation of the maximum error for different horizontal and vertical spacings and a downwind distance d , the horizontal (ΔP) and vertical (Δz) spacings can be expressed as factors of the plume horizontal and vertical standard deviations, σ_h and σ_v in Equation (11b),

295 respectively as the following dimensionless quantities:

$$\Delta P' = \frac{\Delta P}{\sigma_h} = \frac{\Delta P}{d \tan \omega_h}, \quad (15a)$$

$$\Delta z' = \frac{\Delta z}{\sigma_v} = \frac{\Delta z}{d \tan \omega_v}, \quad (15b)$$

Shown in Figure 4 is the maximum error in the calculated emission rate for different dimensionless horizontal and vertical spacings for a curtain flight located 5 m downwind distance of a source with the emission rate $\dot{m} = 5$ kg/h. As seen, the estimated emission rate error decreases with higher frequency (i.e., smaller horizontal spacing) and smaller vertical spacing. It should be highlighted that even with a high frequency drone flying with a small vertical spacing, the error will not reach zero due to the existence of other error contributors.

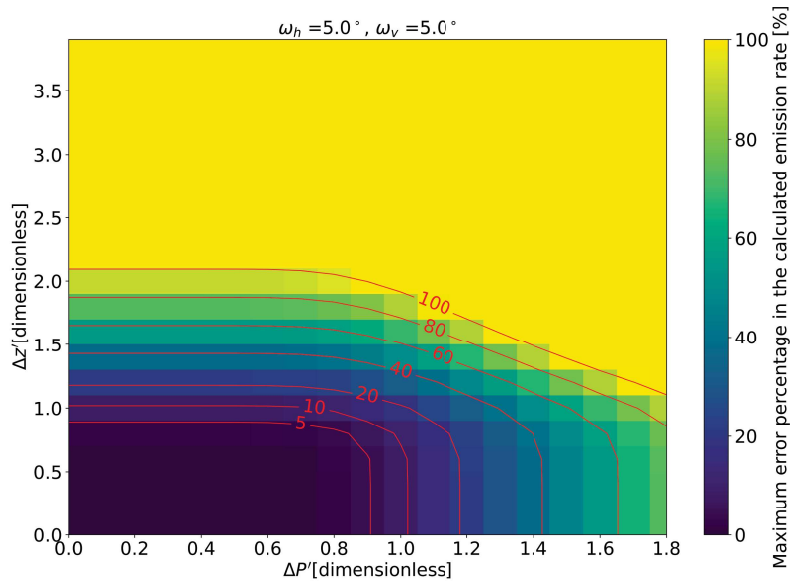


Figure 4. Maximum emission rate error in percentage (over 225 experiments corresponding to missing the plume by different percentages of the horizontal and vertical spacing) for varying dimensionless horizontal and vertical spacings. Shown with red are the error contours.

3.3 Angle between flight lines and wind direction

In the ideal situations described in Section 3.1, the drone flies in a direction perpendicular to the wind field. However, in real-world scenarios such a flight design might be impractical due to the existence of buildings and obstacles, or safety requirements. It is thus relevant to assess how the deviation of the flight curtain from the direction perpendicular to the wind field affects the calculated the emission rate. Figure 5 shows the result as a function of the angle of the curtain with respect to the wind direction, for three different values of the plume opening angle. As

seen, the error is negligible for situations in which the deviation of the 2-D curtain from the direction perpendicular
 310 to the wind field is less than 45° . If the flight pattern is not perfectly perpendicular to the wind direction, an
 error term emerges due to the effect of diffusion, see first term in the right-hand side of Equation (4). In the mass
 balance equation, Equation (5), the diffusion term is discarded and only the advection term is considered. For the
 non-perpendicular flight patterns, however, the term $\mathbf{n} \cdot \mathbf{e}_y \frac{dc}{dy}$ in Equation (4) is not exactly equal to zero (here, $\mathbf{e}_y$
 315 denotes the unit vector pointing in the y -direction). For a westerly wind field, the deviation in the northern part
 of the plume may, to first order, be compensated by opposite deviations in the southern part of the plume, but
 the deviations can become considerable at large measurement angles. The actual contribution of the error from this
 source is proportional to the value of the diffusion coefficient K , and it leads to a slight over-estimate of the mass
 emission rate that increases with the opening angle of the plume (usually the opening angle is proportional to K).
 If the flight trajectory deviates from the direction perpendicular to the wind by more than $\approx 70^\circ$, underestimation
 320 occurs and the magnitude of underestimation increases with the deviation angle. The main cause for this error is
 that part of the diverging plume will never be captured by the vertical curtain; if the opening angle is larger, a larger
 percentage of the plume will be missed in this way and the error thus increases.

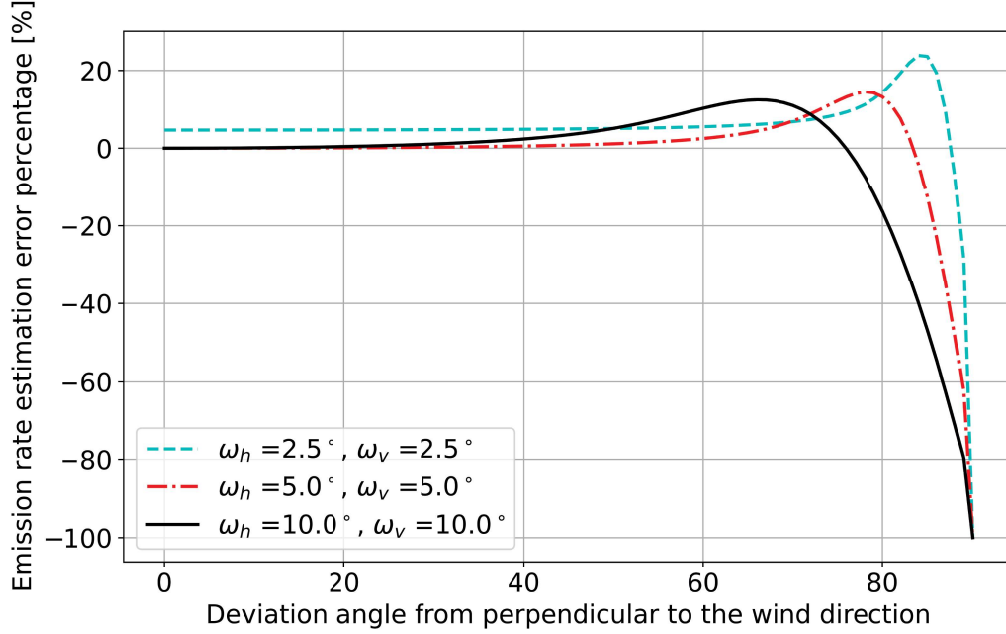


Figure 5. The emission rate error percentage as a function of deviation of the 2-D curtain from the direction perpendicular to the wind velocity obtained from the simulation. Results are shown for three different opening angles of the Gaussian plume: 2.5° , 5.0° and 10.0° .

3.4 Time variations in wind speed and/or wind direction


Another assumption considered in Section 3.1, was that the wind field is time-invariant, however, in practice this assumption is rarely true. To take this issue into account, we consider a large number of simulations in which a Gaussian plume changes randomly according to the Ornstein-Uhlenbeck process described in Section 2.4. The factor τ is chosen equal to 30 s in all simulations. Each simulation starts with a westerly wind of 5 m/s, but it gradually evolves into a fluctuating wind field with a statistical standard deviation in the wind speed and/or in the wind direction in accordance with a pre-defined factor σ_χ , see Equation 13. For each standard deviation, 300 independent simulation runs are performed, and the results are shown for time-varying wind direction (a), time-varying wind speed (b) and their combination (c) in Figure 6.

Figure 6a shows that the percentage error increases with increasing wind direction variability. The plumes do not stay in the same location during the simulation as the direction of its center-line changes according to the Ornstein-Uhlenbeck process, and this can lead to an underestimate or an overestimate of the spatial extent of plumes, or other plumes being measured multiple times. In any case, the error increases as a result of increased variability in wind direction. The percentage error grows with the wind variability until the wind direction variability reaches a value of approximately 8° . For larger variations, the error does not increase much further. This can be explained from the time scale τ in the Ornstein-Uhlenbeck process that does not allow too rapid variations. Hence, the variations in wind direction may be larger over the entire simulation, but during the time of one single horizontal flight line, the variation seen by the drone will be similar. Note that we only model horizontal meandering of the plume; vertical meandering would have a similar effect, as long as source locations are far above the ground and measurements take place at high altitude as well.


Figure 6b shows what happens when we vary the wind speed. Our first observation is that the percentage error is generally much lower than in Figure 6a. This can be directly explained from Equation 10: the concentration level is inversely proportional to the wind velocity. As long as a fraction of the methane plume is captured, the product of $\mathbf{c}\mathbf{u} \cdot \mathbf{n}$ in Equation 3 will be approximately constant even if the wind is varying. The total mass balance equation will thus be unaffected. This holds for small variations in wind speed.

If there are very large variations in the wind speed (over about 50% on average), it may happen that the random fluctuations may approach 100% on occasion. If that is the case, the wind speed becomes close to 0 m/s, or the wind may even inverse direction, which means that parts of the plume are missed. This effect can be seen as a spurious artifact of the simulation, but it bears some resemblance to what can happen in actual drone-based methane measurements in low-wind conditions: if the wind speed drops to zero, then it can become practically difficult to see any signal from the methane plume in the vertical curtain chosen.


Figure 6c applies to the situation with both time varying wind speed and wind direction variability. Apparently, the dominant source of error at moderate variations is the wind direction. This is in line with the results in Figure 6a and b, which showed markedly higher uncertainties for the wind direction variations.

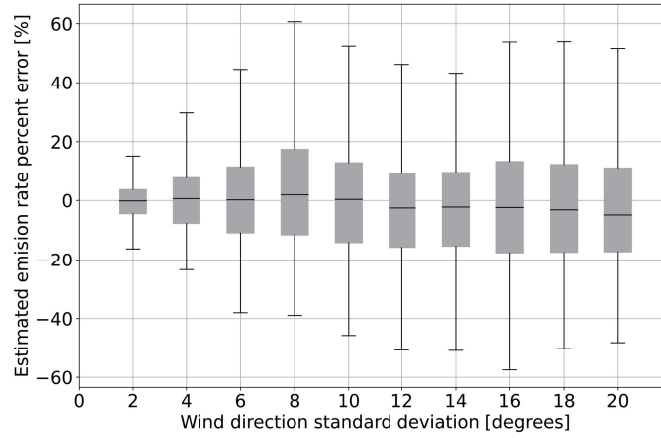

(a)

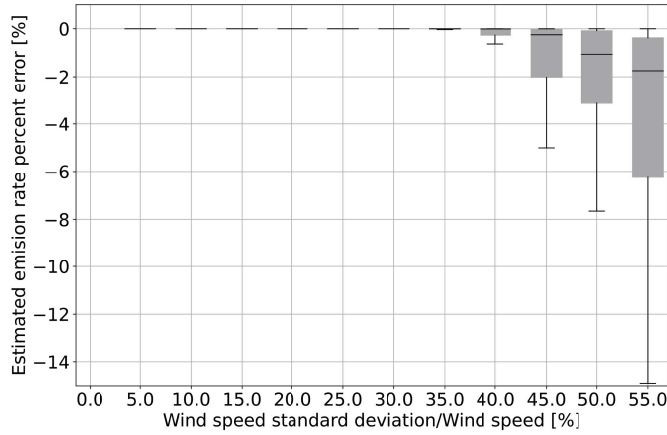

(b)

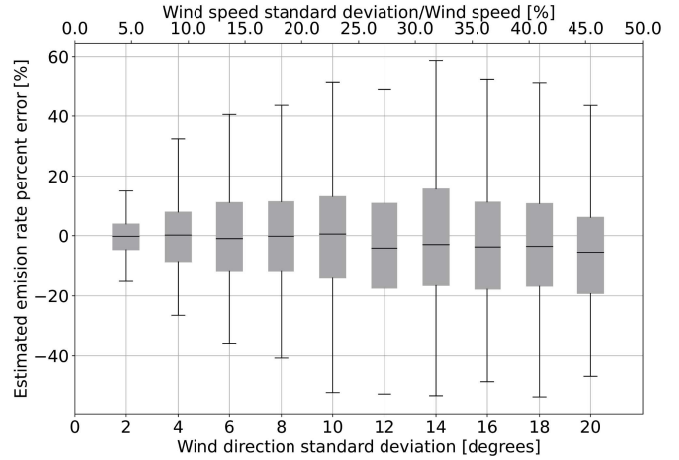

(c)

Figure 6. Box-whisker plots for the calculated emission rate error for increasing standard deviation of a) time-varying wind direction, b) time-varying speed and c) time varying wind velocity (both direction and speed at the same time). The 2-D curtain is located 5 m/s downwind from the source.

3.5 Other potential sources of error

There are other potential sources of error and uncertainty, such as the precision of the methane concentration sensor, uncertainty in GPS measurements, and the uncertainty of wind velocity in the turbulent atmospheric boundary layer between the source and the vertical measurement curtain during the entire time required to complete the data acquisition. The detailed properties of the emission source, such as the temperature of the emitted gas and its buoyancy, can also play a role in how a methane plume moves through the atmosphere. Finally, time variation in mass emission rates from sources are not considered in this paper, but they may well be a source of uncertainty in practice in site-level measurements under the OGMP framework.

4 Real-life examples

4.1 Historic controlled release data from Scientific Aviation

Nine controlled release experiments from Scientific Aviation were analyzed to gain a better understanding of the empirical uncertainty of the mass balance method, and a more detailed appreciation of the underlying assumptions that go into the computation of the methane emission rate. The experiments were carried out near the Scientific Aviation office in Boulder, Colorado, in 2019 and 2020.

Figure 7a shows the flight path of measurement “A”, done on 13 November 2019. The dots, which indicate the flight trajectory, are colored by the methane concentration measured. Figure 7b shows the altitude of the drone in the course of time during measurement “A”. Apparently, multiple transects of the methane plume were attempted at different altitudes. Figure 7c shows a time series of the methane concentration measurements.

Although the objective was to fly a vertical curtain pattern, comparing the left graph of Figure 7 to Figure 1 highlights the difference between the simulated drone measurements and actual drone measurement by a pilot. Some of the assumptions considered in Section 3.1 are likely violated: there is no guarantee that there will be one flight line passing the center of the plume, or that the horizontal and vertical spacings between adjacent concentration are nearly equidistant. The time series of concentration measurements and altitude indicates that there are upward (solid red) or downward (dashed black) curtains where the plume is missed. It is thus important to assess how the emission rate calculated from the mass balance method is affected by irregularities in the measurements taken by the drone.

As an illustration, we will consider the data from flight “A” in more detail. We use a Nearest Neighbor algorithm with the Euclidean distance metric to project the concentration measurements onto a vertical plane. This is only one choice for the data interpolation; other distance metrics as Chebyshev and Minkowski distances can also be used in the Nearest Neighbor algorithm, and also other interpolation techniques such as a Gaussian smoother can be used as an alternative to the Nearest Neighbor process. Since Scientific Aviation uses the Nearest Neighbor for the projection of the concentration measurements on the vertical curtain plane in all their data analysis, we use the same

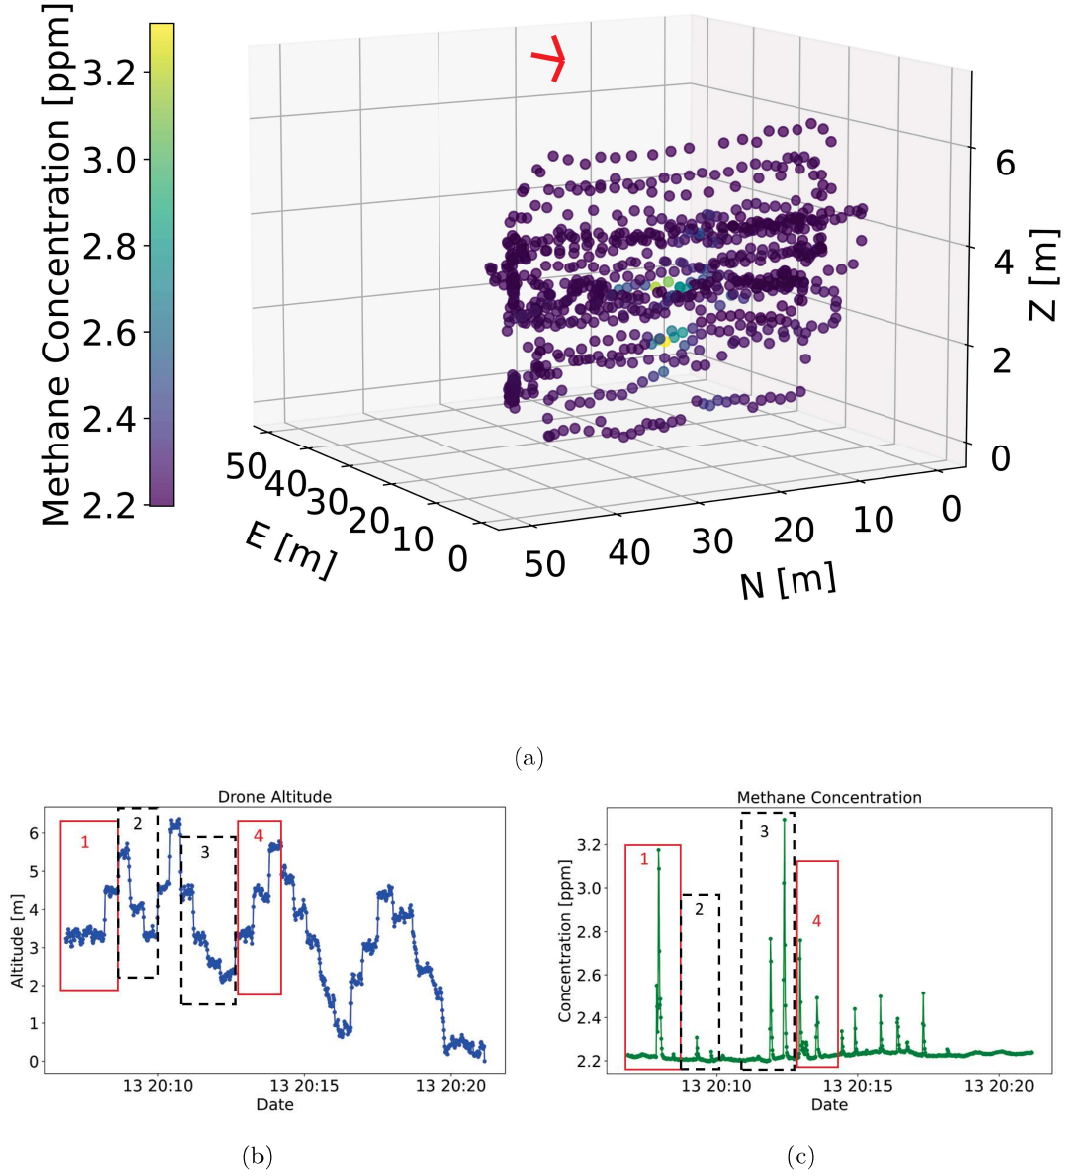


Figure 7. a) Methane concentration data plotted against the location of measurement in a 3-dimensional space. The average wind direction is shown with the red arrow. b) Time series of the drone altitude, with the first upward transect denoted by “1”(solid red), the first downward transect denoted by “2”(dashed black); the second downward transect denoted by “3”(solid red), the second upward transect denoted by “4”(dashed black),c) Concentration time series for the controlled release data “A”acquired on 2019-11-11.

interpolation technique to generate the results in this section. Section D shows that the Gaussian Smoother as the
 390 interpolation technique for this dataset results in similar emission rates. Using the interpolated concentration values
 on the plane, can then compute the total emission rate with the mass balance method using Equation (8), where
 the total mass emission rate is the average of multiple individual curtain patterns. The atmospheric background, c_0
 in Equation 6, is estimated from the the 10% percentile of all the concentration measurements.

If we take into account all the concentration measurements (except those corresponding to the drone flying from the
 395 landing pad towards the curtain of interest), the average atmospheric background concentration has been determined
 as 2.198 ppm. The calculated emission rate using all the concentration measurements, without any postprocessing,
 is 55.7 g/h. This result is 80% higher than the true release rate of 30.8 g/h.

If, on the other hand, we choose a different postprocessing method to calculate the emission rate, the results can
 be very different. For example, we can subdivide the flight trajectory in measurement “A” into 2 upward curtains,
 400 indicated as 1 and 4 with red rectangles in Figure 7b, and 2 downward curtains, indicated as 2 and 3 with black
 rectangles. Shown in Figure 8 are the 3-dimensional concentration measurements for each of these curtains. The
 curtains have been chosen such that they fully cover the plume. This means that three curtains at the second half
 of the data are discarded, resulting in the exclusion of 40% of the data for this flight, as they do not fully cover
 the plume (although, they have higher concentration than the background, they only partially cover the plume) and
 405 including them in the estimate will result in an underestimation in the emission rate. It should be noted that for this
 postprocessing method, the atmospheric background is calculated for each curtain separately as the 10% percentile
 of the concentration measurements within each curtain. The uncertainty in the estimate of the background between
 the four curtains is 5 ppb, whereas the maximum concentration enhancements between the curtains are well above
 500 ppb, implying that the uncertainty in the atmospheric background has a negligible effect on the emission rate
 410 estimate. Presented in Table 1 is the calculated atmospheric background, c_0 , and emission rate for each individual
 upward and downward curtain using Equation (8) along with the average emission rate from the curtains selected.
 The result is an emission estimate of 28.26 g/h, which is only 8.2% lower than the true emission rate. This shows
 that the postprocessing method can potentially decrease the error in the calculated emission rate considerably and
 is a more robust alternative to using all the concentration measurement without any postprocessing.

415 If we employ Equation (9) for the computation of the methane emission rate, then the result is 34 g/h, which is
 about 10% higher than the true answer of 30.8 g/h. The difference between the two calculation methods is due to
 a different interpolation methodology and post processing technique. Since the curtains are not equal in this case
 (some curtains span a larger range of altitudes than others), the latter method (using Equation (9)) gives a different
 result than the average of the mass emission rates computed per curtain (using Equation (8)).

420 Shown in Table 2 is the calculated emission rate from Equation (8) and Equation (9) along with the true release
 rate for nine different controlled release experiments. The last column of Table 2 shows the dimensionless vertical
 spacing $\Delta z'$, computed from the flight data for each controlled release survey using Equation (15b). For want of
 detailed long-term wind data in this case, we assumed the plume opening angle ω_z to be equal to 5° in all cases.

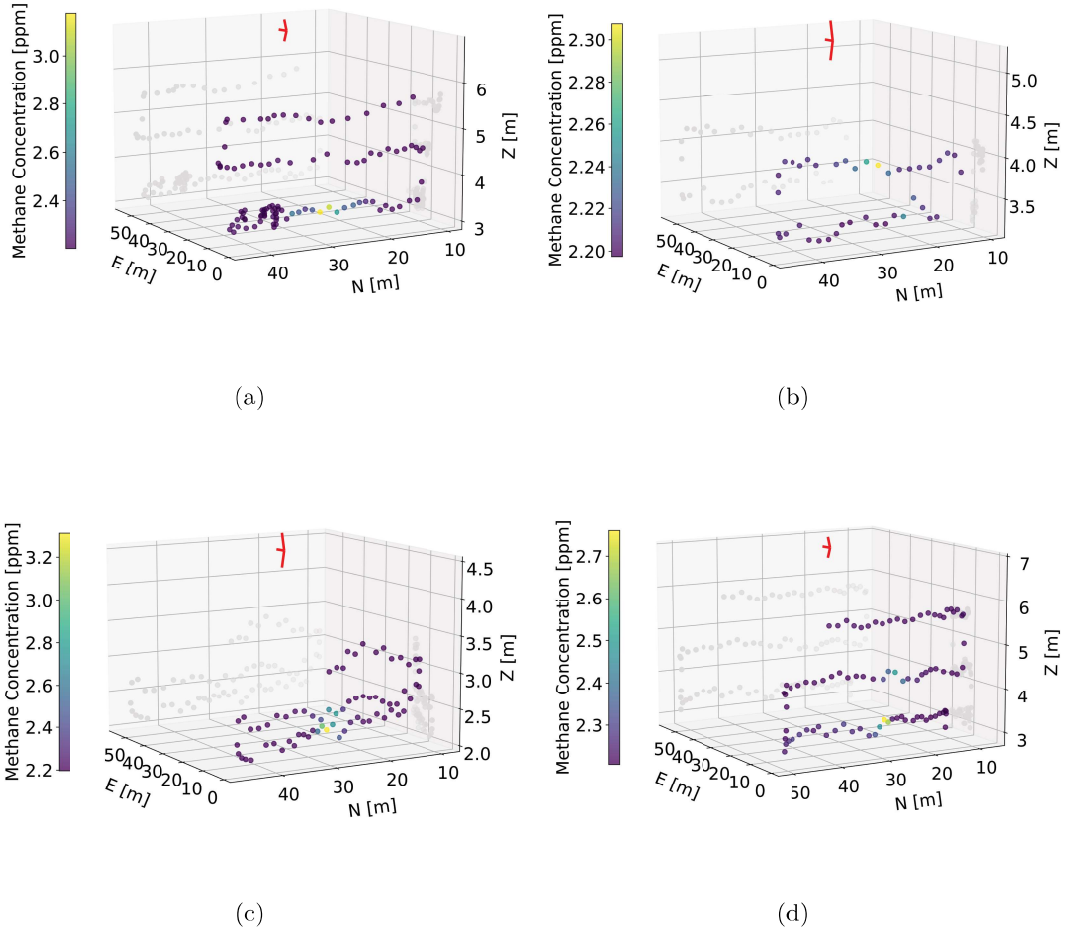


Figure 8. 3-dimensional concentration measurements for a) upward curtain "1", b) downward curtain "2", c) downward curtain "3" and d) upward curtain "4". The gray dots in the figure indicate the concentration measurements projected onto NZ and EZ plane to provide a better visualization of 3-dimensional structure of the point cloud. The red arrow indicates the average wind direction.

Table 1. Atmospheric background c_0 and the emission rates calculated per curtain and the average emission rate between upward and downward curtains for the measurement “A”, which was carried out on 13 November 2019. The emission rates in the table are calculated using Equation (8). The true emission rate was 30.8 g/h.

Curtain	c_0 [ppm]	Emission rate [g/h]	Average of U and D	Emission rate error [%]
Upward (U) 1	2.204	14.48	13.39	-56
Downward (D) 2	2.198	12.30		
Downward (D) 3	2.197	46.73	43.14	43
Upward (U) 4	2.209	40.10		
Average from the four selected curtains	2.202	28.26		-8.2
Average from all curtains	2.198	55.7		+80

The values in the last column show that the dimensionless vertical spacing $\Delta z'$ was smaller than 1 in most cases, and never exceeded 1.4; looking back at the contour plot in Figure 4, it is clear that the potential avoidable error due to the choice of vertical spacing was relatively low in all cases. Although, as noted earlier, this does not mean that there could not have been other sources of error, at least these are promising measurements with a small overall error if an appropriate postprocessing method is selected to process the measured concentration and wind data.

The results in Table 2 illustrate that indeed there is, in general, reasonable agreement between the calculated mass emission rates and the true methane emission rates. The root-mean-square of the error percentage is 31.0% when using Equation (8), and it is 28.9% when using Equation (9). On individual cases, however, there can be a considerable difference between the two methods, see for example case C (62.54% error versus -13%) or case H (6.63% error versus 29%). There does not appear to be a systematic bias that favors one method or the other in all the cases.

A tentative conclusion from the controlled release data is that the “best” data analytic method depends primarily on how the data was collected. For instance, Equation (8) appears to work best in cases where the data is collected in one full curtain with sufficiently small and constant vertical and horizontal spacings, with a fairly constant wind direction during the flight. In a second or third flight, the same curtain pattern may be flown, with again enough data for a reliable mass balance calculation per flight. In that case, Equation (8) is probably more appropriate because it uses the full mass balance method based on a direct discretization of the boundary integral (Equation (5)). We can see from Table 2 that this approach seems to work well for cylinder-shaped flight patterns in particular. On the other hand, if the data acquisition shows multiple curtains with a small number of data points per curtain (as the flight pattern from measurement “A” in Figure 8, for instance), then it is wise to group the measurements together in bins per altitude in order to collect sufficient statistics to base the mass balance calculation on, using Equation (9). If Equation (8) is used, it may be necessary to manually select useful data from less useful data – as was illustrated earlier in Table 1 for flight “A”.

Table 2. Calculated emission rate and the error percentage for the controlled release experiments carried out by Scientific Aviation. Mass emission rates are computed from the data using Equation (8) and Equation (9), described in Section 2.3. The value of the dimensionless vertical spacing $\Delta z'$ is shown in the right-most column.

Name	Flight type	$\dot{m}_{\text{true}}$ g/h	$\dot{m}$ from Eq. (8) g/h [$\epsilon\%$]	$\dot{m}$ from Eq. (9) g/h [$\epsilon\%$]	$\Delta z'$
A	Curtain	30.8	28.26 [-8.24%]	34 [10%]	0.57
B	Curtain	31.2	28.65 [-8.17%]	39 [25%]	0.91
C	Curtain	20.8	33.81 [62.54%]	18 [-13%]	0.43
D	Cylinder	20.04	20.06 [0.1%]	19 [-5%]	1.2
E	Curtain	10.02	3.56 [-64.47%]	3 [-70%]	0.7
F	Cylinder	10.15	9.64 [-5.02%]	7.9 [-22%]	1.07
G	Cylinder	30.45	34.78 [14.22%]	32.5 [7%]	0.97
H	Cylinder	14.46	15.42 [6.63%]	18.6 [29%]	1.4
I	Cylinder	12.35	10.7 [-13.36%]	10 [19%]	1.2
RMS percentage error			31.0%	28.9%	

4.2 Historic measurements from SeekOps

To understand how the uncertainty in methane emission rate quantification translates into potential errors in practice, a total number of 1,001 historical drone flights from SeekOps were analyzed (all the data was anonymized with regards to the geographical location and the paying customer). The data from the flights contained the position of the drone and the concentration measured at that moment in time; in addition, simultaneous data from the ground-based anemometer (at an altitude of approximately 2 m) was provided, which was extrapolated to the altitude of the drone using a predefined velocity profile from turbulent flow theory. This extrapolation itself can be significant source of uncertainty in practice, because the actual wind velocity at the position of the drone can be very different from the wind velocity measured close to the ground. Despite this caveat, we use the data from anemometer to obtain a first estimate of the variability of the wind conditions. In summary, the following parameters were calculated from the data collected during each flight: a) from the anemometer data: the wind average speed, wind standard deviation in North-South and East-West directions; b) from the flight pattern: the average horizontal and vertical spacing in methane concentration measurements, and standard deviations of these quantities; c) from site layout: the downward distance from source, estimated from the source location in an equipment area. In order to allow the uncertainty analysis as explained in Section 3, the raw wind data needs to be converted into an absolute wind speed and its root-mean-square fluctuation, and a plume opening angle. The conversion process is described in the Supplementary Information.

With these parameters calculated, the potential errors were calculated for each of the 1,001 historic flights by SeekOps. Based on the available information, the errors in the emission rate calculation due to the following sources

are calculated for each flight: a) not passing the center of the plume due to large vertical spacing between the flight lines; b) non-equidistant vertical spacing; c) time-varying wind speed; d) time-varying wind direction.

We will report the potential errors due to these parameters for flights in four categories, based on the plume opening angle at the time of measurement. The vertical plume opening angle in all 1,001 flights analysed covers the full range of angles from 0° to 90° ; for visualization purposes, we will report the potential errors in 4 groups of the plume opening angles: between 0° and 22.5° (with an average opening angle of 10.7° for measurements with a plume opening angle in this category); between 21.4° and 45° (with an average of 30.5°); between 45° and 67.5° (with an average of 50.8°); and between 67.5° and 90° (with an average of 71.1°).

Not passing the center of the plume

The results for the effect of non-zero horizontal and vertical spacings in the methane concentration measurements are shown in Figure 9. Figure 9a shows the results for the category of flights where the plume opening angle was relatively narrow. Color shades from blue to yellow indicate increase in the errors in the calculated emission rate. The dimensionless horizontal ($\Delta P'$) and vertical ($\Delta z'$) spacings are determined from the flight data provided by SeekOps; these coordinates are then plotted as orange crosses onto the contour plot that was determined for a plume with opening angle of 10.7° . Most orange crosses are located close to the origin of the graph. This area corresponds to low potential errors due to the choices of dimensionless spacings. There are also flights, however, where the dimensionless spacing was larger than 1 (in horizontal and/or in vertical direction), and for those cases the errors become potentially very large: more than 100% of the measured value. The reason why there is a significant number of data points in this region may actually be due to unexpectedly coherent wind situations: if the wind is steady and turbulent fluctuations are low, then the plume opening angle is small, and the dimensionless horizontal and vertical spacings can become large since the opening angle is in the denominator of Equation (15b) (through Equation (11b)). There is thus the risk that the plume passes through the flight lines, meaning that the drone misses the plume altogether.

The results for the wide plume opening angles are shown in the other graphs of Figure 9. In these cases, we see that most data points from SeekOps flights are located near the origin in regions where the expected error is relatively low.

Non-equidistant vertical spacing

Now we analyse the errors that can potentially occur due to the standard deviation of vertical spacings. The result is shown in Figure 10, for each of the four categories of plume opening angles. The box-whisker plot is generated from the numerical simulations described in Section 3, using the average horizontal and vertical spacings, vertical opening angles and downwind distance over 300 runs. For each run, the flight coordinates are generated by varying the flight lines randomly using a Gaussian distribution. The green bars are a histogram of the incidence rate in the 1,001 flights of the ratio between the vertical standard deviation and the vertical spacing. Figure 10a shows the results for

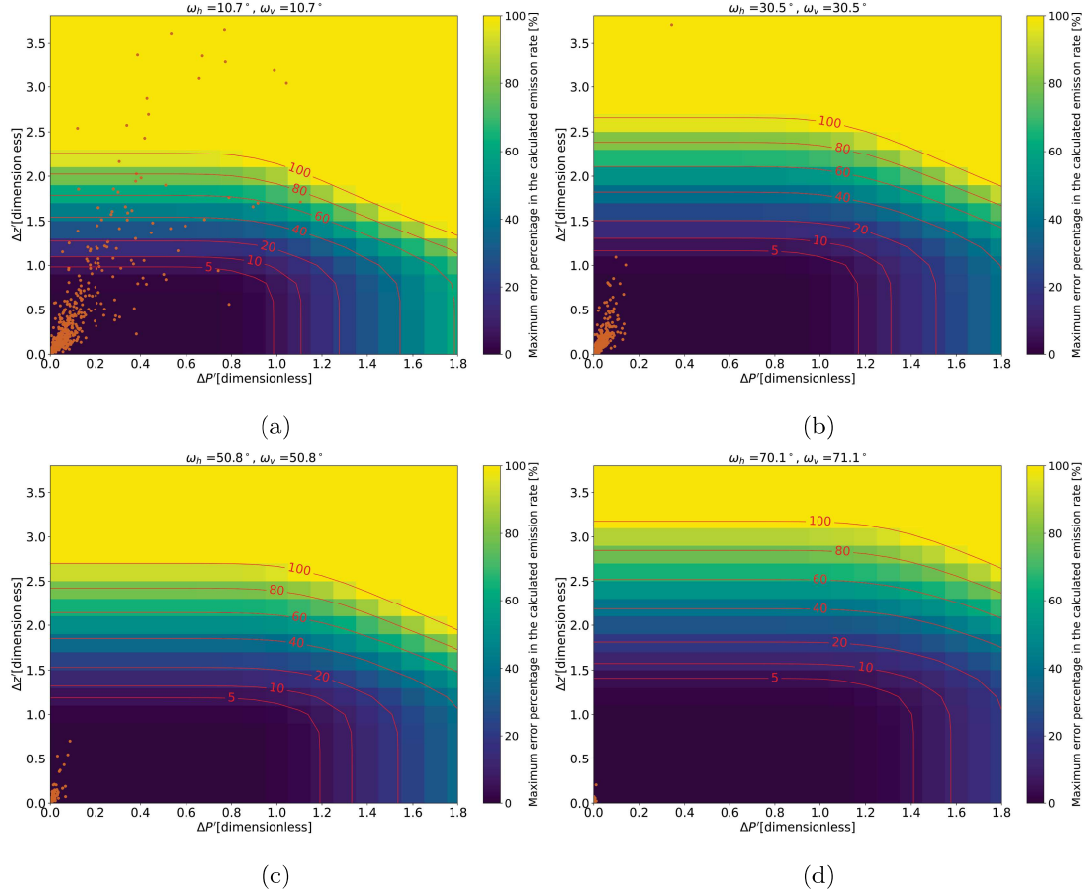


Figure 9. Contours indicate maximum calculated emission rate error (over 225 calculations corresponding to missing the plume by different percentages of the horizontal and vertical spacing) for varying dimensionless horizontal and vertical spacings for four different groups of plume opening angles: a) plume opening angle of 10.7° , b) plume opening angle of 30.5° , c) plume opening angle of 50.8° , and d) plume opening angle of 71.1° . The orange dots indicate the horizontal and vertical spacings for four different groups of plume opening angles a) between 0° and 22.5° , b) between 21.4° and 45° , c) between 45° and 67.5° and d) between 67.5° and 90° . Shown with red are the error contours.

the category of flights where the plume opening angle was relatively narrow. The results for the wide plume opening
 500 angles are shown in the other graphs of Figure 10. For most flights, the variation in the vertical spacing is less than
 10% of the vertical spacing. Therefore, this effect is not expected to be a major source of error or uncertainty in the
 measurement.

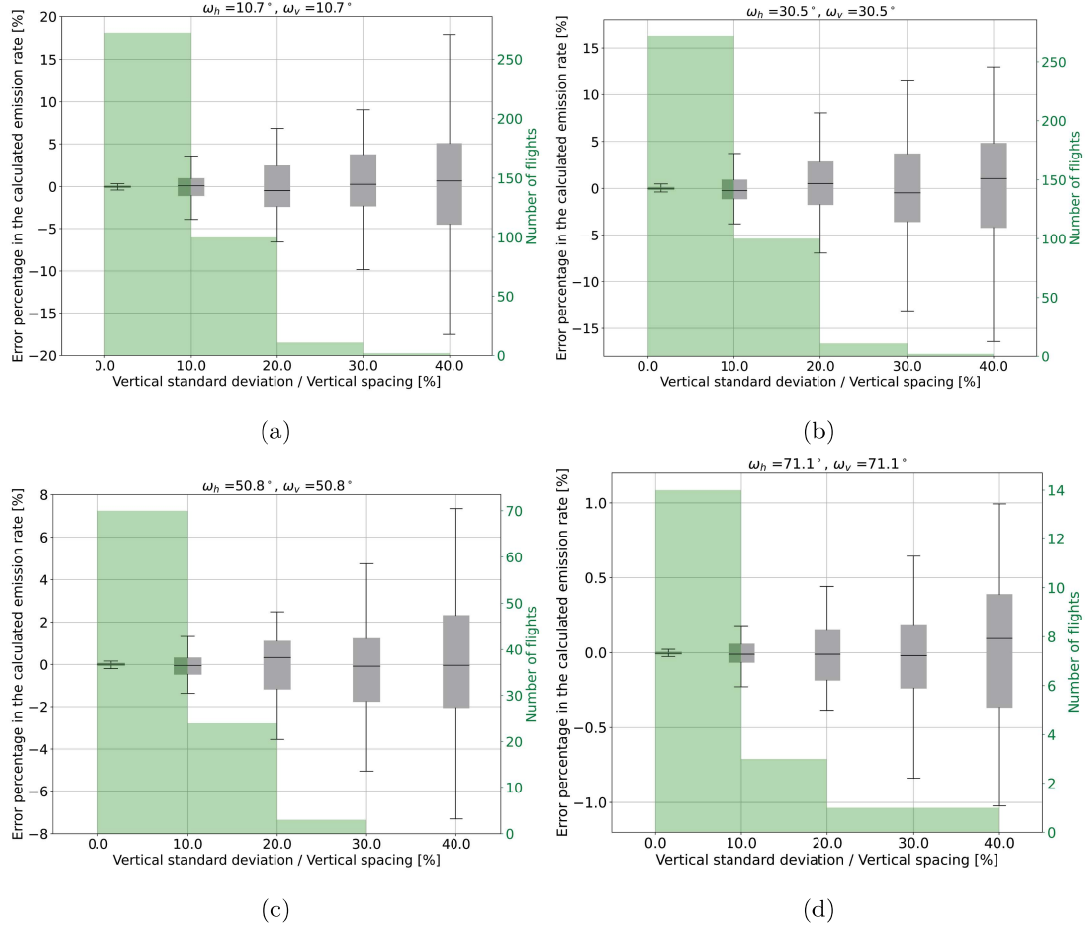


Figure 10. Theoretical box-whisker plots due to non-equidistant vertical spacing for four different groups of plume opening angles. a) plume opening angle of 10.7° , b) plume opening angle of 30.5° , c) plume opening angle of 50.8° , and d) plume opening angle of 71.1° . The green bars show the histogram of the actual flight data as a function of the vertical standard deviation divided by the vertical spacing for four different groups of plume opening angles a) between 0° and 22.5° , b) between 21.4° and 45° , c) between 45° and 67.5° and d) between 67.5° and 90° .

Time variation in wind speed and/or wind direction

We will now look at the errors that can potentially occur due to time-varying wind direction and wind speed, shown in Figure 11 and Figure 12 respectively. For each flight, the location on the horizontal axis is calculated using the wind speed, and wind direction, and their corresponding standard deviation. The errors bars are calculated from the numerical simulations described in Section 3, from the average over 300 independent runs per flight. For each run, the wind speed and wind directions are generated from the Ornstein-Uhlenbeck process. The box-whisker plot is generated using the average wind speed, wind direction, their corresponding variations and vertical opening angles.

Figure 11a shows the results for time-varying wind directions for the category of flights where the plume opening angle was relatively narrow. The results for the wide plume opening angles are shown in the other graphs of Figure 11. Most flights have wind direction variability less than 40° and for increasing wind direction variability, the absolute error increases linearly. It can also be seen across all graphs in Figure 11 that the higher opening angles typically correspond to higher variation in the wind direction, see e.g. the horizontal axes in Figure 11c) and Figure 11d).

Figure 12a shows the results for time-varying wind speed and for the category of flights where the plume opening angle was relatively narrow. As the plume opening angle gets wider and the variation of the wind speed increases, the error percentage in the calculated emission rate increases.

By means of summary, Figure 13 shows the cumulative statistics over all 1,001 flights with regards to the theoretical error percentage in the emission rate, for each of the different sources of errors discussed above. Not passing the center of the plume has the largest contribution, as was already observed in Figure 9a). About 55% of the flights could have more than 10% emission rate percentage theoretical error because of missing the center of the plume. The other sources of error usually have a smaller impact. For instance, all the measurements have less than 10% theoretical error due to non-equidistant vertical flight lines. For the contribution of the time-varying wind speed, around 55% of the flights have less than 10% error in the calculated emission rate; the effect of time-varying wind direction is expected to be larger than 10% only in 20% of the cases. Around 70% of the flights have the emission rate error less than 50% due to not passing the center of the plume. Between 97% and 100% of the flights have less than 50% theoretical error in the calculated emission rate due to time-varying wind direction and speed and non-equidistant vertical flight lines.

5 Discussion

The theoretical framework presented above allows for a post-hoc analysis of methane emission quantification surveys. With this, a number of potential errors and uncertainties in the measurements can be identified.

The analysis on historic flight data from Scientific Aviation in controlled release experiments, reported in Section 4.1, shows that there can be a wide range of outcomes in the mass balance method for different curtain flights – even during the same controlled release event. For the best result, the data analysis procedure must be adapted to the measurements taken.

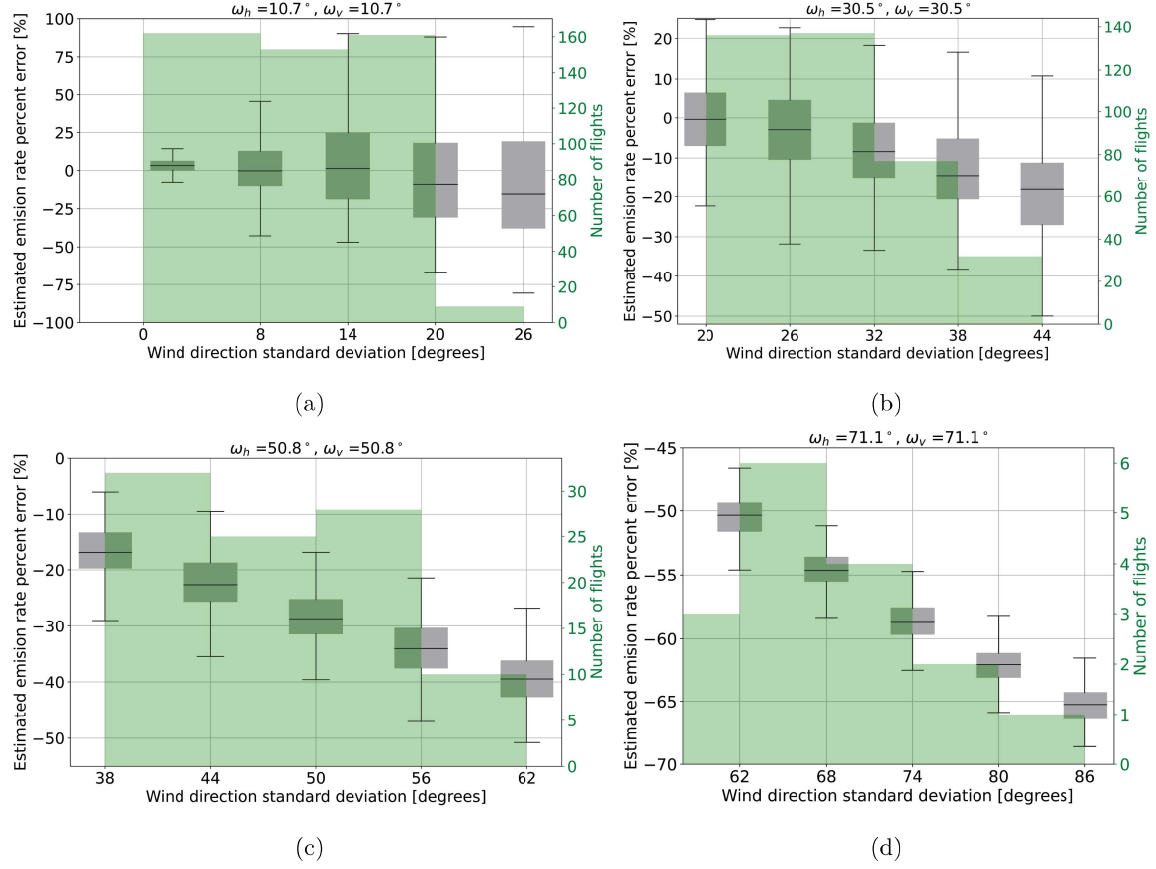


Figure 11. Potential box-whisker plots to time-varying wind direction. a) plume opening angle of 10.7° , b) plume opening angle of 30.5° , c) plume opening angle of 50.8° , and d) plume opening angle of 71.1° . The green bars show the histogram of the actual flight data as a function of the vertical standard deviation divided by the vertical spacing for four different groups of plume opening angles a) between 0° and 22.5° , b) between 21.4° and 45° , c) between 45° and 67.5° and d) between 67.5° and 90° .

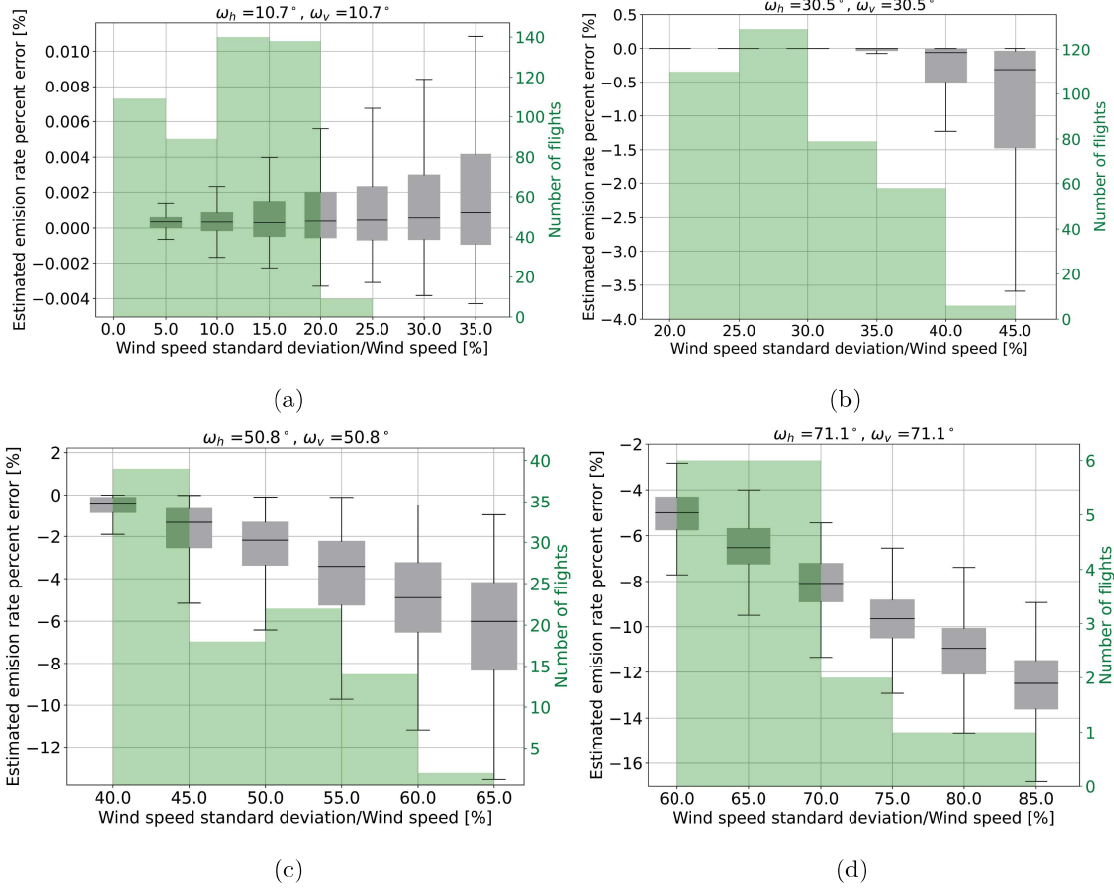


Figure 12. Potential box-whisker plots due to time-varying wind speed. a) plume opening angle of 10.7° , b) plume opening angle of 30.5° , c) plume opening angle of 50.8° , and d) plume opening angle of 71.1° . The green bars show the histogram of the actual flight data as a function of the vertical standard deviation divided by the vertical spacing for four different groups of plume opening angles a) between 0° and 22.5° , b) between 21.4° and 45° , c) between 45° and 67.5° and d) between 67.5° and 90° .

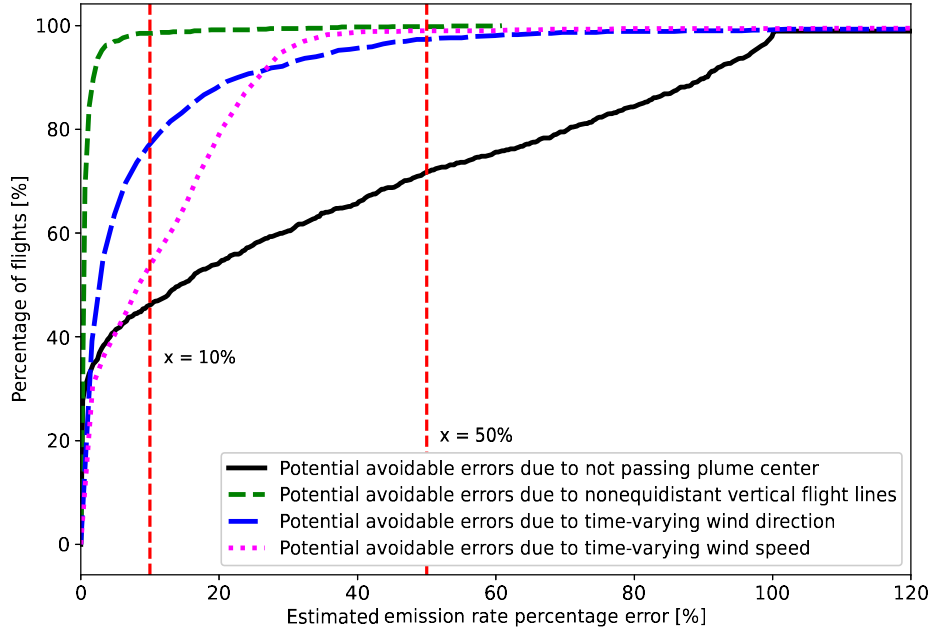


Figure 13. Cumulative distribution of flights (totalling 1001) as a function of theoretically calculated maximum error for potential avoidable error percentage due to not passing the plume centre (solid black), non-equidistant vertical flight lines (dashed green), time-varying wind directions (dotted dashed blue) and time-varying wind speed (dotted pink). Vertical dashed red lines indicate 10% and 50% error in the estimated emission rate.

The theoretical analysis can also be used to evaluate the quality of a historical data set of a large number of surveys. From the analysis reported in Section 4.2, it seems that the largest risk of uncertainty is caused by too large of a vertical spacing of the flight lines in combination with a relatively short downwind distance from the source. The uncertainty is highest in cases when the wind field is steady and the plume opening angle is small –
 540 contradicting some ‘conventional wisdom’ in the industry that the uncertainty is always lowest when the wind field is steady. What we find is that this assumption is only true if the measurements are taken at a sufficient distance downwind of a source with a sufficiently small vertical spacing between flight lines.

In addition to this risk of missing the methane plume in the case of steady winds, it becomes also clear from our analysis (Figure 11c and Figure 11d, in particular) that large fluctuations in the wind direction can result in a
 545 significant error. Such a situation typically occurs when the atmosphere is unstable or when the average wind speed is very low. In these cases, the fast diffusion of the methane plume can easily result in parts of the plume being missed; indeed, Figure 11c and Figure 11d show that the methane emission is usually underestimated by the mass balance method in these cases.

Our observations can also provide guidelines to future campaigns. The two main recommendations based on the present work are: a) For each individual quantification survey, fly multiple curtain patterns and choose the appropriate data analysis method to avoid excessive influence of unrepresentative data (outliers) on the result. b) Take measurements with a sufficiently small vertical spacing and at a sufficiently large distance downwind of the source for the wind conditions on the day. In particular, the dimensionless horizontal and vertical spacings $\Delta P'$ and $\Delta z'$ have to be smaller than 1 for the best result (see Equation (15b) for the full expression).

On the other hand, however, downwind distance should not be so large that methane plumes from the facility of interest are missed. Measurements very far downwind are also unfavorable because of the lower methane concentrations expected, which will lead to a lower signal-to-noise ratio. We recommend to use values of $\Delta P'$ and $\Delta z'$ between 0.1 and 1.0 in practical applications. To make this guideline more practical: if we assume that most opening angles are larger than 5 degrees, which is the case in about 98% of the 1,001 onshore drone flights considered in this paper, then the guidance is that the vertical and horizontal spacings have to be smaller than 1/10-th of the downwind distance to the source; in offshore measurements, this guidance may have to be adapted to address different atmospheric stability over open water.

As a final reflection, we would like to emphasize that we have not focused in this paper on measurement uncertainty of the sensors. This means that we do not account for possible deviations due to finite precision in the methane concentration measurements, nor do we assume any error in the wind measurement. In addition, our analyses are based on the assumption that the wind vector at the position of the drone is determined perfectly. In reality, of course, this is never the case, and there are various methods deployed by different service providers to measure the wind. We only observe here that any error in the wind measurement is likely to propagate in the computations in the mass balance method as per Equation (6). It is not wise to assume that any error in wind measurement will somehow be compensated for by other errors. Notwithstanding other sources of error, we believe that this paper provides some guidelines to minimize avoidable errors that can result from choices in the data acquisition process and in the methodology used for postprocessing.

6 Conclusions

Site level measurements of methane emissions are often used by operators for reconciliation with bottom-up emission inventories with the aim to improve accuracy, thoroughness and confidence in reported methane emissions. In that context it is of critical importance to minimize measurement errors and to understand the associated uncertainty. This paper describes a systematic analysis of potential errors in methane emission quantification surveys using the mass balance method, for parameters related to the acquisition of concentration data and the method of postprocessing. The analysis is applied to a quadcopter drone with a high-precision methane sensor flying in a vertical curtain pattern; the total mass emission rate can then be computed post hoc from the measured methane concentration data and simultaneously measured wind data. We find that the most important source of potential error can be

expressed as a dimensionless number with the spatial resolution of the methane concentration measurements and the downwind distance from the main emission sources. The potential error is largest (and, indeed, can be as high as 100%) in situations where the wind speed is steady and the methane plume has a coherent shape – contradicting
585 the intuition of some operators in the industry.

The learnings from our theoretical error analysis have been applied to a number of historical measurements in a controlled release setting. We show how the learnings on the main sources of error can be used to eliminate potential errors during the postprocessing of flight data; we show that the reported results can be very close to the actual methane emission rates if the appropriate data analysis method is selected. Second, we have evaluated an aggregated
590 data set of 1,001 historical drone flights. Our analysis shows that the potential errors in the mass balance method can be of the order of 100% on occasions, even though the theoretical error from the identified error sources were relatively small in the majority of the flights considered.

The discussion section provides some guidelines on how to avoid or minimize potential errors in drone measurements for methane emission quantification. The two main recommendations are to (1) fly multiple curtain patterns
595 in each individual survey in combination with an appropriate data analysis method to avoid excessive influence of unrepresentative data (outliers) on the result, and (2) to take measurements with a sufficiently small vertical spacing and at a sufficiently large distance downstream of the source for the wind conditions on the day, with the dimensionless horizontal and vertical spacings $\Delta P'$ and $\Delta z'$ both smaller than 1. There is an optimum though: downwind distance should not be so large that methane plumes from the facility of interest are missed, and measurements very
600 far downwind are also unfavorable because of the lower signal-to-noise ratio. It appears to us that values of $\Delta P'$ and $\Delta z'$ between 0.1 and 1.0 are optimal.

Author contributions. The ideation and management of the research project was done by RI and THM, who are the main authors of the manuscript. The simulation studies and all data analyses were done by THM, with help of MJ and BVDK, under guidance from RI. BS, KD and AC provided historical data from SeekOps and facilitated the data analysis; SC did the
605 same for historic data from Scientific Aviation. All authors were involved in reviewing the paper.

Data availability. All the codes and data used in this work will be made available online.

Competing interests. The corresponding author has declared that none of the authors has any competing interests.

References

- Stockie, J. The mathematics of atmospheric dispersion modelling. *SIAM Review*. **53**, 349-372 (2011)
- 610 Webster, C. Measuring methane and its isotopes $^{12}\text{CH}_4$, $^{13}\text{CH}_4$, and CH_3D on the surface of Mars with in situ laser spectroscopy. *Applied Optics*. **44**, 1226-1235 (2005,3), <https://opg.optica.org/ao/abstract.cfm?URI=ao-44-7-1226>
- Liu, Y., Paris, J., Broquet, G., Bescós Roy, V., Meixus Fernandez, T., Andersen, R., Russu Berlanga, A., Christensen, E., Courtois, Y., Dominok, S., Dussenne, C., Eckert, T., Finlayson, A., Fuente, A., Gunn, C., Hashmonay, R., Grigoletto Hayashi, J., Helmore, J., Honsel, S., Innocenti, F., Irjala, M., Log, T., Lopez, C., Cortés Martínez, F., Martinez, J.,
- 615 Massardier, A., Nygaard, H., Agregan Reboredo, P., Rousset, E., Scherello, A., Ulbricht, M., Weidmann, D., Williams, O., Yarrow, N., Zarea, M., Ziegler, R., Sciare, J., Vrekoussis, M. & Bousquet, P. Assessment of current methane emissions quantification techniques for natural gas midstream applications. *Atmospheric Measurement Techniques Discussions*. **2023** pp. 1-27 (2023), <https://amt.copernicus.org/preprints/amt-2023-97/>
- NASA Methane detector sniffs out leaks. (2019)
- 620 Sibson, R. A brief description of natural neighbor interpolation. (1981), <https://api.semanticscholar.org/CorpusID:115462887>
- United Nations Environment Programme (UNEP) Oil and gas methane partnership (OGMP) 2.0 framework. (2020)
- Conley, S., Faloon, I., Mehrotra, S., Suard, M., Lenschow, D., Sweeney, C., Herndon, S., Schwietzke, S., Pétron, G., Pifer, J., Kort, E. & Schnell, R. Application of Gauss's theorem to quantify localized surface emissions from airborne measurements of wind and trace gases. *Atmospheric Measurement Techniques*. **10**, 3345-3358 (2017)
- 625 Monaghan, J. J., Smoothed particle hydrodynamics, *Reports on Progress in Physics*, **68** 1703 (2005).
- Intergovernmental panel on Climate Change, Fifth Assessment Report *IPCC*. (2014)
- Nisbet, E., Manning, M., Dlugokencky, E., Fisher, R., Lowry, D., Michel, S., Myhre, C., Platt, S., Allen, G., Bousquet, P., Brownlow, R., Cain, M., France, J., Hermansen, O., Hossaini, R., Jones, A., Levin, I., Manning, A., Myhre, G., Pyle, J., Vaughn, B., Warwick, N. & White, J. Very strong atmospheric methane growth in the 4 Years 2014–2017: implications for
- 630 the Paris agreement. *Global Biogeochemical Cycles*. **33**, 318-342 (2019)
- Rasmussen, C. & Williams, C. Gaussian processes for machine learning. (MIT Press, 2006)
- Saunio, M., Stavert, A., Poulter, B., Bousquet, P., Canadell, J., Jackson, R., Raymond, P., Dlugokencky, E., Houweling, S., Patra, P., Ciais, P., Arora, V., Bastviken, D., Bergamaschi, P., Blake, D., Brailsford, G., Bruhwiler, L., Carlson, K., Carrol, M., Castaldi, S., Chandra, N., Crevoisier, C., Crill, P., Covey, K., Curry, C., Etiope, G., Frankenberg, C., Gedney, N., Hegglin, M., Höglund-Isaksson, L., Hugelius, G., Ishizawa, M., Ito, A., Janssens-Maenhout, G., Jensen, K., Joos, F., Kleinen, T., Krummel, P., Langenfelds, R., Laruelle, G., Liu, L., Machida, T., Maksyutov, S., McDonald, K., McNorton, J., Miller, P., Melton, J., Morino, I., Müller, J., Murguía-Flores, F., Naik, V., Niwa, Y., Noce, S., O'Doherty, S., Parker, R., Peng, C., Peng, S., Peters, G., Prigent, C., Prinn, R., Ramonet, M., Regnier, P., Riley, W., Rosentreter, J., Segers, A., Simpson, I., Shi, H., Smith, S., Steele, L., Thornton, B., Tian, H., Tohjima, Y., Tubiello, F., Tsuruta, A., Viovy, N.,
- 640 Voulgarakis, A., Weber, T., Weele, M., Werf, G., Weiss, R., Worthly, D., Wunch, D., Yin, Y., Yoshida, Y., Zhang, W., Zhang, Z., Zhao, Y., Zheng, B., Zhu, Q., Zhu, Q. & Zhuang, Q. The Global methane budget 2000–2017. *Earth System Science Data*. **12**, 1561-1623 (2020)
- Gorchov Negron, A., Kort, E., Conley, S. & Smith, M. Airborne assessment of methane emissions from offshore platforms in the U.S. gulf of Mexico. *Environmental Science & Technology*. **54**, 5112-5120 (2020)

- 645 Katz, V. The history of Stokes' Theorem. *Mathematics Magazine*. **52**, 146-156 (1979)
- Corbett, A. & Smith, B. A study of a miniature TDLAS system onboard two unmanned aircraft to independently quantify methane emissions from oil and gas production assets and other industrial emitters. *Atmosphere*. **13** (2022)
- van Kampen, N. Chapter IV - Markov Processes. *Stochastic Processes In Physics And Chemistry (Third Edition)*. pp. 73-95 (2007)
- 650 Ravikumar, A., Sreedhara, S., Wang, J., Englander, J., Roda-Stuart, D., Bell, C., Zimmerle, D., Lyon, D., Mogstad, I., Ratner, B. & Brandt, A. Single-blind inter-comparison of methane detection technologies – results from the Stanford/EDF Mobile Monitoring Challenge. *Elementa: Science Of The Anthropocene*. **7** pp. 37 (2019,9), <https://doi.org/10.1525/elementa.373>
- Hanson, R., Spearrin, R. & Goldenstein, C. Spectroscopy and Optical Diagnostics for Gases. (Springer, 2016)
- McKain, K., Down, A., Raciti, S. M., Budney, J., Hutyra, L. R., Floerchinger, C., Herndon, S. C., Nehrkorn, T., Zahniser, M.
- 655 S., Jackson, R. B., Phillipse, N. & Wofsy, S. C. Methane emissions from natural gas infrastructure and use in the urban region of Boston, Massachusetts, *Proceedings of the National Academy of Sciences*, **112**: **7**, 1941-1946 (2015)
- Plant, G., Kort, E. A., Murray, L. T., Maasackers, J. D. & Aben, I. Evaluating urban methane emissions from space using TROPOMI methane and carbon monoxide observations, *Remote Sensing of Environment*, **268**, 112756, (2022)
- Mays, K. L., Shepson, P. B., Stirm, B. H., Karion, A., Sweeney, C., & Gurney, K. R., Aircraft-Based Measurements of the
- 660 Carbon Footprint of Indianapolis, *Environmental Science & Technology*, **43**: **20**, 7816-7823, (2009)
- Price, D.J. Smoothed Particle Hydrodynamics and Magnetohydrodynamics, *Journal of Computational Physics*, **231**, 759-794, (2012)
- Rasmussen, C. E. & Williams, Christopher, C. K. I., Gaussian processes for machine learning, (The MIT Press, 2006)

Appendix A: Sensor description

The main paper describes two historic data sets of methane emission measurements: one set from Scientific Aviation and one set from SeekOps. Both data sets contain concentration measurements taken by a high-precision methane sensor mounted on a quadcopter drone. The present section presents background on the type of sensor that has been used in these deployments. The text below is applicable to the sensor developed and used by SeekOps; Scientific Aviation use a commercial off-the-shelf sensor that has similar characteristics.

The SeekIR sensor, used by SeekOps is the culmination of years of research and commercial development, initially at the United States National Aeronautics and Space Administration (NASA) Jet Propulsion Laboratory (JPL). The technology was originally developed for the Mars Curiosity Rover to look for evidence of microbial life and was thus developed as extremely sensitive to methane enhancements above background levels, (Webster , 2005). In 2017, the technology was spun-out of JPL and commercialized for the broader energy industry, including traditional oil and gas, biogas/landfill gas, and renewable natural gas (NASA , 2019). It was subsequently validated by blind controlled release tests performed at the Methane Emissions Technology Evaluation Center (METEC) in Colorado, where the sensor was described as the most successful in detecting and quantifying leaks, with no false positive and no false negatives (Ravikumar et al. , 2019).

The sensor operates on the principle of absorption spectroscopy, using a tunable diode laser (TDL) within an open cavity bounded by two mirrors that give a suitable path length for the laser to ensure high sensitivity to the absorption in the presence of methane molecules. This physical process is described by the “Beer-Lambert Law”, which describes how the spectral intensity measured at a specific wavelength after passing through a sample can be used to characterize physical parameters based on an initial spectral intensity and absorption path length (Hanson et al. , 2016). When parameters such as pressure, temperature, wavelength, and path length are measured or known, the concentration of the species of interest can be calculated by this change in spectral intensity. In the system described, the initial spectral intensity source is a TDL and the sensor measuring the change in spectral intensity is a photovoltaic detector sensitive at the same spectral region as the laser light source. The detector measures the remaining photons that were not absorbed by the methane molecule(s) as part of the absorption process. A spectroscopic approach, Wavelength Modulation Spectroscopy (WMS), is further employed by modulating the laser intensity and wavelength at a known frequency. WMS ensures the optimal signal-to-noise ratio (SNR) and a “calibration-free” method of laser diagnostics, allowing for calibration factors that persist for the life of the instrument that are determined at the time of manufacture. With appropriate filters for elevated frequencies, the detected response can be demodulated to determine the concentration of methane that has been sampled within the open cavity (Figure A1).

The SeekOps instrument used in this study additionally utilizes a multi-pass optical cell design, known as a Herriott Cell, that increases the laser path length, further increasing sensitivity of changes to concentration, temperature, or pressure, depicted in Figure A2. The Herriott Cell design is comprised of two concave mirrors of a high reflectivity

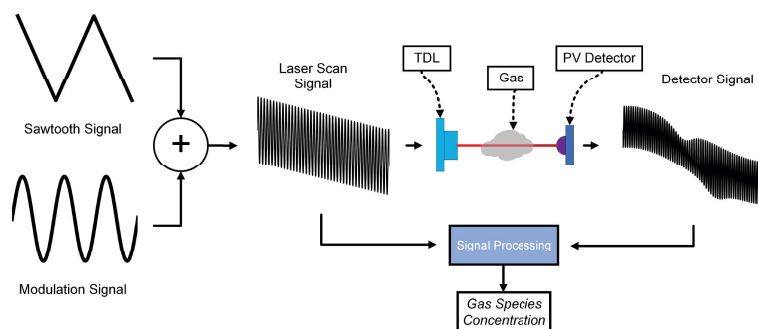


Figure A1. Simplified drawing of the implementation of Wavelength Modulation Spectroscopy (WMS) using a tunable diode laser (TDL) for gas sample diagnostics.

and matched to reflect the proper wavelength of light, allowing the beam to bounce multiple times inside the cavity helping to increase the SNR and further reduce measurement uncertainty.

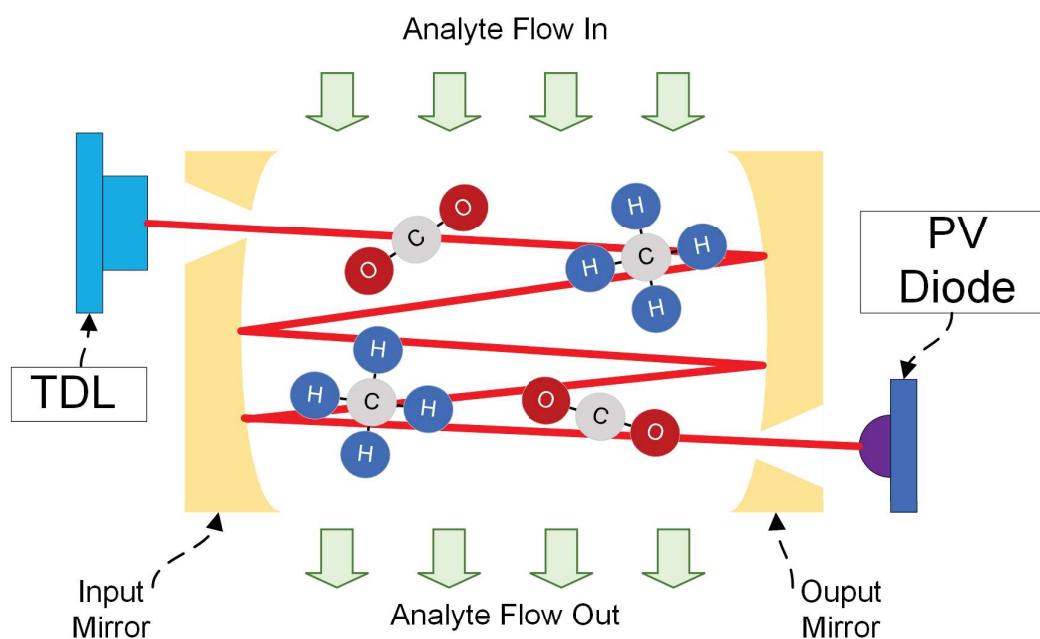


Figure A2. Drawing of the sensor operating principle of laser absorption spectrometry to determine methane concentration.

700 Finally, great efforts have been taken to make the optical sensor robust for operations in the oil and gas sector. To this end, the sensor is mounted in a strong housing that has undergone strenuous shock and vibration testing, indicative of its operational environment when deployed on a quadcopter drone and transported to and from a

facility of interest. Modern drones have multiple anti-collision sensors that can enable the sensor to be flown as close as necessary to the equipment without compromising any ongoing operations.

705 A picture of the SeekOps sensor is shown in Figure A3. The sensor is mounted on an approximately 1 m long extended steel branch attached to the drone, which makes the sensor easily accessible in case of maintenance requirements. Data acquisition takes place with the branch pointing into the wind, which allows the collection of pristine samples of air, uncontaminated by any prop wash (i.e., the airflow generated by the drone's own propellers). Methane concentration data from the sensor are streamed and displayed in real-time to a ground control system (GCS). This
710 allows for on-demand viewing of plume methane enhancements by the drone pilot, so that dynamic adjustments to the survey geometry, like the horizontal and vertical spacing between concentration measurements, can be made if needed.



Figure A3. Methane sensor showing location of integrated GPS, LiDAR and attached to the quadcopter drone.

Appendix B: Cylindrical flight pattern

In this section, the results from the simulation of a drone flying in a cylindrical pattern are presented, similar to
715 Section 3 for 2-D curtain flight path. We simulated the drone flight for different scenarios with the objective of assessing the importance of various sources of uncertainty as the following:

- the position of the emission source relative to the center of the cylindrical flight paths.
- the existence of multiple sources within the cylinder.
- horizontal and vertical spacing in the methane concentration measurements.

720 Again, it is assumed that the concentration field is stationary during the time of the measurements. This can relate to a constant Gaussian plume traveling horizontally, in a time-averaged horizontal wind field whose speed can vary as a function of the vertical coordinate.

B1 Ideal case

725 The ideal simulation case is considered as the following, similar to the ideal case considered for the 2-D curtain flight, Section 3.1:

- Constant wind field with westerly wind with the speed of 5 m/s.
- One circular flight path passing through the center of the plume.
- Equidistant drone measurements in the horizontal and vertical directions.
- No measurement error in simulated concentration, wind field and drone measurement locations.

730 The radius of the cylinder, opening angles and wind field are chosen such that they reflect a situation encountered in practice. The source with the emission rate 5 kg/h is considered. The cylindrical flight pattern is often used for offshore applications where the horizontal and vertical opening angles of the plume are smaller than those encountered in onshore applications and thus the opening angle of 2.5° is chosen as a realistic value for the ‘Ideal case’ (base case). Figure B1 shows the 3-dimensional concentration plot due to this source on a cylinder with a radius of 10 m.

735 Note that this radius is much smaller than the ≈ 300 m that Flylogix/SeekOps normally uses in surveys of offshore platforms. This should not affect the main results, because the radius will appear as the length scale when considering the spacing. With a radius of 10 m, it is reasonable to assume that the methane plume is stable, as the methane in the plume only takes a few seconds to go from source to sensor. At longer distances of ≈ 300 m, the transit time is of the order of ≈ 1 min and the wind direction can vary considerably during that time.

740 B2 The importance of turbulent diffusion on mass emission calculation

For a cylindrical flight pattern, the true emission rate cannot be exactly retrieved. In Figure B1, there is an error of 0.006 kg/h (equal to a percentage of 0.12%) even for a very fine spacing in the horizontal and vertical directions. This error does not exist for the 2-D curtain situation as the true emission rate is retrieved from the mass balance equation. The emerged error term is due to the effect of diffusion, see the third term in the right-hand side of Equation (4). If the flight path is cylindrical, the direction of the unit vector $\mathbf{n}$ varies along the flight path, and

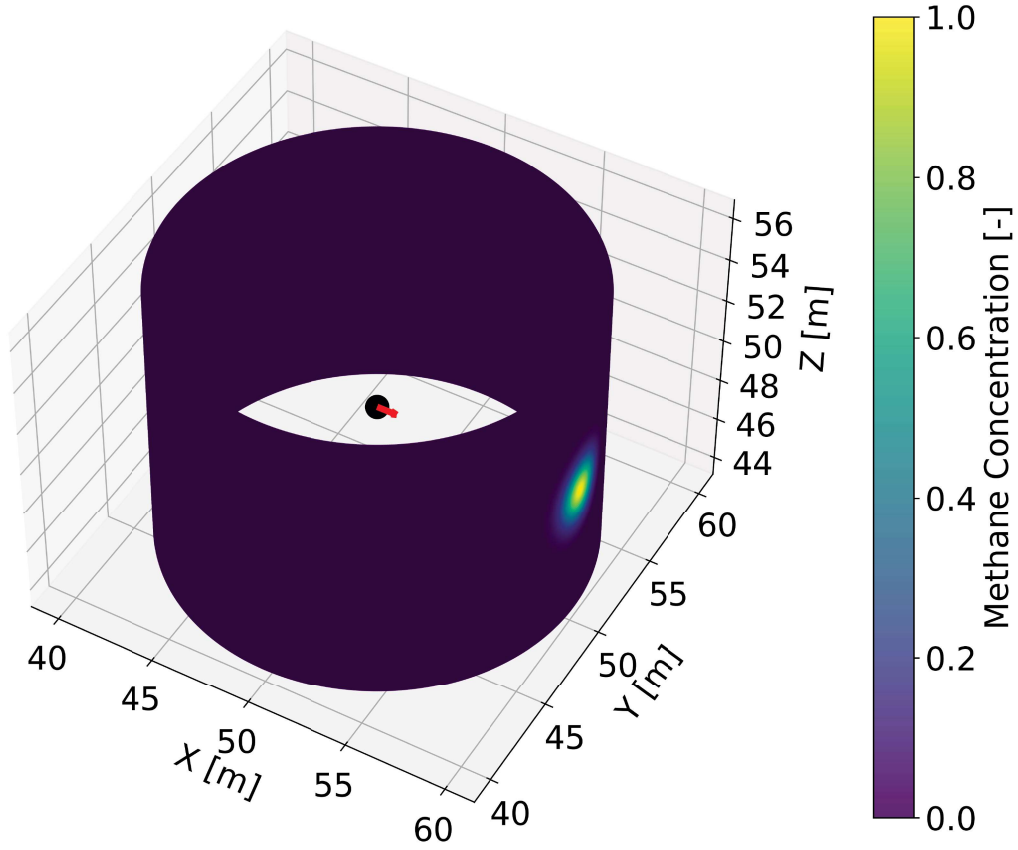


Figure B1. 3-dimensional normalized methane concentration above background on a cylinder with a radius of 10 m for a source located at the center of the cylinder (shown by black). The wind velocity is shown with a red vector. The Gaussian plume is assumed to have 5° horizontal and vertical opening angles. There is an angular spacing of 0.5° between the measurement points and a vertical spacing of 0.3 m.

the contribution of $\mathbf{n} \cdot \nabla c$ does not vanish along the integral. Since this term is not normally included in the mass balance equation, Equation (6), this results in an underestimate as $\mathbf{n} \cdot \nabla c$ is typically larger than 0 in the case where a source is located in the centre of the cylinder. This error cannot be eliminated, even in the limit of perfectly accurate vertical and horizontal measurements; to first order, the error is proportional to the diffusion coefficient K .

750 B3 Position of the emission source relative to the center of the cylinder

In Section B1, we assumed that the source is located at the centre of the cylinder, however, in practice this might not hold. It is thus beneficial to assess the impact of such assumption on the calculated emission rate. Shown in Figure B2 is the error percentage for varying shift of the source from the centre as a percentage of the radius of the cylinder. The wind direction is also shown with green vector. For the situation where the source gets very close to

755 the cylinder on the right-hand side, the term $\frac{dc}{dy}$ increases (as the concentration increases). One should bear in mind that the neglect of diffusion for the cylindrical flight pattern typically has a small contribution to the error compared to the other sources considered.

Figure B2 can be also used to calculate the total error in the calculated emission rate in case of having multiple sources within the cylinder. We will illustrate this with an example, assume two sources A and B with true emission rates of $\dot{m}_A$ and $\dot{m}_B$ respectively. The calculated emission rate error percentage for each source, referred to as ϵ_A and ϵ_B , can be obtained from Figure B2 using their position relative to the center of the cylinder as a percentage of the radius of the cylinder. Using these calculated emission rates, the total error in the situation where multiple sources exist within the cylinder can be obtained as: $\epsilon_{A+B} = \frac{\epsilon_A \dot{m}_A + \epsilon_B \dot{m}_B}{\dot{m}_A + \dot{m}_B}$.

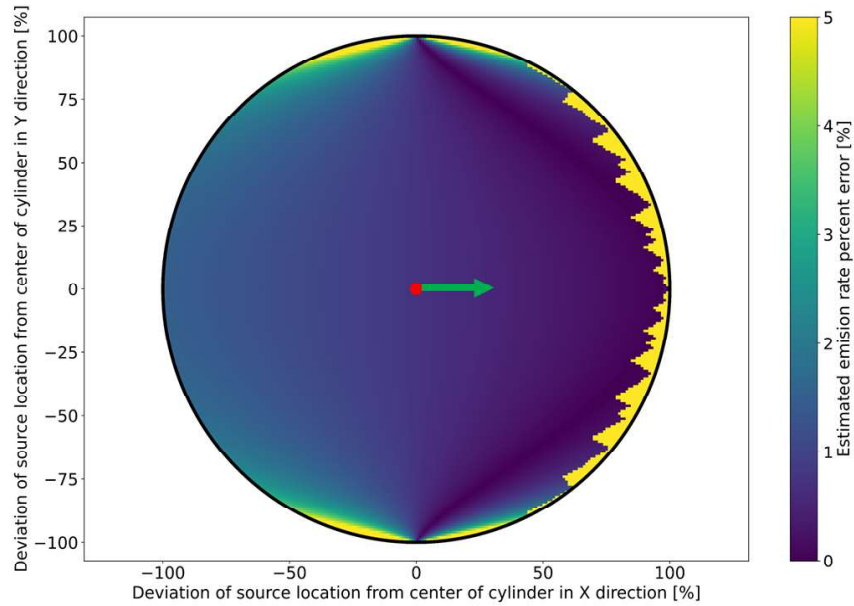


Figure B2. Calculated emission rate error percentage for shifted source in X and Y directions from the centre of cylinder as a percentage of the cylinder's radius. The wind direction is shown with the green vector and the centre of is indicated by red circle.

B4 Horizontal and vertical spacings of cylindrically shaped drone measurements

765 B4.1 Non-equidistant vertical spacing

Similar to 2-D curtain scenario, we assessed the effect of non-equidistant vertical spacing between the flight coordinates in the vertical direction, see Section 3.2 for the 2-D curtain. Similar to Section 3.2.1, L random samples from a Gaussian distribution with zero mean and a standard deviation σ_l are drawn, see Equation (14). For each simulation scenario (i.e., each standard deviation) 300 independent runs are considered. Figure B3 shows the box-whiskers for

770 the emission rate percentage error for non-equidistant vertical spacing. Similar to Figure 10, no bias emerges in the emission rate estimates with increasing variation in the vertical spacing. However, individual measurements can have errors up to almost 15% if the standard deviation in the vertical spacing is equal to the nominal vertical spacing.

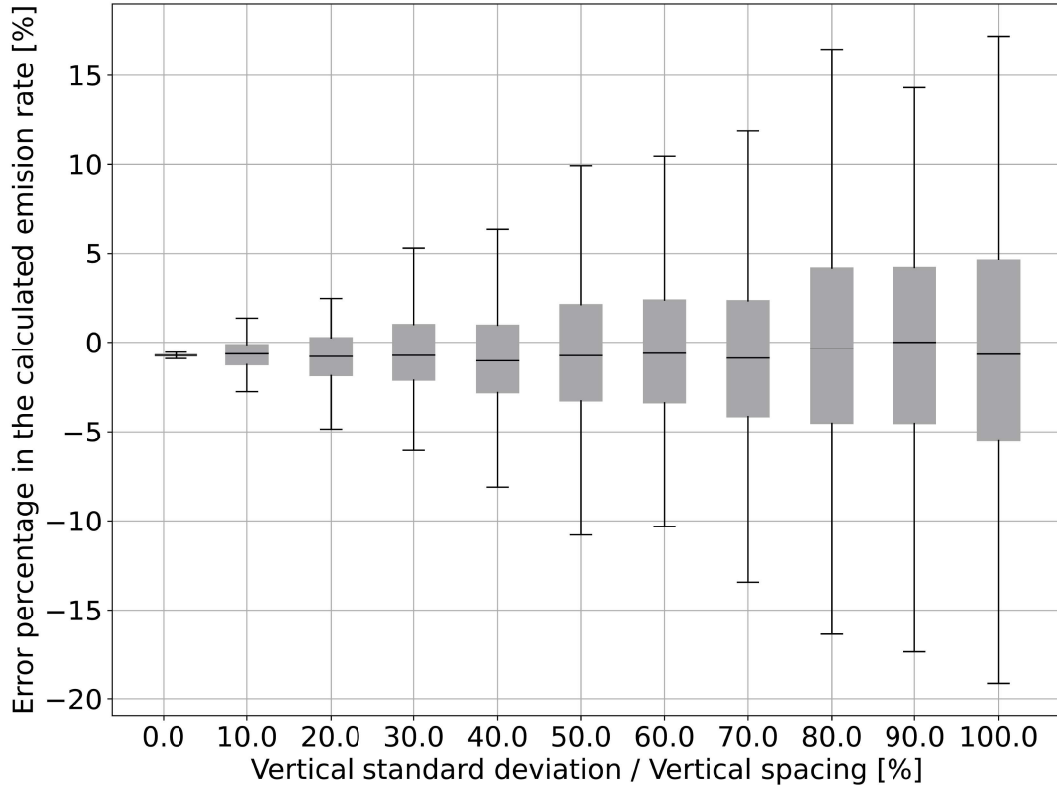


Figure B3. Box-whisker plot for the calculated emission rate percentage error for non-equidistant vertical spacing between the flight coordinates, for the cylindrical flight paths.

B4.2 Missing the plume center in relation to Horizontal and vertical spacings

In Section B1, it is assumed that one circular flight path passes through the centre of the plume in the vertical direction and that there exist concentration points on this circle corresponding to the maximum concentration of the plume on the cylinder pattern. As discussed in Section 3.2.2, these assumptions are easily violated as the location of the source is not exactly known. Therefore, here we will assess the potential uncertainty induced by missing the maximum concentration of the plume for different horizontal and vertical spacing of the drone measurements. The resulting error is a function of the horizontal and vertical spacings as the drone is more likely to miss the highest concentration of a plume if the horizontal and vertical spacing is large. For the cylindrically shaped drone measurements the angular spacing $\Delta\theta$ which can be converted to the horizontal spacing in meter using the radius of

the cylinder (r) as $r\Delta\theta$. To assess the effect of missing the plume, for each angular ($\Delta\theta$) and vertical (Δz) spacing of the drone measurements, 15 different shift values relative to the plume center (projected on the cylinder) ranging from $-\frac{\Delta\theta}{2}$ to $+\frac{\Delta\theta}{2}$ in the horizontal and from $-\frac{\Delta z}{2}$ to $+\frac{\Delta z}{2}$ in the vertical directions are considered. For each shifted location, the emission rate error is calculated, i.e., 225 (15×15) instances of calculated emission rate errors. For all the locations except the one where one flight line passes the centre of the plume, the maximum concentration is missed. Therefore, the emission rate is always underestimated (except for one case) and the maximum error representing the worst situation is considered for each horizontal and vertical spacings. Figure B4 shows the maximum error percentages for a cylindrical flight pattern for the horizontal and vertical opening angles of the Gaussian plume equaling 2.5° (corresponding to a realistic scenario offshore).

Similar to the generic case presented for 2-D curtain, Figure 4, the vertical spacing is presented as dimensionless parameter $\Delta z'$. For the horizontal spacing, we use the angular spacing in degrees which makes it invariant of the radius of the cylinder. Increasing both the vertical and horizontal spacings between the coordinates lead to an increase in the calculated emission rate error. For the wider plume, the errors are smaller as more concentration points exist within the plume for calculating mass balance equation.

B5 Time-variations in wind speed and/or direction

In Section B1, it is assumed that the wind velocity field is time-invariant, however, in practice this assumption is rarely true, i.e., instantaneous changed in the wind velocity can occur. Similar to Section 3.4, random samples are drawn from Ornstein-Uhlenbeck process with a pre-defined standard deviation for the wind speed and the wind direction. For each standard deviation, 300 independent runs are considered and the corresponding box-whisker plot for increasing standard deviation are shown in Figure B5. The results are very similar, both qualitatively and quantitatively, to the results obtained for the 2-D curtain pattern (Figure 6).

B6 Other potential sources of error

There are other potential sources of error and uncertainty occurring in measurements from drones flying in a cylindrical flight pattern. Many of these sources of uncertainty will be the same as for the 2-D curtain pattern. One notable source of uncertainty that is specific to cylindrical flight patterns is the long time that it takes to take relevant concentration measurements. In comparison with 2-D patterns, the cylindrical flight pattern requires a relatively long flight-time to come back to regions where concentration peaks are located. There is therefore an increased likelihood that wind directions will vary during these measurements, resulting in more uncertainty in plume locations and the risk to miss concentration plumes, or to measure the same plume during multiple transects.

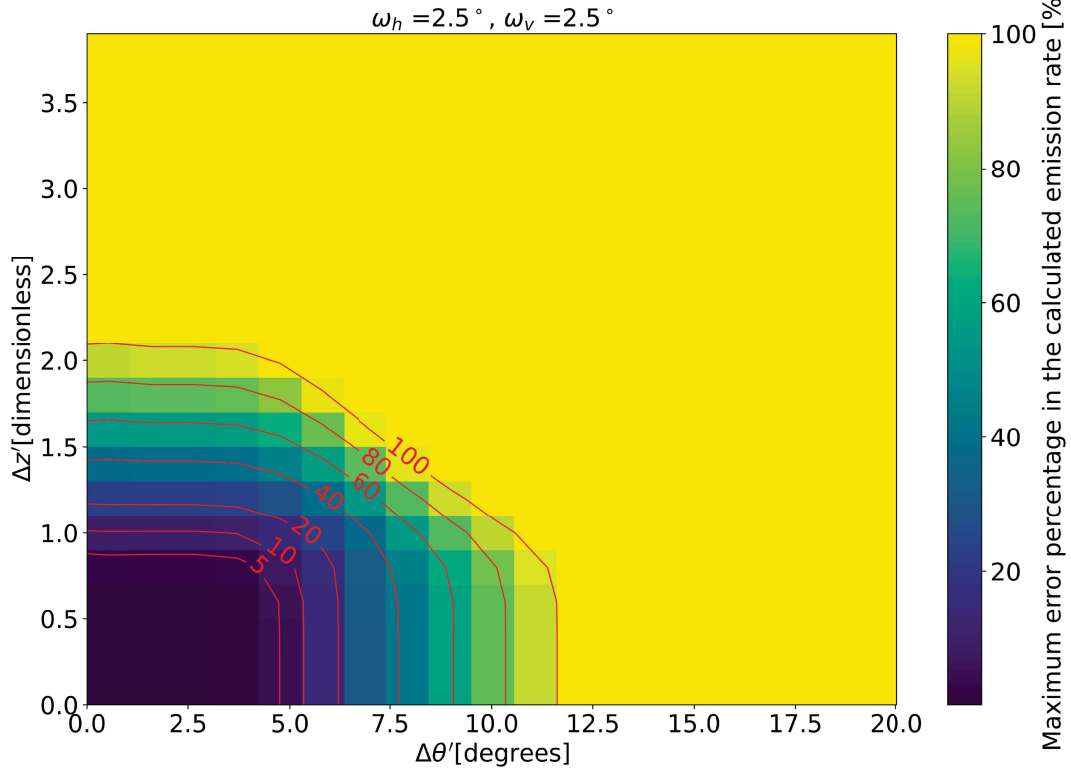


Figure B4. Maximum calculated emission estimate error for varying factors of horizontal and vertical spacings expressed as degrees and dimensionless parameter for a plume with vertical and horizontal turbulence of 2.5° . For each horizontal and vertical spacing, maximum value over 225 calculations corresponding to different locations of the flight lines relative to the source is shown. Shown with red are the error contours.

Appendix C: Wind data calculation

In order to allow the uncertainty analysis as explained in Section **Simulation results** for 2-D curtain flights, the raw wind data needs to be converted into an absolute wind speed and its root-mean-square fluctuation, and a plume opening angle. The conversion process is graphically illustrated in Figure C1. The absolute wind speed $|u|$ is determined from the perpendicular components of the average wind vector, U and V as follows: $|u| = \sqrt{U^2 + V^2}$. The average wind direction from East (in radians), is then computed from: $\theta = \tan^{-1} \frac{U}{V}$. The root-mean-square fluctuations in the direction of the plume, ψ' in m/s, can be computed from the fluctuations in the East-West and North-South directions respectively denoted by u' and v' : $\psi' = u' \cos \theta + v' \sin \theta$. The dimensionless fluctuations divided by the wind speed are given by: $\frac{\psi'}{|u|}$. The root-mean-square fluctuations perpendicular to the plume, Φ' (also in m/s), is then given by: $\Phi' = -u' \sin \theta + v' \cos \theta$. Finally, the approximate opening angle of the plume in radians is given by: $\tan^{-1} \frac{\Phi'}{|u|}$.

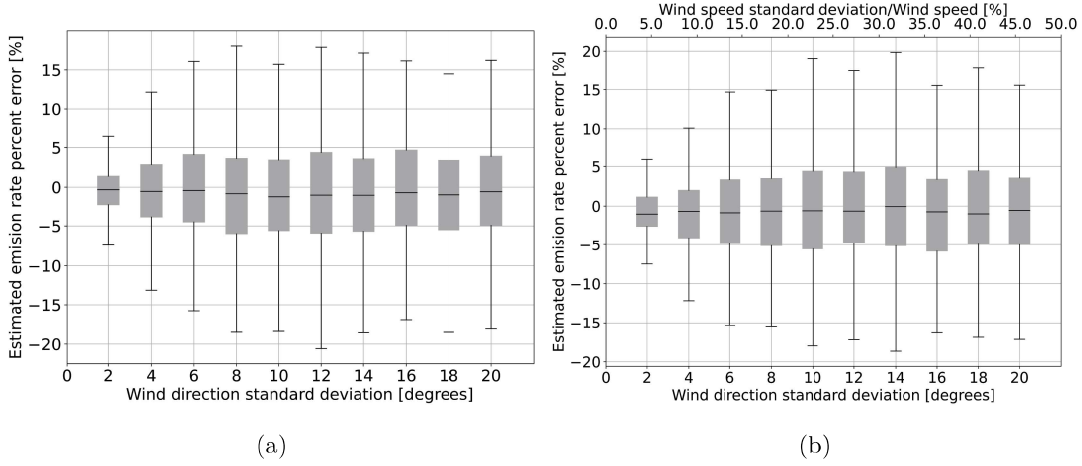


Figure B5. Box-whisker plot for the calculated emission rate error for increasing standard deviation of a) time-varying wind direction and b) time varying wind velocity (both direction and speed at the same time). Cylindrical flight pattern with a radius of 10 m for a source located at the centre of the cylinder is considered.

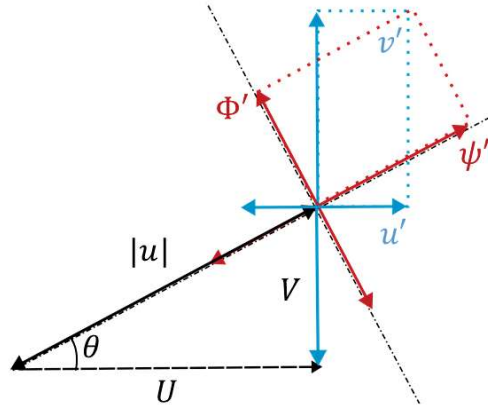


Figure C1. Graphical illustration of the conversion of perpendicular wind data (average wind vectors U and V , with root-mean-square. fluctuations u' and v') into an average absolute wind speed $|u|$, root-mean-square. fluctuation in the direction of the plume Φ' and the plume opening angle: $\tan^{-1} \frac{\Phi'}{|u|}$.

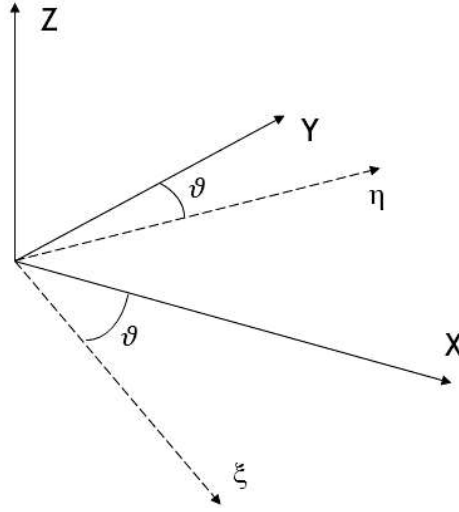


Figure C2. Graphical illustration of the Local Geodetic coordinate system (XYZ) and wind direction aligned coordinates system ($\xi\eta\zeta$).

Appendix D: A note on the interpolation of the concentration measurement

As mentioned in the main paper, different approaches can be used to interpolate the concentration measurements on the plane. In Section 4.1, the Nearest Neighbor method was used based on the fact that Scientific Aviation uses this
825 interpolation technique. However, to assess the impact of the interpolation technique on the estimated emission rate, we compare here the results obtained from the Nearest Neighbor method to those of Gaussian smoother method. We follow the interpolation technique as a Gaussian smoothing function, as in (Price , 2012).

Shown in Figures D1, D2, D3, and D4 are the interpolated methane measurements on the plane for the upward curtain “1”, Figure 8a, downward curtain “2”, Figure 8b, downward curtain “3”, Figure 8c, upward curtain “4”,
830 Figure 8d, respectively, using (a) the Nearest Neighbor and (b) the Gaussian smoother interpolation techniques. As seen the Gaussian smoother provides a smooth transition between high and low concentration values due to its nature. However, if the plume is missed, the Gaussian smoother cannot recover the missing high concentrations, as apparent in the bottom of the plane in Figure D1 and the top of the plane in Figure D2.

Presented in Table D1 are the emission rates calculated per curtain using nearest neighbor and Gaussian smoother
835 and the average emission rate between upward and downward curtains. The maximum difference between the emission rates estimated for the four curtains using the two interpolation methods is 8.40 g/h and the impact of the average emission rate is 0.44 g/h (1.4% of the total emission rate of 30.8 g/h).

Our tentative conclusion from the analysis presented in this section is that the choice of the interpolation method has a relatively small impact on the mass emission estimate. Moreover, some sources of error cannot be compensated

Table D1. Emission rates calculated per curtain using nearest neighbor and Gaussian smoother interpolation techniques and the average emission rate between upward and downward curtains for the measurement “A”, which was carried out on 13 November 2019. The emission rates in the table are calculated using Equation (8). The true emission rate was 30.8 g/h.

Method	Nearest Neighbor		Gaussian smoother	
Curtain	$\dot{m}$ from Eq. (8) g/h	Average of U and D	$\dot{m}$ from Eq. (8) g/h	Average of U and D
Upward (U) 1	14.48	13.39	12.11	10.19
Downward (D) 2	12.30		8.28	
Downward (D) 3	46.73	43.14	42.41	45.46
Downward (U) 4	40.10		48.50	
Average from the four selected curtains	28.26		27.82	

for by a different choice for the interpolation method: if the highest concentration enhancements are not measured because of a large vertical spacing between flightlines, then the resulting estimate for the mass emission rate will underestimate the true mass emission rate – regardless of the mapping technique employed.

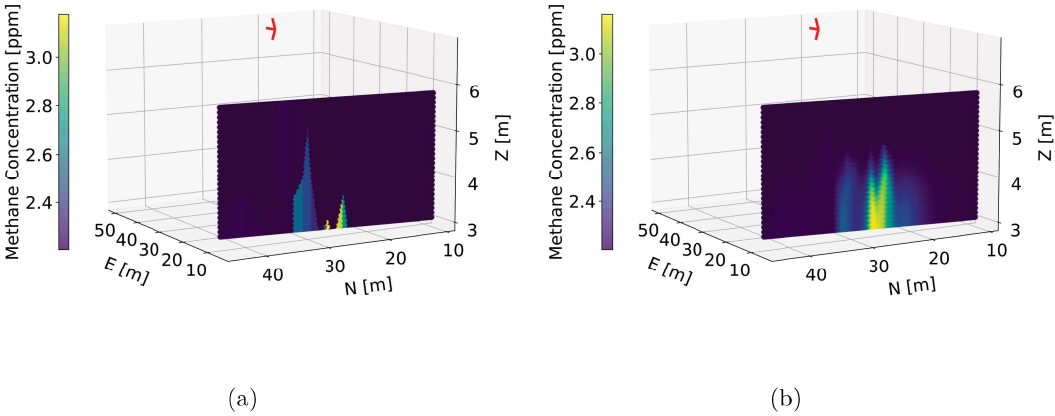


Figure D1. 3-dimensional interpolated concentration values for the upward curtain “1”, Figure8a using a) Nearest Neighbor and b)Gaussian smoother interpolation techniques. The red arrow indicate the average wind direction.

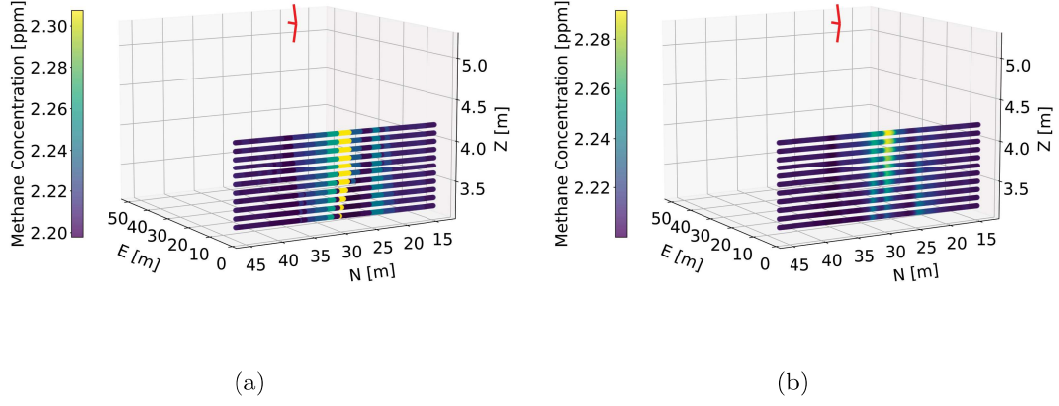


Figure D2. 3-dimensional interpolated concentration values for the downward curtain “2”, Figure8a using a) Nearest Neighbor and b)Gaussian smoother interpolation techniques. The red arrow indicate the average wind direction.

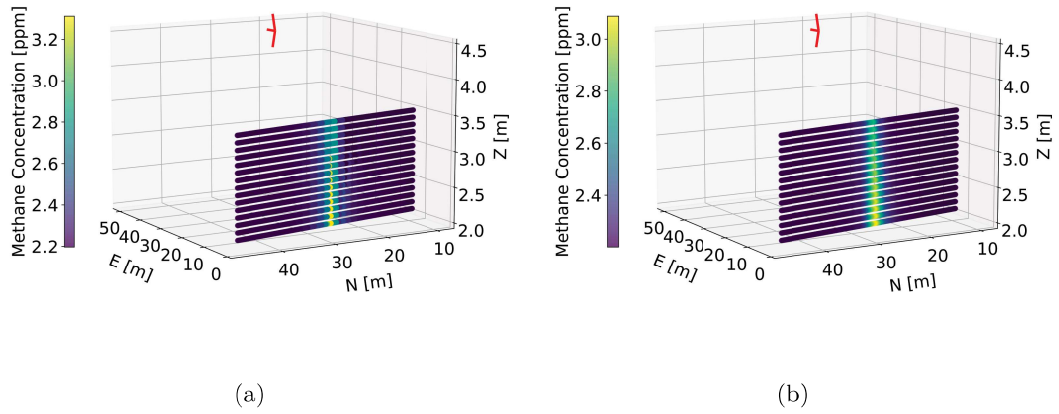


Figure D3. 3-dimensional interpolated concentration values for the downward curtain “3”, Figure8b using a) Nearest Neighbor and b)Gaussian smoother interpolation techniques. The red arrow indicate the average wind direction.

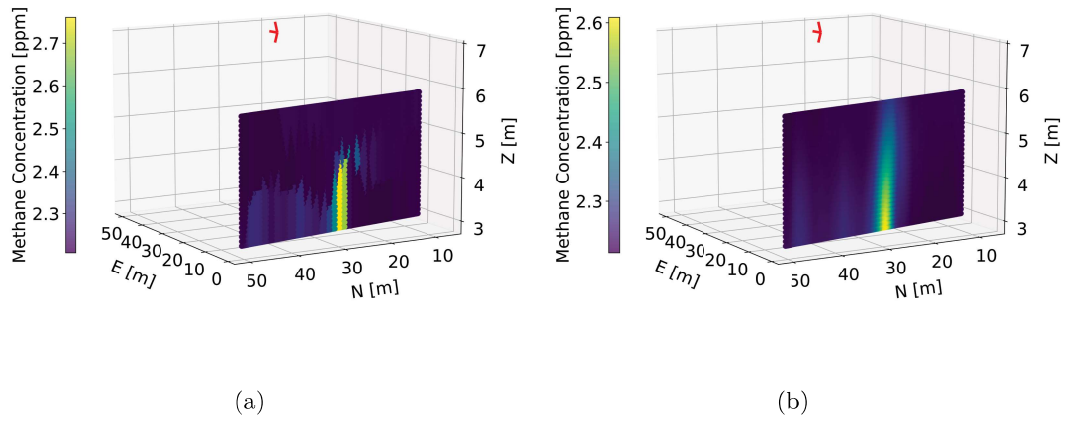


Figure D4. 3-dimensional interpolated concentration values for the upward curtain “4”, Figure8c using a) Nearest Neighbor and b)Gaussian smoother interpolation techniques. The red arrow indicate the average wind direction.