



Measurements of particle emissions of an A350-941 burning 100% sustainable aviation fuels in cruise

Rebecca Dischl^{1,2}, Daniel Sauer¹, Christiane Voigt^{1,2}, Theresa Harlaß¹, Felicitas Sakellariou¹, Raphael Märkl^{1,2}, Ulrich Schumann¹, Monika Scheibe¹, Stefan Kaufmann¹, Anke Roiger¹, Andreas Dörnbrack¹, Charles Renard³, Maxime Gauthier³, Peter Swann⁴, Paul Madden⁴, Darren Luff⁴, Mark Johnson⁴, Denise Ahrens⁵, Reetu Sallinen⁶, Tobias Schripp^{7*}, Georg Eckel⁷, Uwe Bauder⁷, and Patrick Le Clercq⁷

¹Deutsches Zentrum f. Luft- und Raumfahrt, Institut f. Physik der Atmosphäre, Oberpfaffenhofen, Germany

²Johannes Gutenberg University, Institute of Atmospheric Physics, Mainz, Germany

³Airbus Operations SAS, Toulouse, France

⁴Rolls-Royce plc., Derby, UK

⁵Rolls-Royce Deutschland, Dahlewitz, Germany

⁶Neste Corporation, Innovation, Porvoo, Finland

⁷Deutsches Zentrum f. Luft- und Raumfahrt, Institute of Combustion Technology, Stuttgart, Germany

*now at: Center for Aviation, ZHAW School of Engineering, Winterthur, Switzerland

Correspondence: Rebecca Dischl (rebecca.dischl@dlr.de)

Abstract. In order to reduce aviation's CO₂ emissions and comply with current climate targets, the European Union plans a mandatory quota of 2 % sustainable aviation fuel (SAF) by 2025, rising up to ≥ 70 % SAF by 2050. In addition to a reduction of life cycle CO₂-emissions the use of SAF can also have a positive impact on particle emissions and contrail properties. In this study we present observations from the ECLIF3 (Emission and CLimate Impact of alternative Fuels) aircraft campaign, which investigated exhaust and contrail characteristics of an Airbus A350-941 equipped with Rolls-Royce Trent XWB-84 engines. For the first time, non-volatile and total particle emissions of 100 % HEFA-SPK (Hydro-processed Esters and Fatty Acids - Synthetic Paraffinic Kerosene) SAF, a blended fuel and a reference Jet A-1 were measured in flight. A maximum reduction in non-volatile particle number emissions of ~ 41 % compared to the reference Jet A-1 fuel was measured at low cruise engine power settings when using 100 % HEFA-SPK. The reduction decreases to ~ 29 % for typical cruise engine settings and to ~ 22 % at high cruise engine power settings. The size of non-volatile particles was slightly smaller for HEFA-SPK compared to Jet A-1. We show a comprehensive analysis of the hydrogen content of globally available fuels. Our results demonstrate the impact of the fuel composition in terms of its aromatic, hydrogen and sulfur content as well as of the effect of engine power settings on particle emissions. We demonstrate that the use of HEFA-SPK can significantly reduce particle emissions and thus contrail ice particles, and therefore can provide an aviation climate benefit.

1 Introduction

With an effective radiative forcing of 100.9 mW m⁻² in 2018, about 3.5 % of global anthropogenic radiative forcing is caused by global aviation. The emission of CO₂, NO_x and the formation of contrail cirrus account for the major share of the net



warming impact (Lee et al., 2021). Contrail cirrus generate the largest warming impact ($\sim 57.4 \text{ mW m}^{-2}$ in 2018) due to the trapping of outgoing long-wave radiation, followed by CO_2 (34.3 mW m^{-2}) and NO_x emissions (17.5 mW m^{-2}). Unlike CO_2 , which has an atmospheric residence time of centuries, contrail cirrus have a lifetime of several hours (Vázquez-Navarro et al., 2015; Bier et al., 2017). Reducing or avoiding contrail induced clouds could therefore reduce the radiative forcing of aviation on short time scales.

Contrails are formed when warm exhaust air is cooled down to cold atmospheric air temperatures at cruise altitude (Schumann, 1996). When liquid saturation is reached in the plume, water vapor from exhaust condenses on emitted or pre-existing atmospheric aerosol particles forming droplets which immediately freeze to ice particles. In case of soot-rich combustion from past and current combustor technologies, the main fraction of water droplets condenses on soot particles produced during combustion (Heymsfield et al., 2010; Kärcher, 2018; Kleine et al., 2018). If the air mass remains supersaturated with respect to ice, contrails may continue to grow and spread, forming extended contrail cirrus on regional scales (Voigt et al., 2011; Minnis et al., 2013; Schumann et al., 2017; Voigt et al., 2017; Chauvigné et al., 2018; Wang et al., 2023).

Several approaches are pursued to reduce the impact of aviation on global warming. On long-term time scales, hydrogen powered engines could be a promising option. However, these technologies will not be available for commercial use for a long time because they face several challenges, particularly related to fuel storage and airport infrastructure (Hoelzen et al., 2022).

On a short to mid-term time scale, technologies are needed that are feasible with the current aircraft fleet and airport infrastructure (drop-in solutions). Since less than 10 % of flights are responsible for about 80 % of the RF caused by contrails (Teoh et al., 2020a, 2022a), rerouting of such flights or targeted use of sustainable aviation fuels (SAF) could be a promising option (Teoh et al., 2022b).

The most prominent commercially available SAF is currently HEFA-SPK (Hydroprocessed Esters and Fatty Acids Synthetic Paraffinic Kerosene). During the combustion of HEFA, no fossil CO_2 is released, which reduces the life-cycle greenhouse-gas emissions by up to 84 % (ICAO, 2023a; Prussi et al., 2021). Furthermore, it is nearly free of aromatics and sulfuric compounds, which can have a positive effect on contrail properties (Voigt et al., 2021; Märkl et al., 2024).

The dominating constituent of contrail formation on engine exhaust are soot particles as they are emitted in large numbers and are sufficiently large to be readily activated as seed droplets for ice formation (Kärcher et al., 2015; Burkhardt et al., 2018). As shown in laboratory tests and engine tests, fuels with a higher hydrogen content, such as blends of HEFA-SPK and Jet A-1, produce less soot during combustion (Lobo et al., 2011; Beyersdorf et al., 2014). Ground experiments investigating soot emissions from sustainable aviation fuels as well as in-flight measurements with HEFA-SPK blends (up to 50 % blending ratio) have already demonstrated the reduction potential of SAF concerning soot formation and the associated formation of contrail ice particles (Schripp et al., 2018; Moore et al., 2015, 2017; Tran et al., 2020). For example, Moore et al. (2017) have shown that biofuel blending can reduce soot number emissions in flight by 25 % for high cruise power settings and by 50 % for low to medium cruise power settings. Comparable and slightly larger reductions in contrail ice particles have been observed by Voigt et al. (2021) and Bräuer et al. (2021). It is to be noted that these campaigns were performed with old generation engines, and therefore with different engine performance parameters compared to modern engines, which can influence the observed reductions. Slightly larger reductions in contrail ice crystals (Voigt et al., 2021) may point to an additional role of sulfur in



55 contrail ice crystal formation. Global models show that reductions in contrail ice particle number by 41 % can reduce contrail radiative forcing (CRF) by 15 %. The CRF reduction increases to 59 % for 84 % ice crystals reduction (Bier and Burkhardt, 2022). Another model study of the effects of low aromatic fuels with increased hydrogen content in emissions and contrails for air traffic in the Northern Atlantic flight corridor (Teoh et al., 2022b) suggests that a stepwise increase in SAF blending ratio leads to a reduction in soot particle emission, a slight increase in the prevalence of contrail formation, a reduction in ice crystal number concentration and contrail optical thickness, a reduction in contrail cloud cover and therefore a reduction in the climate impact of contrails. For 100 % SAF, Teoh et al. (2022a) simulate a 44 % change in radiative forcing from contrails. Märkl et al. (2024) found a 56 % decrease in ice particle number from the combustion of 100% HEFA compared to a reference Jet A-1 during a case study on the ECLIF3 measurements. From that, they estimated a decrease in CRF of 26 % on a global scale. While each study suggest a climate benefit when using SAF, the estimate of the actual change in contrail forcing by reduced soot emissions is uncertain (Burkhardt et al., 2018).

65 So far, hardly any in-flight measurements have been carried out to investigate the impact of the combustion of more than 50 % HEFA-SPK on trace gas and aerosol emissions as well as on contrail properties. This is due to the fact that there is a regulatory lower limit for the aromatic content of the resulting blend fuel of 8 % by volume. It was therefore the aim of the ECLIF3 (Emission and CLimate Impact of alternative Fuels) campaign to sample the effects of using up to 100 % HEFA-SPK on the large passenger aircraft A350 with Rolls-Royce engines for the first time and investigate the influence of varying cruise engine power settings. This project was realized in collaboration with the German Aerospace Center (DLR), Airbus, Rolls-Royce, 70 Neste, NRC Canada and the University of Manchester and involved major certification and testing efforts. While this paper focuses on the non-volatile and total particle number emissions captured during the in-flight measurements, results regarding NO_x emissions and contrail formation are discussed elsewhere (Märkl et al., 2024; Harlass et al., 2024).



Table 1. Chase flight missions behind the A350-941

Date	Area	Mission Objective	Falcon Flight Time
10 April	Mediterranean	Contrails	4:10
14 April	Mediterranean	Emissions	4:10
16 April	Mediterranean	Emissions, Contrails	4:10
06 Nov	Mediterranean	Emissions	4:10
19 Nov	Bordeaux, Atlantic	Emissions	6:05
24 Nov	Bordeaux, Atlantic	Contrails	3:00
25 Nov	Bordeaux, Atlantic	Contrails	4:00
27 Nov	Bordeaux, Atlantic	Emissions, Contrails	4:00
29 Nov	Bordeaux, Atlantic	Emissions	4:10

2 Experiment and instrumentation

2.1 The ECLIF3 campaign

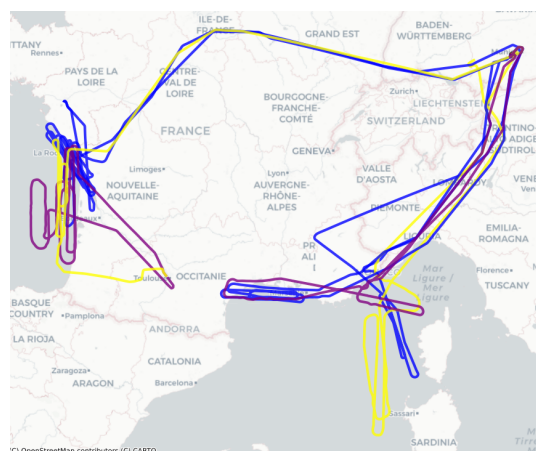


Figure 1. Flight tracks of the chase flights during the ECLIF3 campaign in April and November 2021. Emission measurement flights are marked blue, contrail flights in purple and flight missions covering both objectives are marked yellow.

75 Measurement data has been collected as part of the ECLIF3 campaign (Emission and CLimate Impact of alternative Fuels) taking place in April 2021 (ECLIF3-1) and November 2021 (ECLIF3-2). The aim of the flight experiments was to characterise the influence of the combustion of three different jet fuels and different engine power settings on soot properties, contrail ice particles and trace gas emissions. For the first time, in-flight measurements of contrails and emissions burning 100 % HEFA-
 80 SPK on both engines have been performed. An Airbus A350-941 (Reg. F-XWB) with Rolls-Royce Trent XWB-84 engines served as source aircraft. For operational reasons, the right engine (Engine Serial Number 21004) was replaced by another



Table 2. Selected properties of the fuels burned by the A350 during the test sequences. Fuel properties were analyzed according to ASTM standards. Additionally, aromatics, iso-paraffins, n-paraffins and naphthalene content were evaluated by *GCxGC* gas chromatography. The carbon content refers to the difference between 100 % and hydrogen and sulfur content. World average fuel data were obtained from the CRC world fuel survey (Hadaller and Johnson, 2006).

Fuel	ECLIF3-1	ECLIF3-1	ECLIF3-2	ECLIF3-2	ECLIF3-2	Jet A-1
	Jet A-1	HEFA-SPK	Jet A-1	HEFA-SPK	Blend	world average
Hydrogen content (mass%) (ASTM D3701)	14.08	15.11	14.25	15.18	14.39	13.89
Carbon content (mass%)	85.90	84.89	85.74	84.82	85.56	N/A
Sulfur content (mass%) (ASTM D5453)	0.0211	0.0007	0.0125	0.0003	0.0505	0.0460
Naphthalene content (vol%) (ASTM D1840)	0.35	<0.08	0.50	<0.08	0.58	1.2
<i>GCxGC</i> (mass%)	N/A	0.002	N/A	0.06	N/A	N/A
Aromatics (vol%) (ASTM D6379)	13.4	N/A	13.4	<0.1	10.8	19.2
<i>GCxGC</i> (mass%)	N/A	0.41	N/A	0.62	N/A	N/A
iso-paraffins (mass%) (<i>GCxGC</i>)	27.2	95.4	29.8	95.8	57.6	N/A
n-paraffins (mass%) (<i>GCxGC</i>)	50.8	3.3	23.2	3.1	13.1	N/A
Density at 30°C (g cm ⁻³)	0.7800	0.7618	0.7767	0.7608	0.7781	N/A

engine (Engine Serial Number 21012) of the same type between April and November 2021.

As main parameter for determining the engine state, the combustor inlet temperature (T30) was used, which is defined as the temperature at the outlet of the high pressure compressor and prior to the combustion chamber. The corresponding pressure at the combustor inlet is referred to as P30. In situ in-flight measurements were performed with the DLR-operated research aircraft
85 Dassault Falcon 20-E5 (Reg. D-CMET). The Falcon is equipped with a comprehensive payload for measurements of trace gases and particle emissions as well as cloud particle formation of the source aircraft exhaust plume. A total of 9 measurement flights were conducted in extended racetrack patterns in special traffic restricted areas along the French Mediterranean coast and the Atlantic coast west of Bordeaux (see Table 1, Fig. 1).

Contrails were generally measured in the far-field at > 5 nautical miles distance to the A350. Emission measurements, which are
90 the focus of this work, were captured in the near-field about 100-200 m (< 1 s) behind the A350 in test areas where comparatively high ambient air temperatures and low humidities prevented the formation of contrail ice particles in order to measure the unprocessed emissions of the source aircraft. The right engine was studied and operated at typical cruise T30, while the other engine was operated at variable thrust to keep the airspeed of the A350 within the range of the Falcon's speed performance. Near-field measurements were taken directly behind the right engine to exclusively capture the emissions of this engine. The
95 dedicated flight test instrumentation on the A350 permitted the targeting of specific combustor inlet temperatures T30, at a given Mach number and altitude. The engine conditions were kept constant during individual measurement sequences typically lasting 10-20 minutes, depending on measurement conditions, defining different test points.



During the measurements, a conventional Jet A-1 fuel from the local supplier at Toulouse Blagnac airport (TotalEnergies) was probed. This fuel was used as a reference for the measurements using 100 % HEFA-SPK and a 38 % blend of HEFA-SPK and Jet A-1 fuel, both supplied by Neste Corporation. The blend fuel was sampled during ECLIF3-2 only. It was composed of the HEFA sampled during ECLIF3-2, but a different Jet A-1 with a higher naphthalene and sulfur content. Since the engines of the A350 can be fed from separate tanks, test points with three different fuels could be accomplished within a single flight to ensure comparable atmospheric and engine conditions. The properties of the fuels varied slightly between the two mission phases of the campaign. Selected fuel properties are shown in Table 2. Both HEFA-SPK show a high content of iso-paraffins in relation to n-paraffins, which could slightly increase the formation of soot particles (Kathrotia and Riedel, 2020). Compared to the global average Jet A-1 fuel, the reference fuels of ECLIF3-1 and ECLIF3-2 show a high hydrogen content, which is linked to a lower carbon content as well as a reduced aromatic and naphthalene content.

Figure 2 visually communicates a comparison of the hydrogen content in different types of fuels: Conventional fuels, HEFA blends, and HEFA-SPK. The figure is designed in a tabular format with three rows, each representing a different fuel type. The first row pertains to conventional fuels, represented by data compiled from 91 different fuels included in the CRC World survey of 2006 and various DLR (German Aerospace Center) research projects.

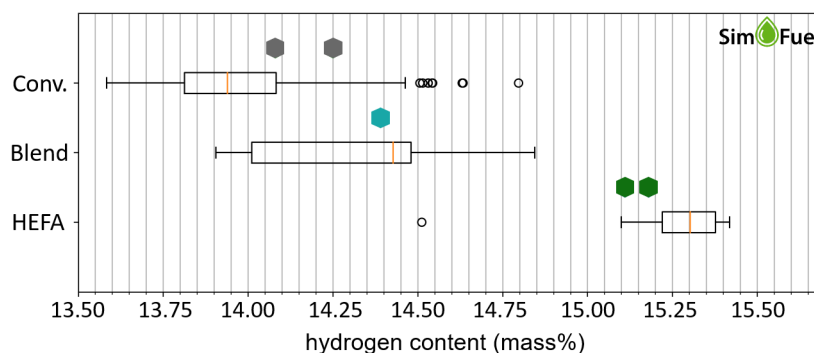


Figure 2. Hydrogen content of the fuels used during the ECLIF3 campaign compared to world average fuel data from the SimFuel platform. Both conventional Jet A-1 used during the campaign show a higher hydrogen content, the HEFA-SPK show a lower hydrogen content and the blend fuel an average hydrogen content compared to average fuels of the same type. The box in the plot extends from the first quartile to the third quartile of the data, with an orange line indicating the median. The whiskers extend from the box to the furthest data point that falls within 1.5 times the inter-quartile range. Any data points beyond the end of the whiskers are marked as empty circles, indicating outliers.

The second row represents HEFA blends, for which the figure includes data from 9 fuels, all from DLR research projects. These fuels include HEFA-SPK that is blended either with synthetic aromatic components, conventional kerosene or both. The third row is dedicated to HEFA-SPK, and it includes data from 17 fuels from DLR research projects. It should be noted that the dataset for HEFA-SPK and its blends is quite small compared to that of the conventional fuel type. The figure underscores that both instances of Jet A-1 used in the measurement campaign had a higher hydrogen content relative to the global average of the available conventional fuels. In contrast, the pure HEFA-SPK had a relatively low hydrogen content compared to other



HEFA-SPKs. The HEFA blend is positioned in the upper section of the box, just slightly below the median.

Besides, the sulfur content of both Jet A-1 is reduced compared to the global average, underscoring that our reference fuel
120 is rather on the clean side of the typical fuel properties spectrum regarding its hydrogen content. Naturally, HEFA-SPK does
not contain sulfur. However, residual fuel may remain in tanks and pipelines in the supply chain and the aircraft fuel system,
resulting in low sulfur levels in the test fuels.

2.2 Aerosol and trace gas measurements

The instrumentation of the DLR research aircraft Falcon consisted of several cabin-mounted aerosol particle and trace gas
125 instruments, which sample ambient air through inlets located on the upper fuselage in the center line of the aircraft. These
instruments were used to detect total particulate matter (totPM), non-volatile particulate matter (nvPM), the sum of NO_x and
all reactive nitrogen species (NO_y), CO_2 , CO as well as H_2O . To measure ice particles in ambient atmospheric conditions, two
cloud particle probes were mounted in the inner underwing pods. This study focuses on the aerosol measurements. Results
regarding NO_y and contrails can be found in accompanying publications.

130 The aerosol instrumentation for ECLIF3 included a set of five butanol-based condensation particle counters (CPC) (Feldpausch
et al., 2006; Kleine, 2019; Voigt et al., 2021) sampling from a forward-facing isokinetic aerosol inlet. The particle counters are
based on TSI CPC model 3010 and 3768a (TSI Inc, Minneapolis, USA) that have been modified for aircraft use in low pressure
environments. Three of the CPCs were sampling through the heated inlet line of a thermal denuder at 250°C to characterise the
non-volatile fraction of particulate matter (nvPM), the other two counters were sampling total aerosol (totPM). To obtain size
135 information of the particulates, the particle counters were operated at different lower cut-offs (D_{50} - referring to the diameter of
50 % detection efficiency, e.g. Mertes et al 1996). The D_{50} of the totPM were set to 5 nm and 10 nm by adjusting the temperature
difference between saturator and condenser. One of the nvPM counters was set to a D_{50} of 14 nm, the other two were operated
with diffusion screen separators in the inlet lines to achieve larger cut-off values of ~ 30 and ~ 90 nm (see Feldpausch et al.
(2006) for details of the setup). The cut-off diameters were characterised and validated in laboratory measurements at low
140 pressure with Ag aerosol against a Faraday Cup Electrometer (GRIMM Aerosol Technik, Ainring, Germany) as reference.
In addition, the detection efficiency of the particle counters at low inlet pressure was determined in the laboratory to derive
a pressure-dependent correction function which was applied to the airborne measurements (see App. A). Unfortunately, the
totPM particle counter with $D_{50}=10$ nm showed a leak during the second part of the campaign such that no data is available
for this size for the second campaign. Therefore, our analysis of totPM is based on the 5 nm-counter. In addition, the correction
145 of inlet line losses is given in App. A.

Instrumentation for CO_2 measurements comprised a cabin-mounted high frequency (≈ 10 Hz) non-dispersive infrared gas
analyzer Licor-7000 (LI-COR Inc., Lincoln, NE, USA) used for in-plume and background detection. The accuracy of the
 CO_2 measurement amounts to around 0.2 ppm and is independent of measured mixing ratios. A slower (≈ 0.3 Hz) but more
stable wavelength-scanned cavity ring-down spectrometer (CRDS, Picarro G2401-m, Picarro Inc., Santa Clara, USA) was used
150 for atmospheric background and absolute mixing ratio detection. The accuracy of the Picarro G2401-m ranges between 0.5
and 740 ppb (avg. 55 ppb), depending on the stability of the optical cavity pressure. Trace gas instruments were calibrated

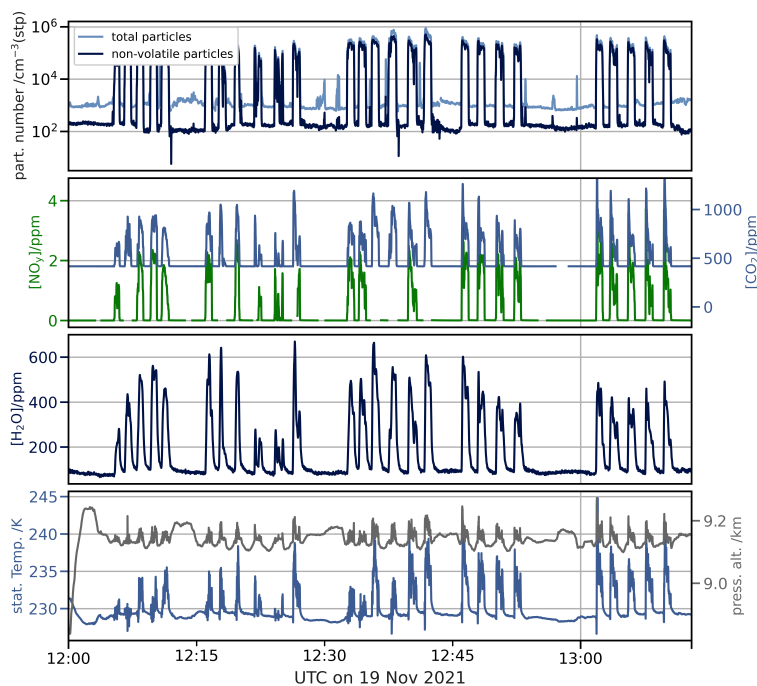


Figure 3. Timeline of the second emission flight during ECLIF3-2 on 19 November 2021 over the Atlantic. The top row shows the number concentration of total particles larger than 5 nm (light blue) and non-volatile particles larger than 14 nm (dark blue) at standard temperature and pressure, the second panel shows trace gas concentrations of CO₂ (blue) and NO_y (green), the third row shows the timeline of the water vapor concentration and the bottom panel shows the ambient temperature and the altitude of the research aircraft. During the peak sequences of the timelines the Falcon was located within the plume about 100-200m behind the A350.

repeatedly with commercial gas standards during the campaign. Trace gas detectors, as the aerosol detectors, obtain their sample air through inlets on the center line of the upper fuselage (Harlass et al., 2024).

155 Fig. 3 shows an example of a time series of aerosol and trace gas measurements as well as flight altitude and ambient air temperature of an emission measurement flight on 19th November 2021. The distinct collocated enhancements in particle and trace gas emissions as soon as the Falcon climbs into the plume of the A350 are clearly visible. Usually, the Falcon climbed into the exhaust plume from the right side slightly below the plume to ensure that the inlets on the upper fuselage were located inside the plume. This position was then held for about 45s before the Falcon dropped out again to measure the atmospheric background concentrations. This process was repeated 3-5 times per test point.

160 To account for dilution, inhomogeneities, and mixing of exhaust air with ambient air, the particle emission index (EI) is calculated. The emission index links the particle concentration to the amount of fuel burned by the engine by scaling particle



measurements with CO₂ measurements, for which the EI is known and constant (e.g., Moore et al. (2017)):

$$EI = \frac{RT}{p} \cdot \frac{\Delta N}{(M(C) + \alpha M(H)) \cdot \Delta CO_2} \quad (1)$$

where R is the ideal gas constant, T and p are standard temperature (273.15 K) and pressure (1013.25 hPa), α is the hydrogen-to-carbon molar ratio of the fuel, $M(C)$ and $M(H)$ are the molar masses of carbon and hydrogen, ΔCO_2 and ΔN are the background-subtracted peak areas of the recorded concentrations of CO₂ and particles at standard conditions during a plume encounter sequence. The uncertainty of the particle emission index can be calculated using Gaussian error propagation comprising the standard deviation of CO₂ and particle background sequences, the uncertainty of the particle measurement correction functions, the uncertainty of the hydrogen-to-carbon molar ratio of the fuel and the measurement uncertainty of the CO₂ instrumentation and amounts to approximately 10 % (see App. A).

2.3 Modelling of nvPM number emissions

Measurements of aircraft particle emissions in flight can be used to evaluate models predicting aircraft engine nvPM emissions. These models are used to efficiently predict the impact of different engine conditions and the influence of different fuels on particle emissions. Such models are also used to perform further analyses, for example to estimate the impact on contrail formation and radiative forcing (e.g. Teoh et al. (2023)). Here, results from the flight experiments will be compared to modelled emissions indices of two different emission models. The first is the MEEM model (Ahrens et al., 2022), which models soot emissions based on different engine parameters. The second one is the T4/T2 model (Teoh et al., 2022a), which is a publicly available method using the fuel flow as a more accessible parameter for soot modeling.

2.3.1 The MEEM method

MEEM provides an estimation of the emission index for non-volatile particulate matter mass and number of jet engine aircraft at altitude as described by Ahrens et al. (2022). The methodology uses a simplified mission and can be applied to the three flight phases climb, cruise, and descent (above 3000ft). MEEM recommends to use given LTO (landing-and-take-off cycle) points for altitudes below 3000ft. The methodology uses ground level reference data to estimate in flight conditions. It is recommended to use the publicly available emissions certification LTO (covering 7 %, 30 %, 85 %, and 100 % of rated thrust) nvPM data from the ICAO Engine Emissions Databank (EEDB, ICAO (2024)). For older engines showing no nvPM data in the EEDB, MEEM recommends to use SCOPE 11 (Agarwal et al., 2019) to estimate EI mass and number values from given Smoke Number measurements (described as Step 0). The core MEEM calculation is performed in four steps. In step 1, in flight conditions are estimated using altitude and Mach Number as input. With the help of a given fixed pressure coefficient and compressor efficiency (specified separately for climb, cruise, and descent mode) in flight T30 and P30 is calculated. In Step 2, the equivalent ground thrust condition is determined at the same calculated T30 and the corresponding ground reference P30. The read-out of EI mass and number at the calculated thrust requires a linear interpolation between the four given LTO points in Step 3. EEDB makes recommendation for some engines to apply the reported maximum EI mass and/or EI number as an additional interpolation point (MEEM describes 4 vs. 5 point interpolation in Step 3) and put it in between the 30 and



85% thrust, i.e. at 57.5 % thrust. Here, a 5-point interpolation is used which includes the maximum value. For the engine type
195 used during ECLIF3, the Trent XWB-84k engine, the EEDB includes a recommendation to use the peak nvPM EI mass and
nvPM EI number for a 5 point interpolation. Finally, Step 4 corrects the EI mass for the difference in combustor pressure
and AFR between ground to flight relying on simplified Döpelheuer and Lecht correlation (Döpelheuer, 2002). As combustor
AFR at ground and in flight are regarded as highly sensitive data only known to engine manufacturers, MEEM gives a default
Enrichment Factor of 1.1 assuming the combustor runs 10 % richer in flight. The EI number value is then calculated by
200 multiplying the corrected altitude EI mass value by the ratio of the read-out EI number to EI mass at ground reference. In order
to include fuel impacts on nvPM emissions in MEEM, the proposed hydrogen content correction in ICAO CAEP Annex 16
Vol II (ICAO, 2023b) is applied to the nvPM emission indices.

2.3.2 The T4/T2 method

The T4/T2 method is a new approach described by Teoh et al. (2022a) which utilizes nvPM number EI from the ICAO Aircraft
205 Engine Emissions Databank to perform a linear interpolation relative to a non-dimensional engine power parameter, T4/T2.
The T4/T2 model simulates the temperature at combustor exit (engine station 4), accounting for the combustion of fuel with an
estimated air-fuel mass ratio. This requires an estimate of engine power for given fuel mass flow rate. The fuel mass flow rate
is known from Airbus A350 data as a function of time during each ECLIF3 flight. Besides fuel flow, the method requires input
for the engine pressure ratio and the nvPM number emission index for available engine types at the four LTO certification test
210 points (ICAO, 2024). Internally it uses a compressor efficiency = 0.9 as suited for cruise. For details of the method we refer to
the supplement of Teoh et al. (2022a). The T4/T2 method replaces the older fractal aggregates model that was used in earlier
studies (Teoh et al., 2019, 2020a, b) to estimate the nvPM EI from the particle size distribution, morphology and mass emission
index (Stettler et al., 2013; Abrahamson et al., 2016).

3 Results

215 3.1 Influence of engine power settings on particle number emission

In order to link particulate emissions to the respective engine state, emission indices are evaluated relative to fuel flow and
T30. Since exact values of the engine state fall under intellectual property of the manufacturer, we denote relative changes to
mean values for fuel flow and to typical cruise conditions for T30 only (marked as REF). Scales of ECLIF3-1 and ECLIF3-2
are based on the same absolute values.

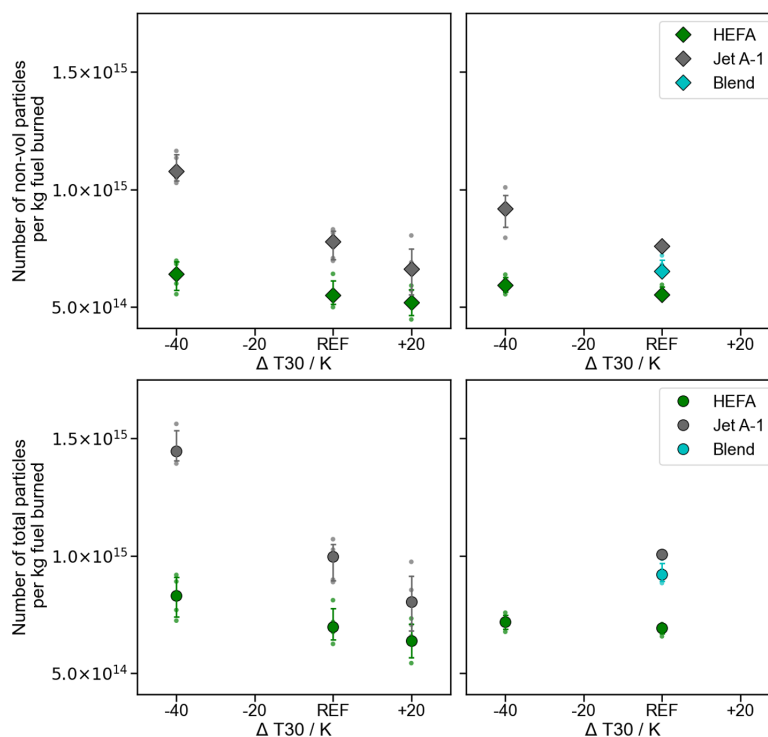


Figure 4. Emission index of non-volatile particle (top) and total particle number (bottom) with difference to a reference combustor inlet temperature (T30) in Kelvin for the different fuels probed during ECLIF3-1 (left) and ECLIF3-2 (right). The particle emission index decreases with increasing T30, with the largest decrease in emissions when using Jet A-1. The figure shows median values with upper and lower confidence intervals (75 %).

220 Emissions of the different fuels were sampled at several altitudes between FL280 and FL360, corresponding to a pressure altitude of 8500-11000m, the blend fuel was sampled exclusively at FL310. For near-field emission measurements, the right engine of the A350 was sampled at different combustor inlet temperatures (T30). During the measurement sequences, the Mach number was kept constant at 0.61-0.62. One test point during ECLIF3-1 at FL350 was performed with a diverging Mach number of 0.68 for the HEFA-SPK test point and 0.65 for the Jet A-1 test point. It is important to note that the typical cruise speed
 225 of an A350 is around 0.85 and therefore higher than during the measurement sequences. T30 of the probed engine was adjusted to correspond to typical cruise T30 conditions. The difference in Mach number and altitude can result, at fixed T30, in different P30 and a different air-to-fuel ratio compared to typical cruise conditions, which can lead to a variance in absolute particle EI. However, the observed percentage difference in particle emissions between the fuels is comparable to those measured in far-field in typical cruise conditions (see Märkl et al. (2024)). Since different engines and fuels were used for the two campaign
 230 periods, the influence of the engine power settings will be assessed separately to make the comparison more conclusive.

In Fig. 4, the correlation of non-volatile and total particle number emission index with combustor inlet temperature of the ECLIF3-1 campaign on the left and the ECLIF3-2 campaign on the right is shown. To increase comparability, only measure-



Table 3. Reduction in nvPM number emissions (top) and total particle emissions (bottom) from the use of the alternative fuel compared to the reference fuel Jet A-1 sampled during ECLIF3-1 at FL280 and ECLIF3-2 at FL310 for the different combustor inlet temperatures (T30).

non-volatile particle number	ECLIF3-1 HEFA-SPK	ECLIF3-2 HEFA-SPK	ECLIF3-2 Blend
<i>low</i> T30	(41 ± 7) %	(35 ± 7) %	-
<i>medium</i> T30	(29 ± 9) %	(27 ± 4) %	(14 ± 5) %
<i>high</i> T30	(22 ± 19) %	-	-
total particle number	ECLIF3-1 HEFA-SPK	ECLIF3-2 HEFA-SPK	ECLIF3-2 Blend
<i>low</i> T30	(42 ± 7) %	(42 ± 6) %	-
<i>medium</i> T30	(30 ± 10) %	(30 ± 3) %	(8 ± 4) %
<i>high</i> T30	(21 ± 20) %	-	-

ment data at pressure altitudes between 8500-9500 m (FL280-FL310) are considered. Mach Number was fixed at 0.61-0.62 for the measurements. The nvPM emission index decreases with increasing T30 for both Jet A-1 and HEFA-SPK measurement sequences. The effect is less pronounced for HEFA-SPK fuel than for Jet A-1, which lowers the relative reduction of nvPM due to HEFA-SPK compared to the fossil reference Jet A-1 at higher values of T30. The reduction in particle emissions of the test engine at given thrust range (based on median values) as a result of using 100 % HEFA-SPK instead of Jet A-1 amounts to 35 %-42 % for *low* T30, 27 %-29 % for *medium* T30 and 21 %-22 % for *high* T30, see Table 3. The classification from *low* to *high* does not refer to the maximum aircraft performance, but to typical in-flight values. A reduction of 14 % is observed using the blend fuel compared to Jet A-1 (ECLIF3-2 data, *medium* T30). The reduction in the total particle number is comparable to the reduction in nvPM.

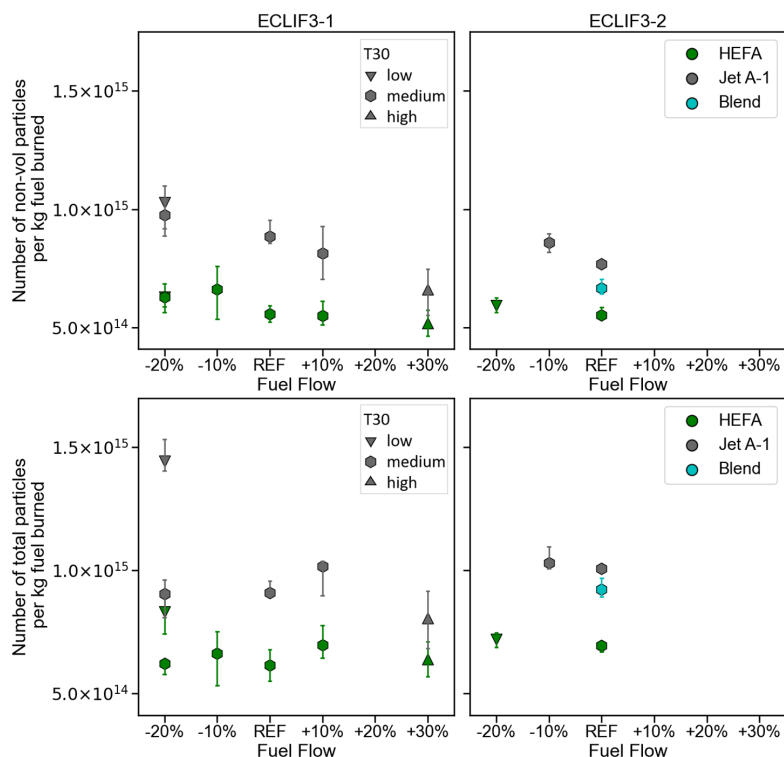


Figure 5. Emission indices of non-volatile particle (top) and total particle number (bottom) with difference to reference fuel flow (%) for the different fuels and combustor inlet temperatures (T30) probed during ECLIF3-1 (left) and ECLIF3-2 (right). The nvPM emission index decreases with increasing fuel flow, with the largest decrease in emissions when using Jet A-1. The emission index of total particles shows a lower dependence on fuel flow. The figure shows median values with upper and lower confidence intervals (75 %).

In Fig. 5, fuel flow dependent particle number emissions are shown. Due to the wider spread of the fuel flow settings, these were grouped into bins with a range of 10 % of the mean fuel flow. The flight altitude ranges between FL280-FL360 and the Mach number was 0.61-0.62, except for one test point during ECLIF3-1, where the Mach number was 0.65-0.68 during the reference test point. An increasing fuel flow (correlating with an increase in T30, see Fig. 6) is associated with a decrease in both nvPM and total particle emission index. This effect is less pronounced for the HEFA-SPK compared to Jet A-1. As a consequence, the impact of using SAF on nvPM number emission is reduced for higher fuel flows. The decreasing reduction in nvPM number emissions of the SAF fuel compared to Jet A-1 at higher cruise power settings is in accordance with the observations in flight and on the ground during the preceding ECLIF2/ND-MAX campaign (Moore et al., 2017; Voigt et al., 2021; Bräuer et al., 2021; Schripp et al., 2022). As shown in Fig. 6, the fuel flow correlates with T30, thus the decrease in particle number may be the result of the increase in T30 temperature at higher power settings. However, at constant combustor inlet temperature, the air mass flow, the pressure and also the associated fuel flow decreases with increasing flight altitude. The variability in fuel flow with flight altitude at constant T30 allows the investigation of the dependence of particle emissions

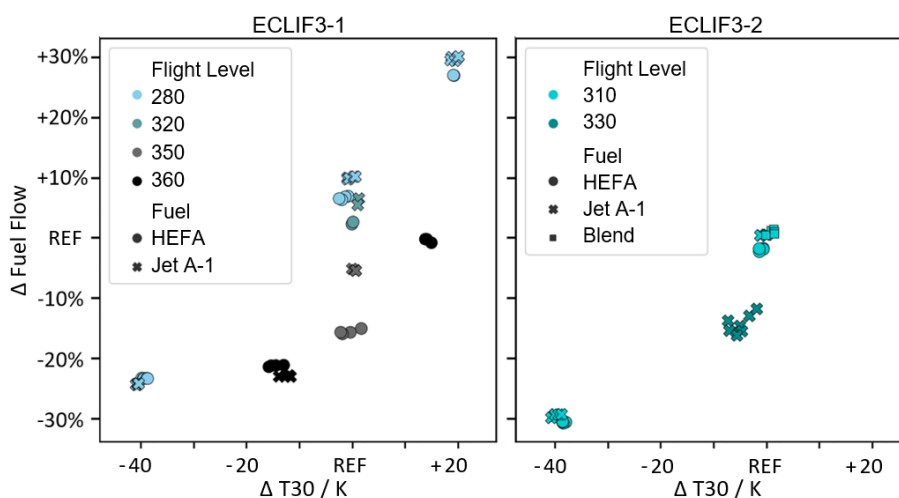


Figure 6. Correlation between combustor inlet temperature T30 and fuel flow of the engine probed during ECLIF3-1 (left) and ECLIF3-2 (right). A strong, flight altitude-dependent correlation between the combustor inlet temperature and fuel flow is observed.

with fuel flow at constant *medium* T30 (see hexagons in Fig. 5). It is observed that also at constant T30, the nvPM emissions decrease with increasing fuel flow. On the other hand, this effect cannot be observed for the total particle concentration. Note that the drop in total particle number at reference fuel flow during ECLIF3-1 results from the different Mach number and altitude affecting the comparison.

3.2 Exhaust particle size distribution

The measurement technique of the condensation particles counters is based on the growth of ultrafine particles by condensation in an environment supersaturated with butanol to a size at which they become measurable by optical methods. Due to this growth process, information about the initial size of the particle is lost. During ECLIF3, four CPCs were used, with a 50% detection diameter D_{50} of the CPCs being about 5 nm for the measurement of total particles and 14 nm for nvPM. The lower cut-off can be increased by installing diffusion screen separators in the inlet lines (see Feldpausch et al. (2006)). As a result, the pressure-dependent lower cut-off D_{50} at 300 hPa is raised to 34 nm (1 diffusion screen) or 81 nm (3 diffusion screens), where D_{50} increases with decreasing ambient pressure (see App. A, Fig. A2). As a result, nvPM measurements can be divided into three size bins: particles larger than ~ 14 nm, particles larger than ~ 32 -38 nm, and particles larger than ~ 77 -93 nm, depending on the atmospheric pressure. The corresponding distribution of non-volatile particles measured in-flight at *medium* T30 during ECLIF3 is shown in Fig. 7.

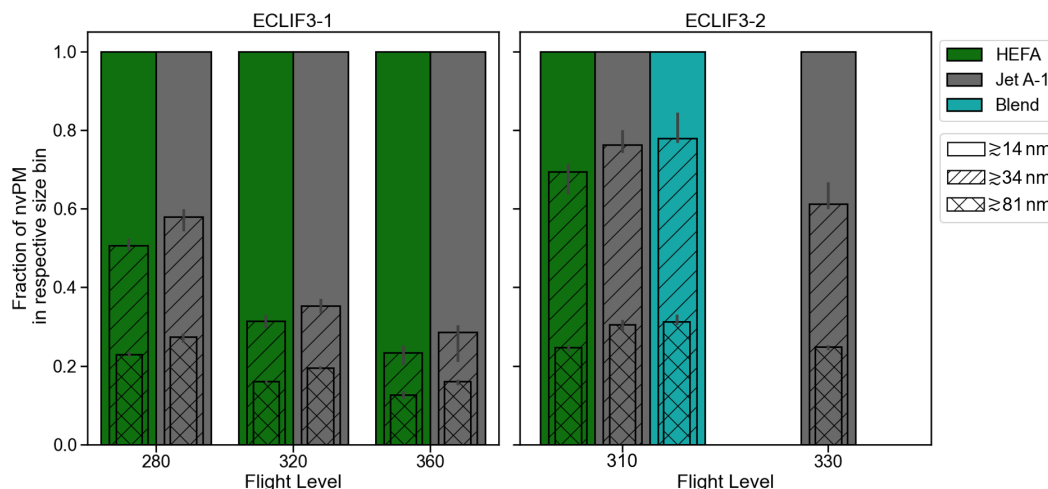


Figure 7. Number of non-volatile particles in specific size bins relative to the sum of nvPM numbers yielding the relative size distribution of non-volatile particles per flight level at *medium* T30. Non-hatched bars mark the sum of the measured nvPM with a lower cut-off D_{50} of 14 nm. Diagonally hatched bars mark the proportion of particles with a D_{50} of about 34 nm, the cross-hatched bars mark the proportion of particles with a D_{50} of about 81 nm. The cut-off is pressure-dependent and shifts to larger particle sizes with decreasing pressure. Nevertheless, a significant shift to smaller nvPM with increasing flight altitude is observed. Jet A-1 and blend fuel show a comparable size distribution. The combustion of HEFA-SPK results in a larger proportion of smaller particles.

270 For 100 % HEFA, the number of particles in both larger size bins decreases, thus the size distribution is shifted towards smaller particles compared to Jet A-1. In contrast, Jet A-1 and blend fuel show a comparable size distribution. Furthermore, the number of large particles decreases with increasing altitude. The cut-off shifts to larger particles with altitude, so fewer particles are detected by the counters with diffusion screens at higher flight levels. Assuming the size distribution of nvPM measured on the ground, this effect leads to a 4 % decrease in the number concentration per 4,000ft when using one diffusion screen and to

275 a decrease of up to 11 % when using 3 diffusion screens. During the flight measurements however, a decrease in the number concentration of up to 39 % in the medium size bin and of up to 29 % in the largest size bin is observed with an increase in flight altitude of 4000ft. Hence, the size distribution of nvPM shifts to smaller particles with higher flight altitudes. The shift to larger particles at the lower altitudes could be explained by the increasing pressure at the combustor inlet (P_{30}). Higher P_{30} at lower altitudes could support the formation of larger nvPM aggregates due to the acting pressure in the combustion chamber.

280 Also for ECLIF3-1 the highest number of non-volatile particulate matter is measured in the smallest size range at ~ 14 to 34nm for all flight levels. Particles < 14 nm cannot be detected with the CPC due to its lower size cut-off D_{50} of ~ 14 nm. For ECLIF3-2 the size distribution is shifted to larger sizes. Engine-to-engine variability, e.g. maintenance cycle, may contribute to this change.



4 Dependence of nvPM and totPM on fuel composition

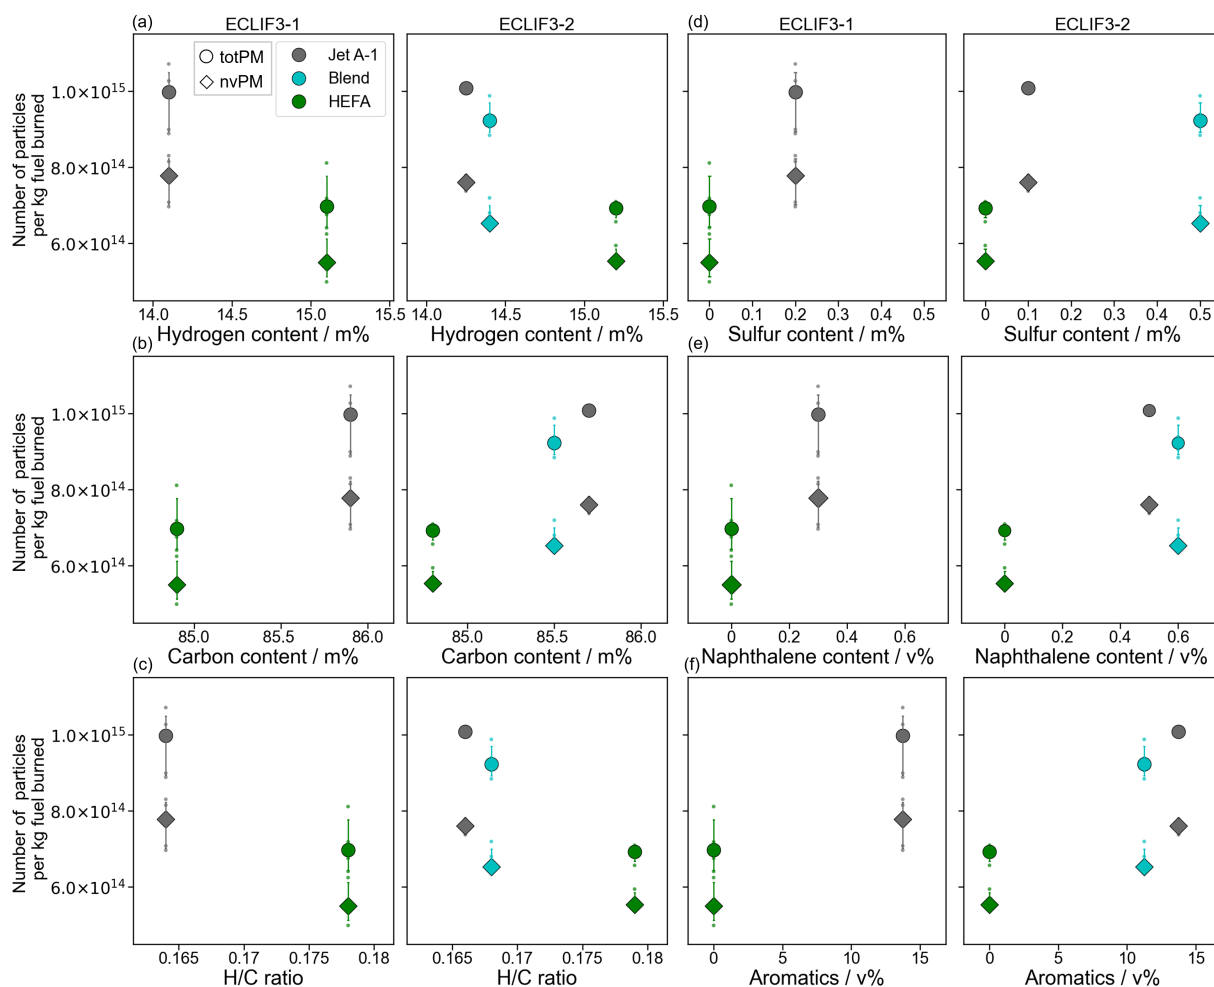


Figure 8. Emission index of non-volatile particulate matter (diamonds) and total particles (circles) with different fuel properties. The figure shows median values with upper and lower confidence intervals (75 %). In order to improve comparability and enhance the quality of the dataset, only measurement points at FL280 (ECLIF3-1) and FL310 (ECLIF3-2) at medium combustor inlet temperatures are shown. Emissions increase with increasing carbon content and decreasing hydrogen content. The aromatic content contributes to the formation of nvPM. The blended fuel had the highest sulfur and naphthalene content.

285 Soot is formed when a lack of oxygen during combustion prevents the complete conversion of hydrocarbons into CO₂ and H₂O as is the case in rich-burn engines. Conventional aviation fuel is largely composed of aliphatic hydrocarbon chains and a smaller proportion of cyclic aromatic hydrocarbons. Polycyclic aromatic hydrocarbons (PAH) are thought to be the molecular precursors of soot particles, since more energy is required to break the chemical bonds and oxidize the aromatic ring structures



compared to the hydrocarbon chains (Mitchell and Frenklach, 2003). In aromatic-rich fuels, such as conventional Jet A-1, PAH are present in relatively large concentrations. Fuel specifications allow aromatic concentrations of up to 25 %. It has been shown that especially fuels with a large amount of naphthalenes have strong sooting tendencies (Brem et al., 2015; Schripp et al., 2022; Harper et al., 2022). In contrast, in aliphatic fuels such as the HEFA-SPK probed during ECLIF3 (see Table 2, Fig. 8), the aromatic ring structures must be formed by fuel decomposition products through a sequence of elementary reactions (Richter and Howard, 2000). Consequently, the active ring formation reactants are available to a smaller extent in HEFA-SPK compared to the aromatic-rich reference fuel Jet A-1. This is reflected in the measurements (see Fig. 8 e,f). The HEFA-SPK, which is low in aromatics and consequently also in naphthalene content, shows a significant reduction in soot particle number emissions.

The hydrogen to carbon ratio of the fuel (H/C ratio) provides a good indication of how the hydrocarbons are distributed in the fuel. Aromatic molecules have a lower H/C ratio than aliphatic hydrocarbon chains. Therefore, fuels with a larger H/C ratio, or an increased hydrogen content, are associated with lower soot number emissions (Naegeli et al., 1983; Schripp et al., 2018; Cain et al., 2013). Higher soot emissions with lower H/C ratios are also observed during ECLIF3 measurements (see Fig. 8c). Both reference Jet A-1 fuels have a similar hydrogen content with comparable nvPM emissions (see Fig 8 a). HEFA-SPK has a higher H/C ratio due to the absence of aromatic ring structures, which results in a higher hydrogen content and reduced soot emissions. The blend fuel is characterised by a lower aromatic content and a higher hydrogen content than the reference Jet A-1, also leading to a reduction in nvPM emissions.

Compared to the world average Jet A-1, the Jet A-1 fuels sampled during ECLIF3 have a relatively high hydrogen content of about 14.1-14.3 % by mass, while the sampled HEFA-SPK have a comparatively low hydrogen content of about 15.1-15.2 % compared to the world average HEFA-SPK (see Table 2, Fig. 2). Therefore, we expect to measure a smaller reduction in soot number emissions between the fuels than if we would have used Jet A-1 with world average hydrogen content. Also, the HEFA-SPK has a lower hydrogen content than the mean of previously measured fuels of the SimFuel platform, suggesting that a replacement of market average Jet A-1 by market average HEFA-SPK could lead to a larger reduction in soot emission than presented in this study. Further, both HEFA-SPKs have a high content of iso-paraffins in relation to n-paraffins, which might have promoted soot formation.

Volatile particles in the aircraft exhaust plume are composed of a complex mixture of sulfur and organic components from the fuel or lubrication oil (Takegawa et al., 2023). The sulfur contained in the fuel is oxidized to SO₂ during combustion. Subsequently, the S(IV) is partially converted to S(VI) (mainly SO₃), which reacts with water vapor in the cooling exhaust forming H₂SO₄ (Jurkat et al., 2011). Part of the gaseous sulfuric acid can be chemisorbed and can link with the surface of available combustion aerosols, e.g. nvPM, or it may condense on these particles during cooling of the exhaust gas. In addition, homogeneous and ion-induced heterogeneous nucleation of H₂SO₄ contributes to the formation of volatile aerosols which can subsequently grow by condensation of H₂SO₄ and water vapor (Kärcher et al., 1995; Miake-Lye et al., 1998; Schumann et al., 2002; Sorokin, 2004; Petzold et al., 2005). The influence of the sulfur content on the number of volatile particles is demonstrated with the example of the ECLIF3-2 measurements in Fig. 8(d). The fraction of soot particles larger than 14 nm to the total particle concentration is largest for the quasi-sulfur-free HEFA-SPK with 80 %, followed by Jet A-1 with a fraction



of 76 % and the blend fuel with 72 %. This shows that the highest sulfur content links with the highest fraction of volatile
 325 particles. Here, the percentage of nvPM larger than 14nm is 72 %. In Fig. 4, a comparatively low reduction in total particles
 when using the blend fuel compared to Jet A-1 is striking, which could be attributed to the higher sulfur content of this fuel.
 For better comparability, only measurement data at the same flight level and engine power setting were considered in Fig. 8
 However, the observed dependencies remain when adding different engine conditions and flight levels from other test points of
 the campaign.

330 4.1 Comparison of model results with measurements

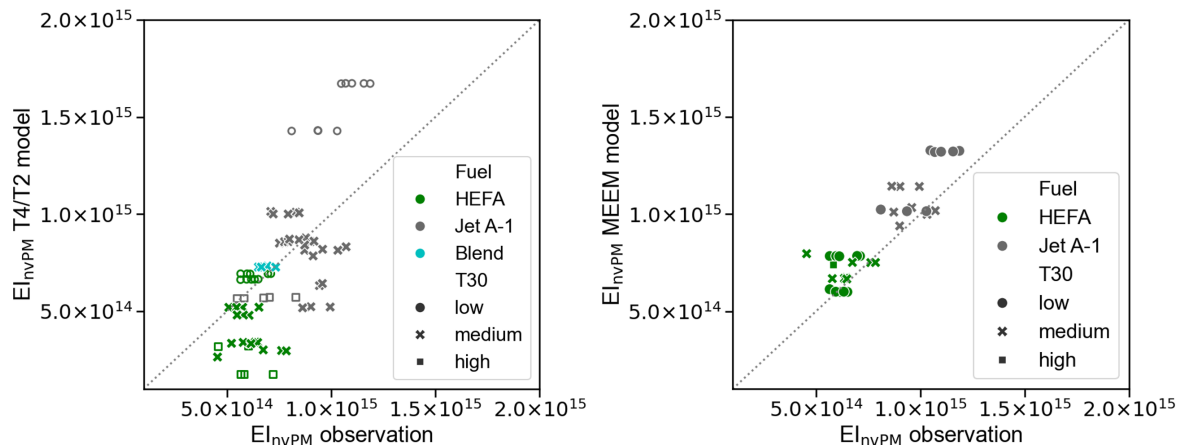


Figure 9. Comparison of measured non-volatile particle emission indices to modelled results from the T4/T2 model (left) and the MEEM model (right). Data is classified according to the fuel used and the combustor inlet temperature (T30). The fuel impact is clearly visible for both T4/T2 and MEEM model results. For the MEEM model some data points have been discarded as they correspond to engine states outside the applicability of the model assumptions (see text).

Figure 9 shows non-volatile particle EI (EI_{nvPM}) observed during ECLIF3 near-field measurements and their corresponding values as predicted by the T4/T2 model and the MEEM model for the different fuels used during the campaign. All valid data points measured on FL280-FL360 at different fuel flows and T30 were used, comparable with the data from Fig. 5. As explained in Sect. 2.3.2, the MEEM method estimates the P30 and T30 based on the flight conditions (Altitude, Mn) and
 335 default compressor efficiency and pressure coefficient values. For cruise in particular, these default values were derived from
 the analysis of actual cruise conditions, therefore with both engines running at the same power setting. Hence, the MEEM
 model implicitly assumes that both engines are running at similar power setting. Therefore, test points for which the difference
 of T30 between the 2 engines was greater than 50 K were discarded from the MEEM model comparison.

The T4/T2 method provides a publicly available method for the determination particulate emissions for the further use of
 340 modeling a larger aircraft fleet, using fuel mass flow rates as primary input. The objective of the model is therefore the prediction



of soot emissions at medium engine power settings typically encountered in cruise flight. These conditions are marked in Fig. 9 with filled symbols. Other engine power settings can also be modelled (blank symbols), but the model prediction skill is clearly strongest for average cruise flight conditions.

The nvPM number data generally show a significant correlation between observation and model results. The span of the T4/T2 model results is larger than the range of observed values for *low* T30 and *high* T30, while the emissions are well reproduced for *medium* T30. Model and observation results for nvPM numbers show a quadratic Pearson correlation coefficient r^2 of 52 %. The MEEM model accurately reproduces the variability of nvPM emissions caused by different engine settings, altitudes and fuels. Here, a correlation of 79 % is found.

Finally, we look for systematic relationships between modeled and observed EI values for the different fuels. Here, we evaluate the same data points as in the analysis of the fuel impact during the measurements in Table 3. We find that for both, model and observation results, the EI values for the number of soot particles vary systematically with fuel hydrogen content. The T4/T2 model finds a reduction of 44 % for *high* T30, 47 % for *medium* and 56 % for *low* T30. Hence, the observed trend of a decreasing reduction in nvPM emissions between the fuels with increasing T30 is reflected by the T4/T2 model. Emissions when using the blend fuel are underestimated by the T4/T2 model showing 22 % reduction compared to Jet A-1.

The MEEM model finds a reduction of about 41 % when HEFA-SPK is used instead of Jet A-1 for *low* T30 and thus reflects the measured reduction well. For *medium* T30, the MEEM model predicts a reduction of 32 % where the measured reduction is 33 %. Note, however, that only test points at FL350 and FL360 have been used here, FL280 and FL310 test points were discarded as the engine conditions were outside the specifications where the MEEM model is applicable. For the T4/T2 model no such limitation is known, therefore all data points are retained in this comparison.

360 5 Conclusions and outlook

In-flight measurements of the combustion of 100 % HEFA-SPK sustainable aviation fuel, a 38 % HEFA-SPK blend, and a fossil Jet A-1 have been performed in the course of the ECLIF3 campaign in 2021. At pressure altitudes between 8500m and 11000m, the DLR Falcon research aircraft captured trace gas and aerosol emissions approximately 100-200m behind the emitting aircraft, an Airbus A350-941 equipped with latest-generation Rolls-Royce Trent XWB-84 engines. During a total of 6 flights, data of the emissions of non-volatile particles larger than 14nm as well as total particles with a size larger than 5 nm were recorded in situ by 4 cabin mounted condensation particle counters.

The power setting, here controlled via the combustor inlet temperature, has a significant influence on particle emissions. At low cruise power settings, the use of 100 % HEFA-SPK compared to fossil Jet A-1 resulted in a reduction of both non-volatile particles and total particles of up to 42 %. At medium cruise power settings typical for cruise conditions, the use of 100 % HEFA-SPK reduced nvPM emissions by 29 %. At the same engine power setting, the use of a mixed fuel with 38 % HEFA-SPK led to a reduction in nvPM of 14 %. At high cruise power settings, particle emissions decreased approximately 20 % using 100 % HEFA-SPK compared to Jet A-1. Furthermore, a shift in the size distribution of nvPM to smaller particles for HEFA-SPK with respect to Jet A-1 and for measurements with increasing pressure altitude was observed.



375 The reference Jet A-1 had an increased hydrogen content (14.08-14.25 % by mass) compared to the global mean (13.9 % by mass). In contrast, the HEFA-SPK used for this study had a lower hydrogen content (15.11-15.18 % by mass) than other HEFA-SPK components available on the market. A high hydrogen content, or a high H/C ratio, is associated with lower fuel sooting tendencies. For the combustion of fuels with fleet average hydrogen content, the benefit on particle emissions from using 100 % HEFA-SPK might therefore be higher. Previous flight experiments have already observed a reduction in the non-volatile particle number of up to 50 % with blends of Jet A-1 and HEFA-SPK (Moore et al., 2017; Voigt et al., 2021; Bräuer et al., 380 2021). It is important to keep in mind that combustor design as well as engine cycle parameters influence aircraft emissions and were different for the aforementioned projects. However, these results highlight the importance of the fuel composition when addressing aviation soot emissions. Cleaner fuels in terms of hydrogen and aromatic content compared to the global average can lead to a significant reduction in particle emissions and may therefore have a positive influence on the climate impact from contrails (Märkl et al., 2024).

385 We show that both, the T4/T2 model and the MEEM model generally correlate well with our nvPM measurements. The MEEM model accurately reproduces soot emission encountered during the flight experiments. The T4/T2 model correctly reproduces nvPM emissions at medium power settings most relevant for cruise flight while some deviations are apparent for high and low power settings.

For the future, in-flight measurements of contrails and particles from lean-burn engines will be interesting, where combustion 390 in the soot-poor regime is expected. Models show that in the soot-poor regime, as is the case with lean burn engines, increased activation of volatile particles may occur (Kärcher, 2018). In this context, the influence of lubrication oil emissions on aerosol particles could also be of interest. Further, different fossil based hydrotreated or hydrocracked fuels with reduced aromatics and sulfur content, as well as a higher hydrogen content, or SAFs with a high H/C ratio could be viable pathways of soot emission reduction. In the future, modern jet engines and targeted use of sustainable aviation fuels, together with other technologies such 395 as flight route optimization, can lower the climate forcing from contrails and are therefore an important factor in mitigating the climate impact of aviation.

Data availability. The data are collected at the HALO database at <https://halo-db.pa.op.dlr.de/mission/124> (doi: 10.17616/R39Q0T)



Appendix A: Instrument characterisation and calibrations

For the use of classical condensation particle counters in low-pressure environments during in-flight measurements, a number of processes affecting the counting efficiency as well as particle losses in the inlet lines have to be considered and characterized. The counting efficiency of butanol-based CPCs has been found to degrade at lower inlet pressures in the past (Noone and Hansson, 1990; Hermann and Wiedensohler, 2001). Therefore, the counting efficiency of the instruments is characterised in the laboratory under low pressure conditions between 200-900 hPa and for different particle sizes using Ag aerosol from a tube furnace that is size selected with a Differential Mobility Analyser (DMA, Model 55-40-26-S-DMA, Grimm Aerosol Airing, Germany). As reference instrument within the low-pressure manifold, a Faraday Cup Electrometer (Model 5.705, GRIMM Aerosol Technik, Airing, Germany) is used. From calibration runs at 35 nm-particles, a parameterized pressure-dependent correction function of the form

$$F(p) = m(p - p_0) + c_0 - \alpha \exp\left(-b \frac{p}{p_0}\right)$$

is determined, which can be applied to the airborne measurements. Here, p designates the current manifold pressure and p_0 is the reference (laboratory) pressure at which the reference concentration c_0 is determined. The parameters m , α and b are fitted using a Markov-Chain Monte Carlo procedure (Foreman-Mackey et al., 2013) resulting also in uncertainty estimates for each parameter. The particle diameter of 35 nm was chosen to approximately match the mode diameter of the particle size distribution measured in flight described in Moore et al. (2017). The measured particle number concentrations are corrected for multiply charged particles from the DMA following the procedure described in ISO 27891:2015(E) (ISO, 2015). The calibrations in the laboratory were performed with inlet lines comparable to the inlet lines in the aircraft to also capture inlet line losses (mainly diffusion losses) at the respective pressure levels. (Diffusion screens were removed for laboratory measurements because the measurements at a fixed particle diameter would not be meaningful). Counting efficiencies of all counters, from which the correction functions for low pressure and inlet line losses can be derived, are shown in Fig. A1. The overall uncertainty of the correction function arises from the uncertainty of the fit parameters and the pressure control during the laboratory measurement and amounts to about 9 % at 300 hPa

Furthermore, the lower cut-off or 50 % detection diameter D_{50} at 300 hPa was determined for all CPCs. For this calibration run, the DMA was set to select a range of particle sizes from 4.1 nm to 30 nm. The resulting data was parameterized using a function following Mertes et al. (1995). The derived cut-off functions are shown in Fig. A2. Measurements indicate a lower cut-off of 7 nm for the total particles (CPC totPM) and 11.6 nm for the non-volatile particle counter (CPC nvPM1).

The cut-off diameter can be shifted to larger particle sizes by connecting the CPC to a diffusion screen separator (see Feldpausch et al. (2006)). During ECLIF3, two CPCs measuring nvPM were equipped with one (CPC nvPM2), or three (CPC nvPM3), diffusion screens in the inlet lines in order to obtain a rough size distribution. The penetration denotes the fraction of particles of a given size which penetrate through the diffusion screen separators. The cut-off obtained by this method is pressure-dependent and is well characterised by a function following Feldpausch et al. (2006). The corresponding curves are shown in Fig. A2. For altitudes between 28,000 and 36,000 ft (corresponding to 330 hPa and 230 hPa), the cut-off is between 32-38 nm when using one diffusion screen (CPC nvPM2) and 77-93 nm when using three diffusion screens (CPC nvPM3).

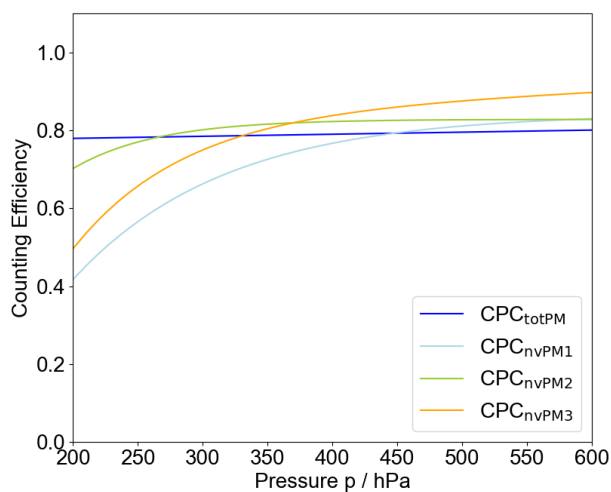


Figure A1. Counting efficiency at low pressure derived from laboratory measurements. CPC used for total particle measurements is shown in blue, CPC measuring total nvPM in light blue. CPCs used with diffusion screen separators during the flight measurements are depicted in green (1 diffusion screen) and yellow (3 diffusion screens). Diffusion screens were removed for laboratory measurements. Calibrations have been captured with inlet lines to also account for inlet line losses.

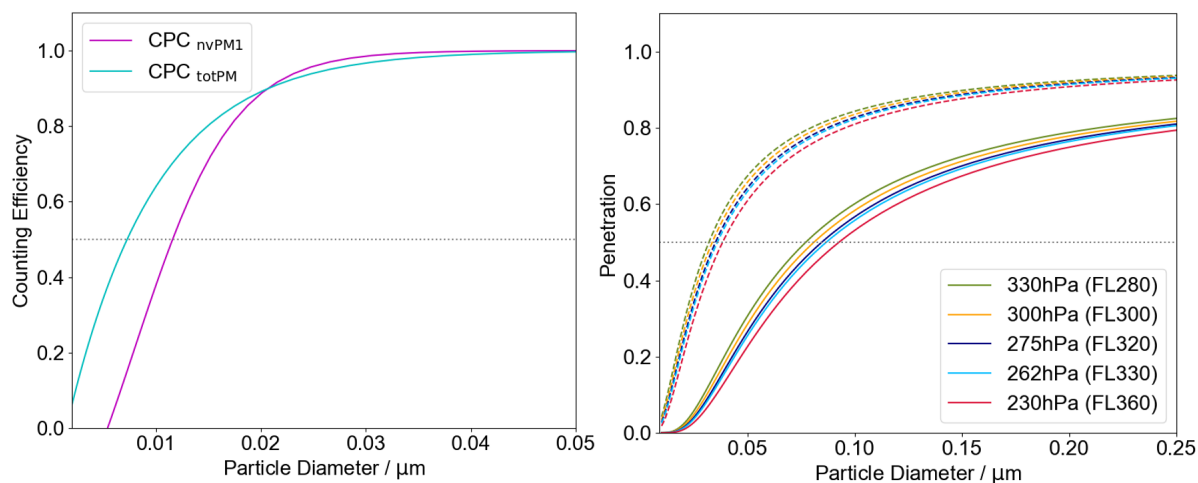


Figure A2. Counting efficiency at 300hPa of the CPC measuring nvPM and total particles (left). Penetration with particle size at different pressures using CPC_{nvPM2} (dashed line) with one or CPC_{nvPM3} (solid line) with three diffusion screen separators (right). Cut-off diameters D_{50} are reached at 50 % counting efficiency (dotted grey).



The thermal denuder vaporizes volatile parts of the aerosol by heating the sample air to 250°C. By heating the sample flow to a predetermined temperature, volatile components like organic carbon compounds and sulfuric acid are evaporated, leaving non-volatile, solid particles such as soot in the sample flow. These non-volatile particles are influenced by thermophoresis effects. The temperature gradient before and after the heating section inside the thermal denuder impacts the particles' mobility in the sample flow, leading to partial removal of non-volatile particles from the sample. Particle losses through thermophoresis effects were evaluated in the laboratory by comparing data captured with the cold and the hot thermal denuder. The losses due to the thermal denuder amount to 17 % and are corrected by applying a correction factor to the measured data.

At high aerosol number concentrations, as can be encountered in near-field measurements, the probability of coincidence effects increases. In that case, two particles coincide in the viewing volume of the laser of the CPC. The counting electronics will not recognise them as two particles, but rather as one. The coincidence effect has been characterised experimentally and the data has been corrected following the procedure described in Collins et al. (2013). The experiments showed that the procedure shows reliable results for correction factors up to about 1.2. Data with a higher coincidence factor were removed from the dataset. Based on the calibration studies, the uncertainty of the coincidence correction factor is 10 %.

During the in-flight measurements, the aerosol detectors obtained their sample air through an isokinetic inlet on the center line of the upper fuselage. A detailed characterisation of the Falcon inlet system has recently been published by Schöberl et al. (2023). Depending on the airspeed, depletion or enrichment of aerosol particles can be caused by the inlet system. Errors due to inlet effects for aerosol in the submicrometer range are small and amount to 2 % for near-field measurement in the absence of ice particles. For measurements with contrail ice particles, i.e. far-field measurements, the inlet effect cannot be neglected because the contrail ice particles are in a size range which will be ingested up to an upper cut-off diameter. Even though the ice crystals will sublime once entering the warm inlet lines inside the fuselage, the ice residuals will be detected by the particle instruments. The upper cut-off diameter of the sampling system for true airspeeds exceeding 190 m s⁻¹ is approximately 6 μm, requiring a correction of the particle measurement data according to the ambient ice particle size distribution.

Possible deviations in the sample flow in flight lead to an additional measurements uncertainty of 1 %. The total uncertainty of the particle measurements Δn_x depends on the applied coincidence correction and pressure and amounts to 7-13 % for an air pressure of 250-350 hPa, where the uncertainty increases with decreasing pressure.

The error in the particle emission index (Eq. 1)

$$\Delta EI = \sqrt{\left(\frac{dEI}{dn_x}\right)^2 (\Delta n_x^2 + \Delta bg_n^2) + \left(\frac{dEI}{dCO_2}\right)^2 (\Delta CO_2^2 + \Delta bg_{CO_2}^2) + \left(\frac{dEI}{d\alpha}\right)^2 \Delta \alpha^2} \quad (A1)$$

additionally includes the standard deviation of the aerosol background Δbg_n of about 5-10 % of the background concentration, the standard deviation of the CO₂ background Δbg_{CO_2} of about 0.1-0.2 ppmv, the uncertainty of the CO₂ measurement of 0.2 ppmv and the error in the hydrogen to carbon ratio $\Delta \alpha$ of 0.1 %. Due to the strongly pronounced enhancements in trace gas and aerosol species during the plume encounter during near-field measurements (see Fig. 3), the error results mainly from the uncertainty in the aerosol measurement, leading to a ΔEI of about 10 %. However, background uncertainties can become a prominent factor in determining the EI from far-field measurements, where the plume encounters are not as distinct from the background as during near-field measurements.



Author contributions. CR and MG coordinated the ECLIF3 project. CR, CV, and PM defined the test plan. AD, CR, CV and SK planned and coordinated the flight experiment. AR, DS, FS, MS, RD, RM, SK and TH performed the in-flight measurements. RD performed the aerosol and test data evaluation and wrote the paper. CV conceptualized the study. US performed the model calculations. CR and MG assisted in aircraft data analysis and in the overall test data analysis. DA, DL, MJ, PM and PS assisted emission, engine and model data interpretation.
460 RS provided the fuels and CR, GE, MG, PLC, RS, TS and UB performed fuel analyses. All authors contributed to the paper.

Financial support. This research has been supported by the Deutsche Forschungsgemeinschaft within SPP 1294 HALO under contract no VO 1504/7-1 and VO 1504/9-1.

The article processing charges for this open-access publication were covered by the German Aerospace Center (DLR) within DEAL.

Competing interests. DL, MJ, PM and PS are employed by Rolls-Royce plc.; DA is employed by Rolls-Royce Deutschland ;RS is employed
465 by Neste Corporation. All other authors declare that they have no conflict of interest.

Acknowledgements. We thank Roger Teoh and Marc Stettler (Imperial College London) for useful discussions on the analysis of T4/T2 model data.



References

- Abrahamson, J. P., Zelina, J., Andac, M. G., and Vander Wal, R. L.: Predictive Model Development for Aviation Black Carbon Mass
470 Emissions from Alternative and Conventional Fuels at Ground and Cruise, *Environmental Science & Technology*, 50, 12048–12055,
<https://doi.org/10.1021/acs.est.6b03749>, 2016.
- Agarwal, A., Speth, R. L., Fritz, T. M., Jacob, S. D., Rindlisbacher, T., Iovinelli, R., Owen, B., Miake-Lye, R. C., Sabnis, J. S., and Barrett,
S. R. H.: SCOPE11 Method for Estimating Aircraft Black Carbon Mass and Particle Number Emissions, *Environmental Science &
Technology*, 53, 1364–1373, <https://doi.org/10.1021/acs.est.8b04060>, publisher: American Chemical Society, 2019.
- 475 Ahrens, D., Méry, Y., Guénard, A., and Miake-Lye, R. C.: A New Approach to Estimate Particulate Matter Emissions From Ground
Certification Data: The nvPM Mission Emissions Estimation Methodology, *Journal of Engineering for Gas Turbines and Power*, 145,
<https://doi.org/10.1115/1.4055477>, 2022.
- Beyersdorf, A. J., Timko, M. T., Ziemba, L. D., Bulzan, D., Corporan, E., Herndon, S. C., Howard, R., Miake-Lye, R., Thornhill, K. L.,
Winstead, E., Wey, C., Yu, Z., and Anderson, B. E.: Reductions in aircraft particulate emissions due to the use of Fischer–Tropsch fuels,
480 *Atmospheric Chemistry and Physics*, 14, 11–23, <https://doi.org/10.5194/acp-14-11-2014>, 2104.
- Bier, A. and Burkhardt, U.: Impact of Parametrizing Microphysical Processes in the Jet and Vortex Phase on Contrail Cirrus Properties and
Radiative Forcing, *Journal of Geophysical Research: Atmospheres*, 127, <https://doi.org/10.1029/2022JD036677>, publisher: John Wiley &
Sons, Ltd, 2022.
- Bier, A., Burkhardt, U., and Bock, L.: Synoptic Control of Contrail Cirrus Life Cycles and Their Modification Due to Reduced Soot Number
485 Emissions, *Journal of Geophysical Research: Atmospheres*, 122, <https://doi.org/10.1002/2017JD027011>, 2017.
- Brem, B. T., Durdina, L., Siegerist, F., Beyerle, P., Bruderer, K., Rindlisbacher, T., Rocci-Denis, S., Andac, M. G., Zelina, J., Penanhoat,
O., and Wang, J.: Effects of Fuel Aromatic Content on Nonvolatile Particulate Emissions of an In-Production Aircraft Gas Turbine,
Environmental Science & Technology, 49, 13 149–13 157, <https://doi.org/10.1021/acs.est.5b04167>, 2015.
- Bräuer, T., Voigt, C., Sauer, D., Kaufmann, S., Hahn, V., Scheibe, M., Schlager, H., Huber, F., Le Clercq, P., Moore, R. H., and Anderson,
490 B. E.: Reduced ice number concentrations in contrails from low-aromatic biofuel blends, *Atmospheric Chemistry and Physics*, 21, 16 817–
16 826, <https://doi.org/10.5194/acp-21-16817-2021>, 2021.
- Burkhardt, U., Bock, L., and Bier, A.: Mitigating the contrail cirrus climate impact by reducing aircraft soot number emissions, *npj Climate
and Atmospheric Science*, 1, 37, <https://doi.org/10.1038/s41612-018-0046-4>, 2018.
- Cain, J., DeWitt, M. J., Blunck, D., Corporan, E., Striebich, R., Anneken, D., Klingshirn, C., Roquemore, W. M., and Vander Wal, R.:
495 Characterization of Gaseous and Particulate Emissions From a Turboshift Engine Burning Conventional, Alternative, and Surrogate
Fuels, *Energy & Fuels*, 27, 2290–2302, <https://doi.org/10.1021/ef400009c>, 2013.
- Chauvigné, A., Jourdan, O., Schwarzenboeck, A., Gourbeyre, C., Gayet, J. F., Voigt, C., Schlager, H., Kaufmann, S., Borrmann, S., Mollerer,
S., Minikin, A., Jurkat, T., and Schumann, U.: Statistical analysis of contrail to cirrus evolution during the Contrail and Cirrus Experiment
(CONCERT), *Atmospheric Chemistry and Physics*, 18, 9803–9822, <https://doi.org/10.5194/acp-18-9803-2018>, 2018.
- 500 Collins, A. M., Dick, W. D., and Romay, F. J.: A New Coincidence Correction Method for Condensation Particle Counters, *Aerosol Science
and Technology*, 47, 177–182, <https://doi.org/10.1080/02786826.2012.737049>, 2013.
- Döpelheuer, A.: Anwendungsorientierte Verfahren Zur Bestimmung Von CO, HC Und Ruß Aus Luftfahrttriebwerken, Ph.D. thesis, German
Aerospace Center (DLR), Institute of Propulsion Technology, Cologne, Germany, 2002.



- Feldpausch, P., Fiebig, M., Fritzsche, L., and Petzold, A.: Measurement of ultrafine aerosol size distributions by a combination of diffusion screen separators and condensation particle counters, *Journal of Aerosol Science*, 37, 577–597, <https://doi.org/10.1016/j.jaerosci.2005.04.009>, 2006.
- Foreman-Mackey, D., Hogg, D. W., Lang, D., and Goodman, J.: emcee: The MCMC Hammer, *Publications of the Astronomical Society of the Pacific*, 125, 306, <https://doi.org/10.1086/670067>, publisher: University of Chicago Press, 2013.
- Hadaller, O. and Johnson, J.: World Fuel Sampling Program. CRC Report No. 647, Tech. rep., Coordinating Research Council, Alpharetta, GA 30022, 2006.
- Harlass, T., Dischl, R., Kaufmann, S., Märkl, R., Sauer, D., Scheibe, M., Stock, P., Bräuer, T., Dörnbrack, A., Roiger, A., Schlager, H., Schumann, U., Schripp, T., Grein, T., Bondorf, L., Renard, C., Gauthier, M., Johnson, M., Luff, D., Madden, P., Swann, P., Ahrens, D., Sallinen, R., and Voigt, C.: Measurement report: In-flight and ground-based measurements of nitrogen oxide emissions from latest generation jet engines and 100% sustainable aviation fuel, *EGUsphere*, 2024, 1–22, <https://doi.org/10.5194/egusphere-2024-454>, 2024.
- Harper, J., Durand, E., Bowen, P., Pugh, D., Johnson, M., and Crayford, A.: Influence of alternative fuel properties and combustor operating conditions on the nvPM and gaseous emissions produced by a small-scale RQL combustor, *Fuel*, 315, 123 045, <https://doi.org/10.1016/j.fuel.2021.123045>, 2022.
- Hermann, M. and Wiedensohler, A.: Counting efficiency of condensation particle counters at low-pressures with illustrative data from the upper troposphere, *Journal of Aerosol Science*, 32, 975–991, [https://doi.org/10.1016/S0021-8502\(01\)00037-4](https://doi.org/10.1016/S0021-8502(01)00037-4), 2001.
- Heymsfield, A., Baumgardner, D., DeMott, P., Forster, P., Gierens, K., and Kärcher, B.: Contrail Microphysics, *Bulletin of the American Meteorological Society*, 91, 465–472, <https://doi.org/10.1175/2009BAMS2839.1>, 2010.
- Hoelzen, J., Silberhorn, D., Zill, T., Bensmann, B., and Hanke-Rauschenbach, R.: Hydrogen-powered aviation and its reliance on green hydrogen infrastructure – Review and research gaps, *International Journal of Hydrogen Energy*, 47, 3108–3130, <https://doi.org/10.1016/j.ijhydene.2021.10.239>, 2022.
- ICAO: First sustainable aviation fuel batches certified under CORSIA, <https://www.icao.int/Newsroom/Pages/First-sustainable-aviation-fuel-batches-certified-under-CORSIA.aspx>, 2023a.
- ICAO: Volume II : Aircraft Engine Emissions, Tech. Rep. 5th ed., ICAO, Montréal, QC, Canada, 2023b.
- ICAO: ICAO Aircraft Engine Emissions Databank, Tech. rep., EASA, Montréal, QC, Canada, <https://www.easa.europa.eu/domains/environment/icao-aircraftengine-emissions-databank>, 2024.
- ISO: Aerosol particle number concentration - Calibration of condensation particle counters, 2015.
- Jurkat, T., Voigt, C., Arnold, F., Schlager, H., Kleffmann, J., Aufmhoff, H., Schäuble, D., Schaefer, M., and Schumann, U.: Measurements of HONO, NO, NO_y and SO₂ in aircraft exhaust plumes at cruise, *Geophysical Research Letters*, 38, <https://doi.org/10.1029/2011GL046884>, 2011.
- Kathrotia, T. and Riedel, U.: Predicting the soot emission tendency of real fuels – A relative assessment based on an empirical formula, *Fuel*, 261, 116 482, <https://doi.org/10.1016/j.fuel.2019.116482>, 2020.
- Kleine, J.: Flugzeuggetragene Messungen von Eis- und Rußpartikeln in Kondensstreifen bei Verwendung konventioneller und synthetischer Treibstoffe, Ph.D. thesis, Johannes Gutenberg-Universität Mainz, <https://doi.org/10.25358/OPENSOURCE-3574>, 2019.
- Kleine, J., Voigt, C., Sauer, D., Schlager, H., Scheibe, M., Jurkat-Witschas, T., Kaufmann, S., Kärcher, B., and Anderson, B. E.: In Situ Observations of Ice Particle Losses in a Young Persistent Contrail, *Geophysical Research Letters*, 45, <https://doi.org/10.1029/2018GL079390>, 2018.



- Kärcher, B.: Formation and radiative forcing of contrail cirrus, *Nature Communications*, 9, 1824, <https://doi.org/10.1038/s41467-018-04068-0>, 2018.
- Kärcher, B., Peter, T., and Ottmann, R.: Contrail formation: Homogeneous nucleation of H₂SO₄/H₂O, *Geophysical Research Letters*, 22, 1501–1504, <https://doi.org/10.1029/95GL01337>, 1995.
- 545 Kärcher, B., Burkhardt, U., Bier, A., Bock, L., and Ford, I. J.: The microphysical pathway to contrail formation, *Journal of Geophysical Research: Atmospheres*, 120, 7893–7927, <https://doi.org/10.1002/2015JD023491>, 2015.
- Lee, D., Fahey, D., Skowron, A., Allen, M., Burkhardt, U., Chen, Q., Doherty, S., Freeman, S., Forster, P., Fuglestedt, J., Gettelman, A., De León, R., Lim, L., Lund, M., Millar, R., Owen, B., Penner, J., Pitari, G., Prather, M., Sausen, R., and Wilcox, L.: The contribution of global aviation to anthropogenic climate forcing for 2000 to 2018, *Atmospheric Environment*, 244, 117834, <https://doi.org/10.1016/j.atmosenv.2020.117834>, 2021.
- 550 Lobo, P., Hagen, D. E., and Whitefield, P. D.: Comparison of PM Emissions from a Commercial Jet Engine Burning Conventional, Biomass, and Fischer–Tropsch Fuels, *Environmental Science & Technology*, 45, 10744–10749, <https://doi.org/10.1021/es201902e>, 2011.
- Mertes, S., Schröder, F., and Wiedensohler, A.: The Particle Detection Efficiency Curve of the TSI-3010 CPC as a Function of the Temperature Difference between Saturator and Condenser, *Aerosol Science and Technology*, 23, 257–261, <https://doi.org/10.1080/02786829508965310>, 1995.
- 555 Miake-Lye, R. C., Anderson, B. E., Cofer, W. R., Wallio, H. A., Nowicki, G. D., Ballenthin, J. O., Hunton, D. E., Knighton, W. B., Miller, T. M., Seeley, J. V., and Viggiano, A. A.: SO_x oxidation and volatile aerosol in aircraft exhaust plumes depend on fuel sulfur content, *Geophysical Research Letters*, 25, 1677–1680, <https://doi.org/10.1029/98GL00064>, 1998.
- Minnis, P., Bedka, S. T., Duda, D. P., Bedka, K. M., Chee, T., Ayers, J. K., Palikonda, R., Spangenberg, D. A., Khlopenkov, K. V., and
560 Boeke, R.: Linear contrail and contrail cirrus properties determined from satellite data, *Geophysical Research Letters*, 40, 3220–3226, <https://doi.org/10.1002/grl.50569>, 2013.
- Mitchell, P. and Frenklach, M.: Particle aggregation with simultaneous surface growth, *Physical Review E*, 67, 061407, <https://doi.org/10.1103/PhysRevE.67.061407>, publisher: American Physical Society, 2003.
- Moore, R. H., Shook, M., Beyersdorf, A., Corr, C., Herndon, S., Knighton, W. B., Miake-Lye, R., Thornhill, K. L., Winstead, E. L., Yu, Z.,
565 Ziemba, L. D., and Anderson, B. E.: Influence of Jet Fuel Composition on Aircraft Engine Emissions: A Synthesis of Aerosol Emissions Data from the NASA APEX, AAFEX, and ACCESS Missions, *Energy & Fuels*, 29, 2591–2600, <https://doi.org/10.1021/ef502618w>, 2015.
- Moore, R. H., Thornhill, K. L., Weinzierl, B., Sauer, D., D’Ascoli, E., Kim, J., Lichtenstern, M., Scheibe, M., Beaton, B., Beyersdorf, A. J.,
Barrick, J., Bulzan, D., Corr, C. A., Crosbie, E., Jurkat, T., Martin, R., Riddick, D., Shook, M., Slover, G., Voigt, C., White, R., Winstead,
E., Yasky, R., Ziemba, L. D., Brown, A., Schlager, H., and Anderson, B. E.: Biofuel blending reduces particle emissions from aircraft
570 engines at cruise conditions, *Nature*, 543, 411–415, <https://doi.org/10.1038/nature21420>, 2017.
- Märkl, R. S., Voigt, C., Sauer, D., Dischl, R. K., Kaufmann, S., Harlaß, T., Hahn, V., Roiger, A., Weiß-Rehm, C., Burkhardt, U., Schumann,
U., Marsing, A., Scheibe, M., Dörnbrack, A., Renard, C., Gauthier, M., Swann, P., Madden, P., Luff, D., Sallinen, R., Schripp, T., and
Le Clercq, P.: Powering aircraft with 100% sustainable aviation fuel reduces ice crystals in contrails, *Atmospheric Chemistry and Physics*,
24, 3813–3837, <https://doi.org/10.5194/acp-24-3813-2024>, 2024.
- 575 Naegeli, D. W., Dodge, L. G., and Moses, C. A.: Effects of Flame Temperature and Fuel Composition on Soot Formation in Gas Turbine
Combustors, *Combustion Science and Technology*, 35, 117–131, <https://doi.org/10.1080/00102208308923706>, 1983.
- Noone, K. J. and Hansson, H.-C.: Calibration of the TSI 3760 Condensation Nucleus Counter for Nonstandard Operating Conditions, *Aerosol
Science and Technology*, 13, 478–485, <https://doi.org/10.1080/02786829008959462>, publisher: Taylor & Francis, 1990.



- Petzold, A., Gysel, M., Vancassel, X., Hitzinger, R., Puxbaum, H., Vrochticky, S., Weingartner, E., Baltensperger, U., and Mirabel, P.: On
580 the effects of organic matter and sulphur-containing compounds on the CCN activation of combustion particles, *Atmospheric Chemistry
and Physics*, 5, 3187–3203, <https://doi.org/10.5194/acp-5-3187-2005>, 2005.
- Prussi, M., Lee, U., Wang, M., Malina, R., Valin, H., Taheripour, F., Velarde, C., Staples, M. D., Lonza, L., and Hileman, J. I.: CORSIA:
The first internationally adopted approach to calculate life-cycle GHG emissions for aviation fuels, *Renewable and Sustainable Energy
Reviews*, 150, 111 398, <https://doi.org/10.1016/j.rser.2021.111398>, 2021.
- 585 Richter, H. and Howard, J.: Formation of polycyclic aromatic hydrocarbons and their growth to soot—a review of chemical reaction pathways,
Progress in Energy and Combustion Science, 26, 565–608, [https://doi.org/10.1016/S0360-1285\(00\)00009-5](https://doi.org/10.1016/S0360-1285(00)00009-5), 2000.
- Schripp, T., Anderson, B., Crosbie, E. C., Moore, R. H., Herrmann, F., Oßwald, P., Wahl, C., Kapernaum, M., Köhler, M.,
Le Clercq, P., Rauch, B., Eichler, P., Mikoviny, T., and Wisthaler, A.: Impact of Alternative Jet Fuels on Engine Exhaust Com-
position During the 2015 ECLIF Ground-Based Measurements Campaign, *Environmental Science & Technology*, 52, 4969–4978,
590 <https://doi.org/10.1021/acs.est.7b06244>, 2018.
- Schripp, T., Anderson, B. E., Bauder, U., Rauch, B., Corbin, J., Smallwood, G., Lobo, P., Crosbie, E., Shook, M. A., Miake-Lye, R. C., Yu, Z.,
Freedman, A., Whitefield, P. D., Robinson, C. E., Achterberg, S. L., Köhler, M., Oßwald, P., Grein, T., Sauer, D., Voigt, C., Schlager, H.,
and LeClercq, P.: Aircraft Engine Particulate Matter and Gaseous Emissions from Sustainable Aviation Fuels: Results from Ground-Based
Measurements During the Nasa/Dlr Campaign Eclif2/Nd-Max, *SSRN Electronic Journal*, <https://doi.org/10.2139/ssrn.4045444>, 2022.
- 595 Schumann, U.: On conditions for contrail formation from aircraft exhausts, *Meteorologische Zeitschrift*, 5, 4–23,
<https://doi.org/10.1127/metz/5/1996/4>, 1996.
- Schumann, U., Arnold, F., Busen, R., Curtius, J., Kärcher, B., Kiendler, A., Petzold, A., Schlager, H., Schröder, F., and Wohlfrom, K.-H.:
Influence of fuel sulfur on the composition of aircraft exhaust plumes: The experiments SULFUR 1–7, *Journal of Geophysical Research:
Atmospheres*, 107, AAC 2–1, <https://doi.org/10.1029/2001JD000813>, num Pages: AAC 2-27 Publisher: John Wiley & Sons, Ltd, 2002.
- 600 Schumann, U., Baumann, R., Baumgardner, D., Bedka, S. T., Duda, D. P., Freudenthaler, V., Gayet, J.-F., Heymsfield, A. J., Minnis, P.,
Quante, M., Raschke, E., Schlager, H., Vázquez-Navarro, M., Voigt, C., and Wang, Z.: Properties of individual contrails: a compilation of
observations and some comparisons, *Atmospheric Chemistry and Physics*, 17, 403–438, <https://doi.org/10.5194/acp-17-403-2017>, 2017.
- Schöberl, M., Dollner, M., Gasteiger, J., Seibert, P., Tipka, A., and Weinzierl, B.: Characterization of the airborne aerosol inlet and
transport system used during the A-LIFE aircraft field experiment, preprint, *Aerosols/In Situ Measurement/Instruments and Platforms*,
605 <https://doi.org/10.5194/egusphere-2023-439>, 2023.
- Sorokin, A.: Gaseous SO₃ and H₂SO₄ in the exhaust of an aircraft gas turbine engine: measurements by CIMS and impli-
cations for fuel sulfur conversion to sulfur (VI) and conversion of SO₃ to H₂SO₄, *Atmospheric Environment*, 38, 449–456,
<https://doi.org/10.1016/j.atmosenv.2003.09.069>, 2004.
- Stettler, M. E. J., Swanson, J. J., Barrett, S. R. H., and Boies, A. M.: Updated Correlation Between Aircraft Smoke Number and Black Carbon
610 Concentration, *Aerosol Science and Technology*, 47, 1205–1214, <https://doi.org/10.1080/02786826.2013.829908>, 2013.
- Takegawa, N., Nagasaki, A., Fushimi, A., Fujitani, Y., Murashima, Y., and Sakurai, H.: Volatility of aircraft exhaust ul-
trafine particles inferred from field measurements at Narita International Airport, *Atmospheric Environment*, 292, 119 391,
<https://doi.org/10.1016/j.atmosenv.2022.119391>, 2023.
- Teoh, R., Stettler, M. E., Majumdar, A., Schumann, U., Graves, B., and Boies, A. M.: A methodology to relate black carbon particle number
615 and mass emissions, *Journal of Aerosol Science*, 132, 44–59, <https://doi.org/10.1016/j.jaerosci.2019.03.006>, 2019.



- Teoh, R., Schumann, U., Majumdar, A., and Stettler, M. E. J.: Mitigating the Climate Forcing of Aircraft Contrails by Small-Scale Diversions and Technology Adoption, *Environmental Science & Technology*, 54, 2941–2950, <https://doi.org/10.1021/acs.est.9b05608>, 2020a.
- Teoh, R., Schumann, U., and Stettler, M. E. J.: Beyond Contrail Avoidance: Efficacy of Flight Altitude Changes to Minimise Contrail Climate Forcing, *Aerospace*, 7, 121, <https://doi.org/10.3390/aerospace7090121>, 2020b.
- 620 Teoh, R., Schumann, U., Gryspeerdt, E., Shapiro, M., Molloy, J., Koudis, G., Voigt, C., and Stettler, M.: Aviation contrail climate effects in the North Atlantic from 2016–2021, <https://doi.org/10.5194/acp-2022-169>, 2022a.
- Teoh, R., Schumann, U., Voigt, C., Schripp, T., Shapiro, M., Engberg, Z., Molloy, J., Koudis, G., and Stettler, M. E. J.: Targeted Use of Sustainable Aviation Fuel to Maximize Climate Benefits, *Environmental Science & Technology*, 56, 17246–17255, <https://doi.org/10.1021/acs.est.2c05781>, 2022b.
- 625 Teoh, R., Engberg, Z., Schumann, U., Voigt, C., Shapiro, M., Rohs, S., and Stettler, M.: Global aviation contrail climate effects from 2019 to 2021, *EGUsphere*, preprint, <https://doi.org/10.5194/egusphere-2023-1859>, 2023.
- Tran, S., Brown, A., and Olfert, J. S.: Comparison of Particle Number Emissions from In-Flight Aircraft Fueled with Jet A1, JP-5 and an Alcohol-to-Jet Fuel Blend, *Energy & Fuels*, 34, 7218–7222, <https://doi.org/10.1021/acs.energyfuels.0c00260>, 2020.
- Voigt, C., Schumann, U., Jessberger, P., Jurkat, T., Petzold, A., Gayet, J.-F., Krämer, M., Thornberry, T., and Fahey, D. W.: Extinction and
630 optical depth of contrails, *Geophysical Research Letters*, 38, <https://doi.org/10.1029/2011GL047189>, 2011.
- Voigt, C., Schumann, U., Minikin, A., Abdelmonem, A., Afchine, A., Borrmann, S., Boettcher, M., Buchholz, B., Bugliaro, L., Costa, A., Curtius, J., Dollner, M., Dörnbrack, A., Dreiling, V., Ebert, V., Ehrlich, A., Fix, A., Forster, L., Frank, F., Fütterer, D., Giez, A., Graf, K., Groß, J.-U., Groß, S., Heimerl, K., Heinold, B., Hüneke, T., Järvinen, E., Jurkat, T., Kaufmann, S., Kenntner, M., Klingebiel, M., Klimach, T., Kohl, R., Krämer, M., Krisna, T. C., Luebke, A., Mayer, B., Mertes, S., Molleker, S., Petzold, A., Pfeilsticker, K., Port, M.,
635 Rapp, M., Reutter, P., Rolf, C., Rose, D., Sauer, D., Schäfler, A., Schlage, R., Schnaiter, M., Schneider, J., Spelten, N., Spichtinger, P., Stock, P., Walser, A., Weigel, R., Weinzierl, B., Wendisch, M., Werner, F., Wernli, H., Wirth, M., Zahn, A., Ziereis, H., and Zöger, M.: ML-CIRRUS: The Airborne Experiment on Natural Cirrus and Contrail Cirrus with the High-Altitude Long-Range Research Aircraft HALO, *Bulletin of the American Meteorological Society*, 98, 271–288, <https://doi.org/10.1175/BAMS-D-15-00213.1>, 2017.
- Voigt, C., Kleine, J., Sauer, D., Moore, R., Bräuer, T., Le Clercq, P., Kaufmann, S., Scheibe, M., Jurkat-Witschas, T., Aigner, M., Bauder, U., Boose, Y., Borrmann, S., Crosbie, E., Diskin, G. S., DiGangi, J., Hahn, V., Heckl, C., Huber, F., Nowak, J. B., Rapp, M., Rauch, B.,
640 Robinson, C., Schripp, T., Shook, M., Winstead, E., Ziemba, L., Schlager, H., and Anderson, B. E.: Cleaner burning aviation fuels can reduce contrail cloudiness, *Communications Earth & Environment*, 2, 114, <https://doi.org/10.1038/s43247-021-00174-y>, 2021.
- Vázquez-Navarro, M., Mannstein, H., and Kox, S.: Contrail life cycle and properties from 1 year of MSG/SEVIRI rapid-scan images, *Atmospheric Chemistry and Physics*, 15, 8739–8749, <https://doi.org/10.5194/acp-15-8739-2015>, 2015.
- 645 Wang, Z., Bugliaro, L., Jurkat-Witschas, T., Heller, R., Burkhardt, U., Ziereis, H., Dekoutsidis, G., Wirth, M., Groß, S., Kirschler, S., Kaufmann, S., and Voigt, C.: Observations of microphysical properties and radiative effects of a contrail cirrus outbreak over the North Atlantic, *Atmospheric Chemistry and Physics*, 23, 1941–1961, <https://doi.org/10.5194/acp-23-1941-2023>, 2023.