

Brief Communication: Monitoring impending slope failure with very high-resolution space borne Synthetic Aperture Radars

Andrea Manconi^{1,2}, Yves Bühler^{1,2}, Andreas Stoffel^{1,2}, Johan Gaume^{1,2,3}, Qiaoping Zhang⁴, Valentyn Tolpekin⁴

¹ WSL Institute for Snow and Avalanche Research SLF, Flüelastrasse 11, CH-7260 Davos Dorf, Switzerland

² Climate Change, Extremes and Natural Hazards in Alpine Regions Research Centre CERC

³ Institute for Geotechnical Engineering, ETH Zürich, Switzerland

⁴ ICEYE Oy, Maarintie 6, 02150 Espoo, Finland

Correspondence to: Andrea Manconi (andrea.manconi@slf.ch)

Abstract. We demonstrate how high spatial and temporal resolution spaceborne synthetic aperture radar (SAR) imagery can improve slope deformation monitoring. We process ICEYE data over the Brienz/Brinzauls slope instability in the Swiss Alps, where a catastrophic failure occurred on June 15th, 2023. Image correlation applied to retrieve surface velocities shows results comparable to in-situ measurements. Pre- and post-failure acquisitions used to map areas invaded by debris and to compute volumetric changes associated are in good agreement with photogrammetric data. This study sets the baseline for new-generation satellite SAR data aimed at providing timely information in landslide early warning scenarios.

1 Introduction

The availability of spaceborne Synthetic Aperture Radar (SAR) sensors has considerably increased in recent years due to launch of numerous missions, a trend expected to continue. This scenario offers new options for the systematic use of SAR datasets in numerous applications related to natural hazards. For what concerns slope stability analyses, thanks to the ESA Copernicus Sentinel-1 mission, the applications have progressively migrated from classic surveys, in the form of local and/or regional scale processing efforts for inventorying purpose and/or for back analyses of case studies, to systematic/operational monitoring solutions (Bianchini et al., 2021). Several limitations remain, however, especially when the surface displacements sharply accelerate and the probability of slope failure increases (Manconi, 2021). New generation SAR missions promise to be a game changer due to the massive technological improvement introduced, reducing the cost of production and the size of satellites and sensors, thus allowing for the space missions providing a more frequent revisit (Sigmundsson et al., 2024). In this work, we show the results of a pilot study performed during the crisis associated with the acceleration of the Brienz/Brinzauls slope instability (hereinafter referred to as Brienz), located in the Swiss alps, culminating in a failure on June 15, 2023, which accumulated ~1.2 Mm³ of debris material very close to the village. There, surface velocities increased consistently since 2013, and early warning system based on an extensive geodetic monitoring (combination of GNSS, robotic

Deleted: slope acceleration and

Deleted: spatial and temporal

Deleted: 1

Deleted: be applied to

Deleted: acquired

Deleted: The available images provided unprecedented viewing of the moving slope from satellite SAR, with revisit times ranging from less than 1 hour to a maximum of 4 days. We apply image

Deleted: algorithms (i.e., pixel-offset analysis) on SAR backscattering to measure

Deleted: velocity before the failure event and compared the

Deleted: against ground-based SAR data used for early-warning purposes. We also compare pre

Deleted: imagery

Deleted: with the down wasted materials, showing

Deleted: digital surface models generated from

Deleted: drone flights. Our results demonstrate how weather independent, high resolution

Deleted: can provide data in critical scenarios of slope deformation, suggesting that crucial

Deleted: can be retrieved timely also in remote, poorly accessible regions where in-situ monitoring is not viable

Deleted: 1 Introduction

The availability of spaceborne Synthetic Aperture Radar (SAR) sensors has considerably increased in recent years due to launch of numerous missions, a trend expected to continue. This scenario offers new options for the systematic use of SAR datasets in numerous applications related to natural hazards, providing timely information independently of light and of weather conditions (Ban et al., 2020; Biggs et al., 2022; Monterroso et al., 2020; Leissn et al., 2020; Twele et al., 2016; Wangchuk et al., 2022). For what concerns slope stability analyses, thanks to the ESA Copernicus Sentinel-1 mission the applications progressively migrated from classic surveys, in the form of local and/or regional scale processing efforts for inventorying purpose and/or for back analyses of case studies, to systematic/operational monitoring solutions (Barra et al., 2017; Bianchini et al., 2021). Several limitations remain, however, especially when the surface displacements sharply accelerate and the probability of slope failure increases (Manconi, 2021). In such cases, rapid assessment is demanded for early warning and/or forecast applications aimed at protecting people and assets. New generation of SAR missions promise to be a game changer due to the massive technological improvement introduced, reducing the cost of production and the size of satellites and sensors, thus allowing for the space missions based on fleets and thus providing a more frequent revisit (Lukosz et al., 2021; Sigmundsson et al., 2024). In this work, we show the results of a pilot study performed during the crisis associated with the acceleration of the Brienz/Brinzauls slope instability (hereinafter referred to as Brienz), located in the Swiss alps, culminating on June 15, 2023 with the failure of 1.2 Mm³ slope portion named "the Island" (Loew, 2023). The large landslide complex is composed of a series of old rockslide events, fall deposits, and granular flows, which probably started after the last deglaciation ~13k years ago (Figli et al., 2022). Surface velocities increased ... [1]

total station, and a permanent ground-based SAR) has been progressively developed to protect people and infrastructures. The emergency scenario in 2023 gained resonance in the media due to the successful evacuation of the population (ca. 100 people) on May 13th, i.e. ca. 1 month before the failure event. The main goal of this work is to investigate the reliability of the information provided by high spatial and temporal resolution satellite SAR, as well as their potential use in operational near-real-time monitoring and early warning contexts.

2 Dataset

We benefit of the high-resolution SAR imagery acquired from the ICEYE constellation, and of the exceptional availability of independent measurements and ground observations allowing for a thoughtful validation. ICEYE is a commercial operator offering spaceborne SAR imagery (X-Band, 9.65GHz, wavelength 3.1 cm) acquired with different modalities (details can be found at ICEYE, 2024). The current configuration allows covering the Earth's surface ca. every 6 hours, although imaging modes and/or the geometrical characteristics may strongly differ. For our application in Brienz, we considered the imagery acquired in Spot Imaging mode, VV polarization, covering an area of 5 x 5 km. Among the four different views available, the ascending orbit, left looking (ASC_L), provides an optimal sight over the area of interest and minimal zones of layover and shadow (dark/black areas in Fig. 1b), as well as a total of 16 images acquired in the period before the failure event (see Table A1 and Fig. 1c, red filled triangles, average revisit time 1.6 days, minimum ca. 25 minutes, maximum 4 days). Incidence angles vary from ca. 17 to ca. 37 degrees (see also Table A1). We used the GAMMA software to initially process the Single Look Complex (SLC) images, applying a multilooking of 2 samples in azimuth and 1 in range, resulting in a ground sampling distance (GSD) of ca. 0.42 m x 0.33 m, in range and azimuth directions, respectively. SAR images were then aligned (co-registered) considering as reference the acquisition on May-22, 2023 (IDL in Table A1), and then radiometrically terrain corrected (RTC, Small et al., 2022) benefitting of a high-resolution digital topographic surface model openly provided by Swisstopo over entire Switzerland (GSD 0.50 m). The RTC removes the influence of topography on SAR backscatter and ensures an appropriate evaluation its values and of their variations over space and time.

3 Pre-event: measuring accelerated slope deformation.

Pixel-offset (hereafter referred to as PO) is a well-established method to measure displacements in digital imagery. For what concerns SAR imagery, PO is an efficient alternative to radar interferometry to measure displacements when large spatial gradients occur due to landslide processes. We adapted the PO method presented in Bickel et al., (2018) by first converting the SAR backscatter in an orientation image (Dematteis and Giordan, 2021). We used a template window of 128x128 pixels, overlap 75%, and oversampling factor of 4. We computed PO in SAR coordinates (range and azimuth directions) for all possible pairs with images acquired between May-22 and Jun-15, 2023. Then, we converted the results to meters, calculated the magnitude of the 2D surface displacement vectors, and finally generated velocity maps in m/day.

Deleted: over Brienz

Deleted: acquisition

Deleted: . The current ICEYE constellation is composed of more than 30 units and rapidly increasing.

Deleted: HIGH

Deleted: 25 km²

Deleted: Brienz

Deleted:)

Deleted: good revisit, with

Deleted: The images present high variability in terms of incidence

Deleted: , ranging

Deleted: (Wegmüller and Werner, 1997)

Deleted: ICEYE

Deleted: pixel resolution cell

Deleted: 42m x 0.33m

Deleted: , see Table A1) and benefitting of a digital topographic surface model (DSM)

Deleted: (swissSURFACE3D, 2024,

Deleted: ground sampling distance (GSD) of 0.50 m).

Moved (insertion) [1]

Deleted: ¶

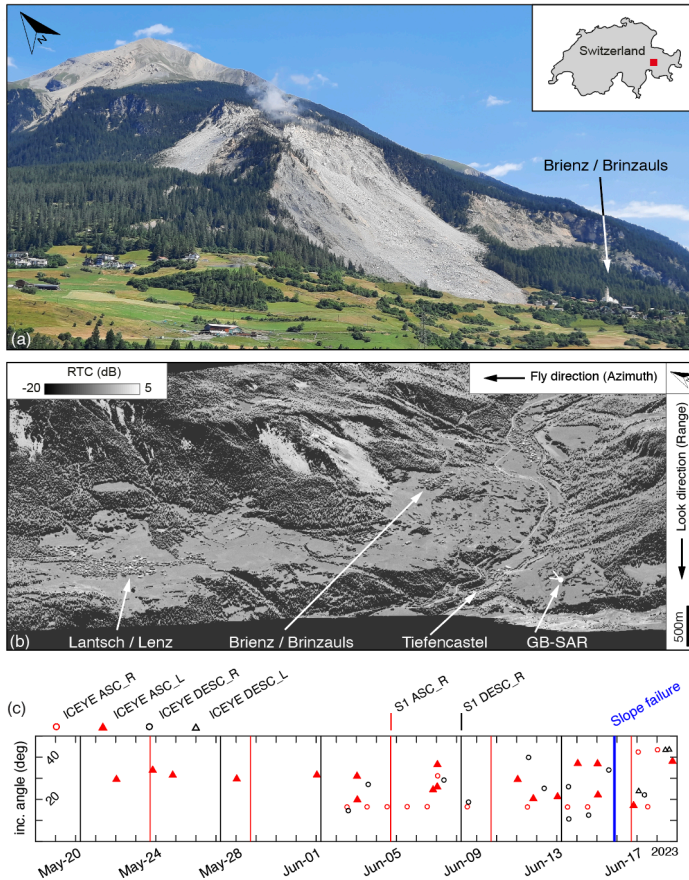


Figure 1: (a) Picture of the Brienz slope acquired from the GB-SAR station (see location in panel 1b) after the failure occurred on Jun-15, 2023. (b) Reference SAR (May-22, 2023) backscattering image in dB, after radiometric terrain correction. Some points of interest are indicated for spatial orientation. (c) Sentinel-1 and ICEYE imagery acquired over Brienz with indication of orbit direction (ascending or descending) and sensor look direction (left or right).

The velocity results for selected snapshots are shown in Fig 2. The acceleration of the portion failed on June-15, called the Island, is clearly visible compared with the rest of slope. There, velocities increased from about 0.25 m/day reported on May-28, to a maximum of 0.5 m/day on June-03, 2023 (Fig. 2a). Thereafter, the values reached ca. 1 m/day on Jun-11 and then ramped up to maximum values of 4 m/day on Jun-15, i.e., the day of the failure.

Deleted: ¶

Deleted: (Small et al., 2022).

Deleted: Spot HIGH

Moved up [1]: 3 Pre-event: measuring accelerated slope deformation.¶


Deleted: Pixel-offset (hereafter referred to as PO, also known as image correlation, feature tracking, or speckle tracking) is an established approach to measure residual misalignments of digital images. For what concerns SAR imagery, PO is an efficient alternative to radar interferometry to measure displacements when large spatial gradients occur due to landslide processes (Manconi et al., 2014). As the accuracy of the measurements obtained with PO is directly related to the GSD of the imagery (Provost et al., 2022), we expect to detect displacements that occurred between two subsequent acquisitions in the order of some centimetres. We adapted the PO method presented in Bickel et al., (2018) by first converting the SAR backscattering in an orientation image (Dematteis and Giordan, 2021), and using a template window of 128×128 pixels, overlap 75%, and oversampling factor of 4 (see details of the PO parameters in Bickel et al., 2018). We computed PO in the range and azimuth directions for all possible pairs with images acquired between May-22 and Jun-15, 2023, converted to meters multiplying by the pixel size (0.42m × 0.33m, in range and azimuth, respectively), calculated the magnitude of the 2D surface displacement vectors in SAR coordinates, and finally generated

Deleted: maps in m/day. Results

Deleted: Velocities

Deleted: surface velocities severely increased, reaching

Deleted: ramping

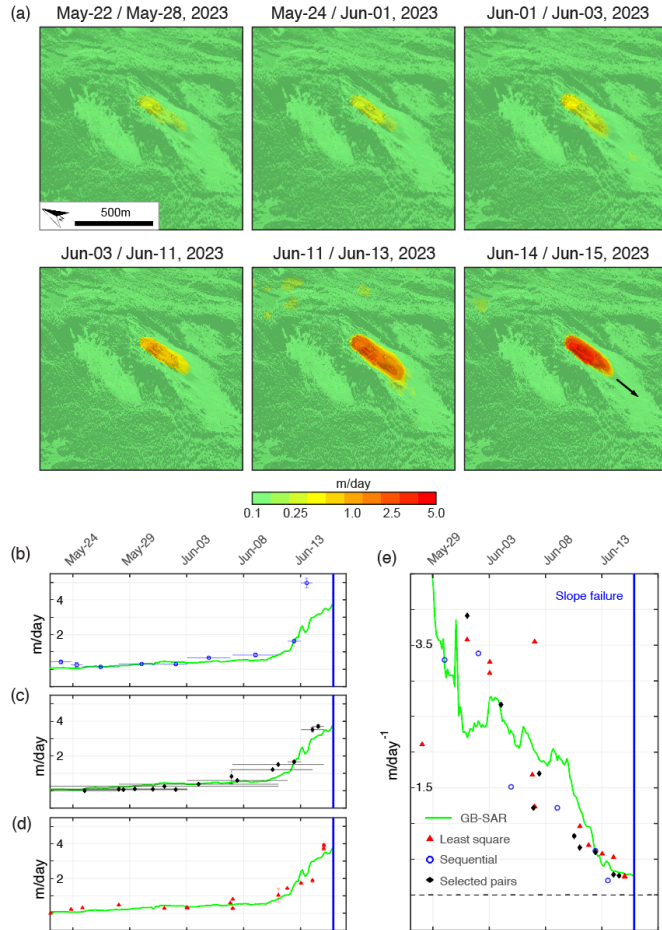

220 **Figure 2:** (a) Selected results showing the 2D surface velocities over Brienz measured with pixel-offset (PO) applied to the ICEYE data. Note that the colour scale is logarithmic to show the extreme differences in velocities occurred within few days a factor six larger compared to the one showed in (a). (b-d) Time series of maximum surface velocities measured with PO vs. velocities recorded with GB-SAR. Horizontal bars in b and c show the time span of the images paired. Error bars, in most cases smaller than the symbol size, are related to the median PO measured in an area considered stable (e) Inverse velocity plot to show failure forecasting potential of ICEYE PO results vs. GB-SAR.

225

Moved (insertion) [2]

Moved (insertion) [3]

Deleted:

We extracted the maximum PO velocities for all pairs and generated velocity time series to compare with the measurements obtained from a Ground-Based (GB) SAR installed in Brienz for early warning purposes, and measuring every 4 minutes. Fig. 2b shows the comparison between three different approaches to generate the time series from the PO results and the GB-SAR measurements. For all three time series approaches, we considered the statistical distribution of PO velocities obtained in a stable area 1'000 x 1'000 pixels (i.e., 420 m x 330 m) to estimate the inaccuracies, which are in most cases below 0.1 m/day (see error bars in Fig. 2b). For the first time series approach, we computed PO versus the first available subsequent image (i.e., sequential), without any constraints on the view angles, but considering at least 1 day of temporal baseline. The results agree with the GB-SAR time series with a RMSE of 0.06 m (see Table A2) when the last pair close to the failure time is not considered. Such deviation is caused by the large differences in incidence angle between the images (almost 15 degrees between image ID13 and ID14, Table A1). For this reason, in the second time series approach we used all possible PO pairs with at least 24 h temporal baseline, but also constrained incidence angle differences to max 1.5 degrees. This value was fixed after several trials and allowed preserving enough pairs and high signal-to-noise ratio in the PO results. The results show a very good match with the GB-SAR over the entire time series (RMSE 0.08 m), showing the high potential of ICEYE in monitoring applications in case acquisition parameters would be nearly constant over the area of interest. Finally, as third approach we used the least square optimization to compute displacement time series (Casu et al., 2011), also in this case by considering acquisitions with incidence angle differences lower than 1.5 degrees. Also in this case, the results compare well with the GB-SAR velocities (RMSE 0.01 m), with the advantage that the velocities are estimated at the dates of acquisition and not representative of an average value in between the pairs, as for the two other methods.

Fig. 1c shows the conversion of the velocity time series into their inverse. When velocity increases exponentially, its inverse approaches progressively lower values, and the linear projection of the time series to zero is expected to provide an indication of the ultimate stages towards an impending slope failure (Fukuzono, 1985). Despite different versions and ad-hoc adaptations developed over the years, the inverse velocity approach is widely used in operational scenarios to infer the time of slope failure and to manage early warning scenarios (Sharifi et al., 2024). Our results show that the inverse velocity values retrieved from PO applied to the ICEYE images and the GB-SAR time series converge comparably towards the failure occurred on Jun-15, 2015. This suggests that the increase in spatial and temporal resolution of space borne SAR datasets can provide new solutions for continuous monitoring when in-situ datasets are not available, and potentially be used in operational early warning scenarios to forecast time-of-failure.

4 Post-event: slope failure documentation and volume estimation.

Optical and radar images are often used in the events aftermath to document and characterize the slope failure in terms of area and assets affected by the failed materials and to study the runout dynamics (Guzzetti et al., 2012).

Deleted: .

Deleted: The least square approach (red triangles in Fig. 2b) considers the PO velocities of

Deleted: when the difference in viewing angle is lower than 1.5 degrees, which was found to be optimal to avoid excess noise

Deleted: due to changes of the SAR scene, thus not associated to real displacements. The least-square solution has been obtained by applying Singular Value Decomposition (SVD, (Golub and Reinsch, 1971)). The method used here is to some extent similar to what applied by

Deleted: where the system of equations for the PO time series was built

Deleted: constraining the spatial baselines of SAR

Deleted: to decrease the impact of system noise. The

Deleted: green line in Fig. 2b); however, this time series can be generated only if all the acquisitions until the failure occurrence are available, thus suitable for back analysis purposes but

Deleted: ideal in an operational scenario of progressive acceleration. Thus, we generated time series using two additional methods: (i) sequential, i.e., we computed the PO velocities related to the first available subsequent image, thus without constraints on the view angles (Fig. 2b, blue circles) and (ii) selected

Deleted: i.e. using sequentially only pairs with similar view angles (within 1.5 degrees range as used for the least-square approach, see Fig 2b, black diamonds). Also in these cases, the results follow well the evolution of the velocities reported with GB-SAR, albeit with more variability compared with the least-square results.

Moved (insertion) [4]

Moved up [2]: Figure 2: (a) Selected results showing the 2D surface velocities over Brienz measured with pixel-offset (PO) applied to the ICEYE data. Note that the colour scale is logarithmic to show the extreme differences in velocities occurred within few days a factor six larger compared to the one showed in (a).

Moved up [3]: GB-SAR.

Moved up [4]: 4 Post-event: slope failure documentation and volume estimation.

Deleted: ... [2]

Deleted: (b) Time series of maximum surface velocities recorded with PO vs. velocities recorded with

Deleted: (c) Inverse velocity plot to show failure forecasting potential of ICEYE PO results vs. GB-SAR. ... [3]

Deleted: of landslide events

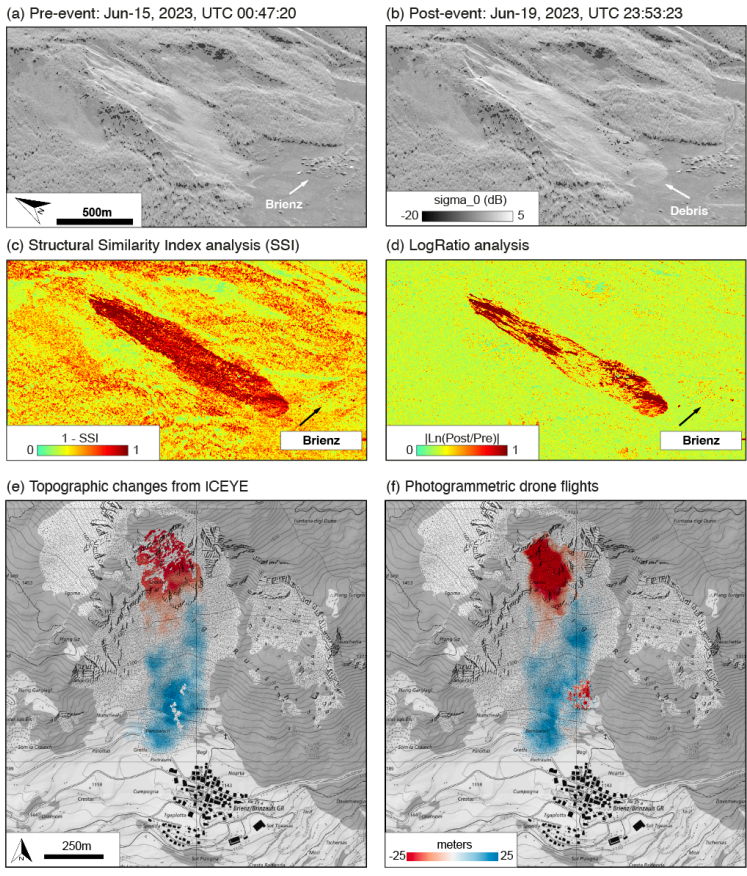


Figure 3: Comparison between (a) pre- and (b) post- event ICEYE images acquired over Brienz. (c) and (d) show the results of analytical change detection attempts with SSI and log-ratio methods, respectively. Comparison between (e) ICEYE interferometry and (f) DSM-of-Difference (DoD) generated from photogrammetric drone flights. Note that the negative height difference in (f) in the lower part above the village are trees cut down by the landslides.

Moved (insertion) [5]

320

325

In Fig. 3a and 3b, we show pre- and post-event ICEYE Spot images, **backscattering, which already allow** to visually identify areas affected by changes (erosion and deposition) as well as assets invaded by the debris materials (i.e., the cantonal road connecting Brienz to the village of Lantsch/Lenz, see Fig. 1).

Change detection computation, such as for example the Structural Similarity Index (SSI (Wang et al., 2004)) or the log-ratio (Mondini, 2017) applied to the **backscattering** (shown Fig. 3c and 3d, respectively) can be used efficiently to map landslide boundaries and highlight important features associated to the failure dynamic, by benefitting of the high spatial resolution. However, change detection provides only a 2-dimensional view of the event characteristics. To estimate the volume of the failed material, photogrammetric approaches based on space- or airborne optical imagery, as well as terrestrial and airborne LiDAR, are generally used, **due to their flexibility and high-resolution results on the reconstruction of surface topography**.

Spaceborne SAR can be also used for identification of topographic changes, provided that SAR scenes are acquired with the same orbit and view angles, and that perpendicular baselines (i.e., orbit separation) between images acquired before and after the event remain within critical values for the determination of heights with interferometry (Bürgmann et al., 2000). Among the dataset we considered, two ICEYE images acquired after the Jun-15 event in Brienz (i.e. on Jun-18 and Jun-22, 2023, ascending orbit, right look) have same view angle and a spatial baseline of 931m resulting in a height of ambiguity of 7.6m.

The differences between the topography before the failure event and the digital surface models obtained with radar interferometry (InSAR) are shown in Fig.4a. For validation, we compare the InSAR results with a DEM-of-Differences (DoD) obtained after photogrammetric drone flights before (Jun-8, 2023) and right after (Jun-16, 2023) the event (Fig. 4b). The georeferencing accuracy achieved with Post Processing Kinematic (PPK) is in the range of 0.1 m. The spatial distribution of the negative (erosion) and positive changes (deposition) due to the slope failure are well comparable. **The 95-percentile of the height differences between InSAR and photogrammetric measurements is in the order of 16 meters, with local peaks up to 50 meters. This leads to** the estimated negative volumes from InSAR are -0.79 Mm^3 vs. -1.24 Mm^3 from photogrammetry, i.e. a difference of about 40%. **Deviations** in the source area are most likely due to phase unwrapping errors (procedure to convert the phase differences retrieved with InSAR into metric scale), associated to the presence of steep slopes and decorrelation due to large phase gradients. Another source of inaccuracy is atmospheric disturbance, as well as surface changes (minor slope failures) that occurred in the upper ranges of the slope after the main event. On the other end, deposited volumes from InSAR are $+1.18 \text{ Mm}^3$, very similar to the $+1.28 \text{ Mm}^3$ estimated from photogrammetry, only 10% difference.

5 Conclusions and Outlook

Reliable warning systems with high temporal and spatial resolution are the key to prevent life and asset loss caused by slope failure. In Brienz, an exceptional in-situ network allowed to recognize in due time the evolution towards a potential catastrophic failure, supporting the decision of local authorities to evacuate the population and restricting access to areas and infrastructures at risk. However, such an extensive monitoring system is not replicable in all mountain areas where it would be needed, mainly due to logistic/access reasoning and/or financial matters. Satellite data, available in all weather conditions with sub-metric spatial resolutions and sub-daily revisit, can be a viable alternative to manage slope instability operational scenarios. As

Deleted: SPOT HIGH

Deleted: , allowing

Deleted: Methods for change

Deleted: analyses

Deleted: SAR

Deleted: of the herein used SAR images (Mondini et al., 2021).

Deleted: , as they provide great

Deleted: ¶


Deleted: The differences between the topography before the failure event (swissSURFACE3D, 2024)

Deleted: However,


Moved up [5]: Figure 3: Comparison between (a) pre- and (b) post-event ICEYE images acquired over Brienz. (c) and (d) show the results of analytical change detection attempts with SSI and log-ratio methods, respectively.

Deleted: ¶


(a) Pre-event: Jun-15, 2023, UTC 00:47:20

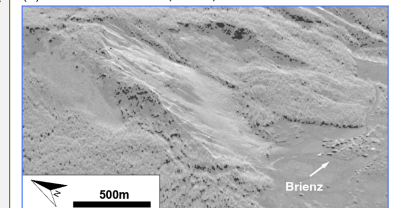


(b) Po



(c) Structural Similarity Index analysis (SSI)

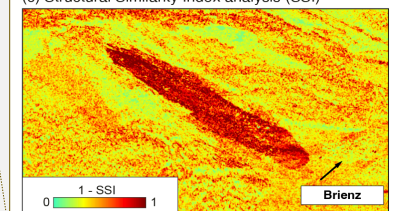

(d) Lo




Deleted: ¶

¶
These deviations

Deleted: ¶

380 demonstrated in this work, the results obtained from high resolution SAR images are well comparable with the ground-based
monitoring data and could be used also for near-real-time forecasting of time-of-failure with similar outcomes. In addition, the
increase in spatial and temporal resolution allows for prompt and accurate post-event mapping of the slope failure and could
support the determination of event magnitudes (volumes) via InSAR. Intrinsic limitations due to the combination of satellite
viewing geometries and slope orientation might still hinder the use of such an approach at high elevations. Moreover, in some
385 cases the unavailability of recent, high resolution topographic models might affect the accuracy of geocoding and decrease the
quality of the results. Despite [that](#), we have shown that the very high spatial resolution allows working efficiently also in SAR
coordinates, as the targets of interest and changes can be clearly identified. Our results provide a step forward towards the use
of satellite SAR imagery for operational scenarios, bringing new insights on the use of satellite SAR to monitor and potentially
forecast imminent slope failure in operational early warning scenarios. Accurate information provided timely by SAR satellites
390 day and night and in all-weather can be used in data-driven forecast methods as the inverse velocity approach shown here, as
well as for the calibration of more sophisticated numerical models aimed at the evaluation of slope stability and/or to simulate
runout scenarios (Bartelt et al., 2018; Gaume et al., 2024).

Appendix

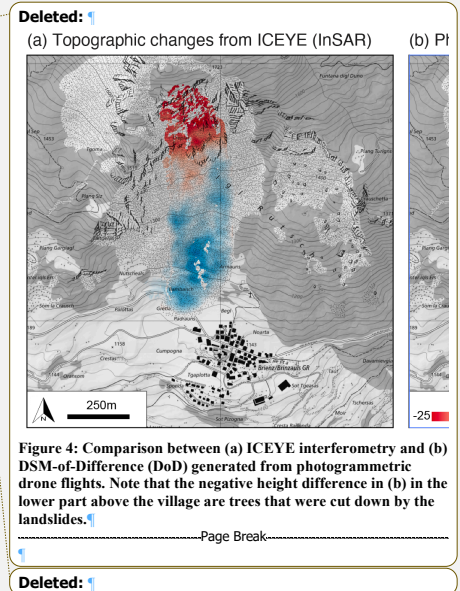

ID	Date & Time (UTC)	Time difference (days)	Inc. angle (degrees)
1	2023.05.22 00:50:15	-	29.70
2	2023.05.23 20:12:39	1.8	34.05
3	2023.05.24 20:14:12	1.0	31.70
4	2023.05.28 00:50:34	3.19	29.90
5	2023.06.01 00:47:47	3.99	31.70
6	2023.06.03 00:50:12	2.0	31.17
7	2023.06.03 01:12:45	0.01	19.90
8	2023.06.06 19:51:52	3.77	24.70
9	2023.06.07 00:51:21	0.2	26.12
10	2023.06.07 01:06:24	0.01	36.70
11	2023.06.11 01:11:01	4.0	29.65
12	2023.06.11 19:53:55	0.77	20.50
13	2023.06.13 00:54:14	1.2	21.45
14	2023.06.14 01:03:47	1.0	37.20
15*	2023.06.15 00:47:20	0.98	37.10
16	2023.06.15 01:15:19	0.02	22.27
17	2023.06.16 19:55:26	1.77	17.23
18**	2023.06.18 22:55:43	2.12	43.5
19*	2023.06.19 23:53:23	1.04	35.37
20**	2023.06.22 22:13:03	2.93	43.5

Formatted: Font: 8 pt

Formatted: Font: 8 pt

Formatted: Font: 8 pt

Formatted: Font: 8 pt

Formatted: Font: 8 pt

Formatted: Font: 8 pt

Formatted: Font: 8 pt

Formatted: Font: 8 pt

Formatted: Font: 8 pt

Formatted: Font: 8 pt

Formatted: Font: 8 pt

Formatted: Font: 8 pt

Formatted: Font: 8 pt

Formatted: Font: 8 pt

Formatted: Font: 8 pt

Formatted: Font: 8 pt

Formatted: Font: 8 pt

Formatted: Font: 8 pt

Formatted: Font: 8 pt

Formatted: Font: 8 pt

Formatted: Font: 8 pt

Deleted: high

Table A1: List of ICEYE imagery (mode SPOT, Ascending orbit, left looking sensor, **VV polarization**), date and time of acquisition (format yyyy.mm.dd HH:MM:SS), relative temporal baselines (in days), and incidence angles. *Images used for detecting change between pre- and post- slope failure, selected due to similarity in incidence angle (see Fig. 3). **Images used for the estimation of topographic changes with radar interferometry (see Fig. 4).

405

410

PO Time series method	Min residual (m)	Max residual (m)	RMSE (m)
Sequential*	-0.34	0.11	0.06
Sequential	-2.76	0.11	0.31
Selected	-0.68	0.34	0.085
Least square	-0.47	1.10	0.10

415 **Table A2: Summary table of the differences between the surface velocity time series measured before Brienz failure with GB-SAR and the PO timeseries obtained from ICEYE. Residuals are computed by resampling the GB-SAR time series on the time vector of the specific PO time series. Negative sign in the residual means PO overestimates GB-SAR velocities. Sequential* is referred to as the results without considering the last sample, which is a clear outlier caused by major difference in incidence angles in the last pair.**

Data and software availability

420 The raw ICEYE Spot images used in this study can be downloaded from the ICEYE [archive \(https://www.iceye.com/lp/iceye-18000-public-archive\)](https://www.iceye.com/lp/iceye-18000-public-archive). The GAMMA software used for the processing of the SAR images is available at <https://www.gamma-rs.ch/software>. The PO algorithm used in this work is available at https://github.com/bickelmps/DIC_FFT_ETHZ. [The digital height models for pre-failure were retrieved from the https://www.swisstopo.admin.ch/en/height-model-swissurface3d](https://www.swisstopo.admin.ch/en/height-model-swissurface3d).

Deleted: public archive (link will be included in the published version of the article).

Author Contributions

425 AM conceived the study, processed the ICEYE imagery to generate the PO time series and the change detection analyses, produced the graphics, and wrote the manuscript. YB and AS acquired and processed the photogrammetric drone imagery to compute the volumetric changes shown in Figure 4 and revised the manuscript. JG provided funding resources for the acquisition of the ICEYE images and revised the manuscript. VT and QZ supported the acquisition of the ICEYE images, derived the InSAR results and revised the manuscript.

430 Competing interests

At least one of the (co-)authors is a member of the editorial board of Natural Hazards and Earth System Sciences.

Formatted: Font: Times New Roman, 10 pt

Formatted: Font: 10 pt

Disclaimer

(will be included in the published version of the article)

Formatted: Highlight

Acknowledgements

435 We thank Melanie Rankl and Michael Wollersheim from ICEYE Oy for supporting the data acquisition and [for fruitful discussions on the results. Two anonymous reviewers provided insightful comments that helped improving the manuscript.](#)

Deleted: .

References

Imaging modes | SAR data | ICEYE: <https://www.iceye.com/sar-data/imaging-modes>, last access: 3 April 2024.

swissSURFACE3D: <https://www.swisstopo.admin.ch/en/height-model-swissurface3d>, last access: 3 April 2024.

Bartelt, P., Christen, M., Bühler, Y., and Buser, O.: Thermomechanical modelling of rock avalanches with debris, ice and snow entrainment, in: Numerical Methods in Geotechnical Engineering IX, Volume 2, CRC Press, 2018.

- 445 Bianchini, S., Solari, L., Bertolo, D., Thuegaz, P., and Catani, F.: Integration of Satellite Interferometric Data in Civil Protection Strategies for Landslide Studies at a Regional Scale, *Remote Sensing*, 13, 1881, <https://doi.org/10.3390/rs13101881>, 2021.

Bickel, V. T., Manconi, A., and Amann, F.: Quantitative Assessment of Digital Image Correlation Methods to Detect and Monitor Surface Displacements of Large Slope Instabilities, *Remote Sensing*, 10, 865, <https://doi.org/10.3390/rs10060865>, 2018.

Bürgmann, R., Rosen, P. A., and Fielding, E. J.: Synthetic aperture radar interferometry to measure Earth's surface topography and its deformation, *Annual Review of Earth and Planetary Sciences*, 28, 169–209, 2000.

- Casu, F., Manconi, A., Pepe, A., and Lanari, R.: Deformation Time-Series Generation in Areas Characterized by Large Displacement Dynamics: The SAR Amplitude Pixel-Offset SBAS Technique, *IEEE Transactions on Geoscience and Remote Sensing*, 49, 2752–2763, <https://doi.org/10.1109/TGRS.2010.2104325>, 2011.

Dematteis, N. and Giordan, D.: Comparison of Digital Image Correlation Methods and the Impact of Noise in Geoscience Applications, *Remote Sensing*, 13, 327, <https://doi.org/10.3390/rs13020327>, 2021.

Figli, D., Thöny, R., Breitenmoser, T., Brunold, F., and Schwestermann, T.: Rutschung Brienz/Brinzauls (GR): Geologisch-kinematisches und hydrogeologisches Modell, 27/2, 1–34, 2022.

- 460 Fukuzono, T.: A New Method for Predicting the Failure Time of a Slope, Proc. IVth International Conference and Field Workshop on Landslides, Tokyo, 1985.

Gaume, J., Kenner, R., Bühler, Y., Stoffel, A., Vicari, H., Kyburz, M., Cicoira, A., and Blatny, L.: Blind prediction of the Brienz rock avalanche runout using a 3D Material Point Method., *Intrpraevent, Proceedings of*, 2024.

- 465 Guzzetti, F., Mondini, A. C., Cardinali, M., Fiorucci, F., Santangelo, M., and Chang, K.-T.: Landslide inventory maps: New tools for an old problem, *Earth-Science Reviews*, 112, 42–66, <https://doi.org/10.1016/j.earscirev.2012.02.001>, 2012.

Manconi, A.: How phase aliasing limits systematic space-borne DInSAR monitoring and failure forecast of alpine landslides, *Engineering Geology*, 287, 106094, <https://doi.org/10.1016/j.enggeo.2021.106094>, 2021.

Mondini, A. C.: Measures of Spatial Autocorrelation Changes in Multitemporal SAR Images for Event Landslides Detection, *Remote Sensing*, 9, 554, <https://doi.org/10.3390/rs9060554>, 2017.

- 470 Sharifi, S., Macciotta, R., and Hendry, M. T.: Critical assessment of landslide failure forecasting methods with case histories: a comparative study of INV, MINV, SLO, and VOA, *Landslides*, <https://doi.org/10.1007/s10346-024-02237-5>, 2024.

Sigmundsson, F., Parks, M., Geirsson, H., Hooper, A., Drouin, V., Vogfjörð, K. S., Ófeigsson, B. G., Greiner, S. H. M., Yang, Y., Lanzi, C., De Pascale, G. P., Jónsdóttir, K., Hreinsdóttir, S., Tolpekin, V., Friðriksdóttir, H. M., Einarsson, P., and Barsotti, S.: Fracturing and tectonic stress drive ultrarapid magma flow into dikes, *Science*, 383, 1228–1235, <https://doi.org/10.1126/science.adn2838>, 2024.

Deleted: Ban, Y., Zhang, P., Nascetti, A., Bevington, A. R., and Wulder, M. A.: Near Real-Time Wildfire Progression Monitoring with Sentinel-1 SAR Time Series and Deep Learning, *Scientific Reports*, 10, <https://doi.org/10.1038/s41598-019-56967-x>, 2020. [4](#)
Barra, A., Solari, L., Béjar-Pizarro, M., Monserrat, O., Bianchini, S., Herrera, G., Crossetto, M., Sarro, R., González-Alonso, E., Mateos, R. M., Ligüerzana, S., López, C., and Moretti, S.: A Methodology to Detect and Update Active Deformation Areas Based on Sentinel-1 SAR Images, *Remote Sensing*, 9, 1002, <https://doi.org/10.3390/rs9101002>, 2017. [4](#)

Deleted: Biggs, J., Anantarasirichai, N., Albino, F., Lazecky, M., and Maghsoudi, Y.: Large-scale demonstration of machine learning for the detection of volcanic deformation in Sentinel-1 satellite imagery, *Bull Volcanol*, 84, 100, <https://doi.org/10.1007/s00445-022-01608-x>, 2022. [4](#)

Deleted: Proceedings of the Conference

Deleted: Vienna

Deleted: Golub, G. H. and Reinsch, C.: Singular Value Decomposition and Least Squares Solutions, in: *Handbook for Automatic Computation: Volume II: Linear Algebra*, edited by: Wilkinson, J. H., Reinsch, C., Bauer, F. L., Householder, A. S., Oliver, F. W. J., Rutishauser, H., Samelson, K., and Stiefel, E., Springer, Berlin, Heidelberg, 134–151, https://doi.org/10.1007/978-3-642-86940-2_10, 1971. [4](#)

Deleted: Leinauer, J., Weber, S., Cicoira, A., Beutel, J., and Krautblatter, M.: An approach for prospective forecasting of rock slope failure time, *Commun Earth Environ*, 4, 1–10, <https://doi.org/10.1038/s43247-023-00909-z>, 2023. [4](#)
Leinss, S., Wicki, R., Holenstein, S., Baffelli, S., and Bühler, Y.: Snow avalanche detection and mapping in multitemporal and multiorbital radar images from TerraSAR-X and Sentinel-1, *Natural Hazards and Earth System Sciences*, 20, 1783–1803, <https://doi.org/10.5194/nhess-20-1783-2020>, 2020. [4](#)
Loew, S., Gschwind, S., Gischig, V., Keller-Signer, A., and Valenti, G.: Monitoring and early warning of the 2012 Preonzo catastrophic rock slope failure, *Landslides*, 14, 141–154, <https://doi.org/10.1007/s10346-016-0701-y>, 2017. [4](#)
Łukosz, M. A., Hejmanowski, R., and Witkowski, W. T.: Evaluation of ICEYE Microsatellites Sensor for Surface Motion Detection—Jakobshavn Glacier Case Study, *Energies*, 14, 3424, <https://doi.org/10.3390/en14123424>, 2021. [4](#)

Deleted: Manconi, A., Casu, F., Ardizzone, F., Bonano, M., Cardinali, M., De Luca, C., Gueguen, E., Marchesini, I., Parise, M., Vennari, C., and others: Brief communication: Rapid mapping of event landslides: the 3 December 2013 Montescaglioso landslide (Italy), *Natural Hazards and Earth System Sciences Discussions*, 2, 1465–1479, 2014. [4](#)

Deleted: Mondini, A. C., Guzzetti, F., Chang, K.-T., Monserrat, O., Martha, T. R., and Manconi, A.: Landslide failures detection and mapping using Synthetic Aperture Radar: Past, present and future, *Earth-Science Reviews*, 216, 103574, <https://doi.org/10.1016/j.earscirev.2021.103574>, 2021. [4](#)
Monterroso, F., Bonano, M., Luca, C. D., Lanari, R., Manunta, M., Manzo, M., Onorato, G., Zinno, I., and Casu, F.: A Global Archive of Coseismic DInSAR Products Obtained Through Unsupervised Sentinel-1 Data Processing, *Remote Sensing*, 12, 3189, <https://doi.org/10.3390/rs12193189>, 2020. [4](#)

Petley, D.: Summary of the 15 June 2023 Brienz/Brinzauls rockslide collapse in the Swiss Alps, *The Landslide Blog*, 2023. [4](#)

[Small, D., Rohner, C., Miranda, N., Rüetschi, M., and Schaepman, M. E.: Wide-Area Analysis-Ready Radar Backscatter Composites, IEEE Transactions on Geoscience and Remote Sensing, 60, 1–14, <https://doi.org/10.1109/TGRS.2021.3055562>, 2022.](#)

565 Wang, Z., Bovik, A. C., Sheikh, H. R., and Simoncelli, E. P.: Image quality assessment: from error visibility to structural similarity, IEEE Transactions on Image Processing, 13, 600–612, <https://doi.org/10.1109/TIP.2003.819861>, 2004.

Deleted: Twele, A., Cao, W., Plank, S

Deleted: Martinis, S.: Sentinel-1-based flood mapping: a fully automated processing chain, International Journal of

Deleted: 37, 2990–3004

Deleted: 1080/01431161.2016.1192304, 2016

Deleted: Wangchuk, S., Bolch, T., and Robson, B. A.: Monitoring glacial lake outburst flood susceptibility using Sentinel-1 SAR data, Google Earth Engine, and persistent scatterer interferometry, Remote Sensing of Environment, 271, 112910, <https://doi.org/10.1016/j.rse.2022.112910>, 2022.¶
Wegmüller, U. and Werner, C.: Gamma SAR processor and interferometry software, ESA SP (Print), 1687–1692, 1997.¶