

Forecasting contrail climate forcing for flight planning and air traffic management applications

Zebediah Engberg¹, Roger Teoh², Tristan Abbott¹, Thomas Dean¹, Marc E.J. Stettler², and Marc L. Shapiro¹

5 ¹Breakthrough Energy, 4110 Carillon Point, Kirkland, WA 98033, United States

²Department of Civil and Environmental Engineering, Imperial College London, London, SW7 2AZ, United Kingdom

Correspondence to: Marc Shapiro (marc.shapiro@breakthroughenergy.org)

Abstract. The global annual mean contrail net radiative forcing may exceed that of aviation’s cumulative CO₂ emissions by at least two-fold. As only around 2-3% of all flights are likely responsible for 80% of the global annual contrail energy forcing (EF_{contrail}), re-routing these flights could reduce the formation of strongly warming contrails. Here, we develop a contrail forecasting tool that produces global maps of persistent contrail formation and their associated EF_{contrail}. This is achieved by extending the existing trajectory-based contrail cirrus prediction model (CoCiP), which simulate contrails formed along provided flight paths, to a grid-based approach that initialises an infinitesimal contrail segment at each point in a 4D spatiotemporal grid and tracks them until their end-of-life. Outputs are provided for different aircraft-engine groups and formatted to align with standard weather and turbulence forecasts, facilitating their integration into existing flight planning and air traffic management workflows. We use the grid-based CoCiP to conduct a global contrail simulation for 2019 and compare the spatial trends of strongly warming and cooling contrails with previous studies. Two approaches are proposed for integrating contrail forecasts into flight planning and air traffic management systems: (i) monetising the EF_{contrail} and including it as an additional cost parameter within a flight trajectory optimizer; or (ii) constructing polygons to avoid airspace volumes with strongly-warming contrails. We also demonstrate a probabilistic formulation of the grid-based CoCiP by running it with ensemble meteorology and excluding grid cells with significant uncertainties in the simulated EF_{contrail}. This study establishes a working standard for incorporating contrail mitigation into flight management protocols and demonstrates how forecasting uncertainty can be incorporated to minimize unintended consequences associated with increased CO₂ emissions of avoidance.

1 Introduction

25 Global aviation activity produces significant socio-economic benefits, but also emits CO₂ and non-CO₂ pollutants that impact the environment in the form of climate change and air quality degradation. Lee et al. (2021) estimated that aviation accounted for 3.5% of the global anthropogenic climate forcing in 2018, where the collective effective radiative forcing (ERF) from non-CO₂ components such as contrail cirrus (57.4 [17, 98] mW m⁻² at a 95% confidence interval) and nitrogen oxides (17.5 [0.6, 29] mW m⁻²) could be two times larger than its cumulative CO₂ emitted since the 1940s (34.3 [28, 40] mW m⁻²). Given the significant impact from aviation non-CO₂ emissions, the European Union (EU) Emissions Trading System’s (ETS) Monitoring

Reporting and Verification framework has recently been amended to require flights travelling within Europe to measure their non-CO₂ impacts, including the effects from contrail cirrus, from 2025 onwards (European Commission, 2023).

35 Contrails form behind an aircraft when conditions in the rapidly cooling exhaust plume become supersaturated with respect to water, enabling water vapor to condense on the surface of particles to form droplets that subsequently freeze into ice particles (Kärcher and Yu, 2009; Schumann, 1996). Previous studies have estimated that up to 85% of contrails are short-lived and sublimate within five minutes (Teoh et al., 2024a; Wolf et al., 2023b). The remaining contrails typically persist in ice supersaturated regions (ISSR), where they can evolve into contrail cirrus clusters that become indistinguishable from natural cirrus (Haywood et al., 2009). These persistent contrails exhibit lifetimes that generally follow an exponential distribution with
40 a mean duration of 1–3 h (Caiazzo et al., 2017; Teoh et al., 2024a; Vázquez-Navarro et al., 2015). During daylight hours, persistent contrails can cause a cooling effect by reflecting incoming shortwave (SW) solar radiation back to space. However, they always induce a warming effect by absorbing and re-emitting outgoing longwave (LW) infrared radiation (Meerkötter et al., 1999). Contrail LW and SW instantaneous radiative forcing (RF) varies regionally and influenced by air traffic density, aircraft-engine particle number emissions, background radiation fields, ambient meteorology, and diurnal and seasonal factors
45 (Kärcher, 2018; Schumann and Heymsfield, 2017; Teoh et al., 2022a, 2024a).

While observational tools such as satellite imagery and ground-based cameras have been used for observing contrail formation and evolution (Duda et al., 2019; Mannstein et al., 2010; Rosenow et al., 2023; Schumann et al., 2013b; Vázquez-Navarro et al., 2015), estimates of the cumulative contrail climate forcing over their entire lifecycle are currently only available through
50 simulation-based models. Various physics-based modelling approaches have been employed for this purpose, including: (i) large-eddy simulations (LES) (Lewellen, 2014; Lewellen et al., 2014; Unterstrasser, 2016); (ii) parameterised Lagrangian models such as the Contrail Cirrus Prediction Model (CoCiP) (Schumann, 2012), Contrail Evolution and Radiation Model (CERM) (Caiazzo et al., 2017), and Aircraft Plume Chemistry, Emissions, and Microphysics Model (APCEMM) (Fritz et al., 2020); and (iii) general circulation models (GCMs) which simulate the interaction between contrails and different atmospheric
55 processes, including second-order feedback mechanisms (Bier and Burkhardt, 2022; Chen and Gettelman, 2013; Grewe et al., 2014; Ponater et al., 2021). Specifically, approaches (ii) and (iii) have been applied to investigate the spatiotemporal variations in contrail climate effects and used for flight trajectory optimisation purposes (Frömming et al., 2021; Grewe et al., 2017; Schumann et al., 2011; Teoh et al., 2020b).

60 Recently, Teoh et al. (2024a) used CoCiP to simulate contrails globally for 2019, estimating that around 20% of all flights produced persistent contrails. Among these persistent contrail-forming flights, 70% of them (17% of all flights) had a net warming effect and 10% of them (2.7% of all flights) were responsible for 80% of the global annual contrail energy forcing (EF_{contrail}). The EF_{contrail} represents the cumulative contrail climate forcing over its lifetime, with a positive value indicating more energy entering the Earth system than leaving it. We use the terms “warming/cooling effect” to describe this net energy

65 balance at the top of the atmosphere, while acknowledging that the actual surface temperature change depends on the contrail
efficacy and spatiotemporal factors (Bickel et al., 2019; Ponater et al., 2005, 2021; Schumann and Mayer, 2017). These findings
highlight a potential pathway for aviation to reduce its overall climate forcing by strategically re-routing a small subset of
flights to minimise the formation of strongly warming contrails (Teoh et al., 2020b, a; Wilhelm et al., 2021). While two small-
70 scale operational contrail avoidance trials have been conducted in recent years (American Airlines, 2023; Sausen et al., 2023),
several challenges must be addressed to implement a contrail-minimisation strategy at a larger-scale. These challenges include:
(i) integrating a contrail forecast model into flight planning and management software to account for airspace and operational
constraints; (ii) automating airspace procedures to perform trajectory adjustments, which is necessary to reduce air traffic
controller workload (Molloy et al., 2022; Sausen et al., 2023); (iii) incorporating meteorological and contrail forecast
uncertainties into the decision-making framework for contrail mitigation actions (Agarwal et al., 2022; Gierens et al., 2020;
75 Molloy et al., 2022); and (iv) balancing trade-offs between reducing contrail climate forcing and potential increases in fuel
consumption. Challenges (i) to (iii) could be addressed by providing contrail climate forcing forecasts in a format similar to
turbulence forecasts (Turbli, 2024), thereby facilitating their integration into the operational workflow of existing flight
planning software (Martin Frias et al., 2024).

80 This study aims to extend the existing trajectory-based CoCiP to create a prototype contrail forecasting tool that generates
global maps of persistent contrail formation and their associated climate forcing. We then compare the spatial trends of contrail
climate forcing predicted by this new tool with those from the trajectory-based CoCiP and earlier global contrail simulation
studies. Additionally, we demonstrate how the tool can be applied to flight trajectory optimization and propose strategies to
account for contrail forecast uncertainties arising from weather forecasts and model simplifications.

85 Our contrail forecasting tool uses a Lagrangian model instead of LES and GCMs for two key reasons: (i) it can utilise reanalysis
or forecast meteorological data provided by numerical weather prediction (NWP) models, rather than relying on representative
weather conditions from GCMs (Grewe et al., 2014); and (ii) it can compute the EF_{contrail} efficiently within the time constraints
required for flight planning and operational use. While we expect contrail forecasts to evolve as modelling and observational
90 capabilities improve, we aim to use this prototype to enable stakeholders (e.g., flight planners and air navigation service
providers) to accommodate contrail forecasts in flight planning by establishing standards, data integration and modifications
to software tools and operational processes.

2 Trajectory-based CoCiP

CoCiP simulates the contrail properties and climate forcing for a single flight trajectory using inputs of: (i) flight trajectory
95 waypoints; (ii) fuel properties, such as the water vapour emissions index ($EI_{\text{H}_2\text{O}}$) and lower calorific value (Q_{fuel}); (iii) aircraft
properties and performance parameters, including the true airspeed (V_{TAS}), fuel mass flow rate (\dot{m}_f), overall efficiency (η),

aircraft mass (M), and wingspan; (iv) aircraft-engine specific non-volatile particulate matter (nvPM) number emissions index (EI_n); and (v) historical or forecast meteorology provided by NWP models (Schumann, 2012).

100 Briefly, CoCiP utilises the Schmidt-Appleman criterion (SAC) to estimate the threshold temperature for contrail formation (T_{SAC}), where T_{SAC} is influenced by η , EI_{H_2O} , and Q_{fuel} (Schumann, 1996). For waypoints that satisfy the SAC i.e., with ambient temperature (T_{amb}) falling below T_{SAC} , CoCiP simulates the wake vortex downwash using a probabilistic two-phase wake
 105 vortex decay model which parametrically estimates the mean downward displacement and initial contrail width and depth as a function of aircraft mass, wingspan, and V_{TAS} (Holzapfel, 2003). Persistent contrail segments are defined when the post-wake vortex contrail ice water content (IWC) in two consecutive waypoints is greater than 10^{-12} kg kg $^{-1}$. For each contrail segment, the contrail ice crystal number per flight distance flown ($n_{ice,initial}$) is initialized by estimating the nvPM particle number emissions per flight distance flown, fraction of nvPM particles that activates to form contrail ice crystals ($f_{activation}$), and fraction of contrail ice crystals that survive the wake-vortex phase (f_{surv}),

$$n_{ice,initial} = nvPM EI_n \times \dot{m}_{f,dist} \times f_{activation} \times f_{surv}, \text{ where} \quad (1)$$

$$110 \quad f_{activation} = -0.661e^{(T_{amb}-T_{SAC})} + 1, \text{ and} \quad (2)$$

$$f_{surv} = \frac{IWC_{initial} - \Delta IWC_{ad}}{IWC_{initial}}. \quad (3)$$

The nvPM number emissions per unit distance is calculated by multiplying the aircraft-engine specific nvPM EI_n with the fuel consumption per distance flown ($\dot{m}_{f,dist}$), $f_{activation}$ is determined by the difference between T_{amb} and T_{SAC} (Bräuer et al., 2021;
 115 Teoh et al., 2022a), and f_{surv} is assumed to be proportional to the change in contrail IWC due to adiabatic heating from the wake vortex downwash (ΔIWC_{ad}) (Schumann, 2012).

For persistent contrail segments, a first order Euler method simulates the evolution of their locations, dimensions, and properties, with model time steps (dt , < 3600 s; 300 s in this study), until their end-of-life, defined as when the contrail segment
 120 age exceeds a maximum lifetime of 12 h, ice particle number per volume of air drops below 10^3 m $^{-3}$, or optical depth ($\tau_{contrail}$) falls below 10^{-6} (Schumann, 2012; Teoh et al., 2024a). A parametric RF model, which is fitted to the libRadtran radiative transfer package (Mayer and Kylling, 2005), is used to estimate the local contrail SW and LW RF (RF', the change in radiative flux over the contrail coverage area) at each time step (Schumann et al., 2012a). These RF' estimates indirectly account for natural cirrus above and below the contrail through input meteorology parameters including the reflected solar radiation (RSR),
 125 outgoing longwave radiation (OLR), and the overlying natural cirrus optical depth (τ_{cirrus}) (Schumann et al., 2012a). Additionally, recent CoCiP studies have also formulated an approach to approximate the change in contrail RF' due to contrail-contrail overlapping (Schumann et al., 2021; Teoh et al., 2024a).

The EF_{contrail} is estimated by integrating the contrail net RF' over its contrail segment length (L), width (W), and lifetime (t_{max}) (Schumann et al., 2011),

$$EF_{\text{contrail}} [J] = \int_0^{t_{\text{max}}} RF'_{\text{net}}(t) \times L(t) \times W(t) dt. \quad (4)$$

We note that the EF_{contrail} is sensitive to several factors, including the: (i) contrail RF' estimates from the fitted parametric RF model; (ii) humidity fields from the NWP model, which affect the contrail t_{max} and coverage area (L and W); and (iii) contrail segment angle (α), which is the angle between the contrail segment and the longitudinal axis. For (iii), α influences the magnitude of wind shear acting perpendicular to the contrail segment ($\frac{dS_n}{dz}$) (Schumann, 2012),

$$\frac{dS_n}{dz} = \frac{dV}{dz} \cos(\alpha) - \frac{dU}{dz} \sin(\alpha), \quad (5)$$

where $\frac{dV}{dz}$ and $\frac{dU}{dz}$ represent the wind shear acting on the eastward and northward directions respectively. The $\frac{dS_n}{dz}$, in turn, influences the contrail's spreading rate, ice crystal loss rate, and t_{max} . Consequently, contrails with a large EF_{contrail} are generally long-lived with a large coverage area, while short-lived contrails with a large positive net RF' may have a negligible EF_{contrail} (Teoh et al., 2020a).

While previous studies have compared the distribution of simulated contrail properties from CoCiP with in situ measurements, remote sensing, and satellite observations over their lifecycle (Driver et al., 2024; Jeßberger et al., 2013; Low et al., 2024; Schumann et al., 2017, 2021; Schumann and Heymsfield, 2017; Teoh et al., 2024a), further comparisons with observations remain crucial for building greater confidence in and improving the accuracy of CoCiP predictions. For further details on the versioning and evolution of the trajectory-based CoCiP, readers can refer to Appendix A1 and the documentation of the open-source pycontrails repository (Shapiro et al., 2023).

150 **3 Grid-based CoCiP**

The existing implementation of CoCiP described in Section 2, i.e., the trajectory-based CoCiP, simulates contrails formed along a flight path. However, when used to optimize the trajectory of multiple flights, the trajectory-based approach becomes computationally inefficient because of the need for repeated model re-runs across each flight and various trajectory iterations to identify the solution with minimum EF_{contrail} . One way to address this limitation is to produce a 4D field of the EF_{contrail} per flight distance flown, effectively identifying regions forecast to form persistent and/or strongly warming contrails. We achieve this by extending the trajectory-based CoCiP to a grid-based approach, where an infinitesimal contrail segment is: (i) initialized at each point in a 4D spatiotemporal domain; (ii) simulated until its end of life with a dt of 300 s using the equations of the trajectory-based CoCiP; and (iii) has its cumulative climate forcing attributed back to the grid cell where it originally formed, with the model outputs taking the same form as traditional 4D NWP data. For (ii), Appendix A2 evaluates the sensitivity of dt

160 on the simulated EF_{contrail} and provides the rationale for selecting a dt of 300 s for the grid-based CoCiP. Additionally, we note that the grid-based CoCiP defines regions with strongly warming contrails based on the 80th percentile ($5 \times 10^8 \text{ J m}^{-1}$) and the 95th percentile ($1.5 \times 10^9 \text{ J m}^{-1}$) of EF_{contrail} per flight distance flown, both of which were derived from a 2019 global contrail simulation using the trajectory-based CoCiP (Teoh et al., 2024a).

165 **Table 1: Summary of the key differences between the trajectory-based and grid-based CoCiP.**

	Trajectory-based CoCiP	Grid-based CoCiP
Flight segments	Flight segments are initialized based on the flight trajectory, which is provided as a sequence of flight waypoints.	An infinitesimal flight segment is initialized at each point in a 4D spatiotemporal grid (longitude, latitude, altitude, and time).
Aircraft-engine performance and emissions	<ul style="list-style-type: none"> Requires the specification of aircraft and engine type for each flight, Aircraft performance at each waypoint is estimated using aircraft performance models based on information about entire flight trajectories, The nvPM EI_n at each waypoint is estimated using the nvPM emissions profile provided by the ICAO aircraft engine emissions databank (EDB) and the T_4/T_2 methodology. 	<ul style="list-style-type: none"> The most-commonly used passenger aircraft-engine types are classified based on their similarities in aircraft mass and nvPM EI_n, and the model is run for each aircraft-engine group. For each aircraft-engine group, input parameters for aircraft performance and emissions model are: <ul style="list-style-type: none"> i. Set to parameters for the aircraft-engine type with largest market share in the group (nominal simulation), or ii. Estimated from an empirical multivariate distribution (Monte Carlo simulation, see Fig. 1). Aircraft performance at each waypoint is estimated using a variant of the Poll-Schumann (PS) model that can be run for a single point rather than entire flight trajectories, and nvPM EI_n is estimated using the same methodology as trajectory-based CoCiP.
Contrail initialisation	The initial contrail properties (i.e., contrail dimensions, ice crystal number, and contrail segment angle) depends on the provided aircraft-engine properties, performance, and emissions.	The initial contrail dimensions and ice crystal number is initialized using the equations from the trajectory-based CoCiP. However, the contrail segment angle is undefined in the grid-based CoCiP and is either: <ul style="list-style-type: none"> i. Treated as a calibrated parameter that maximises the agreement between the trajectory-based and grid-based CoCiP (nominal simulation), or ii. Assumed to be uniformly distributed between 0 and 360° (Monte Carlo simulation).
Model outputs	Cumulative EF_{contrail} over the contrail segment lifetime, attributed back to the flight segment where the contrails were first formed.	4D EF_{contrail} per flight distance, cumulated over the contrail segment lifetime and attributed back to the original grid cell.
Relevant applications	<ul style="list-style-type: none"> Estimating the EF_{contrail} from the provided flight trajectories. Calculating historical estimates of the global/regional annual mean contrail net RF. Performing flight trajectory optimisation for single/multiple flights to minimise persistent contrail formation/EF_{contrail}. 	<ul style="list-style-type: none"> Generating maps to identify regions forecast to form persistent warming and cooling contrails. Improving computational efficiency in flight trajectory optimisation for a fleet of aircraft compared to the trajectory-based CoCiP.

Table 1 presents the differences between the trajectory and grid-based CoCiP. The primary distinction lies in how the contrail segment properties are initialized. Here, we describe our methodology to initialize the contrail segment properties in the grid-based CoCiP (Section 3.1) the meteorological datasets used in this study (Section 3.2), and outline key differences in the grid-based CoCiP when it is configured to run with a nominal (Section 3.3) and a Monte Carlo simulation (Section 3.4).

3.1 Initial contrail properties

In the trajectory-based CoCiP, contrail segment properties are initialized based on the flight segment (α and V_{TAS}) and aircraft-engine specific properties (wingspan, M , \dot{m}_f , η , and nvPM EI_n). However, this approach cannot be directly applied to the grid-based CoCiP because of the need to: (i) model aircraft performance (V_{TAS} , \dot{m}_f , M , η , and nvPM EI_n) locally, rather than based on entire flight trajectories; and (ii) determine an appropriate value for α , which influences the wind shear acting on the contrail segment, c.f. Eq. (5), without prior information about direction-of-travel.

Table 2: Classification of commonly used passenger aircraft-engine types into 12 unique groups based on their similarities in aircraft mass and nvPM EI_n . The aircraft types listed here are labelled based on their ICAO aircraft type designator.

Aircraft-engine classification	nvPM EI_n		
	Low	Nominal	High
Light	• A19N (LEAP-1A)	• A319 (CFM56)	• A19N (Pratt & Whitney)
	• A20N (LEAP-1A)*	• A320 (CFM56)	• A20N (Pratt & Whitney)
	• A21N (LEAP-1A)	• A321 (CFM56)	• A21N (Pratt & Whitney)
	• B38M (LEAP-1B)	• B737 (CFM56)	• A319 (IAE V2500)
Intermediate	N/A	• B738 (CFM56)*	• A320 (IAE V2500)*
		• B739 (CFM56)	• A321 (IAE V2500)
		• B752 (RB211)	N/A
		• B753 (RB211)	
		• B762 (CF6-80E)	
Medium	• B788 (GEnx)	• A342 (CFM56/Trent500)	• A332 (Trent 700/CF6-80E)
	• B789 (GEnx)*	• A343 (CFM56/Trent500)	• A333 (Trent 700/CF6-80E)*
	• B78X (GEnx)	• A345 (CFM56/Trent500)	
		• A346 (CFM56/Trent500)	
		• B788 (Trent 1000)	
		• B789 (Trent 1000)*	
		• B78X (Trent 1000)	
Heavy	• B772 (GE90)	• A359 (Trent XWB)*	
	• B773 (GE90)	• A35K (Trent XWB)	
	• B77L (GE90)		N/A
	• B77W (GE90)*		
Super heavy	• B748 (GEnx)*	• A388 (Trent 900)*	• B742 (CF6-80C)
			• B743 (CF6-80C)
			• B744 (CF6-80C)*

*: Refers to the aircraft-engine type with the largest market share within the group, based on the 2019 GAIA dataset (Teoh et al., 2024b).

Table 3: Summary of the aircraft properties (wingspan, service ceiling altitude, and maximum Mach number) and range of aircraft performance and emissions parameters (aircraft mass, η , and nvPM EI_n) for the 12 aircraft-engine groups. Details of the aircraft-engine types that are included in each group can be found in Table 2. Differences in aircraft mass and nvPM EI_n among the 12 aircraft-engine groups are visualised in Fig. A5.

Aircraft-engine properties and performance parameters		nvPM EI _n		
		Low	Nominal	High
Aircraft mass	Light	<ul style="list-style-type: none"> • Mass: 55,000 – 80,000 kg • nvPM EI_n: 1×10^{11} kg⁻¹ • η: 0.20 – 0.26 • Wingspan: 34 – 36 m • Max altitude: 41,000 ft. • Max Mach: 0.82 • 2019 global market share <ul style="list-style-type: none"> ○ No. of flights: 1.8% ○ Dist. flown: 1.8% 	<ul style="list-style-type: none"> • Mass: 55,000 – 80,000 kg • nvPM EI_n: $(0.8 - 1.0) \times 10^{15}$ kg⁻¹ • η: 0.20 – 0.26 • Wingspan: 34.1 – 34.3 m • Max altitude: 41,000 ft. • Max Mach: 0.82 • 2019 global market share <ul style="list-style-type: none"> ○ No. of flights: 37.1% ○ Dist. flown: 35.2% 	<ul style="list-style-type: none"> • Mass: 55,000 – 80,000 kg • nvPM EI_n: $(2 - 4) \times 10^{15}$ kg⁻¹ • η: 0.20 – 0.26 • Wingspan: 34 – 36 m • Max altitude: 41,000 ft. • Max Mach: 0.82 • 2019 global market share <ul style="list-style-type: none"> ○ No. of flights: 12.6% ○ Dist. flown: 12.5%
	Intermediate	N/A	<ul style="list-style-type: none"> • Mass: 85,000 – 160,000 kg • nvPM EI_n: $(0.6 - 1.2) \times 10^{15}$ kg⁻¹ • η: 0.21 – 0.26 • Wingspan: 38.0 – 47.6 m • Max altitude: 43,100 ft. • Max Mach: 0.86 • 2019 global market share <ul style="list-style-type: none"> ○ No. of flights: 2.4% ○ Dist. flown: 4.1% 	N/A
	Medium	<ul style="list-style-type: none"> • Mass: 165,000 – 240,000 kg • nvPM EI_n: 1×10^{11} kg⁻¹ • η: 0.30 – 0.34 • Wingspan: 60.1 m • Max altitude: 43,100 ft. • Max Mach: 0.90 • 2019 global market share <ul style="list-style-type: none"> ○ No. of flights: 1.0% ○ Dist. flown: 3.6% 	<ul style="list-style-type: none"> • Mass: 165,000 – 250,000 kg • nvPM EI_n: $(4 - 7) \times 10^{14}$ kg⁻¹ • η: 0.29 – 0.33 • Wingspan: 60.1 – 60.3 m • Max altitude: 43,100 ft. • Max Mach: 0.86 – 0.90 • 2019 global market share <ul style="list-style-type: none"> ○ No. of flights: 0.7% ○ Dist. flown: 2.8% 	<ul style="list-style-type: none"> • Mass: 160,000 – 210,000 kg • nvPM EI_n: $(0.7 - 1) \times 10^{15}$ kg⁻¹ • η: 0.25 – 0.28 • Wingspan: 60.3 m • Max altitude: 41,000 ft. • Max Mach: 0.86 • 2019 global market share <ul style="list-style-type: none"> ○ No. of flights: 2.7% ○ Dist. flown: 6.9%
	Heavy	<ul style="list-style-type: none"> • Mass: 200,000 – 320,000 kg • nvPM EI_n: $(3 - 4) \times 10^{14}$ kg⁻¹ • η: 0.28 – 0.30 • Wingspan: 64.8 m • Max altitude: 43,100 ft. • Max Mach: 0.89 • 2019 global market share <ul style="list-style-type: none"> ○ No. of flights: 1.8% ○ Dist. flown: 7.2% 	<ul style="list-style-type: none"> • Mass: 205,000 – 250,000 kg • nvPM EI_n: $(5 - 8) \times 10^{14}$ kg⁻¹ • η: 0.33 – 0.35 • Wingspan: 64.7 m • Max altitude: 43,100 ft. • Max Mach: 0.89 • 2019 global market share <ul style="list-style-type: none"> ○ No. of flights: 0.5% ○ Dist. flown: 2.2% 	N/A
	Super heavy	<ul style="list-style-type: none"> • Mass: 275,000 – 400,000 kg • nvPM EI_n: 1×10^{11} kg⁻¹ • η: 0.32 – 0.34 • Wingspan: 68.4 m • Max altitude: 42,100 ft. • Max Mach: 0.90 • 2019 global market share <ul style="list-style-type: none"> ○ No. of flights: 0.2% ○ Dist. flown: 0.8% 	<ul style="list-style-type: none"> • Mass: 385,000 – 512,000 kg • nvPM EI_n: $(5 - 7) \times 10^{14}$ kg⁻¹ • η: 0.33 – 0.35 • Wingspan: 79.8 m • Max altitude: 43,100 ft. • Max Mach: 0.89 • 2019 global market share <ul style="list-style-type: none"> ○ No. of flights: 0.3% ○ Dist. flown: 1.6% 	<ul style="list-style-type: none"> • Mass: 250,000 – 360,000 kg • nvPM EI_n: $(6 - 8) \times 10^{14}$ kg⁻¹ • η: 0.27 – 0.29 • Wingspan: 64.4 m • Max altitude: 45,000 ft. • Max Mach: 0.92 • 2019 global market share <ul style="list-style-type: none"> ○ No. of flights: 0.5% ○ Dist. flown: 1.7%

Moreover, the grid-based CoCiP must account for variations in aircraft performance across different aircraft and engine types that are known to influence the EF_{contrail} (Teoh et al., 2022a). In theory, this issue could be resolved by re-running the grid-based CoCiP for each aircraft-engine combination. However, this method would lead to increased computational and data transfer requirements, as well as increased operational complexity when used in the context of flight planning and execution.

190 Instead, we address this challenge by classifying the most-commonly used passenger aircraft-engine types into N number of groups based on their similarities in aircraft mass and nvPM EI_n (Tables 2 and 3), thereby introducing a fifth dimension to the model outputs (longitude \times latitude \times altitude \times time $\times N$ aircraft-engine group).

The classification by aircraft mass and nvPM is informed by the strong correlation between the nvPM emissions per flight
195 distance, which is estimated as a product of nvPM EI_n and $\dot{m}_{f,dist}$ (where the aircraft mass is used as a proxy), and the $EF_{contrail}$ per flight distance ($R = 0.71$) (Teoh et al., 2022a). While a higher N is expected to improve the agreement between the trajectory- and grid-based CoCiP, our goal is to identify an acceptable minimum value for N to reduce the computational demands and operational complexity in practice (Section 4). For each group, the waypoint-specific inputs (α , V_{TAS} , wingspan, aircraft mass, \dot{m}_f , η , and nvPM EI_n) vary depending on whether the grid-based CoCiP is configured to run in a nominal mode
200 (Section 3.3) or with a Monte Carlo simulation (Section 3.4).

3.2 Meteorology

In practice, the grid-based CoCiP would utilise forecast meteorological products (e.g. the European Centre for Medium-Range Weather Forecasts (ECMWF) Atmospheric Model high resolution 10-day forecast (ECMWF, 2024) to provide contrail climate forcing forecasts. For this paper, we use historical meteorology, specifically the ECMWF ERA5 High Resolution Realisation
205 (HRES) Reanalysis for the nominal simulation and the ERA5 10-member ensembles for the Monte Carlo simulation (Section 3.4) (Hersbach et al., 2020).


Both datasets share a vertical resolution of 26 model levels, spanning from 6,300 m (20,000 feet) to 15,000 m (49,000 feet), but the ERA5 HRES Reanalysis offers a higher spatiotemporal resolution (0.25° longitude \times 0.25° latitude at a 1 h temporal
210 resolution) than the ERA5 10-member ensembles (0.5° longitude \times 0.5° latitude at a 3 h temporal resolution). The spatiotemporal resolution of the grid-based CoCiP is adjustable and set to align with the ERA5 HRES Reanalysis. For both meteorological products, we apply a correction to ensure that the ERA5 RH_i distribution is consistent with in-situ measurements (refer to Appendix A3 for further details).

3.3 Nominal simulation

215 Each aircraft-engine type is characterised by a set of fixed properties, including the wingspan, design-optimum Mach number, aerodynamic coefficients, and nvPM emissions profile, all of which are required as inputs to aircraft performance and emission models. The Poll-Schumann (PS) aircraft performance model (Poll and Schumann, 2020, 2021) provides the wingspan, design-optimum Mach number, and aerodynamic coefficients, while the ICAO Aircraft Engine Emissions Databank (EASA, 2021) supplies the nvPM EI_n at the four ICAO certification test points representing the engine power settings (i.e., 7%, 30%, 85%,
220 and 100% of the maximum rated engine thrust) used in the landing and take-off (LTO) cycle. For each aircraft-engine group,

which encompasses multiple aircraft-engine types (Table 2), we set these fixed properties to values of the aircraft-engine type with largest market share within the group (Teoh et al., 2024b).

225 The nominal grid-based CoCiP derives the waypoint-specific parameters (e.g., V_{TAS} , M , \dot{m}_f , η , and nvPM EI_n) using two key assumptions and two established models. Firstly, it assumes that the Mach number at each grid cell is equal to the design-optimum Mach number plus 0.04 (Teoh et al., 2024b), reflecting the common practice of airlines in flying faster to minimise time-dependent costs and/or address delays (Edwards et al., 2016; Lovegren and Hansman, 2011). Secondly, it assumes that the aircraft mass at each altitude is equal to the value that maximises η , which is based on the rationale that a lower aircraft mass is required to fly at higher altitudes (Fig. 1). The PS model is used to estimate the \dot{m}_f (Poll and Schumann, 2020, 2021),
 230 while the T_4/T_2 methodology estimates the nvPM EI_n at cruise by interpolating the LTO-based nvPM emissions profile relative to the non-dimensional engine thrust settings (EASA, 2021; Teoh et al., 2024b).

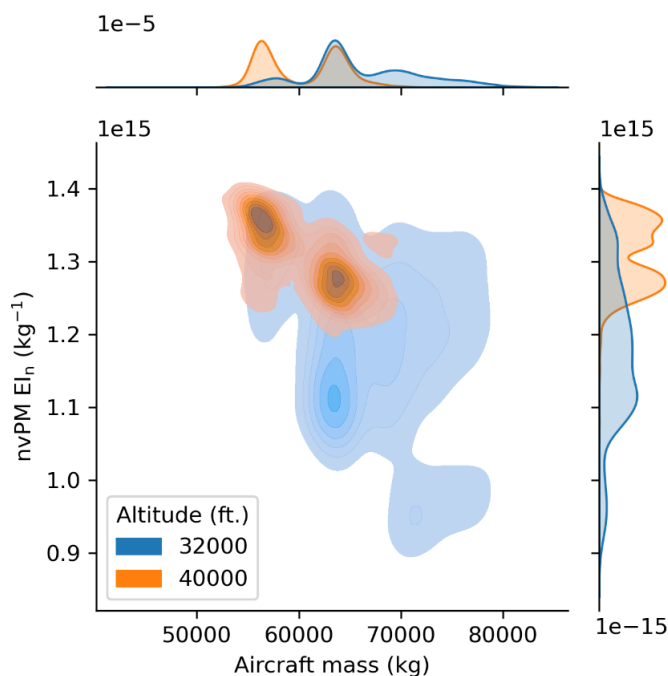

235 **Figure 1: Multivariate distribution of aircraft mass and nvPM EI_n for one aircraft-engine group (light aircraft mass and nominal nvPM EI_n , see Table 2) at 32,000 feet (in blue) and 40,000 feet (in orange). The underlying data is provided by the 2019 global aviation emissions inventory based on ADS-B (GAIA) (Teoh et al., 2024b). The multi-modal distribution of the aircraft mass and nvPM EI_n is due to the inclusion of two comparable aircraft engine families (Boeing 737 and Airbus A320 families) in the same group, each exhibiting distinct operating characteristics. The variations in nvPM EI_n with altitude results from changes in aircraft mass and air density, both of which influence the engine thrust settings and subsequently nvPM emissions (EASA, 2021).**

240 As α cannot be defined for an infinitesimal flight segment, the nominal grid-based CoCiP adopts a workaround by calibrating Eq. (5) as follows,

$$\frac{dS_n}{dz} = f_{\text{shear}} \times \frac{dS}{dz}, \text{ where} \quad (6)$$

$$\frac{dS}{dz} = \sqrt{\left(\frac{dU}{dz}\right)^2 + \left(\frac{dV}{dz}\right)^2}, \quad (7)$$

245 $\frac{dS}{dz}$ is the magnitude of the wind shear and f_{shear} is a free parameter and has physical limits of 0 (i.e., contrail segment aligned with the wind shear) and 1 (i.e., contrail segment perpendicular to shear). We calibrate $f_{\text{shear}} = 0.665$ by minimizing each of the error metrics when evaluating EF_{contrail} from the trajectory- and grid-based CoCiP (described in Section 4).

3.4 Monte Carlo simulation

The grid-based CoCiP can perform Monte Carlo simulations to produce a range of EF_{contrail} estimates for each grid cell. Here, we utilize this capability to demonstrate how uncertainties in contrail forecasts can be integrated into flight planning (Section 250 5.3). We note that the uncertainties in the simulated EF_{contrail} can arise from multiple independent sources, including meteorological inputs provided by NWP models, aircraft performance and emissions estimates, contrail model simplifications, the parametric RF model fitted to the libRadtran radiative transfer package, and potentially other unidentified factors (Low et al., 2024; Platt et al., 2024; Schumann et al., 2021; Teoh et al., 2020b, 2024a). While Platt et al. (2024) evaluates various uncertainty sources affecting EF_{contrail} in an earlier implementation of the grid-based CoCiP, the Monte Carlo simulations in 255 this study focus only on uncertainties related to meteorological inputs and the grid-based model simplifications (i.e., aircraft-engine groups and treatment of α) as a proof of concept. Future updates to the grid-based CoCiP will incorporate additional uncertainty sources to improve the model’s robustness.

We account for multi-collinearity among different aircraft performance parameters (i.e., V_{TAS} , M , \dot{m}_f , η , and nvPM EI_n) by 260 constructing a five-dimensional empirical multivariate distribution for each aircraft-engine group. Figure 1 illustrates an example of the relationship between two (M and nvPM EI_n) of these five variables. These distributions are derived using flight waypoints during the cruise phase of flight (i.e., above 25,000 feet and zero vertical climb rate) from the 2019 Global Aviation emissions Inventory based on ADS-B (GAIA) (Teoh et al., 2024b). Our Monte Carlo approach consists of 100 global simulations, where each of the ERA5 10-member ensembles is fixed for 10 consecutive simulation runs. Within each set of 10 265 simulation runs, the aircraft performance parameters (i.e., V_{TAS} , M , \dot{m}_f , η , and nvPM EI_n) at different altitudes are sampled from the five-dimensional empirical multivariate distribution and α is sampled from a uniform distribution that ranges between 0° and 360° . This setup results in 10 ensemble members capturing the meteorological uncertainties, and multiplied by 10 independent simulations capturing the variabilities in aircraft performance and α . We use these outputs to quantify the probabilities of forming persistent warming and cooling contrails for each grid cell.


270 4 Comparing trajectory vs. grid-based CoCiP

Here, we use both the trajectory-based and nominal grid-based CoCiP to simulate the EF_{contrail} from historical flight trajectories provided by GAIA (Teoh et al., 2024b). We evaluate the agreement between both models and explore the trade-off between the model agreement and model simplification, i.e., formulating the grid-based CoCiP with a smaller number of aircraft-engine groups (N) as discussed in Section 3.1. To achieve this, we classify the most-commonly used passenger aircraft-engine types
275 into groups of between 1 (no differentiation between aircraft-engine types) and 12 based on their aircraft mass and nvPM EI_n (see Tables 2 and 3, and Appendix A4). We then filter the GAIA dataset to only include the 43 aircraft-engine types covered in Table 2 and randomly sample one day per week throughout the entire year of 2019. We extract flight waypoint data within each day and simulate the EF_{contrail} using both the trajectory-based ($EF_{\text{contrail}}^{\text{traj}}$) and grid-based CoCiP ($EF_{\text{contrail}}^{\text{grid}}$).

280 Our goal in this analysis is not to validate grid-based CoCiP in an absolute sense, but to demonstrate that the grid-based CoCiP can provide sufficiently accurate representations of the trajectory-based CoCiP. We recognize the critical importance of validating both CoCiP variants against independent observations, which is an active area of ongoing research.

4.1 Metrics

The agreement between $EF_{\text{contrail}}^{\text{traj}}$ and $EF_{\text{contrail}}^{\text{grid}}$ is assessed using five distinct approaches. Together, these approaches are
285 aimed at quantifying both the point-wise errors and fleet-aggregated errors. We note that these metrics are predominantly biased towards evaluating the model's ability to correctly predict strongly warming contrails rather than all contrails, consistent with existing proposals that aim to target the 2-3% of flights that are responsible for 80% of the global annual EF_{contrail} (Teoh et al., 2020b, a, 2024a; Wilhelm et al., 2021).

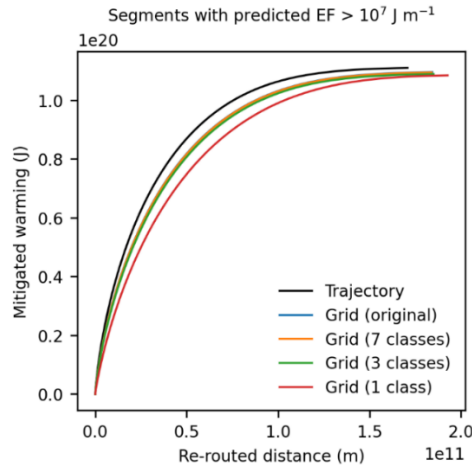

290 **Figure 2: Performance curves for the trajectory-based CoCiP (black line) and the grid-based CoCiP when it is configured using the exact/original aircraft-engine types (i.e., the same as the trajectory-based CoCiP; blue line), and with $N=7$ (orange line), $N=3$ (green line), and $N=1$ (red line) aircraft-engine groups respectively. Further methodological information used to construct these performance curves can be found in Appendix A5.**

Point-wise errors are quantified using three metrics including the false negative rate i.e. $P\left[\left(\text{EF}_{\text{contrail}}^{\text{grid}} < \text{EF}_{\text{threshold}}\right) \mid \left(\text{EF}_{\text{contrail}}^{\text{traj}} > \text{EF}_{\text{threshold}}\right)\right]$, the false alarm rate $P\left[\left(\text{EF}_{\text{contrail}}^{\text{traj}} < \text{EF}_{\text{threshold}}\right) \mid \left(\text{EF}_{\text{contrail}}^{\text{grid}} > \text{EF}_{\text{threshold}}\right)\right]$, and the modified mean absolute log error (modified-MALE). The false negative and false alarm rates serve to evaluate the accuracy of the grid-based CoCiP in identifying the location of moderately and strongly warming contrails, which are assumed to be those with an $\text{EF}_{\text{threshold}}$ of $1 \times 10^7 \text{ J m}^{-1}$ (around the 50th percentile) and $5 \times 10^8 \text{ J m}^{-1}$ (80th percentile) respectively (Teoh et al., 2024a). In addition, the modified-MALE measures the average relative error between $\text{EF}_{\text{contrail}}^{\text{traj}}$ and $\text{EF}_{\text{contrail}}^{\text{grid}}$ at each flight segment, while minimising the impact of prediction errors in segments with a weak contrail climate forcing (i.e., $\text{EF}_{\text{contrail}} < 10^7 \text{ J m}^{-1}$).

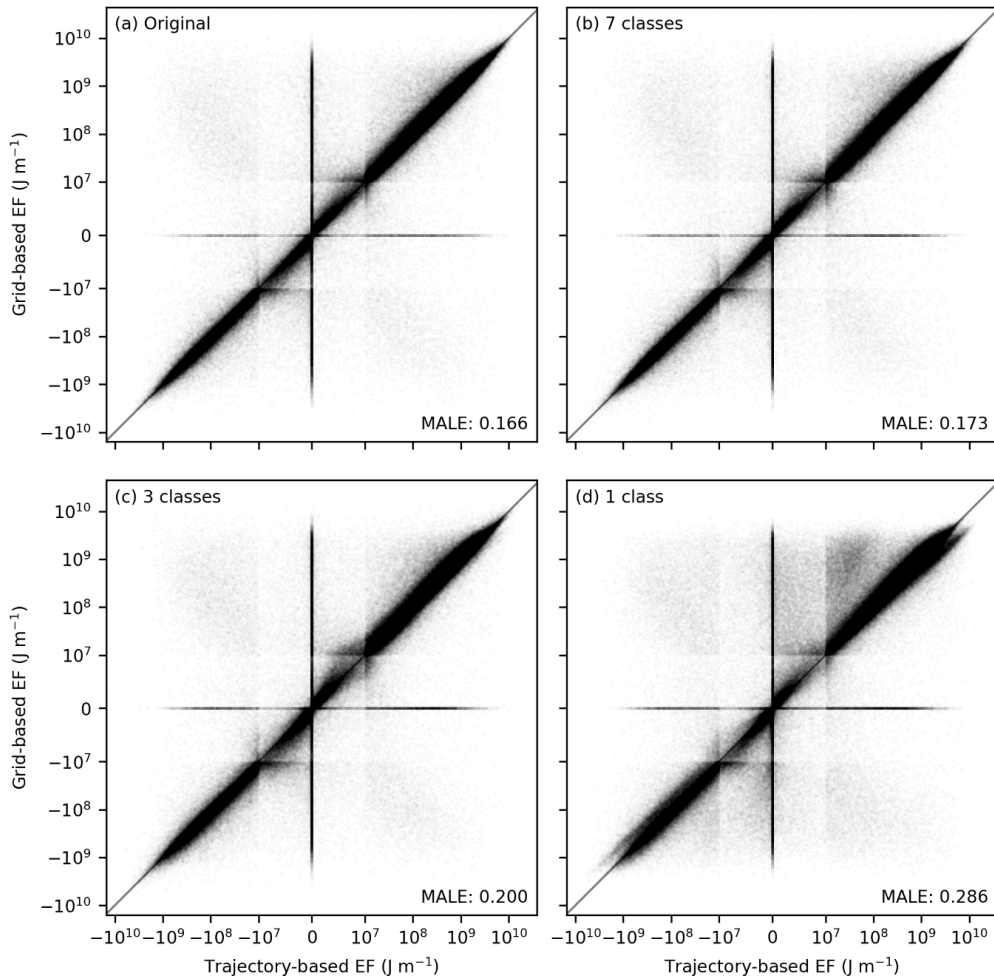


Figure 3: Pointwise errors between $\text{EF}_{\text{contrail}}^{\text{traj}}$ and $\text{EF}_{\text{contrail}}^{\text{grid}}$ when the grid-based CoCiP is configured: (a) using the exact/original aircraft-engine types (i.e., the same as the trajectory-based CoCiP); and with (b) $N=7$; (c) $N=3$; and (d) $N=1$ aircraft-engine groups respectively. Each panel contains 10,000,000 randomly-sampled flight waypoints. The axes use a logarithmic scale for $|\text{EF}_{\text{contrail}}| > 10^7 \text{ J m}^{-1}$ and a linear scale between 10^{-7} and 10^7 J m^{-1} . For both axes, the box-like structures observed around 10^{-7} and 10^7 J m^{-1} arise from the transition between the linear and logarithmic scale.

Fleet-aggregated errors are evaluated using the weighted Kendall rank correlation coefficient (τ_w), which assesses the grid-based CoCiP's capability to correctly rank flight segments by their magnitude of $EF_{\text{contrail}}^{\text{traj}}$. We additionally use two custom performance curve metrics that evaluate the deterioration in contrail mitigation potential when interventions are informed by imperfect predictions ($EF_{\text{contrail}}^{\text{grid}}$) (Platt et al., 2024). The performance curves are constructed by first sorting the flight segments based on an estimate of their EF_{contrail} ($EF_{\text{contrail}}^{\text{grid}}$) and then plotting their cumulative EF_{contrail} as a function of the cumulative flight distance flown (L), shown in Fig. 2. This is equivalent to a curve showing the reduction in EF_{contrail} as a function of L , with interventions being prioritised based on an estimate of the EF_{contrail} and assuming that the contrail mitigation at the flight segment is successful ($EF_{\text{contrail}} = 0$). The cumulative EF_{contrail} increases most quickly with the cumulative L if the EF_{contrail} is based on perfect information (i.e., $EF_{\text{contrail}}^{\text{traj}}$) and less quickly if the EF_{contrail} estimates (i.e., $EF_{\text{contrail}}^{\text{grid}}$) contain errors. We use these performance curves to quantify the: (i) change in initial mitigation rate (i.e., the reduced effectiveness in mitigating flight segments with the most strongly warming contrails), which is estimated from the gradient of a secant line over the first 5% of the cumulative EF_{contrail} (m_5) and expressed as a ratio $\frac{m_5^{\text{grid}}}{m_5^{\text{traj}}} (< 1)$; and (ii) change in flight segment ratio, $\frac{L_{80}^{\text{grid}}}{L_{80}^{\text{traj}}} (> 1)$, which quantifies the additional flight distance where interventions have to be applied to mitigate 80% of the total EF_{contrail} . A detailed description of each metric can be found in Appendix A5.

4.2 Model comparison

Table 4 summarises the performance metrics when comparing the model agreement between the trajectory-based CoCiP and various configurations of the grid-based CoCiP, i.e., using the original aircraft-engine type for each flight as in the trajectory-based CoCiP, and with different aircraft-engine groupings ($1 \leq N \leq 12$).

For the original aircraft-engine group, the false negative and false alarm rates are 3.2% and 10.4% respectively when evaluated against moderately warming contrails ($EF_{\text{threshold}} = 1 \times 10^7 \text{ J m}^{-1}$), and 6.0% and 17.7% respectively when assessed against strongly warming contrails ($EF_{\text{threshold}} = 5 \times 10^8 \text{ J m}^{-1}$). The modified-MALE of 0.166 corresponds to a 47% relative error between $EF_{\text{contrail}}^{\text{traj}}$ and $EF_{\text{contrail}}^{\text{grid}}$. These pointwise errors (shown in Fig. 3a) are independent of the aircraft-engine grouping and primarily arise from: (i) the assumption of an infinitesimal contrail segment in the grid-based CoCiP compared to a finite segment in the trajectory-based CoCiP, where the $EF_{\text{contrail}}^{\text{traj}}$ can be zero if the next flight waypoint does not form a persistent contrail; (ii) the use of nominal V_{TAS} and aircraft mass in the grid-based CoCiP, which causes differences in the downward displacement and survivability of the contrail during the wake vortex phase; and (iii) the calibrated f_{shear} , c.f. Eq. (6), which affects the $\frac{dS_n}{dz}$, contrail diffusivity, coverage area, lifetime, and EF_{contrail} . For the fleet-aggregated errors, the τ_w of 0.821 demonstrates a strong correlation between the rankings of $EF_{\text{contrail}}^{\text{traj}}$ and $EF_{\text{contrail}}^{\text{grid}}$. The change in initial mitigation rate of 0.816 suggests an 18% reduction in the effectiveness of mitigating the most strongly warming contrails with the grid-based

CoCiP, and a change in the flight segment ratio of 1.156 indicates that interventions must be applied to an additional 16% of the total flight distance flown to mitigate 80% of the EF_{conrail} .

340

Using different aircraft-engine groupings ($1 \leq N \leq 12$) rather than the original aircraft-engine type introduces additional sources of error between the trajectory-based and grid-based CoCiP (Table 4, and Fig. 2, 3, and A8). The mean error across different performance metrics for $N = 12$ and $N = 7$ are around 0.6% and 2.8% relative to the configuration without any aircraft-engine grouping, but the degradation rate generally starts to increase when $N < 7$ (Fig. A8). Specifically, the mean error for $N = 1$ (34.5%) is around an order of magnitude larger than that of $N = 7$ (2.8%), with these errors primarily arising from overestimates in the EF_{conrail} from aircraft-engine types with low nvPM EI_n (c.f. top right quadrant in Fig. 3d). Notably, a reduction from $N = 4$ to $N = 3$ results in an improvement in mean error across the performance metrics from 18.0% to 13.1%. This improvement can be attributed to the fact that $N = 3$ categorises the aircraft-engine types solely based on their nvPM EI_n , whereas $N = 4$ categorised the aircraft-engine types into two nvPM and two aircraft mass categories, thereby suggesting that

350 the nvPM EI_n is a stronger predictor of EF_{conrail} than aircraft mass.

Table 4: Summary of the different performance metrics used to evaluate the agreement between the grid-based CoCiP with different configurations of aircraft-engine groups (N) relative to the trajectory-based CoCiP. Further information on these metrics can be found in Section 4.1 and Appendix A5.

Number of aircraft-engine groups (N)	$EF_{\text{threshold}} = 10^7 \text{ J m}^{-1}$		$EF_{\text{threshold}} = 5 \times 10^8 \text{ J m}^{-1}$		Modified-MALE ^a	τ_w ^b	Performance curves		Mean error across all metrics ^c
	False negative	False alarm	False negative	False alarm			Initial mitigation rate	Flight segment ratios	
Original	3.2%	10.4%	6.0%	17.7%	0.166	0.821	0.816	1.156	-
12	3.2%	10.6%	5.7%	18.3%	0.169	0.819	0.811	1.158	0.6%
7	3.6%	10.7%	5.7%	18.6%	0.173	0.814	0.809	1.160	2.8%
6	3.7%	10.4%	8.0%	18.1%	0.178	0.802	0.808	1.177	7.8%
5	3.8%	11.0%	9.5%	18.0%	0.183	0.790	0.787	1.202	11.7%
4	4.1%	11.2%	13.2%	17.3%	0.194	0.766	0.586	1.236	18.0%
3	4.7%	12.2%	5.6%	22.0%	0.201	0.784	0.791	1.191	13.1%
2	5.0%	12.4%	9.5%	21.6%	0.213	0.755	0.588	1.242	19.7%
1	5.1%	16.0%	9.5%	29.4%	0.286	0.670	0.526	1.378	34.5%

355

^a: The modified mean absolute log error (modified-MALE), where a value of zero indicates perfect agreement in the magnitude of EF_{conrail} between the trajectory-based and grid-based CoCiP, while larger values are indicative of larger relative errors. The modified-MALE can be converted to a percentage relative error using the following formula, Percentage relative error = $100 \times (10^{\text{modified MALE}} - 1)$. A value of 1 implies that, on average, $EF_{\text{conrail}}^{\text{grid}}$ are off by one order of magnitude.

360

^b: The weighted Kendall rank correlation coefficient (τ_w), where $\tau_w = 1$ indicates a perfect agreement between the rankings of $EF_{\text{conrail}}^{\text{traj}}$ and $EF_{\text{conrail}}^{\text{grid}}$, $\tau_w = 0$ indicates a completely random relationship, while $\tau_w = -1$ indicates a perfect disagreement.

^c: The mean percentage error across all performance metrics when compared with the grid-based CoCiP without any aircraft-engine configuration, visualised in Fig. A8.

Based on these results, we draw three key insights to inform the selection of an optimal N : (i) the model agreement between the trajectory-based and grid-based CoCiP is comparable for $N = 12$ and $N = 7$, which suggests that there may not be a

365 significant advantage to running the grid-based CoCiP with $N = 12$ rather than $N = 7$; (ii) $N = 3$, which categorises the aircraft-engine types solely based on nvPM EI_n , offers a reasonable trade-off between model accuracy and operational complexity; and (iii) $N = 1$ significantly degrades the accuracy of the grid-based CoCiP and is not recommended for operational use.

5 Application of grid-based CoCiP


370 Here, we run a 2019 full year grid-based global contrail simulation with $N = 3$ and reanalysis meteorology to quantify the annual statistics and spatial trends of strongly warming and cooling contrails (Section 5.1). We then introduce two different approaches for integrating the grid-based CoCiP into flight trajectory optimization (Section 5.2), followed by proposing two strategies to account for uncertainties within the decision-making process of contrail mitigation to increase the probability of achieving a net climate benefit (Section 5.3).

5.1 Global contrail simulation


375 The grid-based CoCiP produces a global map of the EF_{contrail} per flight distance for each of the three aircraft-engine group that were categorised based on their nvPM EI_n (Fig. 4 and Section 4.2). A comparison between the nominal and high nvPM aircraft-engine group (Fig. 4b) showed notable differences in the magnitude of EF_{contrail} , where the global mean EF_{contrail} per flight distance for the high nvPM aircraft-engine group ($10 \times 10^8 \text{ J m}^{-1}$) is around two times larger than the nominal nvPM group ($5.5 \times 10^8 \text{ J m}^{-1}$). These groups also show differences in the sign of EF_{contrail} , especially at around 25–60°S and 60–150°E, where the
380 number of grid cells with cooling contrails ($EF_{\text{contrail}} < 0$) in the high nvPM group is 18% more than the nominal nvPM group. These trends can be linked to the relationship between the nvPM EI_n and contrail lifetime, where a larger nvPM EI_n generally leads to a higher initial contrail ice crystal number, which in turn, lowers the ice crystal sizes and its sedimentation rate, thereby prolonging the contrail lifetime, and increase the magnitude and variability of EF_{contrail} (Teoh et al., 2022a). Although the global mean EF_{contrail} for the low nvPM group ($0.15 \times 10^8 \text{ J m}^{-1}$) is around one order of magnitude smaller than the nominal nvPM
385 group ($5.5 \times 10^8 \text{ J m}^{-1}$) (Fig. 4c), we note that the EF_{contrail} estimates from the low nvPM group are likely underestimated because CoCiP does not currently account for the potential activation of volatile particulate matter and ambient aerosols to form contrail ice crystals in the “soot-poor” regime ($\text{nvPM } EI_n < 10^{13} \text{ kg}^{-1}$) (Kärcher and Yu, 2009).

Unlike a map of the ISSR coverage area, which identifies regions likely to form persistent contrails, the 4D EF_{contrail} per flight
390 distance accounts for the intensity of contrail-induced warming and allows for more targeted mitigation. For example, in 2019, the global annual mean percentage of airspace volumes forecasted with strongly warming contrails was 0.44% for $EF_{\text{contrail}} > 95^{\text{th}}$ percentile ($1.5 \times 10^9 \text{ J m}^{-1}$), and 1.6% for $EF_{\text{contrail}} > 80^{\text{th}}$ percentile ($5.0 \times 10^8 \text{ J m}^{-1}$). These values are up to 91% smaller than the airspace volumes with net warming contrails (4.8% for $EF_{\text{contrail}} > 0$) and up to 93% smaller than the ISSR coverage area (6.6% for $EF_{\text{contrail}} \neq 0$) (Fig. 5a). Thus, using this approach to navigational contrail avoidance could minimise potential

395 disruptions to air traffic management and airspace capacity, as it focuses only on the most warming contrails rather than avoiding all persistent contrails.

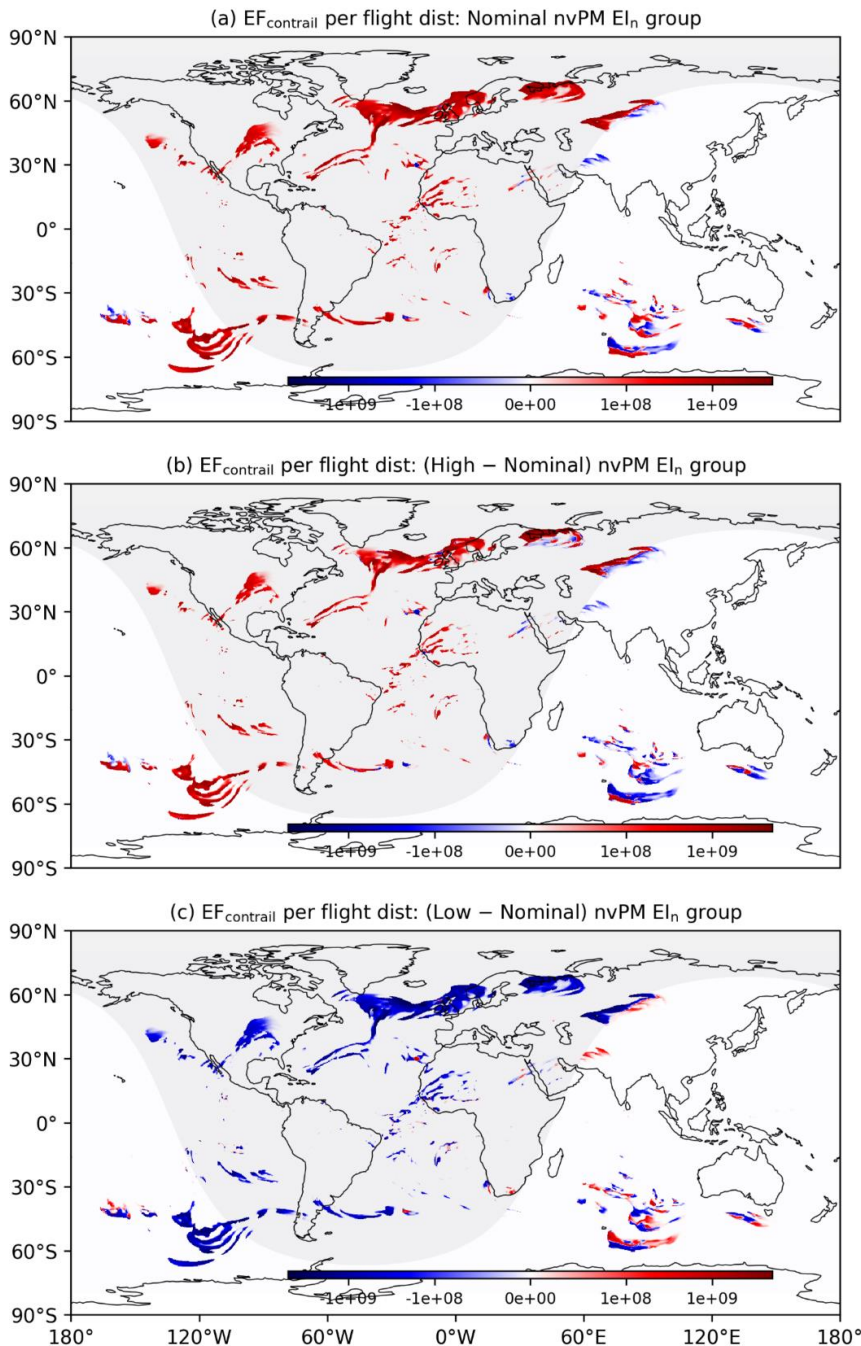

400 **Figure 4:** The (a) absolute EF_{contrail} per flight distance for the aircraft-engine group with nominal nvPM; and the absolute difference in EF_{contrail} per flight distance between the (b) nominal and high nvPM aircraft-engine group; and (c) nominal and low nvPM aircraft-engine group. The global contrail climate forcing shown here are simulated at FL360 (10,973 m) on the 7th of January 2019 at 03:00:00 UTC. Basemap plotted using Cartopy 0.22.0 and sourced from Natural Earth; licensed under public domain.

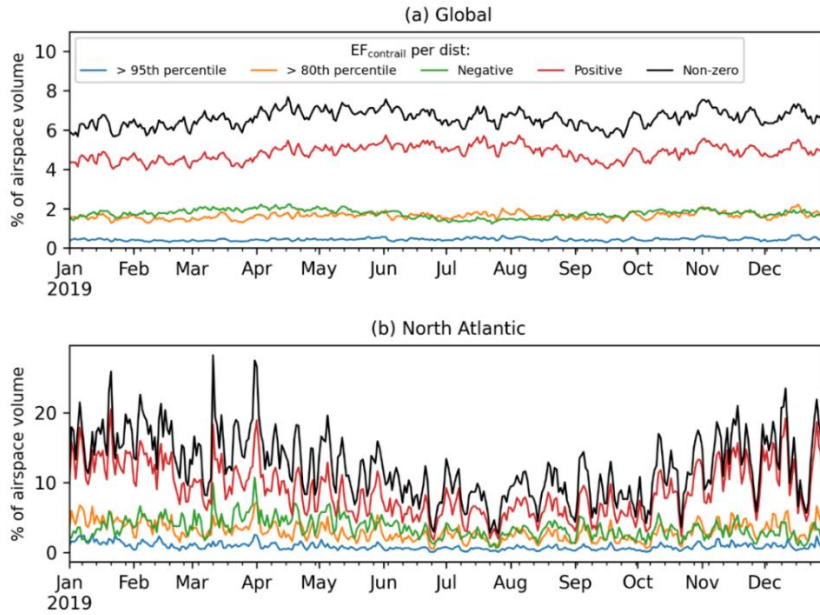

405 **Figure 5: Daily means of the percentage of airspace volume: (a) globally; and (b) over the North Atlantic region (between 40–63°N and 70–5°W) in 2019, where the EF_{contrail} per flight distance is: (i) greater than $1.54 \times 10^9 \text{ J m}^{-1}$ (95th percentile, blue lines); (ii) greater than $5.0 \times 10^8 \text{ J m}^{-1}$ (80th percentile, orange lines); (iii) negative (i.e., cooling contrails, green lines); (iv) positive (i.e., warming contrails, red lines); and (v) non-zero (i.e., all contrails, black lines).**

We also use the 2019 grid-based global contrail simulation to quantify the global annual mean EF_{contrail} per flight distance (Fig. 6) and annual occurrence of strongly warming ($EF_{\text{contrail}} > 1.5 \times 10^9 \text{ J m}^{-1}$, 95th percentile) and cooling contrails ($EF_{\text{contrail}} < -2.4 \times 10^8 \text{ J m}^{-1}$, 5th percentile) at different altitudes (Fig. 7). The grid-based CoCiP’s predictions of persistent contrail occurrence and spatial trends in EF_{contrail} are generally consistent with earlier global contrail simulation studies (Bier and Burkhardt, 2022; Gettelman et al., 2021; Teoh et al., 2024a). For example, the absence of persistent contrails below 35,000 feet in the tropics (Fig. 6a and 6b) is due to its higher relative ambient temperatures and tropopause height (Santer et al., 2003), while the lower relative EF_{contrail} per flight distance at the subtropics (i.e., China, India, Middle East, and Australia, as shown in Fig. 6c) is associated with a lower persistent contrail formation due to the Hadley circulation (Teoh et al., 2024a). Diurnal and seasonal effects contribute to a higher prevalence of both strongly warming and cooling contrails at higher latitudes due to the significant seasonal variations in daylight hours (Fig. 7a to 7d). Background radiation fields, such as the solar direct radiation (SDR), RSR, OLR, and albedo (RSR/SDR), are mainly influenced by latitude, natural cirrus occurrence, and surface temperature and reflectance. In general, strongly warming contrails are more likely in regions with: (i) high albedo (e.g., poles, Siberia, and areas with high natural cirrus coverage); (ii) high OLR (e.g., tropics and the Sahara Desert); and (iii) low SDR (e.g., wintertime) (Fig. 6 and 7). Condition (i) limits the contrail SW RF because a higher proportion of incoming solar radiation is already reflected without contrails, while condition (ii) drives the contrail LW RF especially in cloud free conditions. In contrast, regions and times with a larger relative SDR-to-OLR ratio (e.g., Southeast Asia, springtime at high latitudes) are associated with strongly cooling contrails (Fig. 7b, 7d, and 7f). Finally, global atmospheric circulation patterns can also influence the

410

415

420

425 humidity transport underlying ISSR occurrence (i.e., Hadley Circulation and North Atlantic warm conveyor belt) and preferential advection of persistent contrails to specific regions (Teoh et al., 2024a; Voigt et al., 2017; Wolf et al., 2024).


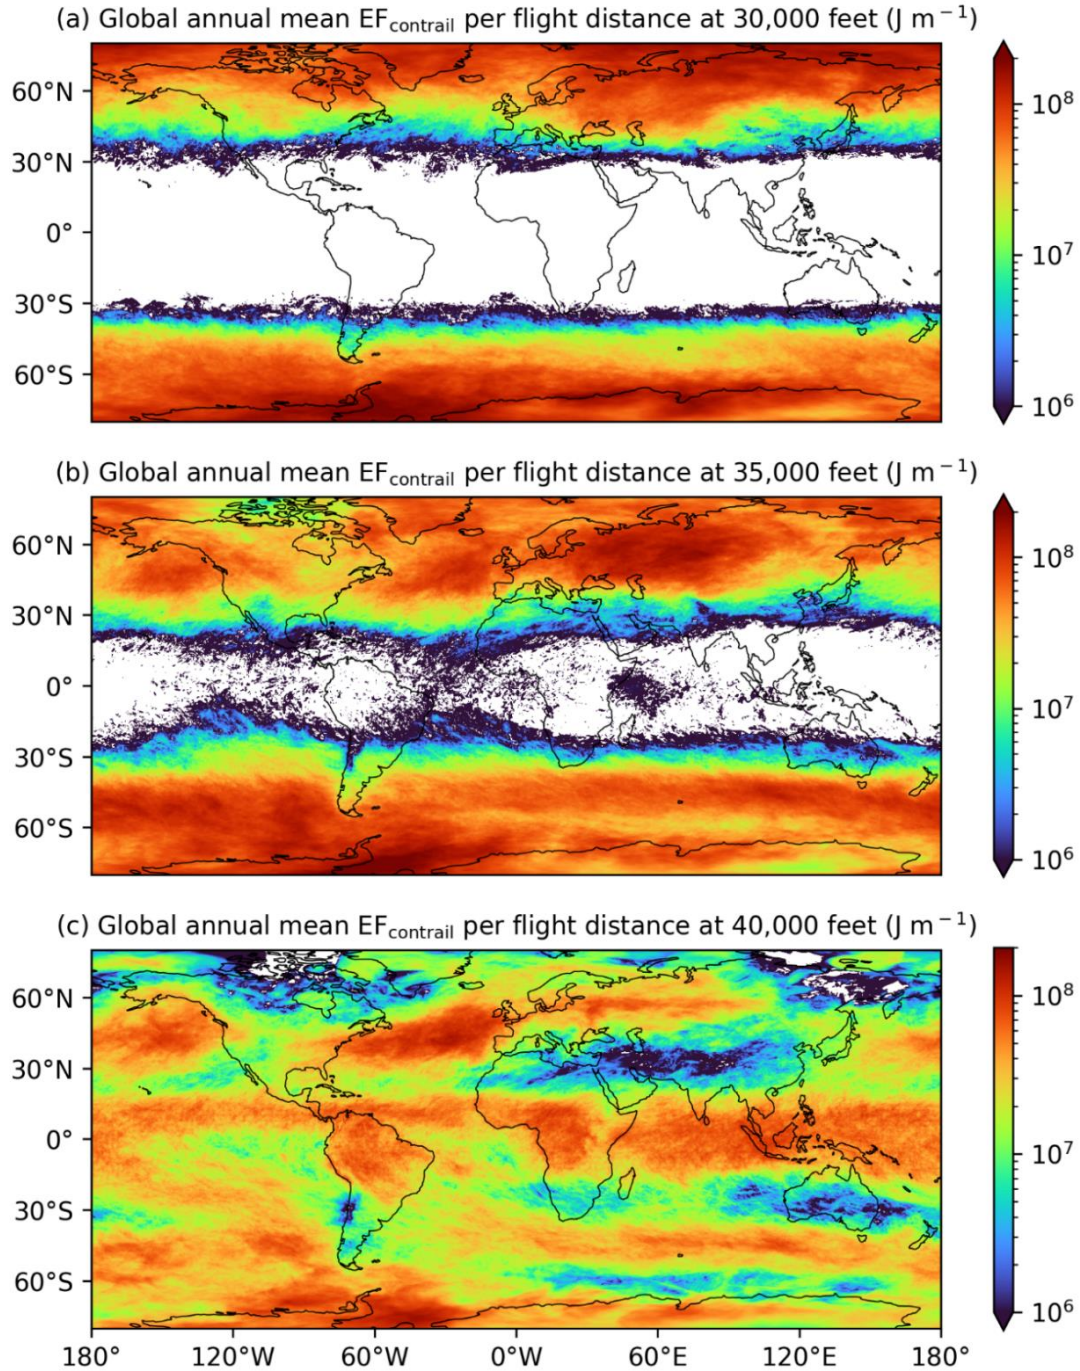


Figure 6: The 2019 global annual mean EF_{contrail} per flight distance from the grid-based CoCiP at an altitude of: (a) 30,000 feet; (b) 35,000 feet; and (c) 40,000 feet, for the nominal nvPM aircraft-engine group. Basemap plotted using Cartopy 0.22.0 and sourced from Natural Earth; licensed under public domain.

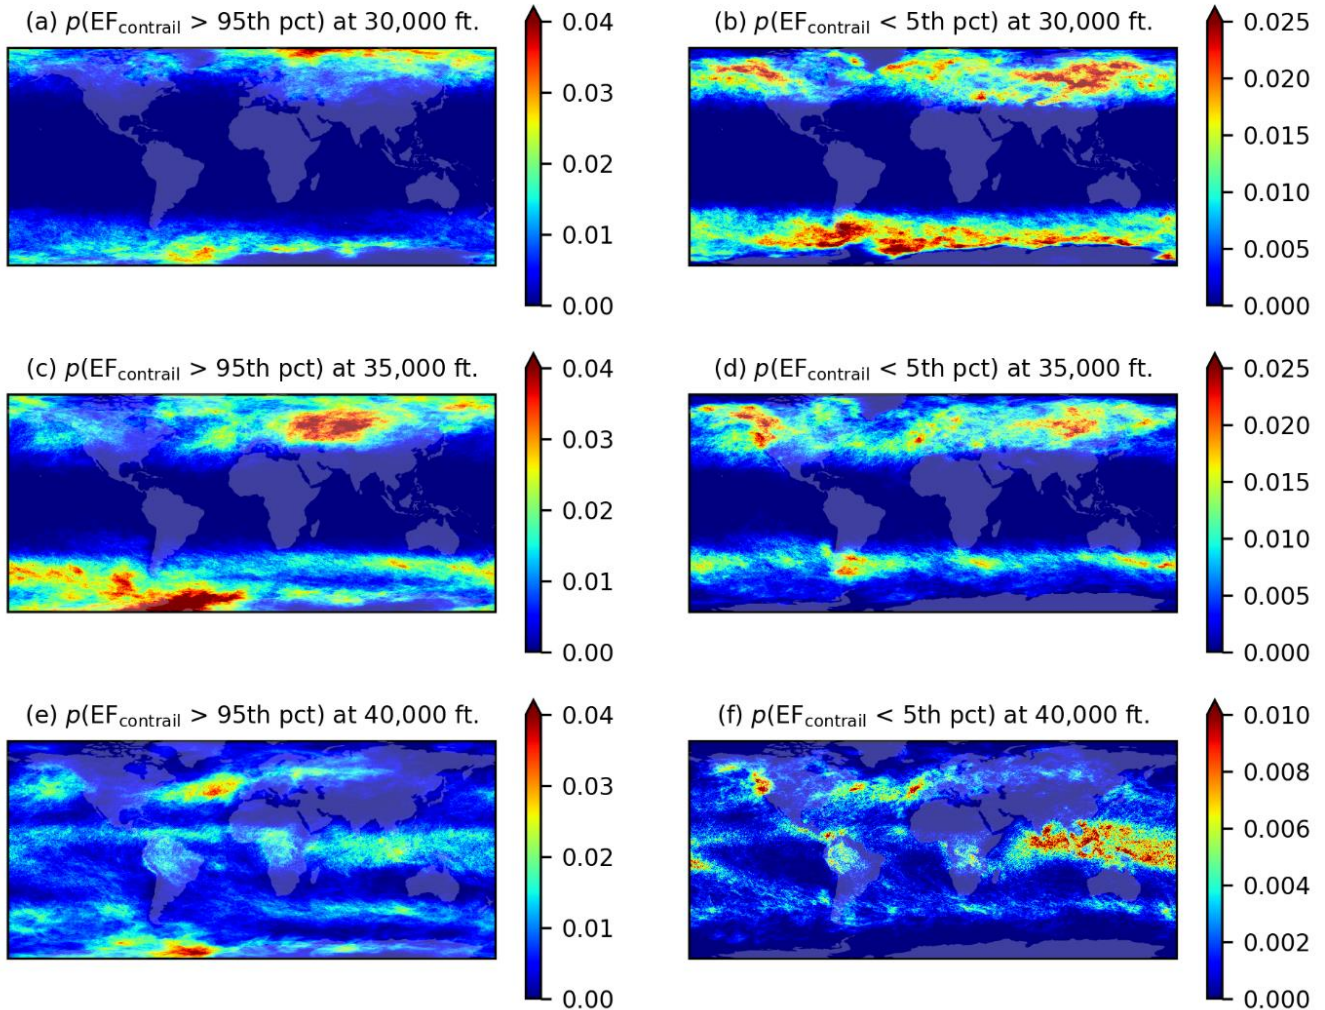


430

Figure 7: The 2019 annual probability of the EF_{contrail} per flight distance at each grid cell being above the 95th percentile ($1.54 \times 10^9 \text{ J m}^{-1}$) and below the 5th percentile ($-2.39 \times 10^8 \text{ J m}^{-1}$) at 30,000 feet (a, b), 35,000 feet (c, d), and 40,000 feet (e, f). Basemap plotted using Cartopy 0.22.0 and sourced from Natural Earth; licensed under public domain.

435 5.2 Flight trajectory optimisation

The contrail climate forcing estimates from the grid-based CoCiP can be applied within the context of flight trajectory optimization. We demonstrate two possible optimization strategies using an in-house flight trajectory optimizer (described in Appendix A6) to optimize the trajectory of an actual transatlantic flight that was flown by a B77W from New York to Cairo on the 7th of January 2019.

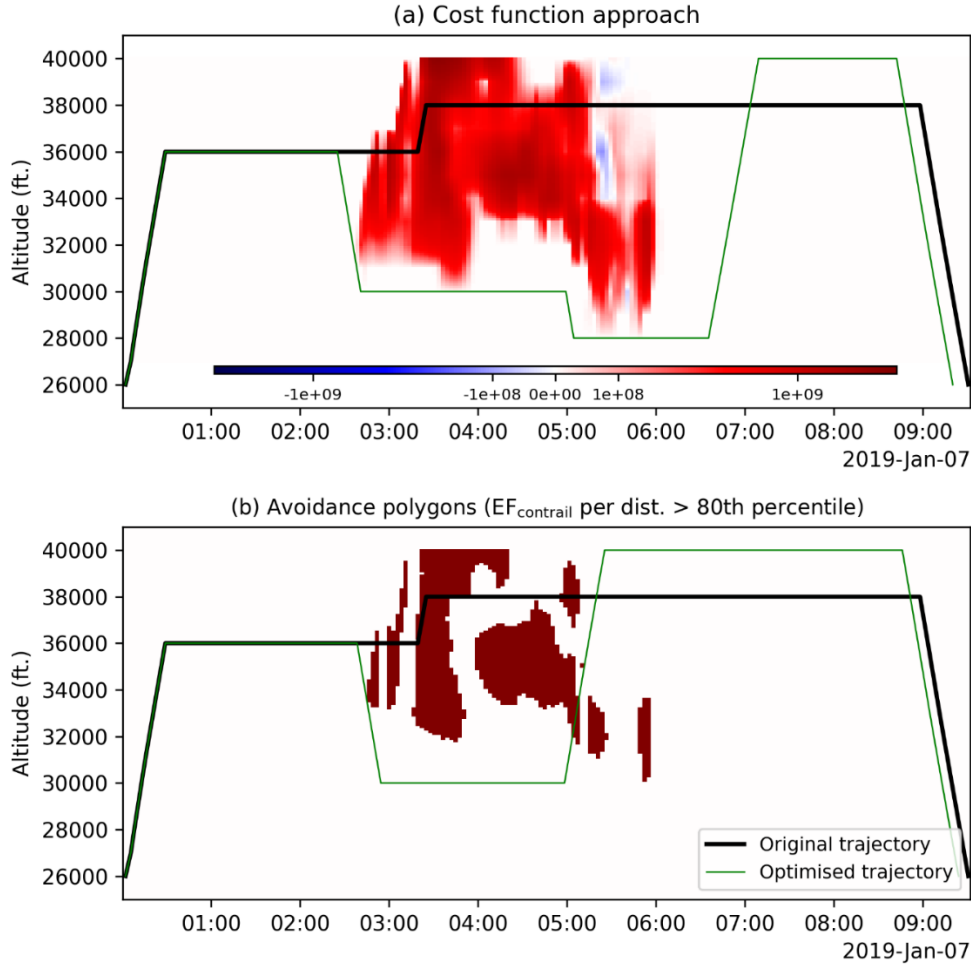

440

Figure 8: Application of the grid-based CoCiP in flight trajectory optimization, where the: (a) 4D EF_{contrail} per flight distance flown is integrated as an additional cost component, c.f. Eq. (8); or (b) airspace volumes that are expected to form strongly warming contrails, i.e., $EF_{\text{contrail}} > 80^{\text{th}}$ percentile ($5 \times 10^8 \text{ J m}^{-1}$) highlighted in red, are avoided. For both optimization methods, the original and optimized flight trajectories are depicted by the black and green lines respectively, and the optimized trajectories are not

445

5.2.1 Cost-based optimisation

The 4D EF_{contrail} per flight distance fields (shown in Fig. 4a) take the form of a standard weather forecast field and can be incorporated into the flight trajectory optimizer as an additional cost factor, alongside existing cost parameters such as the fuel consumption and overflight charges (Martin Frias et al., 2024). To do so, flight planners can convert the EF_{contrail} to a CO_2 mass-equivalent ($m_{\text{CO}_2 \text{ eq,contrails}}$) (Teoh et al., 2024a),

450

$$m_{\text{CO}_2 \text{ eq,contrails}} [\text{kg}] = \frac{EF_{\text{contrail}} \times \left(\frac{\text{ERF}}{\text{RF}}\right)}{\text{AGWP}_{\text{CO}_2, \text{TH}} \times S_{\text{Earth}}}, \quad (8)$$

where the global mean ERF/RF ratio of 0.42 is used as a best estimate to convert the RF to an ERF estimate (Lee et al., 2021). Given the significant uncertainties in the global mean ERF/RF ratio (ranging from 0.21 to 0.59, based on four global climate model studies) (Bickel, 2023; Bickel et al., 2019; Ponater et al., 2005; Rap et al., 2010) and its spatiotemporal variabilities, flight planners can choose the lower bound to conservatively incorporate the contrail climate effects. $AGWP_{CO_2,TH}$ is the CO₂ absolute global warming potential over a selected time horizon (TH) (7.54×10^{-7} J m⁻² per kg-CO₂ for 20 years, or 2.78×10^{-6} J m⁻² per kg-CO₂ for 100 years) (Gaillot et al., 2023), and S_{Earth} is the Earth surface area (5.101×10^{14} m²). If necessary, the $m_{CO_2,eq}$ can be further converted to a monetary value by multiplying it with the social cost of carbon (SC_{CO_2}), which we assume to be US\$ 185 [US\$ 44 – 413, 5–95% range] per tonne of CO₂ (Rennert et al., 2022). Here, we apply Eq. (8) in the trajectory optimizer to minimise the total CO₂ mass-equivalent emissions ($m_{CO_2,eq,total} = m_{CO_2,fuel} + m_{CO_2,eq,contrails}$), assuming a 100-year time horizon for the CO₂ AGWP, and rounding the results to the nearest tonne to align with the precision of the input parameters. We note that this is only one example of cost function, and that many other metrics are possible. The task of defining an appropriate cost function to assess trade-offs between contrail and CO₂ climate forcing remains a critically important topic for future research.


Using this cost-based approach, the flight trajectory optimizer successfully lowered the $m_{CO_2,eq,total}$ by 64%, from 597 tonne (203 tonnes of CO₂ emitted from the total fuel consumed + 394 tonnes from contrails) in the original trajectory to 213 tonnes (213 tonnes + 0 tonne) in the optimized trajectory. In simpler terms, more than 99.9% of the total $EF_{contrail}$ (1.3×10^{15} J in the original trajectory vs. 1.0×10^8 J in the optimized trajectory) is mitigated at the expense of a 5% increase in total fuel consumption. This is achieved by: (i) lowering the cruise altitude from 36,000 to 30,000 feet between 02:45 and 05:00 UTC; followed by (ii) a further descent to 28,000 feet between 05:00 UTC and 06:30 UTC to avoid regions forecasted with persistent warming contrails; and then (iii) climbing to a final cruise altitude of 40,000 feet at around 06:30 UTC (Fig. 8a).

5.2.2 Polygon-based optimisation

Alternatively, the 4D $EF_{contrail}$ per flight distance can also be used to construct contrail avoidance polygons to identify regions forecast with strongly warming contrails (Fig. 9a). These regions can be defined by when the $EF_{contrail}$ per flight distance at a grid cell exceeds a user-defined threshold, e.g., above the 80th percentile (5.0×10^8 J m⁻¹) (Teoh et al., 2024a). These polygons can then be integrated into existing flight planning software (Martin Frias et al., 2024), akin to weather-avoidance polygons which restrict flights from traversing in airspace volumes that are forecast with turbulence and/or thunderstorms (Rubnich and Delaura, 2010).

Using the 80th percentile contrail-avoidance polygons, the optimizer recommends a trajectory that reduces $m_{CO_2,total}$ by 60%, from 597 tonnes (203 tonnes of CO₂ emitted from the total fuel consumed + 394 tonnes from contrails) in the original trajectory to 236 tonnes (207 tonnes + 28 tonnes) in the optimized trajectory. Put differently, 93% of the total $EF_{contrail}$ (1.3×10^{15} J in the

original trajectory vs. 9.6×10^{13} J in the optimized trajectory) is avoided with a fuel penalty of 2%. This approach involves
485 lowering the cruise altitude from 36,000 to 30,000 feet between 03:00 and 05:00 UTC, followed by a step climb to 40,000 feet
at 05:00 UTC to exploit a gap in the contrail-avoidance polygon (Fig. 8b).

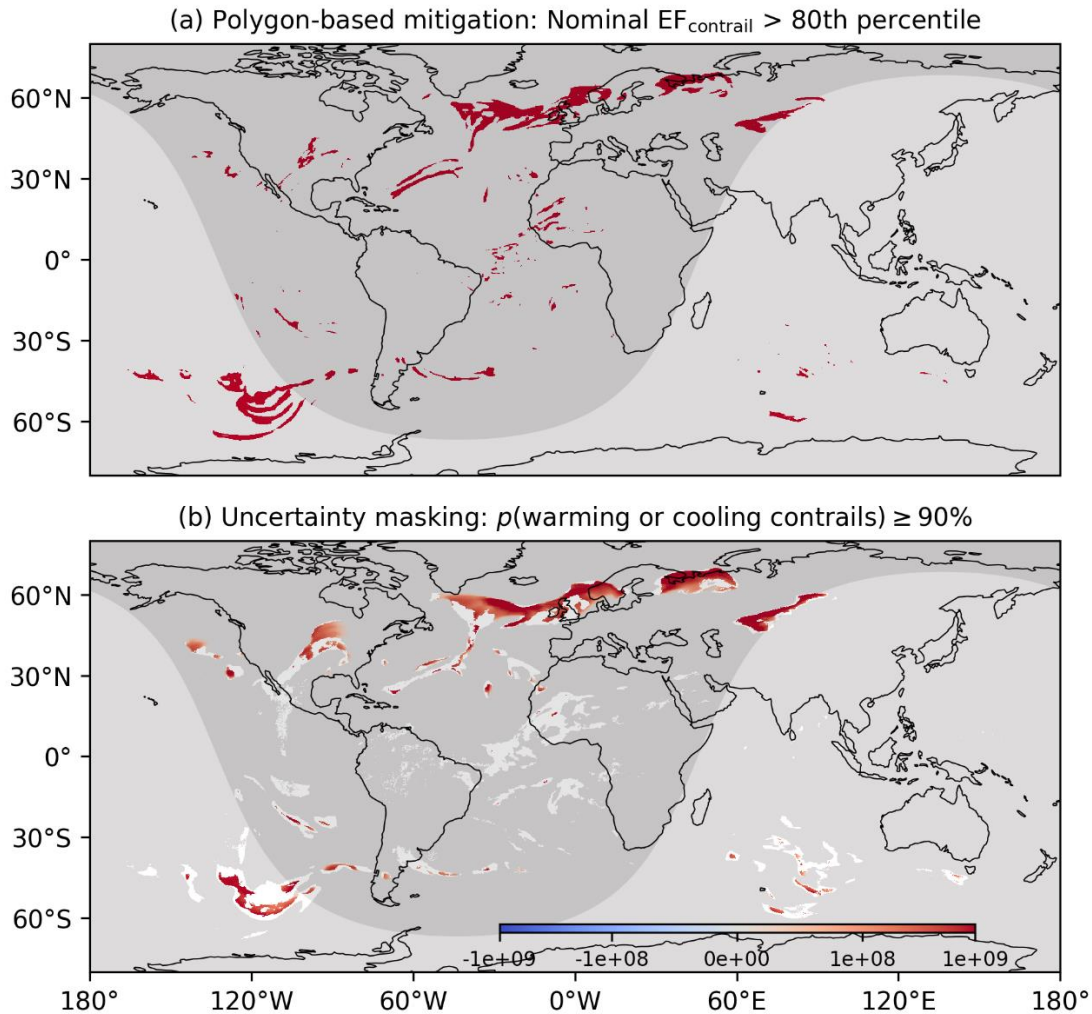

490 **Figure 9: Application of the simulated EF_{contrail} per flight distance for contrail mitigation, where flight planners can:** (a) construct
polygons and avoid flying in regions forecast with strongly warming contrails (i.e., grid cells where the EF_{contrail} per flight distance
is greater than the 80th percentile ($5.0 \times 10^8 \text{ J m}^{-1}$); and/or (b) account for uncertainties in the simulated contrail climate forcing by
495 masking and disregarding grid cells (shown in white) when their probability of forming net warming (or cooling) contrails is less
than 90%. The global contrail climate forcing shown here are from the nominal nvPM aircraft-engine group and simulated at FL360
(10,973 m) on the 7th of January 2019 at 03:00:00. For panel (a), the impact of dt on regions forecast with strongly warming contrails
are evaluated in Appendix A2. Basemap plotted using Cartopy 0.22.0 and sourced from Natural Earth; licensed under public
domain.

5.3 Decision-making under uncertainty

Here, we propose two strategies as a proof of concept to incorporate contrail forecast uncertainties in the decision-making
process of contrail mitigation. Our goal of providing a range of EF_{contrail} estimates is to increase the probability of achieving a

net climate benefit and minimise the unintended consequences associated with increased fuel consumption and long-lived CO₂ emissions.

The first strategy involves applying an additional constraint to the cost-based or polygon-based approach (Section 5.2), excluding grid cells where their probability of forming net warming contrails is below a user-defined threshold (e.g., 90%, as shown in Fig. 9b). This approach would ensure that mitigation actions are more likely to be focused on areas with a high probability of forming net warming contrails. A visual examination of the uncertainties in the simulated EF_{contrail} at a specific point in time reveals three key features: (i) EF_{contrail} uncertainties are generally larger at the edges and localised pockets of ISSRs; (ii) the sign of EF_{contrail} tend to be more stable on a synoptic scale (i.e., ISSRs with horizontal coverages of ~1000 km); and (iii) persistent contrails formed at night and in winter are more likely to have a lower relative uncertainty compared to those formed during daytime and in the summer (i.e., Northern vs. Southern hemisphere, shown in Fig. 9b). These results suggest that contrail interventions may be more effective when implemented at a regional level rather than targeting individual flights, as contrail uncertainties in specific locations and time may be lower than in other areas.

Secondly, flight planners and policymakers could implement additional constraints to ensure that diversions are performed only under specific circumstances, such as: (i) when there are no fuel penalties, which may be possible if the original cruise altitude and/or V_{TAS} were suboptimal, or if the alternative trajectory offers more favourable wind conditions (Poll, 2017); or (ii) when the selected CO₂-equivalence metric from the alternative trajectory exceeds a predefined reduction threshold compared to the original route, thereby providing some margin of error to account for contrail uncertainties (Borella et al., 2024). Notably, the transition of airspace surveillance towards satellite-based systems, such as the Automatic Dependent Surveillance–Broadcast (ADS-B) standard, can improve airspace capacity and flexibility, thus increasing the likelihood of fulfilling these constraints (Molloy et al., 2022).

6 Conclusions

The global annual mean contrail climate forcing, which represents the largest component of aviation’s overall climate forcing (Lee et al., 2021), underscores the need for heightened attention and priority from stakeholders in formulating effective mitigation solutions. As only around 2-3% of all flights are responsible for 80% of the global annual EF_{contrail}, one proposed solution is to re-route affected flights to avoid regions forecast with strongly warming contrails.

To implement this mitigation strategy in the real-world, we developed a tool that uses reanalysis or forecast meteorology to generate global maps of persistent contrail climate forcing within the timeframe necessary for flight planning and operational deployment. This is achieved by extending the existing trajectory-based CoCiP, which simulates contrails formed along flight trajectories, to a grid-based approach, which initializes an infinitesimal contrail segment at every point in a spatiotemporal grid

and simulates the contrail climate forcing over its lifecycle. The model outputs of the grid-based CoCiP (i.e., the 5D EF_{contrail} per flight distance with dimensions of longitude \times latitude \times altitude \times time $\times N$ aircraft-engine groups) are similar to the concept of climate change functions (CCF) introduced in previous studies (Frömming et al., 2021; Grewe et al., 2014), and provided in a format that is consistent with standard weather and turbulence forecasts so it can be readily integrated into existing flight planning software.

Our comparison of the EF_{contrail} estimates between the grid-based and trajectory-based CoCiP demonstrates a good agreement for use as a prototype contrail forecasting tool (Table 4). When the grid-based CoCiP is configured with $N \geq 7$, the mean error across all performance metrics is up to 3% when compared with the configuration without any aircraft-engine grouping. Alternatively, a configuration of $N = 3$ for the grid-based CoCiP provides operational simplicity for end users, but this comes at an expense of increasing the mean error across all metrics to 13%. While the model simplifications required for the grid-based CoCiP inevitably lead to additional uncertainties in the absolute EF_{contrail} values, we consider their relative spatiotemporal variabilities to be more relevant for the study's objective of identifying regions with strongly warming contrails (i.e., $EF_{\text{contrail}} > 80^{\text{th}}$ or 95^{th} percentile) for flight trajectory optimisation (Grewe et al., 2014).

Several strategies are proposed to utilize the grid-based CoCiP for contrail mitigation while accounting for uncertainties in the decision-making framework. Contrail forecasts can be integrated into flight planning software in two different ways: (i) using a cost-based approach, where the EF_{contrail} is monetised and included as an additional cost component within their flight trajectory optimizer; or (ii) adopting a polygon-based approach, where “weather-avoidance” polygons are defined to avoid traversing in airspace expected to produce strongly warming contrails. The grid-based CoCiP can also be set up in a Monte Carlo formulation to estimate the probability of each grid cell forming net warming contrails ($EF_{\text{contrail}} > 0$), which in turn, enables mitigation efforts to be focused on grid cells with a high probability of forming net warming contrails (Fig. 9b). The probability of achieving a net climate benefit can also be maximised when diversions are only targeted to flights where their alternative trajectory either avoids a fuel penalty, or achieves a reduction in the user-selected CO_2 -equivalence metric beyond a pre-defined margin of safety.

We acknowledge that the widespread adoption of our contrail forecasting tool in real-world operations depends on a successful validation of its predictions against independent observations. The ongoing focus on observational validation for both CoCiP variants underscores the active efforts in this critical area. While multiplying the EF_{contrail} by the ERF/RF ratio, c.f., Eq. (8), was used in this study to provide a highly approximate estimate of second-order and longer-term climate feedback, our future work aims to establish a stronger connection between this computationally efficient EF_{contrail} calculation and the more rigorous CCF calculations (Frömming et al., 2021). Future versions of the grid-based CoCiP are also expected to be prioritised towards: (i) accounting for different uncertainty sources within the Monte Carlo contrail simulation framework (Platt et al., 2024); (ii) incorporating contrail predictions from other models, such as Google's artificial intelligence-based predictions (Elkin and

565 Sanekommu, 2023) and/or algorithmic climate change functions (Dietmüller et al., 2023), and only performing flight
diversions in regions where there are inter-model agreements; (iii) improving the contrail forecast estimates for aircraft-engine
groups that operate in the ‘soot-poor’ regime ($\text{nvPM EI}_n < 10^{13} \text{ kg}^{-1}$) by accounting for the potential activation of volatile
particulate matter and ambient aerosols in forming contrail ice crystals (Kärcher et al., 2015; Kärcher and Yu, 2009); and (iv)
570 utilising real-time observations from ground-based cameras and/or satellite images (Geraedts et al., 2023; Low et al., 2024) to
improve forecast accuracy and verify the outcome of any contrail mitigation actions.

Appendix

A1 Versioning of trajectory-based CoCiP

The original trajectory-based contrail cirrus prediction model (CoCiP), versioned as “CoCiP (2012)”, was developed by Ulrich
Schumann at DLR using the Fortran programming language (Schumann, 2012; Schumann et al., 2012a). Figure A1 summarises
575 the steps and input parameters needed to run the trajectory-based CoCiP.

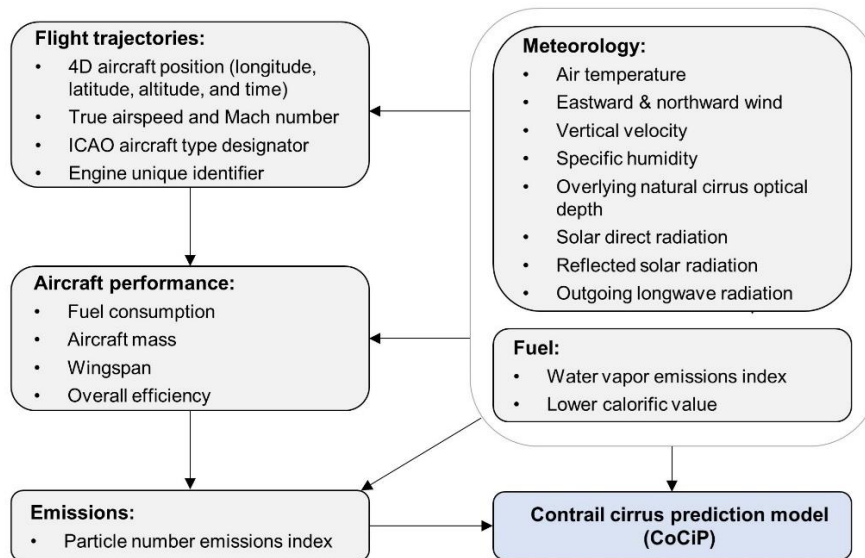


Figure A1: Steps and input parameters required to run the trajectory-based CoCiP.

CoCiP versioning and improvements

Since its first publication, CoCiP has undergone continuous refinement in its contrail simulation workflow and treatment of
580 input parameters. Figure A2 provides an overview of the different versions of CoCiP and its evolution. Subsequent versions
that are used by its creator Ulrich Schumann are versioned as “CoCiP-DLR” and have been extensively used in multiple studies
(Jeßberger et al., 2013; Schumann et al., 2011, 2013b, a, 2015, 2017, 2021; Schumann and Graf, 2013; Schumann and
Heymtsfield, 2017). CoCiP-DLR incorporates additional features such as:

- 585
- radiative heating effects on the contrail plume (Schumann et al., 2010),
 - humidity exchange between contrails and the background air (Schumann et al., 2015), and
 - change in contrail radiative forcing due to contrail-contrail overlapping (Schumann et al., 2021).

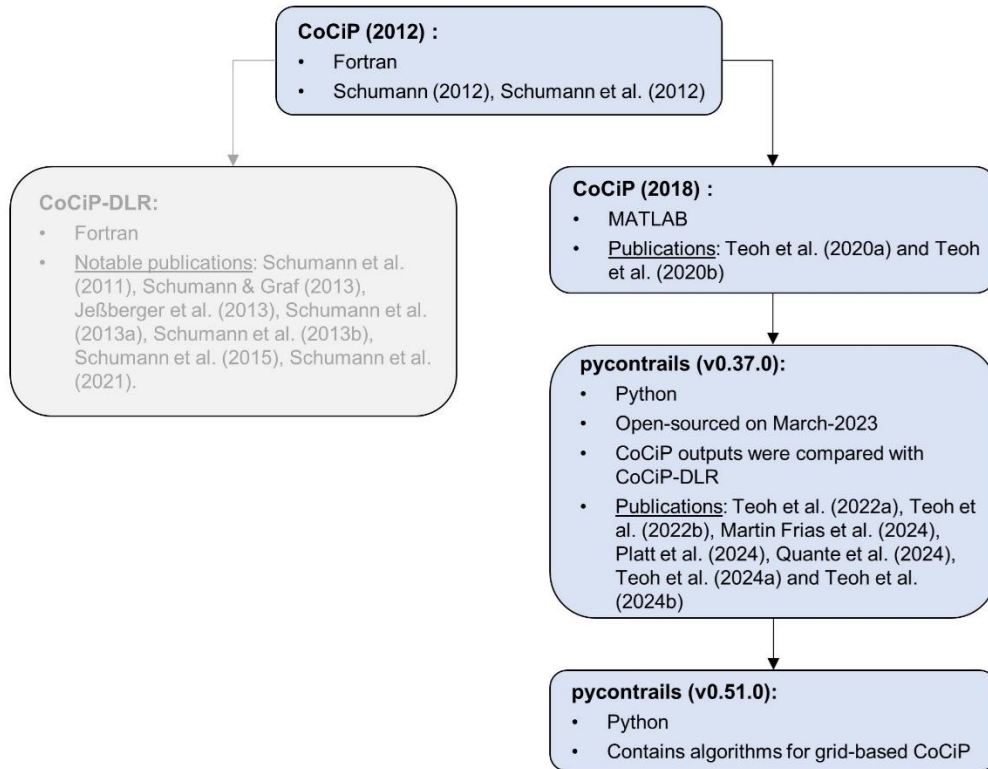


Figure A2: Overview of the different versions of the trajectory-based CoCiP and its evolution.

In 2018, a copy of CoCiP (2012) was provided for cooperation to Imperial College by Ulrich Schumann and DLR. CoCiP (2012) was re-coded in MATLAB by Imperial College with support from Ulrich Schumann. This version of CoCiP is designated as “CoCiP (2018)”. In 2022, CoCiP (2018) was re-coded to Python by Breakthrough Energy and hosted on GitHub via the pycontrails library repository (Shapiro et al., 2023). This CoCiP implementation is referred to as “pycontrails (v0.37.0)” and was open-sourced on March-2023. The pycontrails library standardized input and output data structures to expand access to the CoCiP model. The different structures include flight trajectories (pycontrails.Flight), meteorology (pycontrails.MetDataset), fuel properties (pycontrails.Fuel), as well as aircraft performance and emission models (pycontrails.Model). The CoCiP model implemented in pycontrails also features several improvements relative to CoCiP (2018), including:

- Modelling the radiative heating effects on the contrail plume, identical to the workflow that was already implemented in CoCiP-DLR (Schumann et al., 2010; Schumann and Graf, 2013), and

- Modelling the nvPM activation rate to form contrail ice crystals ($f_{\text{activation}}$), which now depends on the difference between the ambient temperature and SAC threshold temperature (Bräuer et al., 2021), which replaces the simplifying assumption that $f_{\text{activation}} = 1$ at each flight waypoint,

The CoCiP model outputs from pycontrails (v0.37.0) were evaluated against those from CoCiP-DLR, revealing consistent results. The pycontrails repository is regularly updated, with the version used in this study being v0.51.0 (Shapiro et al., 2023). Detailed documentation of the specific changes made between each version of pycontrails can be found in the change log of Shapiro et al. (2023). Notably, several updates have also been applied to the trajectory-based CoCiP, including:

- Implementing a parameterized model of the ice crystal survival fraction during the wake-vortex phase, developed based on outputs from large eddy simulations (Unterstrasser, 2016), and
- Incorporating the contrail-contrail overlapping effects on the contrail radiative forcing (Teoh et al., 2024a) with minor modifications relative to the approach of Schumann et al. (2021).

610 **Publications using CoCiP**

Initial results of the CoCiP (2012) include comparisons to satellite and airborne lidar remote sensing observations, as well as comparisons to exhaust and contrail in-situ measurements (Schumann, 2010; Schumann and Wirth, 2009; Voigt et al., 2010). The concept of the contrail energy forcing (EF_{contrail}), which represents the cumulative contrail climate forcing over its lifetime, and its application to flight trajectory optimization were first introduced in Schumann et al. (2011). The first application of a gridded CoCiP approach was demonstrated in Schumann et al. (2012b). Additionally, CoCiP (2012) was applied alongside 8 years of METEOSAT cirrus and outgoing longwave radiation observations to derive the contrail longwave radiative forcing (RF) over the North and South Atlantic (Schumann and Graf, 2013). These results were then extrapolated through CoCiP simulations to estimate the global contrail shortwave and longwave RF, which results were used to inform the Intergovernmental Panel on Climate Change (IPCC) report (Boucher et al., 2013).

620

CoCiP (2018) was used in two separate studies to simulate contrails over the Japanese airspace (Teoh et al., 2020b, a) which included the following changes to the simulation workflow relative to CoCiP (2012), including:

- The incorporation of the fractal aggregates (FA) model, which estimates the non-volatile particulate matter (nvPM) number emissions index (EI_n) at each flight waypoint based on the engine thrust setting and pressure ratio, rather than assuming a constant nvPM EI_n (10^{15} kg^{-1}), and
- The implementation of a Monte Carlo simulation to propagate uncertainties in the nvPM EI_n estimates and meteorology to the simulated contrail properties and climate forcing.

625

pycontrails has been used in multiple studies to simulate aircraft emissions and contrail climate forcing (Martin Frias et al., 2024; Platt et al., 2024; Quante et al., 2024; Teoh et al., 2022a, b, 2024b, a) with the following improvements to the simulation workflow:

- Utilising the T_4/T_2 methodology (Teoh et al., 2022a, 2024b), which supersedes the FA model and estimates the aircraft-engine specific nvPM EI_n using the reported nvPM emissions profile provided by the ICAO aircraft engine emissions databank (EDB) (EASA, 2021),
- Simulating the change in contrail formation and properties resulting from the use of sustainable aviation fuel (SAF) (Teoh et al., 2022b),
- Corrections applied to the humidity fields provided by numerical weather predictions (NWP), which ensures that the provided relative humidity with respect to ice (RH_i) is more consistent with in-situ measurements (Teoh et al., 2022a, 2024a; Wolf et al., 2023a) (see Appendix A3),
- Supporting additional interpolation methods across the vertical level, such as the log-log and cubic spline interpolation, to account for the non-linear lapse rate of the specific humidity, and
- Incorporating additional features in various structures in pycontrails (i.e., pycontrails.Flight, pycontrails.MetDataset) and supporting the open-source Poll-Schumann (PS) aircraft performance model (Poll and Schumann, 2020, 2021, 2024).

Since 2023, a revised CoCiP-DLR is being implemented into the Icosahedral Nonhydrostatic (ICON) weather model of the German Weather Service (DWD) (U. Schumann and A. Seifert, to be published). The pycontrails repository is also currently in use at DLR with modifications to the interpolation scheme (not versioned).

A2 Sensitivity of contrail climate forcing to CoCiP model time step

Previous studies that simulated contrails with CoCiP have used different model time steps (dt) ranging between 5 and 60 minutes, depending on their specific application and available computational resources:

- Schumann et al. (2015) used a 60-minute dt due to: (i) CoCiP's coupling with the Community Atmosphere Model (CAM), which operates on a 60-minute time step; and (ii) the extensive computational demands of the 20-year global simulations,
- Regional studies over Japan, Europe, and the North Atlantic used a 30-minute dt , as these simulations were conducted locally on consumer-grade hardware (Schumann et al., 2021; Teoh et al., 2020b, 2022a),
- Schumann & Graf (2013) used a 15-minute dt to match the time resolution of their air traffic and satellite datasets, and
- Teoh et al. (2024a) used a 5-minute dt because the simulation was conducted on the cloud where computational resources were no longer constrained.

660 In this section, we perform a sensitivity analysis by running the grid-based CoCiP with different dt values of 1, 5, 10, 15 and
 30 minutes and quantify their impact on the estimated EF_{contrail} . We specifically simulated contrails on the 7th of January 2019
 at 03:00:00 UTC to be consistent with time period used in the examples in Section 5. Figure A3 shows that the simulated
 EF_{contrail} tends to increase as dt decreases, with the mean EF_{contrail} per flight distance simulated from a 1-minute dt being
 approximately 24% larger than those simulated from a 30-minute dt . The smaller EF_{contrail} at larger dt values, such as 30-
 665 minutes, can be explained by the contrail lifetime ending prematurely. For example, if ambient conditions in the next model
 time step ($t + 30$ minutes) are unfavourable for contrail persistence, the EF_{contrail} between t and ($t + 30$ minutes) becomes zero
 because contrails are no longer present at ($t + 30$ minutes). In contrast, under the same ambient conditions, a smaller dt of 1-
 minute allows the simulated contrails to persist for a longer time period within the same 30-minute window, thereby increasing
 the overall contrail lifetime and resulting in a larger warming or cooling effect ($|EF_{\text{contrail}}|$), as shown in the larger standard
 670 deviation in Fig. A3).


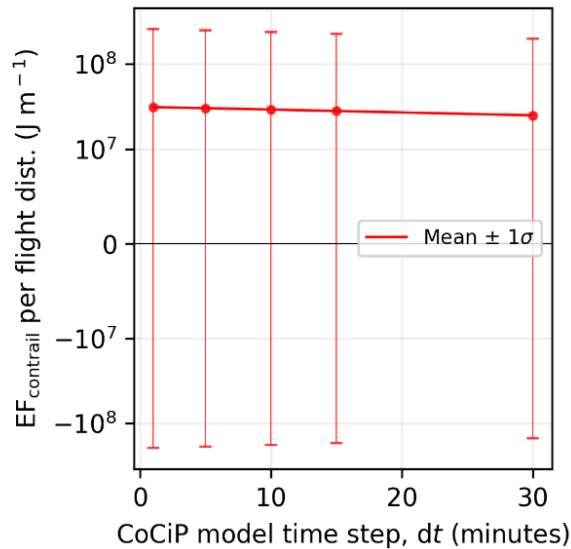


Figure A3: Change in the global mean and standard deviation of EF_{contrail} per flight distance across different CoCiP model time steps (dt). Contrails are simulated globally at FL360 (10,973 m) on the 7th of January 2019 at 03:00:00, with the nominal nvPM aircraft-engine group. The y-axis uses a logarithmic scale for $|EF_{\text{contrail}}| > 10^7 J m^{-1}$ and a linear scale between 10^{-7} and $10^7 J m^{-1}$.

675 In this study, we chose a 5-minute dt to align with Teoh et al. (2024a), as their EF_{contrail} thresholds (i.e., > 80th and 95th
 percentiles) were used to identify regions that forecasted to produce strongly warming contrails. For our research objectives,
 we note that the choice of dt only leads to minor differences in the regions identified with strongly warming contrails (Fig.
 A4). While time step error is one of the many sources of errors influencing EF_{contrail} , our analysis shows that it is not the most
 dominant one especially when compared to the impact of humidity corrections applied to the ERA5 HRES (Teoh et al., 2024a).

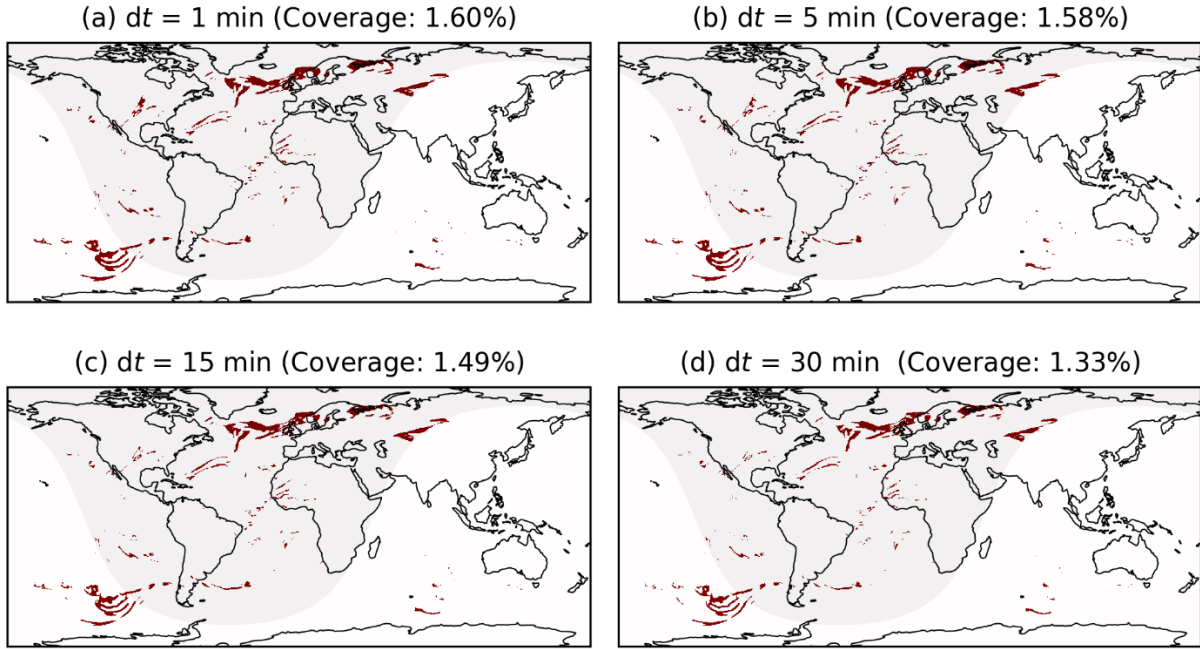

680

Figure A4: Regions forecasted with strongly warming contrails, i.e., EF_{contrail} per flight distance $> 5.0 \times 10^8 \text{ J m}^{-1}$ (80th percentile) when simulated with different model time steps (dt) of: (a) 1-minute; (b) 5-minute; (c) 15-minute; and (d) 30-minutes. Contrails are simulated globally at FL360 (10,973 m) on the 7th of January 2019 at 03:00:00, with the nominal nvPM aircraft-engine group.

685 A3 Humidity correction

Two approaches have been used in previous studies to ensure that the RHi distribution provided by the European Centre for Medium Range Weather Forecasts (ECMWF) ERA5 products are consistent with in-situ RHi measurements.

Firstly, a global humidity correction developed by Teoh et al. (2024a) attempts to improve the goodness-of-fit of the ERA5-derived and in-situ RHi distribution. It scales the ERA5-derived RHi with the following parametric equations,

$$690 \quad RHi_{\text{corrected}} = \begin{cases} \frac{RHi}{a_{\text{opt}}} & \text{for } \left(\frac{RHi}{a_{\text{opt}}}\right) \leq 1 \\ \min\left(\left(\frac{RHi}{a_{\text{opt}}}\right)^{b_{\text{opt}}}, RHi_{\text{max}}\right) & \text{for } \left(\frac{RHi}{a_{\text{opt}}}\right) > 1 \end{cases}, \text{ where} \quad (\text{A1})$$

$$a_{\text{opt}} = \frac{a_0}{1 + \exp(a_1 \times (|\text{lat}| - a_2))} + a_3, \quad (\text{A2})$$

$$b_{\text{opt}} = \frac{b_0}{1 + \exp(b_1 \times (|\text{lat}| - b_2))} + b_3, \text{ and} \quad (\text{A3})$$

$$\text{RH}_{\text{max}} = \begin{cases} \frac{p_{\text{liq}}(T_{\text{amb}})}{p_{\text{ice}}(T_{\text{amb}})} & , \text{ when } T_{\text{amb}} > 235 \text{ K} \\ 1.67 + (1.45 - 1.67) \times \frac{(T_{\text{amb}} - 190)}{(235 - 190)} & , \text{ when } T_{\text{amb}} \leq 235 \text{ K} \end{cases}, \quad (\text{A4})$$


695 $p_{\text{liq}}(T_{\text{amb}})$ and $p_{\text{ice}}(T_{\text{amb}})$ are the saturation pressure of water vapour over liquid water and ice respectively (Sonntag, 1994)(Sonntag, 1994). a_{opt} and b_{opt} captures the change in tropopause height between 20° and 50° N/S, which aims to account for the latitude effects on the RH_i distribution. The model coefficients are re-calibrated based on the specific ERA5 product, with: (i) $a_0 = 0.06262$, $a_1 = 0.4589$, $a_2 = 39.25$, $a_3 = 0.9522$, $b_0 = 1.471$, $b_1 = 0.04431$, $b_2 = 18.76$, and $b_3 = 1.433$ for the ERA5 HRES reanalysis on pressure levels (Teoh et al., 2024a); or (ii) $a_0 = 0.02630$, $a_1 = 2.2501$, $a_2 = 36.5494$, $a_3 = 0.9651$, $b_0 = 0.4891$, $b_1 = 4.1827$, $b_2 = 17.5338$, and $b_3 = 2.2109$ for the ERA5 HRES reanalysis on model levels. The main factor
700 contributing to differences between the two set of coefficients stems from the higher vertical resolution of the ERA5 HRES on model levels relative to those on pressure levels (26 vs. 10 levels between 6,300 and 15,000 m).

Secondly, more recent studies corrected the ERA5-derived RH_i using a quantile mapping approach (Platt et al., 2024; Wolf et al., 2023a). The quantile mapping approach replicates the in-situ RH_i distribution by constructing two cumulative density
705 functions (CDF) based on RH_i distributions from the ERA5 and in-situ measurements, estimating the quantile value of the ERA5-derived RH_i (represented on the y-axis of the CDF), and using the quantile values to substitute the ERA5-derived RH_i with the in-situ RH_i values.

The ERA5-corrected RH_i from both methodologies (i.e., global humidity correction and quantile mapping) were compared
710 against in-situ RH_i measurements from the mid-latitude region (30°N – 70°N and 125°W – 145°E) (Hofer et al., 2024). These comparisons used the equitable threat score (ETS) metric, where an ETS score of 1 represents perfect agreement between the ERA5-corrected and in-situ RH_i measurements, an ETS score of 0 suggests a random agreement, and an ETS score below 0 signifies an inverse relationship. The results show that the ETS from the quantile mapping method (0.344) is 21% higher than the global humidity correction method (0.284), and the corrected RH_i from both methods represent a significant improvement
715 relative to the uncorrected ERA5-derived RH_i (0.198). However, we note that these findings are only valid for the mid-latitude region and further work is required to evaluate both the correction methodologies globally. We note that we do not prescribe for any specific humidity correction methodology, and a final decision for the operational global contrail forecasting tool will be determined through stakeholder consensus. For the purposes of this paper, we employ the global humidity correction methodology instead of the quantile mapping approach because it was calibrated to account for the latitude effects, c.f. Eq.
720 (A2) and (A3), which could be more suitable for a global contrail simulation.

A4 Alternative aircraft type classifications

The grid-based CoCiP provides the simulated EF_{contrail} per flight distance across five dimensions of longitude, latitude, altitude, time, and N unique groups of passenger aircraft-engine types. The fifth dimension is necessary to differentiate between the contrails formed by passenger aircraft-engine types with varying nvPM number emissions and aircraft mass. Generally, a higher N will improve the agreement in the simulated EF_{contrail} between the trajectory-based and grid-based CoCiP, but this comes at the expense of an increase in computational resources and data storage/transfer requirements. Tables 2 and 3 in the main text classifies the most-commonly used passenger aircraft-engine types into 12 groups. Here, we propose several alternative aircraft-engine classifications with N ranging between 3 and 7 (groups) to assess the trade-offs between the model performance and computational requirements (see Tables A1 to A5). Additionally, we visualise the range of aircraft mass and nvPM El_n for each aircraft-engine group when they are clustered into 12 groups (Fig. A5 and Table 2), 7 groups (Fig. A6 and Table A1), and 3 groups (Fig. A7 and Table A5) respectively.

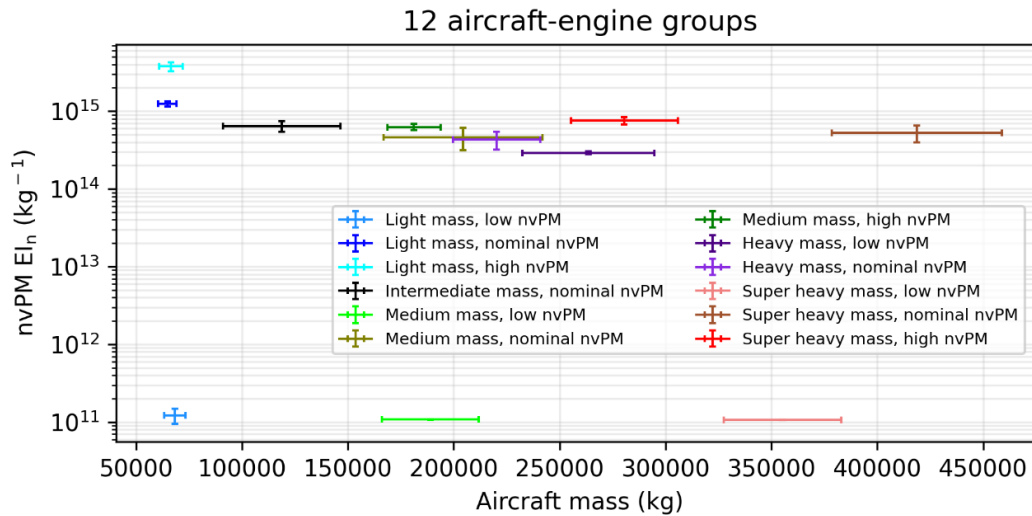

735 **Figure A5: Range of aircraft mass and nvPM El_n for each aircraft-engine group when they are clustered into 12 groups. The error bars for each data point represent one standard deviation of these values, which are provided by the 2019 global aviation emissions inventory based on ADS-B (GAIA) (Teoh et al., 2024b).**

740

Table A1: Classification of the commonly used passenger aircraft-engine types into 7 unique groups based on their similarities in aircraft mass and nvPM EI_n.

Aircraft-engine classification		nvPM EI _n		
		Low	Nominal	High
Aircraft mass	Light	<ul style="list-style-type: none"> • A19N (LEAP-1A) • A20N (LEAP-1A) • A21N (LEAP-1A) • B38M (LEAP-1B) 	<ul style="list-style-type: none"> • A319 (CFM56) • A320 (CFM56) • A321 (CFM56) • B737 (CFM56) • B738 (CFM56) • B739 (CFM56) • B752 (RB211) • B753 (RB211) • B762 (CF6-80E) • B763 (CF6-80E) 	<ul style="list-style-type: none"> • A19N (Pratt & Whitney) • A20N (Pratt & Whitney) • A21N (Pratt & Whitney) • A319 (IAE V2500) • A320 (IAE V2500) • A321 (IAE V2500)
	Medium	<ul style="list-style-type: none"> • B788 (GEnx) • B789 (GEnx) • B78X (GEnx) • B748 (GEnx) 	<ul style="list-style-type: none"> • A332 (Trent 700/CF6-80E) • A333 (Trent 700/CF6-80E) • A342 (CFM56/Trent500) • A343 (CFM56/Trent500) • A345 (CFM56/Trent500) • A346 (CFM56/Trent500) • A359 (Trent XWB) • A35K (Trent XWB) • B788 (Trent 1000) • B789 (Trent 1000) • B78X (Trent 1000) 	N/A
	Heavy	<ul style="list-style-type: none"> • B772 (GE90) • B773 (GE90) • B77L (GE90) • B77W (GE90) 	N/A	N/A
	Super heavy	N/A	<ul style="list-style-type: none"> • A388 (Trent 900) • B742 (CF6-80C) • B743 (CF6-80C) • B744 (CF6-80C) 	N/A

745


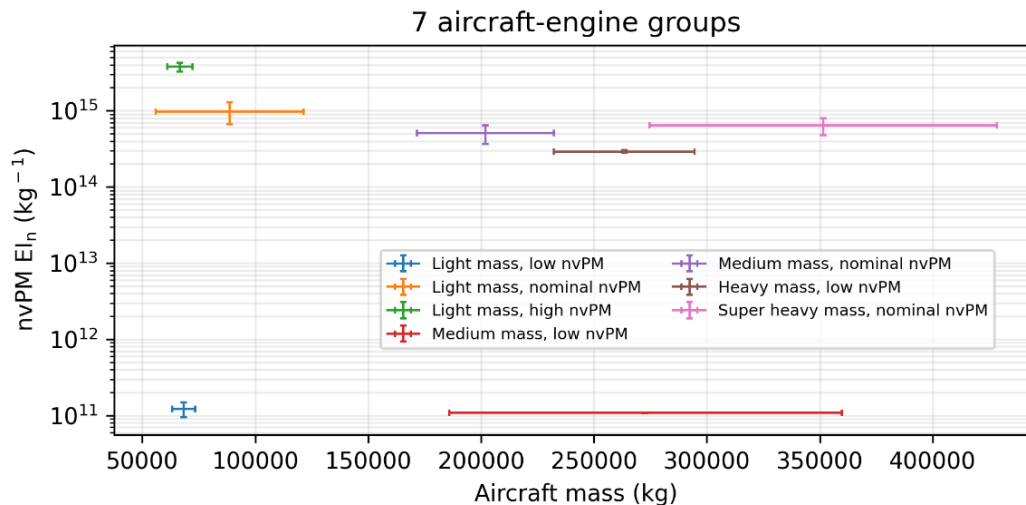


Figure A6: Range of aircraft mass and nvPM EI_n for each aircraft-engine group when they are clustered into 7 groups. The error bars for each data point represent one standard deviation of these values, which are provided by the 2019 global aviation emissions inventory based on ADS-B (GAIA) (Teoh et al., 2024b).

750 **Table A2: Classification of the commonly used passenger aircraft-engine types into 6 unique groups based on their similarities in aircraft mass and nvPM EI_n.**

Aircraft-engine classification		nvPM EI _n		
		Low	Nominal	High
Aircraft mass	Light	<ul style="list-style-type: none"> A19N (LEAP-1A) A20N (LEAP-1A) A21N (LEAP-1A) B38M (LEAP-1B) 	<ul style="list-style-type: none"> A319 (CFM56) A320 (CFM56) A321 (CFM56) B737 (CFM56) B738 (CFM56) B739 (CFM56) B752 (RB211) B753 (RB211) B762 (CF6-80E) B763 (CF6-80E) 	<ul style="list-style-type: none"> A19N (Pratt & Whitney) A20N (Pratt & Whitney) A21N (Pratt & Whitney) A319 (IAE V2500) A320 (IAE V2500) A321 (IAE V2500)
	Medium/Heavy	<ul style="list-style-type: none"> B788 (GEnx) B789 (GEnx) B78X (GEnx) B748 (GEnx) 	<ul style="list-style-type: none"> A332 (Trent 700/CF6-80E) A333 (Trent 700/CF6-80E) A342 (CFM56/Trent500) A343 (CFM56/Trent500) A345 (CFM56/Trent500) A346 (CFM56/Trent500) A359 (Trent XWB) A35K (Trent XWB) B772 (GE90) B773 (GE90) B77L (GE90) B77W (GE90) B788 (Trent 1000) B789 (Trent 1000) B78X (Trent 1000) 	N/A
	Super heavy	N/A	<ul style="list-style-type: none"> A388 (Trent 900) B742 (CF6-80C) B743 (CF6-80C) B744 (CF6-80C) 	N/A

3 aircraft-engine groups

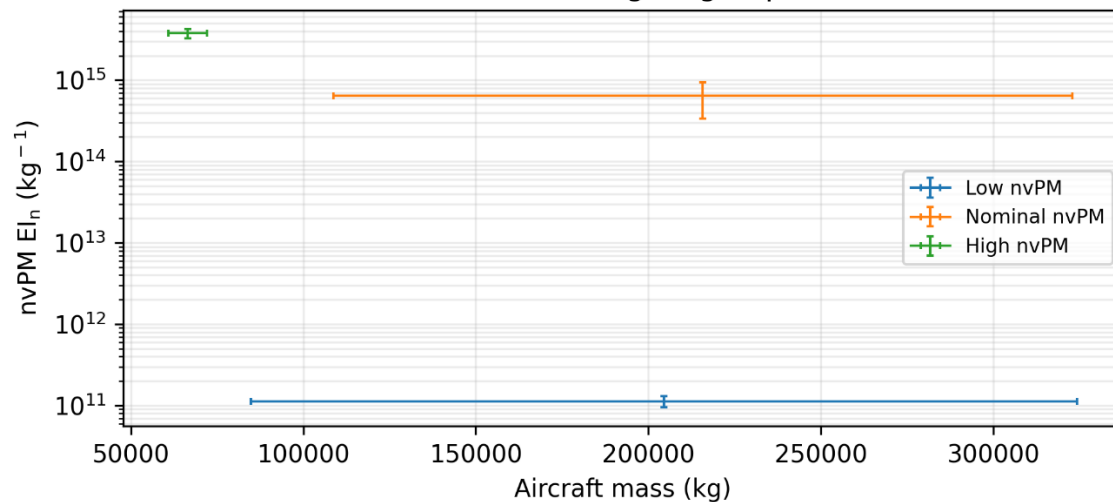

755 **Figure A7: Range of aircraft mass and nvPM EI_n for each aircraft-engine group when they are clustered into 3 groups. The error bars for each data point represent one standard deviation of these values, which are provided by the 2019 global aviation emissions inventory based on ADS-B (GAIA) (Teoh et al., 2024b).**

Table A3: Classification of the commonly used passenger aircraft-engine types into 5 unique groups based on their similarities in aircraft mass and nvPM EI_n.

Aircraft-engine classification		nvPM EI _n		
		Low	Nominal	High
Aircraft mass	Light	<ul style="list-style-type: none"> • A19N (LEAP-1A) • A20N (LEAP-1A) • A21N (LEAP-1A) • B38M (LEAP-1B) 	<ul style="list-style-type: none"> • A319 (CFM56) • A320 (CFM56) • A321 (CFM56) • B737 (CFM56) • B738 (CFM56) • B739 (CFM56) • B752 (RB211) • B753 (RB211) • B762 (CF6-80E) • B763 (CF6-80E) 	<ul style="list-style-type: none"> • A19N (Pratt & Whitney) • A20N (Pratt & Whitney) • A21N (Pratt & Whitney) • A319 (IAE V2500) • A320 (IAE V2500) • A321 (IAE V2500)
	Medium/Heavy	<ul style="list-style-type: none"> • B788 (GEnx) • B789 (GEnx) • B78X (GEnx) • B748 (GEnx) 	<ul style="list-style-type: none"> • A332 (Trent 700/CF6-80E) • A333 (Trent 700/CF6-80E) • A342 (CFM56/Trent500) • A343 (CFM56/Trent500) • A345 (CFM56/Trent500) • A346 (CFM56/Trent500) • A359 (Trent XWB) • A35K (Trent XWB) • A388 (Trent 900) • B742 (CF6-80C) • B743 (CF6-80C) • B744 (CF6-80C) • B772 (GE90) • B773 (GE90) • B77L (GE90) • B77W (GE90) • B788 (Trent 1000) • B789 (Trent 1000) • B78X (Trent 1000) 	N/A

760 **Table A4: Classification of the commonly used passenger aircraft-engine types into 4 unique groups based on their similarities in aircraft mass and nvPM EI_n.**

Aircraft-engine classification		nvPM EI _n		
		Low	Nominal/High	
Aircraft mass	Light	<ul style="list-style-type: none"> • A19N (LEAP-1A) • A20N (LEAP-1A) • A21N (LEAP-1A) • B38M (LEAP-1B) 	<ul style="list-style-type: none"> • A19N (Pratt & Whitney) • A20N (Pratt & Whitney) • A21N (Pratt & Whitney) • A319 (CFM56) • A319 (IAE V2500) • A320 (CFM56) • A320 (IAE V2500) • A321 (CFM56) 	<ul style="list-style-type: none"> • A321 (IAE V2500) • B737 (CFM56) • B738 (CFM56) • B739 (CFM56) • B752 (RB211) • B753 (RB211) • B762 (CF6-80E) • B763 (CF6-80E)
	Medium/Heavy	<ul style="list-style-type: none"> • B788 (GEnx) • B789 (GEnx) • B78X (GEnx) • B748 (GEnx) 	<ul style="list-style-type: none"> • A332 (Trent 700/CF6-80E) • A333 (Trent 700/CF6-80E) • A342 (CFM56/Trent500) • A343 (CFM56/Trent500) • A345 (CFM56/Trent500) • A346 (CFM56/Trent500) • A359 (Trent XWB) • A35K (Trent XWB) • A388 (Trent 900) • B742 (CF6-80C) 	<ul style="list-style-type: none"> • B743 (CF6-80C) • B744 (CF6-80C) • B772 (GE90) • B773 (GE90) • B77L (GE90) • B77W (GE90) • B788 (Trent 1000) • B789 (Trent 1000) • B78X (Trent 1000)

Table A5: Classification of the commonly used passenger aircraft-engine types into 3 unique groups based on their similarities in nvPM EIn.

Aircraft-engine classification				
nvPM EIn	Low	<ul style="list-style-type: none"> • A19N (LEAP-1A) • A20N (LEAP-1A) • A21N (LEAP-1A) 	<ul style="list-style-type: none"> • B38M (LEAP-1B) • B788 (GEnx) • B789 (GEnx) 	<ul style="list-style-type: none"> • B78X (GEnx) • B748 (GEnx)
	Nominal	<ul style="list-style-type: none"> • A319 (CFM56) • A320 (CFM56) • A321 (CFM56) • B737 (CFM56) • B738 (CFM56) • B739 (CFM56) • B752 (RB211) • B753 (RB211) • B762 (CF6-80E) • B763 (CF6-80E) 	<ul style="list-style-type: none"> • A332 (Trent 700/CF6-80E) • A333 (Trent 700/CF6-80E) • A342 (CFM56/Trent500) • A343 (CFM56/Trent500) • A345 (CFM56/Trent500) • A346 (CFM56/Trent500) • A359 (Trent XWB) • A35K (Trent XWB) • B772 (GE90) • B773 (GE90) 	<ul style="list-style-type: none"> • B77L (GE90) • B77W (GE90) • B788 (Trent 1000) • B789 (Trent 1000) • B78X (Trent 1000) • A388 (Trent 900) • B742 (CF6-80C) • B743 (CF6-80C) • B744 (CF6-80C)
	High	<ul style="list-style-type: none"> • A19N (Pratt & Whitney) • A20N (Pratt & Whitney) • A21N (Pratt & Whitney) 	<ul style="list-style-type: none"> • A319 (IAE V2500) • A320 (IAE V2500) • A321 (IAE V2500) 	

765

A5 Comparison metrics

Section 4 in the main text assessed the agreement in the simulated contrail climate forcing between the trajectory-based ($EF_{\text{contrail}}^{\text{traj}}$) and grid-based CoCiP ($EF_{\text{contrail}}^{\text{grid}}$) using four different approaches: (i) the false negative and false alarm rate; (ii) the modified mean absolute log error (modified-MALE); (iii) the weighted Kendall rank correlation coefficient (τ_w); and (iv) two custom performance curves (Platt et al., 2024) which evaluates the effectiveness of contrail mitigation when interventions are based on an imperfect prediction of the EF_{contrail} . Approaches (i) and (ii) evaluates the point-wise errors between $EF_{\text{contrail}}^{\text{traj}}$ and $EF_{\text{contrail}}^{\text{grid}}$ at each contrail segment, while approaches (iii) and (iv) assesses the model agreement at the fleet-aggregated level. Here, we provide a detailed description of approaches (ii), (iii), and (iv) and discuss the rationale behind their inclusion.

775 Firstly, the modified-MALE describes the relative errors in the magnitude of EF_{contrail} at each flight segment, and is calculated based on the actual (F_{true}) and predicted ($F_{\text{predicted}}$) EF_{contrail} ,

$$\text{MALE} = \frac{\sum_{i=1}^{i=N} |L_{\text{true},i} - L_{\text{pred},i}|}{N}, \text{ where} \quad (\text{A5})$$

$$L_{x,i} = \text{sgn}(F_{x,i}) \times \max\left(\log\left(\frac{1+|F_{x,i}|}{|F_{\text{min}}|}\right), 0\right). \quad (\text{A6})$$

780 N represents the total number of data points in the sample, the subscript x denotes the true or predicted EF_{contrail} , $\text{sgn}(F_{x,i})$ is the sign of $F_{x,i}$ (1 or -1), and F_{min} is set to 10^7 J m^{-1} . The modified-MALE calculates the average errors between $EF_{\text{contrail}}^{\text{traj}}$ and $EF_{\text{contrail}}^{\text{grid}}$ at the flight waypoint level, with a focus on accurately predicting moderately and strongly warming and cooling

contrail segments. It achieves this by minimising the impact of prediction errors in segments with a weak $EF_{\text{contrail}} (< 10^7 \text{ J m}^{-1})$. A value of 1 implies that, on average, the $EF_{\text{contrail}}^{\text{grid}}$ is off by one order of magnitude relative to $EF_{\text{contrail}}^{\text{traj}}$.

785 Secondly, we calculate τ_w to assess the grid-based CoCiP's accuracy in ranking flight segments according to their magnitude of EF_{contrail} ,

$$\tau_w = \frac{\sum_{i < j} w_{ij} \times \text{sgn}(F_{\text{true},i} - F_{\text{true},j}) \times \text{sgn}(F_{\text{pred},i} - F_{\text{pred},j})}{\sum_{i < j} w_{ij}}, \text{ where} \quad (\text{A7})$$

$$w_{ij} = F_{\text{true},i} + F_{\text{true},j}. \quad (\text{A8})$$

790 τ_w measures the correlation between two rankings based on the proportion of concordant and discordant pairs. A τ_w value of 1 indicates a perfect match between the rankings, a value of 0 indicates an absence of association between F_{true} and F_{pred} , while a value of -1 means that no pairs share the same ordering. For the purposes of evaluating the grid-based CoCiP, we only include flight waypoints if $F_{\text{true}} > F_{\text{min}} (= 10^7 \text{ J m}^{-1})$, and the w_{ij} term is introduced to assign larger weights to correctly rank flight segments with a large EF_{contrail} , consistent with the approach used in the modified-MALE. The primary distinction between the
 795 modified-MALE and τ_w lies in their treatment of pointwise errors (i.e., difference in the magnitude of EF_{contrail} between the trajectory-based and grid-based CoCiP), where τ_w disregards these errors unless they are significant enough to alter their relative rankings.

Thirdly, the two performance curves are formulated to measure the impact of model errors on the effectiveness of contrail
 800 mitigation when interventions are prioritised to specific flight segments based on an imperfect prediction of the EF_{contrail} per flight distance. More specifically, the performance curves are constructed with the following steps:

1. Given the $EF_{\text{contrail}}^{\text{traj}}$ and $EF_{\text{contrail}}^{\text{grid}}$ per flight distance on a common set of contrail segments (indexed from $i = 1$ to N), sort the waypoint indices into two distinct lists of $p_{\text{traj}}(i)$ and $p_{\text{grid}}(i)$. More specifically, $p_{\text{traj}}(i)$ sorts the $EF_{\text{contrail}}^{\text{traj}}$ from largest to smallest and represents prioritising flight segments for mitigation based on perfect knowledge of the contrail
 805 climate forcing, while $p_{\text{grid}}(i)$ sorts the $EF_{\text{contrail}}^{\text{grid}}$ per flight distance from largest to smallest and represents prioritisations based on an imperfect prediction of the contrail climate forcing.
2. Calculate four cumulative sums, $F(x)$, for the EF_{contrail} per flight distance and flight segment lengths (L) for the trajectory-based and grid-based CoCiP,

$$F(EF_{\text{contrail},k}^{\text{traj}}) = \sum_{p_{\text{traj}}(i)=1}^k EF_{\text{contrail},i}^{\text{traj}}, \quad (\text{A9})$$

$$810 \quad F(L_k^{\text{traj}}) = \sum_{p_{\text{traj}}(i)=1}^k L_i, \quad (\text{A10})$$

$$F(EF_{\text{contrail},k}^{\text{grid}}) = \sum_{p_{\text{grid}}(i)=1}^k EF_{\text{contrail},i}^{\text{traj}}, \text{ and} \quad (\text{A11})$$

$$F(L_k^{\text{grid}}) = \sum_{p_{\text{grid}}(i)=1}^k L_i, \quad (\text{A12})$$

3. Construct two absolute cumulative density functions by plotting $F(\text{EF}_{\text{contrail},k}^{\text{traj}})$ versus $F(L_k^{\text{traj}})$ and $F(\text{EF}_{\text{contrail},k}^{\text{grid}})$ versus $F(L_k^{\text{grid}})$, both of which represents the performance curves for the trajectory-based and grid-based CoCiP respectively.

815

An example of these performance curves is shown in Fig. 2 in the main text. We then use these performance curves to derive two metrics that evaluates the effectiveness of contrail mitigation based on imperfect knowledge of the $\text{EF}_{\text{contrail}}$:

• The change in initial mitigation rate, i.e., the relative reduction in $\text{EF}_{\text{contrail}}$ per unit of re-routed flight distance for the most strongly warming contrails, which is estimated as the gradient of a secant line (m) from the origin to the 5th percentile of

820

$$F(\text{EF}_{\text{contrail}}^{\text{traj}}) \text{ and } F(\text{EF}_{\text{contrail}}^{\text{grid}}) \text{ and expressed as a ratio of } \frac{m_{k=5}^{\text{grid}}}{m_{k=5}^{\text{traj}}}, \text{ and}$$

• The change in the total flight distance flown that contributes to 80% of the total $\text{EF}_{\text{contrail}}$, which is estimated as a ratio of

$$\frac{F(L_{k=80}^{\text{grid}})}{F(L_{k=80}^{\text{traj}})}.$$

In essence, $\frac{m_{k=5}^{\text{grid}}}{m_{k=5}^{\text{traj}}} (< 1)$ quantifies the reduced effectiveness of the grid-based CoCiP in mitigating the most strongly warming

825 contrails when compared to the trajectory-based CoCiP; while $\frac{F(L_{k=80}^{\text{grid}})}{F(L_{k=80}^{\text{traj}})} (> 1)$ measures the additional effort that is required to

mitigate 80% of the total $\text{EF}_{\text{contrail}}$ when imperfect predictions are used. Table 4 summarises the performance metrics when various configurations of the grid-based CoCiP (i.e., original aircraft-engine type and with different aircraft-engine groupings) are evaluated against the trajectory-based CoCiP. Figure A8 shows the mean percentage error across all performance metrics when comparing the grid-based CoCiP with different aircraft-engine groupings ($1 \leq N \leq 12$) relative to the configuration

830 using the exact aircraft-engine type.

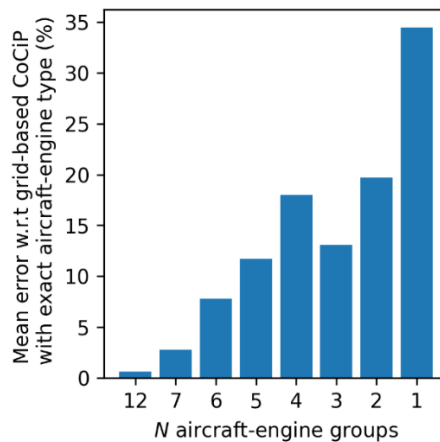


Figure A8: Mean percentage error across all performance metrics for different grid-based CoCiP configurations ($1 \leq N \leq 12$) compared to the configuration using exact aircraft-engine types.

A6 Flight trajectory optimizer

835 In Section 5.2, we used an in-house flight trajectory optimizer together with the 4D EF_{contrail} per flight distance provided by
the grid-based CoCiP to minimise the total CO_2 mass-equivalent emissions ($m_{\text{CO}_2 \text{ eq, total}} = m_{\text{CO}_2 \text{ eq, fuel}} + m_{\text{CO}_2 \text{ eq, contrails}}$) from
a historical transatlantic flight, where $m_{\text{CO}_2 \text{ eq, contrails}}$ is calculated using Eq. (8). Here, we describe the algorithm of the flight
trajectory optimizer. We note that this flight trajectory optimizer is not intended to create trajectories that could be used in
real-world operations, but rather as a heuristic to estimate the time and fuel costs associated with contrail mitigation, and to
840 demonstrate the utility of the contrail forecasts in flight planning.

The optimizer attempts to make realistic trajectories by implementing two constraints: (i) restricting the aircraft cruise altitude
at designated flight levels, typically in increments of 2,000 feet; and (ii) requiring that the aircraft maintains a specific flight
level for a minimum duration of 90 minutes between step climbs. Constraint (i) aims to account for the established airspace
845 structure, which typically dictates vertical separation of flights travelling in opposite directions at intervals of 1,000 feet (ICAO,
2016); while constraint (ii) attempts to capture constraints in airspace capacity and air traffic controller workload, where flights
are typically not permitted to perform frequent step changes in cruise altitude (Filippone, 2015; Tobaruela, 2015). We also do
not consider a full 4D flight trajectory optimization in this work. Instead, the optimization is only performed in two dimensions,
namely time and altitude, while retaining the original horizontal flight path.

850

The main input parameter of the flight trajectory optimizer is the Cost Index (CI), which is defined as the ratio between the
time and fuel related fuel costs, and the optimizer minimises the weighted objective function that combines time costs, CO_2
and contrail costs. The flight trajectory is divided into equal flight segments, where each segment will be traversed in
approximately five minutes at a near optimal cruise speed. The search space used to find the optimal trajectory is then
855 constrained to a 2D grid representing the flight segments (i.e., horizontal axis) and flight level (i.e., vertical axis). For the flight
trajectory used in Section 5.2, the horizontal axis consisted of 207 segments, each approximately 44.8 km in length, and vertical
axis represents the altitude that is divided in increments of 2,000 feet between a specified minimum (assumed to be 26,000
feet) and maximum altitude (assumed to be the maximum operating altitude of the aircraft). We also ensure that the step
climb/descent performed at each flight segment is realistic and does not exceed a nominal rate of climb and descent (ROCD)
860 of 500 feet per minute.

The flight trajectory optimizer performs a breadth-first Dykstra-like search across the 2D search space. Starting from the initial
point of the horizontal grid and the lowest flight level, the algorithm iterates through each of the feasible grid points to
determine the optimal Mach number (M_{opt}) for the given aircraft type and CI. The M_{opt} that minimizes the total cost of cruise
865 at each flight segment is given by:

$$M_{\text{opt}} = \underset{M}{\operatorname{argmin}} \left(\frac{CI + \Delta m(M)}{V_{\text{TAS}}} \right), \quad (\text{A13})$$

where the CI is assumed to be 60 in this study, $\Delta m(M)$ is the fuel burn over this flight segment for a given Mach number (M), and V_{TAS} is the aircraft true airspeed. The fuel burn for the original and alternative flight paths, which represent different cruise altitude options, is computed using the Poll-Schumann (PS) aircraft performance model (Poll and Schumann, 2020, 2021, 870 2024). The estimated fuel burn accounts for various input parameters such as the aircraft type, ambient air temperature, ambient wind conditions (which influence V_{TAS}), and aircraft mass. We then define a set of allowed actions for the aircraft to transition to the next flight segment:

- If the aircraft is at the starting point of the search, it is allowed to stay level or climb,
- If the aircraft remained level during the last horizontal segment, it must continue to remain level unless it exceeded the 875 specified time interval (> 90 minutes) since the last altitude change,
- If the aircraft was climbing or descending during the last horizontal segment, it must maintain its current climb and descent until it has reached an allowed flight level for cruise, at which point it has the option to remain level or continue its climb or descent, and
- Each action is allowed only if the required thrust and lift are within the rated operating conditions of the aircraft, as 880 determined by the PS model.

At each grid point reached through an allowed action, the algorithm compares the cumulative cost of the current flight trajectory with any previously identified optimal path to that same grid point. During each iteration, the algorithm only saves the lowest-cost path for reaching the designated grid point. The search concludes once it has examined every viable grid point, 885 and the optimal trajectory is reconstructed by starting from the final grid point and retracing the sequence of actions that were previously taken to reach that point. We note that the optimized flight trajectories are not checked for practical usage, and a real-world flight trajectory optimization needs to consider practical flight and air traffic management constraints, such as the minimum separation between aircraft, airspace congestion and design (i.e., North Atlantic Organised Track Structure), and air traffic controller workload (Molloy et al., 2022).

890 **Author contributions**

MS and MEJS conceptualised the study. ZE, RT, TA, TD, MEJS and MS developed the methodology and undertook the investigation. ZE, RT, TA, TD and MS were responsible for software development and data curation. RT, TA and TD created or sourced the figures. RT, TA, and TD wrote the original manuscript. MS acquired funding. All authors have read, edited, and reviewed the manuscript, and agreed upon the published version of the paper.

895 **Model & Data availability**

The pycontrails repository that contains the algorithms for the Poll-Schumann (PS) aircraft performance model, the trajectory-based CoCiP (Cocip), and the grid-based CoCiP (CocipGrid) is publicly available at <https://doi.org/10.5281/zenodo.7776686>. The grid-based CoCiP can also be accessed via an Application Programming Interface (API) at <https://api.contrails.org> and <https://forecast.contrails.org>. This document contains Copernicus Climate Change Service information from 2024. Neither the
900 European Commission nor the ECMWF is responsible for any use of the Copernicus information.

Competing interests

The authors declare that they have no conflict of interest.

References

- Agarwal, A., Meijer, V. R., Eastham, S. D., Speth, R. L., and Barrett, S. R. H.: Reanalysis-driven simulations may overestimate
905 persistent contrail formation by 100-250%, *Environmental Research Letters*, 17, 1–14, <https://doi.org/10.1088/1748-9326/AC38D9>, 2022.
- American Airlines: American Airlines participates in first-of-its-kind research on contrail avoidance, <https://news.aa.com/news/news-details/2023/American-Airlines-participates-in-first-of-its-kind-research-on-contrail-avoidance-CORP-OTH-08/default.aspx> (last access: 6 May 2024), 2023.
- 910 Bickel, M.: Climate Impact of Contrail Cirrus, PhD thesis/dissertation, Faculty of Physics, LMU Munich, <https://doi.org/10.57676/MZMG-R403>, 2023.
- Bickel, M., Ponater, M., Bock, L., Burkhardt, U., and Reineke, S.: Estimating the Effective Radiative Forcing of Contrail Cirrus, *J Clim*, 33, 1991–2005, <https://doi.org/10.1175/JCLI-D-19-0467.1>, 2019.
- Bier, A. and Burkhardt, U.: Impact of Parametrizing Microphysical Processes in the Jet and Vortex Phase on Contrail Cirrus
915 Properties and Radiative Forcing, *Journal of Geophysical Research: Atmospheres*, 127, e2022JD036677, <https://doi.org/10.1029/2022JD036677>, 2022.
- Borella, A., Boucher, O., Shine, K., Stettler, M. E. J., Tanaka, K., Teoh, R., and Bellouin, N.: The importance of an informed choice of CO₂-equivalence metrics for contrail avoidance [Pre-print], *EGUsphere*, <https://doi.org/https://doi.org/10.5194/egusphere-2024-347>, 2024.
- 920 Boucher, O., Randall, D., Artaxo, P., Bretherton, C., Feingold, G., Forster, P., Kerminen, V. M., Kondo, Y., Liao, H., Lohmann, U., and Rasch, P.: Clouds and aerosols. In *Climate change 2013: the physical science basis. Contribution of Working Group I*

- to the Fifth Assessment Report of the Intergovernmental Panel on Climate Change (pp. 571-657)., Cambridge University Press., 2013.
- Bräuer, T., Voigt, C., Sauer, D., Kaufmann, S., Hahn, V., Scheibe, M., Schlager, H., Diskin, G. S., Nowak, J. B., DiGangi, J. P., Huber, F., Moore, R. H., and Anderson, B. E.: Airborne Measurements of Contrail Ice Properties—Dependence on Temperature and Humidity, *Geophys Res Lett*, 48, e2020GL092166, <https://doi.org/10.1029/2020GL092166>, 2021.
- Caiazzo, F., Agarwal, A., Speth, R. L., and Barrett, S. R. H.: Impact of biofuels on contrail warming, *Environmental Research Letters*, 12, 114013, <https://doi.org/https://doi.org/10.1088/1748-9326/aa893b>, 2017.
- Chen, C. C. and Gettelman, A.: Simulated radiative forcing from contrails and contrail cirrus, *Atmos Chem Phys*, 13, 12525–12536, <https://doi.org/10.5194/acp-13-12525-2013>, 2013.
- Dietmüller, S., Matthes, S., Dahlmann, K., Yamashita, H., Simorgh, A., Soler, M., Linke, F., Lührs, B., Meuser, M. M., Weder, C., Grewe, V., Yin, F., and Castino, F.: A Python library for computing individual and merged non-CO₂ algorithmic climate change functions: CLIMaCCF V1.0, *Geosci Model Dev*, 16, 4405–4425, <https://doi.org/10.5194/GMD-16-4405-2023>, 2023.
- Driver, O. G. A., Stettler, M. E. J., and Gryspeerdt, E.: Factors limiting contrail detection in satellite imagery [Pre-print], *EGUsphere*, <https://doi.org/https://doi.org/10.5194/egusphere-2024-2198>, 2024.
- Duda, D. P., Bedka, S. T., Minnis, P., Spangenberg, D., Khlopenkov, K., Chee, T., and Smith, W. L.: Northern Hemisphere contrail properties derived from Terra and Aqua MODIS data for 2006 and 2012, *Atmos Chem Phys*, 19, 5313–5330, <https://doi.org/10.5194/ACP-19-5313-2019>, 2019.
- EASA: ICAO Aircraft Engine Emissions Databank (07/2021), EASA [data set], <https://www.easa.europa.eu/domains/environment/icao-aircraft-engine-emissions-databank> (last access: 15 February 2022), 2021.
- ECMWF: Atmospheric Model high resolution 10-day forecast (Set I - HRES), ECMWF [data set] <https://www.ecmwf.int/en/forecasts/datasets/set-i> (last access: 17 April 2024), 2024.
- Edwards, H. A., Dixon-Hardy, D., and Wadud, Z.: Aircraft cost index and the future of carbon emissions from air travel, *Appl Energy*, 164, 553–562, <https://doi.org/10.1016/J.APENERGY.2015.11.058>, 2016.
- Elkin, C. and Sanekommu, D.: How AI is helping airlines mitigate the climate impact of contrails, Google, <https://blog.google/technology/ai/ai-airlines-contrails-climate-change/> (last access: 12 March 2024), 2023.
- European Commission: Directive (EU) 2023/958 of the European Parliament and of the Council of 10 May 2023, European Commission, <https://eur-lex.europa.eu/legal-content/EN/TXT/PDF/?uri=CELEX:32023L0958> (last access: 6 May 2024), 2023.

- Filippone, A.: Assessment of aircraft contrail avoidance strategies, *J Aircr*, 52, 872–877, <https://doi.org/10.2514/1.C033176>, 2015.
- Fritz, T. M., Eastham, S. D., Speth, R. L., and Barrett, S. R. H.: The role of plume-scale processes in long-term impacts of aircraft emissions, *Atmos Chem Phys*, 20, 5697–5727, <https://doi.org/10.5194/ACP-20-5697-2020>, 2020.
- 955 Frömming, C., Grewe, V., Brinkop, S., Jöckel, P., Haslerud, A. S., Rosanka, S., Van Manen, J., and Matthes, S.: Influence of weather situation on non-CO₂ aviation climate effects: The REACT4C climate change functions, *Atmos Chem Phys*, 21, 9151–9172, <https://doi.org/10.5194/ACP-21-9151-2021>, 2021.
- Gaillet, T., Beauchet, S., Lorne, D., and Krim, L.: The impact of fossil jet fuel emissions at altitude on climate change: A life cycle assessment study of a long-haul flight at different time horizons, *Atmos Environ*, 311, 119983, 960 <https://doi.org/10.1016/J.ATMOENV.2023.119983>, 2023.
- Geraedts, S., Brand, E., Dean, T. R., Eastham, S., Elkin, C., Engberg, Z., Hager, U., Langmore, I., McCloskey, K., Ng, J. Y.-H., Platt, J. C., Sankar, T., Sarna, A., Shapiro, M., and Goyal, N.: A scalable system to measure contrail formation on a per-flight basis, <https://arxiv.org/abs/2308.02707v6>, 2023.
- Gottelman, A., Chen, C. C., and Bardeen, C. G.: The climate impact of COVID-19-induced contrail changes, *Atmos Chem Phys*, 21, 9405–9416, <https://doi.org/10.5194/ACP-21-9405-2021>, 2021.
- 965 Gierens, K., Matthes, S., and Rohs, S.: How Well Can Persistent Contrails Be Predicted?, *Aerospace*, 7, 169, <https://doi.org/10.3390/AEROSPACE7120169>, 2020.
- Grewe, V., Frömming, C., Matthes, S., Brinkop, S., Ponater, M., Dietmüller, S., Jöckel, P., Garny, H., Tsati, E., Dahlmann, K., Søvde, O. A., Fuglestedt, J., Berntsen, T. K., Shine, K. P., Irvine, E. A., Champougny, T., and Hullah, P.: Aircraft routing 970 with minimal climate impact: the REACT4C climate cost function modelling approach (V1.0), *Geosci Model Dev*, 7, 175–201, <https://doi.org/10.5194/gmd-7-175-2014>, 2014.
- Grewe, V., Matthes, S., Frömming, C., Brinkop, S., Jöckel, P., Gierens, K., Champougny, T., Fuglestedt, J., Haslerud, A., and Irvine, E.: Feasibility of climate-optimized air traffic routing for trans-Atlantic flights, *Environmental Research Letters*, 12, 34003, <https://doi.org/10.1088/1748-9326/aa5ba0>, 2017.
- 975 Haywood, J. M., Allan, R. P., Bornemann, J., Forster, P. M., Francis, P. N., Milton, S., Rädcl, G., Rap, A., Shine, K. P., and Thorpe, R.: A case study of the radiative forcing of persistent contrails evolving into contrail-induced cirrus, *Journal of Geophysical Research: Atmospheres*, 114, D24201, <https://doi.org/10.1029/2009JD012650>, 2009.
- Hersbach, H., Bell, B., Berrisford, P., Hirahara, S., Horányi, A., Muñoz-Sabater, J., Nicolas, J., Peubey, C., Radu, R., Schepers, D., Simmons, A., Soci, C., Abdalla, S., Abellan, X., Balsamo, G., Bechtold, P., Biavati, G., Bidlot, J., Bonavita, M., De Chiara, 980 G., Dahlgren, P., Dee, D., Diamantakis, M., Dragani, R., Flemming, J., Forbes, R., Fuentes, M., Geer, A., Haimberger, L.,

- Healy, S., Hogan, R. J., Hólm, E., Janisková, M., Keeley, S., Laloyaux, P., Lopez, P., Lupu, C., Radnoti, G., de Rosnay, P., Rozum, I., Vamborg, F., Villaume, S., and Thépaut, J. N.: The ERA5 global reanalysis, *Quarterly Journal of the Royal Meteorological Society*, 146, 1999–2049, <https://doi.org/10.1002/qj.3803>, 2020.
- Hofer, S. M., Gierens, K., and Rohs, S.: How well can persistent contrails be predicted? - An update [pre-print], *EGUsphere*, 985 <https://doi.org/https://doi.org/10.5194/egusphere-2024-385>, 2024.
- Holzappel, F.: Probabilistic Two-Phase Wake Vortex Decay and Transport Model, *J Aircr*, 40, 323–331, <https://doi.org/10.2514/2.3096>, 2003.
- ICAO: Air Traffic Management - Procedures for Air Navigation Services, International Civil Aviation Organisation, <http://flightservicebureau.org/wp-content/uploads/2017/03/ICAO-Doc4444-Pans-Atm-16thEdition-2016-OPSGROUP.pdf> 990 (last access: 6 May 2024), Montreal, Canada, 2016.
- Jeßberger, P., Voigt, C., Schumann, U., Sölch, I., Schlager, H., Kaufmann, S., Petzold, A., Schäuble, D., and Gayet, J.-F.: Aircraft type influence on contrail properties, *Atmos Chem Phys*, 13, 11965–11984, <https://doi.org/10.5194/acp-13-11965-2013>, 2013.
- Kärcher, B.: Formation and radiative forcing of contrail cirrus, *Nat Commun*, 9, 1824, <https://doi.org/10.1038/s41467-018-99504068-0>, 2018.
- Kärcher, B. and Yu, F.: Role of aircraft soot emissions in contrail formation, *Geophys Res Lett*, 36, L01804, <https://doi.org/10.1029/2008GL036649>, 2009.
- Kärcher, B., Burkhardt, U., Bier, A., Bock, L., and Ford, I. J.: The microphysical pathway to contrail formation, *Journal of Geophysical Research: Atmospheres*, 120, 7893–7927, <https://doi.org/10.1002/2015JD023491>, 2015.
- 1000 Lee, D. S., Fahey, D. W., Skowron, A., Allen, M. R., Burkhardt, U., Chen, Q., Doherty, S. J., Freeman, S., Forster, P. M., Fuglestvedt, J., Gettelman, A., De León, R. R., Lim, L. L., Lund, M. T., Millar, R. J., Owen, B., Penner, J. E., Pitari, G., Prather, M. J., Sausen, R., and Wilcox, L. J.: The contribution of global aviation to anthropogenic climate forcing for 2000 to 2018, *Atmos Environ*, 244, 117834, <https://doi.org/10.1016/J.ATMOSENV.2020.117834>, 2021.
- Lewellen, D. C.: Persistent contrails and contrail cirrus. Part II: Full lifetime behavior, *J Atmos Sci*, 71, 4420–4438, 1005 <https://doi.org/10.1175/JAS-D-13-0317.1>, 2014.
- Lewellen, D. C., Meza, O., Huebsch, W. W., Lewellen, D. C., Meza, O., and Huebsch, W. W.: Persistent Contrails and Contrail Cirrus. Part I: Large-Eddy Simulations from Inception to Demise, *J Atmos Sci*, 71, 4399–4419, <https://doi.org/10.1175/JAS-D-13-0316.1>, 2014.
- Lovegren, J. A. and Hansman, R. J.: Estimation of Potential Aircraft Fuel Burn Reduction in Cruise Via Speed and Altitude 1010 Optimization Strategies, <https://dspace.mit.edu/handle/1721.1/62196>, 2011.

- Low, J., Teoh, R., Ponsonby, J., Gryspeerd, E., Shapiro, M., and Stettler, M. E. J.: Ground-based contrail observations: comparisons with flight telemetry and contrail model estimates, *EGU Sphere*, 1–25, <https://doi.org/10.5194/EGUSPHERE-2024-1458>, 2024.
- 1015 Mannstein, H., Brömser, A., and Bugliaro, L.: Ground-based observations for the validation of contrails and cirrus detection in satellite imagery, *Atmos Meas Tech*, 3, 655–669, <https://doi.org/10.5194/amt-3-655-2010>, 2010.
- Martin Frias, A., Shapiro, M., Engberg, Z., Zopp, R., Soler, M., and Stettler, M. E. J.: Feasibility of contrail avoidance in a commercial flight planning system: an operational analysis, *Environmental Research: Infrastructure and Sustainability*, 4, <https://doi.org/10.1088/2634-4505/ad310c>, 2024.
- 1020 Mayer, B. and Kylling, A.: Technical note: The libRadtran software package for radiative transfer calculations - description and examples of use, *Atmos Chem Phys*, 5, 1855–1877, <https://doi.org/10.5194/acp-5-1855-2005>, 2005.
- Meerkötter, R., Schumann, U., Doelling, D. R., Minnis, P., Nakajima, T., and Tsushima, Y.: Radiative forcing by contrails, *Ann Geophys*, 17, 1080–1094, <https://doi.org/10.1007/s00585-999-1080-7>, 1999.
- Molloy, J., Teoh, R., Harty, S., Koudis, G., Schumann, U., Poll, I., and Stettler, M. E. J.: Design Principles for a Contrail-Minimizing Trial in the North Atlantic, *Aerospace*, 9, 375, <https://doi.org/10.3390/AEROSPACE9070375>, 2022.
- 1025 Platt, J., Shapiro, M., Engberg, Z., McCloskey, K., Geraedts, S., Sankar, T., Stettler, M. E. J., Teoh, R., Schumann, U., Rohs, S., Brand, E., and Van Arsdale, C.: The effect of uncertainty in humidity and model parameters on the prediction of contrail energy forcing, *Environ Res Commun*, <https://doi.org/https://doi.org/10.1088/2515-7620/ad6ee5>, 2024.
- Poll, D. I. A.: 21st-Century civil aviation: Is it on course or is it over-confident and complacent? – thoughts on the conundrum of aviation and the environment, *The Aeronautical Journal*, 121, 115–140, <https://doi.org/10.1017/aer.2016.140>, 2017.
- 1030 Poll, D. I. A. and Schumann, U.: An estimation method for the fuel burn and other performance characteristics of civil transport aircraft in the cruise. Part 1 fundamental quantities and governing relations for a general atmosphere, *The Aeronautical Journal*, 1–39, <https://doi.org/10.1017/aer.2020.62>, 2020.
- Poll, D. I. A. and Schumann, U.: An estimation method for the fuel burn and other performance characteristics of civil transport aircraft during cruise: part 2, determining the aircraft’s characteristic parameters, *The Aeronautical Journal*, 125, 296–340, <https://doi.org/10.1017/AER.2020.124>, 2021.
- 1035 Poll, D. I. A. and Schumann, U.: On the conditions for absolute minimum fuel burn for turbofan powered, civil transport aircraft and a simple model for wave drag, *The Aeronautical Journal*, 1–33, <https://doi.org/10.1017/AER.2024.10>, 2024.
- Ponater, M., Marquart, S., Sausen, R., and Schumann, U.: On contrail climate sensitivity, *Geophys Res Lett*, 32, <https://doi.org/10.1029/2005GL022580>, 2005.

- 1040 Ponater, M., Bickel, M., Bock, L., and Burkhardt, U.: Towards Determining the Contrail Cirrus Efficacy, *Aerospace*, 8, 42, <https://doi.org/10.3390/AEROSPACE8020042>, 2021.
- Quante, G., Voß, S., Bullerdiek, N., Voigt, C., and Kaltschmitt, M.: Hydroprocessing of fossil fuel-based aviation kerosene – Technology options and climate impact mitigation potentials, *Atmos Environ X*, 22, 100259, <https://doi.org/10.1016/J.AEAOA.2024.100259>, 2024.
- 1045 Rap, A., Forster, P. M., Haywood, J. M., Jones, A., and Boucher, O.: Estimating the climate impact of linear contrails using the UK Met Office climate model, *Geophys Res Lett*, 37, <https://doi.org/10.1029/2010GL045161>, 2010.
- Rennert, K., Errickson, F., Prest, B. C., Rennels, L., Newell, R. G., Pizer, W., Kingdon, C., Wingenroth, J., Cooke, R., Parthum, B., Smith, D., Cromar, K., Diaz, D., Moore, F. C., Müller, U. K., Plevin, R. J., Raftery, A. E., Ševčíková, H., Sheets, H., Stock, J. H., Tan, T., Watson, M., Wong, T. E., and Anthoff, D.: Comprehensive evidence implies a higher social cost of CO₂, *Nature* 2022 610:7933, 610, 687–692, <https://doi.org/10.1038/s41586-022-05224-9>, 2022.
- 1050 Rosenow, J., Hospodka, J., Lán, S., and Fricke, H.: Validation of a Contrail Life-Cycle Model in Central Europe, *Sustainability* 2023, Vol. 15, Page 8669, 15, 8669, <https://doi.org/10.3390/SU15118669>, 2023.
- Rubnich, M. and Delaura, R.: An algorithm to identify robust convective weather avoidance polygons in en route airspace, 10th AIAA Aviation Technology, Integration and Operations Conference 2010, ATIO 2010, 2, <https://doi.org/10.2514/6.2010-9164>, 2010.
- 1055 Santer, B. D., Sausen, R., Wigley, T. M. L., Boyle, J. S., AchutaRao, K., Doutriaux, C., Hansen, J. E., Meehl, G. A., Roeckner, E., Ruedy, R., Schmidt, G., and Taylor, K. E.: Behavior of tropopause height and atmospheric temperature in models, reanalyses, and observations: Decadal changes, *Journal of Geophysical Research: Atmospheres*, 108, ACL 1-1, <https://doi.org/10.1029/2002JD002258>, 2003.
- 1060 Sausen, R., Hofer, S. M., Gierens, K. M., Bugliaro Goggia, L., Ehrmantraut, R., Sitova, I., Walczak, K., Burrige-Diesing, A., Bowman, M., and Miller, N.: Can we successfully avoid persistent contrails by small altitude adjustments of flights in the real world?, *Meteorologische Zeitschrift*, <https://doi.org/10.1127/metz/2023/1157>, 2023.
- Schumann, U.: On conditions for contrail formation from aircraft exhausts, *Meteorologische Zeitschrift*, 5, 4–23, <https://doi.org/10.1127/metz/5/1996/4>, 1996.
- 1065 Schumann, U.: A contrail cirrus prediction tool, in: *Proceedings of the 2nd International Conference on Transport, Atmosphere and Climate (TAC-2)*, 69–74, <https://elib.dlr.de/68002/> (last access: 9 March 2024), 2010.
- Schumann, U.: A contrail cirrus prediction model, *Geosci Model Dev*, 5, 543–580, <https://doi.org/10.5194/gmd-5-543-2012>, 2012.

- Schumann, U. and Graf, K.: Aviation-induced cirrus and radiation changes at diurnal timescales, *Journal of Geophysical Research: Atmospheres*, 118, 2404–2421, <https://doi.org/10.1002/jgrd.50184>, 2013.
- 1070 Schumann, U. and Heymsfield, A. J.: On the lifecycle of individual contrails and contrail cirrus, *Meteorological Monographs*, 58, 3.1-3.24, <https://doi.org/10.1175/amsmonographs-d-16-0005.1>, 2017.
- Schumann, U. and Mayer, B.: Sensitivity of surface temperature to radiative forcing by contrail cirrus in a radiative-mixing model, *Atmos. Chem. Phys.*, 17, 13833–13848, <https://doi.org/10.5194/acp-17-13833-2017>, 2017.
- 1075 Schumann, U. and Wirth, M.: Optical depth of cirrus and embedded contrails from airborne Lidar and models, in: EGU General Assembly 2009, 5128, <https://ui.adsabs.harvard.edu/abs/2009EGUGA..11.5128S/abstract> (last access: 9 March 2024), 2009.
- Schumann, U., Mayer, B., Hamann, U., Graf, K.: Radiative heating in contrail cirrus, *Geophysical Research Abstracts*, 12 (EGU201), pp. 1-2, European Geophysical Union General Assembly 2010, 2010-05-02 – 2010-05-7, Wien, <https://elib.dlr.de/67811/> (last access: 5 December 2022), 2010.
- 1080 Schumann, U., Graf, K., and Mannstein, H.: Potential to reduce the climate impact of aviation by flight level changes, in: 3rd AIAA Atmospheric Space Environments Conference, <https://doi.org/10.2514/6.2011-3376>, 2011.
- Schumann, U., Mayer, B., Graf, K., and Mannstein, H.: A parametric radiative forcing model for contrail cirrus, *J Appl Meteorol Climatol*, 51, 1391–1406, <https://doi.org/10.1175/JAMC-D-11-0242.1>, 2012a.
- Schumann, U., Graf, K., Mannstein, H., and Mayer, B.: Contrails: Visible aviation induced climate impact, in: *Atmospheric Physics*, Springer, 239–257, https://doi.org/https://doi.org/10.1007/978-3-642-30183-4_15, 2012b.
- 1085 Schumann, U., Jeßberger, P., and Voigt, C.: Contrail ice particles in aircraft wakes and their climatic importance, *Geophys Res Lett*, 40, 2867–2872, <https://doi.org/10.1002/grl.50539>, 2013a.
- Schumann, U., Hempel, R., Flentje, H., Garhammer, M., Graf, K., Kox, S., Lösslein, H., and Mayer, B.: Contrail study with ground-based cameras, *Atmos Meas Tech*, 6, 3597–3612, <https://doi.org/10.5194/amt-6-3597-2013>, 2013b.
- 1090 Schumann, U., Penner, J. E., Chen, Y., Zhou, C., and Graf, K.: Dehydration effects from contrails in a coupled contrail–climate model, *Atmos Chem Phys*, 15, 11179–11199, <https://doi.org/10.5194/acp-15-11179-2015>, 2015.
- Schumann, U., Baumann, R., Baumgardner, D., Bedka, S., Duda, D., Freudenthaler, V., Gayet, J.-F., Heymsfield, A. J., Minnis, P., and Quante, M.: Properties of individual contrails: A compilation of observations and some comparisons, *Atmos Chem Phys*, 17, 1–62, <https://doi.org/10.5194/acp-17-403-2017>, 2017.
- 1095 Schumann, U., Poll, I., Teoh, R., Koelle, R., Spinielli, E., Molloy, J., Koudis, G. S., Baumann, R., Bugliaro, L., Stettler, M., and Voigt, C.: Air traffic and contrail changes over Europe during COVID-19: A model study, *Atmos Chem Phys*, 21, 7429–7450, <https://doi.org/10.5194/ACP-21-7429-2021>, 2021.

- Shapiro, M., Engberg, Z., Teoh, R., and Dean, T.: pycontrails: Python library for modeling aviation climate impacts, Zenodo, <https://doi.org/10.5281/zenodo.7776686>, 2023.
- 1100 Sonntag, D.: Advancements in the field of hygrometry, *Meteorologische Zeitschrift*, 3, 51–66, <https://doi.org/10.1127/metz/3/1994/51>, 1994.
- Teoh, R., Schumann, U., and Stettler, M. E. J.: Beyond Contrail Avoidance: Efficacy of Flight Altitude Changes to Minimise Contrail Climate Forcing, *Aerospace*, 7, 121, <https://doi.org/10.3390/aerospace7090121>, 2020a.
- Teoh, R., Schumann, U., Majumdar, A., and Stettler, M. E. J.: Mitigating the Climate Forcing of Aircraft Contrails by Small-Scale Diversions and Technology Adoption, *Environ Sci Technol*, 54, 2941–2950, <https://doi.org/10.1021/acs.est.9b05608>, 2020b.
- 1105 Teoh, R., Schumann, U., Gryspeerdt, E., Shapiro, M., Molloy, J., Koudis, G., Voigt, C., and Stettler, M.: Aviation Contrail Climate Effects in the North Atlantic from 2016–2021., *Atmos. Chem. Phys.*, 22, 10919–10935, <https://doi.org/https://doi.org/10.5194/acp-2022-169>, 2022a.
- 1110 Teoh, R., Schumann, U., Voigt, C., Schripp, T., Shapiro, M., Engberg, Z., Molloy, J., Koudis, G., and Stettler, M. E. J.: Targeted Use of Sustainable Aviation Fuel to Maximise Climate Benefits, *Environ Sci Technol*, 56, 17246–17255, <https://doi.org/https://doi.org/10.1021/acs.est.2c05781>, 2022b.
- Teoh, R., Engberg, Z., Schumann, U., Voigt, C., Shapiro, M., Rohs, S., and Stettler, M. E. J.: Global aviation contrail climate effects from 2019 to 2021, *Atmos Chem Phys*, 24, 6071–6093, <https://doi.org/10.5194/ACP-24-6071-2024>, 2024a.
- 1115 Teoh, R., Engberg, Z., Shapiro, M., Dray, L., and Stettler, M. E. J.: The high-resolution Global Aviation emissions Inventory based on ADS-B (GAIA) for 2019–2021, *Atmos Chem Phys*, 24, 725–744, <https://doi.org/10.5194/ACP-24-725-2024>, 2024b.
- Tobaruela, G.: A Framework to assess the ability of automation to deliver capacity targets in European airspace, PhD Thesis, <https://doi.org/10.25560/28150>, 2015.
- Turbli: Turbulence forecast for your flight, <https://turbli.com/> (last access: 15 April 2024), 2024.
- 1120 Unterstrasser, S.: Properties of young contrails: a parametrisation based on large-eddy simulations, *Atmos Chem Phys*, 16, 2059–2082, <https://doi.org/10.5194/acp-16-2059-2016>, 2016.
- Vázquez-Navarro, M., Mannstein, H., and Kox, S.: Contrail life cycle and properties from 1 year of MSG/SEVIRI rapid-scan images, *Atmos Chem Phys*, 15, 8739–8749, <https://doi.org/10.5194/acp-15-8739-2015>, 2015.
- Voigt, C., Schumann, U., Jurkat, T., Schäuble, D., Schlager, H., Petzold, A., Gayet, J.-F., Krämer, M., Schneider, J., Borrmann, S., Schmale, J., Jessberger, P., Hamburger, T., Lichtenstern, M., Scheibe, M., Gourbeyre, C., Meyer, J., Kübbeler, M., Frey, W., Kalesse, H., Butler, T., Lawrence, M. G., Holzäpfel, F., Arnold, F., Wendisch, M., Döpelheuer, A., Gottschaldt, K., Baumann, R., Zöger, M., Sölch, I., Rautenhaus, M., and Dörnbrack, A.: In-situ observations of young contrails – overview

and selected results from the CONCERT campaign, *Atmos Chem Phys*, 10, 9039–9056, <https://doi.org/10.5194/acp-10-9039-2010>, 2010.

- 1130 Voigt, C., Schumann, U., Minikin, A., Abdelmonem, A., Afchine, A., Borrmann, S., Boettcher, M., Buchholz, B., Bugliaro, L., Costa, A., Curtius, J., Dollner, M., Dörnbrack, A., Dreiling, V., Ebert, V., Ehrlich, A., Fix, A., Forster, L., Frank, F., Fütterer, D., Giez, A., Graf, K., Grooß, J. U., Groß, S., Heimerl, K., Heinold, B., Hüneke, T., Järvinen, E., Jurkat, T., Kaufmann, S., Kenntner, M., Klingebiel, M., Klimach, T., Kohl, R., Krämer, M., Krisna, T. C., Luebke, A., Mayer, B., Mertes, S., Molleker, S., Petzold, A., Pfeilsticker, K., Port, M., Rapp, M., Reutter, P., Rolf, C., Rose, D., Sauer, D., Schäfler, A., Schlage, R., Schnaiter, M., Schneider, J., Spelten, N., Spichtinger, P., Stock, P., Walser, A., Weigel, R., Weinzierl, B., Wendisch, M., Werner, F., Wernli, H., Wirth, M., Zahn, A., Ziereis, H., and Zöger, M.: ML-CIRRUS: The Airborne Experiment on Natural Cirrus and Contrail Cirrus with the High-Altitude Long-Range Research Aircraft HALO, *Bull Am Meteorol Soc*, 98, 271–288, <https://doi.org/10.1175/BAMS-D-15-00213.1>, 2017.

- Wilhelm, L., Gierens, K., and Rohs, S.: Weather Variability Induced Uncertainty of Contrail Radiative Forcing, *Aerospace* 2021, Vol. 8, Page 332, 8, 332, <https://doi.org/10.3390/AEROSPACE8110332>, 2021.

Wolf, K., Bellouin, N., Boucher, O., Rohs, S., and Li, Y.: Correction of temperature and relative humidity biases in ERA5 by bivariate quantile mapping: Implications for contrail classification [preprint], *EGUsphere*, <https://doi.org/10.5194/egusphere-2023-2356>, 2023a.

- Wolf, K., Bellouin, N., and Boucher, O.: Long-term upper-troposphere climatology of potential contrail occurrence over the Paris area derived from radiosonde observations, *Atmos Chem Phys*, 23, 287–309, <https://doi.org/10.5194/ACP-23-287-2023>, 2023b.

Wolf, K., Bellouin, N., and Boucher, O.: Distribution and morphology of non-persistent contrail and persistent contrail formation areas in ERA5, *Atmos Chem Phys*, 24, 5009–5024, <https://doi.org/10.5194/ACP-24-5009-2024>, 2024.