

The ASK-16 Motorized Glider: An Airborne Eddy Covariance Platform to measure Turbulence, Energy and Matter Fluxes

Inge Wiekenkamp¹, Anna Katharina Lehmann², Alexander Bütow⁶, Jörg Hartmann³, Stefan Metzger^{4,5},
5 Thomas Ruhtz², Christian Wille¹, Mathias Zöllner¹, Torsten Sachs¹

¹GFZ German Research Centre for Geosciences, Telegrafenberg, 14473 Potsdam, Germany

²Department of Earth Sciences, Freie Universität Berlin, Berlin, Germany

³Alfred Wegener Institute Helmholtz Centre for Polar and Marine Research (AWI), Am Handelshafen 12, 27570 Bremerhaven, Germany

10 ⁴AtmoFacts, 3570 Larkspur Court, Longmont, CO 80503, USA

⁵Department of Atmospheric and Oceanic Sciences, University of Wisconsin-Madison, 1225 W Dayton St, 53711 Madison, WI, USA

⁶Atmospheric Physics Branch, Bundeswehr Geoinformation Centre, Frauenberger Straße 250, 53879 Euskirchen

15 *Correspondence to:* Inge Wiekenkamp (inge.wiekenkamp@gfz-potsdam.de) and Torsten Sachs (torsten.sachs@gfz-potsdam.de)

Review Link for code and data:

Code: torsten.sachs@gfz-potsdam.de <https://dataservices.gfz-potsdam.de/panmetaworks/review/d90fdb42934e80433fd023573467869def28106003933100d7f2d78892e1fd/>

20 Data: <https://dataservices.gfz-potsdam.de/panmetaworks/review/d612e47508782aaca25613f742aae0eeca78b0e93430e70912927aefa60a5140/>

Abstract. Airborne eddy covariance measurements can bridge the gap between local (tower-based) to regional (satellite/inversion-derived) flux data, as they provide information about the spatial distribution of turbulent fluxes for larger regions. Here, we introduce an airborne eddy covariance measurement platform based on an ASK 16 touring motor glider (TMG; also referred to as a power glider, hereafter referred to as motorized glider), which is equipped to measure the three dimensional wind vector, atmospheric conditions and derive airborne turbulent fluxes for the use of measurement campaigns over European landscapes. This study describes the measurement setup of the platform, and explains the workflows that were used to calculate and calibrate the three-dimensional wind vector, turbulent fluxes and their associated source areas. The glider is equipped with an 858 AJ Rosemount five-hole probe, a Picarro G2311-f gas analyser, a Novatel FlexPak G2-V2 GNSS-INS system, Vaisala temperature and humidity sensors (HMT311), and an OMEGA CHAL-003 thermocouple temperature sensor. Measurement data is processed with PyWingpod (python) and eddy4R (R) software packages to calculate wind vectors, turbulent fluxes, and assign footprints to the calculated fluxes. To evaluate the quality of the obtained fluxes, different quality assessments have been performed, including the determination of detection limits, spectral

Style Definition: Nicht aufgelöste Erwähnung1

Style Definition: apple-converted-space

Style Definition: Unresolved Mention

Style Definition: review

Style Definition: Hyperlink: Font color: Dark Blue

Style Definition: Bullets: Outline numbered + Level: 1 + Numbering Style: Bullet + Aligned at: 0.25" + Tab after: 0" + Indent at: 0.5"

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: Internet Link, English (United States)

Formatted: English (United States)

Formatted: English (United States)

analysis, stationarity tests, the analysis of integral turbulence characteristics, and measurement noise and error evaluation. The uncertainty of w is between 0.15 to 0.27 m/s (median = 0.23 m/s) and the uncertainty of $\overline{-u}$ and v ranges between 0.16 to 0.55 m/s (median = 0.25 m/s). Analysis of exemplary flux data from flight transects indicates that the platform is capable of producing spatially highly resolved turbulent fluxes over heterogeneous landscapes. Overall, results from our analysis suggest that the ASK-16 airborne platform can ~~measuring~~measure turbulent fluxes with a similar quality as earlier established high quality platforms.

1 Introduction

Eddy covariance is the standard method to quantify the exchange of energy and matter fluxes in the atmospheric boundary layer (Baldocchi, 2003; Rebmann et al., 2018) and to understand their environmental drivers (e.g. Jung et al., 2020; Xu et al., 2017). Deployed from flux towers, eddy covariance provides observations with a high temporal resolution, but the spatial coverage of these observations is limited (Kaharabata et al., 1997). Airborne eddy covariance measurements, on the other hand, can quantify fluxes from local to regional scale (e.g. Hannun et al., 2020; Metzger et al., 2013; Serafimovich et al., 2018; Zulueta et al., 2011), and can additionally capture dispersive fluxes (Metzger et al., 2021; Wolfe et al., 2018). Therefore, airborne eddy covariance measurements provide a perfect base to complement tower measurements and can be combined with tower data to gain information content (Metzger et al., 2021; Zulueta et al., 2011). In addition, airborne measurement systems provide high spatial flexibility and provide the opportunity to measure turbulent fluxes in landscapes that are normally difficult to access (e.g. Tetzlaff et al., 2015).

To date, a large variety of airborne eddy covariance platforms have been developed. The first platforms already measured turbulent fluxes more than 40 years ago (Desjardins et al., 1982; Lenschow et al., 1980). Over time, airborne flux measurement systems have evolved with the development of (1) modern measurement equipment (e.g. O'shea et al., 2013a; Wolfe et al., 2018), (2) flux quality assessment methods (Vellinga et al., 2013; Vickers and Mahrt, 1997; Mann and Lenschow, 1994), (3) flight pattern optimization (Metzger et al., 2021; Vihma and Kottmeier, 2000) and (4) the inclusion of wavelets in the flux calculation to obtain spatially highly resolved fluxes (Mauder et al., 2007; Metzger et al., 2017). Nowadays, modern airborne flux platforms can provide eddy covariance fluxes that are similar to high quality data from flux towers (e.g. Gioli et al., 2004). Operating platforms for airborne eddy covariance measurements include helicopter-borne turbulence probes (Helipod; Bange et al., 2006), weight-shift micro-light aircraft (Metzger et al., 2012; Metzger, 2013), drones (Sun et al., 2021), ~~and different research aircraft (e.g. the NRC Twin Otter—Desjardins et al., 2016; Sky Arrow ERA—Gioli et al., 2006; Polar 5—Hartmann et al., 2018; FAAM BAe 146—O'shea et al., 2013b; NASA C-23 Sherpa—Wolfe et al., 2018).~~

70 [. and different research aircraft \(e.g. the NRC Twin Otter - Desjardins et al., 2016; Sky Arrow ERA - Gioli et al., 2006; Polar 5 - Hartmann et al., 2018; FAAM BAe-146 - O'shea et al., 2013b; NASA C-23 Sherpa - Wolfe et al., 2018; Metair Diamond - Neininger et al. \(2001\)](#)

Commonly, airborne eddy covariance campaigns focus on measuring sensible heat fluxes, latent heat
75 fluxes and carbon fluxes in landscapes ranging from being relatively homogeneous to highly complex
(e.g. Bange et al., 2006; Kirby et al., 2008; Metzger et al., 2013; Wolfe et al., 2018; Zulueta et al., 2013;
Kohnert et al., 2017). A few airborne platforms have additionally been equipped with methane gas ana-
lyzers to obtain methane fluxes for various landscapes, including arctic permafrost regions in Canada
(Mackenzie Delta; Kohnert et al., 2017; Kohnert et al., 2018) and Alaska (Serafimovich et al., 2018; Zona
80 et al., 2016; Sayres et al., 2017; Chang et al., 2014), wetlands (O'shea et al., 2013b; Hannun et al., 2020),
gas extraction sites (Yuan et al., 2015), and agricultural landscapes (Desjardins et al., 2018; Hannun et
al., 2020; Wolfe et al., 2018). Additional airborne eddy covariance campaigns have been performed to
determine the regional fluxes of nitrogen oxides (NO_x) in London (Vaughan et al., 2016; Vaughan et al.,
2021), regional fluxes of volatile organic compounds (VOC) in Mexico City (Karl et al., 2009) and Lon-
95 don (Vaughan et al., 2017) and regional ozone fluxes near Boulder (Lenschow et al., 1980). Overall, these
examples show that airborne eddy covariance platforms are successful at providing regional turbulent
fluxes of various compounds in a large variety of landscapes.

In this study, we equipped a Schleicher ASK-16 touring motor glider (operated by the Freie Universität
90 Berlin, Germany) with sensors to measure turbulent fluxes of carbon, methane and energy at the regional
scale. This new measurement platform enables a variety of research opportunities, including:

- (1) studying the comparability of tower fluxes and airborne fluxes and the spatial representativeness of eddy covariance towers;
- (2) studying the regional spatial distributions of energy and matter fluxes and their dominating (spatial)
95 drivers;
- (3) applying and developing upscaling approaches to create regional scale surface flux maps;
- ~~(4) comparing measured regional airborne fluxes with national inventory emission levels.~~

Additionally, several location-specific measurement flights were recorded between 2017 and 2022 to (1)
study carbon and methane fluxes over differently managed peatland areas in northern Germany [and](#) (2)
100 evaluate the exchange of greenhouse gases between lake surfaces and the atmosphere (Germany).

This paper will introduce the new ASK-16 airborne measurement platform and the system specifications,
including measurement equipment, precision and accuracy. Detailed descriptions of the (1) wind calibra-
tion (2) wind calculation, (3) flux calculation and (4) footprint calculations are provided and the quality
105 assessment of the different data products is described. To demonstrate the capability and the performance

of this new airborne eddy covariance platform, different calibration [steps are applied](#), and measurement flights are described ~~and applied~~. Finally, to assess the quality, uncertainty and limitations of the measurement platform, the precision of the obtained wind vectors and fluxes is evaluated.

110 2 Methodology

2.1 The Aircraft and Measurement Setup

A Schleicher ASK-16 motorized glider (also known as powered glider; registration D-KMET; Alexander Schleicher GmbH, Poppenhausen, Germany) was deployed with a large set of sensors (Table 1) to measure airborne eddy covariance fluxes (Fig. 1). This motorized glider was manufactured in 1973, has a wingspan of 16 m, an airspeed ranging from 17.8 to 56 m/s (64 – 200 km/h) and is typically used for measurement operations of approximately 2 – 3 hours and can, depending on the weight and balance, fly up to 6 hours. The ASK-16 is operated by the Institute of Space Science at the Freie Universität Berlin, Germany and has mainly been used for in situ gas concentration and meteorological measurements in the past (e.g. measurements of cooling tower plumes as documented by Fortak (1975, 1976) or recently as part of the S-5p Campaign activities funded by the ESA, see <https://s5pcampaigns.aeronomie.be/>). In 2015, the aircraft had an extensive overhaul as a preparation for the currently presented measurement campaigns and other scientific missions.

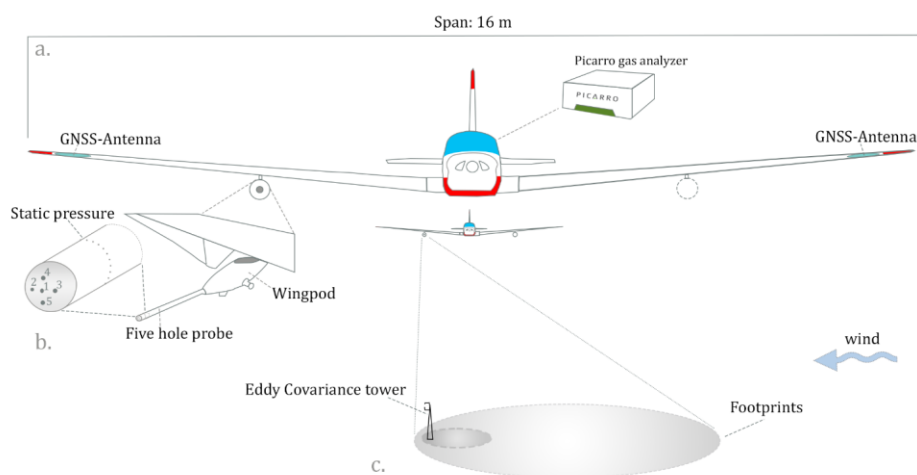


Figure 1: Setup of the ASK-16 eddy covariance measurement platform showing (a.) the general measurement setup (b.) the five-hole probe and (c.) a schematic representation of the footprint of such an airborne measurement platform in comparison to an eddy covariance tower. Keep in mind that the real difference in footprint magnitude depends on the measurement heights of the tower and the aircraft. More details about the instrumentation onboard the ASK-16 is provided in Table 1.

125 For airborne eddy covariance campaigns, the motorized glider is equipped with sensors to obtain high
 frequency fluctuations in wind, CO₂, CH₄, temperature and water vapor (Table 1 & Fig. 1). A Picarro
G2311-f gas analyzer (Picarro Inc., Santa Clara, USA) is installed in the cabin of the ASK-16 to measure
 high frequency gas concentrations (10 Hz). On the front of the wingpod, an *858 AJ Rosemount five-hole*
 130 *probe* (858 AJ, Rosemount Inc., Shakopee, USA) is mounted, which is connected to four CPT6100 pres-
 sure transducers (Mensor Corp., San Marcos, USA) located within the pod. [The distance between the](#)
[inlet of the tube and the gas analyzer and the five hole probe was small \(< 0.5 m\). The tube was ca 6 m](#)
[long, had a flow rate of ca. 5.8 sL/minute and an inner diameter of ca. 0.04 m. Based on these character-](#)
[istics, the transport time of the gas between the inlet tube and the G2311-f gas analyzer was ca. 0.8 sec-](#)
[onds.](#) Behind the pressure transducers, a *SPAN-IGM-S1 system* (Novatel, Calgary, Canada) is installed
 135 that integrates a combined GNSS + INS solution. Global Navigation Satellite Systems (GNSS) antennas
 are installed in the wings of the motorized glider, which are connected with the IMU and the satellite
 receiver. To increase the GNSS position and angle accuracy, a *second GPS receiver* was connected to the
 GNSS-INS system (FlexPak G2-V2; Novatel, Calgary, Canada). Additionally, the wingpod contains a
Pt100 RTD temperature sensor (Class F0.1 IEC 60751, Vaisala, Helsinki, Finland) and *HUMICAP hu-*
 140 *midity sensor* (Vaisala, Helsinki, Finland), which are connected to a *HMT311 temperature and humidity*
transmitter (Vaisala, Helsinki, Finland). In 2019, a *CHAL-003 thermocouple temperature sensor*
 (OMEGA, Deckenpfronn, Germany) was additionally installed on the outside of the wingpod, close to
 the file-hole-probe to measure high frequency temperature and calculate sensible heat fluxes. All time
 stamps of the sensor blocks are synchronized to the inertial navigation system.

145

Table 1: Overview of installed sensors on the ASK-16 eddy covariance measurement platform, including model and the manufacturer information. Additional information about the measured variables and their accuracy and precision is given in Table 2.

Component	Model	Manufacturer
Gas analyzer	Picarro G2311-f	Picarro Inc., Santa Clara, USA
Board computer	Raspberry Pi 3 Model B	Raspberry Foundation, Cambridge, Great Britain
Five hole probe	858 AJ Rosemount	Rosemount Inc., Shakopee, USA
Pressure sensor	Mensor CPT6100	Mensor Corp., San Marcos, USA
USB converter (pressure)	USB COM232PLUS4	FTDI, Glasgow, Great Britain
SPAN GNSS+INS system	SPAN-IGM-S1 (incl. STIM300 MEMS IMU) with FlexPak-G2-V2 & IMU-IGM-A1	Novatel, Calgary, Canada
Thermocouple	CHAL-003	OMEGA, Deckenpfronn, Germany
Temperature setpoint conditioner	AD596/AD597	Analog Devices, Wilmington MA, USA
USB-adapter thermocouple	Redlab USB-1608FS-PLUS	Meilhaus Electronic GmbH, Alling, Germany
TAT sensor housing	Rosemount 102E	Rosemount Inc., Shakopee, USA
Humidity sensor	HUMICAP	Vaisala, Helsinki, Finland

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Temperature sensor	Pt100 RTD Class F0.1, IEC 60751	Vaisala, Helsinki, Finland
Humidity transmitter	HMT311	Vaisala, Helsinki, Finland

Table 2: Overview of the recorded variables, recording frequency, *response rate (in brackets)*, measurement range and the accuracy and the precision of the measurement. In most cases, measurement uncertainty and range was obtained from datasheets from the manufacturers (PICARRO, Vaisala, Novatel, Mensor, Omega, Rosemount), and from *Buetow (2018)*, *Lehmann (2022)*, *National Institute for Standards and Technology (1999)* and *Yang et al. (2016)*. The precision of recorded variables from the INS-GNSS (indicated with **) were obtained from on-ground measurements on the 04.05.2022 in Lüsse, Germany, where the aircraft remained stationary for ca. 1 hour.

Recorded Variable	Sensor	Unit	Recording Rate (and Response Rate)	Measurement Range	Accuracy (Bias)	Precision
Atm. CO ₂ concentration	Picarro G2311-f	ppm (dry mole fraction)	10 Hz (≥ 5 Hz)	300–500 ppm	-	0.2 ppm (τ : 0.15 ppm, noise: 0.0023 ppm ² /Hz)
Atm. CH ₄ concentration	Picarro G2311-f	ppm (dry mole fraction)	10 Hz (≥ 5 Hz)	100 - 300 ppb	-	3 ppb (τ : 1.1 ppb, noise: 0.23 ppm ² /Hz)
Atm. H ₂ O concentration	Picarro G2311-f	% (of volume)	10 Hz/ (≥ 5 Hz)	0 - 99 % RH	-	0.30%
Static pressure	CPT6100	Pa	50 Hz (10 Hz)	552 - 1172 hPa	0.01%	0.004%
Differential pressure alpha	CPT6100	Pa	50 Hz (10 Hz)	-35 - 35 hPa	0.01%	0.004%, 0.26 Pa **
Differential pressure beta	CPT6100	Pa	50 Hz (10 Hz)	-35 - 35 hPa	0.01%	0.004%, 0.73 Pa **
Dynamic pressure	CPT6100	Pa	50 Hz (10 Hz)	0 - 70 hPa	0.01%	0.004%, 0.39 Pa **
Relative humidity	HMT310 - HUMICAP	%	20 Hz (17 s)	0 - 100% RH	0.6 - 1.0 %	0.5 – 0.85 %
Temperature (slow)	HMT310 - Pt100	°C	20 Hz (17 s)	- 40 - 60 °C	0.2°C	0.2 °C- 0.5 °C
Temperature (fast)	CHAL-003	°C	50 Hz (125 Hz)	- 20 - 60 °C	1.1°C or 0.4%	1°C
Latitude	SPAN GNSS+INS	deg [WGS 84]	20 Hz (20 Hz)	± 89.9 °	0.000017 ° (1.2 m)	0.0000017 ° **
Longitude	SPAN GNSS+INS	deg [WGS 84]	20 Hz (20 Hz)	± 180 °	0.000017 ° (1.2 m)	0.0000054 ° **
Height	SPAN GNSS+INS	m.a.s.l.	20 Hz (20 Hz)	0 - 80000	0.6 m	0.39 m **
Northward aircraft velocity	SPAN GNSS+INS	m/s	20 Hz (20 Hz)	0 - 515 m/s	0.02 m/s	0.0038 m/s **
Eastward aircraft velocity	SPAN GNSS+INS	m/s	20 Hz (20 Hz)	0 - 515 m/s	0.02 m/s	0.003 m/s **
Vertical aircraft velocity	SPAN GNSS+INS	m/s	20 Hz (20 Hz)	0 - 515 m/s	0.01 m/s	0.0035 m/s **

True heading	SPAN	rad	20 Hz	0 – 360 °/0 - 2	0.015 rad	0.0001 rad **
	GNSS+INS			π		
Pitch angle	SPAN	rad	20 Hz	$\pm 90^\circ$	0.035 rad	0.007 rad **
	GNSS+INS					
Roll angle	SPAN	rad	20 Hz	$\pm 180^\circ$	0.035 rad	0.00017 rad **
	GNSS+INS					


Formatted: Font: +Headings (Times New Roman)
Formatted: Font: +Headings (Times New Roman), 10 pt
Formatted: Font: +Headings (Times New Roman), 10 pt
Formatted: Font: +Headings (Times New Roman), 10 pt
Formatted: Font: +Headings (Times New Roman), 10 pt
Formatted: Font: +Headings (Times New Roman), 10 pt

All sensors in the wingpod are connected to a Raspberry Pi 3 (Model B; Raspberry Pi Foundation, Cambridge, United Kingdom) through Universal Serial Bus (USB) interfaces (see Table 1). Data logging is managed with *hgpstools* (<https://bitbucket.org/haukex/hgpstools>, developed by Hauke Dämpfling, Leibniz Institute of Freshwater Ecology and Inland Fisheries (IGB), Berlin, Germany), an open source software package written in Perl. The software manages the communication between the single board computer (Raspberry Pi) and the sensors. Table 2 provides a full list of all recorded variables, their measurement frequency and measurement uncertainty.

Formatted: Internet Link

2.2 Data Processing: eddy4R and PyWingpod

To process the data and calculate wind vectors and turbulent fluxes, two software packages were used in this study: *eddy4R* (Metzger et al., 2017) and *PyWingpod*. Figure 2 shows the entire data processing procedure for the ASK-16 flight data: from raw data to wind vector data to calculated flux output. It shows which processing steps are performed by which software package and what output data is generated. The structure of this paper follows the processing steps visualized in Fig. 2.

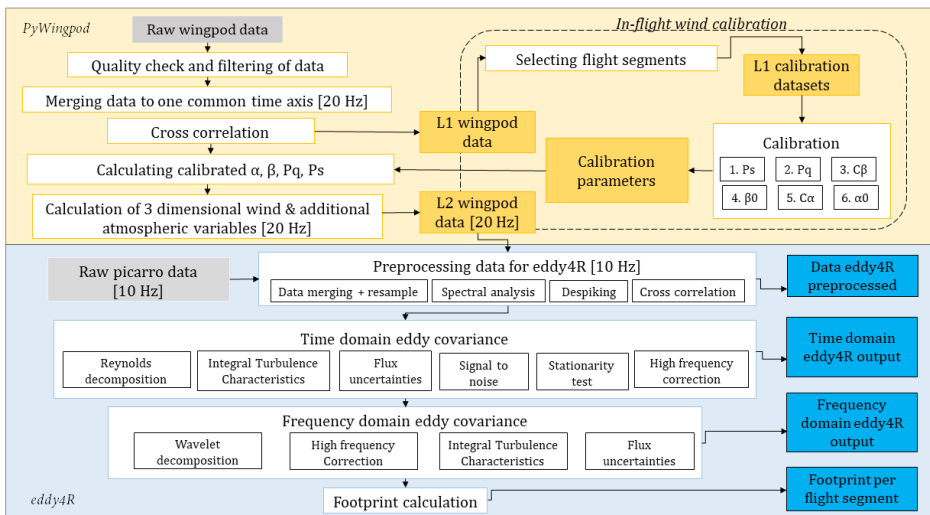

First, the data was processed with the *PyWingpod* toolbox, developed in Python (version > 3.7) by the

German Research Centre for Geosciences (GeoForschungsZentrum Potsdam) and the Free University of Berlin (Freie Universität Berlin) to specifically process the wingpod data of the ASK-16. This software package includes different libraries created for the preprocessing and calibration of the wingpod data. It also incorporates functions to calculate the final wind vector and additional meteorological variables, which are partially based on functions in EGADS, version 0.8.9 (EUFAR General Airborne Data-processing Software), a Python based toolbox for processing airborne atmospheric data which can be accessed via GitHub (<https://github.com/EUFAR/egads>). The software package *PyWingpod* provides several additional functions to visualize the data during these different data processing steps, and can generate additional output (e.g. figures, tables, .kml files and shapefiles), which can be used for further data exploration.

Formatted: Internet Link

Afterwards the wind vector output and wingpod data were merged with Picarro data and further processed in *eddy4R* (Metzger et al., 2017) to calculate fluxes and footprints. *eddy4R* consists of a family of EC code packages (currently: *eddy4R.base*, *eddy4R.qaqc*, *eddy4R.stor*, *eddy4R.erf*, *eddy4R.turb* and *eddy4R.ucrt*), each consisting of a set of functions that have been developed in the open-source R language (R Core Team, 2021). Using a combination of functions from the *eddy4R* universe, wavelet-based fluxes, Reynolds fluxes, and footprints were calculated, and a quality and uncertainty assessment of the fluxes was performed (Fig. 2 – blue region).

Formatted: Normal

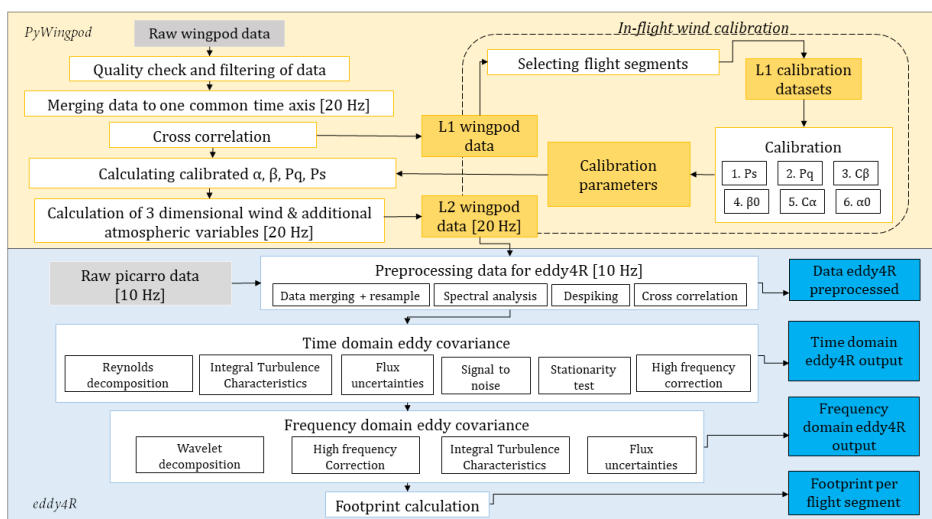


Figure 2: Workflow ASK-16 platform for processing airborne eddy covariance data. The yellow section describes workflows performed in the Python toolbox *PyWingpod*. The blue region shows the workflow as performed in *eddy4R* (Metzger et al., 2017). Coloured boxes display input/output of by the software: grey boxes represent raw input; yellow boxes represent output created by *PyWingpod*, whereas blue

Formatted: Font: Bold, Italic

Formatted: Font: Italic

Formatted: Font: 12 pt, Not Bold, Italic

Formatted: Font: Italic

boxes present output created by eddy4R. packages.~

First, the data was processed with the *PyWingspod* toolbox, developed in Python (version > 3.7) by the German Research Centre for Geosciences (GeoForschungsZentrum Potsdam) and the Free University of Berlin (Freie Universität Berlin) to specifically process the wingpod data of the ASK 16. This software package includes different libraries created for the preprocessing and calibration of the wingpod data. It also incorporates functions to calculate the final wind vector and additional meteorological variables, which are partially based on functions in EGADS, version 0.8.9 (EUFAR General Airborne Data processing Software), a Python based toolbox for processing airborne atmospheric data which can be accessed via GitHub (<https://github.com/EUFAR/egads>). The software package *PyWingspod* provides several additional functions to visualize the data during these different data processing steps, and can generate additional output (e.g. figures, tables, kml files and shapefiles), which can be used for further data exploration.

Afterwards the wind vector output and wingpod data was merged with Picarro data and further processed in *eddy4R* (Metzger et al., 2017) to calculate fluxes and footprints. *eddy4R* consists of a family of EC code packages (currently: *eddy4R.base*, *eddy4R.gage*, *eddy4R.stor*, *eddy4R.crf*, *eddy4R.turb* and *eddy4R.uert*), each consisting of a set of functions that have been developed in the open source R language (R Core Team, 2021). Using a combination of functions from the *eddy4R* universe, wavelet based fluxes, Reynolds fluxes, and footprints were calculated, and a quality and uncertainty assessment of the fluxes was performed (Fig. 2 blue region).

2.3 Wind Vector Calculation

One of the two main components of the eddy covariance technique is the measurement of the turbulent wind vector at high frequency (Vellinga et al., 2013), for which we used the calculations as described in detail by Lenschow (1986) and Lenschow and Spyers-Duran (1989). As the wind vector is measured from a moving platform (motorized glider), the wind vector (V_{wind}) is calculated as a difference between the true airspeed (V_{tas} ; measured by the five-hole probe) and the groundspeed (V_{gs} ; measured by the GNSS & INS system) according to the following equation:

$$V_{wind} = V_{gs} - V_{tas} + \Omega * L \quad (1)$$

The displacement-term $\Omega * L$ accounts for the displacement between the INS- GNSS and the five-hole probe, where L describes the lever arm length (distance between accelerometer and five-hole probe, here

Formatted: Internet Link

0.85 m) and Ω represents the angular velocities of the motorized glider (Mallaun et al., 2015). A more detailed description of the wind calculation procedure can be found in Lenschow and Spyers-Duran (1989).

2.4 Measurement Calibration

To ~~eliminate~~ reduce the aerodynamic position errors of the five-hole probe, (alignment of the probe relative to the flow field and the position in the airflow around wings and fuselage), several calibration flights were performed in order to increase the accuracy of the calculated 3-dimensional wind vector. Calibration was performed on the static pressure (p_s), dynamic pressure (p_q), and the differential pressure measurements (p_α - alpha pressure, and p_β - beta pressure) to improve V_{tas} . As you can see in the calibration equations below, p_α and p_q are used for the calculation of the angle of attack (α , see equation 2) and p_β and p_q are used for the calculation of the sideslip angle (β , see equation 3):

$$\alpha = \frac{p_\alpha}{C_\alpha \cdot p_q} - \alpha_0 \quad (2)$$

Here, C_α and α_0 are the calibration parameters, which describe the sensitivity to the inverse slope of p_α and the offset of the angle of attack.

$$\beta = \frac{p_\beta}{C_\beta \cdot p_q} - \beta_0 \quad (3)$$

In this equation, C_β describes the inverse slope of p_β in the calibration equation and β_0 the offset.

The calibration of the pressure measurements is an important procedure for airborne eddy covariance measurements, as the calculated wind is highly sensitive to input uncertainties (see e.g. Metzger et al., 2011). In this paper, we focus on describing the on-ground and in-flight calibration procedures applied for ASK-16 wingpod data specifically. Detailed descriptions of all available state-of-the-art in-flight calibration procedures are for example provided by Drüe and Heinemann (2013), Vellinga et al. (2013), and Mallaun et al. (2015).

2.4.1 ~~Time~~ Temporal and Spatial Alignment Wingpod Data

Time lags between sensors can be caused by differences in processing speeds of different sensors (Drüe and Heinemann, 2013). Although these lags are mostly small (< 1 second; Drüe and Heinemann, 2013), such lags need to be detected, as time alignment is crucial to ensure an accurate wind and reliable turbulent fluxes. Therefore, potential time lags between measurement data recorded by different devices were assessed before other calibration procedures were performed. To assess the time alignment of the sensors,

Formatted: English (United Kingdom)

Formatted: English (United Kingdom)

Formatted: English (United Kingdom)

Formatted: English (United Kingdom)

Formatted: English (United Kingdom)

Formatted: English (United Kingdom)

Formatted: English (United Kingdom)

Formatted: English (United Kingdom)

Formatted: English (United Kingdom)

Formatted: English (United Kingdom)

Formatted: English (United Kingdom)

Formatted: English (United Kingdom)

Formatted: English (United Kingdom)

Formatted: English (United Kingdom)

Formatted: English (United Kingdom)

Formatted: English (United Kingdom)

Formatted: English (United Kingdom)

Formatted: English (United Kingdom)

Formatted: English (United Kingdom)

Formatted: English (United Kingdom)

Formatted: English (United Kingdom)

Formatted: English (United Kingdom)

Formatted: English (United Kingdom)

Formatted: English (United Kingdom)

Formatted: English (United Kingdom)

Formatted: English (United Kingdom)

Formatted: English (United Kingdom)

Formatted: English (United Kingdom)

Formatted: English (United Kingdom)

Formatted: English (United Kingdom)

Formatted: English (United Kingdom)

Formatted: English (United Kingdom)

Formatted: English (United Kingdom)

Formatted: English (United Kingdom)

Formatted: English (United Kingdom)

Formatted: English (United Kingdom)

Formatted: English (United Kingdom)

Formatted: English (United Kingdom)

Formatted: English (United Kingdom)

Formatted: English (United Kingdom)

Formatted: English (United Kingdom)

Formatted: English (United Kingdom)

Formatted: English (United Kingdom)

Formatted: English (United Kingdom)

Formatted: English (United Kingdom)

Formatted: English (United Kingdom)

Formatted: English (United Kingdom)

Formatted: English (United Kingdom)

Formatted: English (United Kingdom)

Formatted: English (United Kingdom)

Formatted: English (United Kingdom)

Formatted: English (United Kingdom)

Formatted: English (United Kingdom)

the assumption was made that measurements from the same measurement group (A/D converter or sensor block) should have the same lag, which is similar to the approach used by Drüe and Heinemann (2013). In our case, we assessed the time lags for four different sensor groups: pressure sensors (block 1), INS-GNSS sensors (block 2), temperature sensors (block 3) and all HMT Vaisala sensors (block 4). While performing cross-correlation analysis for the different sensor groups, no clear lags were observed between any of the wingpod's sensor groups. Therefore, no time shifts were applied to any of the four sensor groups within the wingpod. [Temporal alignment of the wingpod data and the Picarro data is performed at a later stage in the data processing using Eddy4R \(see Fig. 2\). Generally, the lag between the gas analyzers and the wind measurements is corrected using a high-pass filtered cross-correlation technique as detailed in Section 2.5 \(Metzger et al., 2017; Hartmann et al., 2018\). Spatial alignment between the INS-GNSS and the five hole probe is also assessed during the pressure angle calibration. We used the offset of \$\beta_0\$ and \$\alpha_0\$ to describe the offset in the alignment of pitch and yaw angles. The alignment of the roll angle between the INS-GNSS and the five hole probe was not assessed and set to 0, similar to Vellinga et al. \(2013\).](#)

2.4.2 On-Ground Calibration Wingpod Data

Before in-flight calibration maneuvers were analyzed, on-ground calibration was performed to correct for potential offsets in the pressure sensor data. Such offsets can affect the final wind vector and therefore need to be determined. Before the start of a measurement flight, the wind inflow into the pressure holes was covered by placing a glass fiber composite non-airtight cap onto the five-hole probe. The on-ground pressure data for this wind-free period was afterwards analyzed to characterize the bias in dynamic pressure (q_i), α pressure (p_α) and β pressure (p_β). In this setup, the static pressure offset could not be assessed. For the available datasets, we mostly used a 30-minute pressure record to determine the offsets. If the duration of the on-ground and wind-free period was shorter, we used the available time-frame with stable measurements, with the restriction of having at least 10 minutes of data. In our case, the pressure offsets were very small and ranged between 1 to 10 Pa for the different pressure measurements.

2.4.3 In-Flight Calibration Maneuvers

In our study we used five in-flight calibration maneuvers (reverse heading, pitching, yawing, and speed maneuvers, and wind squares) for the calibration of pressure measurements (q_i , q_s , q_α and q_β), the corresponding α and β angles (see section 2.4), and for the evaluation of the calibration procedure (Fig. 3). Each individual in-flight calibration procedure mainly focuses on the calibration of a single variable, while trying to rule out or minimize the effect of external factors on that specific calibration parameter.

During a speed maneuver (Fig. 3a), the speed of the aircraft is first slowly increased (acceleration segment), and afterwards slowly decreased (deceleration segment) at a relatively constant altitude. This

Formatted: English (United Kingdom)

Formatted: English (United Kingdom)

290 procedure is repeated multiple times to study the effect of speed variations on the different pressure measurements of the five-hole probe (α , P_q and P_s). During a pitching maneuver (Fig. 3b), the nose of the aircraft moves sinusoidal upwards and downwards by the deflection of the aircraft's elevator. The airplane is turning around its lateral axis, altering the pitch angle (θ) of the aircraft, and induces a change in the angle of attack (α). This maneuver is used for the calibration of α , and uses the concept that pitch oscillations should not significantly affect the vertical wind measurement (w).

295

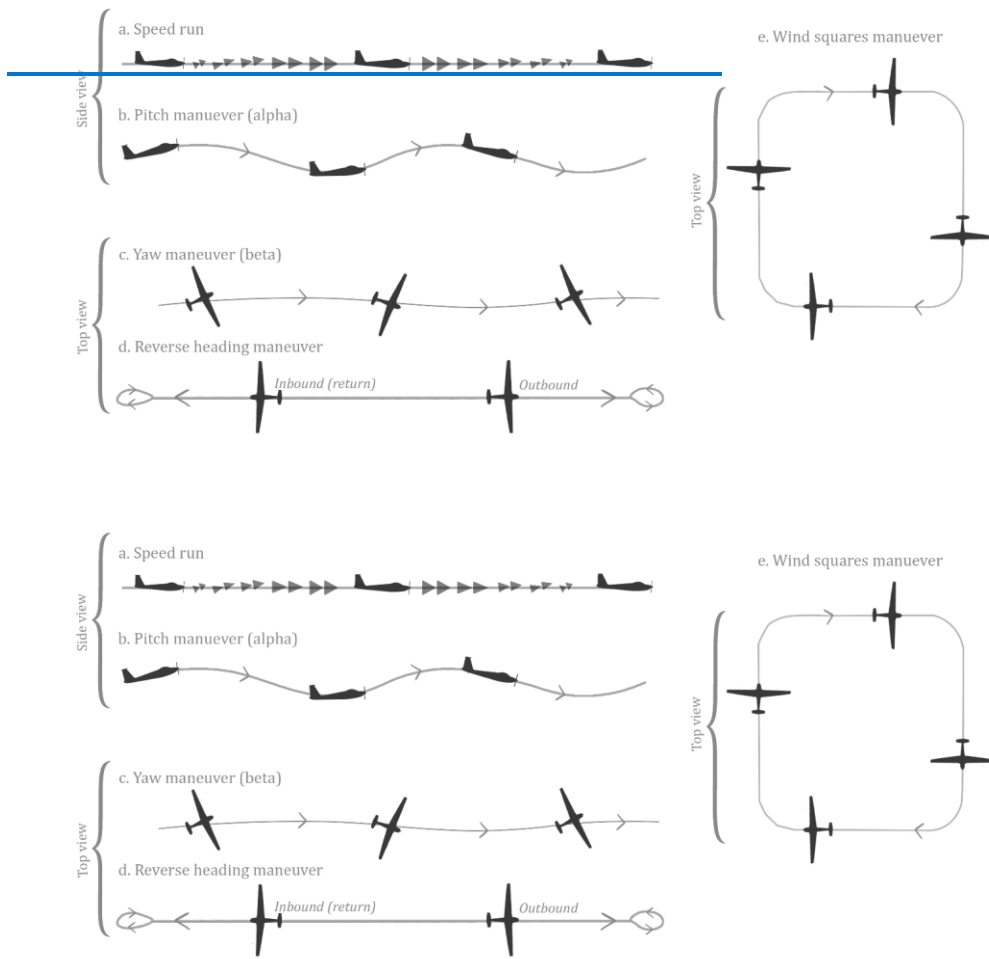


Figure 3: Schematic illustration of flight maneuvers performed with the ASK-16 to calibrate the pressure measurements of the five-hole probe, including speed runs (a.), yaw and pitch maneuvers (b. and c.), reverse heading maneuvers (d.) and wind squares (e.).

300 Yawing maneuvers (Fig. 3c), on the other hand, are performed to calibrate the sideslip angle (β). During a yawing maneuver, the aircraft is rotated harmonically sinusoidal around its vertical axis (heading; nose moving left/ right) by engaging the rudder and aileron(s). The aircraft is kept at a (more or less) constant altitude. To calibrate for β , we use the assumption that the horizontal components of the wind (u, v) should not be affected by yaw maneuvers. Reverse heading maneuvers (Fig. 3d), also called return track
305 flights (Hartmann et al., 2018), were performed for the calibration of the dynamic pressure (q_i), β and α angles. The aim of this maneuver is to fly two times through a very similar air mass, while keeping the time difference between the outbound and return flight as small as possible. Wind squares (Fig. 3e) are box shaped flight patterns, where the airplane flies four times a straight track, separated by 90° turns. During this maneuver, altitude and airspeed are kept as constant as possible. In our case, the maneuver
310 was used as a second check to assess the quality of the calibration procedure (see section 2.6).

As several of the in-flight calibrations require the calculation of an a-priori wind, the order of the calibration procedure can slightly affect the calibration outcome. Here, the order of the calibration was based in first instance on a sensitivity analysis (Lehmann, 2022) starting with the two least sensitive parameters
315 (here: static pressure and dynamic pressure). Due to the difference in magnitude and importance of the wind components for airborne eddy covariance flux calculations, we furthermore first optimized the parameters related to the horizontal wind components (C_β and β_0) and then optimized the parameters that are directly connected to vertical wind component (C_α and α_0), as proposed by Metzger et al. (2011). Although cross-dependences in the calibration procedure can be dealt with by iteratively optimizing the
320 calibration (Metzger et al., 2011), this was not performed in our study. Here, we assume that the range and amount of calibration maneuvers will be sufficient to obtain suitable calibration parameters during different flight conditions.

Flight maneuver data were processed with the *PyWingpod* Python software package (Wiekenkamp et al.,
325 2024a) to determine the calibration coefficients as described in the upcoming sections. In this study, no wind tunnel experiments were performed, but results from earlier studies (both wind tunnel experiments and in-flight calibrations) were used as a reference. As the wingpod of the ASK-16 was first installed in 2017 and re-installed in 2019, two calibration parameter sets were calculated for the static pressure, dynamic pressure, α , and β (calibration parameters for 2017-2018 and calibration parameters for 2019-
330 2022). -

Formatted: English (United Kingdom)

Formatted: English (United Kingdom)

Formatted: English (United Kingdom)

Formatted: English (United Kingdom)

2.4.4 Static Pressure Calibration

Although the static pressure measurement should represent that of a free airstream, the measured static pressure can be influenced by the flow around the aircraft, causing it to differ from the ambient static pressure. This pressure deviation is often referred to as static pressure defect ($p_{s,err}$) and needs to be defined to adjust the measured static pressure. Past research has shown that the static pressure defect depends on (1) the speed of the aircraft, but also on (2) changes in the flow angles α and β (Bögel and Baumann, 1991; Drüe and Heinemann, 2013; Tjernström and Friehe, 1991). In this study, the static pressure defect ($p_{s,err}$) is determined via speed runs (at relatively constant altitude) and yawing maneuvers, according to Kalogiros and Wang (2002). Speed maneuvers with varying p_α were used to assess the effect of the airplane on speed fluctuations (recorded in the dynamic pressure) and the effect of different α flow angles on the static pressure. Yaw maneuvers were used to assess the effects of different β flow angles on the static pressure. Data from each single maneuver was used to fit the following polynomial equation:

$$p_{s,err} = (a_1 * p_q) + (a_2 * p_q * p_\alpha^2) + (a_3 * p_q * p_\beta^2) \quad (4)$$

where p_q represents the dynamic pressure, a_{1-3} are the calibration parameters and p_β and p_α are the differential pressure measurements. Speed maneuvers were used to determine a_1 and a_2 , yaw maneuvers were used to calibrate a_3 . During the determination of calibration parameters for each single maneuver, the calibration data were offset corrected (resulting in an absolute offset of 0). To exclude the influence of following calibrations ($C_\alpha, C_\beta, \alpha_0$ —and β_0) on the adjusted pressure, possible influences of sideslip and angle of attack on the static pressure were accounted for using the differential pressure measurements p_α and p_β . To rule out the influence of altitude fluctuations during the speed maneuvers, the static pressure was first normalized by altitude. Here, the barometric pressure was calculated for the assigned measurement height. Afterwards, a polynomial function was fitted between the normalized static pressure (independent variable) and one or multiple dependent variables (p_α, p_β and p_q), resulting in a function that can be used to correct the measured static and dynamic pressure.

2.4.5 Dynamic Pressure Calibration

The dynamic pressure calibration was performed in two steps. First, the dynamic pressure was adjusted by adding the static pressure defect (section 2.4.4, Eq. 4) to the dynamic pressure measurement. Afterwards, we used the dynamic pressure calibration method as proposed by Hartmann et al. (2018), using the assumption that the average groundspeed over an outbound (vector index 1) and return flight (vector

Formatted: English (United Kingdom)

Formatted: English (United Kingdom)

Formatted: English (United Kingdom)

Formatted: English (United Kingdom)

Formatted: English (United Kingdom)

Field Code Changed

index 2) is equal to the average true airspeed:

365

$$\frac{1}{2} * \left(\frac{v_{gs,1}}{\cos(\gamma)} + \frac{v_{gs,2}}{\cos(\gamma)} \right) = \frac{1}{2} * (v_{tas,1} + v_{tas,2}) = v_{ref} \quad (5)$$

Based on the magnitude of the drift, the difference between χ , the true track and θ , the true heading ($\chi - \theta = \gamma$), we needed to include $\cos(\gamma)$ in our equation (Eq.5). Afterwards, the reference undisturbed dy-

370 namic pressure ($p_{q.ref}$) was determined using the following equation:

$$p_{q.ref} = \frac{1}{2} * \frac{1}{\rho * v_{ref}^2} \quad (6)$$

Next, we plotted the average measured dynamic pressure ($p_{q,i}$) against the reference undisturbed pressure

375 ($p_{q.ref}$) to calculate a correction factor (c_q):

$$p_{q.ref} = c_q * p_{q,i} \quad (7)$$

This calculated correction factor was then used to adjust the measured dynamic pressure.

380 2.4.6 C_β and β_0 Calibration

Similar to the static and dynamic pressure, angle of attack and sideslip angle are affected by pressure field deformations around the aircraft, which can cause deviations between the measured and the real α and β angles (Drüe and Heinemann, 2013). To correct for these deviations, the sideslip angle was calibrated using equation 3. To determine C_β , yawing maneuvers were used, which are commonly applied for such calibration (e.g. Bögel and Baumann, 1991; Drüe and Heinemann, 2013; Mallaun et al., 2015; Williams and Marcotte, 2000). In a first step, the wind vector is calculated for a yawing maneuver. Afterwards, the sum of the standard deviation in the horizontal wind components u and v is calculated. Iteratively, this summed standard deviation is optimized using the Nelder-Mead optimization algorithm in SciPy (Virtanen et al., 2020).

390

To determine β_0 (the offset of β), we used a set of outbound and return flights (reverse heading maneuvers). Here, the difference between the average horizontal wind components (u and v) was iteratively minimized for each maneuver (Williams and Marcotte, 2000; Drüe and Heinemann, 2013) using the Nelder-Mead optimization method in SciPy (Virtanen et al., 2020). As local flight conditions and the selection of the exact flight segments can affect the outcome of the β_0 optimization, the mean β_0 was calculated from a large set of reverse heading maneuvers.

395

2.4.7 C_α and α_0 Calibration

The calibration of the angle of attack α was performed using a variety of calibration methods. Similar to the correction of the sideslip angle, the angle of attack can be calibrated, using equation 2. First C_α is determined using flight data from slow pitching maneuvers. For these flight maneuvers, first the vertical wind speed was calculated, using an offset of 0 (α_0) and the manufacturer-supplied correction factor of 0.079 [1/°] as provided by Rosemount (Drüe and Heinemann, 2013). Here, we assumed that the obtained variability in vertical wind speed was mainly caused by the movement of the airplane and should be minimized (Bögel and Baumann, 1991; Mallaun et al., 2015). Therefore, we optimize the sensitivity parameter C_α iteratively by minimizing the standard deviation of the vertical wind (w) with the Nelder-Mead optimization algorithm in SciPy (Virtanen et al., 2020).

Afterwards, we used flight data from straight level flights with small speed variations to obtain a calibration parameter for α_0 . This second calibration procedure assumes that if we fly long enough over a straight track, the average vertical wind component should ideally reach 0. Therefore, we first calculate the average windspeed over the flight segment without offset, and then iteratively optimize α_0 by minimizing the absolute average vertical wind component.

As an alternative approach, data from speed maneuvers and/or reverse heading maneuvers can be used to calibrate α , as proposed by Hartmann et al. (2018). For this calibration procedure, we used the fact that, without aircraft pressure field deformations, the angle of attack equals the pitch angle ($\frac{p_\alpha}{p_q} = \theta$). This is only valid during straight level flights, and for fixed-wing aircrafts, where α varies with airspeed. Similar to Hartmann et al. (2018), speed maneuver data was first used to assign the relationship between $\frac{p_\alpha}{p_q}$ and θ , while accounting for vertical movement of the plane (w_p). Based on the obtained relationship, C_α and α_0 were calculated. In a second step, we selected flight sections where the vertical movement of the plane was less than 1.5 m/s.

2.5 Flux and Footprint Calculation

After the wind data was calibrated and the three-dimensional wind vector was calculated, ~~(20 Hz)~~, this data ~~(40 Hz)~~ was merged with data from the Picarro gas analyzer (10 Hz). In this case, a nearest neighbor interpolation is applied to the wind and Picarro data to bring both datasets on a common time axis with a resolution of 10 Hz and retain the amplitude of the original measurements. Subsequently, outliers were detected in the different data products using a nonlinear median filter algorithm with a window of 7 points ($N = 3$) according to Brock (1986) and Starkenburg et al. (2016). Afterwards, two types of flight segments are extracted from the combined dataset: (1) vertical flight segments and (2) straight level segments (legs). Data from vertical flight segments (potential temperature, relative humidity, CH₄ and CO₂ concentrations)

is used to infer the thickness of the atmospheric boundary layer. Straight, horizontal flight segments (legs) are further processed to calculate surface fluxes.

Data from flight legs were further used for flux processing with *eddy4R* (Metzger et al., 2017). Lag times were obtained for every flight leg by performing a high-pass filtered cross-correlation between w' and the gas concentrations (H_2O , CO_2 and CH_4) as proposed in Hartmann et al. (2018). CO_2 and CH_4 concentrations were afterwards shifted according to the median lag of a particular flight. As the latency of H_2O can be variable within a single flight, no median lag for an entire flight was applied. Instead, individual lags were assigned for each individual flight leg of a specific flight. No lag correction was applied to the temperature data, as no clear lag could be determined between w' and T' .

The flux calculation for each leg was performed with the *eddy4R* (Metzger et al., 2017) packages according to Metzger et al. (2012) and Metzger et al. (2013), following the workflow as shown in Fig. 2. Although Airborne fluxes are also calculated using a time domain-based approach, the focus here is on the fluxes calculated with a time-frequency domain (wavelet) based approach. This wavelet based approach is explained in detail by Metzger et al. (2013). In short, a continuous wavelet transform approximation according to Torrence and Compo (1998) was performed for each individual leg, for all relevant variables (u , w , Temperature, H_2O , CO_2 and CH_4) using the Morlet wavelet as mother wavelet. Afterwards, a cross-scalogram was calculated using the measured vertical wind and a second scalar (here: Temperature, H_2O , CO_2 and CH_4). Next, the integral of the cross-scalogram was calculated at the original resolution and for each flux segment using a given window size. Based on the flight altitude of the ASK-16 (ca. 150-250 m. above the surface), fluxes were calculated every 200 meters with an overlapping moving window of 2000 meters. Using a time-frequency resolved version of the eddy covariance methods results in a higher spatial discretization where multiple flux segments are calculated for a single leg. Using wavelets, contributions from the longer wavelengths (large eddies) ~~can be~~ incorporated in these flux segments. Instead of obtaining only a single flux estimation per flight leg, we can now obtain an entire transect of fluxes.

The step size and window length used in our flux calculation were chosen based on previous work by Metzger et al. (2012) and Metzger et al. (2013), taking into account the altitude of the aircraft, atmospheric mixing, the characteristic length scales and resolution of surface features. The window size for flux calculation, set to 2000 m, is designed to balance the trade-off between random error (which decreases with larger window sizes) and resolution (which increases with smaller windows). As shown in Metzger et al. (2013), longer windows reduce random flux error due to the inverse proportionality between random error and the square root of the averaging length (Lenschow and Stankov, 1986). Additional details on the

Formatted: English (United Kingdom)

Formatted: English (United States)

Field Code Changed

Formatted: English (United Kingdom)

Formatted: English (United Kingdom)

Field Code Changed

Formatted: English (United States)

Formatted: English (United Kingdom)

[rationale behind the selected window and step sizes are provided in Metzger et al. \(2013\), which discusses the balance between resolution and error in flux calculations over heterogeneous landscapes.](#)

470 [Although this approach results in fluxes with largely overlapping samples, the individual overlapping samples are still very valuable, because they preserve high spatial resolution. This is critical for capturing sharp transitions in fluxes \(e.g., from land to lake\) and for reducing random noise in turbulent atmospheric conditions. Additionally, wavelet-based flux calculation benefits from this approach, as it allows for multi-scale analysis and better characterization of spatial heterogeneity, compared to traditional Reynolds-averaging methods that smooth out small-scale variations.](#)

Footprints were calculated by combining the Kljun et al. (2004) along-wind footprint with a Gaussian cross-wind distribution function as described in Metzger et al. (2012). This combination makes the footprint formulation more applicable for higher altitudes and thus for airborne eddy covariance. Inputs for the calculated footprint function include (1) the measured friction velocity, (2) measurement altitude, (3) the standard deviation of the lateral and vertical wind (σ_v, σ_w), (4) the boundary layer height, and (5) the calculated roughness length according to Högström (1988). After the calculation of the footprints, single segment footprints, leg-integrated footprints, and flux-footprints (flux*footprint) were calculated. This will enable us to create follow-up products, such as flux-topographies (e.g. Kohnert et al., 2017) or integration with earth observations to regional flux maps through physics-guided artificial intelligence (e.g. Metzger et al., 2013; Serafimovich et al., 2018; Vaughan et al., 2021)(e.g. Metzger et al., 2013; Serafimovich et al., 2018; Vaughan et al., 2021).

2.6 Measurement Accuracy and Quality Assessment

To obtain information about the quality and uncertainty of the measurements during the flights, several analyses were performed for individual flights and single flight legs. Airborne turbulent fluxes that are obtained by using the eddy covariance method are only valid under (1) steady state conditions with (2) developed turbulence (Foken, 2017). To evaluate the flight conditions, the integral turbulence characteristics were calculated and stationarity was assessed. Stationarity was assessed using (1) a trend analysis and (2) an internal nonstationarity analysis according to Foken and Wichura (1996) and Vickers and Mahrt (1997). [Although wavelet based fluxes \(Morlet\) are less sensitive to nonstationarities \(see e.g. Schaller et al., 2017\), we still use these characteristics as a quality measure for the calculated fluxes.](#) For each flight segment, Integral Turbulence Characteristics were calculated for measured and modelled u , w and u^* according to Thomas and Foken (2002). Leg segments that surpassed the threshold above 100% were flagged.

Formatted: English (United Kingdom)

Formatted: English (United Kingdom)

Formatted: English (United Kingdom)

Formatted: English (United Kingdom)

Formatted: English (United Kingdom)

Besides flight conditions, measurement errors and flux detection limit are important, as they provide information about the potential and limitations of the measurement platform. Flux detection limits were calculated for each single flight leg by performing a random flux uncertainty estimation according to Billesbach (2011). Here, a random flux uncertainty estimation is used where fluxes are recalculated for randomly shifted time series to assess the flux detection limits. Systematic and random statistical errors were calculated according to Mann and Lenschow (1994) and Lenschow and Stankov (1986). ~~Finally,~~ ~~spectral~~Spectral characteristics of the individual measured gasses and wind components ~~was~~were assessed by looking at the spectra of the wind components, fast temperature and measured gases, as performed e.g. by Hartmann et al. (2018), Metzger et al. (2011) and Wolfe et al. (2018).

The use of 2 km integration windows with 200 m step size may introduce some autocorrelation due to 90% overlapping samples, which could artificially reduce ensemble random errors:

$$\text{Error} = \frac{\sigma}{\sqrt{N}}$$

where σ is the standard deviation of the random error in individual samples and N is the number of independent samples. We have accounted for this by recognizing that overlapping samples are autocorrelated, and the effective sample size N_{eff} is reduced accordingly, following the formula:

$$N_{\text{eff}} = \frac{N}{1 + 2 \sum_{k=1}^K \rho(k)}$$

Here, $\rho(k)$ is the autocorrelation function of the sample with lag k and K is the maximum lag where significant autocorrelation exists. Using N_{eff} in place of N corrects the ensemble random error to reflect the increased autocorrelation between samples.

Formatted: English (United Kingdom)

Formatted: Font: 14 pt

3 Results and Discussion

Formatted: Space Before: 0 pt

3.1. Wind Calibration Results

In this study, the calibration of the static and dynamic pressure, as well as sideslip angle and angle of attack was performed following the calibration scheme in Fig. 2, as described in detail in the methodology of this paper. For the calibration of all pressure sensor related calibration parameters, pitching maneuvers, yawing maneuvers, reverse heading maneuvers and speed maneuvers were used (see section 2.4.3. – 2.4.7). Information about the meteorological conditions during these flight maneuvers is provided in the supplement A: Flight Maneuver Information. Whereas metadata and calibration results from single calibrations are provided in Supplement A, median calibration values and standard deviations that were assigned to the calibration periods 2017/2018 and 2019/2022 are given in Table 3. The description and discussion of the calibration results follows the order of calibration.

Table 3: Overview of obtained calibration parameters for the different monitoring periods (2017-2018 and 2019 – 2022) and their uncertainty (described by standard deviation σ of all obtained parameters obtained during the specific flight period). Final calibration parameters are described here by the median of all parameters that were obtained for the particular flight period (See supplement tables, Supplement A, indicated here by S. Table). Values in brackets ($C\alpha$ and $a0$) present the calibration parameters obtained from the speed runs (see Figure 8 and section 3.1.4).

	2017/2018	σ 2017/2018	Data	2019 - 2022	σ 2019-2022	Data	Cal. Eq.	S. Table
$C\alpha$	0.091 (0.1)	± 0.033	4 pitching maneuvers	0.091 (0.095)	± 0.015	3 pitching maneuvers	2	S5
$a0$	5.46 (5.6)	± 0.11	28 flight legs	5.66 (5.7)	± 0.32	46 flight legs	2	S3
$C\beta$	0.071	± 0.0008	5 yawing maneuvers	0.071	± 0.001	4 yawing maneuvers	3	S2
$\beta0$	-0.75	± 0.29	14 reverse heading maneuvers	-0.76	± 0.9	23 reverse heading maneuvers	3	S3
Cq	0.99	$\pm 0.0002^*$	14 reverse heading maneuvers	0.99	$\pm 0.0004^*$	23 reverse heading maneuvers	5-7	S3, S4
$a1$	0.046	± 0.002	2 speed maneuvers	0.0465	± 0.007	10 speed maneuvers	4	S1
$a2$	-2.01	± 0.04	2 speed maneuvers	-2.11	± 0.28	10 speed maneuvers	4	S1
$a3$	-1.25	± 0.16	5 yawing maneuvers	-1.58	± 0.09	4 yawing maneuvers	4	S2

540 **3.1.1 Static Pressure**

The blue dots in the figure present the measured data and the black dots represent the fitted relationship (polynomial function).

Formatted: Font: 9 pt, Bold

The static pressure defect was assessed using data from twelve speed runs and nine yawing maneuvers that were performed over northern Germany between 2017 and 2022 (for more details, see Supplement A, Table S1 and Table S2), of which most speed runs were performed in 2019. Overall, external factors that could affect the calibration were relatively small, and likely did not have a large effect on the determination of the static pressure defect. In most cases, speed runs were performed at an altitude of approximately 1000 - 1100 m.a.s.l., the maximum change in groundspeed during the speed maneuvers was approximately 21 m/s (median over all speed runs) and the average vertical wind (w) was close to 0 (see Table S1). Yawing maneuvers were performed at an altitude ranging between 608 and 2602 m, and most

545

550 maneuvers had an average vertical wind speed close to 0 m/s (see Table S2).

Formatted: Font: 12 pt

Formatted: English (United Kingdom)

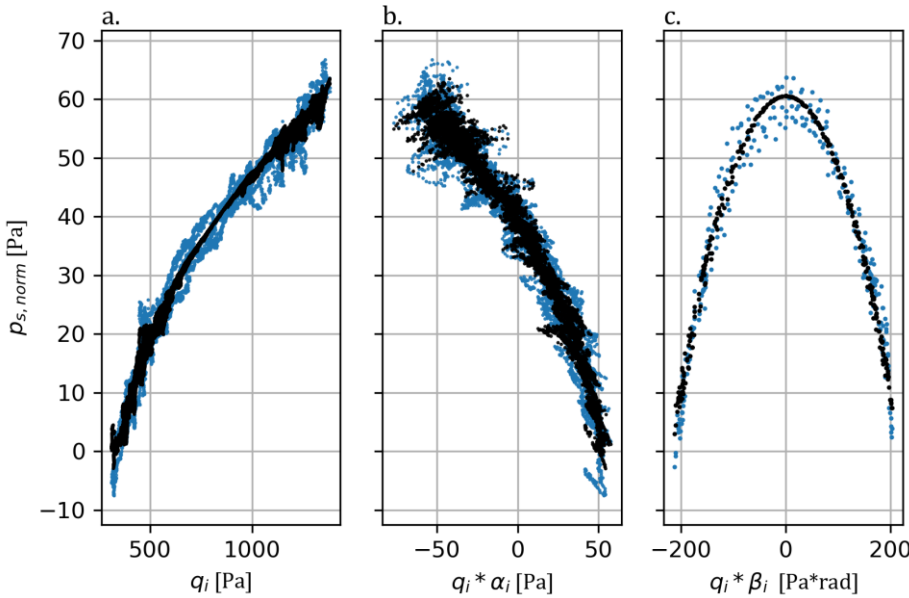


Figure 4: Example of static pressure (p_s) calibration procedure for a calibration flight on the 7th of June, 2018. A polynomial fit is calculated for the relationship between the altitude-normalized static pressure and (a) the indicated dynamic pressure (p_q), (b) α_i and (c) β_i , resulting in the following function: $p_{s, norm} = 0.048 * p_q - 1.98 * p_q * \alpha_i^2 - 1.25 * p_q * \beta_i^2$. The blue dots in the figure present the measured data and the black dots represent the fitted relationship (polynomial function).

Formatted: Font: Bold

$p_{s, norm} = 0.048 * p_q - 1.98 * p_q * \alpha_i^2 - 1.25 * p_q * \beta_i^2$.

Formatted: Font: Bold

In general, the static pressure defect could be well explained for all available maneuvers. Fig. 4 shows an exemplary calibration for a speed and a yawing maneuver flown on the 7th of June 2018. Clearly, the static pressure defect could be well explained by the variability in dynamic pressure and pressure angles (coefficient of determination (r^2) = 0.98 for the speed maneuver; 0.86 for the yawing maneuver). For all other maneuvers, the static pressure defect was also well explained by p_q , p_α and p_β , resulting in r^2 values ranged between 0.91 and 0.99 for all speed maneuvers (median r^2 = 0.985), and between 0.71 and 0.98 for all yawing maneuvers (median r^2 = 0.97).

3.1.2 Dynamic Pressure

The dynamic pressure was calibrated with 37 reverse heading maneuvers that were performed in Germany (DE) and Czech Republic between 2017 and 2022 (for more details, see Supplement A, Table S3 and S4). In general, the average vertical wind was close to 0 and the conditions during the outbound and return flight were very similar (track length, flight time, windspeed, wind direction, wind vectors; see Table S4). Before the calibration parameter for the dynamic pressure were defined, we also checked if the average v_{gs} of each of the 37 flight pairs is similar to the average v_{tas} over both flight sections. This is crucial, as this is an important assumption for the calibration of the dynamic pressure according to Hartmann et al. (2018), specifically for Eq. 6. As shown in Fig. 5a, the relationship between v_{gs} and v_{tas} (where we account for γ , the difference between the true track and true heading) is located very close to the 1:1 line ($y = 1.02x$). This means that flight conditions during both flight segments (outbound and return) were very similar, and dynamic pressure could be calibrated with Eq. 4.

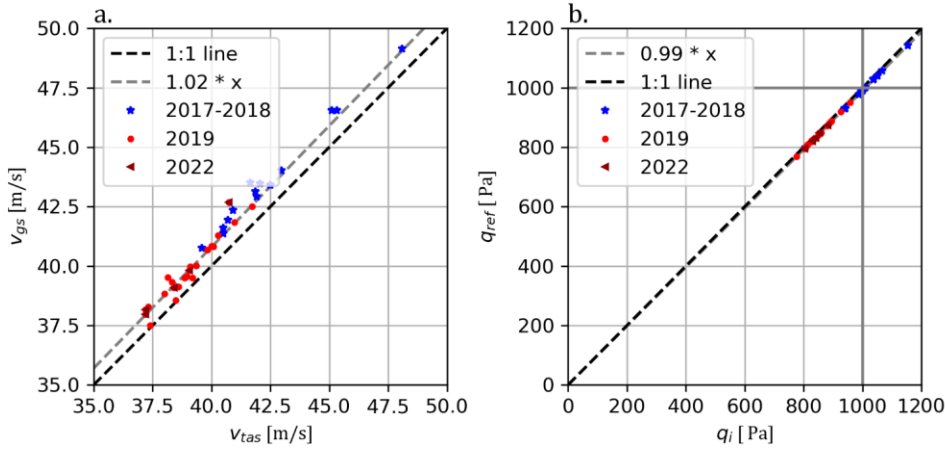


Figure 5: (a.) Relationship between mean V_{tas} and V_{gs} for 37 reverse heading maneuvers colored by measurement year (2017 – 2018, 2019 and 2022) (b.) Relationship between the average indicated dynamic pressure (q_i) and the reference dynamic pressure (for 37 reverse heading maneuvers; see equations 5 and 6).

The results of the dynamic pressure calibration are presented in Fig. 5b. Clearly, the relationship between the average indicated dynamic pressure (q_i) and the average reference dynamic pressure (q_{ref}) of two overpasses is close to the 1:1 line ($y = 0.99x$; see Table 3). These findings are different from Hartmann et al. (2018), who found a clear underestimation of the indicated dynamic pressure ($c_q = 1.165$) as measured by the five-hole probe of the Polar 5 aircraft, showing that a correction of the dynamic pressure was required. Similar to Hartmann et al. (2018), we use the median average deviation from the regression line to estimate the accuracy of the calibration. Considering all 37 measurement flights, the median average deviation of the model residuals was 0.01 hPa, which is similar to the calibration accuracy obtained by Hartmann et al. (2018).

3.1.3 Sideslip Angle

The in-flight calibration of β was performed using data from nine yawing maneuvers and 37 reverse heading maneuvers that were recorded between 2017 and 2022 (for more details, see Supplement A, Table S2 – S4). Figure 6 shows an example of a sideslip angle calibration ($C\beta$) for the 21st of September 2019. During the maneuver, 5 oscillations were performed and the period of each oscillation was ca. 4.2 seconds (≈ 0.24 Hz). The amplitude of the maneuver was ca. 10° (crosswind) and the variability in the horizontal wind components after calibration was relatively small ($\sigma(u) = 0.2$ m/s; $\sigma(v) = 0.16$ m/s). This

595 remaining variance of u and v followed the criterion proposed by Lenschow and Spyers-Duran (1989) and was below 10% of the induced cross wind, suggesting a successful calibration.

Overall, the determination of C_β was successful, as the 10% variance criterion according to Lenschow and Spyers-Duran (1989) was fulfilled for all nine yawing maneuvers. The overall standard deviation of u and v was small for all maneuvers (median $\sigma(u)$ and $\sigma(v)$ = 0.25 m/s), suggesting that the obtained calibration parameters can largely reduce the effects of heading changes on the horizontal wind vectors. The variability of the obtained C_β for the entire measurement period (2017 – 2022) was very small ($\sigma(C_\beta)$ = 0.001) and resulting in very similar calibration values for 2017/2018 (median C_β = 0.072071; N = 55 maneuvers) and 2019/2022 (median C_β = 0.071; N = 4 maneuvers) and 2019/2022 (median C_β = 0.072; N = 4 maneuvers). This is in agreement with Hartmann et al. (2018), who already stated that C_β should not change over time (between different measurement campaigns).

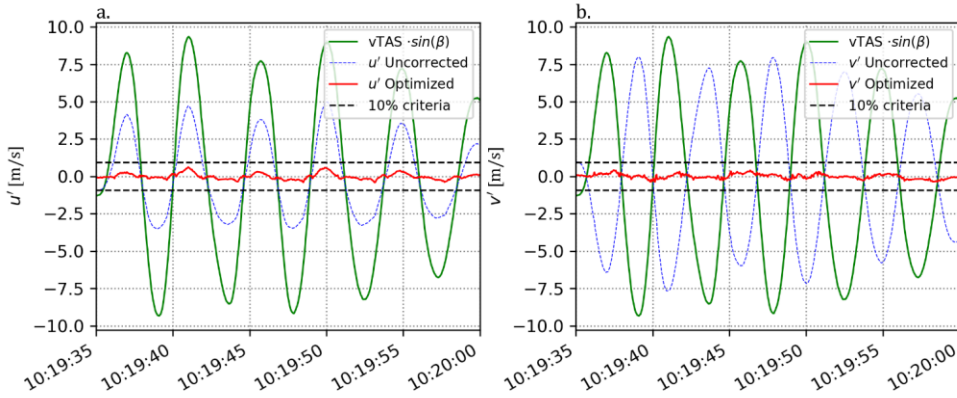


Figure 6: Results of sideslip angle calibration C_β for a yawing maneuver performed with the ASK-16 on the 21st of September 2019. During the determination of C_β , the standard deviation in u and v is optimized simultaneously. The blue line indicates u' (Figure a) and v' (Figure b) wind vectors with no consideration of C_β ($C_\beta = 1$). The red line shows the optimized u' and v' wind vectors ($C_\beta = 0.071$). Black striped lines indicate the maximum allowed deviation of u' and v' (10% of the induced cross wind – in green) as proposed by Lenschow and Spyers-Duran (1989), σ_u and σ_v were 0.2 m/s and 0.16 m/s respectively.

The offset of β (β_0), on the other hand, is more likely to change after remounting the wingpod (Hartmann et al., 2018). The offset of β_0 was determined with the 37 reverse heading maneuvers (see Supplement A Table S4 for details on maneuver conditions). The variability in β_0 was the quite large (ranging

between 0.49 up to -2.11), and the difference in mean u and v for the outbound and return flight ranged from small (0.01 m/s) to being substantial (1.98 m/s). These differences can also be caused by changes in local wind conditions and other flight conditions (e.g. altitude, difference in track, etc.). The differences in windspeed and wind direction are, on the other hand, acceptable, especially considering that it is impossible to have entirely similar atmospheric conditions during both legs. Overall, the average β_0 is very similar for both calibration periods (2017/2018: -0.75, 2019/2022: -0.76) and should provide a good offset value to reduce aircraft-related differences in average horizontal wind components as much as possible. As the given pairs contain quite different meteorological conditions, the applied parameterization should be applicable to a wide range of flight conditions (while fulfilling stationarity and integral turbulence characteristics criteria).

3.1.4 Angle of Attack

Seven pitching maneuvers were performed between 2017 and 2022 to determine $C\alpha$ (for more information see Supplement A, Table S5). Figure 7 shows two examples of angle of attack calibrations for a pitching maneuver performed on the 18th of July 2018 and (b.) ~~other~~another maneuver that was performed on the 7th of June 2018. The amplitude of the vertical velocity of the aircraft during the pitching oscillations ranged between 7 m/s (7b) up to 15 m/s (7a) and the period of each oscillation was ca. 12.4 – 14.5-seconds. Similar to the yawing maneuvers, the variability in the vertical wind vector after calibration was relatively small ($\sigma(w) = 0.17 - 0.27 m/s$) compared to the amplitude of the vertical velocity of the aircraft ($w_p = 15 m/s$). The total oscillation was much smaller than the maximum allowed variation in w as proposed by Lenschow and Spyers-Duran (1989), showing that the calibration of the angle of attack was successful.

Formatted: Not Raised by / Lowered by

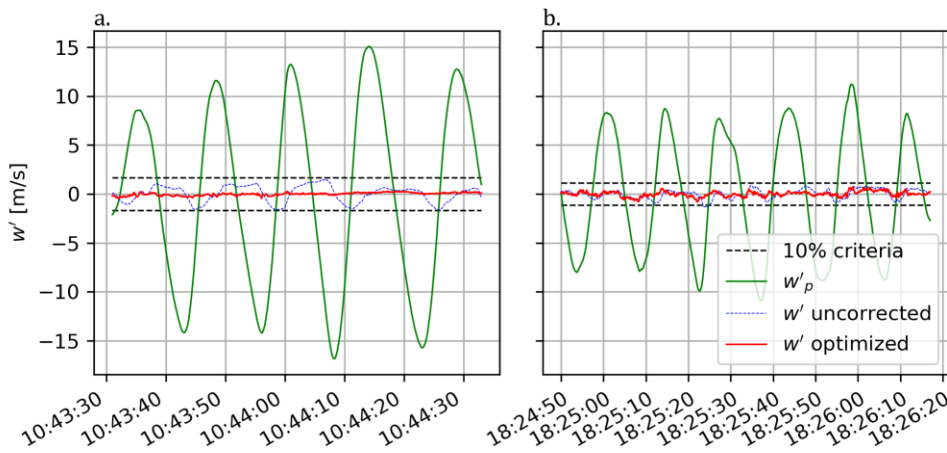


Figure 7: Results of the angle of attack calibration C_α for a pitching maneuver performed with the ASK-16 from (a.) the 18th of July 2018 and (b.) the 7th of June 2018. The blue line indicates vertical wind speed (w') without any specific calibration ($C_\alpha = 1$), the red line shows the optimized wind vector w' where w' is optimized (here $C_\alpha = 0.091$ (a) and 0.093 (b)). During the determination of C_α , the standard deviation of w' is optimized. The mean vertical wind was subtracted from the measurement to better visualize the residual error in w during the pitching oscillation. Black striped lines indicate the maximum allowed deviation of w' (10% of the vertical aircraft movement w'_p) as proposed by Lenschow and Spyers-Duran (1989).

This variation-criterion was also fulfilled for the other six flight maneuvers, resulting in small standard deviations of w during all flights (median $\sigma(w) = 0.23 \text{ m/s}$; ~~mean~~ $\sigma(w) = 0.21 \text{ m/s}$). The measurement conditions (altitude, average windspeed, groundspeed and true airspeed) were variable during the different pitching maneuvers, showing that the proposed C_α values are applicable under different conditions (see Supplement; Table S5). At the same time, C_α for all flights was very similar (2017/2018: 0.091; 2019/2022: 0.091), illustrating that the calibration parameters are robust. Altogether, these results show that the slope (C_α) can reduce the effects of changes in pitch angles on the calculated vertical windspeed.

The offset of alpha (α_0) was determined by minimizing the absolute average w for the 74 legs that were earlier used for the calibration of the dynamic pressure and the offset of beta (see Supplement; Table S3). For the entire monitoring period (2017 – 2019), the offset of α_0 varied between 5.20 and 7.01, which can be related to the highly variable conditions during the legs. Still, the average w for all legs was relatively

Formatted: English (United Kingdom)

Formatted: Not Raised by / Lowered by

Formatted: Not Raised by / Lowered by

Formatted: Not Raised by / Lowered by

Formatted: English (United Kingdom)

close to 0 and the average α_0 values (2017/2018: 5.46; 2019: 5.66) should be able to correct the offset of the angle of attack (α) under quite different flight conditions.

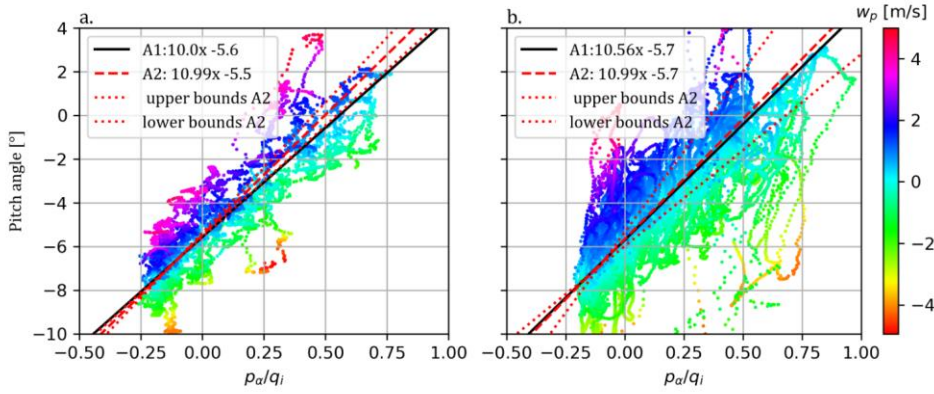


Figure 8: Relationship between the p_α/q_i [-] and the pitch angle [°], for (a) 2017/2018 (b) and 2019/2022, color coded based on the vertical velocity of the aircraft (w_p [m/s]). The black lines present the relationship, based on a simple linear regression data where $|w_p| < 1.5$ (represented by Eq A1). The red lines present the correction of the angle of attack based on seven pitching maneuvers and 76 flight legs (represented by Eq. A2; see Table 3).

An alternative approach to look at the correction factors for α , is to look at speed runs and plot p_α/q_i and the pitch angle, with respect to the vertical velocity of the aircraft w_p as proposed by Hartmann et al. (2018). Table S1 shows the speed runs that were used for the alternative calibration of α (Eq A1). Figure 8 shows the relationship between $\frac{p_\alpha}{q_i}$ and the pitch angle for all maneuvers in 2017/2018 and 2019 and 2022, including only segments where w_p was smaller than 5 m/s. Clearly, the alternative calibration based on the speed run data ($w_p < 1.5 \frac{m}{s}$; black curve) fits the data quite similarly compared to the first calibration approach (Eq. A2, red curve with uncertainty boundaries; based on pitching oscillations and straight flight legs). The fact that both methods provide quite similar calibration curves, shows that both approaches can be used to calibrate α .

3.2 Wind Quality Evaluation

The quality of the final wind product obtained from the ASK-16 measurement flights can be assessed from different perspective, using multiple analysis results. First, we assess the quality of the wind vector based on the calibration results from the different maneuvers as presented in section 3.1. In general, the calibration results have shown that the effect of aircraft movement on the measured wind vector can be significantly reduced by the obtained calibration parameters (see Table 3). The obtained parameters seem

to be robust as they show little variation during different flight conditions (wind speed, temperature, humidity, measurement altitude, etc.).

670 Additionally, yaw and pitch maneuvers can provide us with information about the remaining uncertainty of the wind components. Sideslip and angle of attack calibration results show that the remaining uncertainty (precision; here defined as standard deviation during pitching/yawing maneuver) of w , u and v is in most cases between 0.2 and 0.25 m/s when the vertical speed of the aircraft is on average 0.21 m/s. Considering that the horizontal and vertical movement of the aircraft is generally much smaller during
675 real measurement flights, the real accuracy of w , u and v is expected to be smaller.

Another way to look at the quality of the calibration is to look at the wind vectors obtained during wind square maneuvers. Figure 9 shows uncalibrated and calibrated wind speed, wind direction (Fig. 9a and b), u and v (Fig. 9d and e) during a wind square maneuver flown on the 21st of September 2019. Here,
680 the uncalibrated wind vectors show a clear change of u and v with the horizontal movement of the aircraft (yaw angle ψ), indicating that the wind vectors are affected by the movement of the aircraft. This bias is not visible in the calibrated wind vector, where we see a more homogeneous wind field, and a generally smaller variability in wind speed, wind direction, u , and v . Considering that the wind calibration parameters have been obtained independently, these results show that the calibration parameters reduce aircraft
685 movement induced effects on the wind vectors can be successfully applied to other flight data.

A third way to assess the quality of the obtained wind vectors is to assess the data in frequency space. Figure 10 shows power spectra of the calculated u , v , w , the measured temperature and the abundance of CH₄, CO₂ and H₂O for a flight leg (ca. 26 km long) flown on the 21st of August 2019 over northeast
690 Germany. Flight legs were flown at an altitude of 150 - 230 m.a.g.l., the wind was coming from the west and the boundary layer thickness during these flights was between 2250 and 2300 m above the surface (see Supplement B). In Fig. 10a, we clearly see that the wind follows a -5/3 drop-off, describing the energy decay of turbulent elements according to Kolmogorov's law (Foken, 2017). Similar observations were made by Metzger et al. (2012) and these results suggest that the different frequencies were appropriately
695 represented in the measurements.

Formatted: English (United Kingdom)

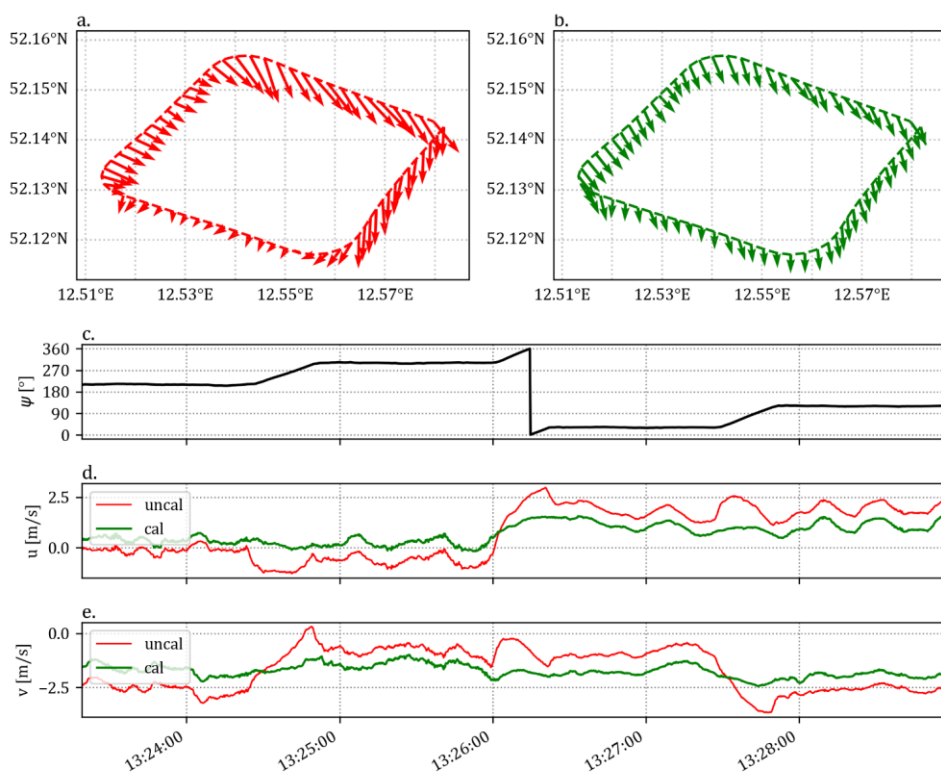


Figure 9: Comparing calibrated (*cal*; green) and uncalibrated (*uncal*; red) wind vectors for a wind square maneuver (duration: ca. 5.5 minutes), flown close to Bad Belzig, Germany (52.1427° N, 12.5952° E) on the 21st of September 2019. The heading as measured by the INS-GNSS (*c*) is plotted above both horizontal wind components *u* and *v* (subfigure *d* and *e*) to indicate the effect of the aircraft movement on the wind vector before and after calibration.

The spectra of the measured gasses and temperature, on the other hand, did not follow the $-5/3$ drop-off as nicely. The observed spectral shapes indicate that these datasets contained more white noise. These results are similar to spectral analysis that were earlier reported by Wolfe et al. (2018). Wolfe et al. (2018) and Hartmann et al. (2018), who also identified noise in the power spectra of CH₄ and CO₂ data obtained from closed path LGR fast gas analyzers. However, as the white noise is generally uncorrelated to the wind data, this should not affect the obtained fluxes (see e.g. Hartmann et al., 2018). The H₂O power spectrum shows clear signal attenuation (loss in signal) at higher frequencies, which is common for closed path systems (e.g. Polonik et al., 2019). This will, however, contribute to only small losses of fluxes (covariances) for the aircraft flying approximately 150 - 230 m above the surface. — [Cospectra](#)

Formatted: English (United Kingdom)

Formatted: English (United Kingdom)

(Supplement C, Figure S5) also clearly indicate that the noise signal (visible in the spectral plots) is not correlated with the vertical wind and does not cause any artificial flux signal.

710

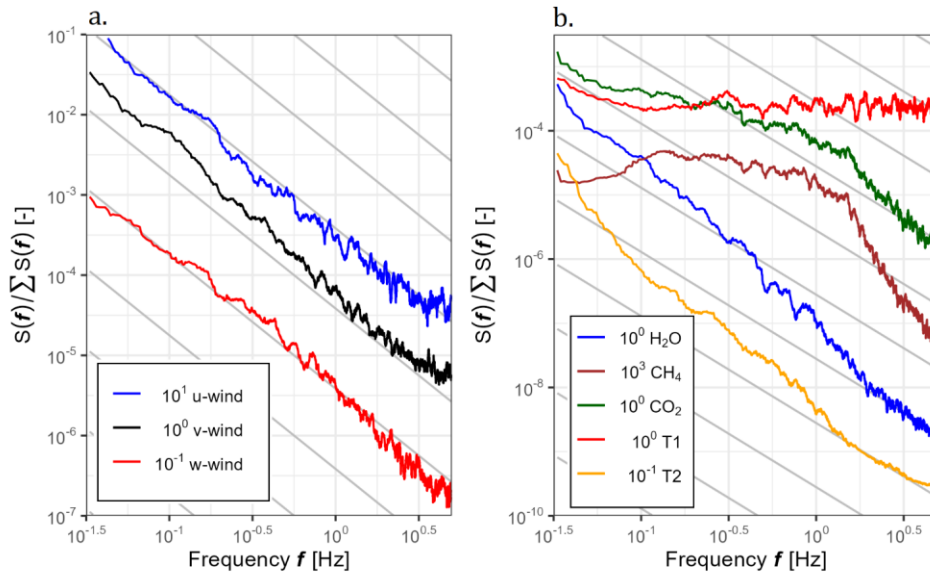


Figure 10: Power spectra of the fluctuations of (a) the 3-dimensional wind vector, (b) the measured gasses, and the air temperature data (T1 = thermocouple, T2 = Vaisala Pt100 sensor). The raw spectra are obtained from a 10-minute time series and are smoothed (“daniell” kernel from stats library in R), normalized by total spectral power and therefore non-dimensional. All straight slopes show a -5/3 decrease, showing the theoretical decay of turbulence with increasing frequency according to Kolmogorov’s law (Foken, 2017). These power spectra show flight data from one flight leg (flight date: 21st of August 2019; altitude: between 220 and 310 m.a.s.l.) over a heterogeneous landscape (land use: mainly forest and lakes), close to the Müritz national park in Germany.

3.3 Fluxes and Footprints over Northeast Germany

715 To illustrate the flux output that was obtained with the eddy4R packages, we used flight data from 29th of August 2018 flown in the surroundings of Demmin (53.9056° N, 13.0498° E) and the Kummerower See (53.7991° N, 12.8499° E) in Northeast Germany. During this measurement flight, five flight legs were flown over a heterogeneous transect with lake, forest, agricultural, grassland and peatland segments (Fig. 12e). Figure 11 shows exemplary wavelet and Reynolds based CO₂ fluxes for the first flight leg (northeast to southwest). [Obtained lag times between the gas analyzer \(Picarro\) and the wind are documented in](#)

720

Table 4.

Table 4: *Obtained lags [in seconds] between the measured gasses by the Picarro G2311-f and the calculated wind vector for 5 flight legs on the 29th of 2018. Fluxes for these flights and a quality assessment of these fluxes are provided in Figure 11, 12 and Table 5.*

<u>Flight leg</u>	<u>Lag CH₄ – w [s]</u>	<u>Lag CO₂ – w [s]</u>	<u>H₂O – w [s]</u>
<u>29.08.2018, Leg 1</u>	<u>-1.4</u>	<u>-1.4</u>	<u>-4.3</u>
<u>29.08.2018, Leg 2</u>	<u>-1.4</u>	<u>-1.4</u>	<u>-4.6</u>
<u>29.08.2018, Leg 3</u>	<u>-1.3</u>	<u>-1.4</u>	<u>-4.7</u>
<u>29.08.2018, Leg 4</u>	<u>-1.4</u>	<u>-1.4</u>	<u>-4.7</u>
<u>29.08.2018, Leg 5</u>	<u>-1.3</u>	<u>-1.4</u>	<u>-4.3</u>
<u>29.08.2018, used lag time</u>	<u>-1.4</u>	<u>-1.4</u>	<u>leg dependent</u>

The dominant blue color in the cross-scalogram (Fig. 11a) reveals that we mainly measured an uptake of CO₂ (negative fluxes). The spatial pattern of the fluxes (Fig. 11d) ~~are is~~ similar for the wavelet based and Reynolds based CO₂ fluxes, although the Reynolds based fluxes are generally somewhat smaller ~~and more noisy (due to under sampled low frequencies)~~. This is expected, as wavelet-based fluxes contain lower-frequency information that is not present in the 2 km Reynolds based flux data. In general, the highest CO₂ uptake is observed during the ~~first last~~ 6 to 8 km of the flight track, and is then decreasing until the southwestern end of the track. —

The data in Fig. 11 only presents the spatially measured CO₂ flux for one flight leg. To get a broader overview of the measured fluxes, Fig. 12 shows information about the fluxes itself (a – c), their footprints (averaged over all legs, see Fig. 12d and e) and the variability in fluxes (a-c) measured during the different flight legs. Clearly, the CO₂ fluxes measured during the other flight legs were also negative, and the average spatial CO₂ flux pattern was similar to the pattern already observed in Fig. 11. CH₄ fluxes, on the other hand were positive and showed a mirroring trend with the largest peak in emissions in the region where the largest uptake of CO₂ was observed. These peaks are connected high percentages of forest and peatland coverage. CO₂ uptake was largest for an area with 52.6 % of forest, 13.9 % of peatland coverage (63.5% of total coverage, green triangles in Fig. 12) and CH₄ fluxes were largest for an area with 50% of forest and 22% of peatland coverage (72% of total coverage, red dots in Fig. 12; according to CLC 2018, version 2020, European Environment Agency (2020)). At the same time, the highest variability in latent heat fluxes is observed in the region where the highest percentage of peatland was observed (see Fig. 12c). Figure 12 already provides a quick insight on how measured fluxes can be connected to land surface properties. Past research has already revealed that larger airborne eddy covariance datasets can have a large potential in connecting fluxes and surface properties (e.g., Metzger et al., 2013; Serafimovich et al.,

Formatted: Subscript

Formatted: Subscript

Formatted: Subscript

Formatted: Subscript

Formatted: Subscript

Formatted: Subscript

Formatted: Subscript

2018; Vaughan et al., 2021; Zulueta et al., 2013).

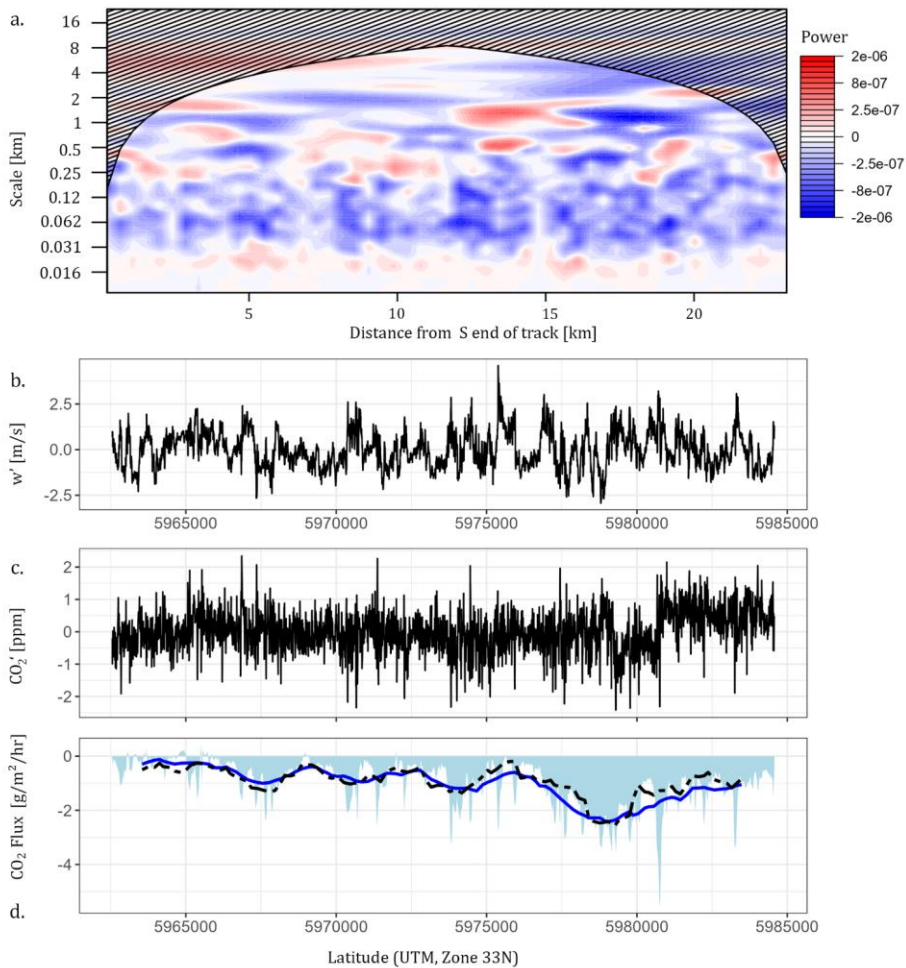


Figure 11: *CO₂ flux data for a flight leg (leg 2, see Table 5) flown over Northeast Germany (close to Demmin, Mecklenburg-Vorpommern, Germany), which was recorded on the 29th of August 2018. The cross-scalogram (a) shows positive (red, upward fluxes) and negative covariances (blue, downward fluxes) between CO₂' (b) and w' (c). In this case, blue colour dominates in the cross-scalogram, indicating that uptake of CO₂ dominates during this flight leg at this time of the year. The final scale-integrated fluxes at high resolution (light blue area), and the 2 km integrated-fluxes (dark blue line) are shown on the bottom in comparison to Reynolds decomposed fluxes (black dotted lines, calculated every 200 m for*

Formatted: Font: Italic


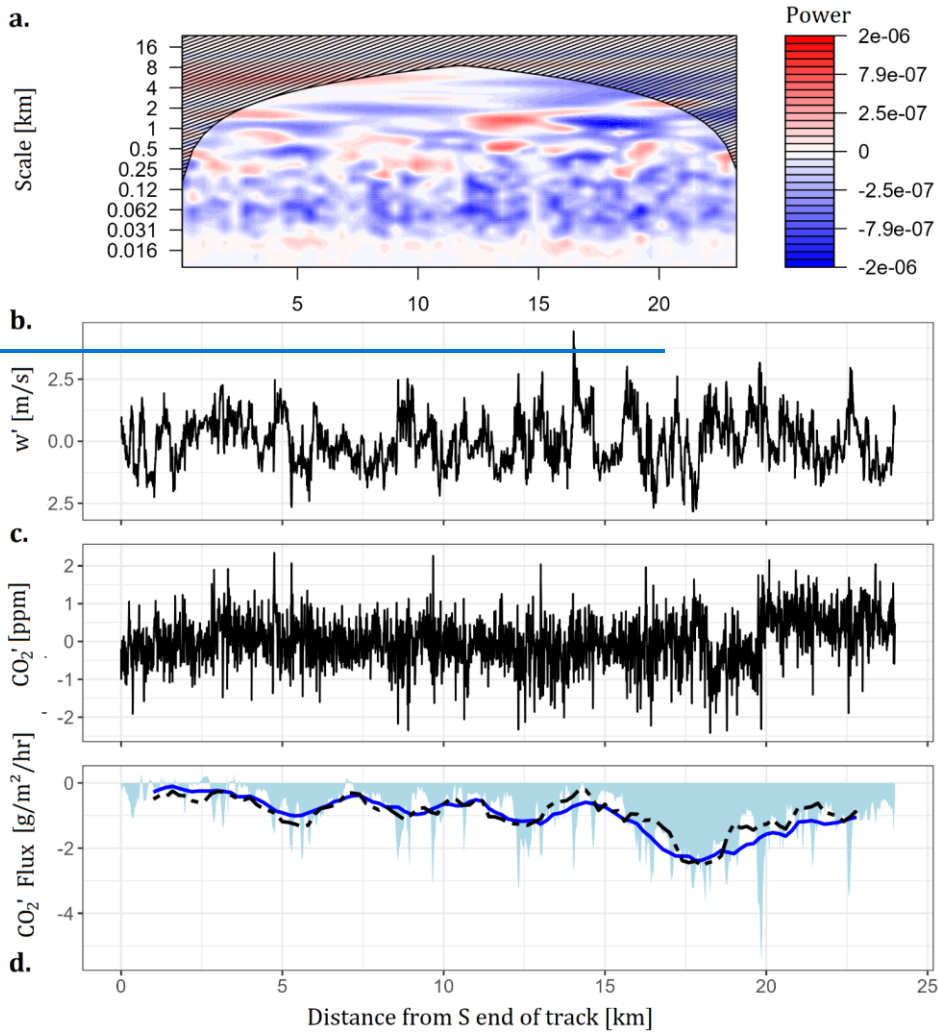


Figure 11: CO₂ flux data for a flight leg (leg 2, see Table 4) flown over Northeast Germany (close to Demmin, Mecklenburg-Vorpommern, Germany), which was recorded on the 20th of August 2018. The cross scalogram (a) shows positive (red, upward fluxes) and negative covariances (blue, downward fluxes) between CO₂' (b) and w' (c). In this case, blue colour dominates in the cross scalogram, indicating that uptake of CO₂ dominates during this flight leg at this time of the year. The final scale integrated fluxes at high resolution (light blue area), and the 2 km integrated fluxes (dark blue line) are shown on the bottom in comparison to Reynolds decomposed fluxes (black dotted lines, calculated every 200 m for

Formatted: Font: Italic

770 2 km windows).

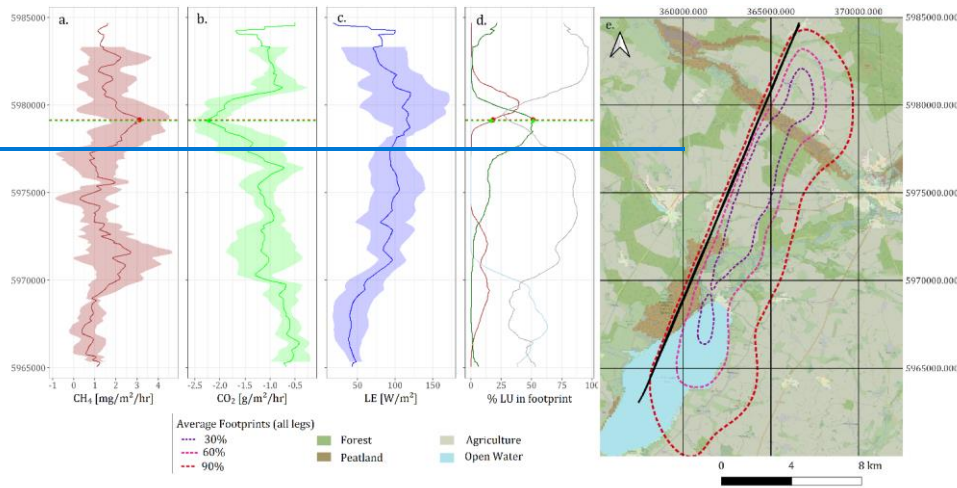

Flight distance as presented on the x axis of subfigure a is representative for all subfigures. The latitude on the x-axes (UTM, Zone 33 N) correspond with coordinates in Figure 12.

775

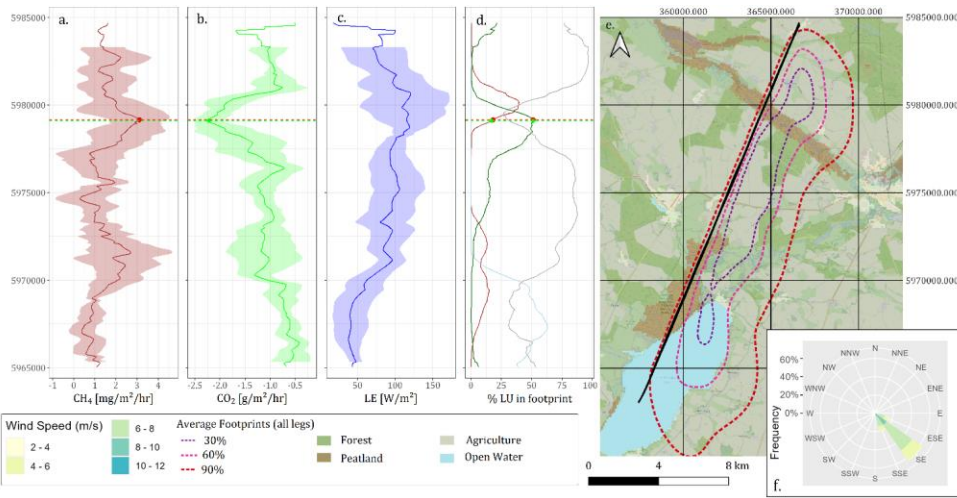


Figure 12: Transect with measured CO_2 , CH_4 and LE (latent heat) fluxes over a heterogeneous landscape in Northeast Germany (close to Demmin; date: 29th of August 2018). The location of the transect is shown in figure 12e (background: open street maps). Flux data in graph a – c is based on airborne flight data from 5 flight legs, where thicker lines show the median fluxes and the coloured areas surrounding these lines, indicating the standard deviation of these fluxes. Besides the measured fluxes, land use cover and

average footprints (based on footprints from all 5 individual legs) are shown in subfigure d and e. The land use classification presented in this map (subfigure e) is a simplified version of the Corine land cover classification of 2018 (Corine Land Cover (CLC) 2018, Version 2020_20u1 (European Environment Agency, 2020)). *Subfigure f shows a wind rose with the dominant wind direction(s) during the five flight legs.*

Formatted: Font: 12 pt, Not Bold, Font color: Auto, English (United States)

~~The data in Fig. 11 presents only the spatially measured CO₂ flux for one flight leg. To get a broader overview of the measured fluxes, Fig. 12 shows information about the fluxes itself (a – e), their footprints (d and e) and the variability in fluxes (a – e) measured during the different flight legs. Clearly, the CO₂ fluxes measured during the other flight legs were also negative, and the average spatial CO₂ flux pattern was similar to the pattern already observed in Fig. 11. CH₄ fluxes, on the other hand were positive and showed a mirroring trend with the largest peak in emissions in the region where the largest uptake of CO₂ was observed. These peaks are connected high percentages of forest and peatland coverage. CO₂ uptake was largest for an area with 52.6 % of forest, 13.9 % of peatland coverage (63.5% of total coverage, green triangles in Fig. 12) and CH₄ fluxes were largest for an area with 50% of forest and 22% of peatland coverage (72% of total coverage, red dots in Fig. 12; according to CLC 2018, version 2020, European Environment Agency (2020)). At the same time, the highest variability in latent heat fluxes is observed in the region where the highest percentage of peatland was observed (see Fig. 12e). Figure 12 already provides a quick insight on how measured fluxes can be connected to land surface properties. Past research has already revealed that larger airborne eddy covariance datasets can have a large potential in connecting fluxes and surface properties (e.g. Metzger et al., 2013; Serafimovich et al., 2018; Vaughan et al., 2021; Zulueta et al., 2013).~~

Formatted: Font: Italic

Formatted: Font: Italic, Subscript

Formatted: Font: Italic

Formatted: Font: Italic

Formatted: Font: Italic, Subscript

Formatted: Font: Italic

Formatted: Font: Italic, Subscript

Formatted: Font: Italic

Formatted: Font: Italic, Subscript

Formatted: Font: Italic

Formatted: Font: Italic, Subscript

Formatted: Font: Italic

Formatted: Font: Italic, Subscript

Formatted: Font: Italic

Formatted: Font: Italic, Subscript

Formatted: Font: Italic

Formatted: Font: Italic

3.4 Flux Quality Evaluation

After assessing the quality of the wind vector, the quality of the measured fluxes also needs to be evaluated. Table 45 shows the results of the stationarity assessment, the assessment of the integral turbulence characteristics, the calculated detection limits of the fluxes for the measurement flight. As a reference, the Reynolds fluxes for the entire flight legs are also provided. Mind that these fluxes do not represent the variability in the fluxes (as shown in Fig. 12), but rather the overall leg-averaged flux.

Formatted: Font: Not Bold, Font color: Auto

Table 4: Quality assessment of five flight legs flown on the 28th of August 2018, close to Demmin, Germany (see Figure 12). The table includes information about the leg-based fluxes (Reynolds Fluxes), the integral turbulence characteristics (ITCS), stationarity and the detection limits of the measured fluxes (according to Billesbach (2011)).

Formatted: Font: Italic

-	General	Reynolds Fluxes	ITCS	Detection Limits	Steady State
---	---------	-----------------	------	------------------	--------------

# Flux Segments	Km covered	fLE	fCH ₄	fCO ₂	u	w	u*	LE	CH ₄	CO ₂	Stationarity test passed?	
=	=	W/m ²	mg/m ² /hr	g/m ² /hr	%	%	%	W/m ²	mg/m ² /hr	g/m ² /hr	=	
Leg 1	117	25.4	90.0	1.31	-1.31	47.6	11.4	48.7	6.2	0.52	0.12	no [CH ₄ , CO ₂]
Leg 2	111	24.2	79.0	1.48	-1.00	36.7	12.2	41.3	6.4	0.50	0.11	yes
Leg 3	112	24.4	73.8	1.99	-1.36	38.9	15.0	38.9	6.0	0.35	0.09	yes
Leg 4	115	25	78.7	1.63	-1.24	45.9	9.6	45.9	7.0	0.47	0.13	yes
Leg 5	108	23.6	128.0	1.41	-1.24	50.1	14.0	50.07	8.1	0.43	0.11	yes

The detection limits of the fluxes are generally much lower than the measured leg-based fluxes. Most of the 200-200m based fluxes are also above these detection limits, indicating that the observed fluxes in this region are high enough to be measured with our current setup. As airborne eddy covariance fluxes can only be measured under stationary conditions, stationarity needs to be assessed. In most case, the stationarity test was also passed, except for the first flight leg, where the stationarity requirements were not met for CH₄ and CO₂ fluxes. The integral turbulence characteristics are ≤ 100% for all flight segments during all legs, indicating that the turbulence conditions were adequate during the flight.

Table 5: Quality assessment of five flight legs flown on the 29th of August 2018, close to Demmin, Germany (see Figure 12). The table includes information about the leg-based fluxes (Reynolds Fluxes), the integral turbulence characteristics (ITCS), stationarity and the detection limits of the measured fluxes according to Billesbach (2011).

Formatted: Font: Italic

General		Reynolds Fluxes			ITCS			Detection Limits			Steady State	
# Flux Segments	Km covered	fLE	fCH ₄	fCO ₂	u	w	u*	LE	CH ₄	CO ₂	Stationarity test passed?	
=	=	W/m ²	mg/m ² /hr	g/m ² /hr	%	%	%	W/m ²	mg/m ² /hr	g/m ² /hr	=	
Leg 1	117	25.4	90.0	1.31	-1.31	47.6	11.4	48.7	6.2	0.52	0.12	no [CH ₄ , CO ₂]
Leg 2	111	24.2	79.0	1.48	-1.00	36.7	12.2	41.3	6.4	0.50	0.11	yes
Leg 3	112	24.4	73.8	1.99	-1.36	38.9	15.0	38.9	6.0	0.35	0.09	yes
Leg 4	115	25	78.7	1.63	-1.24	45.9	9.6	45.9	7.0	0.47	0.13	yes
Leg 5	108	23.6	128.0	1.41	-1.24	50.1	14.0	50.07	8.1	0.43	0.11	yes

One way to look at the uncertainty of the calculated fluxes is to evaluate the variability in obtained fluxes for repeated flight paths. Figure 12 clearly shows the variability and therewith the uncertainty of the fluxes during a flight over a heterogeneous landscape indicated by the shading. The uncertainty is calculated as the standard deviation of five repeated measurements (flight legs) per 200 meter segment. Although part of the differences in fluxes might be assigned to differences in footprints, it does give an indication of the

uncertainty of the obtained fluxes. Based on the repeated flight legs, the ~~uncertainty~~ variability in CH₄ fluxes was 86.2 ± 57.7 %, the ~~uncertainty~~ variability in CO₂ fluxes was 32.9 ± 12.9 %, and the ~~uncertainty~~ variability in latent heat fluxes was 36.6 ± 13.0 % per 200 m segment. Clearly, Fig. 12 clearly shows that even when we consider these uncertainties, general trends in energy and matter fluxes can still be clearly identified.

Formatted: Subscript

Formatted: Subscript

Another way to evaluate the uncertainty of the calculated fluxes is to calculate the systematic (SE) and random statistical errors (RE) according to Mann and Lenschow (1994) and Lenschow and Stankov (1986). Table 56 summarizes these errors both for Reynolds based and wavelet based fluxes. Please mind that these errors mainly describe the errors of single segments (except for the relative error according to Billesbach (2011)). Larger random errors were generally observed for smaller CH₄ fluxes, which is in agreement with the observations by Wolfe et al., (2018). Please mind that these errors mainly describe the errors of single segments (except for the relative error according to Billesbach (2011)). As we calculate a flux over a 2 km window for every 200 meters, flux segments often overlap spatially, which will decrease the error over a specific region. Generally, the systematic errors are very small (in most cases up to 1%) and the random errors for single leg segments are much larger (< 100% for Reynolds fluxes, and > 100% for wavelet fluxes). As the random shuffling method by Billesbach (2011) can also be used to determine the random error of the flux (e.g. Dong et al., 2021), this random flux error that is representative for a leg-averaged flux was also added to the table.

Field Code Changed

~~The obtained magnitudes of the systematic and random errors are similar to earlier studies (e.g. Wolfe et al., 2018; Metzger et al., 2012). The difference in errors between Reynolds and wavelet based fluxes can be explained by the fact that Mann and Lenschow (1994) assume that fluxes over a 2 km window only use fluxes within that window. This is not the case for wavelet based fluxes, where time series information from the entire lag is used for the derived covariances. This was already described in Wolfe et al. (2018) and could explain the much larger random errors for the wavelet based fluxes. The errors based on the repeated flight legs (Fig. 12) and the Reynolds based fluxes are much more similar and are expected to be more realistic. Overall, this suggests that random errors of individual leg segments (here 2km averaged fluxes) are rather in the range of 30-40% for LE and CO₂ and 80-100% for CH₄.~~

Table 56: Error assessment of Airborne Fluxes for the ASK-16 platform. This table provides an overview of the systematic errors (SE) and the random errors (RE) of the calculated CO₂, CH₄ and LE fluxes (both wavelet and Reynolds) in percentage (%). Errors were calculated according to Mann and Lenschow (1994), Lenschow and Stankov (1986), and Billesbach (2011). All flux errors are given for flight segments

(a flux is calculated for a 2 km window every 200 m). The random flux error according to Billesbach (2011) was only calculated for the entire flight leg.

Leg & Flux	Segments (n)	SE Wavelet	RE Wavelet	RE Billesbach	SE Reynolds	RE Reynolds
CO₂	-	%	%	%	%	%
Leg 1 29.08.2018 CO ₂	117	0.9	119.1	9.2	1.0	31.8
Leg 2 29.08.2018 CO ₂	111	0.7	134.4	11.0	1.0	34.7
Leg 3 29.08.2018 CO ₂	112	0.9	108.0	6.6	0.9	29.8
Leg 4 29.08.2018 CO ₂	115	0.8	133.2	10.5	1.2	37.1
Leg 5 29.08.2018 CO ₂	108	0.8	127.5	8.9	0.9	37.8
All legs CO ₂	563	0.8	124.4	9.2	1.0	34.3
CH₄	-	%	%	%	%	%
Leg 1 29.08.2018 CH ₄	117	0.8	407.9	39.7	1.1	96.2
Leg 2 29.08.2018 CH ₄	111	0.6	432.5	33.8	1.0	112.9
Leg 3 29.08.2018 CH ₄	112	1.0	336.7	17.6	0.9	90.1
Leg 4 29.08.2018 CH ₄	115	0.9	397.2	28.7	1.0	97.5
Leg 5 29.08.2018 CH ₄	108	0.8	321.7	30.5	0.9	96.1
All legs CH ₄	563	0.8	379.2	30.0	1.0	98.5
LE	-	%	%	%	%	%
Leg 1 29.08.2018 LE	117	1.7	110.8	6.9	4.1	45.6
Leg 2 29.08.2018 LE	111	1.5	129.2	8.1	3.9	46.3
Leg 3 29.08.2018 LE	112	1.8	125.3	8.1	4.2	45.4
Leg 4 29.08.2018 LE	115	1.3	120.2	8.9	3.7	46.4
Leg 5 29.08.2018 LE	108	1.7	115.8	6.3	4.5	50.2
All legs LE	563	1.6	120.3	7.7	4.1	46.8

The obtained magnitudes of the systematic and random errors are similar to earlier studies (e.g., Wolfe et al., 2018; Metzger et al., 2012). The difference in errors between Reynolds and wavelet based fluxes can be explained by the fact that Mann and Lenschow (1994) assume that fluxes over a 2 km window only use flux data within that window. This is not the case for wavelet based fluxes, where time series information from the entire lag is used for the derived covariances within a given window. This was already described in Wolfe et al. (2018) and could explain the much larger random errors for the wavelet based fluxes. The errors based on the repeated flight legs (Fig.12) and the Reynolds based fluxes are much more similar and are expected to be more realistic. Overall, this suggests that random errors of individual leg segments (here 2km averaged fluxes) are rather in the range of 30-40% for LE and CO₂ and 80-100% for CH₄.

Formatted: Font: Times New Roman, 12 pt

4. Conclusion and Outlook

In this paper, we have described the ASK-16 airborne measurement platform, which can be used to measure airborne eddy covariance fluxes. Here, we have demonstrated that this platform can produce a 3-dimensional wind vector that has a similar quality as other airborne eddy covariance measurement platforms (Metzger et al., 2011; Mallaun et al., 2015; Hartmann et al., 2018)(Metzger et al., 2011; Mallaun et al., 2015; Hartmann et al., 2018). Although the spectra of the gas measurements and the fast temperature showed white noise, this should not affect fluxes as noise is uncorrelated to the measured wind (Hartmann et al., 2018). This paper has also provided a way to evaluate the quality of the obtained fluxes with the help of different tools that are available within the eddy4R toolbox, including stationarity tests, ITCS, the identification of detection limits. Detection limits for the turbulent fluxes were between 6 – 8 W/m² for LE, 0.35 – 0.52 mg/m²/hr for CH₄ and 0.09 – 0.13 g/m²/hr for CO₂.

The flux products that can be obtained for the ASK-16 platform were illustrated using exemplary flux transects over Northeast Germany. The measurement errors of the fluxes have similar magnitudes as previously well-established airborne platforms (e.g. Metzger et al., 2012; Wolfe et al., 2018)(e.g. Metzger et al., 2012; Wolfe et al., 2018). Additionally, the flux transect data has illustrated that the ASK-16 can be used to measure turbulent fluxes over a heterogeneous landscape, such as Northeast Germany and that the obtained fluxes can be linked to surface properties. Considering the spatial distribution of eddy covariance towers and the potential of airborne platforms to cover large regions, platforms such as the ASK-16 are useful tools to bridge these scales.

Acknowledgements

We would like to acknowledge Hauke Dämpfling for his support in setting up the measurement system (wingpod) and creating the data logging tool. We also want to thank Jürgen Fischer and Carsten Lindemann for their (flight) support to the project. This work was funded by the Deutsche Forschungsgemeinschaft (DFG, German Research Foundation – Projektnummer 414169436 and 465048505). The National Ecological Observatory Network is a program sponsored by the National Science Foundation and operated under cooperative agreement by Battelle. This material is based in part upon work supported by the National Science Foundation through the NEON Program. We also acknowledge the support received from the NFDI4Earth Academy (Deutsche Forschungsgemeinschaft (DFG, German Research Foundation) - Projektnummer 460036893).

Formatted: Space Before: 0 pt

Code availability

The eddy4R v.1.3.1 software framework used to generate eddy covariance flux estimates can be freely accessed at <https://github.com/NEONScience/eddy4R> ~~https://github.com/NEONScience/eddy4R~~ (Metzger et al., 2017). The eddy4R turbulence v0.0.16 software module and advanced airborne data processing were accessed under terms of use (~~<https://www.eol.ucar.edu/content/cheesehead-code-policy-appendix>~~<https://www.eol.ucar.edu/content/cheesehead-code-policy-appendix>) and are available upon request. The PyWingpod source code that has been used to process the wingpod data and to calibrate the wind data of the ASK-16 is publicly available and can be accessed via <https://doi.org/10.5880/GFZ.1.4.2024.004> ~~https://doi.org/10.5880/GFZ.1.4.2024.004~~ (Wiekenkamp et al., 2024a).

Formatted: Default Paragraph Font

Data availability

The data used in this manuscript is publicly available online and can be explored and downloaded via the following link: <https://doi.org/10.5880/GFZ.1.4.2024.003> ~~https://doi.org/10.5880/GFZ.1.4.2024.003~~ (Wiekenkamp et al., 2024b).

Formatted: Default Paragraph Font

Author contributions

IW wrote the original draft, conducted the analyses, and created the figures and tables. The conceptualization and design of this study was created by IW, TS, CW and MZ with support from JH, SM and TR. AKL and AB helped with the wind calibration procedures that are shown in the manuscript. IW, AKL, AB, JH, SM, TR, CW, MZ, TS edited and reviewed the manuscript. TR, TS provided the resources for this study and TS was responsible for the funding acquisition and project administration. Software was developed by SM (Eddy4R), -IW, AKL, AB, TR, and TS (PyWingpod).

Competing interests

The authors declare that they have no conflict of interest.

References

Formatted: Font: Times New Roman

- Baldocchi, D. D.: Assessing the eddy covariance technique for evaluating carbon dioxide exchange rates of ecosystems: past, present and future, *Global Change Biology*, 9, 479-492, <https://doi.org/10.1046/j.1365-2486.2003.00629.x>, 2003.
- 915 Bange, J., Spieß, T., Herold, M., Beyrich, F., and Hennemuth, B.: Turbulent fluxes from Helipod flights above quasi-homogeneous patches within the LITFASS area, *Boundary-Layer Meteorology*, 121, 127-151, 10.1007/s10546-006-9106-0, 2006.
- Billesbach, D. P.: Estimating uncertainties in individual eddy covariance flux measurements: A comparison of methods and a proposed new method, *Agricultural and Forest Meteorology*, 151, 394-405, 920 <https://doi.org/10.1016/j.agrformet.2010.12.001>, 2011.
- Bögel, W. and Baumann, R.: Test and Calibration of the DLR Falcon Wind Measuring System by Maneuvers, *Journal of Atmospheric and Oceanic Technology*, 8, 5-18, 10.1175/1520-0426(1991)008<0005:TACOTD>2.0.CO;2, 1991.
- Chang, R. Y.-W., Miller, C. E., Dinardo, S. J., Karion, A., Sweeney, C., Daube, B. C., Henderson, J. M., 925 Mountain, M. E., Eluszkiewicz, J., Miller, J. B., Bruhwiler, L. M. P., and Wofsy, S. C.: Methane emissions from Alaska in 2012 from CARVE airborne observations, *Proceedings of the National Academy of Sciences*, 111, 16694-16699, 10.1073/pnas.1412953111, 2014.
- Desjardins, R. L., Brach, E. J., Alvo, P., and Schuepp, P. H.: Aircraft Monitoring of Surface Carbon Dioxide Exchange, *Science*, 216, 733-735, doi:10.1126/science.216.4547.733, 1982.
- 930 Desjardins, R. L., Worth, D. E., MacPherson, J. I., Bastian, M., and Srinivasan, R.: Flux measurements by the NRC Twin Otter atmospheric research aircraft: 1987–2011, *Adv. Sci. Res.*, 13, 43-49, 10.5194/asr-13-43-2016, 2016.
- Desjardins, R. L., Worth, D. E., Pattey, E., VanderZaag, A., Srinivasan, R., Mauder, M., Worthy, D., Sweeney, C., and Metzger, S.: The challenge of reconciling bottom-up agricultural methane emissions 935 inventories with top-down measurements, *Agricultural and Forest Meteorology*, 248, 48-59, <https://doi.org/10.1016/j.agrformet.2017.09.003>, 2018.
- Dong, Y., Yang, M., Bakker, D. C. E., Kitidis, V., and Bell, T. G.: Uncertainties in eddy covariance air-sea CO₂ flux measurements and implications for gas transfer velocity parameterisations, *Atmos. Chem. Phys.*, 21, 8089-8110, 10.5194/acp-21-8089-2021, 2021.
- 940 Drüe, C. and Heinemann, G.: A Review and Practical Guide to In-Flight Calibration for Aircraft Turbulence Sensors, *Journal of Atmospheric and Oceanic Technology*, 30, 2820-2837, 10.1175/JTECH-D-12-00103.1, 2013.
- European Environment Agency: Corine Land Cover (CLC) 2018, Version 2020_20u1 [dataset], <https://land.copernicus.eu/pan-european/corine-land-cover/clc2018>, 2020.

- 945 Foken, T.: *Micrometeorology*, Springer Berlin Heidelberg, 10.1007/978-3-642-25440-6, 2017.
- Foken, T. and Wichura, B.: Tools for quality assessment of surface-based flux measurements, *Agricultural and Forest Meteorology*, 78, 83-105, [https://doi.org/10.1016/0168-1923\(95\)02248-1](https://doi.org/10.1016/0168-1923(95)02248-1), 1996.
- Fortak, H.: Messungen an Kühlturmfahnen Teil 3: Dreidimensionale Vermessung von Kühlturmfahnen, 1975.
- 950 Fortak, H.: Messungen an Kühlturmfahnen Teil 4: Ergebnisse von Meßkampagnen an den Kühltürmen der RWE-Krafiwerke Neurath und Meppen, Kernforschungsanlage Jülich, Verlag, Jülich, Book, 290 p., 1976.
- Gioli, B., Miglietta, F., Vaccari, F. P., Zaldei, A., and Martino, B.: The Sky Arrow ERA, an innovative airborne platform to monitor mass, momentum and energy exchange of ecosystems, *Annals of Geophysics*, 49, 10.4401/ag-3159, 2006.
- 955 Gioli, B., Miglietta, F., Martino, B., Hutjes, R., Dolman, H., Lindroth, A., Schumacher, M., Sanz-Sanchez, M.-J., Manca, G., Peressotti, A., and Dumas, E.: Comparison between tower and aircraft-based eddy covariance fluxes in five European regions, *Agricultural and Forest Meteorology*, 127, 1-16, 10.1016/j.agrformet.2004.08.004, 2004.
- 960 Hannun, R. A., Wolfe, G. M., Kawa, S. R., Hanisco, T. F., Newman, P. A., Alfieri, J. G., Barrick, J., Clark, K. L., DiGangi, J. P., and Diskin, G. S.: Spatial heterogeneity in CO₂, CH₄, and energy fluxes: insights from airborne eddy covariance measurements over the Mid-Atlantic region, *Environ. Res. Lett.*, 15, 2020.
- Hartmann, J., Gehrman, M., Kohnert, K., Metzger, S., and Sachs, T.: New calibration procedures for airborne turbulence measurements and accuracy of the methane fluxes during the AirMeth campaigns, *Atmos. Meas. Tech.*, 11, 4567-4581, 10.5194/amt-11-4567-2018, 2018.
- 965 Hiller, R. V., Neining, B., Brunner, D., Gerbig, C., Bretscher, D., Künzle, T., Buchmann, N., and Eugster, W.: Aircraft-based CH₄ flux estimates for validation of emissions from an agriculturally dominated area in Switzerland, *Journal of Geophysical Research: Atmospheres*, 119, 4874-4887, <https://doi.org/10.1002/2013JD020918>, 2014.
- 970 Högström, U.: Non-dimensional wind and temperature profiles in the atmospheric surface layer: A re-evaluation, *Boundary-Layer Meteorology*, 42, 55-78, 10.1007/BF00119875, 1988.
- Jung, M., Schwalm, C., Migliavacca, M., Walther, S., Camps-Valls, G., Koirala, S., Anthoni, P., Besnard, S., Bodesheim, P., Carvalhais, N., Chevallier, F., Gans, F., Goll, D. S., Haverd, V., Köhler, P., Ichii, K., Jain, A. K., Liu, J., Lombardozi, D., Nabel, J. E. M. S., Nelson, J. A., O'Sullivan, M., Pallandt, M., Papale, D., Peters, W., Pongratz, J., Rödenbeck, C., Sitch, S., Tramontana, G., Walker, A., Weber, U., and Reichstein, M.: Scaling carbon fluxes from eddy covariance sites to globe: synthesis and evaluation of the FLUXCOM approach, *Biogeosciences*, 17, 1343-1365, 10.5194/bg-17-1343-2020, 2020.

Kaharabata, S. K., Schuepp, P. H., Ogunjemiyo, S., Shen, S., Leclerc, M. Y., Desjardins, R. L., and
980 MacPherson, J. I.: Footprint considerations in BOREAS, *Journal of Geophysical Research: Atmospheres*,
102, 29113-29124, <https://doi.org/10.1029/97JD02559>, 1997.

Kalogiros, J. A. and Wang, Q.: Calibration of a Radome-Differential GPS System on a Twin Otter
Research Aircraft for Turbulence Measurements, *Journal of Atmospheric and Oceanic Technology*, 19,
159-171, 10.1175/1520-0426(2002)019<0159:Coardg>2.0.Co;2, 2002.

985 Karl, T., Apel, E., Hodzic, A., Riemer, D. D., Blake, D. R., and Wiedinmyer, C.: Emissions of volatile
organic compounds inferred from airborne flux measurements over a megacity, *Atmos. Chem. Phys.*, 9,
271-285, 10.5194/acp-9-271-2009, 2009.

Kirby, S., Dobosy, R., Williamson, D., and Dumas, E.: An aircraft-based data analysis method for
discerning individual fluxes in a heterogeneous agricultural landscape, *Agricultural and Forest*
990 *Meteorology*, 148, 481-489, <https://doi.org/10.1016/j.agrformet.2007.10.011>, 2008.

Kljun, N., Calanca, P., Rotach, M. W., and Schmid, H. P.: A Simple Parameterisation for Flux Footprint
Predictions, *Boundary-Layer Meteorology*, 112, 503-523, 10.1023/B:BOUN.0000030653.71031.96,
2004.

Kohnert, K., Serafimovich, A., Metzger, S., Hartmann, J., and Sachs, T.: Strong geologic methane
995 emissions from discontinuous terrestrial permafrost in the Mackenzie Delta, Canada, *Scientific Reports*,
7, 5828, 10.1038/s41598-017-05783-2, 2017.

Kohnert, K., Juhls, B., Muster, S., Antonova, S., Serafimovich, A., Metzger, S., Hartmann, J., and Sachs,
T.: Toward understanding the contribution of waterbodies to the methane emissions of a permafrost
landscape on a regional scale—A case study from the Mackenzie Delta, Canada, *Global Change Biology*,
1000 24, 3976-3989, <https://doi.org/10.1111/gcb.14289>, 2018.

Lehmann, A. K.: Analysis of the quality and sensitivity of the wind vector calculation towards the
calibration of the ASK-16 motor glider turbulence measurement system, Department of earth sciences,
institute of meteorology, radiation and remote sensing of atmospheres Freie Universitaet Berlin, Berlin,
2022.

1005 Lenschow, D., Delany, A., Stankov, B., and Stedman, D.: Airborne measurements of the vertical flux of
ozone in the boundary layer, *Boundary-Layer Meteorology*, 19, 10.1007/BF00117223, 1980.

Lenschow, D. H. and Spyers-Duran, P.: *RAF Bulletin 23: Measurement techniques: Air motion sensing*
(updated 2001), University Corporation for Atmospheric Research, 1989.

Lenschow, H.: *Probing the atmospheric boundary layer*, American Meteorology Society Boston, MA,
1010 USA1986.

Mallaun, C., Giez, A., and Baumann, R.: Calibration of 3-D wind measurements on a single-engine
research aircraft, *Atmos. Meas. Tech.*, 8, 3177-3196, 10.5194/amt-8-3177-2015, 2015.

Mann, J. and Lenschow, D.: Errors in airborne flux measurements, *Journal of Geophysical Research*, 991,
14519-14526, 10.1029/94JD00737, 1994.

- 1015 Mauder, M., Desjardins, R., and MacPherson, J.: Scale analysis of airborne flux measurements over heterogeneous terrain in a boreal ecosystem, *Journal of Geophysical Research*, 112, D13112, doi:13110.11029/12006JD008133, 10.1029/2006JD008133, 2007.
- Metzger, S.: Applicability of weight-shift microlight aircraft for measuring the turbulent exchange above complex terrain. , Faculty of Biology, Chemistry and Earth Sciences, University of Bayreuth, Bayreuth, 2013.
- 1020 Metzger, S., Junkermann, W., Butterbach-Bahl, K., Schmid, H. P., and Foken, T.: Corrigendum to "Measuring the 3-D wind vector with a weight-shift microlight aircraft" published in *Atmos. Meas. Tech.*, 4, 1421–1444, 2011, *Atmos. Meas. Tech.*, 4, 1515-1539, 10.5194/amt-4-1515-2011, 2011.
- Metzger, S., Junkermann, W., Mauder, M., Beyrich, F., Butterbach-Bahl, K., Schmid, H. P., and Foken, 1025 T.: Eddy-covariance flux measurements with a weight-shift microlight aircraft, *Atmos. Meas. Tech.*, 5, 1699-1717, 10.5194/amt-5-1699-2012, 2012.
- Metzger, S., Durden, D., Paleri, S., Sühling, M., Butterworth, B. J., Florian, C., Mauder, M., Plummer, D. M., Wanner, L., Xu, K., and Desai, A. R.: Novel approach to observing system simulation experiments improves information gain of surface–atmosphere field measurements, *Atmos. Meas. Tech.*, 14, 6929- 1030 6954, 10.5194/amt-14-6929-2021, 2021.
- Metzger, S., Durden, D., Sturtevant, C., Luo, H., Pingintha-Durden, N., Sachs, T., Serafimovich, A., Hartmann, J., Li, J., Xu, K., and Desai, A. R.: eddy4R 0.2.0: a DevOps model for community-extensible processing and analysis of eddy-covariance data based on R, Git, Docker, and HDF5, *Geosci. Model Dev.*, 10, 3189-3206, 10.5194/gmd-10-3189-2017, 2017.
- 1035 Metzger, S., Junkermann, W., Mauder, M., Butterbach-Bahl, K., Trancón y Widemann, B., Neidl, F., Schäfer, K., Wieneke, S., Zheng, X. H., Schmid, H. P., and Foken, T.: Spatially explicit regionalization of airborne flux measurements using environmental response functions, *Biogeosciences*, 10, 2193-2217, 10.5194/bg-10-2193-2013, 2013.
- Neining, B., Fuchs, W., Baeumle, M., Volz-Thomas, A., Prévôt, A., and Dommen, J.: A small aircraft 1040 for more than just ozone: Metair's' Dimona' after ten years of evolving development, 11th Symposium on Meteorological Observations and Instrumentation, *Amer. Met. Soc.*, Boston, 123-128
- O'Shea, S. J., Bauguitte, S. J. B., Gallagher, M. W., Lowry, D., and Percival, C. J.: Development of a cavity-enhanced absorption spectrometer for airborne measurements of CH₄ and CO₂, *Atmos. Meas. Tech.*, 6, 1095-1109, 10.5194/amt-6-1095-2013, 2013a.
- 1045 O'Shea, S. J., Allen, G., Gallagher, M. W., Bauguitte, S. J. B., Illingworth, S. M., Le Breton, M., Muller, J. B. A., Percival, C. J., Archibald, A. T., Oram, D. E., Parrington, M., Palmer, P. I., and Lewis, A. C.: Airborne observations of trace gases over boreal Canada during BORTAS: campaign climatology, air mass analysis and enhancement ratios, *Atmos. Chem. Phys.*, 13, 12451-12467, 10.5194/acp-13-12451-2013, 2013b.

- 1050 Polonik, P., Chan, W. S., Billesbach, D. P., Burba, G., Li, J., Nottrott, A., Bogoev, I., Conrad, B., and Biraud, S. C.: Comparison of gas analyzers for eddy covariance: Effects of analyzer type and spectral corrections on fluxes, *Agricultural and Forest Meteorology*, 272-273, 128-142, <https://doi.org/10.1016/j.agrformet.2019.02.010>, 2019.
- R Core Team: R: A Language and Environment for Statistical Computing [code], 2021.
- 1055 Rebmann, C., Aubinet, M., Schmid, H., Arriga, N., Aurela, M., Burba, G., Clement, R., De Ligne, A., Fratini, G., Gielen, B., Grace, J., Graf, A., Gross, P., Haapanala, S., Herbst, M., Hörtnagl, L., Ibrom, A., Joly, L., Kljun, N., Kolle, O., Kowalski, A., Lindroth, A., Loustau, D., Mammarella, I., Mauder, M., Merbold, L., Metzger, S., Mölder, M., Montagnani, L., Papale, D., Pavelka, M., Peichl, M., Roland, M., Serrano-Ortiz, P., Siebicke, L., Steinbrecher, R., Tuovinen, J.-P., Vesala, T., Wohlfahrt, G., and Franz, D.: ICOS eddy covariance flux-station site setup: a review, *International Agrophysics*, 32, 471-494, 10.1515/intag-2017-0044, 2018.
- Sayres, D. S., Dobosy, R., Healy, C., Dumas, E., Kochendorfer, J., Munster, J., Wilkerson, J., Baker, B., and Anderson, J. G.: Arctic regional methane fluxes by ecotope as derived using eddy covariance from a low-flying aircraft, *Atmos. Chem. Phys.*, 17, 8619-8633, 10.5194/acp-17-8619-2017, 2017.
- 1065 Schaller, C., Göckede, M., and Foken, T.: Flux calculation of short turbulent events – comparison of three methods, *Atmos. Meas. Tech.*, 10, 869-880, 10.5194/amt-10-869-2017, 2017.
- Serafimovich, A., Metzger, S., Hartmann, J., Kohnert, K., Zona, D., and Sachs, T.: Upscaling surface energy fluxes over the North Slope of Alaska using airborne eddy-covariance measurements and environmental response functions, *Atmos. Chem. Phys.*, 18, 10007-10023, 10.5194/acp-18-10007-2018, 2018.
- 1070 Sun, Y., Sude, B., Geng, B., Ma, J., Lin, X., Hao, Z., Jing, W., Chen, Q., and Quan, Z.: Observation of the winter regional evaporative fraction using a UAV-based eddy covariance system over wetland area, *Agricultural and Forest Meteorology*, 310, 108619, <https://doi.org/10.1016/j.agrformet.2021.108619>, 2021.
- 1075 Tetzlaff, A., Lüpkes, C., and Hartmann, J.: Aircraft-based observations of atmospheric boundary-layer modification over Arctic leads, *Quarterly Journal of the Royal Meteorological Society*, doi:10.1002/qj.2568, 2015.
- Thomas, C. and Foken, T.: Re-evaluation of Integral Turbulence Characteristics and their Parameterisations, 15th Conference on Boundary Layer and Turbulence, Wageningen, the Netherlands, 2015.
- 1080 Tjernström, M. and Friehe, C.: Analysis of a Radome Air-Motion System on a Twin-Jet Aircraft for Boundary-Layer Research, *Journal of Atmospheric and Oceanic Technology*, 8, 19-40, 10.1175/1520-0426(1991)008<0019:AOARAM>2.0.CO;2, 1991.
- Torrence, C. and Compo, G. P.: A Practical Guide to Wavelet Analysis, *Bulletin of the American Meteorological Society*, 79, 61-78, [https://doi.org/10.1175/1520-0477\(1998\)079<0061:APGTWA>2.0.CO;2](https://doi.org/10.1175/1520-0477(1998)079<0061:APGTWA>2.0.CO;2), 1998.
- 1085 [0477\(1998\)079<0061:APGTWA>2.0.CO;2](https://doi.org/10.1175/1520-0477(1998)079<0061:APGTWA>2.0.CO;2), 1998.

- Vaughan, A. R., Lee, J. D., Metzger, S., Durden, D., Lewis, A. C., Shaw, M. D., Drysdale, W. S., Purvis, R. M., Davison, B., and Hewitt, C. N.: Spatially and temporally resolved measurements of NO_x fluxes by airborne eddy covariance over Greater London, *Atmos. Chem. Phys.*, 21, 15283-15298, 10.5194/acp-21-15283-2021, 2021.
- 1090 Vaughan, A. R., Lee, J. D., Misztal, P. K., Metzger, S., Shaw, M. D., Lewis, A. C., Purvis, R. M., Carslaw, D. C., Goldstein, A. H., Hewitt, C. N., Davison, B., Beevers, S. D., and Karl, T. G.: Spatially resolved flux measurements of NO_x from London suggest significantly higher emissions than predicted by inventories, *Faraday Discussions*, 189, 455-472, 10.1039/C5FD00170F, 2016.
- Vaughan, A. R., Lee, J. D., Shaw, M. D., Misztal, P. K., Metzger, S., Vieno, M., Davison, B., Karl, T. G.,
1095 Carpenter, L. J., Lewis, A. C., Purvis, R. M., Goldstein, A. H., and Hewitt, C. N.: VOC emission rates over London and South East England obtained by airborne eddy covariance, *Faraday Discussions*, 200, 599-620, 10.1039/C7FD00002B, 2017.
- Vellinga, O. S., Dobosy, R. J., Dumas, E. J., Gioli, B., Elbers, J. A., and Hutjes, R. W. A.: Calibration and Quality Assurance of Flux Observations from a Small Research Aircraft, *Journal of Atmospheric and*
1100 *Oceanic Technology*, 30, 161-181, 10.1175/JTECH-D-11-00138.1, 2013.
- Vellinga, O. S., Dobosy, R. J., Dumas, E. J., Gioli, B., Elbers, J. A., and Hutjes, R. W. A.: Calibration and Quality Assurance of Flux Observations from a Small Research Aircraft, *Journal of Atmospheric and*
Oceanic Technology, 30, 161-181, 10.1175/JTECH-D-11-00138.1, 2013.
- Vickers, D. and Mahrt, L.: Quality Control and Flux Sampling Problems for Tower and Aircraft Data,
1105 *Journal of Atmospheric and Oceanic Technology*, 14, 512-526, 10.1175/1520-0426(1997)014<0512:QCAFSP>2.0.CO;2, 1997.
- Vihma, T. and Kottmeier, C.: A Modelling Approach For Optimizing Flight Patterns In Airborne Meteorological Measurements, *Boundary-Layer Meteorology*, 95, 211-230, 10.1023/A:1002634613282, 2000.
- 1110 Virtanen, P., Gommers, R., Oliphant, T. E., Haberland, M., Reddy, T., Cournapeau, D., Burovski, E., Peterson, P., Weckesser, W., Bright, J., van der Walt, S. J., Brett, M., Wilson, J., Millman, K. J., Mayorov, N., Nelson, A. R. J., Jones, E., Kern, R., Larson, E., Carey, C. J., Polat, Í., Feng, Y., Moore, E. W., VanderPlas, J., Laxalde, D., Perktold, J., Cimrman, R., Henriksen, I., Quintero, E. A., Harris, C. R., Archibald, A. M., Ribeiro, A. H., Pedregosa, F., van Mulbregt, P., Vijaykumar, A., Bardelli, A. P.,
1115 Rothberg, A., Hilboll, A., Kloeckner, A., Scopatz, A., Lee, A., Rokem, A., Woods, C. N., Fulton, C., Masson, C., Häggström, C., Fitzgerald, C., Nicholson, D. A., Hagen, D. R., Pasechnik, D. V., Olivetti, E., Martin, E., Wieser, E., Silva, F., Lenders, F., Wilhelm, F., Young, G., Price, G. A., Ingold, G.-L., Allen, G. E., Lee, G. R., Audren, H., Probst, I., Dietrich, J. P., Silterra, J., Webber, J. T., Slavič, J., Nothman, J., Buchner, J., Kulick, J., Schönberger, J. L., de Miranda Cardoso, J. V., Reimer, J., Harrington, J., Rodríguez, J. L. C., Nunez-Iglesias, J., Kuczynski, J., Tritz, K., Thoma, M., Newville, M., Kümmerer, M., Bolingbroke, M., Tartre, M., Pak, M., Smith, N. J., Nowaczyk, N., Shebanov, N., Pavlyk, O.,

- Brodtkorb, P. A., Lee, P., McGibbon, R. T., Feldbauer, R., Lewis, S., Tygier, S., Sievert, S., Vigna, S., Peterson, S., More, S., Pudlik, T., Oshima, T., Pingel, T. J., Robitaille, T. P., Spura, T., Jones, T. R., Cera, T., Leslie, T., Zito, T., Krauss, T., Upadhyay, U., Halchenko, Y. O., Vázquez-Baeza, Y., and SciPy, C.:
1125 SciPy 1.0: fundamental algorithms for scientific computing in Python, *Nature Methods*, 17, 261-272, 10.1038/s41592-019-0686-2, 2020.
- Wiekenkamp, I., Lehmann, A. K., Buetow, A., Ruhtz, T., and Sachs, T.: PyWingpod, GFZ Data Services, <https://doi.org/10.5880/GFZ.1.4.2024.004>, 2024a.
- Wiekenkamp, I., Lehmann, A. K., Buetow, A., Fischer, J., Hartmann, J., Metzger, S., Ruhtz, T., Wille,
1130 C., Mathias, Z., and Sachs, T.: Airborne Wind and Eddy Covariance Dataset - Recorded with the ASK-16 EC Platform between 2017 – 2022, GFZ Data Services [dataset], <https://doi.org/10.5880/GFZ.1.4.2024.003>, 2024b.
- Williams, A. and Marcotte, D.: Wind Measurements on a Maneuvering Twin-Engine Turboprop Aircraft Accounting for Flow Distortion, *Journal of Atmospheric and Oceanic Technology*, 17, 795-810,
1135 10.1175/1520-0426(2000)017<0795:WMOAMT>2.0.CO;2, 2000.
- Wolfe, G. M., Kawa, S. R., Hanisco, T. F., Hannun, R. A., Newman, P. A., Swanson, A., Bailey, S., Barrick, J., Thornhill, K. L., Diskin, G., DiGangi, J., Nowak, J. B., Sorenson, C., Bland, G., Yungel, J. K., and Swenson, C. A.: The NASA Carbon Airborne Flux Experiment (CARAFE): instrumentation and methodology, *Atmos. Meas. Tech.*, 11, 1757-1776, 10.5194/amt-11-1757-2018, 2018.
- 1140 Xu, K., Metzger, S., and Desai, A. R.: Upscaling tower-observed turbulent exchange at fine spatio-temporal resolution using environmental response functions, *Agricultural and Forest Meteorology*, 232, 10-22, <https://doi.org/10.1016/j.agrformet.2016.07.019>, 2017.
- Yuan, B., Kaser, L., Karl, T., Graus, M., Peischl, J., Campos, T. L., Shertz, S., Apel, E. C., Hornbrook, R. S., Hills, A., Gilman, J. B., Lerner, B. M., Warneke, C., Flocke, F. M., Ryerson, T. B., Guenther, A.
1145 B., and de Gouw, J. A.: Airborne flux measurements of methane and volatile organic compounds over the Haynesville and Marcellus shale gas production regions, *Journal of Geophysical Research: Atmospheres*, 120, 6271-6289, <https://doi.org/10.1002/2015JD023242>, 2015.
- Zona, D., Gioli, B., Commane, R., Lindaas, J., Wofsy, S. C., Miller, C. E., Dinardo, S. J., Dengel, S., Sweeney, C., Karion, A., Chang, R. Y. W., Henderson, J. M., Murphy, P. C., Goodrich, J. P., Moreaux,
1150 V., Liljedahl, A., Watts, J. D., Kimball, J. S., Lipson, D. A., and Oechel, W. C.: Cold season emissions dominate the Arctic tundra methane budget, *Proceedings of the National Academy of Sciences*, 113, 40, 10.1073/pnas.1516017113, 2016.
- Zulueta, R. C., Oechel, W. C., Loescher, H. W., Lawrence, W. T., and Paw U, K. T.: Aircraft-derived regional scale CO₂ fluxes from vegetated drained thaw-lake basins and interstitial tundra on the Arctic
1155 Coastal Plain of Alaska, *Global Change Biology*, 17, 2781-2802, <https://doi.org/10.1111/j.1365-2486.2011.02433.x>, 2011.

Zulueta, R. C., Oechel, W. C., Verfaillie, J. G., Hastings, S. J., Gioli, B., Lawrence, W. T., and Paw U, K. T.: Aircraft Regional-Scale Flux Measurements over Complex Landscapes of Mangroves, Desert, and Marine Ecosystems of Magdalena Bay, Mexico, *Journal of Atmospheric and Oceanic Technology*, 30, 1160-1294, 10.1175/JTECH-D-12-00022.1, 2013.