

Increasing water stress in Chile **revealed** by novel datasets of water availability, land use and water use

Juan Pablo Boisier^{1,2,*}, Camila Alvarez-Garreton^{1,2,*}, Rodrigo Marinao^{1,3}, Mauricio Galleguillos^{1,4}

¹Center for Climate and Resilience Research (CR2, FONDAP 1523A0002), Santiago, Chile

²Department of Geophysics, Universidad de Chile, Santiago, Chile

³Department of Civil Engineering, Universidad de La Frontera, Temuco, Chile

⁴Faculty of Engineering and Science, Universidad Adolfo Ibáñez, Santiago, Chile

*Equal contribution

Correspondence to: Camila Alvarez-Garreton (calvarezgarreton@gmail.com)

Abstract. Many regions in Chile experienced an unprecedented drought from 2010 to 2022, driven by climate change and natural variability. This so-called megadrought led to severe water scarcity, causing conflicts and exposing issues in Chilean water regulations. Water-intensive agriculture in areas with limited water availability has worsened these problems, raising questions about **the relative** the contributions of water extraction and climate **to** high water stress levels.

In this study, we evaluate **past and present-day** water stress **conditions** in Chile, **as well as future projections** under various climate and socio-economic scenarios. To this end, novel datasets of water availability, land use and water use were developed, **extending back to mid-20th century**. Using these **datasets**, we calculated the Water Stress Index (WSI) for all major basins in the country and assessed the impact of increasing water use and climate change on water stress over different time periods. Results show that most basins in semi-arid regions experienced high to extreme water stress (WSI > 40% and WSI > 70%, respectively) during the megadrought, mainly due to reduced water availability, but worsened by high water demand. **In a long-term perspective**, water stress in central Chile **has steadily increased**, primarily **driven by** rising water consumption **and to a lesser extent by changes in** water availability, leading to **sustained (1990-2020 average)** high water stress levels in several basins from Santiago northward. Under an adverse climate scenario (SSP3-7.0), megadrought-like conditions could become permanent by the end of the 21st century, with a projected 30% drop in precipitation, resulting in high to extreme water stress in most basins in central Chile. We argue that using the WSI to assess one of the several aspects of water security offers a valuable strategy for adaptation plans. If public policy agrees on establishing quantifiable water security goals based on metrics like the WSI, different pathways of water use combined with alternative water sources can be evaluated to achieve them.

Deleted: evidenced

Deleted: on

Deleted: over the long term, from the mid-20th century to the end of the 21st century

Deleted: Over

Deleted: time

Deleted: increasing

Deleted: is

Deleted: linked to

Deleted: , with a smaller contribution from

Deleted: changes

Deleted: consistently

Deleted: (1990-2020 average)

1 Introduction

45 Water security is defined as the capacity of a population to safeguard access to sufficient quantities of water of acceptable
quality for sustaining livelihoods, promoting human well-being, fostering socio-economic development, and preserving
ecosystems. Achieving water security is part of the Sustainable Development Goals adopted by all United Nations member
states in 2015 (UNESCO, 2019), and many countries have incorporated this goal into their national development plans (High-
Level Political Forum on Sustainable Development, <https://hlpf.un.org/countries>, last access: 20 August 2024). Pursuing this
50 goal requires understanding the climate system and change, its regional effects, and its interaction with local human activities.
Then, effective governance and infrastructure are essential to set water security goals and implement actions to achieve them.

There are various ways to assess water security in a territory, with methodologies varying in complexity based on the factors
considered. A common and straightforward approach is to contrast estimates of water demand and water availability at the
basin scale. Following this approach, several studies have quantified a Water Stress Index (WSI)—typically as the ratio of
55 water use to renewable freshwater resources—and linked its values to the risk of experiencing water scarcity (e.g., Falkenmark
and Lundqvist, 1998; Vörösmarty et al., 2000; Alcamo et al., 2003; Rijsberman, 2006; Oki et al., 2006; Falkenmark et al.,
2007; Wada et al., 2011; Damkjaer & Taylor, 2017). A basin is considered to face water scarcity issues with increased WSI
levels, with the threshold of 40% commonly used as a reference for high water stress (UN, 1997; Falkenmark and Lundqvist,
1998; Vörösmarty et al., 2000; Oki and Kanae, 2006). While the WSI does not account for factors such as governance and
60 accessibility, and may present limitations as a proxy for actual water scarcity in a region (Rijsberman, 2006; Damkjaer and
Taylor, 2017; Liu et al., 2017a), it serves as a baseline for more comprehensive water security evaluations. Studies that quantify
the WSI rely on robust estimates of water availability and use (Gain et al., 2016; Liu et al., 2017a; Oki and Kanae, 2006; Wada
et al., 2011). However, obtaining accurate information can be challenging due to the poor quality and limited availability of
data and ground-based observations in some regions (Condom et al., 2020; IPCC, 2022).

65 Quantifying water availability presents methodological challenges due to the complex interaction of climate with landscape
across regions. In South America, the Andes Cordillera makes these estimates particularly challenging due its intricate
topography, which affects atmospheric motions and precipitation patterns that global models struggle to capture (Arias et al.,
2021; Espinoza et al., 2020). Water use estimates typically rely on national inventories, which are often incomplete,
unavailable, or even non-existent. As a result, these datasets can carry large uncertainties in some regions, as noted by Wada
70 and Bierkens (2014) for South America.

In this study, we complement global water security assessments by implementing a WSI-based methodology in Chile,
identifying the main causes of its variations over the past decades and projecting future trends. Although the study focuses on
Chile, the approach can be applied to any region that meets the data requirements (see Sect. 2). Moreover, Chile's diverse
hydroclimate and landscape make the insights from this research applicable to other regions of the world. The country spans
75 4300 kilometers along the southern Andes (17°S–56°S), with altitudes reaching up to 6900 meters above sea level, and features

Deleted: use

Deleted: estimates

Deleted: deemed

Deleted: have

Deleted: high

Deleted: stress

Deleted: when the Water Stress Index (

Deleted:)

Deleted: –the ratio of water use to availability–

Deleted: exceeds

Deleted: over the medium term (5 to 10 years). A high WSI indicates low water security, as it increases the risk of water scarcity

Deleted: assessing water security using

Deleted: in-depth

Deleted: significant

a variety of extratropical climates and biomes, from the Atacama Desert to very humid regions with temperate rainforests in the south. The country's central regions (30°S–40°S) are covered by a mosaic of different land uses, including major urban areas, agricultural lands in the valleys, exotic forest plantations in hilly regions with non-arable soils, and natural vegetation in the steepest areas. Natural and managed prairies for cattle are also abundant in the south-central regions and Patagonia.

95 Central Chile has experienced increasing water scarcity problems, leading to social and legal conflicts (e.g., Rivera et al., 2016). This situation is partly due to a long-term drying trend and decreased water availability in the region (Boisier et al., 2018), which has been exacerbated by a decade-long meteorological drought since 2010, the so-called megadrought (Boisier et al., 2016; Garreaud et al., 2017, 2019). Water scarcity issues have also been attributed to limitations in the water management system defined in the Chilean Water Code (Congreso Nacional de Chile, 2022). This system is based on Water Use Rights
100 (WURs), the legal entitlements that define the amount and timing of water access for consumptive uses (e.g., drinking water, irrigation) and non-consumptive uses (e.g., hydroelectricity). A major limitation of this allocation scheme is that it does not account for climate variability and decreasing water availability (Alvarez-Garretón et al., 2023a; Barriá et al., 2021a). Case studies have shown that water scarcity issues also relate to increased water withdrawal, notably from the agriculture sector, but with very contrasting results regarding the magnitude of the impacts of local water use and climate variability (e.g., Muñoz et al., 2020; Barriá et al., 2021b; Valdés-Pineda, 2022). More consistently, recent research has shown that, despite lower
105 renewable freshwater availability, increasing water supply has been sustained by the overexploitation of groundwater, leading to continuous depletion of the water table in the major basins of central Chile (Jódar et al., 2023; Alvarez-Garretón et al., 2024; Taucare et al., 2024).

Despite the increasing evidence of intense water use in a region with decreasing precipitation rates, changes in water stress at the national level in Chile have not been thoroughly described, nor have the contributions of climate variability and water use to water security been widely quantified. Understanding the causes of water stress is critical for designing strategies aimed at mitigating unsustainable water uses and adapting to future climate conditions. Therefore, this study aims to fill this gap by addressing the following research questions: How has water stress changed over the past six decades in Chile, according to the water use-to-availability ratio? How have trends in climate and water use influenced changes in water stress? What can be
115 expected under future climate scenarios?

To address these questions, we developed national-scale data products on freshwater availability, land use, and water use, enabling a consistent assessment of water stress from the mid-20th century to projections for the 21st century. This new knowledge can serve as a concrete input for designing climate-resilient strategies to achieve water security. To illustrate this, at the end of the manuscript, we consider a specific goal for maximum water stress to be achieved by 2050 (a moderate level
120 of water stress, or WSI below 40%) and analyze different scenarios to reach that goal, taking into account various climate change projections, water use trends, and alternative sources of water availability.

Deleted: Chile's

Deleted: , in which the legal framework for granting

Deleted: surface available water

Deleted: In

Deleted: , we

Deleted: What

Deleted: have been the historical

Deleted: levels of the basins

Deleted: What

Deleted: been the drivers of

Deleted: these levels

2 Data products and methods

135 The results presented in this paper are based on recently developed, spatially distributed datasets of variables that are essential for assessing water stress over several decades and across all watersheds in Chile (outlined in Table 1). Climate information includes both observation-based data to evaluate historical changes, and model-based data for scenario projections (Sect. 2.1 and 2.2). Water availability is derived from a water balance rationale, using an estimation of evapotranspiration under near-natural conditions, described in Sect. 2.3 and Appendix B. Based on a consistent approach, reconstructions of land use/cover and water use are described in Sect. 2.4, Sect. 2.5, Appendix B and Appendix C. In Sect. 2.6, we describe the computation of the Water Stress Index (WSI) and the method used to attribute its evolution over time to climate and water use changes.

140

Table 1: Main datasets used in this study.

Dataset	Variables ^a	Domain & resolution	Description	Data repository
Observations-based hydroclimate (CR2MET)	P, T _N , T _X , ET ₀ , ET _N	Chile, 1960-present, daily, 0.05° lat-lon	Meteorological variables based on statistical downscaling of ERA5 (DGA, 2022a). ET ₀ , ET _N are post processed.	https://doi.org/10.5281/zenodo.7529682 (Boisier, 2023)
Model-based hydroclimate	P, T _N , T _X , ET ₀ , ET _N	Chile, 1960-2100, daily, 0.05° lat-lon	Statistical downscaling of 17 CMIP6 Earth System Models (Table S1). ET ₀ , ET _N are post processed.	-
Land use/cover (CR2LUC)	F _V , I _V	Chile, 1950-2020, yearly, 0.01° lat-lon	Land use and land cover reconstruction, including fractional cover and irrigation data.	https://doi.org/10.5281/zenodo.13324250 (Boisier et al., 2024a)
Water use (CR2WU)	U _{CO} , U _{NC}	Chile, 1960-2020, yearly, commune, sectors	Consumptive and non-consumptive water use reconstruction (this study).	https://doi.org/10.5281/zenodo.13324235 (Boisier et al., 2024b)

^a Precipitation (P), daily minimum (T_N) and maximum (T_X) temperature, ~~potential~~ evaporation (ET₀), naturalized actual evapotranspiration (ET_N), land-cover fraction (F_V), irrigation fraction (I_V), ~~consumptive~~ (U_{CO}) and non-consumptive (U_{NC}) water use.

2.1 Historical climate

145 Daily precipitation and temperature information were obtained from the Center for Climate and Resilience Research Meteorological dataset (CR2MET) version 2.5, available at <https://doi.org/10.5281/zenodo.7529682> (Boisier, 2023). The CR2MET product has been developed to fill key data gaps regarding the hydroclimatic mean regime and variability in Chile, and has contributed to scientific and technical knowledge over the past years. In particular, the updated national water balance project led by the National Water Bureau (DGA) has been based on and has boosted the development of CR2MET (see DGA, 2022a; and references therein). CR2MET has been used in a wide range of hydro-climatic research, including the development of the CAMELS-CL catchment dataset for Chile (Alvarez-Garretton et al., 2018), hydrological modeling applications (Baez-Villanueva et al., 2021; Sepúlveda et al., 2022; Araya et al., 2023; Cortés-Salazar et al., 2023), the study of drought dynamics

150

Formatted Table

Formatted: French

Formatted: French

Formatted: French

Field Code Changed

Formatted: French

Deleted: A

Formatted: French

Formatted: French

Field Code Changed

Deleted:

Formatted: French

Formatted: French

Field Code Changed

Deleted:

Deleted: Potential

Deleted: fraction

Deleted: significantly

(Alvarez-Garreton et al., 2021; Baez-Villanueva et al., 2024), glacier dynamics (Ruiz Pereira and Veettil, 2019; Amann et al., 2022), water management assessment (Muñoz et al., 2020), and climate change studies (Gateño et al., 2024, Carrasco-Escaff et al., 2024).

The CR2MET dataset includes daily precipitation and diurnal maximum/minimum near-surface temperatures on a regular 0.05° latitude-longitude grid over continental Chile, covering the period from 1960 to the present. These variables are partially built upon a downscaling of the European Centre for Medium-Range Weather Forecasts (ECMWF) ERA5 reanalysis (Hersbach et al., 2020), which uses statistical models calibrated against large, quality-controlled observations of the corresponding variables (P, T_N, T_X). These records gather station data from various national agencies, including DGA, the Weather Service (DMC), the Army Weather Service (SERVIMET-DIRECTEMAR), the Agricultural Research Institute (INIA), and the Foundation for Fruit Development (FDF). This observational dataset is also used in this study for comparison with CR2MET in Sect. 3. The CR2MET statistical models use several atmospheric variables as predictors, selected for the specific predictand (e.g., moisture fluxes are included for P), in addition to land-surface temperature estimates from the Moderate Resolution Imaging Spectroradiometer (MODIS) satellite sensor (Hulley and Hook, 2021) for T_N and T_X. The predictor variables are combined with invariant local topographic features to achieve the target resolution.

A detailed description and validation of CR2MET are provided in DGA (2022a) and references therein. Because CR2MET's statistical models are calibrated using a large observational network in Chile, validation against local meteorological records generally shows low bias and strong covariability in precipitation and temperature compared to other products, particularly in central-southern Chile (DGA, 2018, 2019). Cross-validation analyses further confirm the product's predictive reliability (e.g., DGA, 2018). On a daily time scale, performance tends to decrease in the southern and northern regions of the country, mainly due to weaker covariability between ERA5 and station data in these areas. On monthly or annual time scales, CR2MET generally shows good metrics across the country, making it a useful reference for various applications (e.g., Anderson et al., 2021; Carrasco-Escaff et al., 2023).

The main challenge for spatially distributed products is their ability to extrapolate and provide accurate estimates in data-sparse regions, particularly across the extratropical Andes in the case of Chile. Hydrological simulations, forced by meteorological products such as CR2MET and compared against observed river discharge, offer an objective way to assess their performance in unmonitored areas (e.g., headwater watersheds). This type of validation and the intercomparison with other meteorological datasets consistently demonstrate strong performance (Kling–Gupta Efficiency values typically above 0.6; Baez-Villanueva et al., 2021; DGA, 2022a), with CR2MET outperforming other available products (e.g., Baez-Villanueva et al., 2021). Hydrological balances also allow the identification of systematic biases in precipitation totals within the basins. In this regard, we note that precipitation products—including CR2MET—likely underestimate precipitation in Chile's wettest watersheds, particularly in the southern Andes and western Patagonia (Alvarez-Garreton et al., 2018).

Deleted: records

Deleted: for

Deleted: observations

Deleted:

For this study, potential evapotranspiration (ET_0) is derived as a post-processed CR2MET variable over the same spatiotemporal domain. Due to data availability from CR2MET and downscaled climate models (Sect. 2.2), the method is based on the temperature-dependent Hargreaves-Samani (HS) formula (Hargreaves and Samani, 1985), which is then corrected using two criteria: (1) accounting for systematic biases between the HS estimate and the more precise, multivariate Penman-Monteith (PM) formula (e.g., Allen et al., 1998), and (2) accounting for mean biases in wind conditions. For a given grid cell (x) and day (t), the adjusted ET_0 is computed as follows:

$$ET_0(x, t) = A(x, t_0) ET_{0,HS}(x, t) + B(x, t_0) \quad (1)$$

where $ET_{0,HS}$ is the HS estimate as described by Samani (2000). The formula is used with T_N and T_X from CR2MET and daily mean temperature calculated as the average of these two variables. Coefficient A is computed as the climatological mean (1981-2015) PM to HS-based ET_0 ratio ($ET_{0,PM}/ET_{0,HS}$), using a consistent set of atmospheric variables; in this case, the ERA5 reanalysis. The ERA5 HS-based ET_0 is calculated in the same manner as that derived with CR2MET, but with the corresponding T_N/T_X data. The ERA5 PM-based ET_0 corresponds to the Singer et al. (2021) dataset. It should be noted that the use of factor A assumes that PM/HS corrections, valid —by construction— for ERA5 data, also apply to CR2MET data, likely introducing some inaccuracies. Coefficient B addresses a wind bias correction, based on the comparison of near-surface wind speed data from ERA5 (consistent with the PM to HS correction applied with coefficient A) and a source with more spatial detail than ERA5. In this case, we used 1-km simulations (aggregated to the 0.05° CR2MET grid) conducted in Chile with the Weather Research and Forecasting (WRF) model for the Wind Energy Explorer (<https://eolico.minenergia.cl/>; see Muñoz et al., 2018). This correction is based on simplified aerodynamic expressions typically used to estimate open water evaporation, which scales with the air vapor pressure deficit (VPD) and a coefficient depending on wind speed (the so-called wind functions; e.g., Penman, 1948). We used the wind function parameterization described by McJannet et al. (2012) and VPD from ERA5 to compute B as $0.167 (U_{WRF} - U_{ERA5}) VPD$. Here, U_{WRF} and U_{ERA5} correspond to the climatological mean 2-meter wind speed from the WRF and ERA5, respectively. Both coefficients A and B are spatially distributed and computed separately for each month of the year, and then interpolated to Julian days (t_0 in Eq. 1).

2.2 Climate model downscaling

To assess the impacts of anthropogenic climate change on water availability and water stress, we used an ensemble of Earth System Model (ESM) simulations from the sixth phase of the Coupled Model Intercomparison Project (CMIP6). The ESM data were bias-corrected for the period 1960-2100 to accurately represent Chile's hydroclimate and properly contrast with observation-based data.

The applied bias correction method is based on the Quantile Delta Mapping (QDM) approach as described by Cannon et al. (2015), using CR2MET as the reference dataset. Unlike conventional quantile mapping, the QDM method adjusts the frequency distribution of a given variable to match a reference (typically an observational record or an observations-based

time series) while preserving the modeled changes in the variable's quantiles over time. The method was applied on a daily time scale to precipitation outputs from 17 ESMs and to a subset of 11 ESMs for daily extreme temperatures, according to data availability at the time of the analysis (Supplementary Table S4). Simulations include historical runs and future projections forced by two socio-economic scenarios: Shared Socioeconomic Pathways (SSPs) 1 and 3 (Global Sustainability and Regional Rivalry), respectively paired with carbon emissions pathways leading to radiative forcing levels of 2.6 and 7.0 W m⁻² by 2100 (Eyring et al., 2016; O'Neill et al., 2016). These two scenarios, SSP1-2.6 and SSP3-7.0, represent high and medium-to-low climate change mitigation efforts during the current century, with associated climate simulations available for a large ensemble of models.

The QDM computations were applied additively for absolute changes in T_N and T_X , and multiplicatively for relative changes in P . The parametric density distributions Generalized Extreme Value and Exponential were used to fit the empirical frequency distributions of T_N/T_X and P , respectively. To ensure accurate seasonal representation, the method was applied separately for each month of the year. Additionally, post-corrections were made to address any evident physical inconsistencies; for example, if T_X was found to be less than T_N , both variables were adjusted to their average value.

The downscaled temperature data is then used to estimate ET_0 in models using the same HS-based approach described in Sect. 2.2. Precipitation and ET_0 data both from in CR2MET and ESMs are used to estimate a naturalized evapotranspiration, as described in the next section.

2.3 Hydrological balance and water availability

Water availability (A) is considered here as a naturalized runoff, computed as the remaining flow from precipitation (P) and evapotranspiration (ET), without considering local disturbances (Eq. 2). This definition aligns with Renewable Freshwater Resources (RFR), according to several references (e.g., Vorosmarty et al., 2000; Alcamo et al., 2003; Oki and Kanae, 2006; Wada et al., 2011; Kuzma et al., 2023). Renewable water availability includes natural groundwater recharge and thus renewable groundwater resources, however, there is a non-renewable groundwater component that, by definition, is not included in A . It should be noted that groundwater can supply water beyond the renewable recharge, which leads to sustained storage depletion, as reported by recent studies in central Chile (Jódar et al., 2023; Alvarez-Garretón et al., 2024; Taucare et al., 2024).

Thus, the surface water budget in a hydrological unit is represented as follows:

$$A = P - ET_N = R_N \quad (2)$$

where ET_N and R_N stand for naturalized evapotranspiration and runoff. For simplicity, since A is assessed on a yearly to multi-year basis, changes in water storage are omitted in Eq. (2), but soil water content dynamic is accounted for in smaller-scale ET computation (Appendix B). The disturbed water budget is represented as:

$$A - \Delta ET_{LU} - U_{\sim LU} = R_N - \Delta R \quad (3)$$

Deleted: A

Formatted: Subscript

Deleted: that is,

where ΔET_{LU} and U_{-LU} indicate, respectively, modified ET due to land use/land cover changes (defined as positive for a perturbation increasing ET) and losses by other means (consumptive water use from other activities), both of which will induce a change in runoff (ΔR).

260 Fluxes of ET were computed over continental Chile with the same spatiotemporal resolution as CR2MET, using a simplified 'bucket' ET scheme described in Appendix B. This model runs on daily time steps, forced by P and ET_0 from CR2MET or from CR2MET-based downscaled climate model data to maintain a consistency in observed and modeled data. The ET scheme also depends on soil and land cover parameters, and accounts for well-watered surfaces to represent water bodies and irrigated areas, allowing the estimation of both ET_N and ΔET_{LU} .

265 For ET_N , [historical](#) simulations were performed using the CR2MET forcing between 1960 and 2020, with irrigation turned off and prescribing a static land-cover map of 1950, according to the CR2LUC product (Sect. 2.4). Thus, more precisely, ET_N represents a climate-dependent ET flux under past land-cover conditions, without irrigation or temporal land use changes. Subsequently, annual time series of A for each basin were computed as the difference between catchment-scale annual P and ET_N (Eq. 2). Projections of water availability following the *SSP1-2.6* and *SSP3-7.0* scenarios were derived in the same way

270 but using the downscaled ESM data as climate forcing. As part of the water use reconstruction workflow, the computation of ΔET_{LU} is described in Sect. 2.5.

2.4 Land cover reconstruction

Long-term land-use dynamic is a key factor to consider when estimating changes in water use over time and for many other applications. The CR2LUC product was developed for this end, describing land use and land cover changes in Chile since 1950. As it encompasses a pre-satellite period, this reconstruction was developed using a different approach from typical land use/cover estimates available for more recent decades.

Although satellite data are used for fine spatial distribution guidance, the reconstruction is based on national bookkeeping of land use activities in Chile, particularly agricultural censuses conducted since 1930. The methodological challenge in developing CR2LUC lies in the homogenization and coherent integration of information from different sources, as well as the data preprocessing of each source (e.g., some historical documents required data digitization/tabulation). The assessed set of inventoried data includes the Agricultural and Livestock Censuses carried out by the National Institute of Statistics (INE) for the years 1955, 1965, 1976, 1997 and 2007 (see references in [Supplementary Material](#)), the Continuous Statistics of annual crops from the Office of Agricultural Studies and Policies since 1979 (ODEPA, 2023b), the Fruit Cadastres maintained by the Natural Resources Information Centre and ODEPA since 1998 (CIREN-ODEPA, 2023), the Viticultural Cadastres from the Agricultural and Livestock Service (SAG) since 1997 (ODEPA, 2023a), and the Vegetation Cadastres from the National Forestry Corporation, maintained since 1993 (CONAF, 2023).

Deleted: s

Deleted: A dedicated paper describing the methodology and results of CR2LUC is under development at the time of writing this paper, so here we provide a general description of it.

Deleted: Table C1

The first stage of the CR2LUC workflow involves computing continuous time series describing annual quantities, primarily the fractional land area occupied by a given land cover class, for every commune in the country between 1950 and 2020, ensuring alignment with data provided by agricultural censuses in specific years. To achieve this, solutions were developed to transform census data provided for different territorial units over time into a unified classification (current communes). In most cases, this was done by extrapolating proportional relationships in given variables between nested or related units (e.g., current communes vs. old provinces in Chile, or communes created from a larger, former one). Interpolation methods were used to fill in the time series, ranging from simple statistical criteria (e.g., linear interpolation) to guidance based on other sources, depending on data availability in different periods (e.g., cadastres provided by ODEPA).

A finer spatial disaggregation (gridding) of the communal-level values was driven by satellite information and some inventories available at high resolutions in recent years (e.g., fruit orchard cadastres), while ensuring consistency with aggregations provided at larger (territorial) unit scales. Cropland and urban areas were constrained by the corresponding classes in Landsat-based land cover datasets developed for Chile by Zhao et al. (2016) and globally by Chen et al. (2015), with the latter including three scenes for 2000, 2010, and 2020. Vegetation cadastres of CONAF were the main input used to distribute natural vegetation classes and tree plantations, as well as to define a potential vegetation for past periods. Other inputs include fine national inventories (polygons) of water bodies, wetlands, salt pans (MMA, 2020), and glaciers (DGA, 2022b).

As result, CR2LUC provides fractional land cover data on a 1-km latitude-longitude grid for continental Chile, with annual data from 1950 to 2020. It also includes information on irrigation (grid fraction and type) and yields for specific crops. Organized into three levels of aggregation, the dataset includes a total of 48 classes of relevance in Chile (Table B1), encompassing various agricultural types (25), natural forests (5), planted trees (3), shrubland (3), grasslands (3), natural and artificial water bodies (5), salt pans, glaciers, built-up areas and bare soil. Hence, in addition to the temporal coverage, the dataset is characterized by a detailed classification. Version 1.0 of CR2LUC, used in this study, is available on <https://doi.org/10.5281/zenodo.13324250> (Boisier et al., 2024a).

2.5 Water uses reconstruction

The CR2WU product was developed to assess historical water demand in Chile. This dataset provides water use estimates as volumetric fluxes (U) from various sectors for each commune in continental Chile, with annual resolution from 1960 to 2020. The dataset includes consumptive uses for all sectors considered, as well as non-consumptive uses for two sectors with major return flows: hydroelectric generation and irrigated agriculture. The computation involves two distinct methodologies: one for sectors encompassing land use, land-use change, and forestry (LULUCF) and another for other water-consuming sectors, including drinking water, energy, mining, manufacturing industry, livestock, with corresponding subcategories (Table S3).

For LULUCF sectors, water uses were derived using the ET scheme introduced in Sect. 2.3 (further described in Appendix A), as the difference between alternative historical ET scenarios. One scenario represents the actual ET, following the historical

Deleted: primarily

Deleted: was

Deleted: and

Deleted: salt pans (CEDEUS, 2015)

Deleted: particular

Deleted: includes

Deleted: s

Deleted: .

Deleted: B

land use/cover, irrigation, and climate conditions (ET_{FULL}), and another –control– scenario represents ET with no land use/cover changes, corresponding to ET_N (Sect. 2.3). A third simulation was performed in the same way as ET_{FULL} but without irrigation (ET_{NI}), allowing the estimation of the ET change component driven by rainfed agriculture and forestry (the ‘green’ water use), as well as by modifications in water bodies (including hydroelectric reservoirs). Hence, the consumptive total water use from LULUCF ($U_{CO,LU}$) and the non-irrigated component ($U_{CO,LU,NI}$) were computed as:

$$U_{CO,LU}(yr) = ET_{FULL}(yr) - ET_N(yr) \quad (4)$$

$$U_{CO,LU,NI}(yr) = ET_{NI}(yr) - ET_N(yr) \quad (5)$$

Irrigation fractions from CR2LUC are used to prescribe unlimited soil moisture in the corresponding grid cells and agricultural classes, while the irrigation type is used to estimate the water supply typically needed for irrigation practices, a portion of which returns to the system as infiltration (a non-consumptive use). Irrigation efficiency (e_{IR}), defined as the ratio between $U_{CO,LU}$ and the total irrigation volume, was set to 0.5, 0.6, and 0.75 for the three types of irrigation included in CR2LUC: traditional (e.g., furrow), mechanized (sprinkler), and localized, according to Brouwer et al. (1989). In this way, the non-consumptive water use component of agriculture ($U_{NC,LU}$) was derived as:

$$U_{NC,LU}(yr) = (e_{IR}^{-1} - 1) U_{CO,LU}(yr) \quad (6)$$

Sectors other than LULUCF were grouped into drinking water, livestock, energy, mining, and manufacturing industries, each with various subsectors (Sect. 4 and Appendix C). Water use for these sectors was estimated using methodologies from previous studies commissioned by DGA (e.g., DGA, 2017). These studies quantified water consumption for a specific year based on sector-specific forcing data (e.g., mineral mass production for the mining sector) and consumption rates specific to each class (e.g., water usage per ton of copper concentrates). Having established the consumption rate values specific to each sector or process, the major challenge for historical water use estimation was reconstructing the evolution of sector-specific drivers. To obtain continuous time series from the mid 20th century to the present, we followed a methodology similar to that described for the CR2LUC dataset. Various documents and national inventories were homogenized to get continuous spatio-temporal series of the forcing data for each sector (F_s). This information was then combined with water consumption rates (K_s) to estimate the volumetric water use as follows:

$$U_s(x, yr) = K_s \cdot F_s(x, yr) \quad (7)$$

In DGA (2017), drinking water was treated separately, with total withdrawals estimated alongside a return flow component, calculated based on sanitary data. However, in Chile, data on wastewater flows and discharge locations—necessary for reconstructing historical return flows—are not publicly available. Due to this limitation, this component was not estimated in our study, and the WSI calculation includes total withdrawals for this sector, whereas for other sectors only the consumptive component is considered (Sect. 2.6). For coastal locations in Chile, this approach is appropriate, as most wastewater treatment

Deleted: is

Formatted: Subscript

365 plants discharge directly into the sea via submarine outfalls (Gómez et al., 2025), making drinking water withdrawals effectively fully consumptive at the basin scale. In other cases, where wastewater is discharged upstream of the basin outlet, water quality considerations provide additional justification for this choice. Indeed, the Chilean law prohibits the reuse of treated greywater in key sectors such as potable water supply, irrigation of fruits and vegetables that grow at ground level, food production, healthcare facilities, and aquaculture (MOP, 2023).

370 Table S3 in supplementary material provides a full list of sectors, their consumption factors, and the forcing variables and sources. While estimates for LULUCF are computed on a regular grid, water use data is aggregated and reported at the communal scale, with annual estimates from 1960 to 2020. CR2WU data are available at <https://doi.org/10.5281/zenodo.13324235> (Boisier et al., 2024b).

2.6 Computation of water stress index and its drivers of change

380 The WSI, here considered as a water demand-to-availability ratio (Falkenmark and Lundqvist, 1998), depends on how both components are defined, potentially leading to different outcomes (Liu et al., 2017a). Studies using this index differ in whether they account for gross demand (as a proxy for total withdrawals, e.g., Vörösmarty et al., 2000) or net demand (equivalent to consumptive use, e.g., Wada et al., 2011), while others assess both cases (e.g., Munia et al., 2016). Using total withdrawals in basins with large return flows—such as in Chile, where many watersheds are modified for hydroelectric power generation—results in very high WSI values that do not necessarily reflect actual water stress. For this reason, and to preserve a water balance rationale, only consumptive uses are considered in the WSI calculation in this study. Accordingly, the WSI is defined as the ratio U_{co}/A , where U_{co} and A represent total consumptive water use and near-natural water availability, respectively, as described in previous sections. The WSI is computed at multi-annual timescales for hydrological units, specifically over the major watersheds defined by the DGA in the National Inventory of Watersheds (BNA).

385 As explained in Section 2.5, we considered total drinking water requirements as consumptive use, acknowledging that in some watersheds, return flows from water treatment can be potentially reused. It is important to note that, in contrast to previous WSI estimates (e.g., Vörösmarty et al., 2000; Oki and Kanae, 2006), and in line with more recent recommendations (e.g., Rockström et al., 2010; Hoekstra et al., 2011; Liu et al., 2022), we include green water use. That is, consumptive water use from forestry and rainfed agriculture is incorporated, estimated as the differential ET loss between land use scenarios (see Section 2.5).

390 Regarding water stress classification based on the WSI, many studies have adopted a reference threshold of 40%, above which a basin is considered water-stressed (e.g., Falkenmark and Lundqvist, 1998; Vörösmarty et al., 2000; Alcamo et al., 2003; Oki and Kanae, 2006; Wada et al., 2011; Munia et al., 2016; Falkenmark et al., 2007; Kuzma et al., 2023). WSI levels have been linked to the concept of water crowding, with values between 40% and 70% typically indicating high water stress, and values above 70% representing extreme stress—when water use begins to affect volumes that should be reserved for environmental

Deleted: Appendix C

Deleted: The CR2WU dataset includes both consumptive and non-consumptive uses from LULUCF and non-LULUCF sectors.

Deleted: the

Deleted: Similar to previous studies (e.g., Falkenmark and Lundqvist, 1998; Vörösmarty et al., 2000; Oki and Kanae, 2006)

Deleted: here

Deleted: was

flows (see Falkenmark et al., 2007, and references therein). From an ecological flow perspective, Pastor et al. (2014) reviewed several methods for estimating environmental flow requirements. On average, these methods recommend preserving between 34% and 56% of the mean annual flow, which corresponds to a maximum WSI of approximately 44% to 66%. Similar ecological flow requirements have been estimated for watersheds in Chile using different methodologies (Alvarez-Garreton et al., 2022). These findings support the idea that WSI levels above 40% may pose risks to fluvial ecosystems and reinforce the 70% threshold for extreme stress, as ecological flow protection is generally not ensured beyond this point.

Given the simplicity of the WSI, it allows for a straightforward estimation of the relative impact on water stress levels resulting from variations in both water availability (climate-driven supply) and water ~~use~~ (demand), as presented in Sect. 5. The evolution over time driven by changes in water availability ($\Delta WSI|_A$) and use ($\Delta WSI|_U$) are estimated by decomposing the WSI ratio into its partial derivatives, leading to:

$$\Delta WSI|_A = -C \overline{WSI} \frac{\Delta A}{A} \quad (8)$$

$$\Delta WSI|_U = C \overline{WSI} \frac{\Delta U}{U} \quad (9)$$

Terms with Δ denote the difference of the corresponding variable between two periods of interest, and the overbar indicates the average over the two periods. Since the calculation is not performed on an infinitesimal scale, the sum of the partial derivative terms does not precisely match the total change in WSI. To address this, both terms are adjusted proportionally (constant C in eqs. 8 and 9) so that their sum equals the absolute change in WSI between the evaluated periods.

3 Historical and future changes in water availability (1960-2100)

Due to the latitudinal distribution and complex topography of Chile's continental territory, there is a large contrast in precipitation regimes from the hyperarid Atacama Desert (with virtually no precipitation) to extremely rainy areas in the southern Andes and Patagonia (with annual accumulations exceeding three meters, Fig. 1).

As in other regions of the globe, potential evapotranspiration (ET_0) in Chile follows an inverse pattern to precipitation, with maximum values (above 2000 mm yr⁻¹) in the north of the country due to the high insolation and atmospheric water demand in the desert (Fig. 1b). The surface water limitation north of ~30°S and the ET_0 threshold south of ~40°S (below 1000 mm yr⁻¹) define the distribution of actual ET. The region in between, central Chile, features a mixed hydroclimate resulting from a sharp transition between water-limited regimes in the north and energy-limited areas in the south. This region, home to most of the country's population and economic activities, is also characterized by Mediterranean-like precipitation seasonality with dry summers and high inter-annual variability (Boisier et al., 2018; Aceituno et al., 2021).

Deleted: usage

Deleted: in

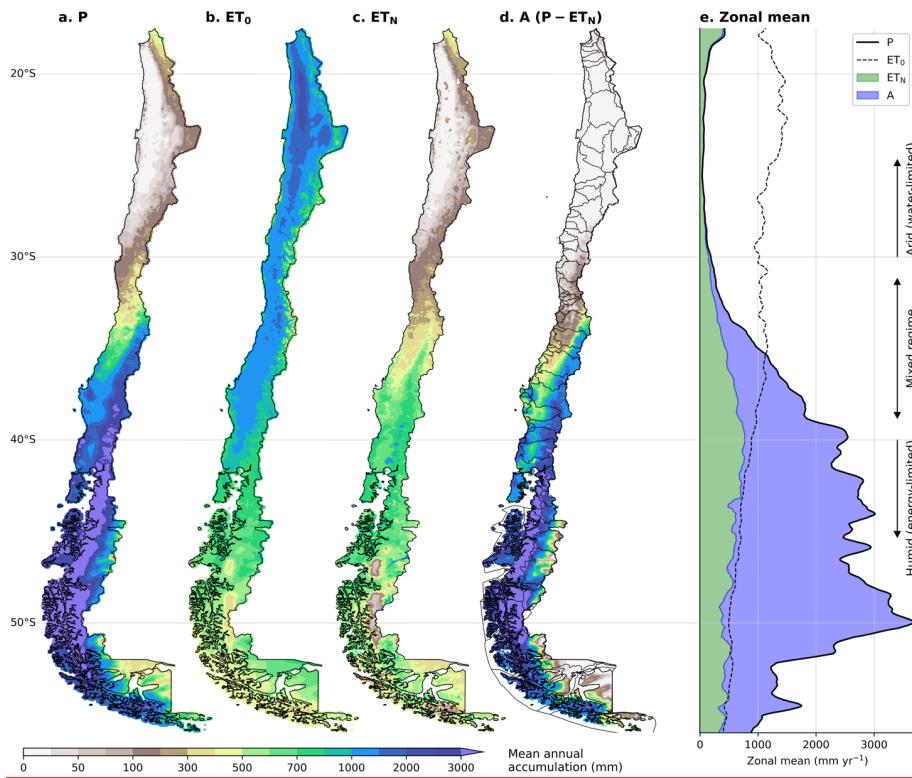


Figure 1: Long-term (1990-2020) mean annual precipitation (a), potential evapotranspiration (b), near-natural evapotranspiration (c), and water availability (d) in continental Chile. Panel e shows the zonal average of each water flux and the balance between P, ET_N and A. Thin polygons in panel d indicate the country's major watersheds (BNA).

435 On average across continental Chile, the mean annual rates of P and ET_N are estimated at 1200 mm and 430 mm, respectively, which leads to a surface water availability of approximately 770 mm yr⁻¹ (equivalent to a volumetric flux of 680 km³ yr⁻¹). A similar value is estimated in DGA (2022a), which also uses the CR2MET dataset, while a higher value –approximately 1050 mm yr⁻¹– is reported by FAO (2021) as Chile's renewable water resources. Beyond these differences, Chile's average freshwater availability remains high compared to other countries; the global mean over continental areas is close to 300 mm yr⁻¹ (Oki and Kanae, 2006). However, conditions vary greatly across the country, as the gap between P and ET_N defines a pronounced north-to-south gradient of water availability (see panels d and e in Fig. 1). Specifically, the administrative regions

440

Deleted: corresponding

Deleted: This average surface availability exceeds

Deleted: in

Deleted: ,

Deleted: the reality

Deleted: varies

Deleted: between different regions of


450

of Los Lagos, Aysén, and Magallanes (south of 40°S) together account for more than 75% of the total available water volume in the country, whereas the regions from Valparaíso (~32°S) northward add up to less than 1% of the total, underscoring stark regional disparities and contrasting water security challenges in Chile.

455

Besides geographical differences, Chile's hydroclimate exhibits an important temporal variability. Over the long term, local precipitation records show a clear downward trend, as shown by the changes in mean annual precipitation between the periods 1960-1990 and 1990-2020, across much of the country (Fig. 2a). The spatially distributed CR2MET dataset shows a precipitation decline consistent with observations (Fig. 2b), a match that matters given the subsequent use of this dataset for basin-scale assessments.

- Deleted: while
- Deleted: highlighting very different challenges in terms of
- Deleted: significant
- Deleted: In
- Deleted: 1960 and 2020

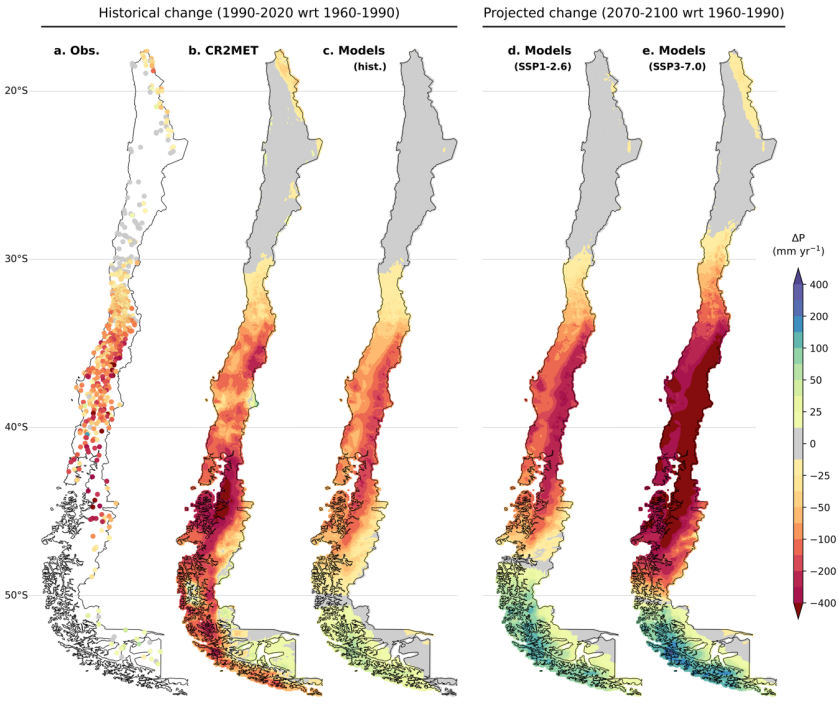

460

Figure 2: Changes in mean annual precipitation in Chile between the periods 1960-1990 and 1990-2020 (a-c), and projected towards the end of the 21st century (2070-2100) under global scenarios SSP1-RCP2.6 (d) and SSP3-RCP7.0 (e). Historical changes are based on local observations (a), the CR2MET dataset (b), and CMIP6 model simulations (historical scenario and SSP3 for 2015-2020). The three modeled changes (c-e) are based on downscaled simulations from 17 CMIP6 ESMs (showing the multi-model mean).

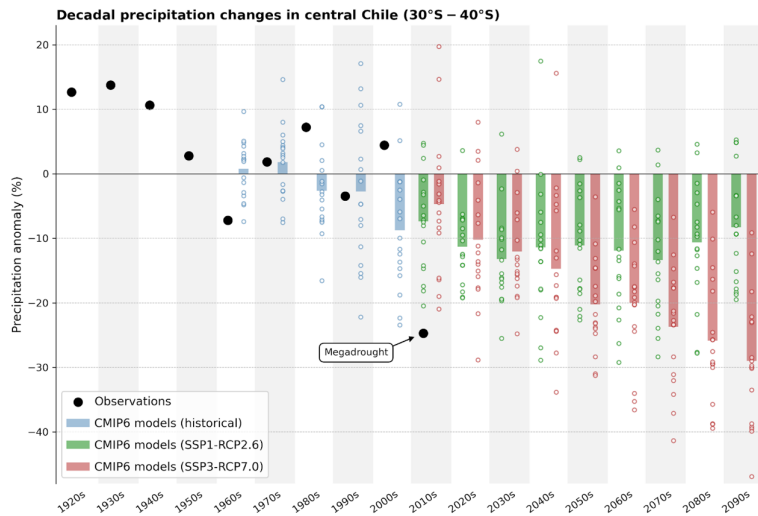


Figure 3: Precipitation changes in central Chile (30°–40°S). Decadal mean precipitation anomalies relative to the 1960–1990 period, based on observations (black circles) and downscaled simulations from 17 ESMs (circles and bars show single and multi-model mean values). Model data based on CMIP6 simulations under the historical (blue), SSP1-RCP2.6 (green), and SSP3-RCP7.0 (red) scenarios.

Studies addressing the driving mechanisms of the recent megadrought and long-term climate trends in Chile indicate that changes in precipitation result from natural climate variability and anthropogenic climate change, with the latter being more prominent in the long-term (Boisier et al., 2016, 2018; Garreaud et al., 2017, 2019; Damiani et al., 2020; Villamayor et al., 2021). These conclusions are based on the contrast between observations and simulations with global climate models, which systematically simulate a decrease in precipitation over the South Pacific in response to changes in greenhouse gas and stratospheric ozone concentrations (IPCC, 2022). This decrease precisely affects the country's regions where trends towards a drier climate are observed. The downscaled simulations from the CMIP6 ensemble assessed here are broadly consistent with observation-based changes, although slightly lower in magnitude (Fig. 2). This difference could be related to an additional drying driven by natural multidecadal changes and the recent megadrought in central Chile (Fig. 3), and/or to a higher actual regional sensitivity to anthropogenic forcing compared to the model average (Boisier et al., 2018).

The drying tendency overlaps with short-term variability, as seen in decadal precipitation anomalies in central Chile (Fig. 3).

On this time scale, the magnitude of the recent megadrought stands out and underscores the importance of considering low-frequency natural climate variability in water governance and planning, as well as its role in climate projection uncertainty.

Deleted: more substantial

Deleted: The

Deleted: on this time scale

Deleted: highlights

490 Following Hawkins and Sutton (2009), the projected precipitation changes ~~shown~~ in Fig. 3 are highly variable and depend on three main sources of uncertainty: (1) the overlap of the climate change signal with phases of natural variability that can last for decades, (2) the intensity of the global and regional climate change signal, with differences among climate models, and (3) the global socioeconomic scenario considered. Considering these factors, in an optimistic case, a decrease in precipitation of less than 10% can be expected in central Chile by the end of the 21st century. This projection is based on a global scenario
495 with high mitigation of greenhouse gas emissions (SSP1-RCP2.6, O'Neill et al., 2016) and models with low regional climate sensitivity to anthropogenic forcing. In a pessimistic case, the deficit may exceed 30%, resulting in conditions ~~like the 2010s'~~ megadrought but permanently. This regime represents an average condition, and even drier decades (~~deficits~~ above 40%) can be anticipated in the region due to the superposition of natural droughts with climate change. This scenario is projected with medium to high global greenhouse gas emissions (SSP3-RCP7.0) and models with high climate sensitivity.

Deleted: depicted

Deleted: similar to

500 **4 Current conditions and historical changes in water uses (1960-2020)**

Water withdrawals for both human consumption and productive purposes have diverse impacts on water balances (Wada et al., 2011). These impacts largely depend on whether the withdrawn water is returned to the basin, termed non-consumptive use (e.g., in hydroelectric generation), or not returned, known as consumptive use (e.g., water evaporated in industrial and land use activities).

505 In Chile, most ~~water-intensive~~ activities ~~are~~ ~~concentrated~~ in the country's central and northern regions (Fig. 4). Considering both consumptive and non-consumptive uses, the total water use ~~is~~ ~~estimated~~ ~~at~~ around 100 km³ per year ~~in the last decade~~ (2010-2020). This value is ~~higher than those reported by~~ other independent estimates (DGA, 2017; Fundación Chile, 2018; FAO, 2021; Appendix B). ~~Although the comparison among available estimates is not straightforward—due to differences in methodologies, sectors, or periods considered—there remains a considerable degree of uncertainty in some key sectoral water use estimates, particularly within the LULUCF sector (Table B1). Reducing this uncertainty is important for the effective design and implementation of public policies.~~

Deleted: with significant water use

Deleted: in Chile

Deleted: to be

Deleted: at present

Deleted: similar to, albeit slightly

Deleted: ,

Deleted: and UN Water

515 Compared to other countries, total water use in Chile is high, ~~primarily~~ ~~due to the~~ ~~presence of several~~ hydroelectric power generation ~~plants~~ in mountainous basins ~~of~~ the central-southern ~~regions~~. This process involves using a large volume of water, but ~~which is~~ almost entirely returned to the system, except for ~~losses from reservoir~~ evaporation ~~(as noted in Section 2.5, this consumptive component is accounted for within the LULUCF sector rather than in Energy)~~. Thus, hydroelectric water use primarily alters the flow dynamics of the intervened river but does not ~~substantially~~ affect the long-term water balance of the basin at its discharge into the sea.

Deleted: mainly

Deleted: significant

Deleted: role

Deleted: in

Deleted: zone

Deleted: s

Deleted: the water is

Deleted: from the plant's reservoirs

Deleted: significantly

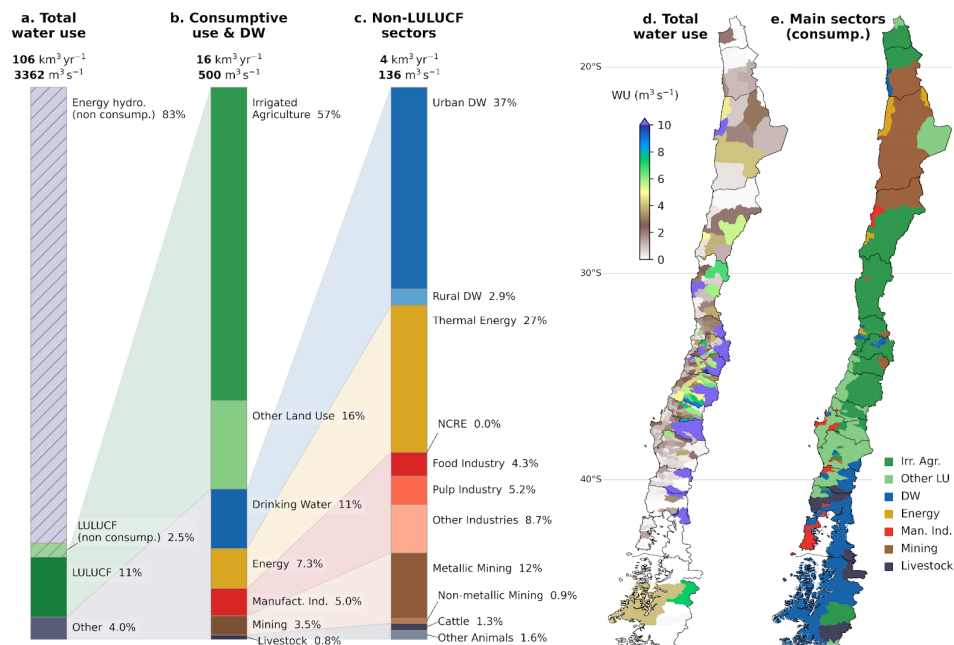


Figure 4: Near-present water use in Chile (2010-2020 average). Bars (a-c) indicate the total national water use and sectoral contributions, including the details of drinking water withdrawals (DW) and consumptive water use sectors (b), and the non-LULUCF sub-sectors (c). Maps show the distribution of water use by commune across the central and northern regions of the country (d), and the dominant sectors driving communal consumptive water use (e).

Consumptive water use is primarily attributed to the LULUCF sector, whose main activities are concentrated in central Chile (Fig. 4). With a total flow estimated at $1.5 \text{ km}^3 \text{ yr}^{-1}$ ($\sim 365 \text{ m}^3 \text{ s}^{-1}$), this sector accounts for nearly three-quarters of the country's consumptive water use. Specifically, irrigated agriculture consumes a large volume of water ($\sim 9 \text{ km}^3 \text{ yr}^{-1}$ or $285 \text{ m}^3 \text{ s}^{-1}$) due to high rates of crop evapotranspiration, often located in water-limited areas with elevated ET_0 . Non-irrigated LULUCF activities also represent a significant share (nearly 15%) of national consumptive water use –a green water footprint–, and constitute the principal water use sector in several communes of central Chile (Fig. 4e). The non-irrigated LULUCF water use is mainly associated with forestry plantations, and to a lesser extent with rainfed agriculture and evaporation from artificial water bodies. We note that this estimate is subject to considerable uncertainty, with notably higher value reported previously (Table B1).

570 Agriculture also includes a non-consumptive water use component, as a portion of irrigation water returns to the system through
infiltration and percolation. For the near-present period, the return flow is estimated at about 2.7 km³ yr⁻¹, corresponding to
23% of the total water withdrawn for irrigated agriculture (Figure 4a and Table B1). This return flow, as a proportion of total
irrigation, reflects irrigation efficiency, which tends to decrease as more advanced technologies and improved management
practices are adopted.

575 According to our methodology, certain land use activities may result in negative water use, that is, landscape transformations
that reduce ET compared to ET_N. This response is obtained in urban areas and some pasture lands in southern Chile, though
its magnitude is very low at the national level.

Water supply systems, from extraction to treatment and wastewater return, constitute a partially consumptive water use sector
totalling around 55 m³ s⁻¹ in Chile. This use is mainly associated with supply in urban areas, of which 30 m³ s⁻¹ (equivalent to
145 liters per person per day) corresponds to domestic consumption. Hence, on average, the provision of drinking water for
580 human consumption in Chile meets the minimum standard of 100 liters per person per day, although there are large contrasts,
within the country, including areas with serious supply problems (Muñoz et al., 2020; Meza et al., 2014; Duran-Llacer et al.,
2020; Alvarez-Garreton et al., 2023b).

Consumptive water uses of the energy sector (mostly thermoelectric power plants), mining, livestock, and manufacturing
industry play a secondary role in the national total but may be large—and often dominant—at the local or watershed scale,
585 particularly in the arid northern areas (see Fig. 4e).

Alongside population growth and socioeconomic development, water use in Chile increased substantially over the past six
decades (Fig. 5). The LULUCF sector was the main driver, with water use rising from about 240 to 365 m³ s⁻¹ (53%), explaining
most of the growth in consumptive use since the 1960s. In particular, water use in irrigated agriculture has risen by
approximately 20% due to increased production of annual crops and strong development in the fruit orchard industry, the latter
590 with greater relevance within the central-north valleys, featuring high insolation and drier conditions.

This increase in water use in agriculture has occurred despite a widespread transition from gravitational to sprinkler and drip
irrigation systems, which has enhanced irrigation efficiency over the last four decades. Indeed, among the various sectors, the
non-consumptive water use component of irrigated agriculture has been the only one featuring a downward trend (not shown).
Part of these changes can be explained by the irrigation efficiency paradox, which refers to cases where improvements in
595 irrigation efficiency reduce non-consumptive water use but do not result in actual water savings at the basin scale. Instead,
increased efficiency enables the irrigation of a larger cropping area or the cultivation of more water-intensive crops, ultimately
leading to higher consumptive water use—especially when total water extractions are not regulated. (Grafton et al., 2018).

Deleted: has

Deleted: some

Deleted: partition depends on

Deleted: technology,

Deleted: and management practices

Deleted: ,

Deleted: a

Deleted: s

Deleted: ly

Deleted: significant

Deleted: differences

Deleted: are

Deleted: significant

Deleted: saw

Deleted: an increase

Deleted: rise

Deleted: water

Deleted: Water

Deleted: increase

Deleted: s

Deleted: irrigated agriculture's

Deleted: usage

Deleted: with

Deleted: suggesting that the reduced non-consumptive use associated with increased efficiency does not translate into effective water savings at the basin scale; instead, it leads to greater consumptive use, as it allows for more crops to be irrigated when total water extractions are not limited


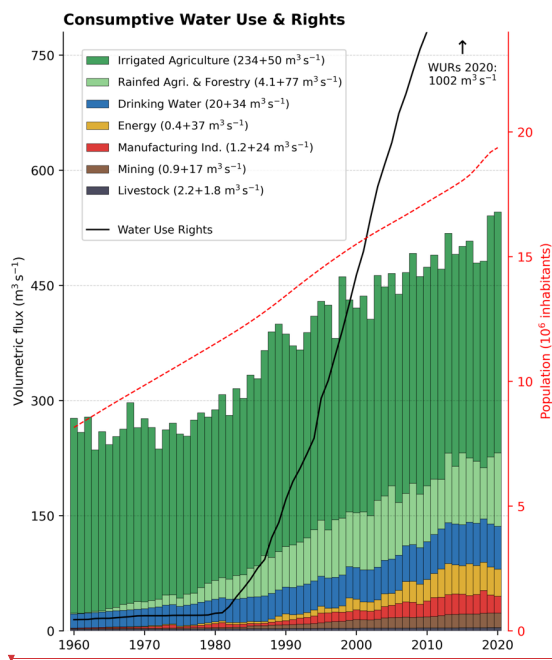


Figure 5: Historical evolution (annual means) of consumptive water use and allocated rights (WURs, black curve) in Chile. The values in the legend indicate the average water use during the 1960s and the increase towards the 2010s for each sector. Dashed curve (red axis) show the country's population (source: World Population Prospects, UN, 2024).

The forestry industry, which developed primarily between the 1970s and 2000s, has also largely contributed to the increase in water use (about $80 \text{ m}^3 \text{ s}^{-1}$) and to greater pressure on water resources in watersheds with intensive *Pinus radiata* and *Eucalyptus* plantations, particularly along the coastal range of central Chile. This finding aligns with previous assessments of water consumption by tree plantations in Chile (e.g., Alvarez-Garreton et al., 2019; Galleguillos et al., 2021; Balocchi et al., 2023) and in other regions worldwide under similar conditions (e.g., Farley et al., 2005; Beets and Oliver, 2007).

Due to changes in the LULUCF sector, the growth in productive sectors, and the population increase, the total consumptive water demand has doubled over the study period (Fig. 5). Additionally, during the second half of the 20th century, non-consumptive uses grew more than fourfold due to the major implementation of hydroelectric power plants (not shown). In the 21st century, the installed energy capacity and generation continued to grow, primarily through thermoelectric plants, which

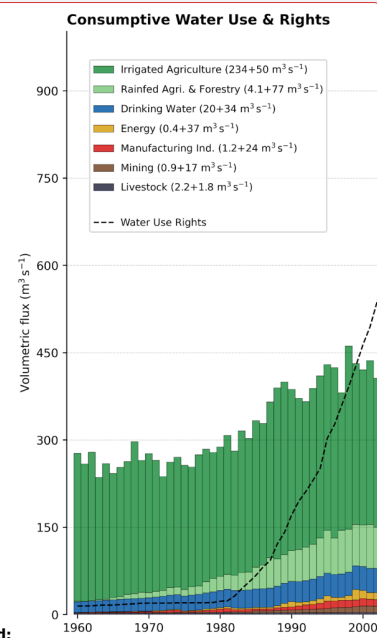

Formatted: Caption

Deleted: significantly

Deleted: and the water use increases in other productive areas and drinking water

have ~~an important~~ consumptive water use (Fig. 5), and more recently, through solar and wind power plants, which have very low water consumption.

645 The water use estimates presented in this section are based on actual socioeconomic activities in Chile (Sect. 2.5), regardless of whether these activities have a ~~WUR granted by the State~~. The regulation regarding the access to freshwater sources for consumptive or non-consumptive uses through WURs has been systematic since the introduction of the Water Code in 1981, which is still in force in the country (Congreso Nacional de Chile, 2022). This regulation has formalized customary rights and granted new ones, leading to the steeply increasing curve of the total allocated ~~consumptive~~ flow in Chile since the early 1980s
650 (~~black~~ curve in Fig. 5). As expected, the national water use estimated here for the present time is below the exploitable volume according to the allocated consumptive WURs, which totals about 1000 m³ s⁻¹ across the country. However, there are exceptions in some basins where uses are supplemented by desalinated sea water, which is not recorded under WURs, as they only consider terrestrial freshwater sources. An example is the coastal basin of Quebrada Caracoles in the Antofagasta region (~23°S), where water usage is primarily for the thermoelectric industry and is supplied by desalination plants.

655 Other basins where estimated water use exceeds the WURs are related to forestry activities, particularly in coastal basins within the Maule and Biobío regions (~37°S). This discrepancy ~~stems from the fact that~~ water naturally ~~stored~~ in the soil from precipitation ~~can be used without requiring a formal WUR~~, ~~reinforcing the debate over how to~~ legally monitor and regulate consumptive uses that do not involve direct extraction from a river or a pumping well (e.g., Prosser and Walker, 2009; Rockström et al., 2010, Alvarez-Garretón et al., 2019), even though these uses ~~are predominant in some basins~~ (Fig. 4e).
660 Further ~~discussion on Chile's~~ water allocation system and its compatibility with water security can be found in previous studies (e.g., Barria et al. 2021a, Alvarez-Garretón et al., 2023a).

5 Current conditions and drivers of change in water stress

In this section, we present the results addressing the ~~central~~ question concerning the current ~~state~~ of water stress in Chile and the historical factors ~~that have contributed~~ to changes in stress levels. ~~Across~~ the entire territory of continental Chile,
665 ~~consumptive uses represent today~~ only 2 to 3% of total water availability. However, due to the large regional contrasts in water availability (Fig. 1) and the ~~mismatch~~ between regions with high availability and those with higher water demand (Fig. 4), water security levels are highly unequal across the country. Indeed, water demands approach or even exceed the available surface water in ~~several~~ basins today.

During the second half of the 20th century, most basins between the administrative regions of Coquimbo and Biobío (30 to 37°S) remained at low to medium levels of water stress (Fig. 6). In the 1960s, some basins ~~—~~including those of Maipo and Aconcagua rivers (which supply the metropolitan area of Santiago and the region directly to the north, respectively) ~~—~~reached

Deleted: significant

Deleted: Water Use Right (

Deleted:)

Deleted: dashed

Deleted: occurs because it is not required to have a WUR to make use of ...

Deleted: contained

Deleted: and rekindles the discussion regarding the

Deleted: ing

Deleted: regulation

Deleted: of

Deleted: can be

Deleted: very significant

Deleted: details

Deleted: regarding the

Deleted: in Chile

Deleted: primary

Deleted: diagnosis

Deleted: contributing

Deleted: Considering

Deleted: current

Deleted: particular

Deleted: a number of

Deleted: ,

Deleted: ,

WSI levels above 40% due to an intense drought that affected the region at the end of that decade. In the subsequent period up to 2010, only Aconcagua, along with some coastal basins in the central zone, experienced elevated stress levels.

By contrast, in the 2010-2020 decade, the combination of low water availability caused by the megadrought and higher water use rates led to a sharp increase in water stress levels in most basins of central-north Chile. During this period, the Maipo River basin reached an extreme water stress level, while other basins, such as La Ligua and Aconcagua exhibited critical levels, with WSI values exceeding 100%, indicating that water use surpasses available surface water. These elevated water stress levels have been associated with unsustainable use of groundwater reserves, as evidenced by sustained water table declines in this region (Alvarez-Garretón et al., 2024; Jódar et al., 2023; Taucare et al., 2024).

- Deleted: hit
- Deleted: following
- Deleted: until
- Deleted: due to
- Deleted: significantly
- Deleted: d
- Deleted: several
- Deleted: in the water table

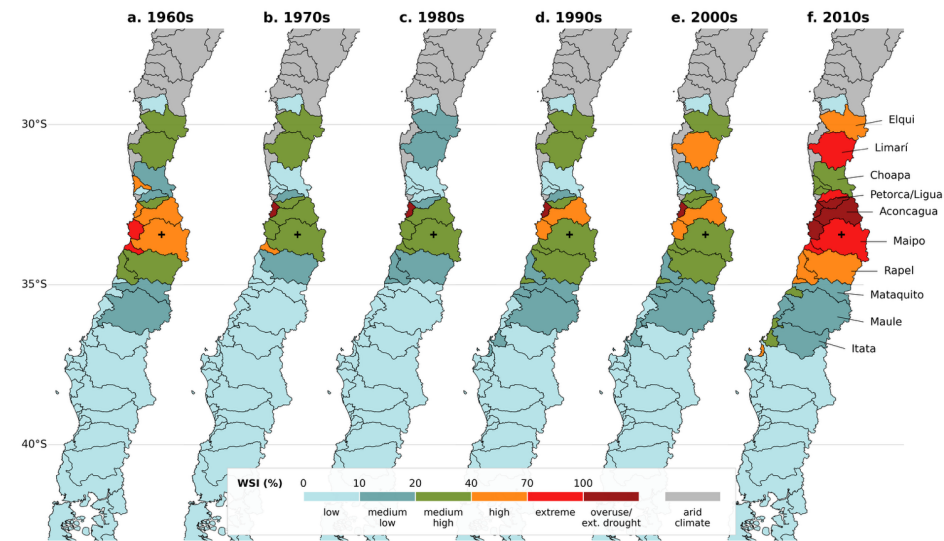


Figure 6: Decadal mean Water Stress Index (WSI) for the major watersheds in central Chile between 1960 and 2020. The names of the basins analyzed further are indicated in the right-hand panel. The cross indicates the location of Santiago city.

The Aconcagua River basin represents a case of extreme water stress. In this watershed, covering about 7300 km², urban and rural areas coexist alongside multiple productive activities with high and increasing water consumption, sometimes surpassing surface water availability (Fig. 7). Another indication of water demand pressure in this basin is the present-day small gap between the estimated water use and the legal withdrawal limit according to the total WURs (red bars and black curve in Fig. 7a). As in other regions with natural water limitations, Aconcagua's supplies rely heavily on reservoirs and groundwater withdrawals (the groundwater to total WURs ratio currently reaches about 80%).

During the decades before the megadrought, consumptive water uses in Aconcagua represented about 40% of the water availability in the basin, indicating a medium to high level of water stress. The water use to availability ratio narrows during periods of drought, as observed during the second half of the 1960s and the recent megadrought (2010-2020), where the 5-year mean WSI exceeded 65% (high to extreme water stress) and 100% (a critical condition), respectively.

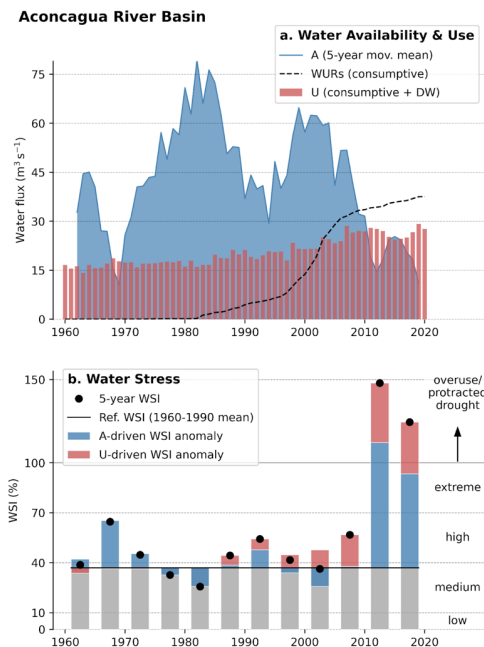


Figure 7: (a) Water availability (A, blue), consumptive water uses (U, red) and rights (WURs, black) in the Aconcagua River basin from 1960 to 2020. (b) Five-year Water Stress Index (WSI) averages in the basin (black dots). Anomalies for each quinquennium relative to the 1960-1990 mean are highlighted in color. The WSI anomalies are disaggregated into two components related changes in water availability (blue) and changes in water use (red).

The primary role that climate variability plays in WSI is evident in the case of the Aconcagua River basin, as shown by quinquennial WSI anomalies attributed to changes in water availability (blue bars in Fig. 7b). However, it is also clear that, in addition to the increased WSI during periods of precipitation deficits, the long-term growth in water use has progressively increased water stress between 1960 and 2020 (red bars in Fig. 7b). Particularly, the increased water use amplified stress levels during 2010-2020, intensifying the impact of the megadrought on water resources.

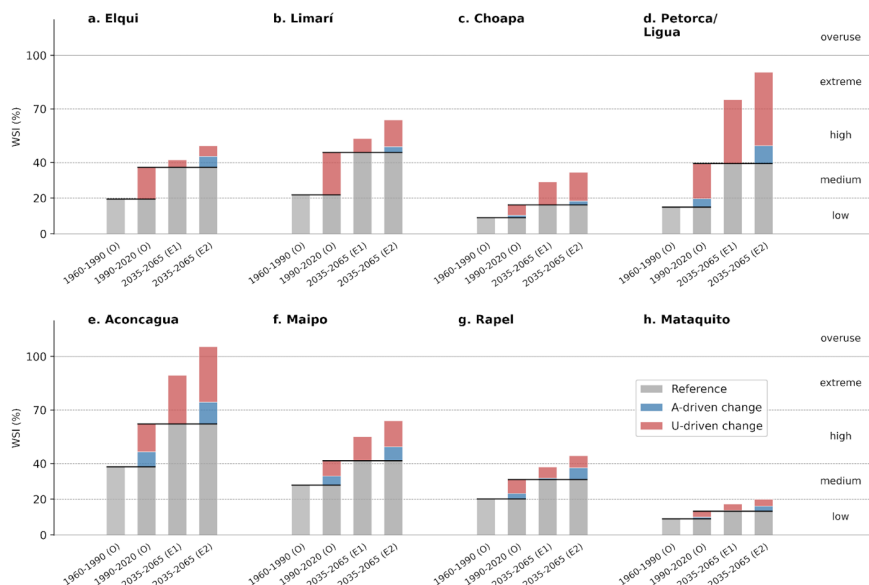


Figure 8: Mean WSI for the periods 1960-1990, 1990-2020 and 2035-2065 in the major basins of central Chile. Changes in WSI compared to a reference period (black line), and the components related to water availability and water use are highlighted in blue and red, respectively. The WSI for the two historical periods are based on actual water use/availability estimates (O). Water availability projections for the mid-21st century are based on 11 ESM simulations (showing the multi-model mean) and two socioeconomic scenarios: one with high (E1, SSP1-RCP2.6) and the other with low (E2, SSP3-RCP7.0) global greenhouse gas emission mitigation. Water use projections assume a linear extrapolation of the trend observed between 2000 and 2020.

As in Aconcagua, the increase in water demand since the 1960s has narrowed the gap between availability and use, leading to a substantial rise in water stress levels in most basins in central Chile. The 30-year mean WSI for the period 1990-2020 reflects this condition (Fig. 8). Compared with the previous 30-year period (1960-1990), the WSI increase is mainly associated with the growth in water demand and, to a lesser extent, with the long-term decrease in water availability between the two periods (see red and blue bars in Fig. 8).

Water stress levels in central Chile are projected to worsen in the future due to the continuous decline in water availability and the potential strengthening of this trend under unfavorable climate scenarios (Fig. 8). The water availability decline is primarily attributed to lower precipitation rates and, to a lesser extent, to increased evapotranspiration caused by higher temperatures (not shown). As mentioned in Sect. 3, climate projections involve various sources of uncertainty, and the actual future conditions will depend on the global climate change scenario and regional sensitivity to large-scale climatic disturbances.

However, climate model projections consistently show a direction of change towards lower precipitation in central Chile (Fig.

Formatted: Caption

Deleted: less significantly

3), leading to high and extreme WSI values in the mid-21st century in the basins of the Elqui, Limarí, Petorca/La Ligua, Aconcagua, and Maipo rivers (Fig. 8). This result considers only changes in water availability under a future climate scenario with a pathway (greenhouse gas increase) similar to one of the recent decades (SSP3-7.0). A further discussion regarding future trends and mitigation options to reduce water stress in Chile is presented next.

6 How to advance toward water security goals?

Given the limited control that local governance and actions have over global climate evolution, and considering the precautionary principle regarding climate and water availability projections (e.g., Martin, 1997; Costa, 2014; MMA, 2022), the effects of water demand on the evolution of water security are particularly relevant in Chile.

As seen during the megadrought, increased water stress under unfavorable future climate conditions could be largely exacerbated if water demand continues to rise in basins at high risk of scarcity. To evaluate this threat, along with climate projections, a simple future scenario of water use to the mid-21st century was considered based on recent trends (2000-2020) extrapolation. Under these conditions, several basins are projected to reach extreme levels of water stress, in some cases exceeding the threshold of physical sustainability (WSI > 100%, Fig. 8). WSI values near or above 100% indicate a structural condition of water overuse with major social and environmental impacts, including even greater pressure on groundwater reserves, as Alvarez-Garreton et al. (2024) reported.

In addition to the projected decline in precipitation and in freshwater availability, a warmer climate will reduce the snow accumulation capacity of headwater basins in central Chile, leading to lower meltwater flows during the summer, when agricultural water demand is highest (Vicuña et al., 2011; Stehr and Aguayo, 2017; Bozkurt et al., 2018; Alvarez-Garreton et al., 2023b; Vasquez et al., 2025). This scenario highlights risk to water security, food security, and socio-economic stability in the region. Similar risks are faced by mountainous regions worldwide that rely on snow-dominated headwater basins (Drenkhan et al., 2023; Adam et al., 2009).

Public policy in Chile increasingly recognizes the impacts of droughts and the challenges that climate change poses to water security. In particular, the Framework Law on Climate Change (MMA, 2022) establishes a set of legal instruments and adaptation plans, many of which are under development at the time of writing this paper. However, some of these instruments, —explicitly oriented towards water resources and water security goals (MOP and DGA, 2024)—, have not yet defined quantitative metrics of water security.

In our opinion, metrics such as the water stress index assessed in this study are necessary to establish water security goals and to monitor the effectiveness of actions taken to achieve them. One advantage of using the WSI is that stress levels can be associated with water scarcity and environmental risks (e.g., Falkenmark et al., 2007), thereby enabling the definition of specific water security targets. Of course, other metrics are also needed, as the WSI cannot capture the full complexity of water

Deleted: ,

Deleted: significantly

Deleted: is aware of

Deleted: series

Deleted: ,

Deleted: ,

Deleted:

Deleted: here

Deleted: efficacy

Deleted: potential

Deleted: those goals

Deleted: Regarding

Deleted: ,


Deleted: are well-defined worldwide in relation to their impacts on watersheds

Deleted: 2013a

Deleted: ; 2013b; Rockström et al., 2014; Oki and Kanac, 2006; Grafton et al., 2012

805 security, which also includes factors such as water quality and accessibility, groundwater depletion, governance, and integrated
water resources management, among others. Nevertheless, the WSI offers a clear and straightforward metric that can be
effectively complemented by additional indicators.

Given a global climate scenario and its regional manifestation, there are only two ways to reduce the WSI in a basin: by
decreasing consumptive water use or by increasing water availability through alternative sources. If public policy establishes
810 a target of, e.g., reaching WSI values of 40% or lower by 2050, different actions to adjust water availability and demand could
help achieve this goal. As an illustrative example, we look at different cases leading to that target in the Aconcagua River
basin, considering the basin history and the climate projections assessed in this study. The consumptive water use in the basin
nearly doubled over the past six decades, primarily due to the growth of irrigated agriculture (Fig. 9). A period of large water
availability in the 1980s, along with international trading opportunities, encouraged policy decisions aimed at boosting
815 agricultural development and positioning Chile as a global food-exporting leader (Villalobos et al., 2006). However, the
onset of the megadrought and the climatic projections for the region question the feasibility of sustaining these
consumption levels if water security is to be achieved.

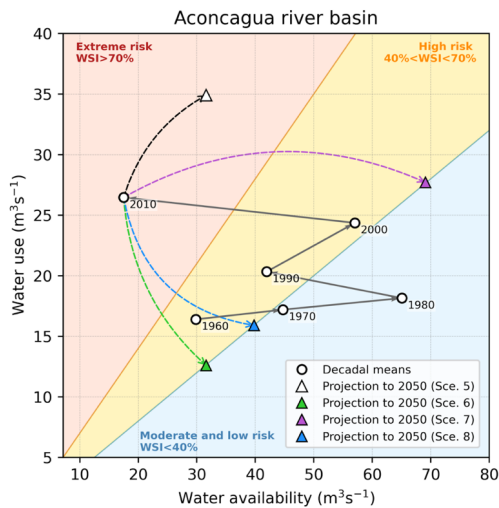

820 **Figure 9:** The decadal evolution of consumptive water use, water availability, and the corresponding WSI category (background) in
the Aconcagua River basin for the period 1960-2020 (circles). Triangle markers indicate different scenarios for the mid-21st century
under a global climate scenario with low greenhouse gas emission mitigation (SSP3-7.0, scenarios 5 to 8 in Table 2).

Deleted: s
Deleted: alleviate water stress
Deleted: reducing
Deleted: sets

Different pathways to meet the water security target ($WSI < 40\%$) by 2050 in the basin are presented in Table 2, including extreme cases where the target is met either by exclusively reducing water use (scenarios 2 and 6 in Table 2) or by solely increasing water availability (scenarios 3 and 7) through engineering solutions, such as inter-basin water transfers or seawater desalination. In the first case, adjustment measures would need to substantially reduce consumptive uses (by nearly 50% under unfavourable climate conditions). In the second case, alternative sources would need to increase water availability by $35 \text{ m}^3 \text{ s}^{-1}$, that is, doubling the natural availability in Aconcagua.

Both solutions involve socio-economic and environmental costs that should be carefully assessed. The best approach will likely involve combined efforts. Desalination has rapidly developed in Chile and is projected as a key solution for mitigating risks to basic water provision and industry in northern Chile (Vicuña et al., 2022). However, given the current energy, economic, and environmental costs, the expansion of this technology to supply high water-demand sectors such as agriculture still seems distant. As a rough estimate, considering only the economic cost and assuming a very low production rate of desalinated seawater (0.25 USD m^{-3} ; about half of the lowest published costs; Vicuña et al., 2022), an annual investment of USD 65 million, equivalent to 10% of the GDP of the agricultural sector in Valparaíso (the administrative region that houses the Aconcagua basin), would lead to a water flux of about $8 \text{ m}^3 \text{ s}^{-1}$. Even with this alternative water source, consumptive water use would still need to be reduced by 20 to 35% to achieve the target of a 40% WSI by mid-21st century, depending on the climate trends (Table 2). These values can serve as benchmarks for further in-depth assessments of actions focused on climate change adaptation and on mitigating the water use impacts of current land use activities.

It is important to distinguish between total and consumptive water uses when considering alternatives to reduce water stress, particularly in the design of water use efficiency plans. Irrigation strategies can alter how water is used in a watershed by either redistributing it more effectively or by reducing plants' consumptive water use. In the first case, studies have shown that it is possible to reduce irrigation by 20% in table grape crops while maintaining transpiration and reducing percolation, thereby avoiding negative impacts on water quality, such as the transport of agrochemicals to groundwater (Pizarro et al., 2022). This approach reduces total water use, but not consumptive use. In the second case, a 25 to 30% reduction in transpiration can be achieved through controlled plant stress management, as demonstrated locally in avocado cultivation (Beyá-Marshall et al., 2022). However, these management strategies can only reduce basin-scale water stress if they result in a reduction in total consumptive water use (Grafton et al., 2018).

It should be noted that non-renewable water reserves, such as aquifers that are not in equilibrium or melting glaciers, are not considered as alternative sources to reduce the WSI. These water reserves, along with those from artificial reservoirs, play a key role in water security primarily through temporal regulation and water accessibility. However, they do not represent a long-term additional source of water since their storage is limited by surface recharge rates. Given this limitation, water consumption at rates close to or exceeding surface availability will not be sustainable over time, regardless of whether the access is from underground, surface sources, or reservoirs (Alvarez-Garretón et al., 2024).

Deleted: significantly

Deleted: 2021

Deleted: Beyá

Deleted: 2023

865 **Table 2: Projected WSI for the mid-21st century (2035-2065) in the Aconcagua River basin under different scenarios of climate and related water availability (A_C), alternative water availability sources (A_A), such as seawater desalination or inter-basin transfer, and consumptive water use (U_{CO}). Relative changes compared to the reference period 1990-2020 are provided in parentheses. Projections of A_C based on eight ESM simulations and two socio-economic scenarios: one with high global mitigation of greenhouse gas emissions (SSP1-RCP2.6) and another with low mitigation (SSP3-RCP7.0).**

Reference 1990-2020	A_C 2035-2065	A_A 2050	U_{CO} 2050	WSI 2036-2065	Scenario description
A_C : 38.4 m ³ s ⁻¹ A_A : 0 m ³ s ⁻¹ U_{CO} : 23.8 m ³ s ⁻¹ WSI: 62%	39 m ³ s ⁻¹ (+2%)	0	34.9 m ³ s ⁻¹ (+46%)	90%	(1) U-trend/CC-optimistic: Climate under SSP1-RCP2.6, water use after following recent trend (2000-2020).
		0	15.5 m ³ s ⁻¹ (-35%)	40%	(2) U-driven target/CC-optimistic: Climate under SSP1-RCP2.6, water use change required to meet 40% WSI target.
		30.4 m ³ s ⁻¹	27.7 m ³ s ⁻¹ (+16%)	40%	(3) A-driven target/CC-optimistic: Climate under SSP1-RCP2.6, water use fixed to 2020 value, alternative water sources required to meet 40% WSI target.
		8.2 m ³ s ⁻¹	18.8 m ³ s ⁻¹ (-21%)	40%	(4) Mixed-solutions target/CC-optimistic: Climate under SSP1-RCP2.6, combined actions to meet 40% WSI target, A_A limited by desalination investment equivalent to 10% of current regional/sectoral GDP (Valparaíso/Agriculture, refs).
	31.6 m ³ s ⁻¹ (-18%)	0	34.9 m ³ s ⁻¹ (+46%)	106%	(5) As scenario (1) but climate under SSP3-RCP7.0.
		0	12.6 m ³ s ⁻¹ (-47%)	40%	(6) As scenario (2) but climate under SSP3-RCP7.0.
		37.5 m ³ s ⁻¹	27.7 m ³ s ⁻¹ (-16%)	40%	(7) As scenario (3) but climate under SSP3-RCP7.0.
		8.2 m ³ s ⁻¹	15.9 m ³ s ⁻¹ (-33%)	40%	(8) As scenario (4) but climate under SSP3-RCP7.0.

Deleted: 2020

7 Conclusions and recommendations

Deleted: 8

870 This paper offers a comprehensive evaluation of Chile's current, historical, and future water stress conditions, utilizing novel datasets on water availability and use. These datasets address critical information gaps in Chile and are relevant for various applications, including climate, land use, and water management.

We highlight the following conclusions from this study:

Deleted: three main

Deleted: of

- 875
1. Most basins in central Chile experienced high to extreme water stress between 2010 and 2020. This situation was primarily driven by reduced precipitation and water availability during this period (megadrought) and was further exacerbated by high water demand in the region.
 2. From a historical perspective, water stress has steadily increased over the last six decades in central Chile, leading to permanent (30-year mean) high levels of water stress (WSI > 40%) in several basins from Santiago to the north. This

Deleted: the

885 increase is mainly attributed to rising water consumption and, to a lesser extent, to a reduction in surface water availability. During this period, consumptive water use in the country has doubled, largely due to the expansion of the agricultural and forestry industries.

3. In a scenario of adverse climate change, conditions similar to those of the megadrought are projected to become permanent by the end of the 21st century, with nearly a 30% reduction in precipitation. Under such circumstances, most basins in the central and northern regions of the country are likely to experience persistently high or extreme levels of water stress by the mid-21st century.

890 Following the scientific evidence provided here and in other studies, we recommend decision-makers and water users to acknowledge that Chilean regulations have permitted and continue to allow consumptive water uses that exceed recognized sustainability levels in the central-northern regions of the country. Renewable water availability supports ecosystems and society for long-term functioning. Natural water reserves, such as aquifers, snow, and glaciers, as well as artificial reserves like reservoirs, complement water availability, mainly by providing temporal regulation. These storage systems enable access to greater water volumes, though this is limited by surface recharge rates. Given this limitation, water uses that approach or exceed renewable water availability will not be sustainable over time, whether the water is accessed through groundwater, surface water, or reservoirs.

Based on this understanding, measures can be evaluated and agreed upon to mitigate the impact of high water consumption activities. These actions should be implemented alongside effective adaptation strategies to address current and future climate trends, particularly concerning the impacts on the Andes Cordillera. Over this region, future scenarios of water stress will be likely exacerbated by reductions in snow accumulation driven by rising temperatures, resulting in diminished meltwater flows from headwater basins during summer, when agricultural water demand is at its peak.

905 The analysis of water use pathways and alternative sources to achieve water security under climate change—illustrated here by targeting a WSI below 40% by 2050—offers valuable input for ongoing adaptation planning. While setting basin-specific WSI thresholds and strategies to meet them falls within the scope of public policy, adopting this index can facilitate discussions on the main approaches to achieving the target: either reducing water use or increasing availability through alternative sources.

We recommend that current adaptation plans define goals based on basin-scale water balance indicators, such as the WSI, complemented by additional metrics that capture other key dimensions of water security (e.g., water access and equity, groundwater depletion, ecological flow requirements, among others). A comprehensive set of water security indices is essential for evaluating adaptation strategies; however, a key challenge lies in making the political decisions to set targets for these indices and to determining the necessary changes and associated costs to achieve them.

910 The methods used in this study can be applied to any region that meets the necessary data requirements. The estimates of water availability, water use and stress presented here carry uncertainties related to climate, hydrological, and land cover data that

Deleted: it is likely that

Deleted: will face permanently

Deleted: and

Deleted: Given these results and the contrast with historical Water Use Rights (WURs) allocations, it is important that

Deleted: Then

Deleted: In addition to the projected decline in precipitation and in freshwater availability, a warmer climate will likely reduce the snow accumulation capacity of headwater basins in central Chile, leading to lower meltwater flows during the summer, when agricultural water demand is highest (Vicuña et al., 2011; Stehr and Aguayo, 2017; Bozkurt et al., 2018; Alvarez-Garretón et al., 2023b). This scenario poses a significant risk to water security, food security, and socio-economic stability in the region. Similar risks are faced by mountainous regions worldwide that rely on snow-dominated headwater basins (Drenkhan et al., 2023; Adam et al., 2009).

Deleted: The assessed pathways of water use and alternative sources of water availability to achieve a water security target under climate change scenarios provide valuable insights for adaptation plans currently being developed

Deleted: While h

Deleted: aving a

Deleted: ,

Deleted: establish

Deleted: goals

Deleted: ning

Deleted: . The WSI is a straightforward, catchment-scale index that complements metrics assessing other aspects of water security, such as water quality, sustainable groundwater use, ecosystem needs, and water accessibility

should be contrasted and complemented with independent approaches. Monitoring key variables related to water security and facilitating access to data, particularly from public agencies, is also crucial for a comprehensive assessment of water stress and effective planning.

Appendix A: Evapotranspiration model

An evapotranspiration (ET) model was developed to assess changes in water availability and estimate water use in the LULUCF sector across Chile. This model employs a bucket scheme, similar to those used in many surface or hydrological models (e.g., Sellers et al., 1997). The model includes a soil water reservoir, replenished by precipitation (P) up to its maximum capacity and depleted through ET. The ET flux scales linearly with the soil water content and is limited by a maximum ET ratio relative to potential evapotranspiration (ET₀), defined by a parameter β_x. Like crop coefficients, β_x represents plants' inherent transpiration (T) intensities in the absence of moisture stress, reflecting canopy conductance and other physiological/morphological properties that affect the water use efficiency of different functional types. Intercepted precipitation in the vegetation canopy is explicitly accounted for through a secondary small tank, leading to evaporation (E_i) with no limitations other than ET₀ and the available canopy water (as a water body).

The model runs on a daily time step following these main equations:

$$ET(x, t) = \alpha [E_i(x, t) + f_{IWB} ET_{IWB}(x, t) + (1 - f_{IWB}) ET_{ML}(x, t)]$$
 (A1)

$$E_i(x, t) = \min [1.2 ET_0(x, t), W_i(x, t)]$$
 (A2)

$$ET_{IWB}(x, t) = \beta_x ET_0(x, t)$$
 (A3)

$$ET_{ML}(x, t) = \min [\beta(x, t) ET_0(x, t), W_s(x, t)]$$
 (A4)

For a given location or grid cell (x) and time step (t), the main output in Eq. A1 represents an ET flux (in mm day⁻¹) composed of E_i and two fluxes computed under unlimited (ET_{IWB}) and limited (ET_{ML}) soil moisture conditions. The relative importance of ET_{IWB} and ET_{ML} is controlled by fraction f_{IWB}, which serves as an activation flag for irrigated areas or water bodies. Factor α adjusts each component proportionally to limit ET to a maximum rate of 1.2 ET₀ (i.e., α is the ratio between this maximum value and the sum of the bracketed components in Eq. A1, or is set to one if the sum does not exceed the limit). The factor of 1.2 defines the maximum possible ET flux, such as in open water conditions (ET₀ estimates used here stand for a reference ET over grass, to which a scaling is applied following Finch and Hall, 2001). The interception component E_i (Eq. A2) is a flux of maximum evaporation constrained by the canopy reservoir W_i. ET_{IWB} is only limited by β_x, while ET_{ML} is constrained both by β_x and the soil water content (W_s) through coefficient β:

$$\beta(x, t) = \beta_x \frac{W_s(x, t)}{w_{sx}(x)}$$
 (A5)

Deleted: Appendix A: Earth System Models
Table A1: List of Earth System Models used from CMIP6. Downscaled variables include precipitation (P) and daily minimum/maximum temperatures (T_N, T_X) in a subset of models, depending on data availability at the time of the analysis.
Model

- Deleted: B
- Deleted: evapotranspiration (
- Deleted:)
- Deleted: β_x
- Deleted: Similar to
- Deleted: β_x
- Deleted:
- Deleted: B1
- Deleted: B2
- Deleted: B3
- Deleted: B4
- Deleted: The
- Deleted: B1
- Formatted: Font: Italic
- Formatted: Font: Italic
- Formatted: Superscript
- Deleted: E_i
- Deleted: estimated
- Deleted: ET_{IWB}
- Deleted: ET_{IWB}
- Deleted: ET_{ML})
- Deleted: a
- Deleted: is applied to
- Formatted: Not Superscript/ Subscript
- Formatted: Not Superscript/ Subscript
- Deleted: ;
- Deleted: see
- Deleted: E_i
- Deleted: until
- Deleted: W_i is emptied
- Deleted: ET_{IWB}
- Deleted: β_x
- Deleted: ET_{ML}
- Deleted: B5

where w_{sx} represents the water capacity of the soil tank, which depends on a rooting depth parameter (d_R) and a fraction of available water capacity (AWC), as follows:

$$w_{sx}(x) = AWC(x) d_R. \quad (A6)$$

While d_R is prescribed for a given land cover class, AWC varies spatially according to soil texture and bulk density. In this study, AWC was derived from the latter properties for six soil layers (0-5, 5-15, 15-30, 30-60, 60-100 and 100 to 200 cm) using the Rosetta V3 pedotransfer functions (Zhang and Shaap et al., 2017), and it is provided by CLSoilMaps, a database of gridded physical and hydraulic soil properties for Chile (Dinamarca et al., 2023; Galleguillos et al., 2024). Consequently, the model does not use a fixed soil layer depth. Instead, it employs the effective soil bucket capacity (w_{sx}), which depends on the hydraulic properties of a given location (AWC) and the rooting depth (d_R) of a specific vegetation type.

Based on previous conditions, at the beginning of each time step, water reservoirs are partially or totally filled by fractions of total precipitation, which are allocated to the canopy (P_i , interception) and soil (P_s) components as:

$$P_i(x, t) = \min [w_{ix} - W_i(x, t - 1), P(x, t)] \quad (A7)$$

$$P_s(x, t) = \min [w_{sx}(x) - W_s(x, t - 1), P(x, t) - P_i(x, t)] \quad (A8)$$

where w_{ix} stands for water holding capacity of the canopy. The remaining precipitation ($P - P_i - P_s$) is considered as the model runoff. At the end of each cycle, the soil and canopy reservoirs are partially emptied following the ET_{ML} and E_i losses, respectively.

Hence, in addition to the forcing and internally computed variables, four parameters control the model: the coefficient β_x (dimensionless), the rooting depth d_R (mm), the canopy interception capacity w_{ix} (mm) and the saturation fraction f_{iWB} (boolean). Water fluxes and storages defined by Eqs. A1 to A8 are calculated independently for different land cover conditions, each with its own set of parameters (Table S2 in Supplementary Material). The final ET flux is determined as a weighted average across the various land cover types coexisting in a spatial unit (grid cell), using a mosaic approach like that employed in several land surface models (e.g., Blyth et al., 2021). For the purposes of this study, the model runs in a fully distributed manner over the domain and with the spatial resolution defined by the atmospheric forcing CR2MET (continental Chile, 0.05° latitude-longitude grid), and using the 48 land cover classes included in CR2LUC.

Soil evaporation is not explicitly included in Eq. A1 but is accounted for through the flux ET_{ML} as an independent tile. The fractional area of this tile results from the barren land fraction prescribed in CR2LUC (code 600) and the residual fraction from the effective coverage ($F_K^{(eff)}$) of other classes. In a similar approach to other models (e.g., Krinner et al., 2005), the fraction $F_K^{(eff)}$ reduces the area prescribed for vegetated classes (F_K) based on its canopy cover, thereby accounting for differences in foliar density and the phenological cycle of plants. This is modeled following the Beer-Lambert law:

Deleted: B6

Deleted: B7

Deleted: B8

Deleted: w_{ix}

Deleted: $P - P_i -$

Deleted: P_s

Deleted: B1

Deleted: -

Deleted: B1

Deleted: similar to

Deleted: most

Deleted: B1

Deleted: ET_{ML}

$$F_K^{(eff)}(x, t) = F_K(x, t) (1 - e^{-0.6 LAI_K(t)}) \quad (A9)$$

where LAI_K is the Leaf Area Index of a vegetation class K. The factor 0.6 has been chosen as a typical value for the light extinction coefficient (e.g., van Dijk and Bruijnzeel, 2001). Consequently, the actual grid area fraction of a vegetated class seen by the model will range between 0 and a value that tends to F_K for elevated LAI. In this study, we computed the monthly mean LAI (2014-2019) for each vegetated class based on the 333-m PROBA-V LAI satellite dataset from the Copernicus Global Land Service (CGLS; Smets et al., 2018). The data were processed for equivalent grid cells with a dominant fraction of the corresponding CR2LUC class, using data sources from this product (Sect. 2.4), particularly the fruit cadastres from ODEPA, the vegetation cadastres from CONAF, and the 30-m Land Cover for Chile (Zhao et al., 2016).

The main objective of this scheme is to accurately represent the ET mean rate, its seasonal and long-term variability, rather than modeling runoff as in a full hydrological model. As such, snow accumulation and melt are not included, nor are any processes related to runoff propagation. Sublimation over permanent snow/glacier conditions is accounted for in the same way as ET in other land cover types, with its own set of parameters. With these limitations, the model does not fully capture runoff seasonality and variability, especially in mountain watersheds influenced by snow. However, the long-term mean runoff within watersheds were contrasted with observed river streamflows to adjust parameters and validate water balance of the model.

Land cover classes included in CR2LUC, along with the set of parameters used in this study, are listed in Table S2. Most parameters were based on published data. Rooting depth values vary greatly depending on the metric used, such as maximum depths or percentiles in vertical root distribution (e.g., Canadell et al., 1996; Schenk and Jackson, 2002). For agricultural classes, we prescribed the maximum effective rooting depth as specified in the Food and Agriculture Organization's Irrigation and Drainage Paper No. 56 (FAO56; Allen et al., 1998), similar to the values of maximum rooting depths reported by Fan et al. (2016). For natural vegetation and tree plantations, prescribed rooting depth values range from 0.3 meters (Tundra) to 3.0 meters (sclerophyllous and eucalyptus trees), based on the data from Canadell et al. (1996), Schenk and Jackson (2002), Fan et al. (2017) and Tumber-Davila et al. (2022).

Parameter w_{IX} varies between 0.3 and 2 mm. For agricultural classes, the values were derived using the model of van Dijk and Bruijnzeel (2001) with the leaf and stem water capacity from Zhong et al. (2022), and the LAI data described earlier. For natural vegetation and tree plantations, we used the storage capacity per unit of canopy area, also based on Zhong et al. (2022).

For β_X , we adopted the mid-season crop coefficients from FAO56 for agricultural classes, ranging from 0.7 to 1.2. Setting β_X for natural classes and tree plantations is not straightforward. In this case, we were guided by published observations-based data on ET/ET₀ ratios (Liu et al., 2017b), ET/P ratios (White et al., 2022; Balocchi et al., 2023), and T/ET ratios (Schlesinger and Jasechko, 2014; Benyon and Doody, 2015; Nelson et al., 2020). However, this information serves only as a reference since these quantities are influenced by factors such as moisture stress, leaf area, and intercepted evaporation, which do not precisely correspond to the unstressed T/ET₀ rates accounted for by β_X . In general, we aimed to maintain differences between functional

Deleted: B9

Deleted: any

Deleted:

Deleted: B1

Deleted: can

Deleted: significantly

types (e.g., shrubs vs. trees, broadleaf vs. needleleaf), but the final β_X values were calibrated by assessing the water balance in basins with monitored streamflow and distinct land covers (Fig. A1), resulting in values ranging from 0.5 to 0.9.

Deleted: B

Non-vegetated classes were also characterized through these parameters. For barren land and built-up areas, topsoil layers of 200 mm and 50 mm were assigned, respectively. Additionally, a w_{IX} value of 1.0 mm was included for the latter to account for intercepted water on impervious surfaces. Water bodies evaporate at maximum rates ($\beta_X = 1.2$), except for wetlands and salt pans, which are only partially covered by saturated areas. Sublimation from glaciers and permanently snow-covered areas was modeled as water bodies with limited evaporation rates ($\beta_X = 0.2$), mimicking the ET/ET₀ ratios shown by ERA5 land over glacier areas, such as in the Patagonian Ice Fields.

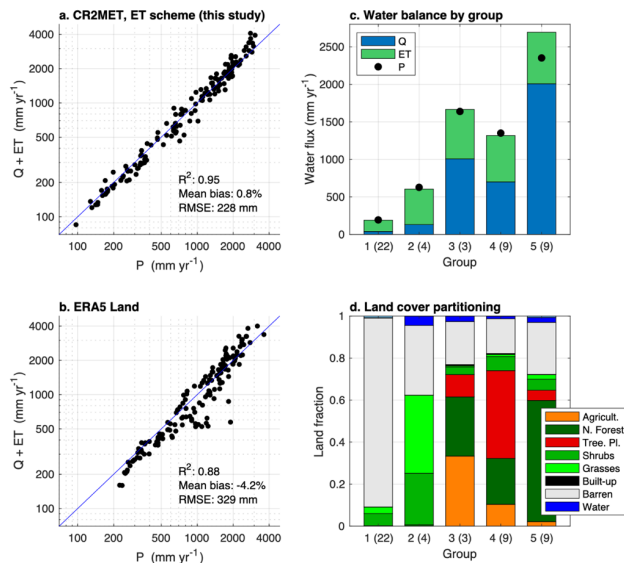


Figure A1: Comparison of mean annual precipitation (P) in 147 watersheds in Chile with observed river streamflow (Q) and modeled evapotranspiration (ET). The estimates of P and ET in panels a and b correspond to those assessed in this study (CR2MET-driven) and from ERA5-Land, respectively. Panel c shows the CR2MET-based flux comparison for groups of watersheds with dominant fractions of barren land (>85%, group 1), shrubland and grasses (>40%, group 2), agriculture (>30%, group 3), tree plantations (>30%, group 4), and native forest (>50%, group 5). The number of basins and mean land cover partitioning of each group is shown in panel d.

Formatted: Caption

Deleted: significant

Deleted: ¶

Figure A1 presents a validation summary of the ET simulations. We used the CAMELS-CL dataset (Alvarez-Garretón et al., 2018) to compare long-term (1990-2020) average river streamflows (Q) observed in Chile with watershed-averaged P and ET.

Deleted: B

Deleted: precipitation (P)

A total of 147 basins were selected based on data availability (at least 75% coverage during 1990-2020) and the absence of

Deleted: evapotranspiration (ET)

disturbances significantly affecting river discharges. The sum of the observed Q and simulated ET shows a strong inter-basin correlation with the CR2MET P ($R^2 = 0.95$) and exhibits low overall bias (<1%). More noticeable and systematic biases, where Q+ET values exceed P, are found in humid watersheds ($P > 2000 \text{ mm yr}^{-1}$). We attribute these biases primarily to an underestimation of CR2MET P rather than an overestimation of ET, since the latter is mostly limited by ET_0 and the runoff coefficients (Q/P) in these watersheds approach or even exceed 100%. These basins are predominantly covered by native, temperate rainforest. Aside from this group, there is no systematic bias across other watersheds with distinct land cover (Fig. A1c).

For benchmarking, we conducted the same analysis using independent P and ET data from ERA5-Land reanalysis (Muñoz-Sabater et al., 2021), which yielded poorer results (Fig. A1b), highlighting the added value of these new datasets for Chile.

Appendix B: Near-present water use in Chile – data source comparison

Table B1: Sectoral water use in continental Chile ($\text{km}^3 \text{ yr}^{-1}$) from different estimates. Where available, values are classified as consumptive and non-consumptive.

	Source	FAO (2021)	DGA (2017)	F. Chile (2018)	This study
	Ref. period	2020	2015	~2016-2017	2010-2020
Consumptive use and Drinking Water	LULUCF (irrigated)		7.9	5.9	8.9
	LULUCF (rainfed)			13.8	2.5
	Drinking Water	1.3	1.3	1.7	1.7
	Energy	0.1	0.5	0.04	1.1
	Manufac. Industry	1.7	0.7	0.04	0.8
	Mining		0.4	0.3	0.5
	Livestock	0.1	0.1	0.1	0.1
	Total			22	16
Non-Consumptive use	Energy		66	42	88
	LULUCF			6.9	2.7
	Other			0.4	
	Total			49	91
Total use				71	106
Withdrawal ^a	LULUCF	29.4	7.9 ^c	13	12
	Other		68	44	92
	Total	35 ^b	76	57	104

^aBlue water withdrawals (exclude rainfed agriculture).

^bFAO-AQUASTAT's Total Freshwater Withdrawal. It does not account for withdrawals in hydropower generation.

^cDoes not account for non-consumptive water use in agriculture.

Deleted: es

Formatted: Subscript

Deleted: B1c

Deleted: B1b

1140 **Data availability**

The CR2LUC and CR2WU datasets developed in this study can be accessed from <https://doi.org/10.5281/zenodo.13324250> and <https://doi.org/10.5281/zenodo.13324235> (last access: 20 August 2024), respectively. The climate projections from downscaled ESMs can be shared upon request. The CR2MET dataset was obtained from <https://doi.org/10.5281/zenodo.7529682> (last access: 20 September 2023). The water use rights were obtained from CAMELS-CL dataset (Alvarez-Garreton et al., 2018).

Author contributions

JPB and CAG conceived the idea, designed the experimental setup, performed de analyses, prepared the figures and wrote an early draft of the manuscript. JPB developed CR2MET and ET simulations. JPB and RM developed the CR2LUC and CR2WU products. All the authors advised on the data production, experimental setup and wrote the final paper.

1150 **Competing interests**

The contact author has declared that none of the authors has any competing interests.

Acknowledgements

This research was developed within the framework of the Center for Climate and Resilience Research (CR2, ANID/FONDAP/1523A0002) and the research projects ANID/FSEQ210001, FONDECYT/11190952, and FONDECYT/11240924. We thank Mauricio Abel Herrera and Sergio Gonzalez for their support with LAI and CMIP6 model data processing. This publication has been prepared using European Union's Copernicus Land Monitoring Service information. We acknowledge the World Climate Research Programme, which, through its Working Group on Coupled Modelling, coordinated and promoted CMIP6. We thank the climate modeling groups for producing and making available their model output, the Earth System Grid Federation (ESGF) for archiving the data and providing access, and the multiple funding agencies who support CMIP6 and ESGF.

References

- 1165 Aceituno, P., Boisier, J. P., Garreaud, R., Rondanelli, R., and Rutllant, J.: Climate and Weather in Chile, in: Garreaud, R., Rutllant, J. A., and Muñoz, R. (Eds.), *Climate and Weather in Chile*, Springer, Cham, Switzerland, 7–29, https://doi.org/10.1007/978-3-030-56901-3_2, 2021.
- Adam, J. C., Hamlet, A. F., and Lettenmaier, D. P.: Implications of global climate change for snowmelt hydrology in the twenty-first century, *Hydrol. Process.*, 23, 962–972, 2009.
- 1170 [Alcamo, J., Döll, P., Henrichs, T., Kaspar, F., Lehner, B., Rösch, T., and Siebert, S.: Global estimates of water withdrawals and availability under current and future “business-as-usual” conditions, *Hydrol. Sci. J.*, 48, 339–348, <https://doi.org/10.1623/hysj.48.3.339.45278>, 2003.](https://doi.org/10.1623/hysj.48.3.339.45278)
- Allen, R. G., Pereira, L. S., Raes, D., and Smith, M.: *Crop evapotranspiration: Guidelines for computing crop water requirements*, FAO Irrigation and Drainage Paper No. 56, Food and Agriculture Organization of the United Nations, Rome, 1998.
- 1175 Alvarez-Garretón, C., Mendoza, P. A., Boisier, J. P., Addor, N., Galleguillos, M., Zambrano-Bigiarini, M., Lara, A., Puelma, C., Cortes, G., Garreaud, R., McPhee, J., and Ayala, A.: The CAMELS-CL dataset: catchment attributes and meteorology for large sample studies – Chile dataset, *Hydrol Earth Syst Sci*, <https://doi.org/https://doi.org/10.5194/hess-22-5817-2018>, 2018.
- Alvarez-Garretón, C., Lara, A., Boisier, J. P., Galleguillos, M., 2019. The Impacts of Native Forests and Forest Plantation on Water Supply in Chile. *Forests* 10, 473. <https://doi.org/10.3390/f10060473>, 2019.
- 1180 Alvarez-Garretón, C., Boisier, J. P., Garreaud, R., Seibert, J., and Vis, M.: Progressive water deficits during multiyear droughts in basins with long hydrological memory in Chile, *Hydrol Earth Syst Sci*, 25, <https://doi.org/10.5194/hess-25-429-2021>, 2021.
- Alvarez-Garretón, C., Boisier, J. P., Billi, M., Lefort, I., Marinao, R., and Barria, P.: Protecting environmental flows to achieve long-term water security, *J Environ Manage*, 328, 116914, <https://doi.org/10.1016/j.jenvman.2022.116914>, 2023a.
- 1185 Alvarez-Garretón, C., Boisier, J. P., Blanco, G., Billi, M., Nicolas-Artero, C., Maillet, A., Aldunce, P., Urrutia-Jalabert, R., Zambrano-Bigiarini, M., Guevara, G., Galleguillos, M., Muñoz, A., Christie D., Marinao, R., and Garreaud, R.: Seguridad Hídrica en Chile: Caracterización y Perspectivas de Futuro, Santiago, 2023b.
- Alvarez-Garretón, C., Boisier, J. P., Garreaud, R., González, J., Rondanelli, R., Gayó, E., and Zambrano-Bigiarini, M.: HESS Opinions: The unsustainable use of groundwater conceals a “Day Zero,” *Hydrol Earth Syst Sci*, 28, 1605–1616, <https://doi.org/10.5194/hess-28-1605-2024>, 2024.
- 1190 Amann, B., Bertrand, S., Alvarez-Garretón, C., and Reid, B.: Seasonal Variations in Fjord Sediment Grain Size: A Pre-requisite for Hydrological and Climate Reconstructions in Partially Glacierized Watersheds (Baker River, Patagonia), *J Geophys Res Earth Surf*, 127, <https://doi.org/10.1029/2021JF006391>, 2022.
- 1195 [Anderson, T. G., Christie, D. A., Chávez, R. O., Olea, M., and Anchukaitis, K. J.: Spatiotemporal peatland productivity and climate relationships across the western South American Altiplano, *J. Geophys. Res.-Biogeo.*, 126, e2020JG005994, <https://doi.org/10.1029/2020JG005994>, 2021.](https://doi.org/10.1029/2020JG005994)
- Araya, D., Mendoza, P. A., Muñoz-Castro, E., and McPhee, J.: Towards robust seasonal streamflow forecasts in mountainous catchments: impact of calibration metric selection in hydrological modeling, *Hydrol Earth Syst Sci*, 27, 4385–4408, <https://doi.org/10.5194/hess-27-4385-2023>, 2023.

- 1200 Arias, P. A., Garreaud, R., Poveda, G., Espinoza, J. C., Molina-Carpio, J., Masiokas, M., Viale, M., Scaff, L., and van Oevelen, P. J.: Hydroclimate of the Andes Part II: Hydroclimate Variability and Sub-Continental Patterns, *Front. Earth Sci.*, <https://doi.org/10.3389/feart.2020.505467>, 2021.
- Baez-Villanueva, O. M., Zambrano-Bigiarini, M., Mendoza, P. A., McNamara, I., Beck, H. E., Thurner, J., Nauditt, A., Ribbe, L., and Thinh, N. X.: On the selection of precipitation products for the regionalisation of hydrological model parameters, *Hydrol Earth Syst Sci*, 25, 5805–5837, <https://doi.org/10.5194/hess-25-5805-2021>, 2021.
- 1205 Baez-Villanueva, O. M., Zambrano-Bigiarini, M., Miralles, D. G., Beck, H. E., Siegmund, J. F., Alvarez-Garretón, C., Verbist, K., Garreaud, R., Boisier, J. P., and Galleguillos, M.: On the timescale of drought indices for monitoring streamflow drought considering catchment hydrological regimes, *Hydrol Earth Syst Sci*, 28, 1415–1439, <https://doi.org/10.5194/hess-28-1415-2024>, 2024.
- 1210 Balocchi, F., Galleguillos, M., Rivera, D., Stehr, A., Arumi, J. L., Pizarro, R., Garcia-Chevesich, P., Iroumé, A., Armesto, J. J., Hervé-Fernández, P., Oyarzún, C., Barria, P., Little, C., Mancilla, G., Yépez, S., Rodríguez, R., White, D. A., Silberstein, R. P., Neary, D. G., and Ramírez de Arellano, P.: Forest hydrology in Chile: Past, present, and future, *J. Hydrol.*, 616, 128681, <https://doi.org/10.1016/j.jhydrol.2022.128681>, 2023.
- 1215 Barria, P., Barria Sandoval, I., Guzman, C., Chadwick, C., Alvarez-Garretón, C., Diaz-Vasconcellos, R., Ocampo-Melgar, A., and Fuster, R.: Water allocation under climate change: A diagnosis of the Chilean system, *Elementa*, 9, 1–20, <https://doi.org/https://doi.org/10.1525/elementa.2020.00131>, 2021a.
- Barria, P., Chadwick, C., Ocampo-Melgar, A., Galleguillos, M., Garreaud, R., Díaz-Vasconcellos, R., Poblete, D., Rubio-Álvarez, E., and Poblete-Caballero, D.: Water management or megadrought: what caused the Chilean Aculeo Lake drying?, *Reg Environ Change*, 21, 19, <https://doi.org/10.1007/s10113-021-01750-w>, 2021b.
- 1220 Beets, P. N., and Oliver, G. R.: Water use by managed stands of *Pinus radiata*, indigenous podocarp/hardwood forest, and improved pasture in the central North Island of New Zealand, *N.Z. J. For. Sci.*, 37(2), 306–323, 2007.
- Benyon, R. G., and Doody, T. M.: Comparison of interception, forest floor evaporation and transpiration in *Pinus radiata* and *Eucalyptus globulus* plantations, *Hydrol. Process.*, 29, 1173–1187, <https://doi.org/10.1002/hyp.10237>, 2015.
- 1225 Beyá-Marshall, V., Arcos, E., Seguel, O., Galleguillos, M., and Kremer, C.: Optimal irrigation management for avocado (cv. 'Hass') trees by monitoring soil water content and plant water status, *Agric. Water Manage.*, 271, 107794, <https://doi.org/10.1016/j.agwat.2022.107794>, 2022.
- 1230 Blyth, E. M., Arora, V. K., Clark, D. B., et al.: Advances in land surface modelling, *Curr. Clim. Change Rep.*, 7, 45–71, <https://doi.org/10.1007/s40641-021-00171-5>, 2021.
- Boisier, J. P., Rondanelli, R., Garreaud, R., and Muñoz, F.: Anthropogenic and natural contributions to the Southeast Pacific precipitation decline and recent megadrought in central Chile, *Geophys Res Lett*, 43, 413–421, <https://doi.org/10.1002/2015GL067265>, 2016.
- Boisier, J. P., Alvarez-Garretón, C., Cordero, R. R., Damiani, A., Gallardo, L., Garreaud, R. D., Lambert, F., Ramallo, C., Rojas, M., and Rondanelli, R.: Anthropogenic drying in central-southern Chile evidenced by long-term observations and climate model simulations, *Elem Sci Anth*, 6, 1–20, <https://doi.org/10.1525/elementa.328>, 2018.
- 1235 Boisier, J. P.: CR2MET: A high-resolution precipitation and temperature dataset for the period 1960–2021 in continental Chile (v2.5), Zenodo [data set], <https://doi.org/10.5281/zenodo.7529682>, 2023.

Deleted: Banco Central: Producto interno bruto por clase de actividad económica (base 1977), available at: https://si3.bcentral.cl/Siete/ES/Siete/Cuadro/CAP_CCNN/MN_CCNN76/CCNN1977_P1/CCNN1977_P1_2022a.4

Banco Central: Producto interno bruto por clase de actividad económica (base 1986), available at: https://si3.bcentral.cl/Siete/ES/Siete/Cuadro/CAP_CCNN/MN_CCNN76/CCNN1986_P1_A/CCNN1986_P1_A_2022b.4

Banco Central: Producto interno bruto por clase de actividad económica (base 1996), available at: https://si3.bcentral.cl/Siete/ES/Siete/Cuadro/CAP_CCNN/MN_CCNN76/CCNN1996_P1/CCNN1996_P1_2022c.4

Banco Central: Producto interno bruto por clase de actividad económica (referencia 2013), available at: https://si3.bcentral.cl/Siete/ES/Siete/Cuadro/CAP_CCNN/MN_CCNN76/CCNN2013_P1/CCNN2013_P1_2022d.4

Deleted: Bi, D., Dix, M., Marsland, S. J., O'Farrell, S., Rashid, H. A., Uotila, P., Hirst, A. C., Kowalczyk, E., Sullivan, A., Yan, H., and Hannah, N.: Configuration and spin-up of ACCESS-CM2, the new generation Australian Community Climate and Earth System Simulator Coupled Model, *J. S. Hemisphere Earth Syst. Sci.*, 70, 225–251, <https://doi.org/10.22499/3.7001.016>, 2020.

- Boisier, J. P., Marinao, R., and Alvarez-Garretón, C.: CR2LUC: Land use and land cover changes for the period 1950–2020 in continental Chile (v1.0), Zenodo [data set], <https://doi.org/10.5281/zenodo.13324250>, 2024a.
- 1260 Boisier, J. P., Marinao, R., and Alvarez-Garretón, C.: CR2WU: Water use dataset for the period 1950–2020 in continental Chile (v1.0), Zenodo [data set], <https://doi.org/10.5281/zenodo.13324235>, 2024b.
- Bozkurt, D., Rojas, M., Boisier, J. P., and Valdivieso, J.: Projected hydroclimate changes over Andean basins in central Chile from downscaled CMIP5 models under the low and high emission scenarios, *Clim Change*, 150, 131–147, <https://doi.org/10.1007/s10584-018-2246-7>, 2018.
- 1265 Brouwer, C., Prins, K., and Heibloem, M.: Irrigation water management: Irrigation scheduling, Training Manual No. 4, Food and Agriculture Organization, Rome, 43 pp., 1989.
- Canadell, J., Jackson, R. B., Ehleringer, J. B., Mooney, H. A., Sala, O. E., and Schulze, E. D.: Maximum rooting depth of vegetation types at the global scale, *Oecologia*, 108, 583–595, <https://doi.org/10.1007/BF00329030>, 1996.
- Cannon, A. J., Sobie, S. R., and Murdock, T. Q.: Bias correction of GCM precipitation by quantile mapping: how well do methods preserve changes in quantiles and extremes?, *J. Clim.*, 28, 6938–6959, 2015.
- Cannon, A. J.: Multivariate quantile mapping bias correction: an N-dimensional probability density function transform for climate model simulations of multiple variables, *Clim. Dyn.*, 50, 31–49, 2018.
- [Carrasco-Escaff, T., Rojas, M., Garreaud, R. D., Bozkurt, D., and Schaefer, M.: Climatic control of the surface mass balance of the Patagonian Icefields, *The Cryosphere*, 17, 1127–1149, <https://doi.org/10.5194/tc-17-1127-2023>, 2023.](#)
- 1275 Carrasco-Escaff, T., Garreaud, R., Bozkurt, D., Jacques-Coper, M., and Pauchard, A.: The key role of extreme weather and climate change in the occurrence of exceptional fire seasons in south-central Chile, *Weather and Climate Extremes*, 45, 100716, <https://doi.org/10.1016/j.wace.2024.100716>, 2024.
- [Chen, J., Chen, J., Liao, A., Cao, X., Chen, L., Chen, X., He, C., Han, G., Peng, S., Lu, M., Zhang, W., Tong, X., and Mills, J.: Global land cover mapping at 30 m resolution: A POK-based operational approach, *ISPRS J. Photogramm.*, 103, 7–27, <https://doi.org/10.1016/j.isprsjprs.2014.09.002>, 2015.](#)
- 1280 [CIREN-ODEPA: Catastro Frutícola del Centro de Información de Recursos Naturales \(CIREN\) y la Oficina de Estudios y Políticas Agrarias \(ODEPA\), Ministerio de Agricultura, available at: <https://www.odepa.gob.cl/estadisticas-del-sector/catastros-fruticolas/catastro-fruticola-ciren-odepa>, 2023.](#)
- [CONAF: Catastro Vegetacional de la Corporación Nacional Forestal \(CONAF\), Ministerio de Agricultura, available at: <https://sit.conaf.cl>, 2023.](#)
- 1285 Condom, T., Martínez, R., Pabón, J. D., Costa, F., Pineda, L., Nieto, J. J., López, F., and Villacis, M.: Climatological and hydrological observations for the South American Andes: In situ stations, satellite, and reanalysis data sets, *Front. Earth Sci.*, <https://doi.org/10.3389/feart.2020.00092>, 2020.
- Congreso Nacional de Chile: Decreto con fuerza de ley 1122, Fija Texto del Código de Aguas, Ministerio de Justicia, 1–89, <https://bcn.cl/2f8tw> (last access: 1 October 2023), 2022.
- 1290 Cortés-Salazar, N., Vásquez, N., Mizukami, N., Mendoza, P. A., and Vargas, X.: To what extent does river routing matter in hydrological modeling?, *Hydrol Earth Syst Sci*, 27, 3505–3524, <https://doi.org/10.5194/hess-27-3505-2023>, 2023.

Deleted: British Petroleum: Statistical Review of World Energy, available at: <https://www.bp.com/en/global/corporate/energy-economics/statistical-review-of-world-energy.html>, 2021.*

Deleted: CEDEUS. (2015). Salares de Chile (Rulamahue). Pontificia Universidad Católica de Chile y la Universidad de Concepción. http://datos.cedeus.cl/layers/geonode:cl_salares_geo*

Deleted: Cherchi, A., Anav, A., Zanchettin, D., and Gualdi, S.: The CMCC Earth System Model (CMCC-ESM2), *Geosci. Model Dev.*, 12, 2983–2996, <https://doi.org/10.5194/gmd-12-2983-2019>, 2019.*

Formatted: Spanish

Formatted: Spanish

Field Code Changed

Formatted: Spanish

Deleted: CNE: Generación Bruta Sistemas Medianos de Aysén, Comisión Nacional de Energía, available at: https://www.cne.cl/wp-content/uploads/2019/06/generacion_bruta_Aysen.xlsx, 2019a.*
CNE: Generación Bruta Sistemas Medianos de Los Lagos, Comisión Nacional de Energía, available at: https://www.cne.cl/wp-content/uploads/2019/06/generacion_bruta_Cch-Hor.xlsx, 2019b.*
CNE: Generación Bruta Sistemas Medianos de Magallanes, Comisión Nacional de Energía, available at: https://www.cne.cl/wp-content/uploads/2019/06/generacion_bruta_Magallanes.xlsx, 2019c.*
CNE: Anuario Estadístico de Energía 2020, Comisión Nacional de Energía, available at: <https://www.cne.cl/nuestros-servicios/reportes/informacion-y-estadisticas/>, 2021a.*
CNE: Electricidad: Producción y consumo, Comisión Nacional de Energía, available at: <https://www.cne.cl/normativas/electrica/consulta-publica/electricidad/>, 2021b.*

CNE: Generación Bruta SEN, Comisión Nacional de Energía, available at: https://www.cne.cl/wp-content/uploads/2022/06/Generacion_Bruta.xlsx, 2022.*
COCHILCO: Anuario Estadísticas del cobre y Otros Minerales 1985–2004, Comisión Chilena del Cobre, available at: <https://www.cochilco.cl/Lists/Anuario/Attachments/11/Anuario2004.pdf>, 2006.*

COCHILCO: Anuario de estadísticas del cobre y otros minerales 2000–2019, Comisión Chilena del Cobre, available at: <https://www.cochilco.cl/Lists/Anuario/Attachments/23/AE2019WEB.pdf>, 2020a.*

COCHILCO: Consumo de agua en la minería del cobre al 2015, Comisión Chilena del Cobre, available at: [https://www.cochilco.cl/Listado/Temtico/Consumo de agua en](https://www.cochilco.cl/Listado/Temtico/Consumo%20de%20agua%20en%20la%20mineria%20del%20cobre%20al%202015) ... [2]

Formatted: Spanish

Formatted: Spanish

Field Code Changed

Formatted: Spanish

Formatted: Spanish

Formatted: Spanish

Field Code Changed

Formatted: Spanish

Formatted: Spanish

- 380 Costa, E.: El principio de precaución en la regulación ambiental chilena: operando sin instrucciones, pero operando, *Rev. Justicia Ambient.*, 6, 2014.
- Damiani, A., Cordero, R. R., Llanillo, P. J., Feron, S., Boisier, J. P., Garreaud, R., Rondanelli, R., Irie, H., and Watanabe, S.: Connection between Antarctic Ozone and Climate: Interannual Precipitation Changes in the Southern Hemisphere, *Atmosphere*, 11, 579, <https://doi.org/10.3390/atmos11060579>, 2020.
- 385 Damkjaer, S. and Taylor, R.: The measurement of water scarcity: defining a meaningful indicator, *Ambio*, 46, 513–531, <https://doi.org/10.1007/s13280-017-0912-z>, 2017.
- DGA – Dirección General de Aguas: Estimación de la demanda actual, proyecciones futuras y caracterización de la calidad de los recursos hídricos en Chile, SIT N° 419, Ministerio de Obras Públicas, Dirección General de Aguas, realizado por Unión Temporal de Proveedores: Hídrica Consultores SpA y Aqaterra Ingenieros Ltda., Santiago, Chile, 2017.
- 390 DGA – Dirección General de Aguas: Aplicación de la metodología de actualización del Balance Hídrico Nacional en las cuencas de las macrozonas norte y centro, SIT N° 435, Ministerio de Obras Públicas, Dirección General de Aguas, División de Estudios y Planificación, realizado por Fundación para la Transferencia Tecnológica y Pontificia Universidad Católica de Chile, Santiago, Chile, 2018.
- DGA – Dirección General de Aguas: Aplicación de la metodología de actualización del Balance Hídrico Nacional en la macrozona sur y parte norte de la macrozona austral, SIT N° 441, Ministerio de Obras Públicas, Dirección General de Aguas, División de Estudios y Planificación, elaborado por Universidad de Chile, Facultad de Ciencias Físicas y Matemáticas, Santiago, Chile, 2019.
- 395 DGA – Dirección General de Aguas: Homologación del cálculo hidrológico para la estimación de la oferta natural de agua histórica y futura en Chile, SIT N° 524, Ministerio de Obras Públicas, Dirección General de Aguas, División de Estudios y Planificación, elaborado por Universidad de Chile, Facultad de Ciencias Físicas y Matemáticas, Santiago, Chile, 2022.
- 400 DGA – Dirección General de Aguas: Inventario Público de Glaciares (IPG2022), Ministerio de Obras Públicas, Dirección General de Aguas, available at: <https://dga.mop.gob.cl/inventario-publico-de-glaciares-actualizacion-2022>, last access: [fecha de acceso], 2022b.
- Dinamarca, D. I., Galleguillos, M., Seguel, O., et al.: CLSoilMaps: A national soil gridded database of physical and hydraulic soil properties for Chile, *Sci. Data*, 10, 630, <https://doi.org/10.1038/s41597-023-02536-x>, 2023.
- 1405 Drenkhan, F., Buytaert, W., Mackay, J. D., Barrand, N. E., Hannah, D. M., and Huggel, C.: Looking beyond glaciers to understand mountain water security, *Nat. Sustain.*, 6, 130–138, <https://doi.org/10.1038/s41893-022-01093-1>, 2023.
- Duran-Llacer, I., Munizaga, J., Arumí, J. L., Ruybal, C., Aguayo, M., Sáez-Carrillo, K., Arriagada, L., and Rojas, O.: Lessons to be learned: Groundwater depletion in Chile's liguá and petorca watersheds through an interdisciplinary approach, *Water (Switzerland)*, 12, 2446, <https://doi.org/10.3390/w12092446>, 2020.
- 1410 Espinoza, J. C., Garreaud, R., Poveda, G., Arias, P. A., Molina-Carpio, J., Masiokas, M., Viale, M., and Scaff, L.: Hydroclimate of the Andes Part I: Main climatic features, *Front. Earth Sci.*, <https://doi.org/10.3389/feart.2020.00064>, 2020.
- Eyring, V., Bony, S., Meehl, G. A., Senior, C. A., Stevens, B., Stouffer, R. J., and Taylor, K. E.: Overview of the Coupled Model Intercomparison Project Phase 6 (CMIP6) experimental design and organization, *Geosci. Model Dev.*, 9, 1937–1958, <https://doi.org/10.5194/gmd-9-1937-2016>, 2016.
- 1415

Formatted: Spanish

Deleted: Danús, S.: Comportamiento del modelo WEAP en la cuenca alta del río Cachapoal, Chile, usando forzantes meteorológicas distribuidas, Universidad de Chile, Santiago, 2018.†

Formatted: Spanish

Deleted: Döscher, R., Acosta, M., Alessandri, A., Anthoni, P., Armeth, A., Arsouze, T., Bergman, T., Bernadello, R., Boussetta, S., Caron, L. P., Cionni, I., Ducharme, A., Elliott, J., Ilyina, T., Jafarov, E., Juricke, S., Karami, M. P., Keskinen, J. P., Koenigk, T., Koirala, S., Krinner, G., Kummerow, M., Lehner, F., Lehtonen, I., Lovato, T., Mattei, D., Melia, N., Niemelä, S., Nummelin, A., Olesen, M., Pemberton, P., Rummukainen, M., Sathyendranath, S., Schurgers, G., Scin, D., Svensson, G., Tedesco, L., Thiebtemont, R., Wang, Q., Weitzel, N., and Zhang, Z.: The EC-Earth3 Earth system model for the Climate Model Intercomparison Project 6, **Geosci. Model Dev.**, 14, 3431–3472, <https://doi.org/10.5194/gmd-14-3431-2021>, 2021.†

Drenkhan, F., Buytaert, W., Mackay, J. D., Barrand, N. E., Hannah, D. M., & Huggel, C. (2023). Looking beyond glaciers to understand mountain water security. *Nature Sustainability*, 6(2), 130–138.

Deleted: Dunne, J. P., Krasting, J. P., Adcroft, A. J., Bushuk, M., Cooke, W., Dunne, K. A., Griffies, S. M., Hallberg, R. W., Harrison, M. J., John, J. G., Malyshev, S. L., McHugh, C., Nazarenko, L., Sentman, L. T., Stouffer, R. J., and Wittenberg, A. T.: The GFDL Earth System Model version 4.1 (GFDL-ESM4.1): Model description and simulation characteristics, **J. Adv. Model. Earth Syst.**, 12, e2019MS002015, <https://doi.org/10.1029/2019MS002015>, 2020.†

- 1440 Falkenmark, M. and Lundqvist, J.: Towards water security: political determination and human adaptation crucial, Nat. Resour. Forum, 22, 37–51, <https://doi.org/10.1111/j.1477-8947.1998.tb00708.x>, 1998.
- [Falkenmark, M., Bertell, A., Jägerskog, A., Lundqvist, J., Matz, M., and Tropp, H.: On the verge of a new water scarcity: a call for good governance and human ingenuity, SIWI Policy Brief, Stockholm International Water Institute, 2007.](#)
- 1445 Fan, J. L., McConkey, B., and Wang, H.: Root distribution by depth for temperate agricultural crops, Field Crops Res., 189, 68–74, <https://doi.org/10.1016/j.fcr.2016.02.013>, 2016.
- Fan, Y., Miguez-Macho, G., Jobbágy, E. G., Jackson, R. B., and Otero-Casal, C.: Hydrologic regulation of plant rooting depth, Proc. Natl. Acad. Sci. U.S.A., 114, 10572–10577, <https://doi.org/10.1073/pnas.1712381114>, 2017.
- [FAO – Food and Agriculture Organization of the United Nations: AQUASTAT – FAO’s Global Information System on Water and Agriculture, available at: <https://www.fao.org/aquastat/en/>, last access: date, 2021.](#)
- 1450 Farley, K. A., Jobbágy, E. G., and Jackson, R. B.: Effects of afforestation on water yield: a global synthesis with implications for policy, Glob. Change Biol., 11, 1565–1576, <https://doi.org/10.1111/j.1365-2486.2005.01011.x>, 2005.
- Finch, J. W. and Hall, R. L.: Estimation of open water evaporation – a review of methods, R&D Technical Report W6-043/TR, Environment Agency, Bristol, UK, available at: https://www.gov.uk/government/uploads/system/uploads/attachment_data/file/290578/sw6-043-tr-e-e.pdf, 2001.
- 1455 Fundación Chile: Radiografía del Agua: Brecha y Riesgo Hídrico en Chile, available at: <https://escenarioshidricos.cl/publicacion/radiografia-del-agua-brecha-y-riesgo-hidrico-en-chile>, 2018.
- Gain, A. K., Giupponi, C., and Wada, Y.: Measuring global water security towards sustainable development goals, Environmental Research Letters, 11, <https://doi.org/10.1088/1748-9326/11/12/124015>, 2016.
- 1460 Galleguillos, M., Gimeno, F., Puelma, C., Zambrano-Bigiarini, M., Lara, A., and Rojas, M.: Disentangling the effect of future land use strategies and climate change on streamflow in a Mediterranean catchment dominated by tree plantations, J Hydrol (Amst), 595, <https://doi.org/10.1016/j.jhydrol.2021.126047>, 2021.
- [Galleguillos, M., Ceballos-Comisso, A., Gimeno, F., and Zambrano-Bigiarini, M.: CLDynamicLandCover-beta \(beta\) \[data set\], Zenodo, <https://doi.org/10.5281/zenodo.12686927>, 2024.](#)
- 1465 Garreaud, R., Alvarez-Garretón, C., Barichivich, J., Boisier, J. P., Christie, D., Galleguillos, M., LeQuesne, C., McPhee, J., and Zambrano-Bigiarini, M.: The 2010–2015 mega drought in Central Chile: Impacts on regional hydroclimate and vegetation, Hydrol Earth Syst Sci, 21, 6307–6327, <https://doi.org/10.5194/hess-21-6307-2017>, 2017.
- Garreaud, R. D., Boisier, J. P., Rondanelli, R., Montecinos, A., Sepúlveda, H. H., and Veloso-Aguila, D.: The Central Chile Mega Drought (2010–2018): A climate dynamics perspective, International Journal of Climatology, 40, 421–439, <https://doi.org/10.1002/joc.6219>, 2019.
- 1470 Gateño, F., Mendoza, P. A., Vásquez, N., Lagos-Zúñiga, M., Jiménez, H., Jerez, C., Vargas, X., Rubio-Álvarez, E., and Montserrat, S.: Screening CMIP6 models for Chile based on past performance and code genealogy, Clim Change, 177, <https://doi.org/10.1007/s10584-024-03742-1>, 2024.
- [Gómez, G., Álvez, A., Castillo, R., Urrea, J., Díaz, L., González-Saldía, R., and Vidal, G.: Contaminación fecal en el borde costero del país, Serie Comunicacional CRHIAM, Centro de Recursos Hídricos para la Agricultura y la Minería](#)

Formatted: Font: 10 pt, Font color: Black

Deleted: Falkenmark, M.: Adapting to climate change: towards societal water security in dry-climate countries, Int. J. Water Resour. Dev., 29, 123–136, 2013a. [Falkenmark, M.: Growing water scarcity in agriculture: future challenge to global water security, Philos. Trans. R. Soc. A Math. Phys. Eng. Sci., 371, 20120410, 2013b.](#)

Deleted: FAO: El estado de los recursos de tierras y aguas del mundo para la alimentación y la agricultura - Sistemas al límite, Informe de síntesis 2021, Roma, <https://doi.org/10.4060/cb7654es>, 2021.

Formatted: Spanish

Formatted: Spanish

Formatted: Spanish

- 485 (ANID/FONDAP/1523A0001), ISSN 0718-6460, ISSN 0719-3009, available at:
<https://www.crham.cl/publicaciones/seriescomunicacionales/>, 2025.
- Gonzalez, M. E., Gómez-González, S., Lara, A., Garreaud, R., and Díaz-Hormazábal, I.: The 2010 – 2015 Megadrought and its influence on the fire regime in central and south-central Chile, *Ecosphere*, 9, 1–17, <https://doi.org/10.1002/ecs2.2300>, 2018.
- 1490 Grafton, R. Q., Williams, J., Perry, C. J., Molle, F., Ringler, C., Steduto, P., Allen, R. G., et al.: The paradox of irrigation efficiency, *Science*, 361, 748–750, <https://doi.org/10.1126/science.aat9314>, 2018.
- Hargreaves, G. H. and Samani, Z. A.: Reference crop evapotranspiration from temperature, *Appl. Eng. Agric.*, 1, 96–99, 1985.
- Hawkins, E. and Sutton, R.: The potential to narrow uncertainty in regional climate predictions, *Bull. Am. Meteorol. Soc.*, 90, 1095–1108, <https://doi.org/10.1175/2009BAMS2607.1>, 2009.
- 1495 Hersbach, H., Bell, B., Berrisford, P., Hirahara, S., Horányi, A., Muñoz-Sabater, J., Nicolas, J., and Thépaut, J.-N.: The ERA5 global reanalysis, *Q. J. Roy. Meteorol. Soc.*, 146, 1999–2049, <https://doi.org/10.1002/qj.3803>, 2020.
- Hoekstra, A. Y., Chapagain, A. K., Aldaya, M. M., and Mekonnen, M. M.: *The Water Footprint Assessment Manual: Setting the Global Standard*, Earthscan, London, UK and Washington, DC, 2011.
- Hulley, G., and Hook, S.: MODIS/Terra Land Surface Temperature/3-Band Emissivity Daily L3 Global 0.05Deg CMG V061, 2021, distributed by NASA EOSDIS Land Processes DAAC, <https://doi.org/10.5067/MODIS/MOD21C1.061>, 2021.
- 500 IPCC: Summary for Policymakers [H.-O. Pörtner, D.C. Roberts, E.S. Poloczanska, K. Mintenbeck, M. Tignor, A. Alegría, M. Craig, S. Langsdorf, S. Löschke, V. Möller, A. Okem (eds.)], in: *Climate Change 2022: Impacts, Adaptation and Vulnerability. Contribution of Working Group II to the Sixth Assessment Report of the Intergovernmental Panel on Climate Change*, edited by: Pörtner, H.-O., Roberts, D. C., Tignor, M., Poloczanska, E. S., Mintenbeck, K., Alegría, A., Craig, M., Langsdorf, S., Löschke, S., Möller, V., Okem, A., and Rama, B., Cambridge University Press, Cambridge, UK and New York, NY, USA, 3–33, <https://doi.org/doi:10.1017/9781009325844.001>, 2022.
- 1505 Jódar, J., Urrutia, J., Herrera, C., Custodio, E., Martos-Rosillo, S., and Lambán, L. J.: The catastrophic effects of groundwater intensive exploitation and Megadrought on aquifers in Central Chile: Global change impact projections in water resources based on groundwater balance modeling, *Science of The Total Environment*, 914, 169651, <https://doi.org/10.1016/j.scitotenv.2023.169651>, 2023.
- 1510 Krinner, G., Viovy, N., de Noblet-Ducoudré, N., Ogée, J., Polcher, J., Friedlingstein, P., Ciais, P., Sitch, S., and Prentice, I. C.: A dynamic global vegetation model for studies of the coupled atmosphere-biosphere system, *Glob. Biogeochem. Cycles*, 19, GB1015, <https://doi.org/10.1029/2003GB002199>, 2005.
- 515 Kuzma, S., Bierkens, M. F. P., Lakshman, S., Luo, T., Saccoccia, L., Sutanudjaja, E. H., and Van Beek, R.: *Aqueduct 4.0: Updated decision-relevant global water risk indicators*, Tech. Note, World Resources Institute, Washington, DC, <https://doi.org/10.46830/writn.23.00061>, 2023.
- Liu, J., Yang, H., Gosling, S. N., Kummu, M., Flörke, M., Pfister, S., Hanasaki, N., Wada, Y., Zhang, X., Zheng, C., Alcamo, J., and Oki, T.: Water scarcity assessments in the past, present, and future, *Earth's Future*, 5, 545–559, <https://doi.org/10.1002/2016EF000518>, 2017a.

Deleted: Hardy, L. and Garrido, A.: *Análisis y evaluación de las relaciones entre el agua y la energía en España*, Fundación Botín, available at: <https://crcc.es/wp-content/uploads/2012/02/Hardy-y-Garrido.-2010Análisis-de-lar-relación-agua-energía.pdf>, last access: [fecha de acceso], 2010.†

Deleted: INE. (1959). III Censo Nacional Agrícola Ganadero (1955)—Resumen General del País. Instituto Nacional de Estadísticas.†
 (censo 1960). Instituto Nacional de Estadísticas.
<https://www.memoriachilena.gob.cl/602/w3-article-86206.html>†
 INE. (1969). IV Censo Nacional Agropecuario (1975—1976)—Resumen General del País. Instituto Nacional de Estadísticas.†
 INE. (1983). V Censo Nacional Agropecuario (1975—1976)—Total País. Instituto Nacional de Estadísticas.†
 INE. (1988). XV Censo Nacional de Población y IV de Vivienda (1982). Instituto Nacional de Estadísticas.
<https://www.memoriachilena.gob.cl/602/w3-article-86208.html>†
 INE. (1993). Censos de 1970-1982: Cifras comparativas. Instituto Nacional de Estadísticas.
<https://www.memoriachilena.gob.cl/602/w3-article-86207.html>†
 INE. (1998). VI Censo Nacional Agropecuario (1997). Instituto Nacional de Estadísticas.†
 INE. (2008). VII Censo Nacional Agropecuario y Forestal (2007)—Informe Metodológico. Instituto Nacional de Estadísticas.†
 INE. (2018a). Resultados Censo de Población y Vivienda 1992. https://redatam-ine.ine.cl/redbin/RpWebEngine.exe/Portal?BASE=CENSO_1992&lang=esp†
 INE. (2018b). Resultados Censo de Población y Vivienda 2002. https://redatam-ine.ine.cl/redbin/RpWebEngine.exe/Portal?BASE=CENSO_2002&lang=esp†
 INE. (2018c). Resultados Censo de Población y Vivienda 2017. https://redatam-ine.ine.cl/redbin/RpWebEngine.exe/Portal?BASE=CENSO_2017&lang=esp†
 INE-CELADE. (1972). Chile. XI Censo de población (1940). Recopilación de cifras publicadas por la Dirección de Estadísticas y Censos. Instituto Nacional de Estadísticas.
<https://repositorio.cepal.org/handle/11362/8021>†

Deleted: Lee, W.-L., Wang, Y.-C., Shiu, C.-J., Tsai, I., Tu, C.-Y., Lan, Y.-Y., Chen, J.-P., Pan, H.-L., and Hsu, H.-H.: Taiwan Earth System Model Version 1: description and evaluation of mean state, *Geosci. Model Dev.*, 13, 3887–3904, <https://doi.org/10.5194/gmd-13-3887-2020>, 2020.†
 Li, L., Huang, Z., Hu, Z., Zhang, F., Han, X., Jiang, Z., Jin, J., Li, J., Liang, X., Liu, H., Liu, L., Liu, N., Peng, S., Wang, J., Wang, W., Yang, Z., Zhang, G., Zhang, H., and Zhou, W.: Evaluation of grid-point atmospheric model of IAP LASG version 3 (GAMIL3), *J. Adv. Model. Earth Syst.*, 12, e2019MS002012, <https://doi.org/10.1029/2019MS002012>, 2020.†

- 1570 [Liu, C., Sun, G., McNulty, S. G., Noormets, A., and Fang, Y.: Environmental controls on seasonal ecosystem evapotranspiration/potential evapotranspiration ratio as determined by the global eddy flux measurements, *Hydrol. Earth Syst. Sci.*, 21, 311–322, <https://doi.org/10.5194/hess-21-311-2017>, 2017b.](#)
- [Liu, W., Liu, X., Yang, H., Ciais, P., and Wada, Y.: Global water scarcity assessment incorporating green water in crop production, *Water Resour. Res.*, 58, e2020WR028570, <https://doi.org/10.1029/2020WR028570>, 2022.](#)
- 1575 Martin, P. H.: “If you don’t know how to fix it, please stop breaking it!” The precautionary principle and climate change, *Found. Sci.*, 2, 263–292, 1997.
- McJannet, D. L., Webster, I. T., and Cook, F. J.: An area-dependent wind function for estimating open water evaporation using land-based meteorological data, *Environ. Modell. Softw.*, 31, 76–83, <https://doi.org/10.1016/j.envsoft.2011.11.017>, 2012.
- Meza, F. J., Vicuña, S., Jelinek, M., Bustos, E., and Bonelli, S.: Assessing water demands and coverage sensitivity to climate change in the urban and rural sectors in central Chile, *Journal of Water and Climate Change*, 5, 192–203, <https://doi.org/10.2166/wcc.2014.019>, 2014.
- 1580 [MMA – Ministerio del Medio Ambiente: Inventario Nacional de Humedales, available at: <https://humedaleschile.mma.gob.cl/inventario-humadales/>, 2020.](#)
- MMA – Ministerio del Medio Ambiente: Ley 21.455: Ley Marco de Cambio Climático, Ministerio del Medio Ambiente, Santiago, Chile, available at: <https://bcn.cl/3211s>, last access: [fecha de acceso], 2022.
- 1585 [MOP – Ministerio de Obras Públicas: Ley 21.075: Regula la recolección, reutilización y disposición de aguas grises, Ministry of Public Works, Santiago, Chile, available at: <https://bcn.cl/G77KeN>, last access: \[fecha de acceso\], 2023.](#)
- MOP and DGA – Ministerio de Obras Públicas y Dirección General de Aguas: Resolución 1588 Exenta: Aprueba el anteproyecto del Plan Sectorial de Adaptación al Cambio Climático de Recursos Hídricos, available at: <https://bcn.cl/3nbfm>, last access: [fecha de acceso], 2024.
- 1590 [Munia, H., Guillaume, J. H. A., Mirumachi, N., Porkka, M., Wada, Y., and Kumm, M.: Water stress in global transboundary river basins: significance of upstream water use on downstream stress, *Environ. Res. Lett.*, 11, 014002, <https://doi.org/10.1088/1748-9326/11/1/014002>, 2016.](#)
- Muñoz, A. A., Klock-Barría, K., Alvarez-Garretón, C., Aguilera-Betti, I., González-Reyes, Á., Lastra, J. A., Chávez, R. O., Barria, P., Christie, D., Rojas-Badilla, M., and Lequesne, C.: Water crisis in petorca basin, Chile: The combined effects of a mega-drought and water management, *Water (Basel)*, 12, 1–17, <https://doi.org/10.3390/w12030648>, 2020.
- 1595 Muñoz, R. C., Falvey, M. J., Arancibia, M., Astudillo, V. I., Elgueta, J., Ibarra, M., Santana, C., and Vásquez, C.: Wind Energy Exploration over the Atacama Desert: A Numerical Model–Guided Observational Program, *Bull. Amer. Meteor. Soc.*, 99, 2079–2092, <https://doi.org/10.1175/BAMS-D-17-0019.1>, 2018.
- 1600 Muñoz-Sabater, J., Dutra, E., Agustí-Panareda, A., Albergel, C., Arduini, G., Balsamo, G., Boussetta, S., Choulga, M., Harrigan, S., Hersbach, H., Martens, B., Miralles, D. G., Piles, M., Rodríguez-Fernández, N. J., Zsoter, E., Buontempo, C., and Thépaut, J.-N.: ERA5-Land: a state-of-the-art global reanalysis dataset for land applications, *Earth Syst. Sci. Data*, 13, 4349–4383, <https://doi.org/10.5194/essd-13-4349-2021>, 2021.

Formatted: Spanish

- 1605 Nelson, J. A., Pérez-Priego, O., Zhou, S., Poyatos, R., Zhang, Y., Blanken, P. D., Gimeno, T. E., Wohlfahrt, G., Desai, A. R., Gioli, B., Limousin, J.-M., Bonal, D., Paul-Limoges, E., Scott, R. L., Varlagin, A., Fuchs, K., Montagnani, L., Wolf, S., Delpierre, N., Berveiller, D., Gharun, M., Beilelli Marchesini, L., Gianelle, D., Šigut, L., Mammarella, I., Siebicke, L., Black, T. A., Knohl, A., Hörtnagl, L., Magliulo, V., Besnard, S., Weber, U., Carvalhais, N., Migliavacca, M., Reichstein, M., and Jung, M.: Ecosystem transpiration and evaporation: Insights from three water flux partitioning methods across FLUXNET sites, *Glob. Change Biol.*, 27, 401–425, <https://doi.org/10.1111/gcb.15314>, 2020.
- 1610 ODEPA: Catastro Vitícola Nacional del Servicio Agrícola y Ganadero (SAG), Ministerio de Agricultura, available at: <https://www.odepa.gob.cl/rubro/vinos/catastro-viticola-nacional>, 2023a.
- ODEPA: Estadísticas Productivas > Estadísticas de Cultivos de la Oficina de Estudios y Políticas Agrarias (ODEPA), Ministerio de Agricultura, available at: <https://www.odepa.gob.cl/estadisticas-del-sector/estadisticas-productivas>, 2023b.
- 1615 Oki, T. and Kanae, S.: Global hydrological cycles and world water resources, *Science*, 313, 1068–1072, <https://doi.org/10.1126/science.1128845>, 2006.
- O'Neill, B. C., Tebaldi, C., van Vuuren, D. P., Eyring, V., Friedlingstein, P., Hurtt, G., Knutti, R., Kriegler, E., Lamarque, J.-F., Lowe, J., Meehl, G. A., Moss, R., Riahi, K., and Sanderson, B. M.: The Scenario Model Intercomparison Project (ScenarioMIP) for CMIP6, *Geosci. Model Dev.*, 9, 3461–3482, <https://doi.org/10.5194/gmd-9-3461-2016>, 2016.
- 1620 [Pastor, A. V., Ludwig, F., Biemans, H., Hoff, H., and Kabat, P.: Accounting for environmental flow requirements in global water assessments, *Hydrol. Earth Syst. Sci.*, 18, 5041–5059, <https://doi.org/10.5194/hess-18-5041-2014>, 2014.](#)
- Penman, H. L.: Natural evaporation from open water, bare soil and grass, *Proc. R. Soc. Lond. A*, 193, 120–145, <https://doi.org/10.1098/rspa.1948.0037>, 1948.
- Pizarro, E., Galleguillos, M., Barriá, P., and Callejas, R.: Irrigation management or climate change? Which is more important to cope with water shortage in the production of table grape in a Mediterranean context, *Agric. Water Manage.*, 263, 107467, <https://doi.org/10.1016/j.agwat.2022.107467>, 2022.
- 1625 [Prosser, I. P. and Walker, G. R.: A review of plantations as a water intercepting land use in South Australia, CSIRO: Water for a Healthy Country National Research Flagship, Canberra, Australia, 2009.](#)
- [Rijsberman, F. R.: Water scarcity: fact or fiction?, *Agric. Water Manage.*, 80, 5–22, <https://doi.org/10.1016/j.agwat.2005.07.001>, 2006.](#)
- 1630 Rivera, D., Godoy-Faundez, A., Lillo, M., Alvez, A., Delgado, V., Gonzalo-Martin, C., Menasalvas, E., Costumero, R., and García-Pedrero, Á.: Legal disputes as a proxy for regional conflicts over water rights in Chile, *J. Hydrol.*, 535, 36–45, <https://doi.org/10.1016/j.jhydrol.2016.01.057>, 2016.
- Rockström, J., Karlberg, L., Wani, S. P., Barron, J., Hatibu, N., Oweis, T., Bruggeman, A., Farahani, J., and Qiang, Z.: Managing water in rainfed agriculture—The need for a paradigm shift, *Agric. Water Manage.*, 97, 543–550, <https://doi.org/10.1016/j.agwat.2009.09.009>, 2010.
- 1635 [Ruiz Pereira, S. F. and Veettil, B. K.: Glacier decline in the Central Andes \(33°S\): Context and magnitude from satellite and historical data, *J South Am Earth Sci*, 94, <https://doi.org/10.1016/j.jsames.2019.102249>, 2019.](#)

Formatted: Spanish

Deleted: Rockström, J., Falkenmark, M., Allan, T., Folke, C., Gordon, L., Jägerskog, A., ... & Varis, O. (2014). The unfolding water drama in the Anthropocene: towards a resilience-based perspective on water for global sustainability. *Ecohydrology*, 7(5), 1249-1261.

- Samani, Z.: Estimating solar radiation and evapotranspiration using minimum climatological data, *J. Irrig. Drain. Eng.*, 126, 265–267, [https://doi.org/10.1061/\(ASCE\)0733-9437\(2000\)126:4\(265\)](https://doi.org/10.1061/(ASCE)0733-9437(2000)126:4(265)), 2000.
- 645 Sepúlveda, U. M., Mendoza, P. A., Mizukami, N., and Newman, A. J.: Revisiting parameter sensitivities in the variable infiltration capacity model across a hydroclimatic gradient, *Hydrol Earth Syst Sci*, 26, 3419–3445, <https://doi.org/10.5194/hess-26-3419-2022>, 2022.
- Schenk, H. J., and Jackson, R. B.: The global biogeography of roots, *Ecol. Monogr.*, 72, 311–328, [https://doi.org/10.1890/0012-9615\(2002\)072\[0311:TGBOR\]2.0.CO;2](https://doi.org/10.1890/0012-9615(2002)072[0311:TGBOR]2.0.CO;2), 2002.
- 1650 Schlesinger, W. H., and Jasechko, S.: Transpiration in the global water cycle, *Agric. For. Meteorol.*, 189–190, 115–117, <https://doi.org/10.1016/j.agrformet.2014.01.011>, 2014.
- Singer, M. B., Asfaw, D. T., Rosolem, R., Cuthbert, M. O., Miralles, D. G., MacLeod, D., Quichimbo, E. A., and Michaelides, K.: Hourly potential evapotranspiration at 0.1° resolution for the global land surface from 1981-present, *Sci. Data*, <https://doi.org/10.1038/s41597-021-01003-9>, 2021.
- 655 Smets, B., Jacobs, T., and Verger, A.: GIO Global Land Component - Lot I "Operation of the Global Land Component" - Product User Manual, 2018, available at: <https://land.copernicus.eu/en/products/vegetation/leaf-area-index-300m-v1.0>.
- Stehr, A. and Aguayo, M.: Snow cover dynamics in Andean watersheds of Chile (32.0–39.5° S) during the years 2000–2016, *Hydrol. Earth Syst. Sci.*, 21, 5111–5126, <https://doi.org/10.5194/hess-21-5111-2017>, 2017.
- Taucare, M., Viguier, B., Figueroa, R., and Daniele, L.: The alarming state of Central Chile's groundwater resources: A paradigmatic case of a lasting overexploitation, *Science of the Total Environment*, 906, 167723, <https://doi.org/10.1016/j.scitotenv.2023.167723>, 2024.
- Tumber-Dávila, S. J., Schenk, H. J., Du, E., and Jackson, R. B.: Plant sizes and shapes above and belowground and their interactions with climate, *New Phytol.*, 235, 1032–1056, <https://doi.org/10.1111/nph.18106>, 2022.
- UNESCO and UNESCO i-WSSM: Water Security and the Sustainable Development Goals (Series I), Global Water Security Issues (GWSI) Series, UNESCO Publishing, Paris, 2019.
- 665 UN – United Nations: Comprehensive Assessment of the Freshwater Resources of the World: Report of the Secretary-General, E/CN.17/1997/9, Commission on Sustainable Development, Fifth Session, 5–25 April 1997, United Nations, New York, 1997.
- Valdés-Pineda, R., García-Chevesich, P. A., Alaniz, A. J., Venegas-Quinonez, H., Valdés, J. B., and Pizarro, R.: The impact of a lack of government strategies for sustainable water management and land use planning on the hydrology of water bodies: Lessons learned from the disappearance of the Aculeo Lagoon in Central Chile, *Sustainability*, 14, 413, <https://doi.org/10.3390/su14010413>, 2022.
- van Dijk, A. I. J. M., and Bruijnzeel, L. A.: Modelling rainfall interception by vegetation of variable density using an adapted analytical model. Part 1. Model description, *J. Hydrol.*, 247, 230–238, [https://doi.org/10.1016/S0022-1694\(01\)00392-4](https://doi.org/10.1016/S0022-1694(01)00392-4), 2001.
- Vicuña, S., Garreaud, R. D., and McPhee, J.: Climate change impacts on the hydrology of a snowmelt-driven basin in semiarid Chile, *Clim. Change*, 105, 469–488, 2011.
- 675 Vicuña, S., Daniele, L., Fariás, L., González, H., Marquet, P. A., Palma-Behnke, R., Stehr, A., Urquiza, A., Wagemann, E., Arenas-Herrera, M. J., Bórquez, R., Cornejo-Ponce, L., Delgado, V., Etcheberry, G., Frangkou, M. C., Fuster, R., Gelcich, S.,

Deleted: Sanhueza, P.: Determinación de caudales de diseño en cuencas nivo-pluvial de Chile Central en régimen natural, Universidad de Chile, Santiago, 1–71 pp., 2020. [4](#)

Séférian, R., Nabat, P., Michou, M., Saint-Martin, D., Voldoire, A., Colin, J., Decarme, B., Delire, C., Berthet, S., Chevallier, M., Guérémy, J. F., Paul, J. D., Roehrig, R., Salas y Méla, D., Sanchez-Gomez, E., Terray, L., Valcke, S., Beau, I., Bélamari, S., Alias, A., Chevallier, M., and Ribes, A.: Evaluation of CNRM Earth-System Model CNRM-ESM2-1: Role of Earth system processes in present-day and future climate, **J. Adv. Model. Earth Syst.**, 11, 3504–3532, <https://doi.org/10.1029/2019MS001791>, 2019. [4](#)

Seland, Ø., Bentsen, M., Oliivié, D. J. L., Toniazzo, T., Gjermundsen, A., Graff, L. S., Iversen, T., Kirkevåg, A., Seland, Ø., Bentsen, M., Oliivié, D. J. L., and Toniazzo, T.: Description and evaluation of NorESM2–CMIP6 models, **Geosci. Model Dev.**, 13, 6165–6200, <https://doi.org/10.5194/gmd-13-6165-2020>, 2020. [4](#)

Sellar, A. A., Jones, C. G., Mulcahy, J. P., Tang, Y., Yool, A., Wiltshire, A., O'Connor, F. M., Stringer, M., Hill, R., Morgenstern, O., Andrews, M. B., Bozzo, A., Butchart, N., Ciais, P., Dalvi, M., Griffiths, P. T., Halloran, P. R., Harding, R., Johnson, C. E., Kuhlbrodt, T., Manners, J., Milroy, S. P., Moore, R., Rumbold, H., Sellar, A. A., Jones, C. G., Mulcahy, J. P., Tang, Y., and Yool, A.: UKESM1: Description and evaluation of the UK Earth System Model, **J. Adv. Model. Earth Syst.**, 11, 4513–4558, <https://doi.org/10.1029/2019MS001739>, 2019. [4](#)

Deleted: SISS. (2020a). SIFAC II: Consumos y Clientes Mensuales 2012–2019 (non-public data requested by Law 20.285 of the Republic of Chile). Superintendencia de Servicios Sanitarios. <https://www.siss.gob.cl/586/w3-article-7247.html>

SISS. (2020b). SIFAC II: Niveles y Producción de Agua (non-public data requested by Law 20.285 of the Republic of Chile). Superintendencia de Servicios Sanitarios. <https://www.siss.gob.cl/586/w3-article-7247.html>

SMA. (2021). Datos abiertos: Descargas de RILES (D.S. 90/2000 y D.S. 46/2002) (Sistema Nacional de Fiscalización Ambiental). Superintendencia del Medio Ambiente. <https://snifa.sma.gob.cl/DatosAbiertos/>

Deleted: Solís, G.: Evaluación de impactos de cambios de forzantes meteorológicas en simulaciones hidrológicas en cuencas del río Maule, Universidad de Chile, Santiago, 1–125 pp., 2022. [4](#)

Statistics Canada. (2011). Industrial Water Use. Minister of Industry (Canada). <https://www150.statcan.gc.ca/n1/pub/16-401-x/16-401-x2014001-eng.pdf>

Deleted: Swart, N. C., Cole, J. N. S., Kharin, V. V., Lazare, M., Scinocca, J. F., Gillett, N. P., Anstey, J., Arora, V. K., Christian, J. R., Hanna, S., Jiao, Y., Lee, W. G., Majaess, F., Saenko, O. A., Seiler, C., Shao, A., Solheim, L., and von Salzen, K.: The Canadian Earth System Model version 5 (CanESM5.0.3), **Geosci. Model Dev.**, 12, 4823–4873, <https://doi.org/10.5194/gmd-12-4823-2019>, 2019. [4](#)

H., and Tanaka, Y.: Description and basic evaluation of simulated mean state, internal variability, and climate sensitivity in MIROC6, **Geosci. Model Dev.**, 12, 2727–2765, <https://doi.org/10.5194/gmd-12-2727-2019>, 2019. [4](#)

Formatted: Spanish

- Melo, O., Monsalve, T., and Winckler, P.: Desalinización: Oportunidades y desafíos para abordar la inseguridad hídrica en Chile, Comité Asesor Ministerial Científico sobre Cambio Climático; Ministerio de Ciencia, Tecnología, Conocimiento e Innovación, 2022.
- 1735 Villalobos, P., Rojas, A., and Leporati, M.: Chile potencia alimentaria: compromiso con la nutrición y la salud de la población, *Rev. Chil. Nutr.*, 33(1), 232–237, <https://doi.org/10.4067/S0717-75182006000300004>, 2006.
- Villamayor, J., Khodri, M., Villalba, R., et al.: Causes of the long-term variability of southwestern South America precipitation in the IPSL-CM6A-LR model, *Clim. Dyn.*, 57, 2391–2414, <https://doi.org/10.1007/s00382-021-05811-y>, 2021.
- 1740 Vörösmarty, C. J., Green, P., Salisbury, J., and Lammers, R. B.: Global water resources: Vulnerability from climate change and population growth, *Science*, 289, 284–288, <https://doi.org/10.1126/science.289.5477.284>, 2000.
- Wada, Y. and Bierkens, M. F. P.: Sustainability of global water use: Past reconstruction and future projections, *Environmental Research Letters*, 9, <https://doi.org/10.1088/1748-9326/9/10/104003>, 2014.
- Wada, Y., Van Beek, L. P. H., and Bierkens, M. F. P.: Modelling global water stress of the recent past: On the relative importance of trends in water demand and climate variability, *Hydrol. Earth Syst. Sci.*, 15, 3785–3808, <https://doi.org/10.5194/hess-15-3785-2011>, 2011.
- 1745 White, D. A., Ren, S., Mendham, D. S., Balocchi-Contreras, F., Silberstein, R. P., Meason, D., Iroumé, A., and Ramirez de Arellano, P.: Is the reputation of Eucalyptus plantations for using more water than Pinus plantations justified?, *Hydrol. Earth Syst. Sci.*, 26, 5357–5371, <https://doi.org/10.5194/hess-26-5357-2022>, 2022.
- 1750 Zhang, Y., and Schaap, M. G.: Weighted recalibration of the Rosetta pedotransfer model with improved estimates of hydraulic parameter distributions and summary statistics (Rosetta3), *J. Hydrol.*, 547, 39–53, <https://doi.org/10.1016/j.jhydrol.2017.01.004>, 2017.
- Zhao, Y., Feng, D., Yu, L., Wang, X., Chen, Y., Hernández, H. J., Galleguillos, M., Estades, C., Biging, G., Radke, J., and Gong, P.: Detailed dynamic land cover mapping of Chile: accuracy improvement by integrating multi-seasonal land cover data, *Remote Sens. Environ.*, 183, 170–185, <https://doi.org/10.1016/j.rse.2016.05.016>, 2016.
- 1755 Zhong, F., Jiang, S., van Dijk, A. I. J. M., Ren, L., Schellekens, J., and Miralles, D. G.: Revisiting large-scale interception patterns constrained by a synthesis of global experimental data, *Hydrol. Earth Syst. Sci.*, 26, 5647–5667, <https://doi.org/10.5194/hess-26-5647-2022>, 2022.

Deleted: Voldoire, A., Saint-Martin, D., Sénéci, S., Decharme, B., Alias, A., Chevallier, M., Colin, J., Guérémy, J. F., Michou, M., Moine, M. P., Nabat, P., Roehrig, R., Salas y Mélia, D., Séférian, R., and Tytca, S.: Evaluation of CMIP6 DECK experiments with CNRM-CM6-1, *J. Adv. Model. Earth Syst.*, 11, 1950–1987, <https://doi.org/10.1029/2019MS001682>, 2019.

Deleted: World Bank. (2021). GDP (current US\$)—Chile. <https://data.worldbank.org/indicator/NY.GDP.MKTP.CD?locations=CL>

J., Liu, Y., Zhang, L., Zhang, F., Wu, F., Zhang, Y., and Jie, W.: The Beijing Climate Center Climate System Model (BCC-CSM): The main progress from CMIP5 to CMIP6, *J. Adv. Model. Earth Syst.*, 11, 3705–3733, <https://doi.org/10.1029/2019MS001828>, 2019.

Yukimoto, S., Kawai, H., Koshiro, T., Oshima, N., Yoshida, K., Urakawa, S., Tsujino, H., Nakano, H., Takemura, T., Sudo, K., Nagashima, T., Suzuki, T., Nosaka, M., Komuro, Y., Mori, M., Ogura, T., Tatebe, H., and Tsujino, H.: The Meteorological Research Institute Earth System Model version 2.0, MRI-ESM2.0: Description and basic evaluation of the physical component, *J. Adv. Model. Earth Syst.*, 11, 3847–3883, <https://doi.org/10.1029/2019MS002010>, 2019.

Deleted: Ziehn, T., Law, R. M., Monselesan, D., Mackallah, C., Savio, A., Woodhouse, M., and Bodman, R.: The Australian Earth System Model ACCESS-ESM1.5: An update, *J. Adv. Model. Earth Syst.*, 12, e2019MS001959, <https://doi.org/10.1029/2019MS001959>, 2020.

Page 29: [1] Deleted	Juan Pablo Boisier (jboisier)	5/27/25 7:03:00 PM
-----------------------------	--------------------------------------	---------------------------

Page 37: [2] Deleted	Juan Pablo Boisier (jboisier)	5/28/25 11:24:00 AM
-----------------------------	--------------------------------------	----------------------------