

Measurement report: Insight into Greenhouse Gas Emission Characteristics of Light-Duty Vehicles in China Driven by Technological Innovation

Xinping Yang^{1,2}, Jia Ke^{1,2}, Zhihui Huang^{1,2}, Yi Wen³, Dailin Yin³, Zhen Jiang³, Zhigang Yue³, Yunjing Wang^{1,2,*}, Songdi Liao^{4,*}, Hang Yin^{1,2}, Yan Ding^{1,2,*}

¹State Environmental Protection Key Laboratory of Vehicle Emission Control and Simulation, Chinese Research Academy of Environmental Sciences, Beijing, 100012, China

²Vehicle Emission Control Center, Chinese Research Academy of Environmental Sciences, Beijing, 100012, China

³China Automotive Technology and Research Center (CATARC), Beijing, 100176, China

⁴College of Environment and Climate, Institute for Environmental and Climate Research, Jinan University, Guangzhou 511436, China

Correspondence to: Yunjing Wang (wangyunjing@vecc.org.cn), Songdi Liao (sdliao@jnu.edu.cn), and Yan Ding (dingyan@craes.org.cn).

Abstract. Greenhouse gas (GHG) emissions represent a pivotal driver of global climate change, with vehicular emissions, particularly from light-duty vehicles, emerging as a prominent source of GHGs. Despite extensive research on gaseous pollutants, studies on GHG emissions within the framework of carbon neutrality remain scarce. This study delves into the emission characteristics of three primary GHGs (carbon dioxide (CO₂), methane (CH₄), and nitrous oxide (N₂O)) from various light-duty vehicles, encompassing conventional gasoline and hybrid vehicles, and bi-fuel taxis. As anticipated, with advancements in emission standards and powertrains, vehicular GHG emissions have significantly decreased. However, our findings also revealed surprising trends. While engine technology upgrades reduced CO₂, they unexpectedly increased CH₄ and N₂O emissions. Additionally, hot starts, beneficial for reducing CO₂ and CH₄ emissions, caused heightened N₂O emissions, which is noteworthy under operating conditions with frequent start-stop events. Intriguingly, compressed natural gas (CNG), generally perceived as cleaner, increased CH₄ emissions. Regarding the impact of Three-Way Catalysts (TWC) on GHG emissions, under “TWC failed” conditions, N₂O emissions from CNG-powered vehicles were approximately three times higher than those under “TWC worked” conditions, attributed to the significant increase in NO_x. Considering the global warming potential (GWP), the “TWC failure” scenario paradoxically decreased GWP values, highlighting the complex interaction between emission control technologies and their environmental impacts. This study provides crucial insights into vehicular GHG emissions, which are essential for developing effective strategies aimed at mitigating emissions and enhancing the efficiency of emission control systems.



30 1 Introduction

As the issue of global climate change becomes increasingly prominent, reducing greenhouse gas (GHGs) emissions has emerged as a critical objective for environmental protection. In 2023, global energy-related carbon dioxide (CO₂) emissions grew by 1.1%, an increase of 410 million tonnes (Mt), reaching a new record high of 37.4 billion tonnes (Gt). This is in comparison to the rise of 490 Mt in 2022, which was a 1.3% increase (Iea, 2024). Transportation is a significant source of
35 GHG emissions, with the global transportation sector accounting for 23% of all energy-related CO₂ emissions (Liu et al., 2023). By the end of 2022, China's vehicle ownership had reached 319 million units (Ministry of Ecology and Environment, 2023). Due to the large population of vehicles, the road transportation sector's contribution to CO₂ emissions is significant. One research indicated that in 2019, China's vehicle CO₂ emissions were 952 million tonnes, with gasoline and other fuels (natural gas, alcohol fuels) comprising 47.5% of this figure (Zhihui et al., 2022). A recent study found that GHG emissions
40 rose from 431 million tons in 2005 to 807 million tons in 2015, with an annual growth rate of 6.5% (Li et al., 2019). Many researches showed that the transportation sector of China will not peak before 2030 due to huge increasing transport demand (Yuan et al., 2021; Jun-Ling Liu, 2018; Yin et al., 2015). Furthermore, road-based transport is the largest emission source in the transportation sector (Xue et al., 2019), accounting for 82.7% of total CO₂ emissions in the entire transportation sector in 2015 (Zhang et al., 2019); thus, road-based transport has a much larger CO₂ emission reduction potential compared to other
45 transport modes (Wang et al., 2017).

In addition to CO₂, vehicular activities are closely associated with the greenhouse gases methane (CH₄) and nitrous oxide (N₂O). The N₂O emissions are primarily produced by the combustion of nitrogenous compounds in fuel, while CH₄ is generated from incomplete combustion in natural gas vehicles or the thermal cracking of alkanes (such as n-alkanes) in gasoline at high temperatures. Although the emissions of N₂O and CH₄ from vehicles are 3 to 6 orders of magnitude smaller
50 than those of CO₂, their Global Warming Potential (GWP) is significantly higher. According to the IPCC (2014), the GWP of N₂O and CH₄ is 298 times and 25 times greater than that of CO₂, respectively (Ipcc, 2014). While the emissions of CH₄ from motor vehicles may be negligible on a global scale, in urban areas, particularly those with heavy traffic, CH₄ emissions can account for up to 30% of the regional CH₄ emissions (Nam et al., 2004). In northern China, where natural gas-powered vehicles are more common, cities need to consider the impact of fuel types and emission standards on N₂O and CH₄
55 emissions when developing carbon reduction plans for vehicles (Da et al., 2020). However, earlier studies have paid less attention to this aspect. Therefore, there is a need to strengthen comprehensive research on vehicular GHG emissions to further provide data and theoretical support for controlling greenhouse gas emissions. The Chinese government has promised to peak CO₂ around 2030 and strive to achieve it as soon as possible. The government has incorporated climate change into its ecological planning and built a low-carbon system of society and economy.

60 Currently, research on vehicular GHG emissions both domestically and internationally mainly employs three methods: chassis dynamometer testing, on-board testing, and model estimation. In recent years, a significant number of scholars have explored the emission characteristics of vehicular greenhouse gases. He et al. and Zhong et al. conducted tests on actual



vehicles under different operating conditions to obtain emission factors for CH₄ and N₂O (He et al., 2014; Zhong et al., 2023). Tang et al., Li et al., and Zeng et al. used computational models such as IVE, MOVES, and Gompertz to establish
65 greenhouse gas emission inventories for different base years (Tang et al., 2018; Li et al., 2022; Zeng et al., 2016). Zeng et al. also predicted future greenhouse gas emissions (Zeng et al., 2016). Wang et al. used the World Light Vehicle Test Cycle (WLTC) protocol to test the CO₂ emission characteristics of vehicles at different temperature points (Wang et al., 2022). International researchers have also conducted numerous studies: Clairotte et al. monitored the average emission factors of CH₄ and N₂O for light-duty vehicles from Euro 5b to Euro 6d, which were found to be 7 mg/km (Clairotte et al., 2020);
70 Sirithian et al. measured the average emission coefficients of CO₂ and CH₄ for light-duty vehicles in Thailand, which were 232.25 g/km and 9.50 mg/km, respectively (Sirithian et al., 2022); Selleri et al. used the WLTC and the Real Drive Emission (RDE) test procedures to test three types of plug-in hybrid electric vehicles, finding that the emissions of pollutants and carbon dioxide were significantly reduced in hybrid vehicles (Selleri et al., 2022). The level of GHG emissions from domestic vehicles during driving is still in need of further research. Yin et al. adopted the WLTC to study the GHG
75 emissions of 84 China VI light-duty gasoline vehicles, including six hybrid vehicles (Yin et al., 2024). The results indicated that vehicular g GHG emissions generally tend to increase with engine displacement. Vehicles with larger displacements often have more complex engine designs, which adds to the uncertainty of greenhouse gas emissions. The CO₂ increase rate caused by the CO₂ conversion of CH₄ and N₂O emissions from all types of vehicles was less than 1%, suggesting that CO₂ emissions from vehicle exhaust remain the primary source of greenhouse gases.

80 In this study, we conducted chassis dynamometer experiments on GHGs (CO₂, CH₄, and N₂O) from light-duty vehicles with different emission standards, engine types, fuel types, and different working conditions of post-treatment devices, aiming at improving the characteristics of GHG emission factors for light-duty vehicles and explore the GHG emission potential of light-duty vehicle exhaust emissions. This study provides an important data foundation for fully understanding the localized GHG emissions from light-duty vehicles in China, effectively reducing the uncertainty of greenhouse gas
85 emission inventory calculations.

2 Materials and methods

2.1 Tested vehicles and fuels

Eleven in-use light-duty vehicles, including ten Internal Combustion Engine Vehicles (ICEVs) and one Hybrid Electric Vehicle (HEV), from rental car companies were tested in this study. These light-duty vehicles selected cover various
90 emission standard categories, engine techniques, powertrain technology, and mileage accumulations, as detailed in Table 1. Among the eight light-duty gasoline vehicles (vehicles #1 to #8), representation was provided from China IV, China V, and China VI emission standards. These vehicles featured two distinct engine techniques: Gasoline Direct Injection (GDI) and Port Fuel Injection (PFI), all equipped with Three-Way Catalysts (TWC) converters. To assess the GHG emission differences between gasoline and hybrid electric vehicles, one non-plug-in hybrid electric light-duty vehicle (vehicle #9)



95 adhering to China VI emission standard was also included, utilizing both conventional gasoline engines and electric motors, potentially influencing overall GHG emissions.

Table 1: Specifications of the light-duty vehicles in this study, including category, model year, emission standard, engine technology, displacement, mileage, max. net engine power, max. authorized mass, and after-treatment types.

Vehicle ID	Category	Model year	Emission standard	Engine technology	Displacement (mL)	Mileage (10 ⁴ km)	Max. net engine power (kW)	Max. authorized mass (kg)	After-treatment
#1	ICEV ^a	2011	China IV	GDI ^b	1798	22.11	118	2000	TWC ^c
#2	ICEV	2011	China IV	GDI	1390	12.60	96	1930	TWC
#3	ICEV	--	China V	GDI	1798	8.00	--	--	TWC
#4	ICEV	2018	China V	GDI	1798	14.66	132	2100	TWC
#5	ICEV	2022	China VI	PFI ^d	1490	2.90	89	1740	TWC
#6	ICEV	2022	China VI	PFI	1490	5.22	89	1740	TWC
#7	ICEV	2021	China VI	GDI	1498	6.59	83	1725	TWC
#8	ICEV	2021	China VI	GDI	1498	5.50	83	1725	TWC
#9	HEV	2022	China VI	GDI	1798	2.75	72	1845	TWC
#10	ICEV, bi-fuel taxi	2019	China VI	PFI	1591	26.66	90.2	1640	TWC
#11	ICEV, bi-fuel taxi	2021	China VI	PFI	1591	8.00	90.2	1640	TWC

^a Internal Combustion Engine Vehicle. ^b Gasoline Direct Injection. ^c Three-Way Catalysts. ^d Port Fuel Injection.

100

To gain a deeper understanding of the effects of fuel types and TWC operating conditions on vehicular GHG emissions, two China VI compliant bi-fuel taxis (vehicles #10 to #11) were tested, one with 266,624 km (representing the “TWC failed” condition) and another only 79,960 km (representing the “TWC worked” condition). These gasoline/natural gas (NG) bi-fuel taxis were originally equipped with two separate fuel delivery systems and control units from the equipment manufacturer, allowing for seamless switching between gasoline and NG during operation, with gasoline being used during the warm-up phase (engine coolant temperature < 70 °C) before transitioning to NG (Wang et al., 2024).

105

In our study, we employed three types of fuels: conventional gasoline, ethanol gasoline, and compressed natural gas (CNG). The conventional gasoline, exclusively utilized in light-duty gasoline vehicles and HEVs, was sourced from the automobile testing center, guaranteeing uniformity in chemical composition throughout all testing cycles. The specifications of this conventional gasoline adopted in this study have been previously detailed in our earlier work (refer to Supplementary Table 2 in Zhang et al. (2024)). To delve deeper into the impact of fuels on vehicular emissions, all three fuel types were applied in the case of bi-fuel taxis. Ethanol gasoline and CNG came from the gasoline fueling and natural gas fueling station locations, respectively.

110



2.2 Experimental protocol and driving cycles

115 We carried out vehicular emission tests utilizing a chassis dynamometer within the esteemed China Automotive Technology
and Research Center (CATARC) laboratory, a type-approval testing center qualified by the Ministry of Ecology and
Environment of China. The tailpipe pollutants are diluted by a Constant Volume Sampling (CVS) method, followed by
analysis using an array of measurement systems. For GHG quantification, specific instruments were employed: the Non-
Dispersive InfraRed (NDIR) analyzer for CO₂ and the Quantum Cascade Laser (QCL) analyzer for N₂O, ensuring precise
120 measurements. Additionally, CH₄ concentrations were determined by a setup combining a Non-Methane Cut-off (NMC)
filter with a hydrogen Flame Ionization Detector (FID) (Yin et al., 2024). The calculation of distance-based emission factors
for GHGs was achieved through a meticulous process involving second-by-second concentrations, exhaust volume, pollutant
density, and the actual driving distance during the driving cycles.

To comprehensively investigate the diverse driving conditions on GHG emissions, we implemented three distinct types of
125 driving cycles. For gasoline vehicles and HEVs, we adhered to the WLTC newly introduced in the China VI emission
regulation. The WLTC protocol comprises four phases: low-speed (589 seconds), medium-speed (433 seconds), high-speed
(455 seconds), and extra-high-speed (323 seconds) phases. The impacts of both cold and hot startup modes on vehicular
emissions were explored during the WLTC protocol. Furthermore, we conducted additional driving tests on some typical
vehicles using the China Light-duty Vehicle Test Cycle (CLTC) which could be more relevant to real-world driving
130 conditions in China. This protocol, which encompasses the CLTC-P (passenger) and CLTC-C (commercial), was proposed
in 2019 (Wang et al., 2020; Hu et al., 2021). In addition, we conducted the emission testing based on constant speed
conditions: 30 km/h, 60 km/h, 90 km/h, and 120 km/h. During these constant speed tests, the driver accelerated to the target
speed and maintained it for 10 minutes, allowing for the precise measurement of GHG emissions under stable driving
conditions. Notably, for the CLTC protocol and our constant speed tests, only the hot start mode was employed.

135 2.3 Calculation of global warming potentials

Global Warming Potentials (GWP) have been established as a widely accepted method for comparing the climate impacts of
various greenhouse gas emissions over the past decades (Shine, 2009). This metric enables the conversion of CH₄ and N₂O
emissions into their CO₂ equivalents, thereby facilitating a standardized comparison. Furthermore, the relative growth rate of
CO₂ after conversion can be obtained, which is precisely calculated according to Eq. (1), offering valuable insights into the
140 long-term warming potential of these gases.

$$R_{\text{CO}_2} = (\text{GWP} \times M_i) / M_{\text{CO}_2} \quad (1)$$


where R_{CO_2} is the relative growth rate of CO₂, M_i denotes the emissions of CH₄ or N₂O, and M_{CO_2} denotes the emissions of
CO₂.

3 Results and Discussion

145 3.1 Scenario-Based Greenhouse Gas (GHG) Emission Factors

3.1.1 Distance-based emission factors

Figure 1 comprehensively depicts the distance-based emission factors of GHGs, illustrating the diverse impacts stemming from various scenarios, encompassing emission standard categories, engine techniques, powertrain advancements, startup modes, and driving cycles. Concerning emission standard categories, distinct trends emerged across the three primary GHG types. Prior research has documented a pronounced reduction in carbon monoxide (CO), nitrogen oxides (NO_x), and total hydrocarbons (THC) emissions in response to stricter emission standards (Duan et al., 2021). Similarly, in this study, CH₄ emission factors have undergone a substantial decline, with the China VI gasoline vehicle (during cold start) exhibiting an emission factor that was approximately one-sixth of that recorded for the China IV gasoline vehicle under similar conditions. This trend in CH₄ is consistent with previously reported variations in VOCs (Qi et al., 2021; Duan et al., 2021). Turning to CO₂ and N₂O, Figure 1 highlights that the emission factors for these gases in China VI gasoline vehicles were notably lower compared to those in China IV and China V vehicles. Nevertheless, the emission factors for CO₂ of the China V vehicles (155 g/km for the hot start) were comparable to those of China IV vehicles (151 g/km for the hot start) and those for N₂O of the China V vehicles (2 mg/km for the hot start) even were higher than those of China IV vehicles (1.5 mg/km for the hot start), particularly for hot start mode. It highlights a nuanced aspect of emission performance that needs further investigation.

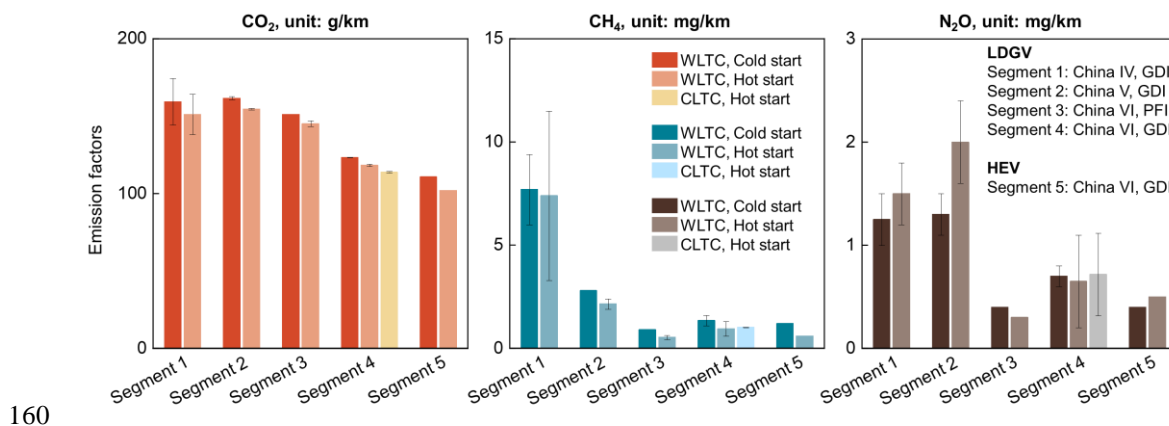

160

Figure 1: Emission factors of GHGs (CO₂, CH₄, and N₂O) for various scenarios involving different emission standard categories, engine techniques, powertrain technology, startup modes, and driving cycles.

Regarding the startup modes, our analysis revealed that CO₂ and CH₄ emissions were slightly lower during hot starts compared to cold starts. Herein, we conducted a comparative assessment of vehicular emissions from tested vehicles equipped with GDI engines. Specifically, the CO₂ emission factors for the tested China IV vehicles were found to be 159 g/km under cold startup mode and 151 g/km under hot startup mode. Similarly, for the tested China V vehicles, the CO₂ emission factors were 161 g/km and 155 g/km, respectively, for cold and hot startup modes. The China VI vehicles also

165



exhibited a similar trend, with CO₂ emission factors of 159 g/km and 151 g/km for cold and hot startup modes, respectively. Similarly, the CH₄ emissions displayed a declining trend, transitioning from cold starts to hot starts across all tested vehicle categories. For China IV vehicles, the CH₄ emission factors were 7.7 mg/km under cold starts and 7.4 mg/km under hot starts. China V vehicles showed a reduction from 2.8 mg/km to 2.2 mg/km, and China VI vehicles from 1.35 mg/km to 0.95 mg/km. Interestingly, the trend for N₂O emissions was inverse to that of CO₂ and CH₄, with higher emissions observed during hot starts compared to cold starts, particularly among China IV and China V vehicles. A systemic introduction to the detailed cause analysis will be presented in Section 3.1.2.

When it comes to engine techniques, a notable trend emerged in the comparison between PFI and GDI engines. Specifically, PFI engines exhibited higher CO₂ emission factors compared to GDI engines. Conversely, GDI engines demonstrated higher CH₄ and N₂O emissions. In terms of testing protocols, the CLTC protocol yielded slightly lower CO₂ emission factors by approximately 4% compared to the WLTC protocol. However, the CH₄ and N₂O emission factors for CLTC were observed to be higher, with increases of around 8% and 10%, respectively, compared to WLTC. Additionally, a comparative analysis between the gasoline vehicles and HEV revealed insight into the advancement of powertrain technology. Despite the selected HEV having a higher overall mass and displacement, they demonstrated a significant reduction in GHG emissions. Specifically, CO₂ emissions were reduced by 10% to 14%, CH₄ emissions by 11% to 37%, and N₂O emissions by 23% to 43%.

3.1.2 Interpreting technological upgrading through the lens of generation mechanisms

The different trends of GHG emissions across various scenarios might be attributed to the underlying mechanism of GHG generation. CO₂ can originate from the complete combustion of fuel in the tailpipe or from the oxidation of THC by the catalyst in TWC converters, highlighting a strong correlation between CO₂ emissions, fuel consumption, and the completeness of combustion. CH₄, on the other hand, can be formed through the partial oxidation of gasoline fuels or the thermal cracking of organic compounds in fuels. Regarding N₂O, it may arise from the reaction between ammonia (NH₃) and NO_x or from the decomposition of ammonium nitrate (NH₄NO₃) generated in catalytic converters, suggesting a greater dependence on NO_x and NH₃ concentrations (Yin et al., 2024; Brinklow et al., 2023).

The fuel consumption for China VI vehicles (5.0 L/100km for the hot start) was lower than that of China IV (6.4 L/100km for the hot start) and China V (6.6 L/100km for the hot start) vehicles. The lower fuel consumption for China VI vehicles caused the lower CO₂ and CH₄ emissions. Furthermore, N₂O emissions are primarily derived from reactions in the aftertreatment systems. Similar after-treatment technology routes for China IV and China V vehicles may account for their comparable N₂O emissions.

The startup modes have a significant impact on the engine combustion state and the effectiveness of the aftertreatment systems. Generally, the cold start mode tends to enhance hydrocarbon emissions, partly due to the incomplete combustion during the warm-up phase (Drozd et al., 2016) and partly because the temperature does not reach the light-off temperature of the exhaust catalyst (Saxer et al., 2006), leading to enhanced CH₄ emissions during the cold start mode. In terms of CO₂,

lower emissions might be primarily attributed to the lower fuel consumption during the hot startup mode. Regarding N₂O emissions, the higher N₂O emissions observed for China IV and China V vehicles during hot startup compared to cold startup can be explained by the increased NO_x emissions during the hot start mode. Specifically, for the tested GDI vehicles, China IV vehicles exhibited NO_x emission factors of 24.2 mg/km and 32.7 mg/km during cold and hot startup modes respectively, while China V vehicles displayed factors of 24.9 mg/km and 27.3 mg/km and China VI vehicles exhibited factors of 6.5 mg/km and 8.2 mg/km for the same conditions. This disparity underscores the influence of the startup mode on NO_x and consequently N₂O emissions.

Furthermore, GDI engines exhibited lower CO₂ emissions compared to PFI engines. This is attributed to the fact that GDI engines inject fuel directly into the combustion cylinder, enabling more precise control over injection time, fuel volume, and oil-gas mixing, and hence a higher brake thermal efficiency and power output (Awad et al., 2020). As a result, the improved engine efficiency for GDI engines can reduce fuel consumption, ultimately leading to decreased emissions of CO₂ and CH₄. However, it is possible that due to the differences in vehicle configurations, the advantages of GDI engines may not fully offset the increase in CH₄ emissions, causing higher CH₄ emissions from vehicles equipped with GDI engines. Regarding the strong correlation between N₂O and NO_x, herein, we compared the NO_x emissions of different engine technologies. Compared to PFI engines, GDI engines have a higher air-fuel ratio, which can have two opposing effects on the generation mechanism of NO_x, which originates from the oxidation of N₂ in the air within the combustion chamber (Huang et al., 2016). On the one hand, a high air-fuel ratio provides more air to oxidize N₂, but on the other hand, it can reduce the mixture temperature, constraining NO_x production. For the China VI vehicles in our study, the NO_x emissions for GDI engines (6.5 mg/km and 8.2 mg/km in cold and hot startup modes, respectively) were significantly higher than those for PFI engines (4.6 mg/km and 3.8 mg/km in cold and hot startup modes, respectively). Additionally, NO can selectively form N₂O at lower temperatures (Brinklow et al., 2023). Consequently, compared to PFI engines, the higher NO_x emissions and the lower temperature for GDI engines contributed to enhanced N₂O emissions.

When considering the impact of driving protocols on GHG emissions from vehicles, it is notable that the CLTC protocol, compared to the WLTC protocol, represents a low average speed, a high idle speed ratio, and more frequent acceleration and deceleration characteristics (Liu et al., 2020). Additionally, the idling conditions during the CLTC protocol exceed 20%, which is significantly higher than the 12.7% in the WLTC protocol, ultimately possibly leading to lower fuel consumption. Specifically, the fuel consumption of China VI vehicles during hot start for WLTC and CLTC protocols was 5.0 L/100km and 4.8 L/100km, respectively. Moreover, previous studies have reported that HEVs facilitate reduced emissions of gaseous and particulate pollutants (Zhang et al., 2024; Huang et al., 2022). In this study, we utilized non-plug-in hybrids, which operate on the principle that the engine and generator complement each other to maintain optimal engine performance for minimizing electricity consumption. This type of vehicle cannot be charged externally, and the battery is charged by the internal combustion engine through electricity generation. Consequently, HEVs achieve lower fuel consumption (4.7 L/100km and 4.3 L/100km in cold and hot startup modes, respectively) compared to gasoline vehicles with the same engine and emission standard (5.2 L/100km and 5.0 L/100km in cold and hot startup modes, respectively). Additionally, HEVs



235 exhibit higher combustion efficiency as the engine can maintain optimal operating conditions during operation. Both of these factors combine to result in lower GHG emissions for HEVs compared to gasoline vehicles.

Overall, the China VI emission regulation marks a significant milestone in the control of GHG emissions by introducing a specific emission limit of 20 mg/km for N₂O. Notably, the N₂O emissions recorded from all tested vehicles in this study, including even the older China IV vehicles, fell well below this limit, indicating a positive trend toward reduced emissions.
240 However, the current emission standards in China have yet to establish emission limit values for CO₂ and CH₄. This lack of stringent regulations for these GHGs underscores the need for a more comprehensive and systematic approach to greenhouse gas control.


3.2 Influence of fuel types and Three-Way Catalyst operation conditions on GHG emissions

In this study, we investigated two bi-fuel taxis exhibiting substantial disparities in mileage. By comparing the CO and THC emissions between these two taxis (241 mg/km and 5719 mg/km for CO under “TWC worked” and “TWC failed” conditions, 3 mg/km and 329 mg/km for THC under “TWC worked” and “TWC failed” conditions, respectively), it can be found that the taxi with 266,624 km of mileage was equipped with a failed TWC, whereas the taxi with a significantly lower mileage of 79,960 km was equipped with a worked TWC. Furthermore, Figure 2 illustrates the GHG emission factors associated with various fuel types and TWC operating conditions for our tested bi-fuel taxis.

250 Under “TWC worked” conditions, the CO₂ emission factors of conventional and ethanol gasoline were observed to be virtually identical, with both fuels exhibiting comparable CH₄ emission factors as well. As a gaseous fuel, CNG demonstrated a noteworthy reduction in CO₂ emissions by approximately 27% compared to the two liquid fuels. However, this reduction was accompanied by a marked increase in CH₄ emissions, with CNG emitting 10.8 times more CH₄ than conventional gasoline and 6.5 times more than ethanol gasoline. This trend of reduced CO₂ emissions with CNG usage has
255 been consistently reported in previous studies (Lv et al., 2023; Rašić et al., 2017; Bielaczyc et al., 2014). The lower CO₂ emissions from CNG can be attributed to its lower C/H ratio. Conversely, the elevated CH₄ emissions from CNG are primarily due to the direct emission of unburned CN₄, the primary component of CNG, from the tailpipe. Turning to N₂O emissions, CO and NO serve as the principal precursors, while H₂ and THC also play important roles as precursor species (Brinklow et al., 2023; Nevalainen et al., 2018). In terms of N₂O emissions, the three fuel types exhibited comparable
260 emission factors, ranging from 0.3 mg/km to 0.4 mg/km. Specifically, ethanol gasoline exhibited slightly higher N₂O emissions than conventional gasoline, which could be attributed to the combined effects of increased precursor concentration and reduced combustion temperatures stemming from ethanol’s relatively low combustion flame temperature and calorific value compared to conventional gasoline (Qu et al., 2020). Among the two liquid fuels, NO_x emission factors were comparable, with conventional gasoline at 11 mg/km and ethanol gasoline at 10 mg/km. Nevertheless, ethanol gasoline
265 would emit much higher CO and THC concentrations, the CO and THC emission factors for conventional gasoline were 240 g/km and 3 mg/km, whereas those for ethanol gasoline were 407 g/km and 7 mg/km, respectively. When comparing ethanol gasoline to CNG, CNG demonstrated lower CO emission factors (158 g/km versus 407 g/km for ethanol gasoline) but higher



NOx and THC emission factors (15 mg/km for NOx and 9 mg/km for THC versus 10 mg/km and 7 mg/km respectively for ethanol gasoline. Notably, CNG has a higher combustion temperature (Lv et al., 2023; Chen et al., 2019), which may be detrimental to the conversion of NO to N₂O (Brinklow et al., 2023). The potential advantage of higher precursor concentrations in CNG may be counteracted by the unfavorable effects of high temperatures, resulting in comparable N₂O emission factors for CNG and ethanol gasoline.

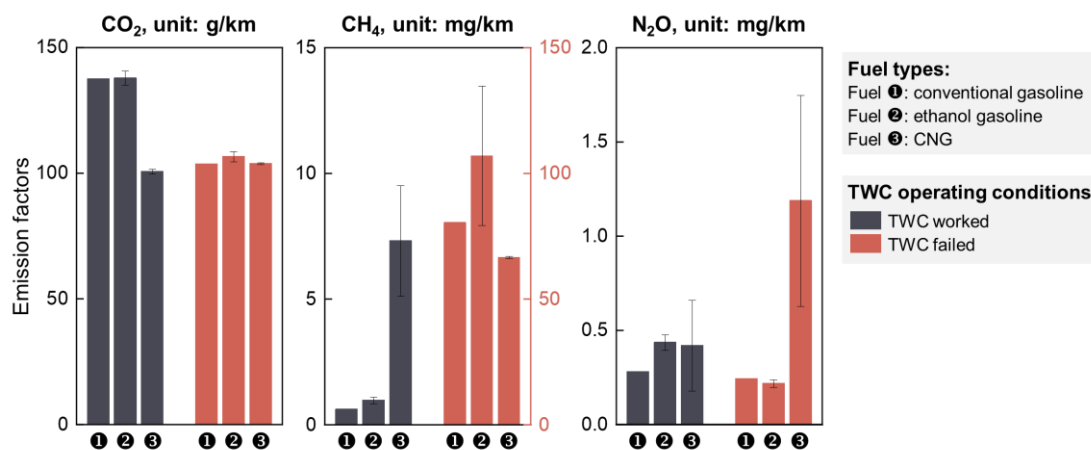

275 **Figure 2: Emission factors of GHGs (CO₂, CH₄, and N₂O) for different fuel types and TWC operating conditions of our tested bi-fuel taxis.**

TWC converters are instrumental in mitigating vehicular emissions. Under “TWC failed” conditions, notable enhancement in CH₄ emissions were recorded for the three fuel types, which was similar to the good removal ability of TWC for THC as reported in previous studies (Woo Jeong et al., 2024). Specifically, the CH₄ emission factors for conventional gasoline under “TWC failed” conditions were around 130 times higher, while those for ethanol gasoline were approximately 110 times higher and those for CNG were around 9 times higher, compared to the “TWC worked” conditions. Intriguingly, CO₂ emissions from both conventional and ethanol gasoline exhibited lower emission factors under “TWC failed” conditions compared to “TWC worked” conditions. On the one hand, this may be related to the unexpectedly lower fuel consumption for “TWC failed” conditions (4.8 L/100km for conventional gasoline and 4.9 L/100km for ethanol gasoline) compared to “TWC worked” conditions (5.8 L/100km for conventional gasoline and 5.8 L/100km for ethanol gasoline). On the other hand, from the prospective of the after-treatment system, this could also be explained by the underlying operating mechanism of TWC converters. When the high-temperature exhaust passes through TWC, the catalyst within it enhances the reactivity of CO, HC, and NO_x, catalyzing oxidation and reduction reactions. This process converts CO into CO₂, HC into H₂O and CO₂, and NO_x into N₂ and O₂ (De Abreu Goes et al., 2021). Consequently, under “TWC failed” conditions, these conversions are hindered, leading to reduced CO₂ generation and correspondingly lower emission factors.

290 Regarding N₂O, its generation pathway is related to the primary precursors, notably CO, NO_x, and THC, with lower temperatures facilitating N₂O formation (Brinklow et al., 2023). The formation of N₂O over TWC converters is a complex interplay of factors, including the active metal composition, converter aging, exhaust temperature, air-fuel ratio, and feed gas



composition (Nevalainen et al., 2018; Mejía-Centeno et al., 2007). For both conventional and ethanol gasoline, despite the substantial increases in CO and THC emissions observed under “TWC failed” conditions compared to “TWC worked” conditions, N₂O emission factors did not correspondingly elevate. This phenomenon could be attributed to the significant reduction in NO_x emissions under “TWC failed” conditions, which were only one-seventh of those recorded under “TWC worked” conditions. This suggests that NO_x may be a more pivotal precursor in determining N₂O production than CO and THC. Similar to prior research highlighting that catalyst aging would change the structure of oxygen storage material thereby causing an enhancement of N₂O formation (Nevalainen et al., 2018), our findings reveal a notable increase in N₂O emissions for CNG under “TWC failed” conditions, reaching approximately three times that of “TWC worked” conditions. This elevation is likely attributable to heightened precursor concentrations, particularly NO_x. Our study underscores the variability in the impact of TWC failure on N₂O emissions across different fuel types corresponding to different combustion states. This highlights the need for future research to delve deeper into identifying the primary driver of N₂O generation and elucidating the underlying mechanism governing N₂O generation under diverse fuel usage conditions.

Overall, the difference in GHG emissions between conventional gasoline and ethanol gasoline is not significant. The application of CNG can effectively reduce CO₂ emissions but significantly increase CH₄ emissions. In the context of CNG usage, CO₂ was not sensitive to TWC aging, while the combined effect of CNG usage and TWC aging led to a substantial increase in CH₄ emissions. Additionally, N₂O emissions are minimally affected by the substitution of clean fuels such as CNG but are greatly influenced by TWC failure.

3.3 GHG emissions from Hybrid Electric Vehicles

Previous studies have reported that HEVs facilitate reduced emissions of gaseous and particulate pollutants (Zhang et al., 2024; Huang et al., 2022). In this study, we focused on non-plug-in hybrids, which operate on the principle that the engine and generator complement each other to maintain optimal engine performance for minimizing electricity consumption. This type of vehicle cannot be charged externally, and the battery is charged by the internal combustion engine through electricity generation. Consequently, HEVs exhibited lower fuel consumption, achieving 4.7 L/100km and 4.3 L/100km in cold and hot startup modes, respectively, compared to gasoline vehicles, which consumed 5.2 L/100km and 5.0 L/100km under the same conditions. Furthermore, HEVs showed higher combustion efficiency as the engine can maintain optimal operating conditions during operation. These factors, when combined, lead to a substantial reduction in GHG emissions for HEVs compared to gasoline vehicles. Specifically, CO₂ emission factors were 110.8 g/km and 102.0 g/km for cold and hot startup modes, respectively, while CH₄ emission factors stood at 1.2 mg/km and 0.6 mg/km, and N₂O emission factors at 0.4 mg/km and 0.5 mg/km for the same conditions. A comparative analysis between gasoline vehicles and HEVs underscores the advancements in powertrain technology. Notably, despite the HEV in our study having a higher overall mass and displacement, they demonstrated remarkable reductions in GHG emissions. In particular, CO₂ emissions were reduced by 10% to 14%, CH₄ emissions by 11% to 37%, and N₂O emissions by 23% to 43%, highlighting the environmental benefits of HEV technology.


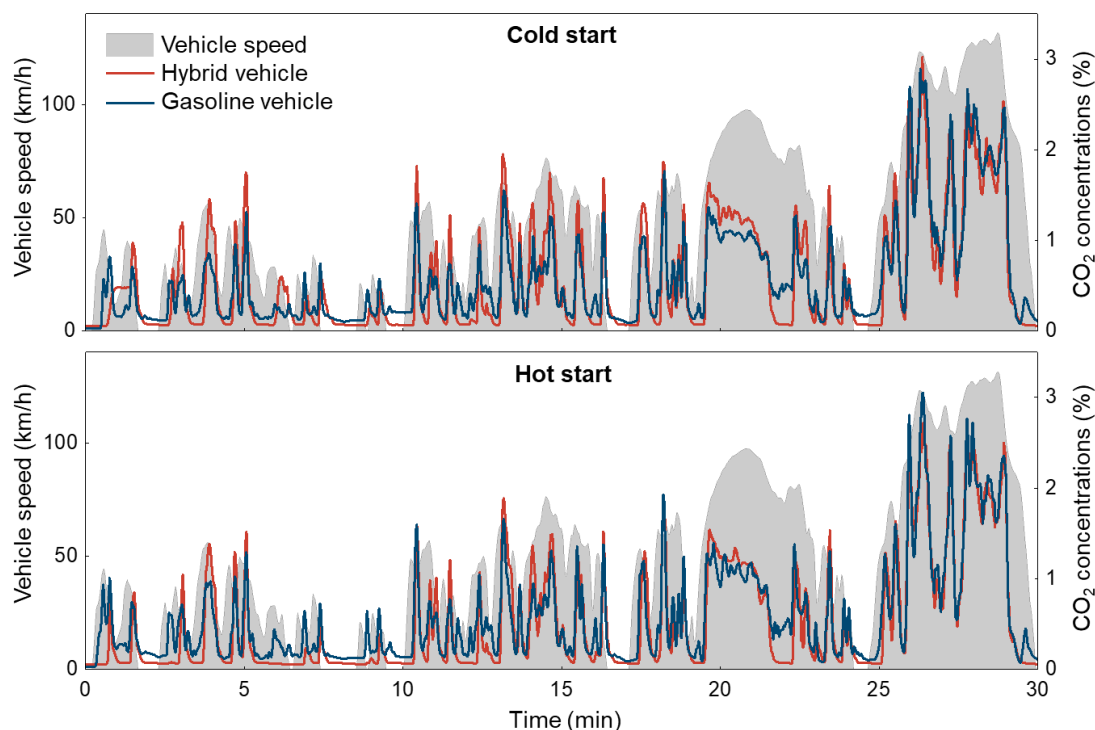


Figure 3: Timeseries of CO₂ and vehicle speed in the WLTC protocol with hot start (upper panel) and cold start (bottom panel) of the HEV and gasoline vehicle.

HEVs, when compared to conventional gasoline vehicles, utilize electric motors for propulsion during startup and low-speed driving conditions (approximately 20 km/h). As depicted in Figure 3, HEVs exhibited a delayed and significantly reduced CO₂ emission profile during these phases. This reduction is attributed to the electric motor's efficiency and the absence of fuel combustion. However, when the vehicle accelerates beyond a certain threshold, the internal combustion engine (ICE) is activated to provide additional power. At this juncture, there was a marked increase in CO₂ emissions, reflecting the higher fuel consumption required to initiate the engine's operation. This transient spike underscores the instantaneous fuel demand and combustion process associated with engine startup in HEVs.


As presented in Figure 4, an examination of the various speed phases within the WLTC revealed that HEVs demonstrated notably lower CO₂ emissions during low-speed segments, especially under hot start conditions. This reduction in CO₂ emissions can be attributed to the efficient operation of the electric motor at lower speeds. Conversely, the emission factors for CH₄ and N₂O were observed to be relatively higher in these low-speed segments, indicating a trade-off in emission profiles. When compared to conventional gasoline vehicles, HEVs generally exhibited lower emissions across a range of pollutants. The exception to this trend was the CH₄ emissions during cold starts at low speeds, where HEVs display elevated levels. This anomaly suggests that while HEVs are more efficient overall, certain conditions may lead to increased emissions of specific pollutants.

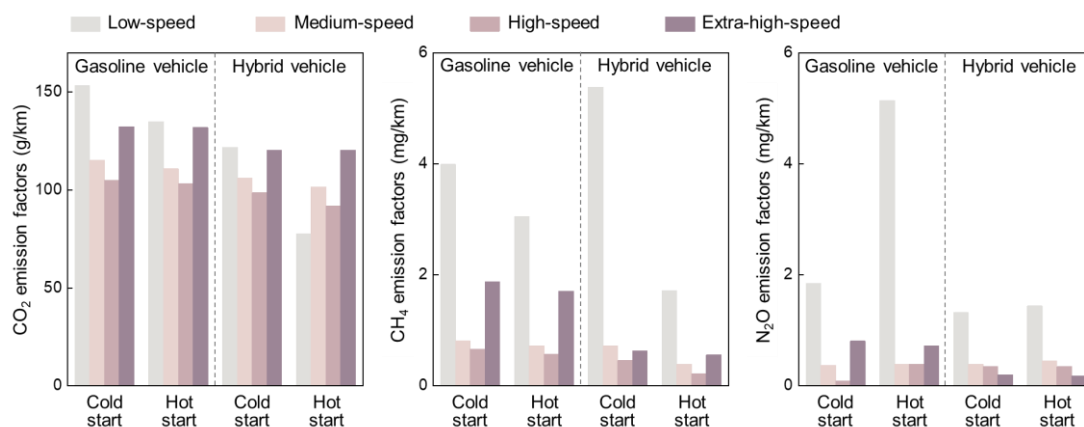

345 **Figure 4: Emission factors of CO₂, CH₄, and N₂O under different speed phases under the WLTC protocol for the China VI HEV and China VI gasoline vehicle.**

3.4 Global warming potentials of light-duty vehicles

As shown in Figure 5, vehicle exhaust emissions, particularly the emission of CO₂, remain the primary contributor to the global warming potential, accounting for over 99% of the total three GHGs. Even though CH₄ and N₂O have global warming potentials 28 and 265 times higher respectively than that of CO₂, the sheer volume of CO₂ emissions from vehicle tailpipes still dominates. Furthermore, for conventional gasoline-powered vehicles, the GWP values tended to decrease as emission standards became more stringent. However, for China VI vehicles, those equipped with PFI engines exhibited higher GWP compared to those with GDI engines, with GDI vehicles showing a 17.6% reduction compared to PFI vehicles. This difference highlights the varying efficiency and emission profiles between the two engine types. GDI technology allows for more precise fuel delivery and better combustion efficiency, which translates to lower CO₂ emissions. Furthermore, the impact of hybrid engine technology on GWP values is particularly noteworthy. HEVs combine an internal combustion engine with an electric motor, which enhances fuel efficiency and reduces emissions. The data indicates that HEVs achieve a further 12.0% reduction in GWP compared to conventional GDI vehicles. Therefore, vehicles with GDI engines and hybrid technology exhibit lower GWP values.

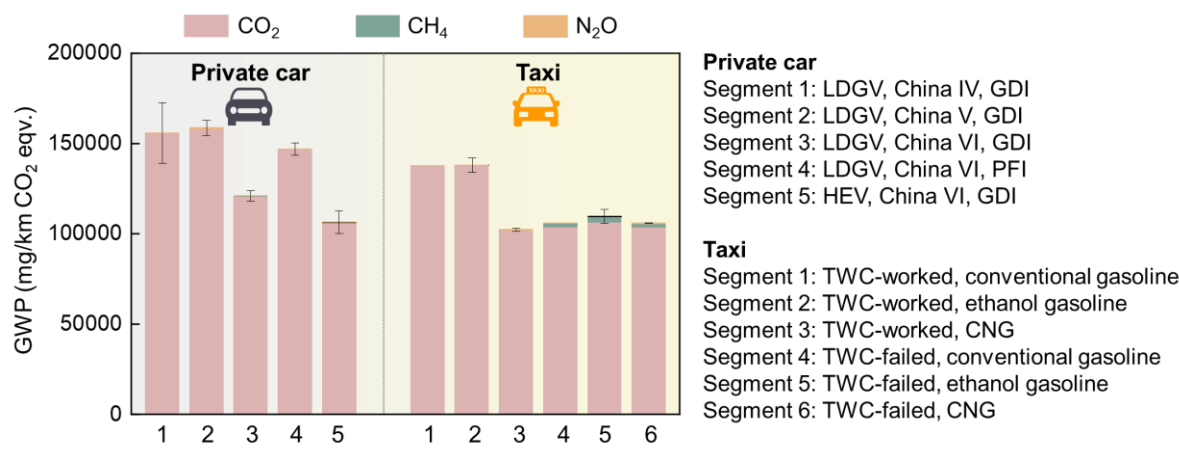

360

Figure 5: Global warming potentials of private car and taxi exhaust emission.

For dual fuel taxis, under normal operating conditions of TWC, the fuel consumption is higher when using ethanol-blended gasoline and regular gasoline compared to using CNG. At the same time, due to the catalytic effect of TWC, CO and HC can be converted into CO₂, resulting in higher GWP values. This indicates that although dual fuel vehicles can benefit from alternative fuels, especially the use of CNG fuel, it can effectively reduce the emissions of motor vehicle exhaust pollutants. On the contrary, in the case of TWC failure, lower GWP values were observed. Compared to vehicles operating normally with TWC using gasoline, the GWP of vehicles with TWC failure decreased by approximately 27.8%. This contradictory finding indicates that although TWC is effective in reducing pollutants such as CO, HC, and NO_x, its level of control over greenhouse gas emissions is not the same. Therefore, the failure of TWC may lead to a reduction in GWP, but this is also accompanied by the risk of increased emissions of other pollutants, indicating a complex interaction between emission control technologies and overall environmental impacts.

365

370

4 Conclusions

Vehicular emissions constitute a pivotal contributor to atmospheric pollutants and greenhouse gases in the troposphere. While extensive research has been conducted on the emission characteristics of gaseous pollutants emanating from vehicle exhausts, there remains a notable scarcity of studies focusing on greenhouse gas emissions, particularly in the context of achieving carbon neutrality. To address this gap, our study conducted a comprehensive investigation into the emission characteristics of three important GHG (CO₂, CH₄, and N₂O) emanating from a diverse fleet of eleven light-duty vehicles, encompassing conventional gasoline private cars, hybrid private vehicles, and bi-fuel taxis. The main findings of our research are outlined below.

375

- (1) Compared to China IV and China V vehicles, China VI vehicles significantly reduce greenhouse gas emissions, which might be related to the low CO₂ and CH₄ emissions of China VI vehicles are related to their low fuel consumption, while the low N₂O emissions are associated with their after-treatment technologies.

380



- 385 (2) compared to PFI engines, GDI engines can reduce CO₂ emissions but have adverse effects on CH₄ and N₂O emissions. The different responses of these three greenhouse gases to engine technologies may stem from variations in combustion efficiency, air-fuel ratio, and combustion temperature between the two engine technologies.
- (3) In contrast to hot startup mode, cold starts promote CO₂ and CH₄ emissions, while N₂O emissions exhibit an opposite trend, which is mainly related to the higher NO_x concentrations during hot starts.
- 390 (4) Under the “TWC worked” conditions, the GHG emissions from conventional gasoline and ethanol gasoline are roughly equivalent. However, CNG, as a clean fuel, can significantly reduce CO₂ emissions, whereas promotes CH₄ emissions since CH₄ is its primary component.
- (5) Unexpectedly, the CO₂ emissions from the two liquid fuels under the “TWC failed” conditions exhibit lower emission factors than under the “TWC worked” conditions. In the case of N₂O emissions, the TWC failure does not lead to higher N₂O emissions when using conventional gasoline or ethanol gasoline, mainly because the significant reduction in NO_x under the “TWC failed” conditions despite the significant increase in CO and THC. However, under CNG usage, the
395 emission factor of N₂O under TWC failure conditions is approximately three times that under normal TWC conditions, which is primarily associated with a substantial increase in NO_x.
- (6) In terms of greenhouse gas emission reduction, hybrid vehicles demonstrate a significant advantage over conventional gasoline vehicles primarily due to the usage of electric motors. Specifically, hybrid vehicles exhibit notably lower CO₂ emissions at low-speed phases, while emissions of CH₄ and N₂O tend to be relatively higher at these speeds.
- 400 (7) The global warming potential stemming from vehicle exhaust is primarily attributed to CO₂ emissions. HEVs demonstrate a more advantageous environmental impact compared to conventional gasoline vehicles. Surprisingly, however, under the “TWC failed” conditions, a lower GWP value has been observed, indicating a complex interaction between emission control technologies and the environmental impact.

The purpose of this study is to provide insights into the emission characteristics of GHGs from vehicles, which are crucial
405 for developing targeted strategies to reduce GHG emissions and enhance the overall efficiency and environmental performance of vehicle emission control systems. However, a limitation of this study is that the vehicle fleet remains relatively small. In future research, we should investigate motor vehicle GHG emissions more systematically, while simultaneously measuring auxiliary parameters such as catalyst temperature to facilitate a mechanistic understanding of GHG formation. This will aid in the management and control of GHG emissions from vehicles in the future.

410

Code and data availability. The data used in this publication are available on <https://doi.org/10.6084/m9.figshare.27303969> (Yang et al., 2024), and they can be accessed by request to the corresponding authors.

Author contributions. XPY and LSD performed the formal analysis, funding acquisition, and writing – original draft. JK
415 and ZHH performed the formal analysis. YW, DLY, ZJ, and ZGY discussed the results and commented on the article. YJW, SDL, HY, and YD conceived and led the studies.



Competing interests. The authors declare that they have no conflict of interest.

Financial support. This study has been supported by the National Natural Science Foundation of China (Nos. 42205111, 42207114).

420 References

- Awad, O. I., Ma, X., Kamil, M., Ali, O. M., Zhang, Z., and Shuai, S.: Particulate emissions from gasoline direct injection engines: A review of how current emission regulations are being met by automobile manufacturers, *Science of The Total Environment*, 718, 137302, <https://doi.org/10.1016/j.scitotenv.2020.137302>, 2020.
- 425 Bielaczyc, P., Woodburn, J., and Szczotka, A.: An assessment of regulated emissions and CO₂ emissions from a European light-duty CNG-fueled vehicle in the context of Euro 6 emissions regulations, *Applied Energy*, 117, 134-141, <https://doi.org/10.1016/j.apenergy.2013.12.003>, 2014.
- Brinklow, G., Herreros, J. M., Zeraati Rezaei, S., Doustdar, O., Tsolakis, A., Kolpin, A., and Millington, P.: Non-carbon greenhouse gas emissions for hybrid electric vehicles: three-way catalyst nitrous oxide and ammonia trade-off, *International Journal of Environmental Science and Technology*, 20, 12521-12532, 10.1007/s13762-023-04848-2, 2023.
- 430 Chen, H., He, J., and Zhong, X.: Engine combustion and emission fuelled with natural gas: A review, *Journal of the Energy Institute*, 92, 1123-1136, 10.1016/j.joei.2018.06.005, 2019.
- Clairotte, M., Suarez-Bertoa, R., Zardini, A. A., Giechaskiel, B., Pavlovic, J., Valverde, V., Ciuffo, B., and Astorga, C.: Exhaust emission factors of greenhouse gases (GHGs) from European road vehicles, *Environmental Sciences Europe*, 32, 125, 10.1186/s12302-020-00407-5, 2020.
- 435 Da, P., Tao, L., Sun, K., Golston, L. M., Miller, D. J., Zhu, T., Qin, Y., Zhang, Y., Mauzerall, D. L., and Zondlo, M. A.: Methane emissions from natural gas vehicles in China, *Nature Communications*, 11, 4588, 10.1038/s41467-020-18141-0, 2020.
- De Abreu Goes, J., Olsson, L., and Watling, T. C.: Global Kinetic Model of a Three-Way-Catalyst-Coated Gasoline Particulate Filter: Catalytic Effects of Soot Accumulation, *Industrial & Engineering Chemistry Research*, 60, 16899-16910, 10.1021/acs.iecr.1c02742, 2021.
- 440 Drozd, G. T., Zhao, Y., Saliba, G., Frodin, B., Maddox, C., Weber, R. J., Chang, M. O., Maldonado, H., Sardar, S., Robinson, A. L., and Goldstein, A. H.: Time Resolved Measurements of Speciated Tailpipe Emissions from Motor Vehicles: Trends with Emission Control Technology, Cold Start Effects, and Speciation, *Environ Sci Technol*, 50, 13592-13599, 10.1021/acs.est.6b04513, 2016.
- Duan, L., Yuan, Z., Sha, Q. e., Wang, M., Liu, X., Liu, Y., Hao, Y., and Zheng, J.: Investigation on the trend of emission characteristics of volatile organic compounds from motor vehicle exhaust under different emission standards, *Acta Scientiae Circumstantiae*, 41, 1239-1249, 10.13671/j.hjkxxb.2021.0062, 2021.
- 445 He, L.-q., Song, J.-h., Hu, J.-n., Xie, S.-x., and Zu, L.: An investigation of the CH₄ and N₂O emission factors of light-duty gasoline vehicles, *Huan jing ke xue= Huanjing kexue*, 35, 4489-4494, 2014.
- Hu, Z., Lu, Z., Song, B., and Quan, Y.: Impact of test cycle on mass, number and particle size distribution of particulates emitted from gasoline direct injection vehicles, *Science of the Total Environment*, 762, 10.1016/j.scitotenv.2020.143128, 2021.
- 450 Huang, R., Ni, J., Zheng, T., Wang, Q., Shi, X., and Cheng, Z.: Characterizing and assessing the fuel economy, particle number and gaseous emissions performance of hybrid electric and conventional vehicles under different driving modes, *Atmospheric Pollution Research*, 13, 101597, <https://doi.org/10.1016/j.apr.2022.101597>, 2022.
- Huang, X., Wang, Y., Xing, Z., and Du, K.: Emission factors of air pollutants from CNG-gasoline bi-fuel vehicles: Part II. CO, HC and NO_x, *Science of the Total Environment*, 565, 698-705, 10.1016/j.scitotenv.2016.05.069, 2016.
- IEA: CO₂ Emissions in 2023, <https://www.iea.org/reports/co2-emissions-in-2023>, IEA, 2024.
- 455 IPCC: Summary for Policymakers, in: *Climate Change 2013 – The Physical Science Basis: Working Group I Contribution to the Fifth Assessment Report of the Intergovernmental Panel on Climate Change*, edited by: Intergovernmental Panel on Climate, C., Cambridge University Press, Cambridge, 1-30, DOI: 10.1017/CBO9781107415324.004, 2014.
- Jun-Ling Liu, Y.-H. S. U. N. K. W. J. Z. O. U. Y. K.: Study on mid- and long-term low carbon development pathway for China's transport sector, *Advances in Climate Change Research*, 14, 513-521, 2018.
- 460 Li, F., Cai, B., Ye, Z., Wang, Z., Zhang, W., Zhou, P., and Chen, J.: Changing patterns and determinants of transportation carbon emissions in Chinese cities, *Energy*, 174, 562-575, <https://doi.org/10.1016/j.energy.2019.02.179>, 2019.
- Li, G., Gao, J., Deng, S., Sun, Z., Zhang, S., Lu, Z., Lu, P., Zhang, Y., Abula, T., and Li, Q.: A study on high temporal-spatial resolution emission inventory and its characteristics of greenhouse gas for on-road mobile source in Weinan, *Acta Scientiae Circumstantiae*, 332-340, 10.13671/j.hjkxxb.2022.0215, 2022.
- 465 Liu, J., Huang, F., and Chen, B.: Research on Influencing Factors and Emission Reduction Strategies of Carbon Emission in Transportation Industry, *Highway*, 252-259, 2023.



- Liu, Y., Wu, Z. X., Zhou, H., Zheng, H., Yu, N., An, X. P., Li, J. Y., and Li, M. L.: Development of China Light-Duty Vehicle Test Cycle, *International Journal of Automotive Technology*, 21, 1233-1246, 10.1007/s12239-020-0117-5, 2020.
- 470 Lv, Z., Wu, L., Ma, C., Sun, L., Peng, J., Yang, L., Wei, N., Zhang, Q., and Mao, H.: Comparison of CO₂, NO_x, and VOCs emissions between CNG and E10 fueled light-duty vehicles, *The Science of the total environment*, 858, 159966-159966, 10.1016/j.scitotenv.2022.159966, 2023.
- Mejía-Centeno, I., Martínez-Hernández, A., and Fuentes, G. A.: Effect of low-sulfur fuels upon NH₃ and N₂O emission during operation of commercial three-way catalytic converters, *Topics in Catalysis*, 42, 381-385, 10.1007/s11244-007-0210-2, 2007.
- 475 Ministry of Ecology and Environment, C.: China Mobile Source Environmental Management Annual Report, https://www.mee.gov.cn/hjzl/sthjzk/ydyhjgl/202312/t20231207_1058460.shtml, 2023.
- Nam, E. K., Jensen, T. E., and Wallington, T. J.: Methane Emissions from Vehicles, *Environmental Science & Technology*, 38, 2005-2010, 10.1021/es034837g, 2004.
- Nevalainen, P., Kinnunen, N. M., Kirveslahti, A., Kallinen, K., Maunula, T., Keenan, M., and Suvanto, M.: Formation of NH₃ and N₂O in a modern natural gas three-way catalyst designed for heavy-duty vehicles: the effects of simulated exhaust gas composition and ageing, *Applied Catalysis A: General*, 552, 30-37, <https://doi.org/10.1016/j.apcata.2017.12.017>, 2018.
- 480 Qi, L., Zhao, J., Li, Q., Su, S., Lai, Y., Deng, F., Man, H., Wang, X., Shen, X. e., Lin, Y., Ding, Y., and Liu, H.: Primary organic gas emissions from gasoline vehicles in China: Factors, composition and trends, *Environmental pollution (Barking, Essex : 1987)*, 290, 117984-117984, 10.1016/j.envpol.2021.117984, 2021.
- 485 Qu, G., Yao, C., Wu, T., Wang, H., Li, Z., and Yan, J.: Comparative experiment research on unregulated exhaust emission characteristics of alcohol-gasoline and gasoline, *Acta Scientiae Circumstantiae*, 40, 111-118, 2020.
- Rašić, D., Rodman Oprešnik, S., Seljak, T., Vihar, R., Bašković, U. Ž., Wechtersbach, T., and Katrašnik, T.: RDE-based assessment of a factory bi-fuel CNG/gasoline light-duty vehicle, *Atmospheric Environment*, 167, 523-541, <https://doi.org/10.1016/j.atmosenv.2017.08.055>, 2017.
- 490 Saxer, C. J., Forss, A.-M., Rüdy, C., and Heeb, N. V.: Benzene, toluene and C₂-benzene emissions of 4-stroke motorbikes: Benefits and risks of the current TWC technology, *Atmospheric Environment*, 40, 6053-6065, <https://doi.org/10.1016/j.atmosenv.2005.12.059>, 2006.
- Selleri, T., Melas, A. D., Franzetti, J., Ferrarese, C., Giechaskiel, B., and Suarez-Bertoa, R.: On-Road and Laboratory Emissions from Three Gasoline Plug-In Hybrid Vehicles—Part 1: Regulated and Unregulated Gaseous Pollutants and Greenhouse Gases, 10.3390/en15072401, 2022.
- 495 Shine, K. P.: The global warming potential—the need for an interdisciplinary retrieval, *Climatic Change*, 96, 467-472, 10.1007/s10584-009-9647-6, 2009.
- Sirithian, D., Thanatrakolsri, P., and Pongpan, S.: CO₂ and CH₄ Emission Factors from Light-Duty Vehicles by Fuel Types in Thailand, 10.3390/atmos13101588, 2022.
- 500 Tang, W., He, P., Yang, Q., Lu, Q., Zheng, S., Xia, Y., Jing, B., LU, B., Huang, C., and Lu, J.: Study on greenhouse gas emission inventory of road source in Hangzhou based on IVE model and large data analysis, *Acta Scientiae Circumstantiae*, 1368-1376, 10.13671/j.hjkxxb.2017.0493, 2018.
- Wang, H., Ou, X., and Zhang, X.: Mode, technology, energy consumption, and resulting CO₂ emissions in China's transport sector up to 2050, *Energy Policy*, 109, 719-733, <https://doi.org/10.1016/j.enpol.2017.07.010>, 2017.
- 505 Wang, X., Wang, C., Li, R., Ge, Y., Hao, L., and Tan, J.: Tracing the regulated emissions of field-aged gasoline/natural gas bi-fuel taxis from new to 160,000 km: Deterioration and environmental implications, *Fuel*, 362, 130863, <https://doi.org/10.1016/j.fuel.2024.130863>, 2024.
- Wang, Y., Hao, C., Ge, Y., Hao, L., Tan, J., Wang, X., Zhang, P., Wang, Y., Tian, W., Lin, Z., and Li, J.: Fuel consumption and emission performance from light-duty conventional/hybrid-electric vehicles over different cycles and real driving tests, *Fuel*, 278, 10.1016/j.fuel.2020.118340, 2020.
- 510 Wang, Y., Zhao, H., Yin, H., Yang, Z., Hao, L., Tan, J., Wang, X., Zhang, M., Li, J., Lyu, L., Wang, H., Wang, C., Tan, D., and Ge, Y.: Quantitative study of vehicle CO₂ emission at various temperatures and road loads, *Fuel*, 320, 123911, <https://doi.org/10.1016/j.fuel.2022.123911>, 2022.
- Woo Jeong, J., Baek, S., Park, S., Lee, S., Lim, Y., and Lee, K.: Trends in NO_x and NH₃ emissions caused by three-way catalysts, *Fuel*, 366, 131282, <https://doi.org/10.1016/j.fuel.2024.131282>, 2024.
- 515 Xue, L., Jin, Y., Yu, R., Liu, Y., and Ren, H.: Toward “net zero” emissions in the road transport sector in China, <https://wri.org.cn/sites/default/files/2021-12/toward-net-zero-emissions-road-transport-sector-china-CN.pdf>, World Resources Institute, 2019.
- Yang, X., Jia, K., Zhihui, H., Yi, W., Dailin, L., Zhen, J., Zhigang, Y., Yunjing, W., Songdi, L., Hang, Y., and Yan, D.: Insight into Greenhouse Gas Emission Characteristics of Light-Duty Vehicles in China Driven by Technological Innovation, <https://doi.org/10.6084/m9.figshare.27303969>, 2024.
- 520 Yin, D., Ai, L., and Weng, Y.: Greenhouse gas emissions characteristics of China VI light-duty gasoline vehicles, *China Environmental Science*, 44, 679-685, 2024.



- Yin, X., Chen, W., Eom, J., Clarke, L. E., Kim, S. H., Patel, P. L., Yu, S., and Kyle, G. P.: China's transportation energy consumption and CO₂ emissions from a global perspective, *Energy Policy*, 82, 233-248, <https://doi.org/10.1016/j.enpol.2015.03.021>, 2015.
- 525 Yuan, Z., Li, Z., Kang, L., Tan, X., Zhou, X., Li, X., Li, C., Peng, T., and Ou, X.: A review of low-carbon measurements and transition pathway of transport sector in China, *Advances in Climate Change Research*, 17, 27-35, 2021.
- Zeng, Y., Tan, X., Gu, B., Wang, Y., and Xu, B.: Greenhouse gas emissions of motor vehicles in Chinese cities and the implication for China's mitigation targets, *Applied Energy*, 184, 1016-1025, <https://doi.org/10.1016/j.apenergy.2016.06.130>, 2016.
- Zhang, L., Long, R., Chen, H., and Geng, J.: A review of China's road traffic carbon emissions, *Journal of Cleaner Production*, 207, 569-581, <https://doi.org/10.1016/j.jclepro.2018.10.003>, 2019.
- 530 Zhang, Y., Yang, X., and Fu, M.: Emission Characteristics of Particle Number from Conventional Gasoline and Hybrid Vehicles, *Sustainability*, 16, 12, 2024.
- Zhong, H., Yu, F., Liao, S., ZHU, M., Duan, J., Sha, Q. e., Liu, J., and Zheng, J.: Development and evaluation of methane emission factor model for light-duty gasoline vehicles based on on-road driving tests, *Acta Scientiae Circumstantiae*, 43, 176-184, 2023.

535