



Numerical Investigation of Parameters Influencing Back-Thrust Development in Outer Wedge Fronts of Fold-and-Thrust-Belt Systems

Saeed Mahmoodpour^{1*}, Florian Duschl¹, Michael C. Drews¹

5 ¹Geothermal Technologies, Technical University of Munich, Munich, 80333, Germany

*Correspondence to Saeed Mahmoodpour (saeed.mahmoodpour@tum.de)

Key points

- Material strength is recognized as the most important factor for back-thrusting
- Increasing the friction coefficient of the décollement decreases likelihood of back-thrusting
- 10 • Strength contrast between taper and décollement is the main driver of back-thrusting and compares well with field observations

Abstract

Thrusting in fold-and-thrust belts can manifest in different styles. Here we investigate the parameters influencing back-thrust development over fore-thrust development at the **frontal of** fold-and-thrust belts using numerical geomechanical forward modelling. We vary the strength of the material involved, dip and friction of the décollement and displacing boundary conditions to examine the impact of these properties **on the back-thrust** development. The results of this numerical sensitivity analysis reveal that back-thrusting mainly increases with increasing material strength and decreasing friction coefficient of the décollement. Décollement dip has a less prominent impact on back-thrusting, but decreasing the décollement's dip angle enhances back-thrusting likelihood. In summary, we find that the contrast between the work necessary to shear the wedge material and the work necessary to slide along the décollement is the main driver for initiating back-thrusting (high contrast) over fore-thrusting (low or even negative contrast), which compares well with field observations. In addition, we also investigate and discuss the effect of a pure lateral displacement rate boundary condition vs. a coupled lateral and along-décollement displacement rate boundary condition on numerical simulations of back-thrusting development.

Keywords: Geomechanics; Fold and Thrust Belt; Back-thrust; Sensitivity analysis

1 Introduction

A fold-and-thrust-belt is a geological feature which forms due to compression and is characterized by folded and thrust rock layers. Resulting thrusts can be divided into fore-thrusts and back-thrusts based on their development directions relative to the layers' displacement. These structures are observed in major mountain ranges across the world such as the European Alps (Brisson et al., 2023), the Himalayas (Mugnier et al., 2022), and the Rocky Mountains (McMechan, 2023), but also in sub-sea accretionary prisms and at frontal parts of deltaic and mass



transport deposits (Bilotti & Shaw, 2005). Typically, the development of back-thrusts occurs between the axis of
35 the main orogenic uplift zone and its foredeep; here, convergence is accommodated by thrust faults and folding.
Analysing the progressive development of fold-and-thrust-belt systems provides essential insights into mountain-
building processes, geological history and the mechanisms which are shaping the Earth's crust in tectonic
convergence zones.

Hubbert and Rubey (1959) were of the pioneers to examine the mechanisms behind the development of fold-and-
40 thrust-belt systems built the basis for the development of the critical taper theory (Eq. 1 for the dry sand wedge),
as formulated by Dahlen (1990). The critical taper theory examines the force balances to form a wedge (taper)
through compression and provides an analytical tool which considers the relationship between pore pressure,
stress, and the geometry of fold-and-thrust-belts. Based on this approach, material strength and basal friction of a
wedge are used to characterize critical taper development. Assuming the predefined material strength and basal
45 friction in a wedge with known basal dip angle, minimum and maximum values are calculated as the critical taper
angles (difference between surface slope and basal dip angle, $\alpha + \beta$ in Eq. 1). When the taper angle is equal to
 $\alpha + \beta$, the wedge is assumed to be stable. When the taper angle is lower than the minimum value, the surface dip
angle increases through thrusting resulting in higher wedge thickness. This process continues until the taper angle
reaches the minimum value, i.e. critical state. Accretion of new material at the toe of the wedge then keeps the
50 surface angle stable. In cases where the taper angle exceeds the maximum value, the surface angle decreases
through normal faulting at the wedge front (Ruh et al. 2012):

$$\alpha + \beta \approx \left(\frac{1 - \sin \varphi}{1 + \sin \varphi} \right) (\beta + \mu_b) \quad \text{Eq. 1}$$

55 Where α , β , φ , and μ_b are the surface dip angle, basal dip angle, angle of internal friction, and basal friction
coefficient, respectively. The governing equations of the involved processes in the evolution of fold-and-thrust-
belt systems and their interactions are highly non-linear. Also, the boundary and displacement conditions are not
the same for all cases. These are challenges for the unified analytical approaches, such as the critical taper theory.
Considering the critical taper theory in a system with predefined material properties (constant φ in Eq. 1),
60 increasing basal friction coefficient (stronger décollement) results in a larger taper angle. This system will try to
reach a stable condition through fore-thrust development at the front of the wedge. In contrast, decreasing the
basal friction coefficient (weaker décollement) results in a smaller taper angle. In this system, back-thrusting at
the rear of the wedge tries to increase the taper angle. These relationships been extensively explored through
numerical and analogous sandbox experiments. Numerous factors, including the surface features (Marques and
65 Cobbold, 2006), thickness and strength of the overburden layers (Lohrmann et al., 2003; Teixell and Koyi, 2003),
material deposition or erosion (Cruz et al., 2010; Smit et al., 2010), properties of the basal décollement (Koyi and
Vendeville, 2003; Smith et al., 2003), the presence of weak layers within the rock sequence (Ruh et al. 2012), and
as well as the difference in material strength of the top layers to basal décollement (Couzens-Schultz et al., 2003),
have been identified as influencing factors for the development of back-thrusts (Zhou et al., 2016).
70 Seely (1977) explained the presence of the low basal friction through overpressure development and presence of
weak material in this zone. The idea of back-thrusting in a system with a weak décollement is confirmed through
experimental investigations (Gutscher et al., 2001; Couzens-Schultz et al., 2003; Bonini, 2007). Likewise, (Bilotti
& Shaw, 2005) attributed back-thrusting in the Niger Delta to the low basal friction which is resulting from



overpressure in this zone. Furthermore, the dip angle of the basal décollement can play a role in back-thrusting
75 development. MacKay (1995) examined this parameter and claimed that fore-thrusts develop in a system with a
low basal angle. A system with higher basal angle will therefore favor back-thrusting. Albertz & Sanz (2012) used
numerical simulation to examine fold-and-thrust-belt systems and found that systems with over-consolidated
material involved (high strength materials) resulted in back-thrusting. Their findings suggested that rigid materials
exhibit locally concentrated strain zones, whereas soft materials display diffusive plastic strain behaviour.
80 Similarly, Cubas et al. (2016), by using numerical simulation, mentioned that there is a chance of back-thrusting
in systems with high pre-consolidated material, high basal dip angle, and low basal friction coefficient. Further
numerical investigations by (Del Castello and Cooke, 2007) showed that development of back-thrust requires
more energy than fore-thrust formation and overpressure development in the basal layer enhances the likelihood
of back-thrusting.

85 Nevertheless, the conditions that lead to back-thrusting are not thoroughly examined in detail. Recently, van
Hagke et al. (2023) investigated the friction coefficient and dip angle of the décollement in Columb wedges (a
friction wedge used to convert forces) and observed that back-thrust-dominated wedges tend to develop in
configurations with very low basal dip angle (less than 0.5 degrees) and a low friction coefficient. Increasing the
friction coefficient or dip angle of the décollement causes the development of pop-up structures and finally fore-
90 thrusting may be the dominate deformation style. However, the examination of the real field cases also suggests
that friction and basal décollement angle might not be the only reason behind back-thrusting highlighting the
importance of a more systematic examination of back-thrust development, which addresses the **different affecting**
parameters.

In this context, employing a large strain geomechanical forward modelling scheme combined with dynamic elasto-
95 plastic behavior of the involved materials can offer valuable insights. The elasto-plastic behavior of the soil can
be tracked through the critical state soil mechanics model (Roscoe et al., 1958; Wood, 1990). Models derived
from critical state theory have proven highly successful in describing mechanical behavior of geological
formations such as subduction zones and offshore accretionary prisms systems (Song et al. 2011; Flemings and
Saffer 2018), often achieving this through a finite set of inputs (Albertz & Sanz 2012; Albertz & Lingrey 2012).
100 Thereby, critical state soil mechanics models make a relationship between the porosity changes and variation in
the deviatoric and mean effective stresses through the numerical simulation of the subsurface deformation (Crook
et al., 2006). Incorporation of critical state soil mechanics into numerical geomechanical forward modelling can
help understanding the evolution of complex geological features and has been successfully employed in the past
to study deformation in subduction zones, accretionary prisms (Obradors-Prats et al., 2017; Gao et al., 2018;
105 Nikolinakou et al., 2023) and other compressive geological features (Heidari et al., 2020; Obradors-Prats et al.,
2023).

In the presented study, we narrow our focus to the limited controlling parameters of fore-thrust and back-thrust
development at the frontal part of fold-and-thrust belts by performing a parametric study by the means of
numerical geomechanical forward modelling. Hereby, we assume that a taper has already formed and is advancing
110 over a total timespan of 7 Ma. Our study also considers sedimentation while deformation by modelling a single
depositional event. We use a constitutive law, which resembles critical state soil mechanics (Soft Rock SR3,
Crook et al., 2006) and vary pre-consolidation pressure as proxy for material strength, initial taper dips, friction
coefficient of the décollement, and displacement boundary conditions to investigate their impact on the resulting



shape and orientation of evolving thrusts. A sensitivity analysis is performed on these parameters to assess the
115 influence of them on back-thrust development and the results are discussed in the context of previous studies and
real-world examples.

2 Methodology

In this study, a plane-strain condition is employed to model geomechanical processes through the Elfen software
(Rockfield, 2017). To minimize potential boundary effects from additional sediment loading, a quasistatic
120 criterion is considered during the modelling. Explicit and Lagrangian methods are utilized to discretise the
equations, taking into account the finite strain nature of the system.

2.1 Meshing

Adaptive remeshing is employed to track the large-strain behaviour efficiently within reasonable computational
time. After each calculation step, element distortion in each area is compared with a predefined limit. If the
125 distortion area error exceeds a critical value (here 20), remeshing is initiated, with the mesh size being a non-
linear function of plastic strain through an interpolation function:

- Mesh size = 400m for Plastic strain = 0
- Mesh size = 400m for Plastic strain = 0.1
- Mesh size = 300m for Plastic strain = 0.2
- 130 • Mesh size = 200m for Plastic strain > 0.5

This adaptive remeshing prevents premature termination of the simulation and offers benefits such as reducing
calculation errors, tracking deformation effectively, and accelerating calculations in low-affected areas with
larger-sized elements.

2.2 Model setup and initiation

2.2.1 Geometry

The initial geometry presents the very frontal part of a fold-and-thrust belt in a generalized two-dimensional plane-
strain domain (Figure 1A). In this geometry, six layers (layer 5 at the bottom and layer 1 being the top most layer,
while layer 0 is deposited during the simulation) are distinguished and characterized by homogeneous and
isotropic material properties. The surface angle d of the initial geometry (layer 1) and the angle of the décollement
140 α are varied in this study. The length of the system is 50 km and layer thicknesses are 350m, 500m, 400m,
1000m, $500m + 50km \times (\tan(|\alpha|) + \tan(|d|))$ for layer 5 to 1 respectively. The top surface of layer 0 is flat
and located 11km above the lower boundary of the model. The décollement is defined by a frictional surface
between the upper and lower sections and is placed between layer 2 and 3. The décollement is divided into areas
of different friction by a discontinuity point, as illustrated in Figure 1 (marked with X). The friction coefficient
145 on the right side of the discontinuity point is varied in this study, while the left side is restricted from displacement
(i.e. layer 2 = layer 3).



2.2.2 Displacement conditions


A predefined movement boundary condition is assigned to the right boundary of the system (Figure 1A). In the geomechanical analysis, the only criterion for the displacement rate is the quasistatic condition. This means that the loading is implemented so gently that at each given time step the deformation happens in a static condition and the inertia impacts are negligible. As long as this condition is not violated, the final result remains independent of the displacement rate. The right-hand section of the décollement is vertically constrained to avoid upward motion during the leftward displacement of the upper layers, ensuring no uplift due to vertical relaxation when the overburden load decreases to zero. This assumption causes high plastic strain development in this area during the initialization period, which disappears after horizontal shortening is initiated. Horizontal shortening is modelled with an equal rate displacement rate of layers 2, 1 and 0, whereas layer 0 is deposited after a prescribed time. The left boundary is restricted from horizontal movement. The bottom boundary remains restricted in all directions throughout the simulation (Figure 1A). In addition, we also test an additional boundary condition where movement of the overburden layers along the décollement is fixed to the same rate as the movement of the right-hand side boundary (Figure 1A). This boundary condition has been employed in other experimental and numerical studies (Ruh et al. 2012; Obradors-Prats et al. 2017; v Hagke et al. 2023) and may lead to differences in the style of deformation (Vendeville 1991, 2007; Zhou et al. 2016). We implement the additional boundary condition by applying a constant displacement rate to the bottom surface of layer 2, rightward of the discontinuity point (Figure 1A).

165

2.2.3 Model initiation and key modelling steps

Before horizontal shortening is initiated from the right-hand side of the model, the initial 0.5 million years (Ma) of the simulation are dedicated to allow for gravitational settling of the system (Figure 1B). Hereby, the total initial height of the model will decrease due to gravitational compaction with horizontal stress being allowed to build up following an effective stress ratio $K_0 = \frac{\text{horizontal effective stress}}{\text{vertical effective stress}} = 0.8$. Subsequently, horizontal displacement starts with two different movement rates: 300 m from 0.5 Ma to 1 Ma, followed by 6500 m from 1 Ma to 7 Ma (Figure 1C). Initially, only pure horizontal displacement occurs, representing tectonic convergence. Starting from 5 Ma onward, horizontal displacement is coupled with simultaneous deposition and increased vertical loading to account for additional sedimentary deposition and its impact on deformation evolution (Figure 1D). Additionally, the selection of time steps is crucial for successful simulation runs.

175

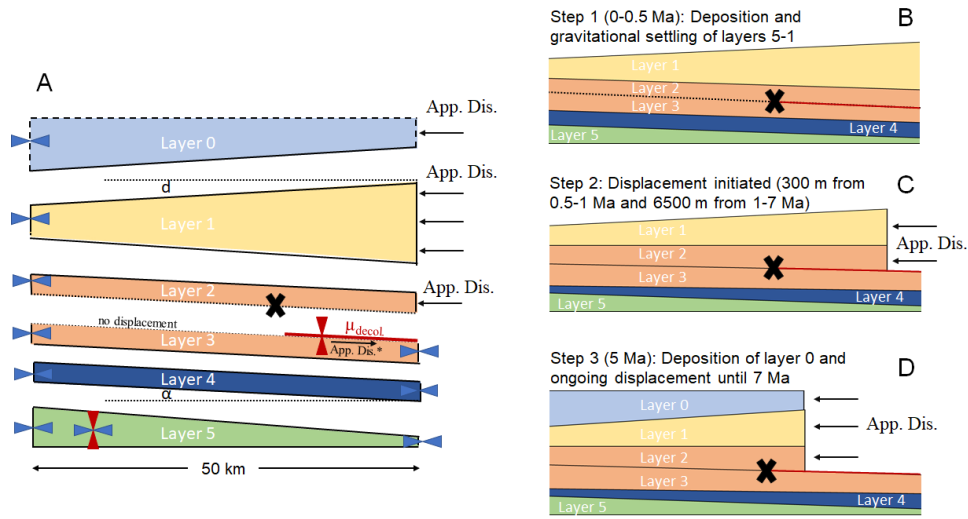

180 **Figure 1: Initial geometry, boundary conditions, displacement and modelling steps which are used during simulation.**
A: Initial model geometry and boundary conditions. $\mu_{\text{decol.}}$ and App. Dis. stands for friction coefficient of the décollement and applied displacement respectively, while α and d shows the dip angle of the décollement and initial taper surface, respectively. App. Dis.* indicates the additionally tested displacement condition where sliding across the décollement is fixed at the same rate as the lateral displacement. **B-D: Key modelling steps with initial gravitational settling (B), displacement at two different rates (C) and deposition of layer 0 (D).**

2.3 Material constitutive behavior and properties

185 We use the SR3 constitutive model (Crook et al., 2006) which is based on critical state soil mechanics (Wood, 1990). Volumetric changes in critical state soil mechanics consider both mean effective stress p and deviatoric stress q in deformation related sediment compaction (Figure 2). Mean effective stress p is calculated as follows:

$$p' = \frac{\sigma'_1 + \sigma'_2 + \sigma'_3}{3} = \frac{\sigma'_h + \sigma'_H + \sigma'_v}{3} \quad \text{Eq.2}$$

190

And deviatoric stress q results from:

$$q = \sqrt{\frac{(\sigma_1 - \sigma_2)^2 + (\sigma_2 - \sigma_3)^2 + (\sigma_3 - \sigma_1)^2}{2}} \quad \text{Eq.3}$$

In equation 2 and equation 3 $\sigma_1, \sigma_2, \sigma_3$ and $\sigma'_1, \sigma'_2, \sigma'_3$ represent the maximum, medium and minimum principal stresses and principal effective stresses, which can be either the minimum horizontal stress σ_h , the vertical stress σ_v or maximum horizontal stress σ_H , respectively.

The SR3 yield surface, is divided by the critical state line into a compaction side representing diffuse strain and a dilation part corresponding to strain localization. The dip angle of the critical state line is calculated as (cf. Gao et al. 2018):


200

$$\eta_{cs} = \tan \beta \left[(n_{sr3} + 1)^{\frac{1}{n_{sr3}}} \right] \quad \text{Eq. 4}$$



Where β is a friction parameter which is closely related to the internal friction angle. Asymmetry behavior of the yield surface is controlled through the n_{SR3} .

205 The yield surface intersects the mean effective stress line at two points which define the tensile intersection (p_t) and the pre-consolidation pressure (p_c) of the material. On the yield surface, porosity is constant and can therefore change both as a function of mean effective stress and deviatoric stress.

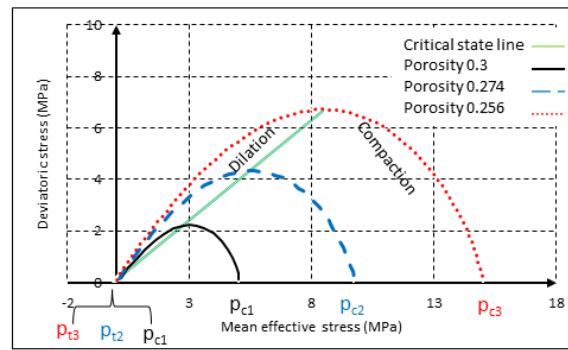

210 **Figure 2: Yield surface in SR3 model (for the case with pre-consolidation pressure of 5 MPa). The blue dashed line and red dotted lines indicate the change of the yield surface with mean effective stress increasing to 10 MPa and 15 MPa, respectively.**

The deformation inside the yield surface follows an elastic behaviour, which is dependent on Young's modulus and Poisson's ratio (ν , constant in this study), and the following equation is utilized to characterize this deformation:

215

$$E = E_{ref} \left[\frac{\sigma_3 + A}{B} \right]^{n_e} \quad \text{Eq. 5}$$

220 Where E , E_{ref} , σ_3 , A , B and n_e shows Young's modulus, reference Young's modulus, the minimum principal stress, 1st material constant, 2nd material constant and shape parameter respectively. In addition, we assign a constant grain density ρ_s to each layer, which constrains vertical stress evolution. Table 1 summarizes all constant material properties and the values used in each layer.

225

Table 1: SR3 material properties for the model layers.

Property	Layer 5	Layer 4	Remaining layers	Units
Reference Young's modulus (E_{ref})	45	25	5	GPa
Poisson ratio (ν)	0.25	0.25	0.25	-
Material constant (A); a constant to ensure smooth transition through near zero effective mean stress	-0.28	-0.28	-0.28	-
Material constant (B); a constant to ensure smooth transition through near zero effective mean stress	-0.28	-0.28	-0.28	-



Grain density (ρ_s)	2700	2700	2400	kg/m^3
Initial pre-consolidation pressure (pc)	Table 2	Table 2	Table 2	MPa
Initial tensile intercept (pt)	$-0.01 \times pc$	$-0.01 \times pc$	$-0.01 \times pc$	MPa
Friction parameter (β in Eq.2)	56	56	56	$^\circ$
Material constant ($n\theta$); E dependency on the minimum principal stress	0.3	0.3	0.3	-
Material constant (n_{ST3})	1.3	1.3	1.3	-

2.4 Sensitivity analysis cases

We investigate the impact of material strength, décollement dip angle and décollement friction on back-thrust development in early (after 2 Ma) and late (after 7 Ma) deformation stages. Hereby, we vary the initial pre-consolidation pressure pc between 5 and 50 MPa and the initial tensile intercept pt as a function of pc with $pt = -0.01 \times pc$ as a proxy for material strength (higher pc = higher material strength). The friction of the décollement (μ_{decol} , on red line to the right of X in Figure 1) is varied between 0 and 0.3. The taper angles (α = dip of décollement; d = initial dip of surface layer 1; cf. Figure 1) are varied between 2° and 6° and 0° and 2° , respectively. In total, the variations of the described parameters result in 36 models, however, 6 models are also run with a controlled displacement rate across the décollement coupled to the lateral displacement rate. Table 2 summarizes all model scenarios.

We then categorize the simulation results after 2 Ma and 7 Ma into the formation of no/negligible (N), weak (Y-W) or strong back-thrusting (Y-S). To do so, maximum effective plastic strain (the plastic component of the rate of deformation tensor) in the back-thrust is used as the criteria for these categories. Maximum effective plastic of 0.1 and 0.5 is used for boundary between N, Y-W and Y-S respectively at early times (2 Ma), while 0.5 and 1 is used at late times (7 Ma).

3 Results

The results of all simulation cases in Table 2, along with the cases involving constant bottom boundary displacement, are analyzed at three timesteps: 2 Ma, 4 Ma, and 7 Ma. Figures of these time steps showing the distribution of plastic strain, horizontal-to-vertical stress ratio σ_{xx}/σ_{zz} , maximum shear stress-to-mean effective stress ratio τ_{max}/p and porosity n for all modelled cases are provided in the supplementary section B. End-member cases are specifically selected for detailed examination.

Table 2: Input parameters and results of the sensitivity analysis. In cases depicted with a star, additional simulations are conducted where the displacement along the décollement is coupled to the lateral displacement rate, which we apply at the right-hand side of the models. The notations Y-S, Y-W, and N represent development of strong, weak, and no or negligible back-thrusts, respectively.


Case #	Model definition				Results	
	Décollement dip α ($^\circ$)	Initial surface (layer 1) dip of wedge d ($^\circ$)	Friction coefficient of décollement μ_{decol}	Material strength / pre-consolidation pressure pc (MPa)	Early (2 Ma) back-thrusting category	Late (7 Ma) back-thrusting category
1 (Figure 3)	6	0	0	2.5	Y-W	Y-W



2*	6	0	0	5	Y-W	Y-W
3*	6	0	0	10	Y-W	Y-W
4 (Figure 4)	6	0	0	50	Y-S	Y-S
5 (Figure 5)	6	0	0.15	2.5	N	Y-W
6*	6	0	0.15	5	N	Y-W
7* (Figure 8)	6	0	0.15	10	Y-W	Y-W
8	6	0	0.15	50	Y-S	Y-S
9	6	0	0.3	2.5	N	N
10	6	0	0.3	5	N	N
11 (Figure 6)	6	0	0.3	10	Y-W	N
12	6	0	0.3	50	Y-S	Y-S
13	4	-1	0	2.5	Y-W	Y-W
14	4	-1	0	5	Y-W	Y-W
15	4	-1	0	10	Y-S	Y-W
16 (Figure 7)	4	-1	0	50	Y-S	Y-S
17	4	-1	0.15	2.5	N	Y-W
18	4	-1	0.15	5	Y-W	Y-W
19	4	-1	0.15	10	Y-S	Y-W
20	4	-1	0.15	50	Y-S	Y-S
21	4	-1	0.3	2.5	N	N
22	4	-1	0.3	5	Y-W	N
23	4	-1	0.3	10	Y-W	N
24	4	-1	0.3	50	Y-S	Y-S
25	2	-2	0	2.5	Y-W	Y-W
26	2	-2	0	5	Y-W	Y-W
27	2	-2	0	10	Y-S	Y-W
28	2	-2	0	50	Y-S	Y-S
29	2	-2	0.15	2.5	N	Y-W
30	2	-2	0.15	5	N	Y-W
31	2	-2	0.15	10	Y-S	Y-W
32	2	-2	0.15	50	Y-S	Y-S
33	2	-2	0.3	2.5	N	N
34*	2	-2	0.3	5	N	N
35*	2	-2	0.3	10	Y-W	N
36	2	-2	0.3	50	Y-S	Y-S

3.1 Material strength (pre-consolidation pressure) p_c

255 Figure 3 illustrates the progressive development of plastic strain and the final values of the σ_{xy}/σ_{zz} and q/p for Case #1, which represents high décollement dip angle, low décollement friction and low material strength (Table 2).

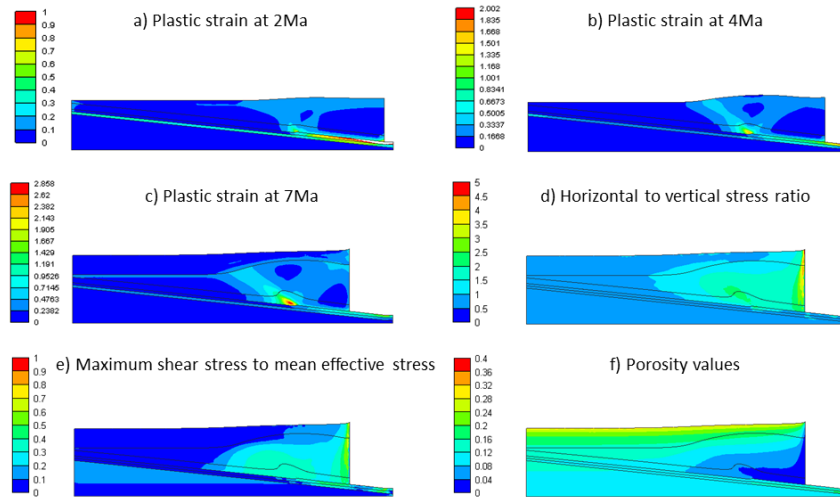

260

Figure 3: Results of Case #1. A-C: Progressive development of plastic strain at 2 Ma, 4 Ma and 7 Ma, respectively. D-F: Distribution of maximum shear stress-to-mean effective stress ratio τ_{max}/p , horizontal-to-vertical stress ratio σ_{xx}/σ_{zz} and porosity n at 7 Ma.

265

In Case #1, due to the assumed zero-friction coefficient along the décollement, fault initiation occurs from the discontinuity point, and up to a certain point, overburden layers slide easily over the décollement. At 2 Ma (Figure 3A), deformation is predominantly diffusive, resulting in a less efficient fore-thrust (it does not reach to the surface). Additional displacement up to 4 Ma (Figure 3B) results in the development of a strong fore-thrust that reaches the surface, accompanied by a weak conjugated back-thrust. From 5 Ma to 7 Ma, simultaneous sedimentation is implemented with displacement. The developed fore-thrust and back-thrust do not extend through the later sedimented materials (Figure 3C). Elevated τ_{max}/p ratio is observed near to the discontinuity point and areas close to the displacing boundary (Figure 3D), while the σ_{xx}/σ_{zz} (Figure 3D) reveals the dominance of horizontal stress in the wedge area. Since porosity is controlled by mean stress and deviatoric stress in critical state soil mechanics, and materials in Case #1 have a low pre-consolidation pressure (weak material), these areas show a higher porosity loss compared to their counterparts at the same depth in the foreland (Figure 3F). Additionally, it should be noted that weak material and a low basal friction coefficient in this scenario result in a low final dip of the wedge surface.

275

280

From Case #1 to Case #4, the initial geometry and friction coefficients on the décollement remain constant, while the pre-consolidation pressure increases from 2.5 MPa in Case #1 to 5, 10, and 50 MPa in cases #2, #3, and #4, respectively (materials become stronger from mechanical point of view). In all these cases, due to the zero-friction coefficient along the décollement, overburden layers slide over the décollement, and thrusting initiates from the discontinuity point. With an increase in material strength, thrusts become more defined. Additionally, the increasing material strength leads to a higher final dip angle of the wedge surface. Moreover, the area with higher σ_{xx}/σ_{zz} increases in size. Comparing Case #1 to Case #2 reveals a more developed back-thrust in the latter. This



285 trend continues, and Case #3 shows a fully developed back-thrust and a weak second back-thrust at a later time. Figure 4 illustrates the results of Case #4, where strong back-thrusts developed.

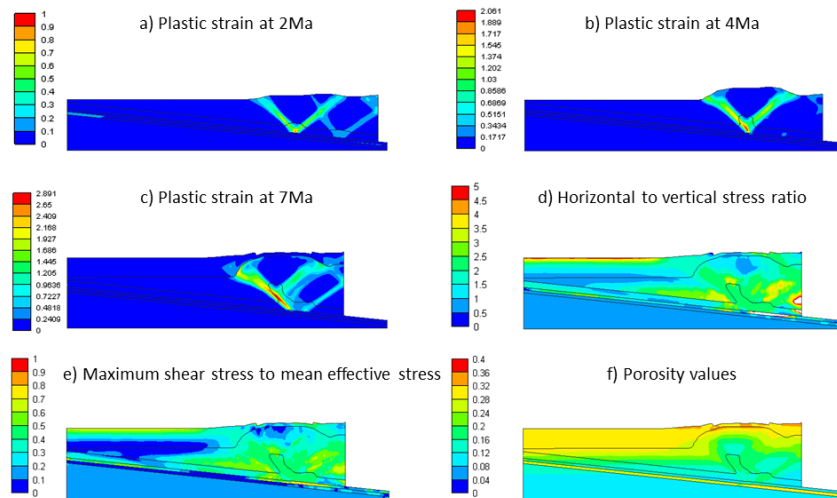


Figure 4: Progressive development of plastic strain and the final values of the σ_{xx}/σ_{zz} , τ_{max}/p and n for the case #4.

290

Case #4 exhibits two sets of conjugated fore-thrust and back-thrust development in early times (Figure 4A-C). Similar behavior is observed in corresponding cases with different dip angles (Case #16 & Case #18). Also, Case #11, #23, and #35 show a similar deformation with weak thrusts, and these are corresponding cases that differ in dip angles as well. As the deformation progresses, one set of these conjugated thrusts develops further, and the other disappears. In late times, two back-thrusts and one fore-thrust are fully developed, and there is a weak back-thrust. High values of τ_{max}/p expand in larger areas of the model (Figure 4D). The σ_{xx}/σ_{zz} is higher than in Case #1 with lower pre-consolidation pressure (Figure 4E). In this case, layers resist porosity loss, and porosity remains high in the thrust area. Areas highly affected by horizontal stress are evident in Figure 4F.

295

3.2 Friction coefficient of the décollement μ_{decol} .


300

Cases #5-8 are similar to cases #1-4, except for an increased friction coefficient of the décollement $\mu_{decol} = 0.15$. The simulation results for Case #5 from this series are depicted in Figure 5A-F. In the early stages, a weak-thrust development near the displacing boundary condition is evident, accompanied by the initiation of a fore-thrust at the discontinuity (Figure 5A-C). It should be noted that in this case, friction along the décollement imposes restrictions on free sliding, resulting in deformations near the displacing boundary condition. As time progresses, the initiation of a weak back-thrust becomes visible near the discontinuity, although it disappears in the late stages. During this period, deformation is primarily controlled by diffusive plastic strain (Figure 5A-C). Notably, the forces required to achieve the same displacement as in Case #1 are higher, leading to increased σ_{xx}/σ_{zz} (Figure 5E). Porosity loss in areas unaffected by thrusting is more pronounced compared to Case #1 (Figure 5F). This pattern is consistently observed across corresponding cases #5-8 and #1-4, with thrusts developed in Cases #5-8 generally exhibiting weaker characteristics. End member of this series (Case #8, highest pre-consolidation pressure

310




$\mu_c = 50$ MPa) exhibits the presence of two fully-developed back-thrusts. In contrast, Case #4 displays two fully-developed back-thrusts alongside a weaker back-thrust.

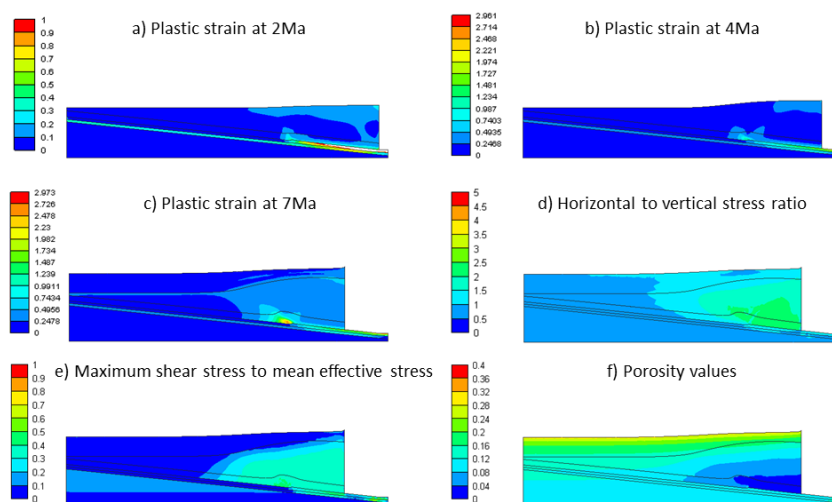

315

Figure 5: Progressive development of plastic strain and the final values of the σ_{xx}/σ_{zz} , τ_{max}/p and n for the case #5.

In Cases #9-12, the friction coefficient of the décollement is further increased to $\mu_{decol} = 0.3$. Within this series, deformation is not restricted to the vicinity of the discontinuity point; also, a significant portion of it occurs near the displacing boundary (Figure 6A-C). This results in a steeper slope of deformation on the surface of the top layer. In contrast to the earlier series (cases #1-4 and #5-8), where fore-thrusting near the discontinuity point led to elevated σ_{xx}/σ_{zz} features dipping towards the top in the direction of fore-thrusting (see Figure 3d-5d), Cases #9-12 exhibit horizontally aligned stress plumes. These cases demonstrate higher porosity loss in weak materials near the displacing boundary. Thrusting in this series is observed to be weaker compared to the previous two sets, and the likelihood of back-thrusting decreases. For instance, Case #10 displays two early-stage fore-thrusts, while Case #2 presents a set of conjugated fore-thrusts and back-thrusts. Figure 6 illustrates Case #11 from this series, clearly demonstrating the influence of the friction coefficient on deformation development near the displacing boundary. It exhibits one fully developed fore-thrust and another in the early stage of development. In contrast, Case #3 shows a fully developed back-thrust and a weak thrust at a later time.

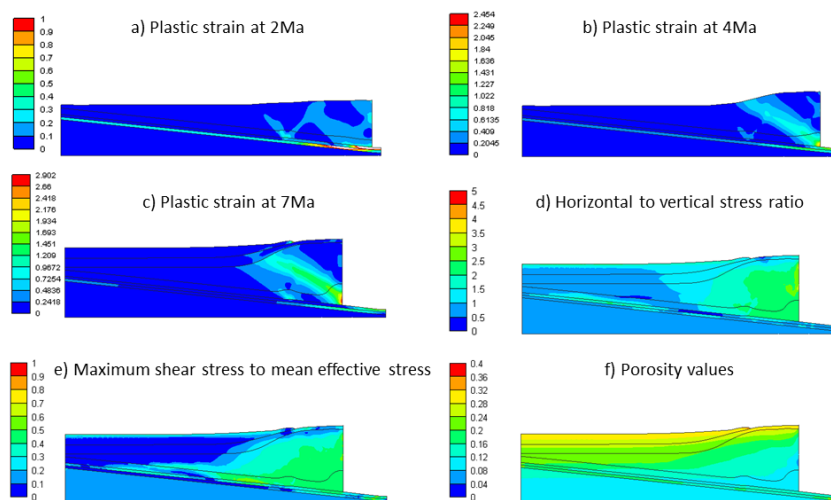


330

Figure 6: Progressive development of plastic strain and the final values of the σ_{xx}/σ_{zz} , τ_{max}/p and n for the case #11.

3.3 Décollement dip angle α

Cases #13-24 were designed to examine the influence of décollement dip angles on deformation. When comparing the deformation results of cases #13-16 with their corresponding counterparts in #1-4, minimal differences are observed in cases with weak material (#1-3 and #13-15). However, significant differences emerge between cases #4 and #16, with strong material. Figure 7 illustrates the deformation progression in Case #16. In comparison to Case #4, it shows three fully developed back-thrusts and a set of conjugated fore-thrusts and back-thrusts at a later time (Figure 7c). Additionally, the σ_{xx}/σ_{zz} is higher near the discontinuity point. Similar behavior is noted for cases in the range of #17-24 when compared to their corresponding cases in #5-12. This implies that cases with weak material exhibit negligible differences, while end members with strong material (cases #20 and #24) display considerable differences in comparison to cases #8 and #12. Notably, back-thrusting in cases #20 and #24 is stronger.

340

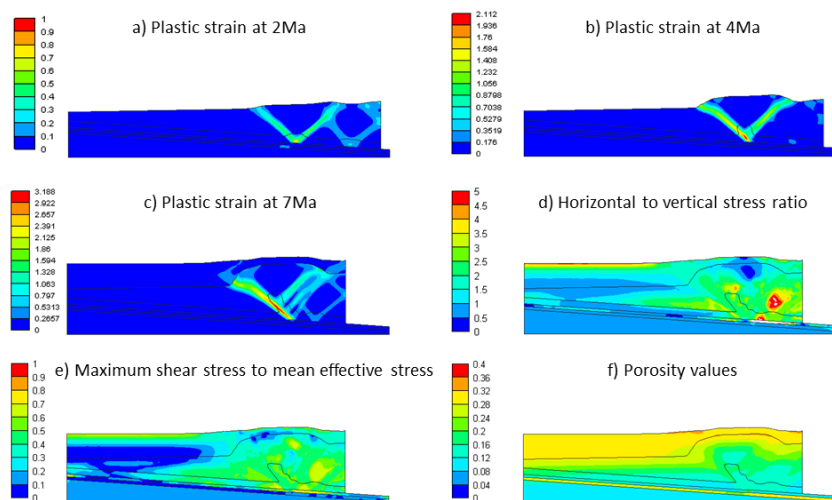

345

Figure 7: Progressive development of plastic strain and the final values of the σ_{xx}/σ_{zz} , τ_{max}/p and n for the case #16.

Cases #25-36 were designed to explore additional dip angle scenarios, wherein the décollement dip angle becomes even smoother, and the dip angle of the top surface becomes even deeper. Similar to Cases #13-24, differences between this series and Cases #1-12 are negligible for weak materials, while for cases with strong material, differences are considerable. Case #28, for instance, reveals one fully developed fore-thrust with two back-thrusts intersecting it. Additionally, there is a set of conjugated fore-thrusts and back-thrusts within the distance between the displacing boundary and the discontinuity point. Cases #8 and #32 exhibit smaller differences. Notably, Case #36 illustrates the thrusts observed in Case #12 at a later time, along with a fore-thrust rooted from the displacing boundary.

355

3.4 Displacing boundary condition

Up to this point, the displacing boundary condition has been exclusively assigned to the right boundary of the overburden layers. To examine the impact of these boundary conditions on deformation development, certain cases (indicated with * in the Table 2) assume that the bottom of the overburden layers on the right section of the discontinuity point moves at the same displacement rate as the side wall. The results for these cases are presented in the Supplementary B, and Case #7* is chosen for discussion as a representative example (see Figure 8). In these cases, a more pronounced back-thrust is observed compared to the developed fore-thrusts. Additionally, the dip of the highly deformed section in layer 2 is oriented towards the top and right, in contrast to the previous boundary condition where it dipped towards the left and top. Furthermore, areas characterized by high σ_{xx}/σ_{zz} and τ_{max}/p propagate farther into the foreland, occupying larger areas. Despite the same material properties, porosity losses are comparable in both situations.

365

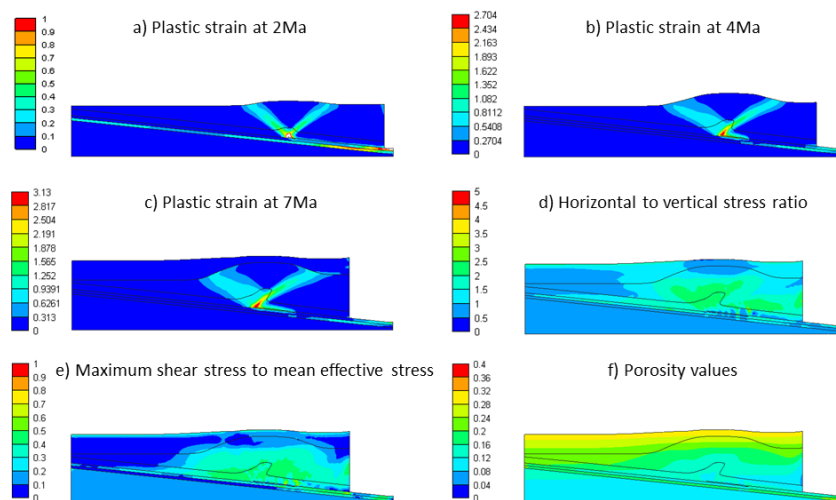


Figure 8: Progressive development of plastic strain and the final values of the σ_{xx}/σ_{zz} , τ_{max}/p and n for the case #7*.

370 4 Discussion

4.1 Impact of material strength

Starting with Case #1, which involves weak material and a low basal friction coefficient, the resulting low dip of the wedge at the surface aligns with critical taper theory. The progressive development of deformation in Case #1 (Figure 3) reveals that thrusting cannot penetrate the late sedimented material. This limitation is explained by the fact that all late sedimented materials can only undergo under-consolidation processes (or follow up the normal consolidation) deformation, confining their behaviour to a ductile manner. In this context and based on the SR3 model, thrusting in these sediments is plausible if other compaction mechanisms than the mechanical one contribute. These compaction mechanisms enhance the strength of the newly deposited material and bring them to the over-consolidated condition (Obradors-Prats et al., 2017).

375 Advancing from Case #1 to Case #4, the pre-consolidation pressure increases. As reported by (Obradors-Prats et al., 2017), in a highly consolidated state, the stress path intersects the yield curve on the shear section. This intersection is crucial for modelling brittle deformation, a form of plastic deformation predictable with Cam clay-type models. Such models result in fast softening materials, eventuate to localization behavior characterized by steep displacement gradients in thin zones of strong plastic strain. Furthermore, in accordance with critical taper theory, the increasing material strength results in a higher dip angle of the surface layer. The increase in the τ_{max}/p brings the system closer to the critical state. Consequently, with the rise in material strength, the areas of material in a critical state increase in size (refer to the figures in the supplementary material). For cases #1-4, where the friction coefficient over the décollement is zero, and in cases with lower displacement resistance at the basal layer/overburden layer interface, a minor rise in shear stress causes deformation at areas close to the discontinuity.

385 Therefore, deformation can happen in distances far away from the displacing boundary. Conversely, in cases with higher resistance to displacement, brittle deformation tends to develop near the moving side walls.

390



4.2 Impact of the décollement friction coefficient

395 As the friction coefficient increases in cases #5-8 and #9-12 in comparison to cases #1-4, the dip angle of the
surface of the top layer increases, a phenomenon previously observed in a study by Gao et al. (2018). The results
of cases #1-12 align with previous studies indicating that low basal friction coefficient facilitates back-thrusting,
while high basal friction coefficient favor fore-thrusts (Seely, 1977; Davis and Engelder, 1985). The models
proposed by van Hagke et al. (2023) also support this notion. van Hagke et al. (2023) noted that low basal friction
coefficient alone is insufficient to systematically describe back-thrusting. Additionally, they highlighted that a
400 very shallow basal dip (less than 0.5 degrees) is necessary for back-thrust dominance. Strong décollements (high
basal friction coefficients), on the other hand, develop increased taper angles, **changing stress field** in a way that
fore-thrusting becomes more favourable. This observation aligns with sand-box experiments in which highly
back-thrusted systems developed **with flat basal** and low basal friction coefficients (Gutscher et al., 2001).
However, other researchers argue that for **the flat** basal décollement, **there is a chance of the dominancy of fore-**
405 **thrusting** (MacKay, 1995; Cotton and Koyi, 2000). The work of fault growth is examined through the experimental
and simulation tools to shed light on this issue (Herbert et al., 2015; McBeck et al., 2017). Results demonstrated
the importance of the height of the sedimented layers and basal features, with fore-thrust slip influencing back-
thrust development. The parametric study by van Hagke et al. (2023) **showed that in flat basal, there is a chance**
of back-thrusting and fore-thrusting and basal friction coefficient controls the dominancy of one of them. They
410 suggest that for the low friction basal, back-thrusting requires lower work than fore-thrusting. Therefore, the
chance of back-thrust dominancy is higher in such systems.

The discovery of back-thrusts dominancy in systems with weak décollement and small dip is intriguing.
Previously it was suggested that back-thrusting chance in high dip basal is higher. Researchers claimed that in
such systems the direction of the maximum component of stress and the basal décollement is close to parallel.
415 **Back-thrust dip is gentle and therefore is easier to be developed (MacKay, 1995; Cubas et al., 2016). It should be**
noted that these studies examine back-thrust dominancy, while the current study aims to identify the conditions
that facilitate back-thrust development. Additionally, there is a difference between the displacing boundary
conditions of the current study and van Hagke et al. (2023). van Hagke et al. (2023) and some other researchers
(such as Obradors-Prats et al. 2017) assumed that the bottom of the top layers is moving at the same displacement
420 **rate as the side wall, while the current study mainly focuses on the side wall displacement. To shed light on the**
impact of the displacing boundary conditions, six additional simulations are run with the moving bottom boundary
of the overburden layers. With these considerations, back-thrusting is observed at a dip angle of 6; however, a
sensitivity analysis is not conducted to find the end member of the dip angle.

4.3 Impact of the décollement dip angle

425 **In analyzing the impact of the taper dip angle, while Case #1-3 and #13-15 exhibit similar deformation patterns,**
Case #4 and #16 display a distinct behavior. In these two cases, the material strength is high (50 MPa), and it
appears that the top layers slide as a single solid part over the décollement. Consequently, the decrease in the dip
angle of the décollement in Case #16 facilitates easier sliding over the décollement, with all restrictions
concentrating on the discontinuity point, resulting in more pronounced deformation for this case. It's noteworthy



430 that the decrease in the dip angle of the décollement favors back-thrusting (as suggested by van Hagke et al.
(2023)), while the dip angle of the top surface restricts back-thrust development (as previously demonstrated that
top surface erosion and flattening facilitate back-thrusting conditions, (McClay, 2011)). Similar to the comparison
of Case #4 & #12, Case #20 and #24 exhibit stronger back-thrusting in comparison to Cases #8 and #12,
respectively. While weak materials are not highly sensitive to the dip angle, the observations thus far lead to the
435 conclusion that decreasing the dip angle of the décollement contributes to facilitating back-thrusting.

**In the next step, the dip angle of the décollement is decreased, while simultaneously the dip of the surface is
increased, and the simulations are run as in Cases #25-36.** Examination of the results indicates that while the
decreasing décollement dip angle helps to enhance back-thrusting, the surface slope (top surface angle of layer 1)
neutralizes some effects, resulting in weaker back-thrusting compared to the corresponding cases in Cases #13-
440 24. With the consideration of the higher surface dip, the system's activity in the hinterland, aimed at bringing the
system to the critical taper state, decreases, leading to a decrease in the chance of back-thrusting.

In this research, the sedimentation and erosion processes are not examined in detail. However, McClay (2011)
highlighted that a model excluding syn-contractual sedimentation or erosion demonstrated a general forward
breaking sequence with simultaneous thrust activity. The inclusion of syn-contractual sedimentation resulted in
445 more extensive wedges characterized by reduced main forward converging thrusts and reduced thrust activities in
the foreland. Conversely, syn-contractual erosion impeded the forward propagation of the deformation front,
decreased quantity of main thrusts, and heightened thrust activities in the hinterland. When combined, the effects
of syn-contractual sedimentation and erosion were found to be complementary. In the case of an eroded wedge
approaching a subcritical taper state, shortening induces internal deformation, which results in a higher surface
450 slope. This adjustment enables the wedge to regain the critical state. The internal structural deformation within
the thrust wedge contributes to an increased wedge thickness in the hinterland and may furthermore favor
processes such as normal faulting in the inner wedge, back-thrust development, thrust reactivation, out-of-
sequence thrust development, or basal accretion through duplexing at the base of the wedge.

4.4 Sensitivity analysis

455 **We rank the classification of back-thrusting from 1 (no back-thrusting) to 2 (weak back thrusting) to 3 (strong
back-thrusting) and calculate the coefficient of correlation between the ranks and the varied input parameters
décollement dip, décollement friction and pre-consolidation pressure (material strength) (Figure 9).** By doing so,
we can quantify that pre-consolidation pressure by far has the largest impact on back-thrust development, both in
early (after 2 Ma) and late (after 7 Ma) years. **Hereby,** the likelihood of back-thrusting increases with increasing
460 pre-consolidation pressure, which we use as a proxy of material strength. Décollement friction is inversely related
to back-thrust development. A weaker décollement increases the likelihood of back-thrust development, again
this effect is slightly more important during the late stage of our simulations. Décollement dip is also inversely
related to back-thrust development, but only has a minor effect, which, in our simulations, only appeared to have
an influence during the early stages of deformation.

465 In summary, back-thrusting occurs if the contrast between the taper strength and décollement strength is high
(taper strength \gg décollement strength). In other words, back-thrusting occurs, if sliding of taper along the
décollement is easy, but the material of the taper is strong and pushes back. Accordingly, fore-thrusting is favored



if sliding of the taper along décollement requires more work than shearing the taper (décollement detaches to new décollement resulting in a fore thrust).

470 Thereby, taper strength increases with its material strength (in our simulations = pre-consolidation pressure). An increase of material strength can be achieved by pre-consolidation by burial and subsequent uplift or exhumation. Deposition of additional sediments during the deformation will increase vertical stress and compaction therefore might also facilitate material strength. In addition, diagenesis can reduce porosity and increase material strength. Décollement strength decreases if the resistance to slide along the décollement decreases, which is achieved if the

475 décollement's friction coefficient and/or dip angle decrease. Factors controlling the décollement's friction coefficient are mainly the presence of low friction minerals such as clay minerals or evaporites (anhydrite, salt), pore pressure and diagenesis (e.g. Lebinson et al. 2020). Décollement dip angle probably is mostly controlled by pre-existing basement topography and the material strength of the footwall. In the course of ongoing deformation, the décollement dip probably loses its relevance to back-thrusting, because once sliding of the taper is initiated,

480 the rate of sliding is likely only a function of the frictional resistance along the décollement.

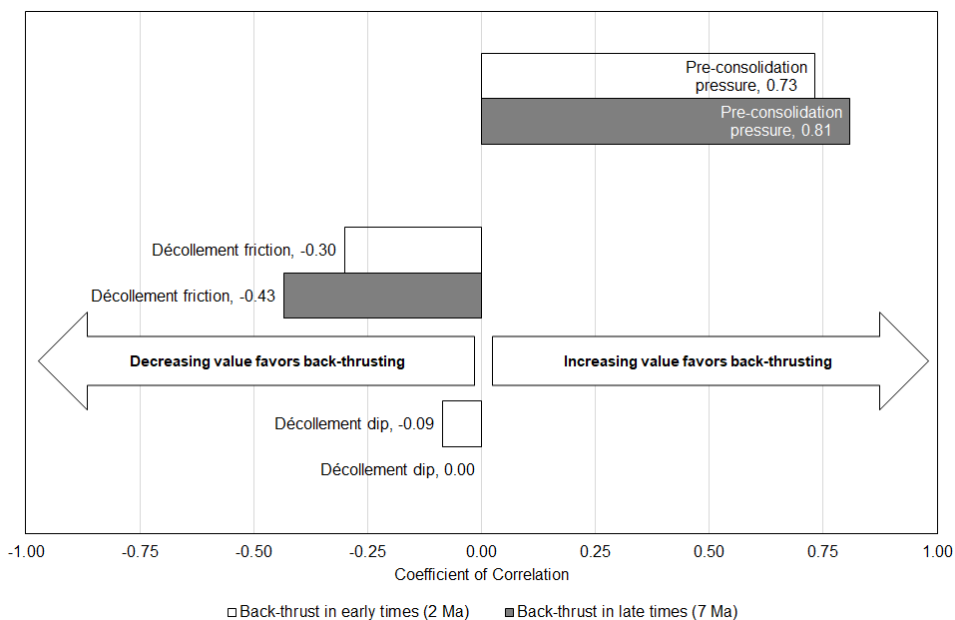


Figure 9: Rank correlation analysis of the tested parameters impacting back-thrusting.

4.5 The role of boundary conditions in modelling back-thrust formation

485 Fore- and back-thrusts are elementary structural components of fold-and-thrust belts and accretionary wedges, their formation has been intensively analyzed using numerical simulation (Buitter et al.; 2016), analogue modelling (Schreurs 2016) and structural field analysis (Lebinson et al. 2020). However, the main research focus has often been on fore-thrust formation as the main mechanism of hanging-wall accommodation. Although back-thrusts are very common in fold-and-thrust belts, they apparently account much less for total shortening compared to fore-

490 thrusts. Buitter et al. (2016) show that in numerical simulation back-thrust formation is often associated with either



a pop-up structure (one fore-thrust vs one back-thrust) or the stacking of fore-thrusts, where a back-thrust forms a steep antithetic ramp during stacking (forethrust >> backthrust); the authors also explain the role of basal friction on back-thrust formation where higher friction results in more fore-thrusts and vice versa (cf. Davis and Engelder (1985)), which is in good agreement with our results. This observation is supported by Maillot & Leroy (2019) who explain how the dip of the ramp in combination with the friction coefficients of shear zones and back-thrusts control back-thrusting. van Hagke et al. (2023) reached similar conclusions in their literature review, highlighting that critical wedge experiments commonly exhibit fore-thrusts, with less frequent documentation of back-thrusting. When back-thrusts are present, they tend to form conjugates to fore-thrusts (Ellis et al., 2004). Field examinations on the fold-and-thrust-belt systems often show dominance of fore-thrusts. Transitions from regions dominated by back-thrusts to those dominated by fore-thrusts can be observed in various geological settings, such as the European Alps (Ortner et al., 2023) or the Niger Delta (Higgins et al., 2009).

The Cascadia fold-and-thrust-belt (USA) could be an example from this category (Gutscher et al., 2001). To gain insights into the conditions leading to stronger back-thrusts than fore-thrusts, this study examines a different type of boundary condition, where the bottom boundary of the overburden layers moves at the same rate as the side boundary across the lower friction décollement. In this scenario, the strongest developed thrust is the back-thrust. In this condition, deformations mainly occur near the discontinuity point. The dominance of the back-thrust is visible in the deformation style which is dipped toward the displacing side wall. However, in the previous cases with only side wall displacing, deformation is dipped in the same direction of the displacement. This variation in the dominance of the back-thrusts or fore-thrusts and the shape of the deformation can be used as valuable insights for assigning the correct boundary condition. Additionally, discrepancies between previous studies can be clarified by examining the differences in their assigned boundary conditions.

A parameter that has been considered only to a minor degree in modeling of back-thrust formation so far is the pre-consolidation pressure (i.e. material strength). Its effect on back-thrust formation apparently predominates other parameters such as basal friction, material properties, or loading, which therefore stresses the need for a better understanding of its significance in geologic settings.

5 Conclusion

This study systematically investigates the results of 42 numerical simulations to changes in material properties, taper angle, friction coefficient, and boundary conditions, with a specific focus on back-thrust development. The results highlight the significance of material strength (as the most important factor) and emphasize the hindering impact of increased friction along the décollement (as the second factor). The taper angles also play a role, with reduced décollement dip angles facilitating back-thrusting while surface dip angles tend to impede this behaviour. The research categorizes scenarios indicating the presence or absence of back-thrusts based on the mentioned sensitivity parameters. Occurrence of back-thrusting depends on the contrast between the taper strength and décollement strength. If sliding of taper along the décollement is easy, but the material of the taper is strong and pushes back, back-thrusting is likely to occur. However, if sliding of the taper along décollement requires more work than shearing the taper the décollement detaches to a new décollement resulting in fore-thrust formation. A



530 constant displacement rate along the décollement as an additional boundary condition increases this effect and
therefore yields more pronounced back-thrust development. Key findings of our research not only confirm
previous studies, with special emphasis on the influence of material strength and basal friction in general. Our
study also provides new evidence and practical rule-of-thumb guidelines to explain and understand the formation
of back-thrusts in the frontal part of fold-and-thrust-belt systems and point at additional studies, which address
535 the effect of pore pressure, diagenesis and sedimentation on the tectonic style of compressive settings.

Competing interests

The contact author has declared that none of the authors has any competing interests.

Acknowledgement

This work was funded by the Bavarian State Ministry of Science and the Arts through the framework of the
540 Geothermal-Alliance Bavaria (GAB). The authors would like to the Rockfield team (especially William Ferguson)
for providing the Elfen software package and technical discussions.

References

- Albertz, M., Sanz, P. F. (2012). Critical state finite element models of contractional fault-related folding: Part 2.
Mechanical analysis. *Tectonophysics*, 150-170
- 545 Albertz, M., Lingrey, S. (2012). Critical State Finite Element Models of Contractional Fault-related Folding: Part
1. Structural Analysis. *Tectonophysics*, 576-577, 133-149.
- Bilotti, F., & Shaw, J. H. (2005). Deep-water Niger Delta fold and thrust belt modeled as a critical-taper wedge:
The influence of elevated basal fluid pressure on structural styles. *AAPG bulletin*, 89(11), 1475-1491.
- Bonini, M. (2007). Deformation patterns and structural vergence in brittle–ductile thrust wedges: an additional
550 analogue modelling perspective. *Journal of Structural Geology*, 29(1), 141-158.
- Brisson, S., Wellmann, F., Chudalla, N., von Harten, J., & von Hagke, C. (2023). Estimating uncertainties in 3-D
models of complex fold-and-thrust belts: A case study of the Eastern Alps triangle zone. *Applied Computing and
Geosciences*, 18, 100115.
- Buiter, Susanne J.H.; Schreurs, Guido; Albertz, Markus; Gerya, Taras V.; Kaus, Boris; Landry, Walter et al.
555 (2016). Benchmarking numerical models of brittle thrust wedges. In: *Journal of Structural Geology* 92, S. 140–
177. DOI: 10.1016/j.jsg.2016.03.003.
- Cotton, J. T., & Koyi, H. A. (2000). Modeling of thrust fronts above ductile and frictional detachments:
Application to structures in the Salt Range and Potwar Plateau, Pakistan. *Geological Society of America
Bulletin*, 112(3), 351-363.
- 560 Couzens-Schultz, B. A., Vendeville, B. C., & Wiltschko, D. V. (2003). Duplex style and triangle zone formation:
insights from physical modeling. *Journal of Structural Geology*, 25(10), 1623-1644.
- Crook, A, J, L., Willson, S, M., Yu, J, G., Owen, D, R, J. (2006). Predictive modelling of structure evolution in
sandbox experiments. *Journal of Structural Geology*, 28, 5, 729-744.



- 565 Cruz, L., Malinski, J., Wilson, A., Take, W. A., & Hilley, G. (2010). Erosional control of the kinematics and geometry of fold-and-thrust belts imaged in a physical and numerical sandbox. *Journal of Geophysical Research: Solid Earth*, 115(B9).
- Cubas, N., Souloumiac, P., & Singh, S. C. (2016). Relationship link between landward vergence in accretionary prisms and tsunami generation. *Geology*, 44(10), 787-790.
- Dahlen, F. A. (1990). Critical taper model of fold-and-thrust belts and accretionary wedges. *Annual Review of Earth and Planetary Sciences*, 18(1), 55-99.
- 570 Davis, D. M., & Engelder, T. (1985). The role of salt in fold-and-thrust belts. *Tectonophysics*, 119(1-4), 67-88.
- Del Castello, M., & Cooke, M. L. (2007). Underthrusting-accretion cycle: Work budget as revealed by the boundary element method. *Journal of Geophysical Research: Solid Earth*, 112(B12).
- Ellis, S., Schreurs, G., & Panien, M. (2004). Comparisons between analogue and numerical models of thrust wedge development. *Journal of Structural Geology*, 26(9), 1659-1675.
- 575 Flemings, P. B., Saffer, D. M. (2018). Pressure and Stress Prediction in the Nankai Accretionary Prism: A Critical State Soil Mechanics Porosity Based Approach. *Journal of Geophysical Research: Solid Earth*, 123 (2), 1089-1115.
- Gao, B., Flemings, P. B., Nikolinakou, M. A., Saffer, D. M., & Heidari, M. (2018). Mechanics of fold-and-thrust belts based on geomechanical modeling. *Journal of Geophysical Research: Solid Earth*, 123(5), 4454-4474.
- 580 Gutscher, M. A., Klaeschen, D., Flueh, E., & Malavieille, J. (2001). Non-Coulomb wedges, wrong-way thrusting, and natural hazards in Cascadia. *Geology*, 29(5), 379-382.
- v Hagke, C., Bauville, A., & Chudalla, N. (2023). Control of décollement strength and dip on fault vergence in fold-thrust belts and accretionary prisms. *Tectonophysics*, 230172.
- 585 Heidari, M., Nikolinakou, M. A., Flemings, P. B. (2020). Modified Cam-Clay model for large stress ranges and its predictions for geological and drilling processes. *Journal of Geophysical Research: Solid Earth*, 125(12), p.e2020JB019500.
- Herbert, J. W., Cooke, M. L., Souloumiac, P., Madden, E. H., Mary, B. C., & Maillot, B. (2015). The work of fault growth in laboratory sandbox experiments. *Earth and Planetary Science Letters*, 432, 95-102.
- 590 Higgins, S., Clarke, B., Davies, R. J., & Cartwright, J. (2009). Internal geometry and growth history of a thrust-related anticline in a deep water fold belt. *Journal of Structural Geology*, 31(12), 1597-1611.
- Hubbert, M. K., Rubey, W. W. (1959). Mechanics of fluid-filled porous solids and its application to overthrust faulting. *Geological Society of America Bulletin*, 70, 115-166.
- Koyi, H. A., & Vendeville, B. C. (2003). The effect of décollement dip on geometry and kinematics of model accretionary wedges. *Journal of Structural Geology*, 25(9), 1445-1450.
- 595 Lebinson, F., Turienzo, M., Sánchez, N., Cristallini, E., Araujo, V., Dimieri, L. (2020). Kinematics of a backthrust system in the Agrio fold and thrust belt, Argentina: Insights from structural analysis and analogue models. In: *Journal of South American Earth Sciences* 100, S. 102594. DOI: 10.1016/j.jsames.2020.102594
- Lohrmann, J., Kukowski, N., Adam, J., & Oncken, O. (2003). The impact of analogue material properties on the geometry, kinematics, and dynamics of convergent sand wedges. *Journal of Structural Geology*, 25(10), 1691-1711.
- 600 MacKay, M. E. (1995). Structural variation and landward vergence at the toe of the Oregon accretionary prism. *Tectonics*, 14(6), 1309-1320.



- Maillot, B., Leroy, Y. M. (2003). Optimal dip based on dissipation of back thrusts and hinges in fold-and-thrust
605 belts. In: *J. Geophys. Res.* 108 (B6), Artikel 2002JB002199. DOI: 10.1029/2002JB002199.
- Marques, F. O., & Cobbold, P. R. (2006). Effects of topography on the curvature of fold-and-thrust belts during
shortening of a 2-layer model of continental lithosphere. *Tectonophysics*, 415(1-4), 65-80.
- McBeck, J. A., Cooke, M. L., Herbert, J. W., Maillot, B., & Souloumiac, P. (2017). Work optimization predicts
accretionary faulting: An integration of physical and numerical experiments. *Journal of Geophysical Research:*
610 *Solid Earth*, 122(9), 7485-7505.
- McClay, K. (2011). Introduction to thrust fault-related folding. The American Association of Petroleum
Geologists.
- McMechan, M. E. (2023). Structural geometry and kinematic evolution of the central Canadian Rocky Mountain
Foothills fold-and-thrust belt: Complex kinematic relationships controlled by detachment utilization. *Geosphere*,
615 19(6), 1690-1708.
- Mugnier, J. L., Huyghe, P., Large, E., Jouanne, F., Guillier, B., & Chakraborty, T. (2022). An embryonic fold and
thrust belt south of the Himalayan morphological front: Examples from the Central Nepal and Darjeeling
piedmonts. *Earth-Science Reviews*, 230, 104061.
- Nikolinakou, M. A., Flemings, P. B., Gao, B., & Saffer, D. M. (2023). The evolution of pore pressure, stress, and
620 physical properties during sediment accretion at subduction zones. *Journal of Geophysical Research: Solid Earth*,
e2022JB025504.
- Obradors-Prats, J., Rouainia, M., Aplin, A. C., Crook, A. J. L. (2017). Hydromechanical modeling of stress, pore
pressure and porosity evolution in fold-and-thrust belt systems. *Journal of geophysical research: solid earth*, 122,
9383-9403.
- 625 Obradors-Prats, J., Calderon Medina, E. E., Jones, S. J., Rouainia, M., Alpin, A. C., Crook, A. J. L. (2023).
Integrating petrophysical, geological and geomechanical modelling to assess stress states, overpressure
development and compartmentalisation adjacent to a salt wall, gulf of Mexico. *Marine and Petroleum Geology*,
155, 106352.
- Ortner, H., von Hagke, C., Sommaruga, A., Mosar, J., Beidinger, A., Hirsch, R. (2023). The deformation front of
630 the alps: in Rosenberg, C. & Bellahsen, M. (Ed.) *The alpine chain*. In: *Earth Sciences (ISTE-Wiley editions)*.
Rockfield (2017). *Elfen explicit manual (Version 4.10)*. Swansea, UK: Rockfield Software.
- Roscoe, K. H., Schofield, A. N., Wroth, C. P. (1958). On the Yielding of Soils. *Geotechnique*, 8 (1), 22-53.
- Ruh, J. B., Kaus, B. J., & Burg, J. P. (2012). Numerical investigation of deformation mechanics in fold-and-thrust
belts: Influence of rheology of single and multiple décollements. *Tectonics*, 31(3).
- 635 Schreurs, G., Buitert, S.J.H., Boutelier, D., Corti, G., Costa, E., Cruden, A.R., Daniel, J.-M., Hoth, S., Koyi, H.A.,
Kukowski, N., Lohrmann, J., Ravaglia, A., Schlische, R.W., Withjack, M.O., Yamada, Y., Cavozzi, C.,
Delventisette, C., Elder Brady, J.A., Hoffmann-Rothe, A., Mengus, J.-M., Montanari, D., Nilforoushan, F. (2006).
Analogue benchmarks of shortening and extension experiments. In: Buitert, S.J.H., Schreurs, G. (Eds.), *Analogue
and Numerical Modelling of Crustalscale Processes*, 253. Geol. Soc., Lond., Spec. Publ, pp. 1e27.
- 640 Seely, D. R. (1977). The significance of landward vergence and oblique structural trends on trench inner slopes.
Island arcs, deep sea trenches and back-arc basins, 1, 187-198.
- Smit, J. H. W., Brun, J. P., & Sokoutis, D. (2003). Deformation of brittle-ductile thrust wedges in experiments
and nature. *Journal of Geophysical Research: Solid Earth*, 108(B10).



- Smit, J., Burg, J. P., Dolati, A., & Sokoutis, D. (2010). Effects of mass waste events on thrust wedges: Analogue
645 experiments and application to the Makran accretionary wedge. *Tectonics*, 29(3).
- Song, I., Saffer, D. M., Flemings, P. B. (2011). Mechanical Characterization of Slope Sediments: Constrains on
in situ Stress and Pore Pressure Near the Tip of the Megasplay Fault in the Nankai Accretionary Complex.
Geochemistry Geophysics Geosystems, 12 (8).
- Teixell, A., & Koyi, H. A. (2003). Experimental and field study of the effects of lithological contrasts on thrust-
650 related deformation. *Tectonics*, 22(5).
- Vendeville, B. C. (1991). Thin-skinned compressional structures above frictional-plastic and viscous décollement
layers. In *Geological Society of America, Abstract with Programs* (Vol. 23, No. 5, p. A423).
- Wood, D. M. (1990). *Soil Behaviour and Critical State Soil Mechanics*. Cambridge University Press.
- Zhou, J., Zhang, B., & Xu, Q. (2016). Effects of lateral friction on the structural evolution of fold-and-thrust belts:
655 Insights from sandbox experiments with implications for the origin of landward-vergent thrust wedges in
Cascadia. *Bulletin*, 128(3-4), 669-683.