

Detection of landslide timing, reactivation and precursory motion during the 2018, Lombok, Indonesia earthquake sequence with Sentinel-1

Katy Burrows^{1,2}, David, G. Milledge³, and Maria Francesca Ferrario⁴

¹Università degli Studi di Milano-Bicocca, Milan, Italy

²European Space Agency (ESA) ESRIN, Frascati, Italy

³Newcastle University, Newcastle upon Tyne, United Kingdom

⁴Università degli Studi dell'Insubria, Como, Italy

Correspondence: Katy Burrows (katyaline.burrows@unimib.it)

Abstract.

Earthquake-triggered landslides can be mapped using optical satellite images, but assessing how they evolve ~~through time during sequences of earthquakes is difficult with such data~~ during earthquake sequences is difficult due to cloud cover ~~-in these data. This information is crucial for understanding their triggering conditions.~~ Here we use Sentinel-1 ~~techniques~~ amplitude and a new, coherence-based method to characterise the evolution of rapid landslides during ~~the an earthquake sequence that occurred over a 23-day period in~~ 2018 in Lombok, Indonesia ~~earthquake sequence. While the majority of .~~ While most new landslides were triggered during the largest earthquake in the sequence on 05/08, we ~~are also able to identify also identified~~ landslide activity associated with other, lower magnitude earthquakes on 28/07, 09/08 and 19/08, with ~~many landslides around half of the landslides studied~~ active in more than one earthquake. In particular, many landslides triggered by the 05/08 earthquake were then reactivated later in the sequence. These reactivations were triggered by accelerations as weak as 0.1g, while new failures generally did not occur below 0.15g, suggesting a post-seismic weakening effect driven by the landslides themselves rather than general landscape weakening. We also identified ~~at least one an~~ example where precursory motion during the first earthquake in the sequence was later followed by larger scale failure. Overall, we demonstrate that, although they are not sensitive to all landslides, Sentinel-1 amplitude and coherence are valuable tools to study how landslide hazard and mass wasting evolve during sequences of triggers.

1 Introduction

Earthquakes can trigger widespread landsliding, which represents a major secondary hazard and ~~can have a significant mass wasting effect~~ source of erosion. As these landslides are often triggered across a large area, remote sensing has emerged as a vital tool to quantify earthquake-triggered landslides (Novellino et al., 2024). In particular, earthquake-triggered landslide inventories are often compiled through manual mapping by the comparison of pre- and post-seismic multi-spectral satellite images (e.g. Ferrario, 2019; Ferrario et al., 2024; Tanyaş et al., 2022; Tiwari et al., 2017) or through automated methods that use these data (Milledge et al., 2022; Scheip and Wegmann, 2021). These inventories can then be used to assess the impacts on

the landscape and the potential for further hazards (Parker et al., 2011; Croissant et al., 2019), to further our understanding of the triggering process, and to build and calibrate physical and empirical models that can then be applied to future earthquakes (e.g. Godt et al., 2008; Nowicki Jessee et al., 2018).

In many cases, landslide-triggering earthquakes are accompanied by foreshocks and aftershocks that are also large enough to trigger landslides and remobilise co-seismic landslide deposits (e.g. Fan et al., 2021; Ferrario, 2019; Ferrario et al., 2024; Martino et al., 2019; Tanyaş et al., 2022; Tiwari et al., 2017). The ~~cumulative effect of evolution of triggered landslides during~~ such earthquake sequences ~~on rapid, shallow landsliding~~ is difficult to study as it requires satellite images to be acquired between each earthquake, but aftershock-triggered landslides can represent a considerable part of the total landslides for some events (Ferrario, 2019; Tanyaş et al., 2022). Unfortunately, in many areas of the world, multi-spectral satellite images are frequently obscured by clouds, preventing their use in landslide mapping for days or weeks at a time (Robinson et al., 2019). This can prevent differentiation between mainshock- and aftershock-triggered landslides and has been identified as a problem in many recent studies, for example on the 2015 M_w 6.9 Gorkha, Nepal; the 2018 M_w 6.9 Lombok, Indonesia; the 2018 M_w 7.5 Papua New Guinea; the M_w 6.8 Cotabato-Davao del Sur, Philippines earthquake sequences (Tiwari et al., 2017; Ferrario, 2019; Tanyaş et al., 2022; Ferrario et al., 2024) (Tiwari et al., 2017; Ferrario, 2019; Tanyaş et al., 2022; Ferrario et al., 2024). In addition, the reactivation or remobilisation late in the earthquake sequence of a landslide that failed early in the sequence may not be visible in medium resolution imagery such as Sentinel-2 or Landsat unless the shape of the scar noticeably changes.

Satellite synthetic aperture radar (SAR) data may offer a solution to this problem as these data can be acquired through cloud cover and are sensitive to cm-scale movements at the Earth's surface including landslides. The Sentinel-1 SAR satellite constellation has acquired data every 6-12 days on two tracks globally since 2015. ~~Recently~~ Differential interferometric SAR (InSAR) techniques such as persistent scatterer interferometry can measure cm-scale deformation at the Earth's surface, but most earthquake-triggered landslides fail too quickly to be measured using InSAR. However, these rapid landslides change the scattering properties and 3D shape of the Earth's surface, altering the amplitude of SAR images and introducing noise in a and coherence of InSAR data. A large number of studies have explored the potential of these for detection of landslides in space (e.g. Burrows et al., 2019, 2020; Ge et al., 2019; Goorabi, 2020; Handwerger et al., 2022; Jung and Yun, 2020; Mondini, 2017; Mondini et al., 2022). ~~Recently~~, several methods have been proposed to use ~~these data to constrain the timings of shallow landslides (Burrows et al., 2022; Deijns et al., 2022; Fu et al., 2024; Wang et al., 2024)~~ coherence or amplitude to constrain landslide timings (Burrows et al., 2022; Deijns et al., 2022; Fu et al., 2024; Wang et al., 2024), taking advantage of the regular image acquisition strategy of Sentinel-1.

Here we apply SAR-based landslide timing methods to a sequence of six earthquakes that occurred over ~~a one-month period~~ 23-days in Lombok, Indonesia in 2018 in order to better characterise landsliding triggered during that event. We ~~also demonstrate that for some landslides, an InSAR coherence matrix approach can be used not only use the amplitude-based method of Burrows et al. (2022) to constrain the failure timing of new landslides, but also to detect.~~ We also explore an approach based on interferometric SAR (InSAR) coherence matrices, a technique that has successfully been applied in landcover mapping (Giffard-Roisin et al. (2022); Jacob et al. (2020), but not yet tested for landslide timing. We found that for some landslides, this method appears to identify multi-stage failure such as reactivations (i.e. complete failure on one date followed by further failure within or connected to the landslide at a later date) and precursory motion (i.e. displacement on one date

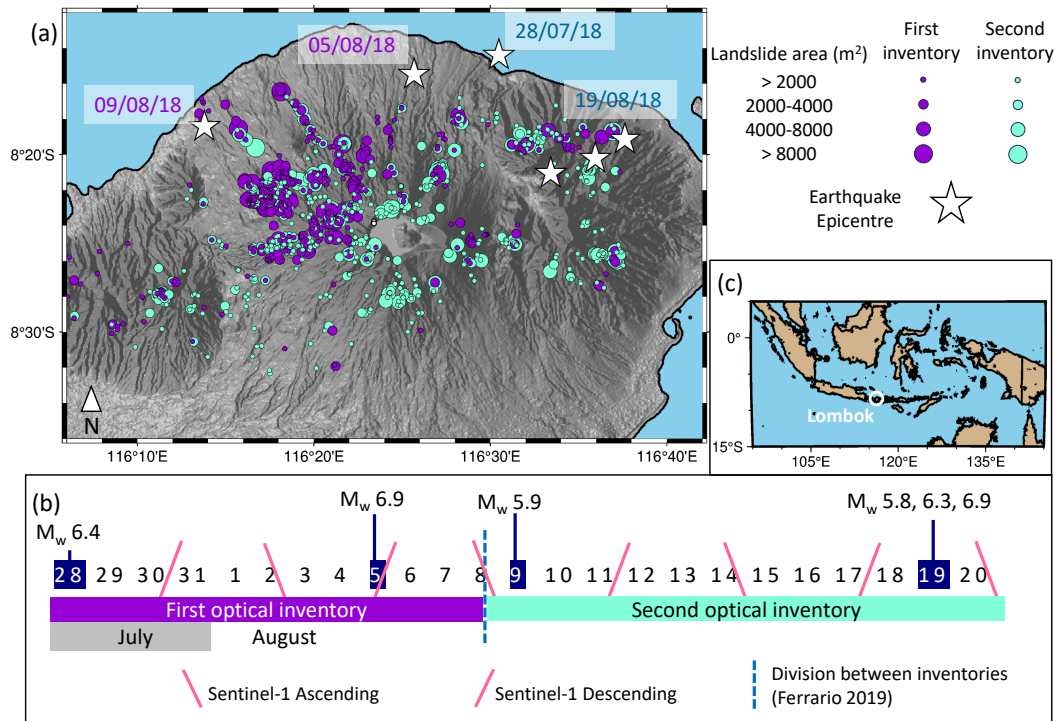


Figure 1. Landslides triggered in the first (greenpurple) and second (yellowgreen) halves of the 2018 Lombok, Indonesia earthquake sequence as mapped by Ferrario (2019) overlain on Sentinel-2 imagery. Epicentral locations from USGS (2018). b) Earthquake dates and Sentinel-1 acquisitions throughout the earthquake sequence in July and August 2018.

followed by complete failure of the same area at a later date). With this new information, we are able to draw conclusions on how landslide activity evolved during the 2018 Lombok earthquake sequence and discuss the implications this has for hazard and mass-wasting during earthquake sequences.

2 Data and Methods

2.1 Landslides triggered by the 2018 Lombok, Indonesia earthquake sequence

The 2018 Lombok, Indonesia earthquake sequence comprised 6 earthquakes of M_w 5.8-6.9 between 28/07/2018 and 19/08/2018 (Fig. ??1). These earthquakes occurred along the Flores Thrust Zone to the north of the island and triggered widespread shallow landslides across this area, particularly on the steep slopes of Mount Rinjani (Ferrario, 2019; Salman et al., 2020). The majority of the study area is covered by tropical forest, with grassland areas at high elevations (>2000 m) and the uppermost part of the volcano covered by unvegetated volcanic deposits (Dossa et al., 2013). The majority of the population live along the coast.

Two landslide inventories have been published for the event, both identifying approximately 10,000 rapid and predominantly shallow landslides by the end of the sequence (Ferrario, 2019; Zhao et al., 2021). Ferrario (2019) also provide an inventory halfway through the sequence using imagery acquired on 08/08/2018, which allows the effects of the two largest earthquakes (both M_w 6.9), which occurred on the 05/08 and 19/08 to be separated. Zhao et al. (2021) provide a full inventory at the end of the sequence but were only able to generate a partial landslide inventory following the earthquake on the 05/08 due to cloud cover in the imagery used in that study. We therefore use the inventory of Ferrario (2019) in this study, which was generated manually through comparison of pre- and post-event PlanetScope satellite images.

In both studies, cloud cover prevented landslide mapping following the first earthquake in the sequence (M_w 6.4 on 28/07), but Ferrario (2019), Zhao et al. (2021) and a preliminary report by Ganas et al. (2018) all agree that few landslides were triggered by this earthquake. The M_w 5.9 earthquake on 09/08, which resulted in relatively weak shaking and would not ordinarily be expected to trigger many landslides (USGS, 2018c) was not included in these studies, but we include it here since similarly low magnitude earthquakes have been shown to increase landslide activity (e.g. Alfaro et al., 2012; Hallal et al., 2024; Martino et al., 2019, 2022). Furthermore, although this event was small in magnitude, it occurred at only 15 km depth and preliminary analysis with SAR appeared to show some landslide activity at this time. Overall, it is expected that the majority of landslides failed during one of the two M_w 6.9 earthquakes in the sequence on the 05/08 and 19/08, particularly the 05/08 event, which resulted in by far the strongest shaking (USGS, 2018b).

Ferrario (2019) mapped 4823 landslides (with a total area of 4.88 km^2) following the 05/08 earthquake ~~and increasing to 9319 (10.25 km^2) at the end of the sequence (Fig. 1a).~~ km^2 following the 19/08 earthquakes (Fig 1a). This change in total area includes landslides polygons mapped on 05/08 that grew in size in the final inventory, indicating landslides that failed more than once during the sequence. The high resolution (3 m) of the PlanetScope imagery used for the mapping means that the inventory includes landslides with areas as small as 50 m^2 . Such small events are unlikely to be resolved by the Sentinel-1 images used here, which have a resolution of $20 \times 22 \text{ m}$ and $60 \times 66 \text{ m}$ for backscatter and coherence images respectively (see Section 2.2–2.3 for details). For this reason, we limit the amplitude analysis ~~in this study to 991 to~~ landslides $> 2000 \text{ m}^2$ (following Burrows et al., 2022) (following Burrows et al., 2022, 991 events) and the coherence analysis to ~~371~~ landslides $> 3600\text{--}3960 \text{ m}^2$ (the size of the coherence window in Sect. 2.32.2, 371 events).

2.2 SAR ~~techniques for rapid landslide detection~~data and processing

~~Shallow earthquake-triggered landslides fail too quickly to be measured using differential InSAR techniques such as persistent scatterer interferometry, which require landslides to move less than a couple of cm between image acquisitions (Maneoni, 2021). However, rapid landslides change the scattering properties and 3D shape of the Earth's surface, altering Sentinel-1 collected images every six days on two tracks throughout the earthquake sequence (Fig. 1b). At least one ascending and one descending track image was acquired between each earthquake (with the exception of the three earthquakes all on 19/08). In both the amplitude and coherence of InSAR data. A large number of studies have explored the potential of these for detection of landslides in space (e.g. Burrows et al., 2019, 2020; Ge et al., 2019; Goorabi, 2020; Handwerger et al., 2022; Jung and Yun, 2020; Mondini, 2017; Mor. Recently, several methods have been proposed to use coherence or amplitude to constrain landslide timings (Burrows et al., 2022; Deijns et~~

105 ~~-, taking advantage of the regular image acquisition strategy of Sentinel-1. Here we use both amplitude and coherence time series to constrain the timings of individual landslides triggered during the analysis, we used images acquired over a 3-month period from 05/06/2018 Lombok, Indonesia earthquake sequence and explore the potential of coherence to detect multi-stage failure~~~
~~05/09/2018. This amounted to 15 SAR images on the descending SAR orbit and 13 on the ascending orbit. Vertically polarised (VV) imagery was used since these data are sensitive to land-cover changes in vegetated areas and have been widely used in coherence- and amplitude-based landslide detection methods (e.g. Burrows et al., 2022; Deijns et al., 2022).~~

The amplitude analysis described in Sect. 2.3.1 uses ground range detected (GRD) images, which were accessed through
110 Google Earth Engine following the method described by Burrows et al. (2022). These data have a resolution of 20 x 22 m and were used to calculate the four metrics listed in Sect. 2.3.1 for every landslide > 2000 m² in the inventory (991 events). For the coherence analysis, Sentinel-1 single-look complex (SLC) images were processed using the GAMMA-based LiCSAR software package Li et al. (2016). SLC images were multi-looked by a factor of five in range, resulting in a resolution of 20 x 22 m (the same as the GRD product). Coherence was then estimated using a 3 x 3 pixel moving window, giving a resolution of 60 x
115 66 m. No atmospheric correction was applied, since interferogram atmospheric effects are larger than the scale at which we processed our data Ding et al. (2008); Webb et al. (2020), and thus do not cause phase variations within the coherence window. The coherence maps were then reprojected from the range-azimuth coordinate system in which SAR data are acquired to a geographic coordinate system. The average coherence within each landslide polygon > 3960 m² (371 events) was then obtained from every coherence map (estimated for every possible combination of SAR images) to generate the full coherence matrix for
120 each landslide.

2.3 SAR techniques for rapid landslide detection

2.3.1 SAR Amplitude

SAR images are acquired by active illumination of the Earth's surface by the satellite using microwave wavelength electro-magnetic energy. The amplitude of the signal returned to the satellite depends on the scattering properties of the material that
125 this energy interacts with at the Earth's surface. The removal of vegetation and movement of material downslope alters these scattering properties as well as the 3D shape of the Earth's surface, giving landslides a signal in SAR amplitude maps (Mondini, 2017).

Two methods have been published that use amplitude data to constrain the timings of shallow landslides. Burrows et al. (2022) used step changes in time series of several amplitude metrics to indicate rainfall-triggered landslide timings. Fu et al.
130 (2024) combined SAR and optical image time series to constrain the timings of 60 landslides, obtaining an average accuracy of around 23 days. ~~Due to prevalent cloud cover in our study area and the fact that the landslides are already somewhat constrained in time since the earthquake timings are known a-priori, we did not expect using optical imagery to offer an advantage here -, so we used the method presented in Burrows et al. (2022). This method~~ The 2018 Lombok, Indonesia earthquake sequence has previously been studied using optical satellite imagery, and it was found that cloud cover during
135 the sequence presented a significant limitation, particularly in differentiating between landslides triggered during the first two

earthquakes (Ferrario, 2019). Therefore, here we use the SAR-amplitude method of Burrows et al. (2022), which uses time series of four metrics: 1) the difference in average SAR amplitude for pixels within the landslide polygon compared to nearby similar “background” pixels; 2) variability between pixels within the landslide polygon; 3) geometric shadows cast by trees at the edge of the landslide polygon; and 4) geometric bright spots caused by dihedral scattering at the edge of the landslide polygon. Burrows et al. (2022) then identified step changes in these metrics and used these to indicate landslide timings. These metrics, particularly those relating to geometric shadows and bright spots, work best in forested areas and can be applied to medium-large landslides ($> 2000 \text{ m}^2$) so that each polygon contains enough pixels to calculate metrics (e.g. pixel variability) and is more sensitive for larger landslides (Burrows et al., 2022).

The method was designed to be applied to rainfall-triggered landslides in monsoon climates where very little prior knowledge on landslide timing would be available. The case of earthquake-triggered landslides is somewhat simpler landslide timing can usually only be constrained to within a few months. Here we modify the method since we can assume that all landslides are concurrent with one of the earthquakes. Therefore, we slightly modify the method to make use of this information. For each of the four metrics m , we calculate the mean sum of the squares of the residuals R if each earthquake is used to divide the time series into two sections Y and Z according to Eq. 1, where $\hat{m}$ represents the median value of m .

$$R = \frac{\sum_{i=1}^{n_Y} (m_i^Y - \hat{m}^Y)^2 + \sum_{i=1}^{n_Z} (m_i^Z - \hat{m}^Z)^2}{n_Y + n_Z} \quad (1)$$

The earthquake that minimises R is selected as the most likely to have triggered the landslide. This is analogous to the approach used in clustering algorithms, where the data is divided in order to minimise within-cluster variance (Duda et al., 1973). This modification resulted in a small improvement in terms of accuracy and the number of landslides whose timing could be constrained compared to the original method (Fig. A1). As in Burrows et al. (2022), the more times an earthquake is selected (out of a maximum of 8: 4 methods x 2 tracks), the more confident we can be of the timing. Here, we require the same earthquake to be selected by a minimum of 3 metrics before it is accepted.

2.3.2 InSAR Coherence

InSAR coherence, which is derived from SAR amplitude and phase, can also be used to detect rapid landslides (Burrows et al., 2019, 2020; Goorabi, 2020; Yun et al., 2015). Coherence γ is a measure of InSAR signal quality that is estimated for every pixel in an interferogram from its similarity to the pixels within a neighbouring window. This is described by Eq. 2 for an interferogram formed from two images A and B and a coherence window containing n pixels. A_i and B_i are complex representations of the phase and amplitude of each pixel i used in the estimation, with the overline representing the complex conjugate.

$$\gamma = \frac{\frac{1}{n} \sum_{i=1}^n A_i \cdot \overline{B_i}}{\sqrt{\frac{1}{n} (\sum_{i=1}^n A_i \cdot \overline{A_i}) (\sum_{i=1}^n B_i \cdot \overline{B_i})}} \quad (2)$$

In general, coherence is high when and where the acquisition conditions for the two images used to form the interferogram are similar. Changes in satellite position or Earth surface properties result in decorrelation. Landslides, along with soil moisture

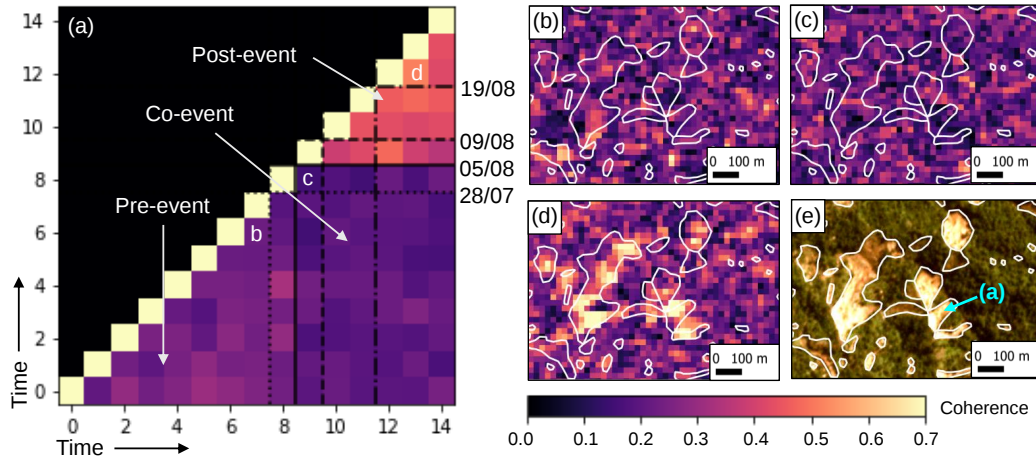


Figure 2. A coherence matrix (a) for a landslide in a vegetated area that failed during the 2nd earthquake (05/08/2018) alongside (b) pre-event (c) co-event and (d) post-event coherence maps for 6-day interferograms and (e) post-event optical satellite imagery (copyright planetlabs). The matrix shown in (a) corresponds to the landslide polygon indicated in blue in (d). The matrix pixel each coherence map (b-d) corresponds to is marked in white on (a) and black lines in (a) show the four earthquake dates in the sequence. Polygons in (b-e) are from Ferrario (2019)

changes, movement of vegetation and other processes that alter the scattering properties of the Earth's surface result in low coherence. Previous works have observed InSAR coherence to (i) decrease for image pairs spanning the occurrence of shallow landslides (Burrows et al., 2019, 2020; Goorabi, 2020; Jung and Yun, 2020; Yun et al., 2015) and other forms of erosion and deposition (Bertone et al., 2019; Cabré et al., 2020, 2023; Liu et al., 1999) (ii) decrease for image pairs that capture precursory motion prior to catastrophic failures (Dini et al., 2022; Jacquemart and Tiampo, 2021) and (iii) increase for interferograms formed from post-event compared to pre-event image pairs due to the denudation of the hillslope by the landslide (Burrows et al., 2020; Deijns et al., 2022). This last effect reflects the strong influence of landcover type on coherence, with vegetated areas generally having a lower coherence than bare rock and soil in Sentinel-1 interferograms (Jacob et al., 2020).

Several studies have attempted to use coherence maps from consecutive pairs of SAR images to constrain landslide timings. The post-event coherence increase caused by hillslope denudation has previously been used to obtain the timings of seven very large ($> 100,000 \text{ m}^2$) landslides (Wang et al., 2024) and to identify the timings of landslide inventories, in the case where it can be reasonably assumed that all the landslides were simultaneous (Deijns et al., 2022). However, Wang et al. (2024) found that the method returned multiple possible failure timings for some landslides. Furthermore, when testing on individual, more moderately sized ($> 2000 \text{ m}^2$) landslides, Burrows et al. (2022) found that pairwise coherence time series were too noisy to provide accurate landslide timings.

In order to improve the signal strength, here we increased the number of coherence maps used in the analysis by calculating the coherence of every possible image pair in our time series. By taking the average coherence within a landslide polygon from every coherence map, we could then produce a full coherence matrix for each landslide (e.g. Fig. ??2a). This allows us to better differentiate between coherence loss due to earthquake-induced landslide activity and coherence loss due to other factors, such

as acquisition geometry. A previous study by Jung and Yun (2020) found this approach to perform poorly in forested areas, but their aim was emergency response, so they only used a single post-event SAR image. Furthermore, the method has been successfully applied to landcover mapping (Giffard-Roisin et al., 2022; Jacob et al., 2020), which suggests it should be able to detect at a minimum the denudation of the hillslope caused by landslides. Finally, ~~since~~ previous studies have shown that coherence is sensitive not only to the denudation of the hillslope that can be captured by the amplitude method described in Sect. 2.2.2.3.1, but also to precursory movements and to movement of material in unvegetated areas (Bertone et al., 2019; Cabré et al., 2020; Dini et al., 2022; Jacquemart and Tiampo, 2021), ~~the full matrix approach~~. Thus, coherence might be able to reveal multiple failure stages, ~~with the matrix approach providing a more reliable indicator of landslide activity than pairwise coherence time series~~.

Figure 2a shows an example of a coherence matrix for a landslide in the Lombok study area that failed during the 05/08 earthquake. This is a square matrix of dimensions defined by the number of SAR images in the times series (e.g. 15 in Fig. 2). Diagonal elements are the coherence of each image with itself (i.e. maximum coherence = 1.0). Lower off-diagonal elements (x,y) record the coherence between the xth and yth image. Thus element (12,3) in Fig. 2a shows coherence between the 12th SAR image (acquired after all earthquakes) and 3rd (acquired prior to all earthquakes). Since the landslide occurred between these two SAR images, coherence is low. Element (13,12) shows coherence between the 12th and 13th SAR images. Since both were acquired after the earthquake sequence had ended, and thus after the landslide had ~~occurred~~ denuded the hillslope, coherence is high. In Fig. 2a, coherence is generally highest whenever both images were acquired after 05/08 (matrix entries above row 9) and lowest for image pairs that span 05/08, with one image before and another after the earthquake (entries right of column 9 and below row 9). Pairs where both images were acquired before 05/08 (left of column 9) typically have intermediate coherence higher than those spanning the earthquake but lower than those after it. Upper off-diagonal elements are left blank because the coherence map for image pair (x,y) and image pair (y,x) will be identical, so these elements would duplicate those already plotted.

Similarly to Sect. 2.2.2.3.1, we can automatically detect when the landslide failed by using each earthquake to divide the matrix into pre-event, co-event, and post-event sections, and identify which division minimises the residuals according to Eq. 1. We found several cases like Fig. 2b-3 where the coherence matrix indicates that a landslide location has failed more than once. In this example, coherence is reduced for image pairs spanning 05/08, but is not consistently high after this event. Instead, coherence is high for image pairs acquired after the 19/08 earthquake and is briefly high at element (11,10), where both images were acquired between the 09/08 and 19/08 earthquakes. This perhaps indicates three failures in this location: first on 05/08, evidenced by reduced coherence for co-event relative to pre-event pairs; then on 09/08, evidenced by lower than expected post-05/08 coherence but high coherence post-09/08 and pre-19/08; and finally on 19/08, evidenced by low co-event and high-post-event coherence. This is supported by multi-spectral satellite imagery acquired over this landslide during the earthquake sequence, in which we first see the loss of vegetation within the landslide scar following the 05/08 earthquake (Fig. 3c) and then see the extent of this denuded area grow following the 19/08 earthquake (Fig. 3d).

To ~~make best use of this information~~ allow for detection of multi-stage landslide failure, we carried out our analysis in two separate stages: first ~~with the~~ identifying the first failure timing that minimises the residuals (Eq. 1) when dividing the pre-event

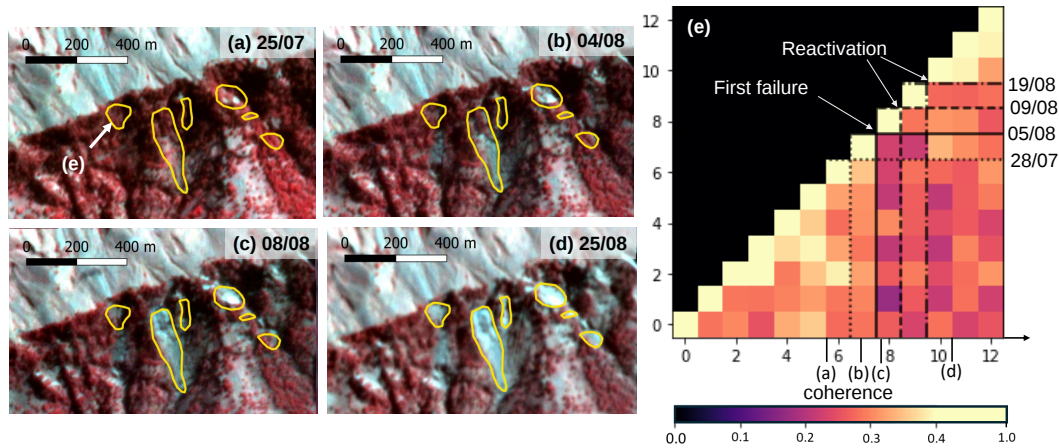


Figure 3. False colour composite multi-spectral satellite images acquired (a) prior to the earthquake sequence (b) after the 28/07 earthquake (c) after the 05/08 earthquake and (d) at the end of the sequence (copyright planetlabs with polygons from Ferrario (2019)) alongside a coherence matrix (e) that appears to show an initial failure during the 05/08 earthquake and then reactivation during the 09/08 and 19/08 earthquakes. Black lines in (e) show the four earthquake dates in the sequence. The landslide polygon corresponding to the coherence matrix is indicated in white on panel (a)

and co-event image pairs ~~to identify the first failure and then~~ and then repeating this with the co-event and post-event image pairs to identify the final failure timing. In order to estimate the quality of the selected division, we calculated the standard deviation of pixels in the co-event area and then calculated how many standard deviations apart the co-event and pre-event or post-event sections were. In the case where the ascending and descending tracks select different timings, we choose the one with the largest separation between the sections. We chose a minimum threshold of 1.5 standard deviations in order to maximise the accuracy of the method. Raising this threshold beyond 1.5 reduced the number of timed landslides without improving the accuracy (Fig. A2).

Coherence matrices for (a) a landslide in a vegetated area that failed during the 2nd earthquake (05/08/2018) (b) a landslide in an unvegetated area that initially failed during the 2nd earthquake (05/08) and then reactivated during the 3rd and 4th earthquakes (09/08 and 19/08). Black lines show the four earthquake dates in the sequence.

2.4 SAR data and processing

Sentinel-1 collected images every six days on two tracks throughout the earthquake sequence (Fig. ??b). At least one ascending and one descending track image was acquired between each earthquake (with the exception of the three earthquakes all on 19/08). In both the amplitude and coherence analysis, we used images acquired over a 3-month period from 05/06/2018 – 05/09/2018. This amounted to 15 SAR images on the descending SAR orbit and 13 on the ascending orbit.

The amplitude analysis described in Sect. 2.2.1 uses ground range detected (GRD) images, which were accessed through Google Earth Engine following the method described by Burrows et al. (2022). These data have a resolution of 20 x 22 m and were used to calculate the four metrics listed in Sect. 2.2.1 for every landslide $> 2000 \text{ m}^2$ in the inventory (991 events). For the coherence analysis, Sentinel-1 single-look complex (SLC) images were processed using the GAMMA-based LiCSAR software package Li et al. (2016). SLC images were multi-looked by a factor of five in range, resulting in a resolution of 20 x 22 m (the same as the GRD product). Coherence was then estimated using a 3 x 3 pixel moving window, giving a resolution of 60 x 66 m. No atmospheric correction was applied, since interferogram atmospheric effects are larger than the scale at which we processed our data Ding et al. (2008); Webb et al. (2020), and thus do not cause phase variations within the coherence window. The coherence maps were then reprojected from the range-azimuth coordinate system in which SAR data are acquired to a geographic coordinate system. The average coherence within each landslide polygon $> 3600 \text{ m}^2$ (371 events) was then obtained from every coherence map (estimated for every possible combination of SAR images) to generate the full coherence matrix for each landslide. For this reason, we do not obtain timing information for all landslides.

2.4 Validation of SAR methods against optical satellite images

In Sect. 3, we present order to validate the landslide timing ~~results obtained from the SAR amplitude and coherence methods described in Sect. 2.2. In order to validate these results~~ information derived from SAR, we compare with the timing information that can be obtained from optical and multi-spectral images acquired during the earthquake sequence. This process is complicated by two factors.

First, while our SAR methods have sufficient temporal resolution to assign a failure to a specific earthquake, this is not possible using optical images in all cases due to cloud cover. The inventories of Ferrario (2019) were generated using imagery acquired after the earthquakes on 05/08 and 19/08, meaning that every landslide can be assigned to either the first or second half of the sequence. In ~~some cases, we were then able to further constrain the timing using areas that were~~ cloud-free areas of multi-spectral in Planet, Sentinel-2 and Planet images and high-resolution optical images in Google Earth Explorer, or Google Earth images acquired between the 28/07 and 05/08 or the 09/08 and 19/08, we were able to carry out a more precise validation, but for around a third of the landslides, this was not possible.

Second many landslides fail more than once during the sequence. To identify multi-stage landslides in the optical satellite imagery, we initially compared the areas of polygons from the 05/08 and 19/08 inventories that overlapped and classed those which had increased in size between the two earthquakes as “multi-stage”. Where this was possible, we then used the Sentinel-2 and Google Earth images to further constrain these changes in time. Landslides showing only small increases in area ($< 100 \text{ m}^2$) and cases where landslides were mapped as multiple polygons in one inventory but a single polygon in the other, were not classed as “multi-stage” as these differences could have arisen from differences in the images rather than landslide reactivation. We also observed a small number of cases where the failed area after 28/07 or 05/08 in Sentinel-2 or Google Earth was better ~~fitted-delineated~~ by the 19/08 polygon than the 05/08 polygon in the inventories of Ferrario (2019). These cases were also not classed as multi-stage, since the discrepancy between the two inventories seems more likely to have arisen from mapping uncertainty (e.g. due to shadow in the Planet imagery) than from reactivation. Finally, we identified some cases of landslides

270 initiating on 28/07 and growing in size on 05/08, which were not initially classed as “multi-stage” because Ferrario (2019) did not map landslides between these two earthquakes.

Since both optical and SAR data can therefore yield multiple failure stages for a given landslide, a comparison between these two might agree, disagree or partially agree -(i.e. in the case of multi-stage failure, agree for one detected failure timing, but not for another). Most statistical measures of performance, such as confusion matrices do not allow for partial agreement.

275 Therefore, for landslides showing more than one failure in the optical data, we compare the SAR timings against the optical result that seems the most relevant in each case. SAR timings derived from amplitude (Sect. 2.22.3.1), which primarily detect denudation of the hillslope were assessed against the timing of the largest failure by area in the optical images (referred to as the "main" failure). First and final failure timings derived from InSAR coherence (Sect. 2.22.3.2) were compared against the first and last visible failures in the optical satellite imagery.

280 **2.5 Landslide triggering condition datasets**

Using the information on landslide evolution through time derived from SAR, we were able to consider the conditions under which new landslides and reactivations were triggered (Section 4.1). For this analysis, estimates of PGV experienced during each earthquake were obtained from the USGS Shakemap webpage (USGS, 2018a, b, c, d). For 19/08, we took the maximum PGV experienced by each landslide during the M_w 5.8, 6.3 and 6.9 earthquakes. In the majority of cases, this was the PGV of

285 the M_w 6.9 earthquake. Slope was calculated from the 30 m Copernicus digital elevation model in Google Earth Engine and the maximum value was taken within each landslide polygon.

The landslide probability under these conditions can be estimated with the logistic regression model of Nowicki Jessee et al. (2018) using regression coefficients derived in that study for a global database of landslides. For lithology, we used the coefficient derived for intermediate volcanics, which comprise the majority of the study area according to the global lithological map

290 of Hartmann and Moosdorf (2012) and for landcover, closed deciduous forest, which is the landcover type shared by most of the landslides (Dossa et al., 2013). Although lithology and landcover also affect landslide susceptibility, we do not attempt to control for these: lithology does not vary much across the study area, particularly since many new landslides and reactivations occur on the same scars and so at the same locations. Differences in landcover between landslides is too difficult to account for since the landslides themselves mean that it changes through time.

295 **3 Results**

3.1 Detection of landslide timings from SAR amplitude

After applying the SAR amplitude methods described in Sect. 2.22.3.1, we were able to constrain the timings of 307 of the 991 landslides larger than 2000 m². As the amplitude methods primarily detect denudation of the hillslope, for landslides that undergo multi-stage failure, we expect the amplitude-derived timing to represent the main failure. Of these 307 landslides, 10

300 were assigned to the 28/07 earthquake, 269 to 05/08, 16 to the 09/08 and 12 to the 19/08. The timings that these 307 landslides

Table 1. A comparison between timings derived from optical and SAR amplitude satellite data with each cell containing the number of landslides associated with a particular trigger. Cells where the two methods agree are given in bold font. Where possible optically mapped landslides were assigned to a causative earthquake (date columns) otherwise they are assigned to either 1st or 2nd half of the earthquake sequence (final two columns). The multi-stage failure timing derived from optical satellite imagery refers to the largest failure when compared to timings derived from SAR amplitude and to the first and last visible change when compared to first and last failure timings derived from InSAR coherence respectively

		Timing from Optical imagery											
		Single Failure						Multi-stage failure					
		28/07	05/08	09/08	19/08	1 st half	2 nd half	28/07	05/07	09/08	19/08	1 st half	2 nd half
Timing from	28/07	0	3	0	0	3	0	3	1	0	0	0	0
SAR amplitude	05/08	0	123	0	0	43	10	0	59	0	1	18	15
	09/08	0	2	3	0	3	3	0	2	0	1	0	5
	19/08	0	0	0	1	0	9	0	0	0	1	0	1
First failure	28/07	0	0	0	0	0	3	5	8	0	0	3	0
timing from	05/08	0	20	0	0	2	1	0	14	0	0	3	0
InSAR	09/08	0	0	0	0	0	0	0	0	0	0	0	0
coherence	19/08	0	0	0	1	0	1	0	0	0	0	0	0
Last failure	28/07	0	2	0	0	0	1	0	0	0	0	0	1
timing from	05/08	0	68	0	0	5	1	0	5	0	7	0	11
InSAR	09/08	0	10	0	0	0	3	0	0	0	5	0	12
coherence	19/08	0	22	0	7	0	6	0	0	0	15	0	32

were expected to have based on optical imagery (Sect. 2.4) are shown in Table 1. Cells for which the two datasets agree are in bold. Altogether, the optical and SAR timings agree for 269 (88%) of the landslides. Single failures had a higher rate of agreement (91%) than multi-stage (81%). In Sect. 2.2.3.1, we required a minimum of 3 SAR amplitude metrics to select the same timing before it was accepted. Burrows et al. (2022) found a similar accuracy (>90%) when imposing this requirement and testing on three landslide inventories of known timing. However, the proportion of landslides timed in this study (30%) is much higher than Burrows et al. (2022) were able to time at this level of accuracy (5-10%). Some of this improvement may be due to the modification made to the method (Sect. 2.2.3.1, Supplementary information), but it is also likely to be due to the tropical rainforest that covers most of our study area, since Burrows et al. (2022) found their method performed best in heavily vegetated areas.

3.2 Detection of first and last failure timings from InSAR coherence

We were able to detect the first failure for 61 of the 371 landslides larger than ~~3600-3960~~ m² using the coherence matrix approach described in Sect. 2.2.3.2. ~~Of these, 19 initiated during the earthquake on 28/07, 40 on earthquake in 19 cases (31%), 05/08, none on 09/08 and 2 on 19/08. 08 in 2 cases (3%).~~ The SAR and optical timings

agree for 49 out of 61 landslides (80%, Table 1). For the 12 cases for which the optical and SAR disagree, the coherence matrix
315 assigns an earlier first failure than the optical.

We were able to detect the last earthquake a landslide failed in for 213 of the 371 events. This was the 28/07 earthquake in
4 cases (2%), 05/08 in 97 cases (46%), 09/08 in 30 cases (14%) and 19/08 in 82 cases (38%). This last failure timing refers to
the point after which there was no further failure by the end of our study on 5th September, so may correspond to a reactivation.
Overall, the ~~two timings agree~~ final failure timing agrees with the optical imagery for 153 of the 213 landslides (72%, Table
320 1). Of the 60 cases where the two timings do not agree, 32 are landslides that were mapped as failing only on 05/08 by the
optical imagery, but have been assigned a later final failure by the InSAR coherence. Thus, the coherence method has detected
reactivations that are not visible in the optical imagery. There is no way to further validate whether or not these were real events
without additional data. Another 20 of these 60 are landslides that were considered “multi-stage” based on optical imagery,
having failed for the first time on 28/07 or 05/08 and grown in size by the end of the sequence, but which were assigned a final
325 failure timing of 28/07 or 05/08 based on the InSAR coherence matrix. These are thus cases where the coherence has failed to
detect reactivations that were expected based on the optical data. ~~Possible explanations of the disagreement between~~

If the optical data is assumed to be correct, the accuracy of the InSAR coherence methods thus appears to be 72-80%.
However some cases where the optical and InSAR coherence results are discussed SAR disagree may be due to differences in
what the two datasets are sensitive to. This is explored further in Sect. 4.4. Overall, the coherence matrix approach appears to
330 perform well, although relatively few landslides can be timed using it compared to the amplitude methods, in part due to the
larger landslide size required for the coherence analysis. Within the landslides examined, larger landslides were more likely
to be assigned a timing by the InSAR coherence methods than smaller landslides. The inventory of Ferrario contained 87
landslides > 10000 m², 38 in the range 8000-10000 m², 75 in the range 6000-8000 and 171 in the range 3960-6000 m² of
which 70 (80%), 25 (66%), 46 (61%) and 86 (50%) were assigned a timing respectively.

335 3.3 Combination of amplitude and coherence to detect multi-stage failures and reactivations

Altogether for the 371 landslides > ~~3600~~ 3960 m², we derived the timing of first failure for 61 landslides and of the final failure
for ~~214~~ 213 landslides based on the coherence matrices. From the amplitude methods, we have timing information for 170
landslides > 3960 m², which we interpret as the “main” failure (whenever the most substantial denudation of the hillslope took
place, since this is what the amplitude methods detect). How the timing datasets derived from coherence and amplitude overlap
340 is shown in Fig. ~~3f~~ 4f. Overall, 258 of the 371 landslides are timed by at least one method, and 158 of these are timed by more
than one method.

For 48 landslides, we obtained both the first and final failure timings from the InSAR coherence matrices. In 24 cases
(50%), the two timings were the same, indicating a single period of failure. For 6 cases (13%), the first and final failures were
associated with consecutive earthquakes. For 18 cases (38%), at least one additional earthquake occurred between the first
345 and final detected failures. In these cases, we were able to visually inspect the matrix and identify that all 18 landslides were
reactivated more than once, with 6 landslides (13%) active in all 4 earthquakes ~~-(See Fig. 3 for an example).~~

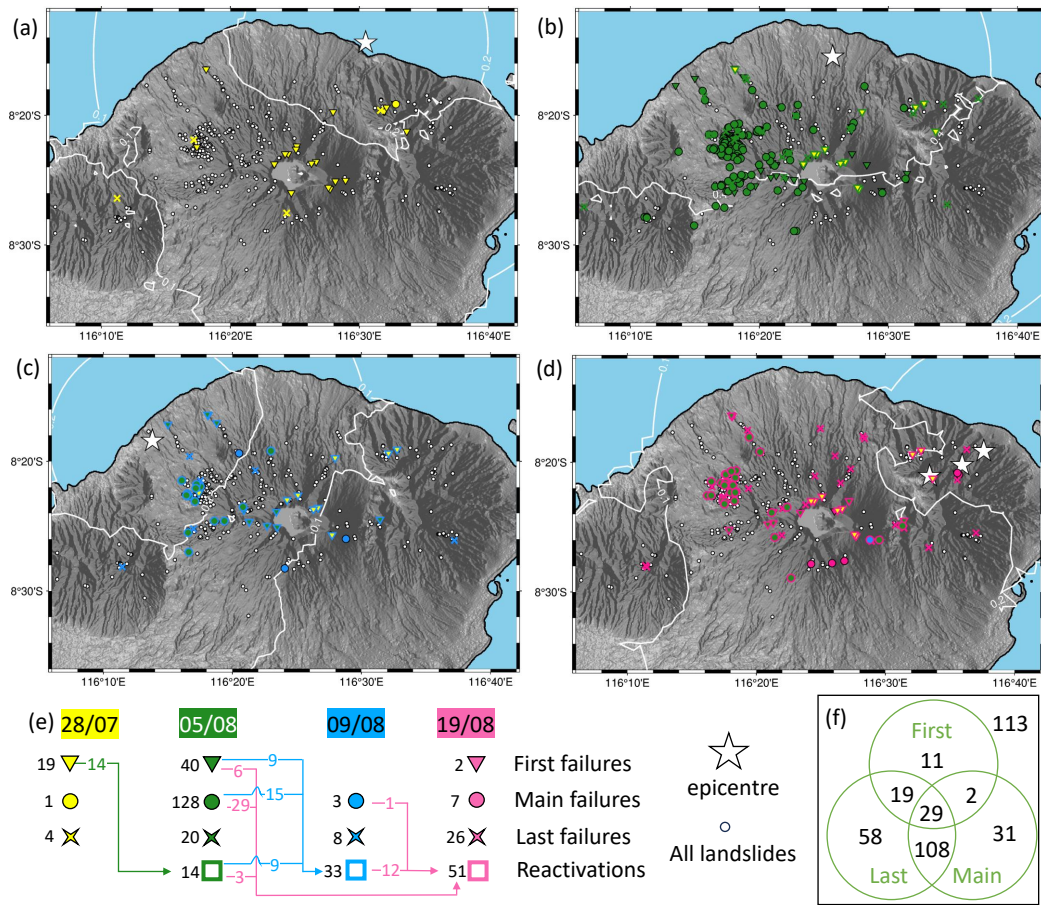


Figure 4. a) Landslides and reactivations timed with SAR following each earthquake in the sequence. Where first failure timing was available from coherence, this was plotted in preference over main failure. Last failures are only plotted when neither first nor main failure timings were available (since these would otherwise be reactivations). Reactivations are shown as highlights on the original failure. Modelled PGA contours of 0.1g, 0.2g and 0.4g from USGS (2018a-d) are plotted as white lines. e) the number of each failure type after each earthquake with coloured arrows showing reactivations f) distribution of timing information available from SAR for the 371 landslides $> 3600-3960 \text{ m}^2$

Although our amplitude methods provide only a single failure timing, they allow us to identify more examples of reactivations. When we have a main failure timing that is later than the coherence-based first failure, we can interpret the main failure as a reactivation (4 cases). When we have a main failure timing that is earlier than a coherence-based final failure, we can interpret this final failure as a reactivation (45 cases). Reactivations are shown in Fig. 3-4 as coloured outlines around the original failure and by coloured arrows in Panel e. Landslide activity (derived from any method) was observed for a total of 259 landslides (Panel f) with activity at 24 sites (9%) on 28/07, 203 sites (78%) on 05/08, 44 sites (17%) on 09/08 and 86 sites (33%) on 19/08. These percentages total over 100% because some landslides are active in multiple earthquakes. In fact,

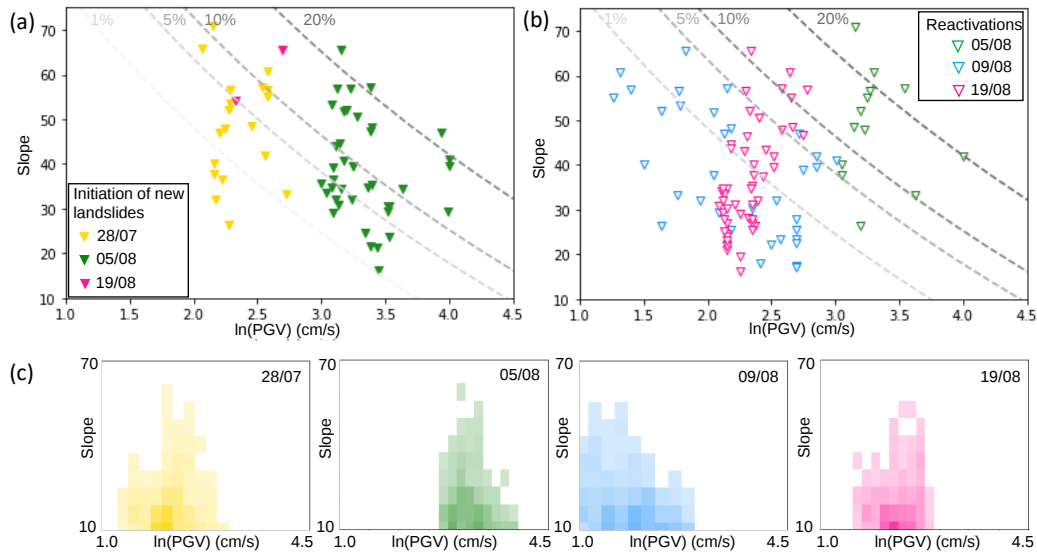


Figure 5. PGV and slope steepness at which (a) new landslides and (b) reactivations were triggered during the 2018 Lombok earthquake sequence. Dashed lines show the landslide probability under these conditions according to the empirical model of Nowicki Jessee et al. (2018) (c) 2D histograms of Slope and PGV ~~across the study area~~ during each earthquake. Darker tones indicate a higher prevalence across the study area

reactivations made up the majority of the detected activity for the 09/08 and 19/08 events, 75% and 59% respectively (Panel e).

4 Discussion

4.1 Triggering conditions for new landslides and reactivations

The landslide timing dataset we have generated allows us to make comparisons between the conditions required to trigger new landslides and those required to reactivate existing landslides. The occurrence of earthquake-triggered landslides is primarily controlled by topography and ground shaking (Nowicki Jessee et al., 2018). Figure 4-5 shows the peak ground velocity (PGV) and slope at which new failures (Panel a) and reactivations (Panel b) occurred during the earthquake sequence. ~~Estimates of PGV experienced during each earthquake were obtained from the USGS Shakemap webpage (USGS, 2018a, b, c, d). For 19/08, we took the maximum PGV experienced by each landslide during the M_w 5.8, 6.3 and 6.9 earthquakes. In the majority of cases, this was the PGV of the M_w 6.9 earthquake. Slope was calculated from the 30 m Copernicus digital elevation model in Google Earth Engine and the maximum value was taken within each landslide polygon.~~

~~The landslide probability under these conditions can be estimated with the logistic regression model of Nowicki Jessee et al. (2018) using regression coefficients derived in that study for a global database of landslides. For lithology, we used the coefficient~~

derived for intermediate volcanics, which comprise the majority of the study area according to the global lithological map of Hartmann and Moosdorf (2012) and for landcover, closed deciduous forest, which is the landcover type shared by most of the landslides (Dossa et al., 2013). Although lithology and landcover also affect landslide susceptibility, we do not attempt to control for these: lithology does not vary much across the study area, particularly since many new landslides and reactivations occur on the same scars and so at the same locations. Differences in landcover between landslides is too difficult to account for since the landslides themselves mean that it changes through time.

Reactivations occurred at lower PGV and slope than new failures and a large proportion of reactivations occurred in locations where the model of Nowicki Jessee suggests less than 1% probability of landslides (Fig. 4b5b). While the initiation of new landslides at the beginning of the sequence (28/07) occurred at PGV as low as 2.5-2.1 cm/s (PGA as low as 0.15g, Fig. 3a4a), this was mostly confined to slopes steeper than 35° (Fig. 4a5a). Later in the sequence, landslides on similarly steep slopes were reactivated at PGV as low as 1.5 cm/s during the earthquake on 09/08, while PGV values around 2.5 cm/s were sufficient to reactivate landslides on slopes shallower than 20° (Fig. 4b5b). New landslides initiating at such shallow slope angles were only observed for the earthquake on 05/08, where the majority of landslides were triggered at PGV > 3 cm/s (PGA > 0.4g, Figs. 4a,3b)-5a,4b). This observation primarily applies to large landslides, since these are more likely to be assigned a timing by both the amplitude (Burrows et al., 2022) and coherence (Sect. 3.2) methods.

This increased susceptibility to failure for reactivations compared to new failures is consistent with the increased levels of post-seismic rainfall-triggered landsliding that have been observed following many large earthquakes (Fan et al., 2021; Jones et al., 2021b; Marc et al., 2015; Tanyaş et al., 2021; Yunus et al., 2020). The mechanisms suggested for elevated susceptibility to reactivation by rainfall are equally applicable to the case of seismic triggering studied here. They include damage to the regolith during the earthquake (loss of cohesion or internal friction); the loss of vegetation whose roots were contributing to the stability of the slope; steepening of the hillslope and increased presence of unconsolidated material in the form of co-seismic landslide deposits, which is easily remobilised (Marc et al., 2015; Fan et al., 2021). In other cases, such as the 2015 Gorkha, Nepal earthquake, increased post-seismic landslide susceptibility was driven by both the increased presence of (co-seismic) landslide scars which were then able to be reactivated during the subsequent monsoon seasons (Dahlquist and West, 2019) and by more general, widespread damage to the landscape, which temporarily reduced the amount of rainfall required to trigger new landslides (Burrows et al., 2023). On the contrary, after the 05/08 earthquake, we observe reactivations at low PGV-slope combinations, but not new landslides (Fig. 45), indicating that here the primary driver of increased landslide activity is the increased presence of landslide scars rather than more general weakening of the landscape.

4.2 Possible detection of precursory motion during the 28/07 earthquake

18 of the 61 landslides for which we obtained the timing of first failure appear to have failed on 28/07. This proportion (30%) is very high compared to the results from amplitude, where the main failure was attributed to this earthquake in only 3 of 170 cases (2%). It also contradicts previous research based on optical satellite images, which found that in cloud-free areas, very few of the landslides triggered during the earthquake sequence occurred before the earthquake on 05/08 (Ferrario, 2019; Ganas et al., 2018; Zhao et al., 2021). One explanation for this discrepancy could be that some landslides exhibited precursory

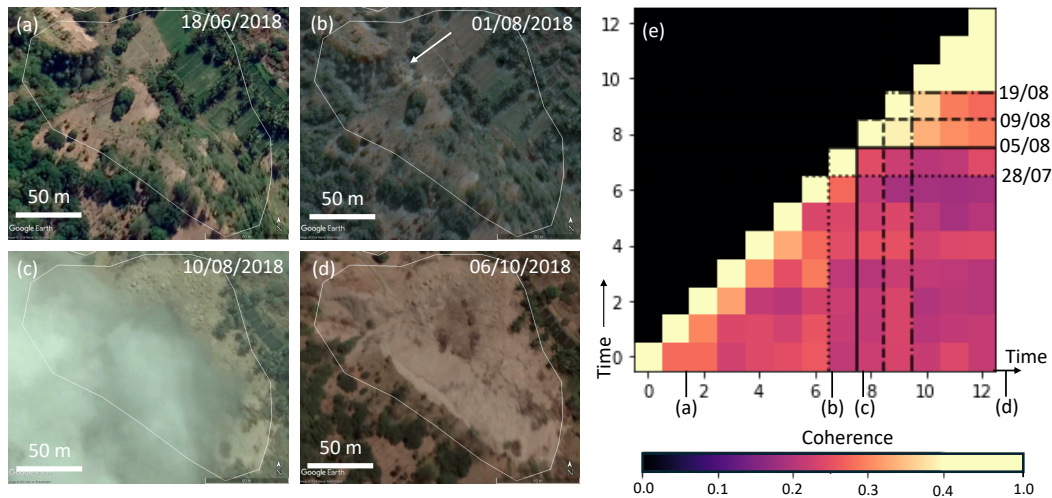


Figure 6. (a-d) Evolution through time of a landslide captured with high resolution google earth imagery acquired before (a), during (b,c) and after (d) the earthquake sequence. The white arrow on Panel b indicates a location where preliminary activity may have taken place following the earthquake on 28/07 prior to the main failure during the 05/08 earthquake (Panel c) (e) the coherence matrix for this event, showing landslide activity during earthquakes on 28/07, 05/08 and possibly 19/08. Panels a-d © Google Earth with white polygons from Ferrario (2019)

motion during the earthquake on 28/07 but did not fail completely until 05/08. Such motion would usually not be visible in optical satellite images or detectable using amplitude methods as it would not result in denudation of the hillslope. The short wavelength of Sentinel-1 (5.5 cm) means that coherence can be sensitive to relatively small movements and previous studies have demonstrated that small precursory movements can result in coherence loss prior to catastrophic failures (Dini et al., 2022; Jacquemart and Tiampo, 2021).

Figure 5-6 shows a possible example of this, where the landslide appears active during both the 28/07 and 05/08 earthquakes in the coherence matrix (Panel e), but large-scale failure is not visible in the optical satellite imagery until after 05/08 (Panel c). A white arrow in Panel b indicates an area where activity triggered by the 28/07 earthquake may be visible. However, these detectable changes are small, with trees and shrubs not perceptibly moved between 18/06 and 01/08 but clearly removed by 10/08. It is clear that no activity would be visible in lower resolution imagery until after 05/08 and so the landslide would not be mapped before this time. The SAR amplitude methods described in Sect. 2.2.3.1 assigned this landslide to the 05/08 earthquake, which is likely due to the fact that there is minimal change in landcover between panels (a) and (b) within the landslide polygon.

Interest in the potential to detect precursory movements prior to catastrophic failure with coherence or with displacements derived from InSAR or optical image correlation, has grown in recent years as the acquisition frequency of satellite images has increased (Dong et al., 2018; Jacquemart and Tiampo, 2021; Lacroix et al., 2023). If coherence loss following the first earthquake in a sequence could be used to indicate areas susceptible to catastrophic failure during later earthquakes, this would

be a useful risk management tool. However, we are only able to examine a very limited number of cases here. 14 of the 18
420 landslides that initiated on 28/07 were also active on 05/08 so could indicate precursory motion. Unfortunately, for the majority
of these, cloud free images were not available between the earthquakes on 28/07 and 05/08. Additionally, many took place in
unvegetated areas where small movements would be challenging to see. This lack of vegetation also means that few (only 4)
were also timed with amplitude methods. Thus overall, it is difficult to investigate this effect further here.

4.3 Implications for hazard and mass wasting

425 Several studies have attempted to draw associations between the shaking experienced during an earthquake or its magnitude,
and the likely severity of associated landslides [Godt et al. \(2008\)](#); [Mare et al. \(2017\)](#); [Malamud et al. \(2004\)](#); [Nowicki Jessee et al. \(2018\)](#);
[\(Godt et al., 2008; Marc et al., 2017; Malamud et al., 2004; Nowicki Jessee et al., 2018; Tanyaş and Lombardo, 2019\)](#). The re-
sults of our study highlight the complexity of this problem, since our dataset includes (i) landslides that did not fail until 19/08
despite experiencing stronger shaking on 05/08 (ii) landslides that did not fail on 28/07, but that were reactivated by compara-
430 ble shaking on 09/08 or 19/08 after failing on 05/08 and (iii) landslides from 05/08 that were reactivated by 09/08 or 19/08 but
not both, despite similar levels of shaking.

Overall, we believe that the earthquakes on 09/08 and 19/08 resulted in more landslide activity than they would have done
had they not been part of the sequence—, [since activity associated with these earthquakes occurred at low PGV \(Fig. 5b\)](#).
Although other sequences of relatively low magnitude earthquakes have triggered landslides, such as the 2011, M_w 5.1 Lorca,
435 Spain and M_w 2020 Mila, Algeria events, both of which triggered over 250 landslides ([Alfaro et al., 2012](#); [Hallal et al., 2024](#)),
there are also cases where larger earthquakes have not resulted in extensive landslide activity, such as the M_w 6.2 foreshock
to the M_w 7.0 Kumamoto earthquake ([Xu et al., 2018](#)). Our conclusion is further supported by the fact that the earthquake at
the beginning of the sequence (28/07) resulted in less activity than subsequent earthquakes on 09/08 and 19/08 despite having
similar shaking intensity (Fig. [4e5c](#)). 24 landslides were observed to be active in this event, compared to 44 and 86 respectively
440 on 09/08 and 19/08. Thus, relatively weak shaking was required to trigger landslide activity later in the sequence, an effect
which was also observed for aftershock-triggered landslides during the 2015 Gorkha, Nepal earthquake sequence ([Tiwari et al., 2017](#)).
However, since this activity takes the form of reactivations rather than new failures, its spatial extent is [controlled by
the shaking intensity experienced in](#) [determined by the locations of triggered landslides, and thus shaking intensity associated
with](#) the mainshock (Fig. [3e4c](#)). This highlights the importance of rapid assessment of co-seismic landslides following a large
445 earthquake as these can easily be reactivated by aftershocks.

It is difficult to determine the [mass-wasting-erosional](#) effects of the multi-stage failure processes we have observed here
with our coherence analysis. First, we identified more landslide activity than expected during the earthquake on the 28/07
(Figs. [3a](#), [4a4a](#), [5a](#)). However, if these landslides would have failed anyway during the larger event on 05/08, the total mass
wasting volume will be unchanged. Equally if the earthquakes on 09/08 and 19/08 only resulted in downslope movement
450 of unconsolidated co-seismic deposits left after 05/08, this material would likely have rapidly been remobilised by surface
runoff or rainfall-triggered failure, so the overall effect on mass wasting would be minimal. If instead these earthquakes further
damaged the rock and/or regolith or caused landslide scarps to retreat, the mass wasting from the four earthquakes in sequence

is likely to be greater than the sum of the mass wasting that would have been caused by each earthquake in isolation. For example, on its own, the earthquake on 09/08 would not be expected to trigger many landslides, (USGS, 2018c). Ferrario
455 (2019) mapped many polygons that increased in size between 08/08 and the end of the sequence, suggesting that this may be the case, but we cannot differentiate between the two processes using SAR since both would result in coherence loss. Overall, while we are able to detect a mechanism that may result in increased mass wasting, different methods such as repeat LiDAR surveys would be required to fully quantify this process.

4.4 Disagreement between failure timings derived from optical and SAR datasets

460 When carrying out the validation of the SAR methods, cases were observed where the timings derived from SAR did not match the failures that were visible in the optical datasets (Table 1). While some of these may simply be due to inaccuracies in the SAR methods or manual landslide mapping, there are patterns that suggest that some of them may be explained by differences to what is and is not detectable in SAR and optical satellite imagery. For example, the 12 cases where the first failure timings from InSAR coherence were early compared to the optical datasets could be explained if the InSAR coherence method has
465 detected small, precursory motions that were not visible in Sentinel-2 or Planet imagery as in Sect. 4.2. ~~This is particularly likely for the 6 landslides~~—“These 12 landslides include 6 that were not visible until 05/08 in the optical imagery, but were detecting as failing on both 28/07 and 05/08 by the coherence matrix; and ~~for the 4 landslides~~—that were mapped in the second half of the sequence by Ferrario (2019), but were active in every earthquake according to the coherence matrix.”

A similar explanation could be applied to the 32 cases where the landslide failed only on 05/08 according to the optical
470 imagery, but whose last failure was detected on 09/08 or 19/08 by the coherence method. 29 of these 32 landslides were also identified as failing on 05/08 based on either InSAR coherence or amplitude (the other 3 were not assigned a timing using these methods). This suggests that these 29 last detected failures were reactivations rather than new failures. It is possible that these landslides reactivated without visibly changing the size or shape of the scar in the optical satellite imagery. Since InSAR coherence is sensitive to erosion of unvegetated surfaces (e.g. Cabré et al., 2020), it might still detect such failures. To confirm
475 that these are indeed reactivations, comparison against a different dataset, such as field surveys, ground-based SAR or high resolution DEMs would be necessary, but this is beyond the scope of this study.

Finally, 24 landslide polygons were identified as increasing in size in the second half of the earthquake sequence based on the optical satellite images and thus classed as “multi-stage” (Sect. 2.4), but were assigned last failures with the InSAR coherence matrix that were too early. There are two possible explanations for this. First, it could be that the change in size or shape of
480 the landslide polygon was due to differences in the Planet imagery and how shadows are cast at the edges of the forest rather than reactivations. Second, if only part of a large landslide scar reactivates, it may change in shape in the optical imagery while most of the SAR pixels remain unchanged and do not lose coherence.

Overall, there are several differences between what can be detected with SAR amplitude, InSAR coherence and optical satellite images, which may be exacerbated by the different spatial resolutions of these data. The difficulty in detecting landslide
485 reactivations in optical datasets, which is a motivation for developing techniques based on SAR is also a limitation when validating these techniques.

4.5 Wider applicability and limitations of the coherence method

The coherence matrix approach we have used here has some specific advantages. First, it works well in unvegetated areas, where amplitude-based methods are less likely to return timing information (Burrows et al., 2022) and where landslide detection with optical data is particularly challenging. Second, using the coherence matrix approach, we are able to detect not only a single failure timing but also cases of precursory motion and reactivation. Reactivation of shallow landslides in earthquake sequences has been observed for other events, but studying this process requires either field photographs or high resolution multi-spectral satellite images, which are often obscured by cloud (e.g. Sepúlveda et al., 2010; Petley, 2024). The coherence approach used here could therefore provide a useful tool in studying this process. The ability to distinguish between active and inactive periods on shallow landslide scars could also be useful both in monitoring landslides that move too rapidly or are poorly oriented for differential InSAR techniques and in studying rainfall-induced reactivation of co-seismic landslides. The InSAR coherence approach we have used here could allow us to better study these processes ~~using Sentinel-1 data or data from other~~. However, there are limitations, particularly in terms of landslide size, that impact the applicability of the methods. Altogether, we obtained timings for a relatively limited portion of the landslide inventory of Ferrario (2019). The number of landslides that it is possible to constrain the timing of may improve in the future by incorporating data from planned SAR satellites with ~~a regular acquisition strategy such as the planned~~ regular acquisition strategies such as NiSAR and ROSE-L missions (Jones et al., 2021a; Davidson and Furnell, 2021). ~~However~~ The longer wavelength of these satellites is likely to improve their landslide detection capacity in forested areas as they will undergo less decorrelation caused by the movement of vegetation (Burrows et al., 2020). However further testing will be needed to establish this. Additionally, there are other factors that can influence coherence that must be taken into account in future works, particularly soil moisture and InSAR spatial decorrelation (Scott et al., 2017; Kelndorfer et al., 2022).

4.5.1 Effects of perpendicular baseline on InSAR coherence

The overall coherence γ_{total} can be broken down into three components according to Eq. 3 (Zebker and Villasenor, 1992).

$$\gamma_{total} = \gamma_{temporal} \cdot \gamma_{spatial} \cdot \gamma_{thermal} \quad (3)$$

Landslides, along with other processes that alter the scattering properties of the Earth's surface result in decorrelation of $\gamma_{temporal}$. Decorrelation of $\gamma_{spatial}$ resulting from small variations in the satellite orbit between image acquisitions can also result in coherence loss (decorrelation of $\gamma_{thermal}$ is caused by noise within the satellite receiving antenna and can usually be ignored). $\gamma_{spatial}$ is determined by the perpendicular baseline B_{perp} (the distance between the satellite locations at the time the two SAR images were acquired), the difference between the SAR incidence angle θ and the local slope in the satellite line of sight α_{LOS} , lightspeed c , the SAR wavelength λ and chirp bandwidth B_w and the sensor-target distance r according to Eq. 4 (Lee and Liu, 1999).

$$\gamma_{spatial} = 1 - \frac{cB_{perp}}{\lambda r B_w} |\cotan(\theta - \alpha_{LOS})| \quad (4)$$

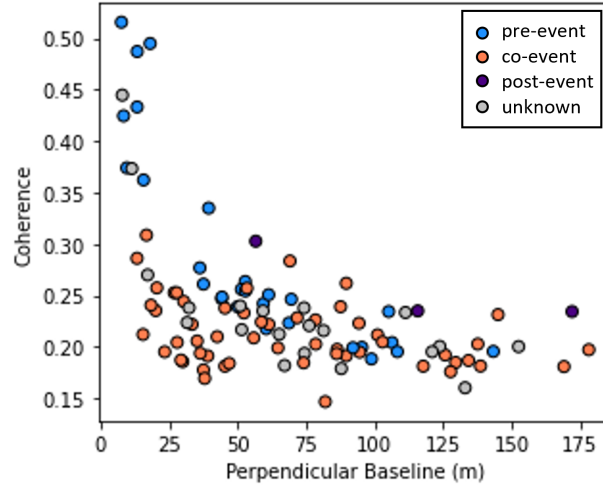


Figure 7. The effect of perpendicular baseline on coherence for a landslide in an unvegetated part of the study area

Decorrelation of $\gamma_{spatial}$ is thus strongest for slopes that are close to the incidence angle of Sentinel-1 (32.9-43.1°) and face towards the sensor, an effect recently observed by Kellndorfer et al. (2022) who found that, for example, a slope at 30° would undergo decorrelation of 70% for an interferogram formed from two images with $B_{perp} = 81\text{m}$. Such values are not uncommon: in this study, the mean B_{perp} was $53\text{ m} \pm 40\text{ m}$, while around 2/3 of the landslides occurred on slopes steeper than 30°(although not all of these were oriented towards the sensor). Decorrelation of interferograms formed with long B_{perp} values was observed over many landslides in this study. Figure 6-7 shows one such example for a landslide in an unvegetated area that slopes towards the satellite at an angle of 35.1°, so that, since $\theta = 35.0^\circ$, $\cotan(\theta - \alpha_{LOS})$ is close to 1. It can be seen that, while we are able to differentiate between co-event (unstable) and pre- and post-event (stable) periods for this landslide at shorter B_{perp} , this becomes difficult for baselines $> 75\text{ m}$. This underlines the value of the coherence matrix approach, since it allows us to more easily identify periods of low coherence caused by spatial decorrelation. Studies in arid environments have been able to normalise for this property (Liu et al., 1999), but it is more complicated here since the landslides result in a change in landcover type. In forested areas, decorrelation of $\gamma_{spatial}$ is compounded by volume decorrelation (Hoen and Zebker, 2000), but in Sentinel-1 interferograms, γ_{total} is likely to be dominated by decorrelation of $\gamma_{temporal}$ in vegetated areas due to the movement of leaves in the canopy between image acquisitions (Jacob et al., 2020).

Overall, decorrelation of $\gamma_{spatial}$, which can be ignored for many applications, can have a strong impact in landslide studies, and should be considered in future works, particularly those that use different SAR constellations which may have longer B_{perp} and those that go on to use Sentinel-1A in the coming years as B_{perp} is likely to grow during this time (ESA, 2024). A Google Earth Engine tool to calculate α_{LOS} for an inventory of landslides and a given Sentinel-1 SAR scene, and so estimate the likely impact of spatial decorrelation for a particular event is available at [\(Burrows, 2024\)](#).

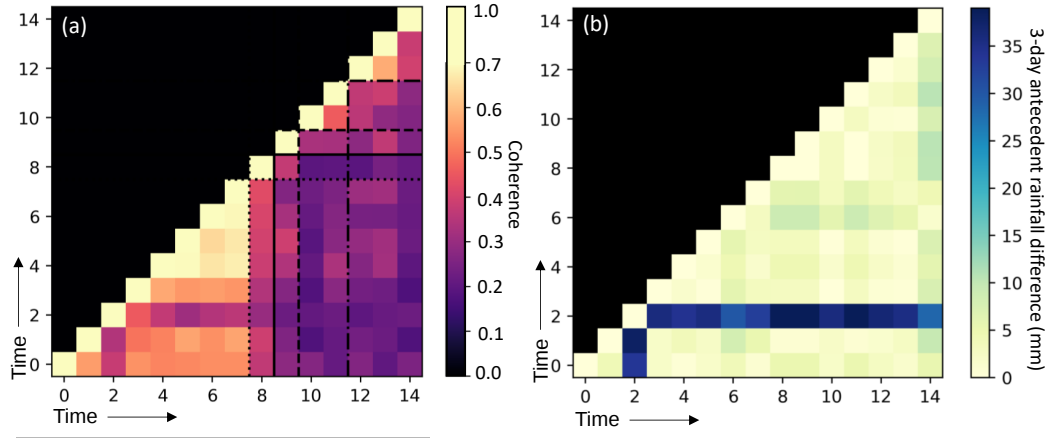


Figure 8. a) InSAR coherence matrix for a landslide in an unvegetated area previously affected by rainfall b) the difference in 3-day antecedent rainfall at the time of each image acquisition derived from GPM data (Huffman et al. 2015). The same rainfall event is visible in both matrices at the time image 2 was acquired.

4.5.2 Effects of soil moisture on InSAR coherence

Changes in surface soil moisture alter the dielectric properties of the soil so can also decorrelate $\gamma_{temporal}$. A strong decorrelation signal has been observed for areas of bare rock and soil for Sentinel-1 interferograms formed from one wet and one dry image (Scott et al., 2017). Importantly, however, the decorrelation effect is not permanent. In the hyper-arid Atacama Desert, Cabré et al. (2020) were able to distinguish between changes in soil moisture, which are only temporary, and erosion, which represents a permanent physical change. We can see a similar effect in Fig. 78, which shows a coherence matrix including a short rainfall event for an unvegetated area where a landslide occurred during the earthquake sequence. The rainfall event can be seen by plotting the absolute difference in rainfall in the three days before each image used to form an interferogram were acquired (Fig. 8b).

While in this case, we are able to see that the soil moisture change was not permanent, the coherence loss was of a similar magnitude to that caused by landslide activity. This highlights the fact The earthquake sequence occurred during the dry season in Indonesia, with little rainfall recorded during the month of August (Ferrario, 2019). However, this sensitivity to soil moisture changes means that there are some events for which coherence analysis may be inherently unsuitable, such as the case of an earthquake immediately followed by a storm, in which the coherence signal will be the same for a co-seismic landslide scar that becomes wet during the storm and one that is reactivated. In this case, any drying effect would be hidden by the co-seismic failure. Snowfall, such as was seen following the 2023 Türkiye earthquake (Görüm et al., 2023), would also result in coherence loss and probably limit the applicability of the approach used here. Because of this sensitivity to soil moisture changes, further testing is needed before the InSAR coherence methods can be applied to rainfall triggered landslides. Landslides triggered by sequences of storms are also often poorly constrained in time, and while the amplitude based methods can be applied in this

case (as in Burrows et al., 2023), InSAR coherence could also be beneficial in study landslide reactivation and landslides in unvegetated areas.

5 Conclusions

We have applied SAR amplitude and coherence techniques to characterise shallow landslide activity during the 2018 Lombok, Indonesia earthquake sequence. We have ~~demonstrated that when a coherence matrix approach is used, we assessed a new method for landslide timing detection based on InSAR coherence matrices. This approach, which is mainly applicable to larger events,~~ can detect not only single failures but also reactivations and thus build a more complete picture of landslide activity; ~~although such methods cannot be applied to all landslides.~~ Of the 177 landslides for which such analysis was possible here, 98 were active in more than one earthquake. In most cases these were reactivations, where failure in one earthquake was followed by further failure in a later earthquake. However, in at least one case, our SAR techniques identified precursory activity ~~prior to complete failure. This:~~ small movements during one earthquake in an area that then failed during a later earthquake. This observation of precursory activity is consistent with theory and has been observed in a small number of previous studies but provides further encouraging evidence that at least some landslides may experience detectable displacement prior to full failure. Examining the drivers for slope instability, we found that new landslides generally followed pre-existing expectations of the shaking intensity and slopes associated with earthquake-triggered landsliding, but that reactivations of pre-existing scars required much less energy, occurring at accelerations as low as 0.1g. This demonstrates the difficulty in establishing predictive relationships for earthquake-triggered landslides. It also highlights the importance of rapid mapping of co-seismic landslide scars since these can easily be reactivated during aftershocks. Finally, the shift of reactivations but not new landslides to low PGV-slope combinations suggests that here it was the landslides themselves rather than more general landscape weakening that amplified landslide activity later in the earthquake sequence. This study represents one of the first combined applications of optical imagery and Sentinel-1 amplitude and coherence to ~~depict the~~ study landslide multi-stage failure following a sequence of earthquakes. Application to other sequences of earthquakes or storms would require multi-temporal landslide inventories and good coverage with satellite images and would allow further confirmation and refining of the SAR methods.

Code and data availability. Sentinel-1 data are available from the Copernicus Data Space Ecosystem (<https://dataspace.copernicus.eu>). The original polygon landslide inventory is available in the supplementary materials of Ferrario (2019). Timing and reactivation information derived from Sentinel-1 for this study are available at <https://doi.org/10.5281/zenodo.15516233>. Computer codes for deriving landslide timings from SAR amplitude in Google Earth Engine are available at <https://doi.org/10.5281/zenodo.6984291>

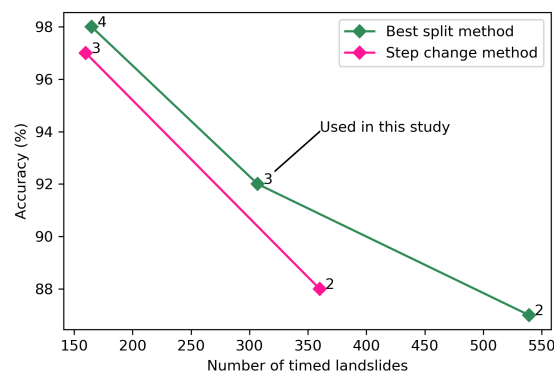


Figure A1. A comparison of accuracy verses for the original “Step change” method used by (Burrows et al., 2022) to identify landslide timings and the alternative “Best split” method used here (Sect. 2.2.3.1). The total number of landslides was 991 (all polygons > 2000 m² mapped by Ferrario (2019)). Accuracy was calculated for landslides whose timing could be constrained to specific earthquake using Planet, Sentinel-2 or Google Earth images. Points are labelled with the number of metrics required to select a time window for a landslide before it is accepted (When this number = 2, the metrics must be drawn from the same SAR orbit, following Burrows et al. (2022))

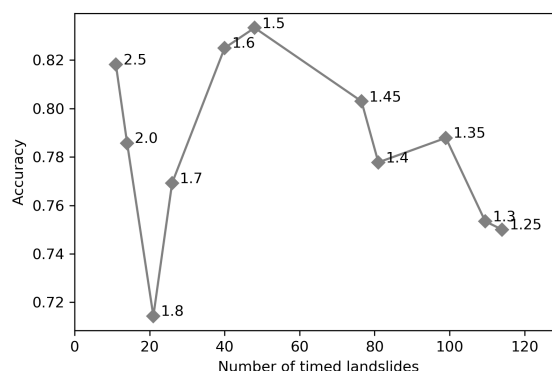


Figure A2. Accuracy of the InSAR coherence matrix technique when different thresholds are set for the number of standard deviations between "pre-event" and "co-event" for the timing to be accepted. Accuracy values are calculated only for landslides whose first failure could be constrained to a specific earthquake using Planet, Sentinel-2 or Google Earth imagery.

Appendix A

Author contributions. All authors were involved in the conceptualisation of the work, development of the methodology and preparation of the manuscript. KB carried out the data curation and analysis.

Competing interests. The authors declare no conflict of interest

Acknowledgements. SAR data presented here were processed during the PhD thesis of KB at Durham University under the supervision of Richard Walters, and we thank him as well as Thibault Taillade and Marcus Engdahl at ESA for useful discussions.

KB was funded by an internal research fellowship from the European Space Agency’s Science Hub at ESRIN and by an MSCA postdoc-
590 toral fellowship (project id 101107490)

References

- Alfaro, P., Delgado, J., García-Tortosa, F., Lenti, L., López, J., López-Casado, C., and Martino, S.: Widespread landslides induced by the Mw 5.1 earthquake of 11 May 2011 in Lorca, SE Spain, *Engineering Geology*, 137, 40–52, <https://doi.org/10.1016/j.enggeo.2012.04.002>, 2012.
- 595 Bertone, A., Zucca, F., Marin, C., Notarnicola, C., Cuozzo, G., Krainer, K., Mair, V., Riccardi, P., Callegari, M., and Seppi, R.: An unpervised method to detect rock glacier activity by using Sentinel-1 SAR interferometric coherence: A regional-scale study in the Eastern European Alps, *Remote Sensing*, 11, 1711, <https://doi.org/10.3390/rs11141711>, 2019.
- Burrows, K.: Geometric SAR properties for landslides, version 1, <https://doi.org/https://doi.org/10.5281/zenodo.12579939>, software code, 2024.
- 600 Burrows, K., Walters, R. J., Milledge, D., Spaans, K., and Densmore, A. L.: A New Method for Large-Scale Landslide Classification from Satellite Radar, *Remote Sensing*, 11, 237, <https://doi.org/10.3390/rs11030237>, 2019.
- Burrows, K., Walters, R. J., Milledge, D., and Densmore, A. L.: A systematic exploration of satellite radar coherence methods for rapid landslide detection, *Natural Hazards and Earth System Sciences*, 20, 3197–3214, <https://doi.org/10.5194/nhess-20-3197-2020>, 2020.
- Burrows, K., Marc, O., and Remy, D.: Using Sentinel-1 radar amplitude time series to constrain the timings of individual landslides: a
605 step towards understanding the controls on monsoon-triggered landsliding, *Natural Hazards and Earth System Sciences*, 22, 2637–2653, <https://doi.org/10.5194/nhess-22-2637-2022>, 2022.
- Burrows, K., Marc, O., and Andermann, C.: Retrieval of Monsoon Landslide Timings With Sentinel-1 Reveals the Effects of Earthquakes and Extreme Rainfall, *Geophysical Research Letters*, 50, e2023GL104 720, <https://doi.org/10.1029/2023GL104720>, 2023.
- Cabré, A., Remy, D., Aguilar, G., Carretier, S., and Riquelme, R.: Mapping rainstorm erosion associated with an individual
610 storm from InSAR coherence loss validated by field evidence for the Atacama Desert, *Earth Surface Processes and Landforms*, <https://doi.org/10.1002/esp.4868>, 2020.
- Cabré, A., Remy, D., Marc, O., Burrows, K., and Carretier, S.: Flash floods triggered by the 15–17th March 2022 rainstorm event in the Atacama Desert mapped from InSAR coherence time series, *Natural Hazards*, 116, 1345–1353, <https://doi.org/10.1007/s11069-022-05707-y>, 2023.
- 615 Croissant, T., Steer, P., Lague, D., Davy, P., Jeandet, L., and Hilton, R. G.: Seismic cycles, earthquakes, landslides and sediment fluxes: Linking tectonics to surface processes using a reduced-complexity model, *Geomorphology*, 339, 87–103, <https://doi.org/10.1016/j.geomorph.2019.04.017>, 2019.
- Dahlquist, M. P. and West, A. J.: Initiation and runout of post-seismic debris flows: Insights from the 2015 Gorkha Earthquake, *Geophysical Research Letters*, <https://doi.org/10.1029/2019GL083548>, 2019.
- 620 Davidson, M. W. and Furnell, R.: ROSE-L: Copernicus L-band SAR mission, in: 2021 IEEE international geoscience and remote sensing symposium IGARSS, pp. 872–873, IEEE, <https://doi.org/10.1109/IGARSS47720.2021.9554018>, 2021.
- Deijns, A. A., Dewitte, O., Thiery, W., d’Oreye, N., Malet, J.-P., and Kervyn, F.: Timing landslide and flash flood events from SAR satellite: a regionally applicable methodology illustrated in African cloud-covered tropical environments, *Natural Hazards and Earth System Sciences*, 22, 3679–3700, <https://doi.org/10.5194/nhess-22-3679-2022>, 2022.
- 625 Ding, X.-l., Li, Z.-w., Zhu, J.-j., Feng, G.-c., and Long, J.-p.: Atmospheric effects on InSAR measurements and their mitigation, *Sensors*, 8, 5426–5448, <https://doi.org/10.3390/s8095426>, 2008.

- Dini, B., DOIN, P., Lacroix, P., and Gay, M.: Satellite-based InSAR: application and signal extraction for the detection of landslide precursors, in: GRETSI'22: XXVIIIth Francophone Symposium on Signal and Image Processing, GRETSI, https://grets.fr/data/colloque/pdf/2022_dini987.pdf, 2022.
- 630 Dong, J., Zhang, L., Li, M., Yu, Y., Liao, M., Gong, J., and Luo, H.: Measuring precursory movements of the recent Xinmo landslide in Mao County, China with Sentinel-1 and ALOS-2 PALSAR-2 datasets, *Landslides*, 15, 135–144, <https://doi.org/10.1007/s10346-017-0914-8>, 2018.
- Dossa, G. G., Paudel, E., Fujinuma, J., Yu, H., Chutipong, W., Zhang, Y., Paz, S., and Harrison, R. D.: Factors determining forest diversity and biomass on a tropical volcano, Mt. Rinjani, Lombok, Indonesia, *PLoS One*, 8, e67 720, <https://doi.org/10.1371/journal.pone.0067720>, 635 2013.
- Duda, R. O., Hart, P. E., et al.: *Pattern classification and scene analysis*, vol. 3, New York: Wiley, 1973.
- ESA: Sentinel-1A change in the orbital control strategy, <https://sentinels.copernicus.eu/web/sentinel/-/sentinel-1a-change-in-the-orbit-control-strategy>, 2024.
- Fan, X., Yunus, A. P., Scaringi, G., Catani, F., Siva Subramanian, S., Xu, Q., and Huang, R.: Rapidly evolving controls of land- 640 slides after a strong earthquake and implications for hazard assessments, *Geophysical Research Letters*, 48, e2020GL090 509, <https://doi.org/10.1029/2020GL090509>, 2021.
- Ferrario, M.: Landslides triggered by multiple earthquakes: insights from the 2018 Lombok (Indonesia) events, *Natural Hazards*, pp. 1–18, <https://doi.org/10.1007/s11069-019-03718-w>, 2019.
- Ferrario, M. F., Perez, J., Dizon, M., Livio, F., Rimando, J., and Michetti, A.: Environmental effects following a seismic sequence: the 2019 645 Cotabato—Davao del Sur (Philippines) earthquakes, *Natural Hazards*, pp. 1–23, <https://doi.org/10.1007/s11069-024-06467-7>, 2024.
- Fu, S., de Jong, S. M., Hou, X., de Vries, J., Deijns, A., and de Haas, T.: A landslide dating framework using a combination of Sentinel-1 SAR and-2 optical imagery, *Engineering Geology*, 329, 107 388, <https://doi.org/10.1016/j.enggeo.2023.107388>, 2024.
- Ganas, A., Tsironi, V., and Valkaniotis, S.: A preliminary report on the 2018 Lombok region Indonesia earthquakes, https://static4.emsc-csem.org/Files/news/Earthquakes_reports/Lombok%20earthquake%20report%20GTV%209-8-2018.pdf., 2018.
- 650 Ge, P., Gokon, H., Meguro, K., and Koshimura, S.: Study on the intensity and coherence information of high-resolution ALOS-2 SAR images for rapid massive landslide mapping at a pixel level, *Remote Sensing*, 11, 2808, <https://doi.org/doi.org/10.3390/rs11232808>, 2019.
- Giffard-Roisin, S., Boudaour, S., Doin, M.-P., Yan, Y., and Atto, A.: Land cover classification of the Alps from InSAR temporal coherence matrices, *Frontiers in Remote Sensing*, 3, 932 491, <https://doi.org/doi.org/10.3389/frsen.2022.932491>, 2022.
- Godt, J., Sener, B., Verdin, K., Wald, D., Earle, P., Harp, E., and Jibson, R.: Rapid assessment of earthquake-induced landsliding, in: *Pro- 655 ceedings of the first world landslide forum*, vol. 4, pp. 219–222, Tokyo: United Nations University, 2008.
- Goorabi, A.: Detection of landslide induced by large earthquake using InSAR coherence techniques—Northwest Zagros, Iran, *The Egyptian Journal of Remote Sensing and Space Science*, 23, 195–205, <https://doi.org/10.1016/j.ejrs.2019.04.002>, 2020.
- Görüm, T., Tanyas, H., Karabacak, F., Yılmaz, A., Girgin, S., Allstadt, K. E., Süzen, M. L., and Burgi, P.: Preliminary documenta- 660 tion of coseismic ground failure triggered by the February 6, 2023 Türkiye earthquake sequence, *Engineering Geology*, 327, 107 315, <https://doi.org/10.1016/j.enggeo.2023.107315>, 2023.
- Hallal, N., Hamidatou, M., Hamai, L., Aguemoune, S., and Lamali, A.: Landslides triggered by the August 2020 Mw 5.0 Mila, Algeria, earthquake: spatial distribution and susceptibility mapping, *Euro-Mediterranean Journal for Environmental Integration*, pp. 1–23, <https://doi.org/10.1007/s41207-024-00471-w>, 2024.

- Handwerger, A. L., Huang, M.-H., Jones, S. Y., Amatya, P., Kerner, H. R., and Kirschbaum, D. B.: Generating landslide density heatmaps for rapid detection using open-access satellite radar data in Google Earth Engine, *Natural Hazards and Earth System Sciences*, 22, 753–773, <https://doi.org/10.5194/nhess-22-753-2022>, 2022.
- Hartmann, J. and Moosdorf, N.: The new global lithological map database GLiM: A representation of rock properties at the Earth surface, *Geochemistry, Geophysics, Geosystems*, 13, <https://doi.org/10.1029/2012GC004370>, 2012.
- Hoën, E. W. and Zebker, H. A.: Penetration depths inferred from interferometric volume decorrelation observed over the Greenland ice sheet, *IEEE Transactions on Geoscience and Remote Sensing*, 38, 2571–2583, <https://doi.org/10.1109/36.885204>, 2000.
- Jacob, A. W., Vicente-Guijalba, F., Lopez-Martinez, C., Lopez-Sanchez, J. M., Litzinger, M., Kristen, H., Mestre-Quereda, A., Ziółkowski, D., Lavalley, M., Notarnicola, C., et al.: Sentinel-1 InSAR coherence for land cover mapping: A comparison of multiple feature-based classifiers, *IEEE Journal of Selected Topics in Applied Earth Observations and Remote Sensing*, 13, 535–552, <https://doi.org/10.1109/JSTARS.2019.2958847>, 2020.
- Jacquemart, M. and Tiampo, K.: Leveraging time series analysis of radar coherence and normalized difference vegetation index ratios to characterize pre-failure activity of the Mud Creek landslide, California, *Natural Hazards and Earth System Sciences*, 21, 629–642, <https://doi.org/10.5194/nhess-21-629-2021>, 2021.
- Jones, C. E., Manjusree, P., and Rao, S.: The NISAR Mission’s capabilities for natural hazards monitoring, in: 2021 IEEE International Geoscience and Remote Sensing Symposium IGARSS, pp. 1711–1714, IEEE, <https://doi.org/10.1109/IGARSS47720.2021.9553295>, 2021a.
- Jones, J. N., Boulton, S. J., Stokes, M., Bennett, G. L., and Whitworth, M. R.: 30-year record of Himalaya mass-wasting reveals landscape perturbations by extreme events, *Nature communications*, 12, 6701, <https://doi.org/10.1038/s41467-021-26964-8>, 2021b.
- Jung, J. and Yun, S.-H.: Evaluation of coherent and incoherent landslide detection methods based on synthetic aperture radar for rapid response: A case study for the 2018 Hokkaido landslides, *Remote Sensing*, 12, 265, <https://doi.org/10.3390/rs12020265>, 2020.
- Kellndorfer, J., Cartus, O., Lavalley, M., Magnard, C., Milillo, P., Oveisgharan, S., Osmanoglu, B., Rosen, P. A., and Wegmüller, U.: Global seasonal Sentinel-1 interferometric coherence and backscatter data set, *Scientific Data*, 9, 73, <https://doi.org/10.1038/s41597-022-01189-6>, 2022.
- Lacroix, P., Huanca, J., Albinez, L., and Taipei, E.: Precursory Motion and Time-Of-Failure Prediction of the Achoma Landslide, Peru, From High Frequency PlanetScope Satellites, *Geophysical Research Letters*, 50, e2023GL105413, <https://doi.org/10.1029/2023GL105413>, 2023.
- Lee, H. and Liu, J. G.: Spatial decorrelation due to topography in the interferometric SAR coherence imagery, in: IEEE 1999 International Geoscience and Remote Sensing Symposium. IGARSS’99 (Cat. No. 99CH36293), vol. 1, pp. 485–487, IEEE, <https://doi.org/10.1109/IGARSS.1999.773541>, 1999.
- Li, Z., Wright, T., Hooper, A., Crippa, P., Gonzalez, P., Walters, R., Elliott, J., Ebmeier, S., Hatton, E., and Parsons, B.: Towards InSAR everywhere, all the time, with Sentinel-1, *The International Archives of the Photogrammetry, Remote Sensing and Spatial Information Sciences*, 41, 763–766, <https://doi.org/10.5194/isprs-archives-XLI-B4-763-2016>, 2016.
- Liu, J. G., Lee, H., and Pearson, T.: Detection of rapid erosion in SE Spain using ERS SAR interferometric coherence imagery, in: *Remote Sensing for Earth Science, Ocean, and Sea Ice Applications*, vol. 3868, pp. 525–535, SPIE, <https://doi.org/10.1117/12.373131>, 1999.
- Malamud, B. D., Turcotte, D. L., Guzzetti, F., and Reichenbach, P.: Landslide inventories and their statistical properties, *Earth Surface Processes and Landforms*, 29, 687–711, <https://doi.org/10.1002/esp.1064>, 2004.
- Manconi, A.: How phase aliasing limits systematic space-borne DInSAR monitoring and failure forecast of alpine landslides, *Engineering Geology*, 287, 106094, <https://doi.org/10.1016/j.enggeo.2021.106094>, 2021.

- Marc, O., Hovius, N., Meunier, P., Uchida, T., and Hayashi, S.-i.: Transient changes of landslide rates after earthquakes, *Geology*, 43, 883–886, <https://doi.org/10.1130/G36961.1>, 2015.
- Marc, O., Meunier, P., and Hovius, N.: Prediction of the area affected by earthquake-induced landsliding based on seismological parameters, *Natural Hazards and Earth System Sciences*, 17, 1159–1175, <https://doi.org/10.5194/nhess-17-1159-2017>, 2017.
- Martino, S., Bozzano, F., Caporossi, P., D’angiò, D., Della Seta, M., Esposito, C., Fantini, A., Fiorucci, M., Giannini, L., Iannucci, R., et al.: Impact of landslides on transportation routes during the 2016–2017 Central Italy seismic sequence, *Landslides*, 16, 1221–1241, <https://doi.org/10.1007/s10346-019-01162-2>, 2019.
- Martino, S., Fiorucci, M., Marmoni, G., Casaburi, L., Antonielli, B., and Mazzanti, P.: Increase in landslide activity after a low-magnitude earthquake as inferred from DInSAR interferometry, *Scientific reports*, 12, 2686, <https://doi.org/10.1038/s41598-022-06508-w>, 2022.
- Milledge, D. G., Bellugi, D. G., Watt, J., and Densmore, A. L.: Automated determination of landslide locations after large trigger events: advantages and disadvantages compared to manual mapping, *Natural Hazards and Earth System Sciences*, 22, 481–508, <https://doi.org/10.5194/nhess-22-481-2022>, 2022.
- Mondini, A. C.: Measures of spatial autocorrelation changes in multitemporal SAR images for event landslides detection, *Remote Sensing*, 9, 554, <https://doi.org/https://doi.org/10.3390/rs9060554>, 2017.
- Mondini, A. C., Guzzetti, F., Chang, K.-T., Monserrat, O., Martha, T. R., and Manconi, A.: Landslide failures detection and mapping using Synthetic Aperture Radar: Past, present and future, *Earth-Science Reviews*, p. 103574, <https://doi.org/10.1016/j.earscirev.2021.103574>, 2021.
- Novellino, A., Pennington, C., Leeming, K., Taylor, S., Alvarez, I. G., McAllister, E., Arnhardt, C., and Winson, A.: Mapping landslides from space: A review, *Landslides*, pp. 1–12, <https://doi.org/10.1007/s10346-024-02215-x>, 2024.
- Nowicki Jessee, M., Hamburger, M. W., Allstadt, K., Wald, D. J., Robeson, S. M., Tanyas, H., Hearne, M., and Thompson, E. M.: A global empirical model for near-real-time assessment of seismically induced landslides, *Journal of Geophysical Research: Earth Surface*, 123, 1835–1859, <https://doi.org/10.1029/2017JF004494>, 2018.
- Parker, R. N., Densmore, A. L., Rosser, N. J., De Michele, M., Li, Y., Huang, R., Whadcoat, S., and Petley, D. N.: Mass wasting triggered by the 2008 Wenchuan earthquake is greater than orogenic growth, *Nature Geoscience*, 4, 449–452, <https://doi.org/pp.449-452>, <https://doi.org/10.1038/ngeo1154>, 2011.
- Petley, D.: Landslides on the Shakadang Trail, Taroko, Taiwan, <https://eos.org/thelandslideblog/shakadang-trail>, 2024.
- Robinson, T. R., Rosser, N., and Walters, R. J.: The Spatial and Temporal Influence of Cloud Cover on Satellite-Based Emergency Mapping of Earthquake Disasters, *Scientific Reports*, 9, 1–9, <https://doi.org/https://doi.org/10.1038/s41598-019-49008-0>, 2019.
- Salman, R., Lindsey, E. O., Lythgoe, K. H., Bradley, K., Muzli, M., Yun, S.-H., Chin, S. T., J. Tay, C. W., Costa, F., Wei, S., et al.: Cascading partial rupture of the Flores thrust during the 2018 Lombok earthquake sequence, Indonesia, *Seismological Research Letters*, 91, 2141–2151, <https://doi.org/10.1785/0220190378>, 2020.
- Scheip, C. M. and Wegmann, K. W.: HazMapper: a global open-source natural hazard mapping application in Google Earth Engine, *Natural Hazards and Earth System Sciences*, 21, 1495–1511, <https://doi.org/10.5194/nhess-21-1495-2021>, 2021.
- Scott, C., Lohman, R., and Jordan, T.: InSAR constraints on soil moisture evolution after the March 2015 extreme precipitation event in Chile, *Scientific reports*, 7, 4903, <https://doi.org/10.1038/s41598-017-05123-4>, 2017.
- Sepúlveda, S. A., Serey, A., Lara, M., Pavez, A., and Rebolledo, S.: Landslides induced by the April 2007 Aysén fjord earthquake, Chilean Patagonia, *Landslides*, 7, 483–492, <https://doi.org/10.1007/s10346-010-0203-2>, 2010.

Tanyaş, H. and Lombardo, L.: Variation in landslide-affected area under the control of ground motion and topography, *Engineering geology*, 260, 105 229, <https://doi.org/10.1016/j.enggeo.2019.105229>, 2019.

Tanyaş, H., Kirschbaum, D., Görüm, T., van Westen, C. J., Tang, C., and Lombardo, L.: A closer look at factors governing landslide recovery time in post-seismic periods, *Geomorphology*, 391, 107 912, <https://doi.org/10.1016/j.geomorph.2021.107912>, 2021.

Tanyaş, H., Hill, K., Mahoney, L., Fadel, I., and Lombardo, L.: The world's second-largest, recorded landslide event: Lessons learnt from the landslides triggered during and after the 2018 Mw 7.5 Papua New Guinea earthquake, *Engineering geology*, 297, 106 504, <https://doi.org/10.1016/j.enggeo.2021.106504>, 2022.

Tiwari, B., Ajmera, B., and Dhital, S.: Characteristics of moderate-to large-scale landslides triggered by the M w 7.8 2015 Gorkha earthquake and its aftershocks., *Landslides*, 14, 1279–1318, <https://doi.org/10.1007/s10346-016-0789-0>, 2017.

USGS: ShakeMap Event Page "M 6.4 - 33 km NNW of Labuan Lombok, Indonesia", <https://earthquake.usgs.gov/earthquakes/eventpage/us2000ggbbs/executive>, 2018a.

USGS: ShakeMap Event Page "M 6.9 - 36 km NW of Labuan Lombok, Indonesia", <https://earthquake.usgs.gov/earthquakes/eventpage/us1000g3ub/executive>, 2018b.

USGS: ShakeMap Event Page "M 5.9 - 17 km ENE of Gili Air, Indonesia", <https://earthquake.usgs.gov/earthquakes/eventpage/us1000g5n1/executivelast>, 2018c.

USGS: ShakeMap Event Page "M 6.9 - 20 km NNW of Labuan Lombok, Indonesia", <https://earthquake.usgs.gov/earthquakes/eventpage/us1000gda5/executive#executive>, 2018d.

Wang, W., Motagh, M., Xia, Z., Plank, S., Li, Z., Orynbaikyzy, A., Zhou, C., and Roessner, S.: A framework for automated landslide dating utilizing SAR-Derived Parameters Time-Series, An Enhanced Transformer Model, and Dynamic Thresholding, *International Journal of Applied Earth Observation and Geoinformation*, 129, 103 795, <https://doi.org/10.1016/j.jag.2024.103795>, 2024.

Webb, T., Wadge, G., and Pascal, K.: Mapping water vapour variability over a mountainous tropical island using InSAR and an atmospheric model for geodetic observations, *Remote Sensing of Environment*, 237, 111 560, <https://doi.org/10.1016/j.rse.2019.111560>, 2020.

Xu, C., Ma, S., Tan, Z., Xie, C., Toda, S., and Huang, X.: Landslides triggered by the 2016 Mj 7.3 Kumamoto, Japan, earthquake, *Landslides*, 15, 551–564, <https://doi.org/10.1007/s10346-017-0929-1>, 2018.

Yun, S.-H., Hudnut, K., Owen, S., Webb, F., Simons, M., Sacco, P., Gurrola, E., Manipon, G., Liang, C., Fielding, E., et al.: Rapid Damage Mapping for the 2015 M w 7.8 Gorkha Earthquake Using Synthetic Aperture Radar Data from COSMO–SkyMed and ALOS-2 Satellites, *Seismological Research Letters*, 86, 1549–1556, <https://doi.org/10.1785/0220150152>, 2015.

Yunus, A., Fan, X., Tang, X., Jie, D., Xu, Q., and Huang, R.: Decadal vegetation succession from MODIS reveals the spatio-temporal evolution of post-seismic landsliding after the 2008 Wenchuan earthquake, *Remote Sensing of Environment*, 236, 111 476, <https://doi.org/10.1016/j.rse.2019.111476>, 2020.

Zebker, H. A. and Villasenor, J.: Decorrelation in interferometric radar echoes, *IEEE Transactions on geoscience and remote sensing*, 30, 950–959, 1992.

Zhao, B., Liao, H., and Su, L.: Landslides triggered by the 2018 Lombok earthquake sequence, Indonesia., *Catena*, 207, 105 676, <https://doi.org/10.1016/j.catena.2021.105676>, 2021.