

A new approach to characterize the medium-scale gravity waves using Antarctic airglow observations

Gabriel Augusto Giongo¹, Cristiano Max Wrasse¹, Pierre-Dominique Pautet², José Valentin Bageston³, Prosper Kwamla Nyassor¹, Cosme Alexandre Oliveira Barros Figueiredo⁴, Anderson Vestena Bilibio¹, Delano Gobbi¹, and Hisao Takahashi¹

¹Space Weather Division, National Institute for Space Research, Brazil.

²Physics Department, Utah State University, USA.

³Southern Space Coordination, National Institute for Space Research, Brazil.

⁴Universidade Federal de Campina Grande, Brazil.

Correspondence: Gabriel Augusto Giongo (gabriel.giongo@inpe.br)

Abstract.

Medium-scale gravity waves (MSGWs) are atmospheric waves with horizontal scales ranging from 50 km to 1000 km, which can be observed through airglow all-sky images. This research introduces a novel algorithm that automatically identifies MSGWs using the keogram technique to study the waves over the Antarctic Peninsula. The MSGWs were observed with an all-sky airglow imager located at the Brazilian Comandante Ferraz Antarctic Station (EACF, 62°S), near the tip of the Antarctic Peninsula. Several preprocessing techniques are necessary to extract the parameters of MSGWs from the airglow images. These include projecting the images into geographical coordinates, applying flat fielding, performing consecutive image subtraction, and filtering employing a Butterworth filter to enhance the visibility of the MSGWs. Additionally, the wavelet transform is used to identify the primary oscillations of the MSGW in the keograms. Subsequently, the wavelet transform is also used to reconstruct the MSGW and obtain the fitting coefficients of phase lines. The fitting coefficients are then used to calculate the MSGW parameters and assess the quality of the results. Simulations with synthetic images containing typical propagating gravity waves were conducted to evaluate the errors generated during the MSGW calculations and to determine the threshold for the fitting parameters. This methodology processed a year's worth of data in less than an hour, successfully identifying most waves with errors lower than 5%. The observed wave parameters are generally consistent with expected results; however, they show differences from other observation sites, exhibiting larger phase speeds and wavelengths.

1 Introduction

Atmospheric gravity waves are an essential feature of atmospheric motions due to their energy and momentum driving across the atmospheric layers (Nappo, 2002; Fritts and Alexander, 2003). Gravity waves over the Antarctic region transport momentum and energy through the atmosphere (Plougonven et al., 2013; Moffat-Griffin et al., 2011; Lu et al., 2015), playing a major role alongside other phenomena like the stratospheric polar vortex, polar night jet (PNJ), and mesospheric polar clouds

(Moffat-Griffin and Colwell, 2017; Zhao et al., 2015). They can also transport energy from one region to another due to their horizontal movement, influencing the dynamic features of the entire planet (Kogure et al., 2018; Vadas et al., 2019).

To understand the gravity waves' influence in the atmosphere, previous works have measured the gravity wave characteristics to parameterize their effects depending on their observed scales (Vosper et al., 2018; Lehner and Rotach, 2018). To achieve
25 this, observations must include large data sets and account for both short- and long-term variations in the characteristics of waves to associate them with environmental features and behavior (Song et al., 2021).

Instrumental biases are crucial to consider when observing gravity waves. The resolution of an instrument determines the dimensions of the waves it can detect, which is called the observational filter, as a poorly temporal (spatial) resolution instrument cannot detect waves with a period (wavelength) less than twice its resolution with reliability (Wright et al., 2016, 2017).

Temporal and local continuity are also significant factors in studying propagating waves because the waves can be intermittent or fast enough not to be detected if the observations are not continuous (Plougonven et al., 2017; Alexander and Barnett, 2007). For instance, while satellites can provide global coverage and track seasonal variations, they often miss local features and properties associated with wave movement because they do not observe a single location continuously (Ern et al., 2004; Alexander et al., 2015). However, a ground-based instrument can miss the wave movement if it has a large structure and propagates beyond the observing region (Beldon and Mitchell, 2009; Wu et al., 2013). Moreover, the computational methods applied
35 to the data can restrict the observed spectrum (Wright et al., 2021); for illustration, averaging tends to reduce wave information within a dataset, as it cuts the wave modes of the period shorter than the average window.

Airglow imaging is one of the most employed and valuable techniques for observing gravity waves (Swenson and Mende, 1994). Airglow is the atmospheric emission emitted by some constituents excited by photochemical reactions. Many works have
40 used airglow to study gravity waves in the mesopause region and study their general characteristics and parameters throughout the seasons (Nakamura et al., 1999; Essien et al., 2018), and their general dynamics related to the background conditions (Medeiros et al., 2003; Giongo et al., 2018). To obtain the gravity wave parameters and characteristics, most works employed spectral analysis based on Fourier transforms applied directly on the image to determine the wave parameters (Garcia et al., 1997; Giongo et al., 2020). An airglow camera is relatively low-cost and works for extended periods; aside from its limitation to
45 night-time observations, it can provide information on small-scale waves and also long-term features of the mesopause region by employing the keogram techniques to the observations (Taylor et al., 2007).

Numerous observations of small-scale gravity waves in airglow images were recorded in certain equatorial and tropical regions. The keogram technique facilitated the study of medium-scale gravity waves at these sites, broadening the observed spectrum and linking these waves to other phenomena, such as plasma bubbles. (Paulino et al., 2011; Figueiredo et al., 2018; Taylor et al., 2009; Bilibio, 2017; Essien et al., 2018; Takahashi et al., 2020).
50

Observations of medium-scale gravity waves over the Antarctic continent by airglow have not been reported. Additionally, satellite observations may capture waves of similar spatial dimensions, mainly in the stratosphere (Hoffmann et al., 2013; Hindley et al., 2019). Observations using a limb-viewing technique (Alexander et al., 2009; Hindley et al., 2015) are also limited to large horizontal scales. Airglow observations have the advantage of high temporal resolution in a fixed location,
55 allowing the identification of faster and slower waves (Bageston et al., 2009; Nielsen et al., 2009; Kam et al., 2017). By

extending the analysis of the airglow data to medium-scale gravity waves, one can determine the phase speed spectra of these waves, similar to the approach taken by Matsuda et al. (2017) for small-scale gravity waves, and relate this spectrum to the background wind filtering or other atmospheric conditions (Perwitasari et al., 2018; Kam et al., 2021).

This study employed the keogram technique to investigate medium-scale gravity waves observed through airglow imaging over the Antarctic Peninsula. The primary objective of this paper is to present a reliable analysis method for these waves, allowing future comparisons at other observation sites and ensuring comprehensive observations of the entire wave spectrum concerning different instruments and techniques. Section 2 describes the data used and introduces a new methodology for analyzing medium-scale gravity waves in keograms. It includes wavelet amplitude correction and the identification of phase lag on simulation keograms. Section 3 presents the application of the methodology using real keograms of observed images. Section 4 is a study on the errors of the procedure, and Section 5 shows the results on observed data, while Section 6 drives the discussions on the results and comparison with previous methods. Section 7 presents the main conclusions.

2 Methodology

2.1 Image processing

The data utilized were ground-based airglow images obtained by an all-sky imager installed at the Brazilian Antarctic Comandante Ferraz Station (CF) on King George Island, 200 km from the tip of the Antarctic Peninsula. The imager has a filter wheel for the observations of OH-NIR (700-900 nm), OI 557.7 nm, and 630.0 nm emissions. The camera is cooled to -70 °C and has 80% quantum efficiency for visible and near-infrared wavelengths (KEO SCIENTIFIC LTD, 2022).

To calculate the medium-scale gravity wave parameters, the following preprocessing procedures were applied to the images: (a) projection of the images into geographic coordinates; (b) removal of stars; (c) application of a flat-field correction; (d) subtraction of images; (e) construction of keograms; and (f) application of a Butterworth filter to reduce noise and eliminate long-term oscillations caused by twilight and moonlight. Each procedure is described in detail below.

The image projection into geographic coordinates used in this work follows the well-established and widely used procedures developed initially by Garcia et al. (1997) and lately improved by Wrasse et al. (2007) with other minor improvements by Bageston et al. (2009); Giongo et al. (2020). The image projection involves aligning the images with north at the top (east to the right) and projecting them into geographical coordinates on a 1x1 km grid, creating 512x512 km images of the airglow layer centered over the observation site. The star removal is based on a statistical inference of the neighborhood of the peaks to remove them without interfering with the amplitude of the oscillations in the background. Van Rhijn and atmospheric extinction effects are corrected together with flat-fielding to avoid brightness variations due to the observation angle of the all-sky lens fitted to the camera (Kubota et al., 2001; Wrasse et al., 2024). Additionally, consecutive images are subtracted in order to suppress the Milky Way and other slow-varying features in the images (Tang, J. et al., 2005; Vargas et al., 2021).

Figure 1 shows an example of the original image acquired by the all-sky imager and the resulting preprocessed images following the procedures described above. Figure 1a displays the original image, 1b shows the star-removed image, 1c depicts the Van Rhijn and atmospheric extinction corrected image, and 1d illustrates the projected image onto a 512x512 km grid.

Observational distortions due to the lens were successfully removed. The Milky Way is an inconvenient feature in the images
 90 that will not be a problem for the analysis, as discussed later.

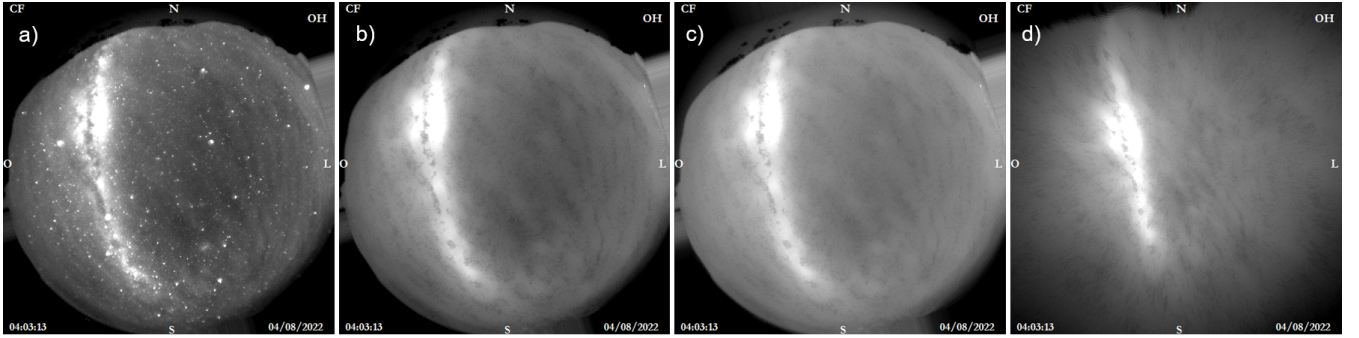


Figure 1. A series of images demonstrating the preprocessing steps applied to an airglow image.

Keograms are formed by choosing a sample from the central row and column of each image taken during a single night, and stacking them over time. This process produces a diagram that reveals long-period oscillations along with zonal and meridional components. (Taylor et al., 2009; Figueiredo et al., 2018). A Butterworth filter is applied to each time series (lines of the keogram) with cutoff periods of less than 20 minutes and greater than 240 minutes to highlight the possible wave
 95 periods observable in the images. These limits were chosen based on prior understanding of the technique’s constraints: shorter periods corresponding to high-frequency waves can be easily analyzed using alternative methods. In comparison, longer periods (greater than 4 hours) may surpass the observation duration, and thus are excluded from the analysis. Additional information about the typical observation length and the cone of influence (COI) will be discussed later.

Figure 2 presents an example of a keogram (a) alongside its post-processed keogram (b), following the aforementioned
 100 procedure. In both keograms, the upper panel depicts a zonal component of the keogram created from horizontal slices of the images, while the lower panel illustrates a meridional component composed of vertical slices. The time axis represents the maximum observation duration of the night at CF, with the blank area caused by the limited observation time on this specific night. Since the airglow images are measured in arbitrary units (which also depend on exposure time), the scale is simply adjusted between the bright interval’s maximum and minimum. Despite the change in scale, the desired oscillations are now
 105 more clearly observable.

2.2 Spectral analysis

In this work, we develop a new method for analyzing the MSGWs based on the wavelet transform described by Torrence and Compo (1998) to calculate the gravity wave parameters. Although the procedure is based on the Fourier Transform as in previous works, the distinctive feature of this methodology is that it automatically selects the waves along the keogram and evaluates the quality of the oscillatory signal concerning the wavelet phase properties, resulting in outcomes with reduced
 110 reliance on users’ judgment. In the following section, we outline the algorithm used for spectral analysis, including the temporal

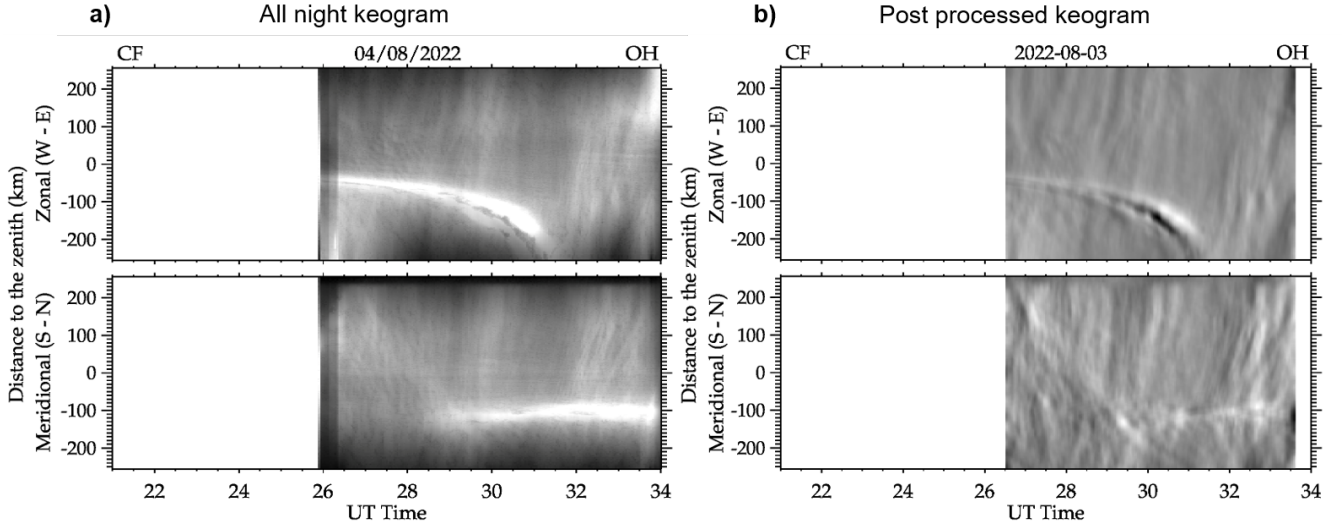


Figure 2. a) Example keogram. b) Similar to (a), it incorporates all the mentioned pre-processing steps. At the top, the zonal keogram utilizes west-east samples from the images, and at the bottom features north-south samples. Both examples are in grayscale, within their maximum and minimum values.

and spatial selection of waves on the keogram. We then demonstrate the procedure using synthetic simulated images that feature propagating gravity waves. The subsequent section illustrates the application of the method using observed airglow images to create the keograms. Finally, Section 4 presents a study on error estimation related to this procedure.

115 2.2.1 Overview and concepts

The analysis methodology is summarized in the flowchart in Figure 3, along with detailed descriptions of each step in the procedure below. Following the preprocessing of images and the creation of the keogram, a Morlet wavelet transform is carried out on the zenith time series. The MSGW parameters are obtained using the reconstruction and phase keograms derived from the wavelet.

120 When applying a wavelet transform to a time series $S(t)$, we obtain a complex function that depends on time and period: $W(t, \tau)$. The power spectrum, defined as the squared amplitude of the wavelet, $|W(t, \tau)|^2$ is used to determine the amplitude of the current waves and their position in time and period by locating their peaks on the spectrum. In addition to the amplitude spectrum, we have the phase spectrum, usually defined as (Torrence and Compo, 1998):

$$\Psi(t, \tau) = Tg^{-1} \left(\frac{Im[W(t, \tau)]}{Re[W(t, \tau)]} \right).$$

Where Im and Re are the imaginary and real parts of the function, respectively, for a FFT, this phase spectrum can be identified as the phase lag of a cosine function fitted to the series with a period equivalent to that used in the fitting. For example, if we fit a function on the general form: $f(t) = A \cos(\omega t + \phi)$, the phase lag, ϕ , is identified as the phase spectrum

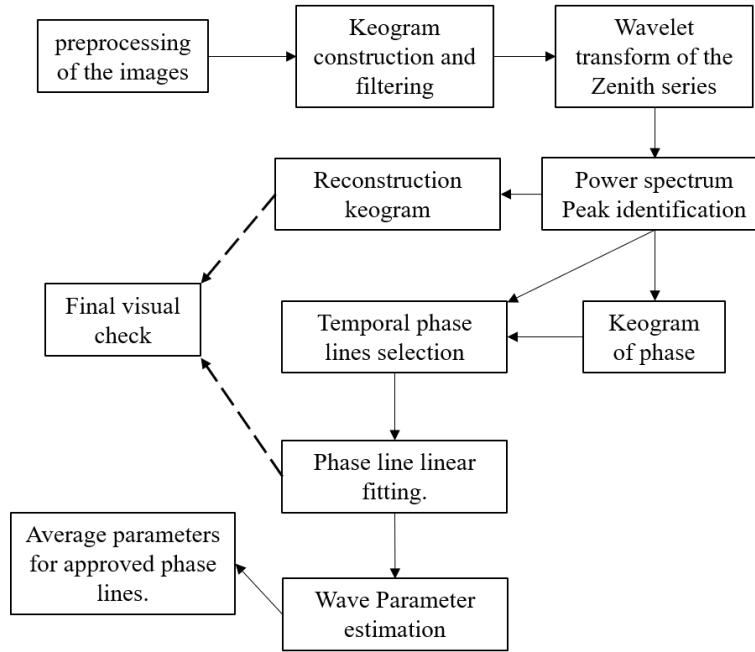


Figure 3. Flowchart of the analysis procedure.

of the FFT, for the period equivalent to $\omega = \frac{2\pi}{\tau}$. For the wavelet, we interpret the phase spectrum as the phase position at that time for a fitted cosine with the period τ ; that is, the wavelet also gives us information about the phase spectrum over time.

Then the keogram is reconstructed by analyzing all the time series using the period selected in the power spectrum, thereby
 130 applying the keogram to the period of interest. This approach is useful for verifying whether the wave with the specified period is present in areas beyond the zenith. A phase keogram could also be generated for the chosen period. Since the phases along the lines are regular linear functions (due to the wavelet fitting), we decided only to select a vertical phase line. From this point forward, we refer to the phase along the columns of the phase keogram as phase lines.

At this point, we assume that when reconstructing all the time series independently, the phase position along the vertical
 135 of the keogram, which means the phase point of the wave along one image, must vary smoothly to ensure the wave travels smoothly along the images and consequently along the columns of the keogram. This assumption is the main point of the methodology. The applied linear fitting will check the wave parameters, wave coherence, and temporal presence using wavelet properties. The phase line is selected when the peak period is present in the power spectrum.

The next step involves checking the phase lines of the reconstruction. Phase lines surrounding the temporal identified peak
 140 in the power spectrum are used to perform the linear fit. The linear fitting of the format $y = \alpha x + \beta$ is conducted across all sections of the central phase line. The region where the fitting performs best will be used in all selected lines to evaluate the angular coefficient (α) of the fitting applied in estimating the wave parameters. In conclusion, the position of the phase lines used for parameter estimation is automatically selected based on the fitting quality, without human intervention.

Then the MSGW parameters are estimated using the angular coefficient of the phase fitting. We interpret the α as the
 145 change of phase, $\Delta\psi$, of the wave along the space (columns of the keogram). The following equation estimates the wavelength
 components (Figueiredo et al., 2018):

$$\lambda_{NS,EW} = \frac{\Delta d}{\Delta\psi/360}, \quad (1)$$

where $\lambda_{NS,EW}$ is the wavelength components (EW for the zonal keogram and NS for the meridional one), and Δd is the
 distance between the lines of the keograms (spatial resolution of the images). The horizontal wavelength λ_H is then calculated
 150 using geometry (Nyassor et al., 2025):

$$\lambda_H = \frac{\lambda_{NS}\lambda_{EW}}{\sqrt{\lambda_{NS}^2 + \lambda_{EW}^2}}. \quad (2)$$

The period is estimated directly by the peak position of the wavelet transform and is also used to reconstruct the keogram.
 The phase speed is calculated as a function of the wavelength and the period following the relation:

$$C_H = \frac{\lambda_H}{\tau}. \quad (3)$$

155 The geometry of the wavelength components finally estimates the wave phase propagation direction:

$$\theta = \cos^{-1} \left[\frac{\lambda_H}{\lambda_{NS}} \right], \quad (4)$$

Where $\cos^{-1}$ is the function that retrieves the angle whose cosine is the input.

Finally, the results and performance of the procedure are visually checked and validated through the keogram reconstruction
 and the quality of phase lines. Assumptions made by the user include flat and parallel phase lines, as well as uniform wave
 160 behavior along the reconstruction. Section 4 discusses further details about the fitting quality of phase lines and the method's
 uncertainties.

2.2.2 Applying the methodology to simulated gravity wave images

This section outlines the methodology for calculating the MSGW parameters in synthetic images. The images are generated
 with specific wave properties, including wavelength, phase propagation direction, and period. Additionally, wave movement
 165 can be incorporated into a sequence of images by considering the phase speed and the time difference between images (time
 resolution).

Figure 4 illustrates an example of a keogram generated from synthetic images. Figure 4 (a) presents a synthetic image, while
 4(b) displays another example, separated by several minutes in time, with the wave fronts highlighted. In this case, two waves

are superimposed, with wavelengths of 100 and 250 km, periods of 30 and 60 minutes, phase speeds of 55 and 69 m/s, and azimuthal propagation directions of 150° and 30° . Figure 4 (c) shows the resulting keogram from a set of 200 images with a resolution of 2 minutes. The waves maintain the same propagation direction in the zonal component, while the opposite direction appears in the meridional component, as clearly indicated in the keogram. Additionally, the combinations of wave amplitudes are evident in both components.

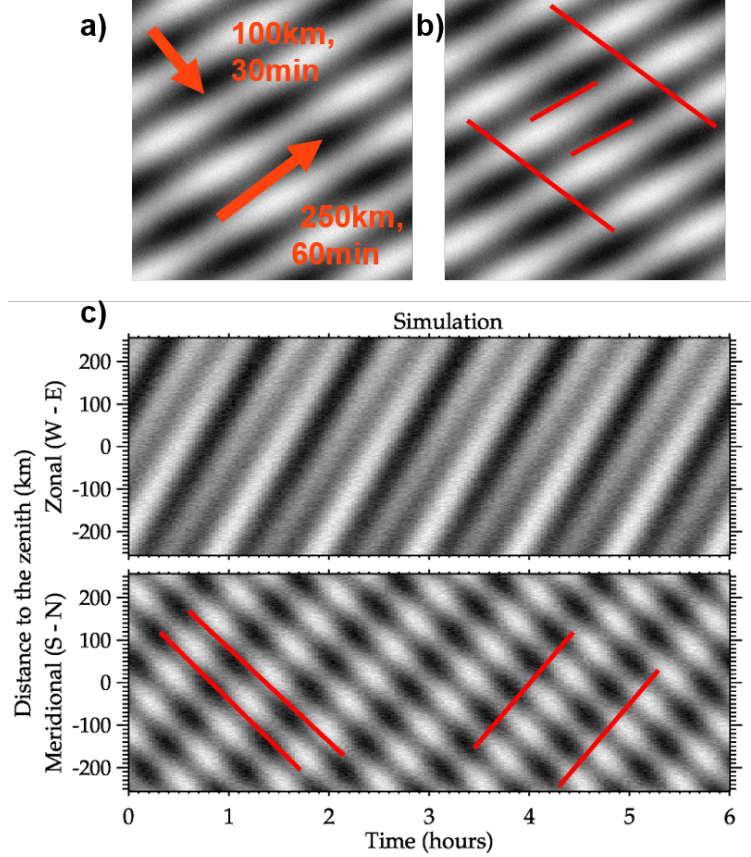


Figure 4. (a) Example of a synthetic image with wave parameters highlighted. (b) Same as (a), but the image is ahead of its time, and the phase fronts are highlighted. (c) Keogram generated from synthetic images. The grayscale was weighted between the maximum and minimum intervals. Both waves have the same amplitude.

The Morlet wavelet power spectrum applied to the central line of the keograms is shown in Figure 5, which corresponds to both keograms as it represents the zenith pixel time series. Even with the waves uniformly distributed across all the keograms, the amplitudes decay outside the cone of influence. Although the amplitude of the waves remains consistent, the spectrum is dispersed for the 60-minute wave due to the wavelet discretization array. Amplitude corrections are discussed in the next section. Peaks in the wavelet power spectrum are identified using a peak selection procedure to highlight the significant os-

cillations and their temporal positions. Reconstruction of all time series is conducted for the period determined by the zenith
180 wavelet, resulting in an "enforced" reconstructed keogram for the selected period.

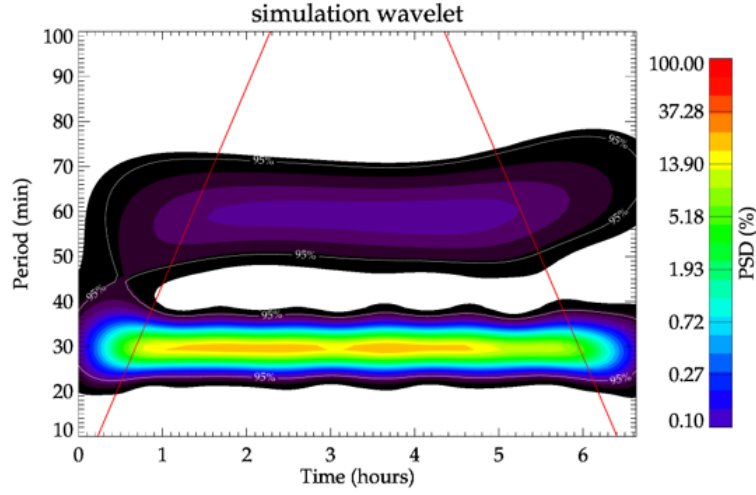


Figure 5. Power spectrum of the simulated keogram.

We employed our own method for identifying peaks in the power spectrum, which has been utilized in various published studies related to small-scale gravity waves (Wrasse et al., 2007; Giongo et al., 2020), though none have elaborated on it in detail. The technique consists of identifying the highest value in the power spectrum and excluding an equal number of neighboring points from both sides until reaching a minimum value (half of the peak value), repeating this process up to a
185 predefined maximum number of peaks (8 in our case). Despite its simplicity, this method has been effective for detecting peaks in 2D spectra. However, for the wavelet, the number of points in the time domain (x-axis) does not match that in the period domain (y-axis), which also follows a logarithmically spaced distribution. Our peak selection method has been operating correctly since we apply linear spline interpolation on a regularly spaced grid, even though the peaks in the power spectrum do not appear uniform along the period axis, which gives them an ellipsoidal shape. Linear spline is a standard regrid method
190 known to prevent amplitude loss. We perform linear spline interpolation on the vertical columns of the spectrum to ensure that the number of points in the vertical matches that of the horizontal lines.

Figure 6 displays the reconstructed keograms and phase lines for the two waves in the simulated keogram, with their periods identified in the power spectrum. Fig. 6(a-b) presents the reconstructed keograms for both identified peaks in the simulation power spectrum, while (c-d) illustrates the phase lines corresponding to the timings of the peaks in the power spectrum. In the
195 simulation, the peak in power remains consistently present over time, rendering the temporal selection irrelevant; however, we retained the selection methodology. The phase lines were unwrapped to enhance visualization of the tilt along the columns and to prevent misfitting due to cycle ambiguity. The red sectors emphasize the areas used for fitting.

A linear fit is applied to the phase lines, where the angular coefficient is used to calculate the MSGW parameters, as it contains the information on angular differences. At the same time, the fitting provides data for assessing the signal quality for

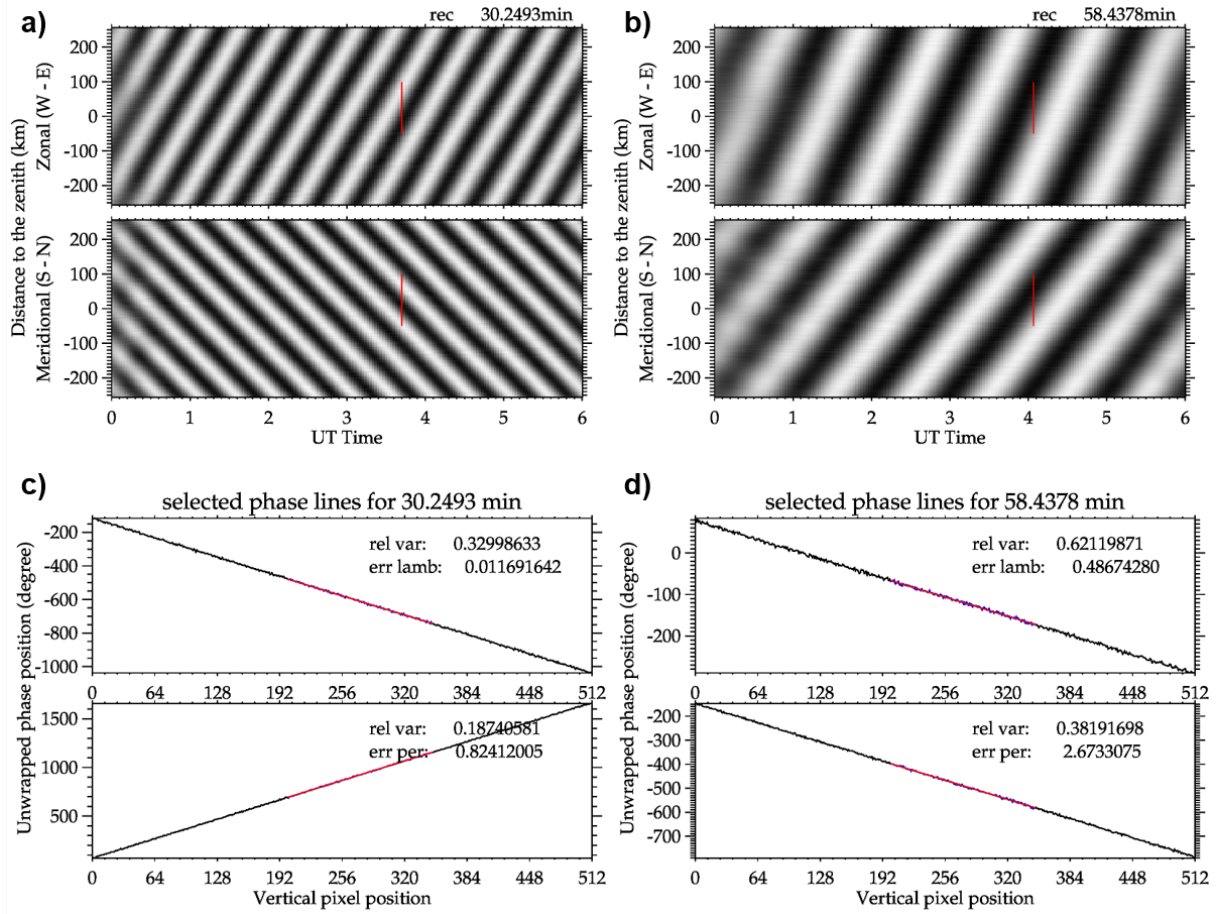


Figure 6. Reconstruction and selected phase lines for the waves in the simulated keogram. (a-b) Reconstruction for the 30-minute and 60-minute waves. (c-d) Phase lines for the 30 minute and 60 minute waves.

the chosen reconstructed period, as demonstrated in Section 3. The final results are summarized in Table 1. All results differ by less than 5% from the simulated gravity wave, showing the consistency of the new methodology. Section 4 discusses further investigation of the differences in the gravity wave parameters throughout the procedure.

Table 1. MSGW parameters obtained by the new methodology, using simulated images of gravity waves. The relative differences between the simulated and calculated wave parameters are also presented.

Parameters	λ_h (km)	Rel. dif. (%)	τ (min)	Rel. dif. (%)	c_o (m/s)	Rel. dif. (%)	Az (°)	Rel. dif. (%)
Wave 1	100.01	0.01	30.25	0.82	55.10	0.81	150.27	0.18
Wave 2	251.22	0.48	58.44	2.67	71.65	3.08	29.89	0.36

2.3 Amplitudes corrections

The wavelet transform can directly estimate the amplitudes of the waves, although it requires corrections due to the filters applied to the data and wavelet bias, as reported previously (Torrence and Compo, 1998; Liu et al., 2007). To correct the wavelet biases, we followed the correction proposed by Xu et al. (2024, and references therein), which depends on the scales (periods) and the given image resolution by:

$$C_f = \left[\frac{\delta t}{2\pi^{1/2}s} \right]^{1/2}, \quad (5)$$

where δt is the temporal resolution, s is the scale (usually within 3% differences from the periods for Morlet). This coefficient is applied to every scale series before peak identification. For example, the power spectrum in Figure 5 does not exhibit the correction, and after its application, both peaks attain equal height, as expected since the waves have the same amplitude.

Additionally, for the time difference images, a correction based on the findings of Tang, J. et al. (2005) was implemented. This correction depends on both the resolution (time difference between the images) and the frequency of the waves depicted in the images, represented by:

$$I_{td}/I_0 = 2\sin\left[\frac{\omega\delta t}{2}\right], \quad (6)$$

where ω is the wave's frequency (inverse of the period). These corrections discussed here are applied after identifying the peaks.

3 Applying the methodology to observed airglow images

This section describes the use of the methodology to calculate MSGW parameters based on observed airglow images employed in creating keograms.

Figure 7 illustrates the wavelet power spectrum for the zenith time series of the keogram presented in Figure 2b. Distinct peaks are observable around periods of 20, 30, 50, 80, and 140 minutes, along with temporal variations and combinations among them. A peak selection procedure, detailed in the preceding section, is used to identify significant oscillations and their temporal positions in the wavelet power spectrum. For each significant period identified in the wavelet power spectrum for the zenith time series, a complete reconstruction of all time series is carried out, producing one reconstructed keogram per prominent period.

Figure 8 presents the reconstructed keogram and phase lines surrounding the temporal peaks of the 35 minute and 79 minute waves, which appear between 29-30 UT and 31-33 UT. Figures 8(a,c) show the reconstructed keograms for the respective waves, while (b,d) depict the phase lines around the temporal peaks for the waves. Spatial and temporal changes in amplitudes appear along the keogram for both reconstructed periods. As in the simulation example, the phase lines were unwrapped. The red sections in Figure 8(b,d) indicate where the optimal fit was identified (details below), aligning with the vertical red lines in

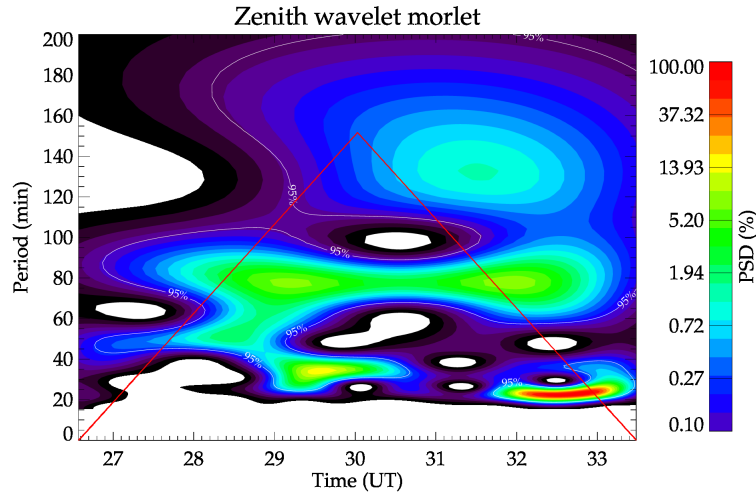


Figure 7. The wavelet power spectrum of the zenith time series for the keogram depicted in Figure 2b illustrates all the recorded MSGW periods. The power spectrum is normalized as a percentage relative to its maximum and minimum values.

Figure 8(a,c). In both components of the two reconstructions, the chosen region shows a coherent wave signal, indicating that the criteria for the best-fitting region automatically selected the phases' flattest and most parallel sections.

Two significant issues are evident in observed airglow keograms: (i) waves may not be present throughout the keograms; (ii) the phase lines are irregular, showing overlap between the waves. To avoid these problems, several lines are selected for a duration of half a period before and half a period after the peak central position. The phase region used in the calculation is chosen based on the fitting quality applied throughout the phase lines. This approach enables the fitting information to directly evaluate whether the signal is likely a coherent wave. A minimization threshold for the fitting variance is established to filter reliable fitting points and ensure that the signal originates from a traveling wave. Adjacent phase lines over time undergo the same fitting process and, adhering to the same minimization threshold, determine the average of the wave parameters around the peak time of the spectrum while also verifying the temporal continuity of the wave signal.

After the correct phase lines and their positions are determined, the MSGW parameters are estimated, and an average parameter is calculated from the approved phase lines if at least three phase lines meet the determined sector with fitting criteria approved, meaning the variance is below the threshold (details in Section 4).

For the example used in this section, Table 2 presents the results for the night of August 3-4, 2022. The procedure approved three waves with periods of 34, 79, and 46 minutes. Other peaks at 134 and 22 minutes were identified but did not meet the fitting conditions for the phase lines. Waves 1 and 2 have tiny standard deviations from the average parameters of the approved phase lines. Although Wave 3 has more questionable results, it still remains below 15% of the standard deviation.

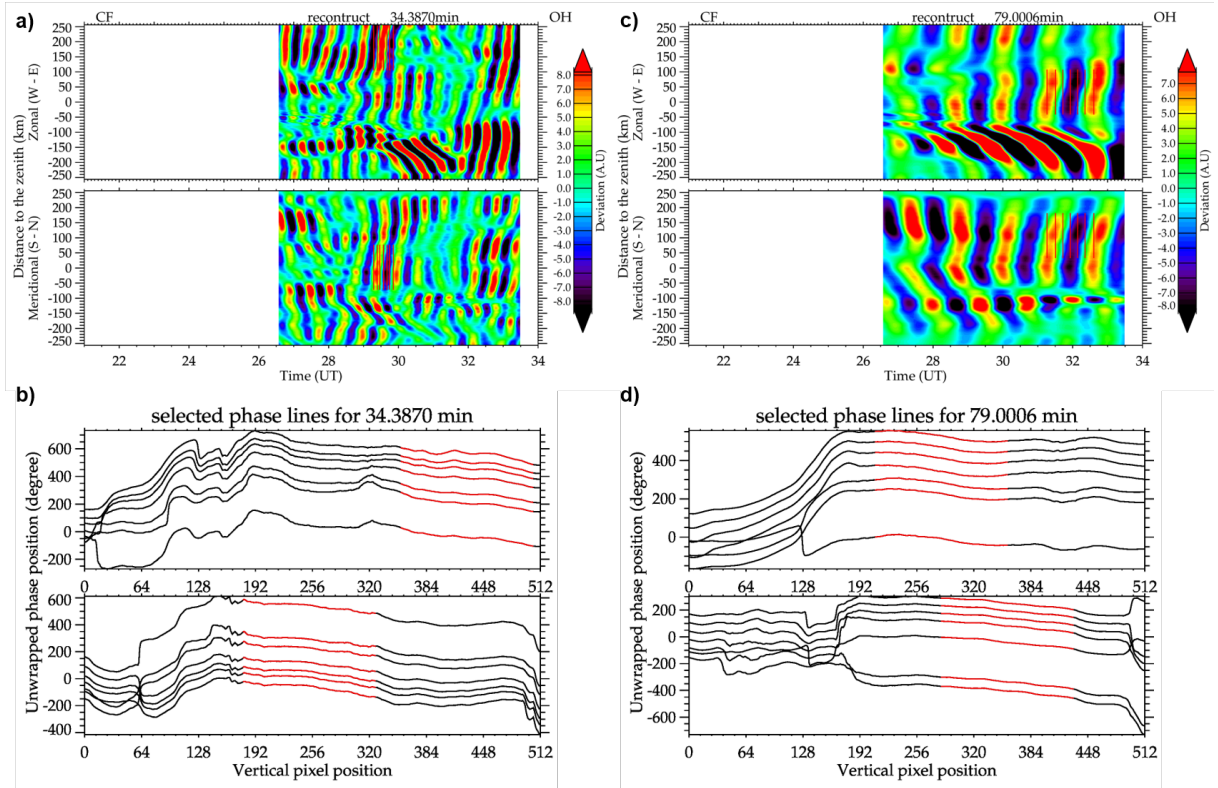


Figure 8. Reconstructed keogram for the 35 minute peak period, visible between 29 and 30 UT. The red lines depicted in panels a) and b) are highlighted in panels c) and d). They were used to calculate the MSGW parameters.

Table 2. MSGW parameters obtained by the new methodology, using observed airglow images of the night of August 3-4 of 2022. The uncertainties are also presented for each wave parameter.

Parameters	λ_h (km)	τ (min)	c_o (m/s)	Az ($^\circ$)
Wave 1	402 ± 26	34.3 ± 1.38	194 ± 12.63	44 ± 1.07
Wave 2	529 ± 6	79.0 ± 3.16	111 ± 1.4	46 ± 1.16
Wave 3	150.18 ± 15.43	46.9 ± 1.8	53.2 ± 8.1	139.0 ± 5.28

4 Errors estimations

250 This section examines the accuracy of the results, the error estimations, and the quality of procedures through the simulation of synthetic gravity waves. The investigation utilized the outlined procedure on a sizable dataset of simulated keograms to assess analysis quality, over error propagation throughout the process, and identify any related issues in the process. From now on, we will refer to error estimation (or propagated error) as the difference between the results of the MSGW parameter and the simulated wave parameters. It is important to emphasize that this study does not aim to validate the wavelet transform or other

255 established mathematical procedures, such as linear fitting. It still tracks errors through a combination of empirical and direct processes. Errors resulting from any transformations or mathematical procedures exist and can be studied or found in other publications. (Liu et al., 2007; Xu et al., 2024).

The data set of simulations consisted of keograms (similar to the one presented in Section 2.2) with pairs of waves: a primary wave varying the parameter and a second wave with a fixed parameter. The primary wave had wavelengths ranging from 50
260 to 500 km in steps of 50 km, periods from 20 to 200 min in steps of 30 min, phase speeds dependent on those parameters, and propagation directions varying by 30°. A total of 819 keograms were generated. The secondary wave was set to 275 km and 90 minutes, propagating to 120°, and was present in all keograms. Additionally, random noise with the same amplitude as the waves was introduced. A second trial was conducted to investigate the amplitudes by varying the relative amplitude of the waves from 1/6 to 3/2 while keeping the directions of the primary wave constant. This was intended to assess the influence of
265 the distance of the amplitude peak to the COI on the errors.

One situation worth noting is the superposition of wave parameters during interference. Figure 9 displays the phase lines of interfering waves in the simulation results. It is important to note that the primary cause of the phase tilt's nonlinearity is the coherent presence of another wave. The lines become irregular as the waves superpose over periods or wavelengths. Amplitudes can also interfere, and a dominant wave can completely obscure a smaller one. In this scenario, the primary wave
270 should have 80 minutes and a 200 km wavelength propagating at 120°. The result showed a 79.8 minute period (the peaks were selected quite accurately), while the wavelength was 250 km, which was closer to the second simulated wave. The direction remained near the expected, 117°. This illustrates how the superposition of waves can prevent us from accurately extracting their parameters under analysis.

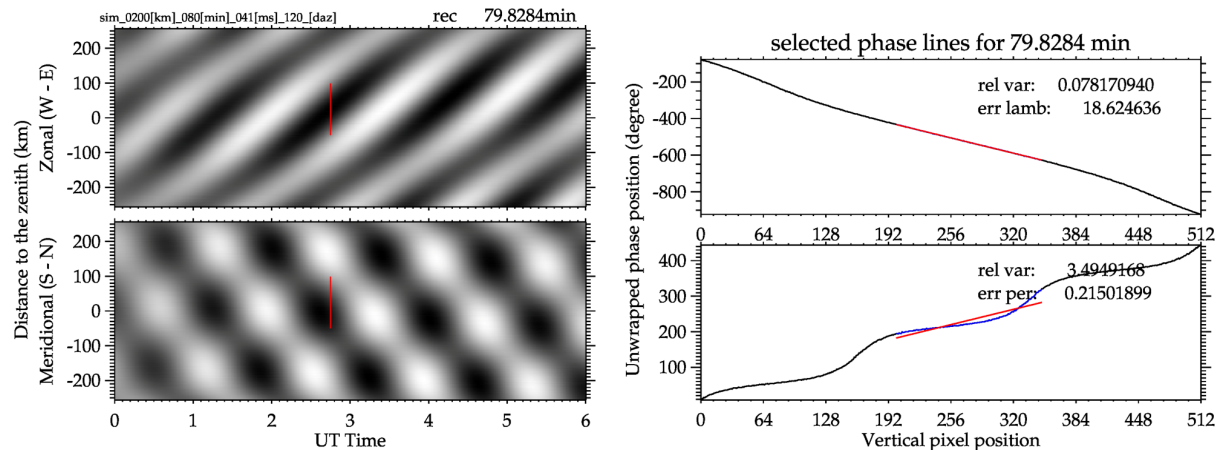


Figure 9. Two waves interfering in the simulated keogram result in tortuous phase lines, and the reconstruction resembles a chessboard pattern.

Figure 10 illustrates the errors in the calculated MSGW parameters as a function of the variance of the angular parameters
275 in the linear fit. The red straight line passes through the points (0,0) and (1,15), but it appears curved because of the log scale

on the x-axis. Numbers inside each plot indicate the number of waves over 15% of the error relative to a maximum threshold (in this case, it equals one). An almost linear growth of the errors with amplitude is observed with the variance increase, except for the periods and amplitudes that follow a regular value. Deviations in the periods stem from the inherent limitations of the wavelet transform, while amplitudes will be addressed later. One key pattern to note is the potential cut-off value for the variance, which ensures proper wave selection and accurate parameter estimation. For the example provided, this threshold might be set at 1. Still, it must be adapted for each scenario due to its sensitivity to prior processing, signal-to-noise ratio, and data resolution.

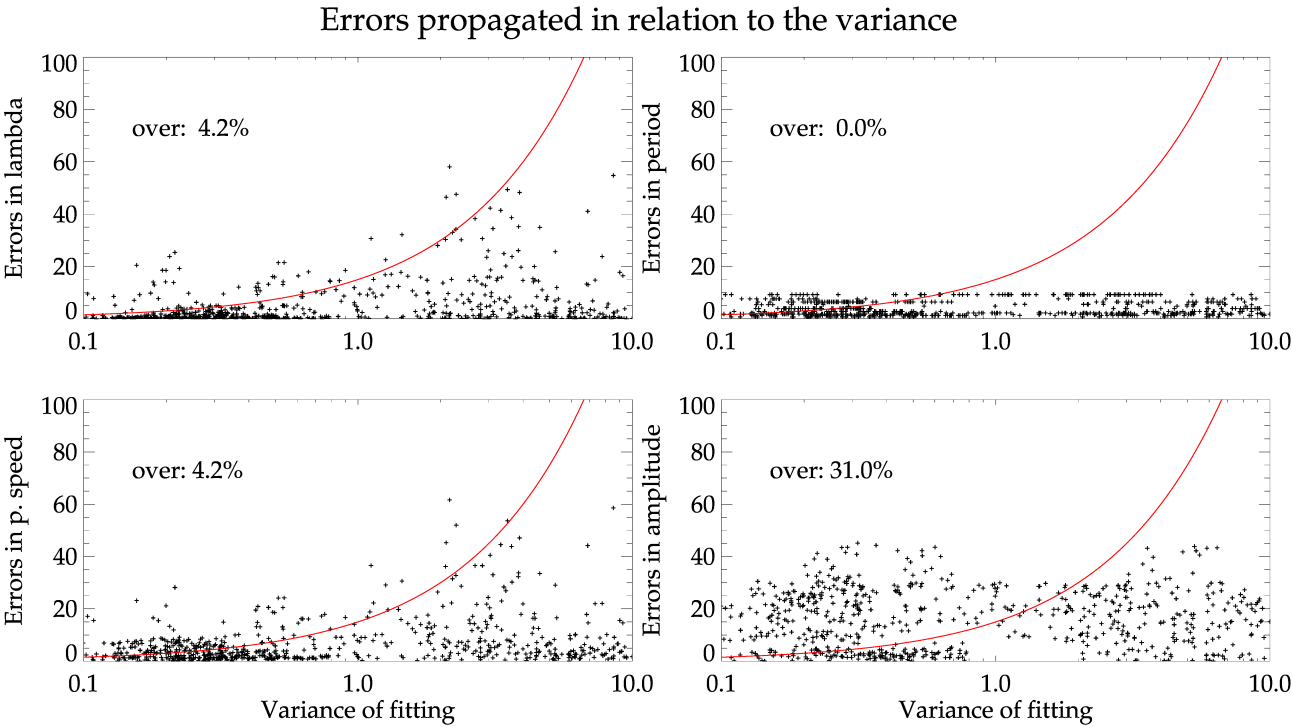


Figure 10. Estimated errors for the simulated MSGW parameters as a function of the variance of the linear fitting applied to the reconstructed phase lines.

Amplitude correction presents challenges because of the numerical limitations of wavelets, and even after correction, persistent issues remain. The primary concern is wave superpositions, and a noticeable reduction occurs when the spectrum's peak falls outside the cone of influence. The amplitudes were assessed individually to understand why they were significantly larger than other parameters. Since the amplitudes do not require passing through the phase line identification, their errors were assessed based on the position of the amplitude peak concerning the COI. The findings indicate that peaks within the COI have an estimation error of less than 10%, whereas peaks outside the COI may have an error of up to 20%. This addresses the

issue of peaks that fall outside the COI. No significant errors were identified in the MSGW parameters for the selections made outside the COI, aside from amplitudes that escalate errors to approximately 20%.

Figure 10 illustrates the quasi-linear progression of errors with variance. Furthermore, a statistical distribution can be defined, with the mean error value and the variation from this mean for the results that fell below the threshold. Table 3 presents the average error values obtained from the simulations, constrained by the discussed threshold. Apart from the amplitudes previously discussed, the error values do not increase significantly below the threshold.

Table 3. Average results from the error propagation study conducted through simulations, and the standard deviation σ of the distributions are shown in Figure 10.

Parameters	λ	τ	C_o	Amplitude
Errors (%)	2.56	3.61	4.24	15.28
σ (%)	4.31	2.59	4.55	11.67

5 Results of the MSGW observed in Antarctica

In 2022, an all-sky airglow imager was operated in Antarctica, taking images on nights when the moon was not visible. To study medium-scale gravity waves and achieve reliable results, only observation periods exceeding 2 hours were utilized. This approach ensures that the observed waves remain near the cone of influence of the wavelet results, thus eliminating any bias in amplitude estimation. In line with this concept, 18 nights were chosen for analysis, resulting in 46 medium-scale gravity waves examined using the outlined methodology.

Histograms of the calculated MSGW parameters are presented in Figure 10. The histogram of the observed horizontal wavelengths appears in the first panel, while the second and third panels display the histograms of the observed periods and phase speeds. The last panel displays the relative amplitudes of the waves; specifically, the amplitudes obtained from the wavelet analysis divided by the mean background brightness of the images. In addition to a wide range of wavelengths from 100 to 1000 km, most waves had wavelengths less than 400 km. The periods peaked at 20 to 90 minutes (with 20 minutes being the minimum value accepted in the analysis), and in some cases, they extended to nearly 180 minutes. Phase speeds peaked between 75 and 200 m/s, accompanied by some slower waves. Amplitudes remained below 4% with a concentration under 2%; these waves are faint oscillations.

Figure 11 illustrates the propagation directions of the waves as a function of their respective phase speeds, or their phase velocity vectors. Waves across a broad spectrum of velocities propagate in all directions without apparent anisotropy. However, more waves are observed with zonal components predominantly in the eastward direction compared to the westward direction. Additionally, no wind filtering pattern could be identified.

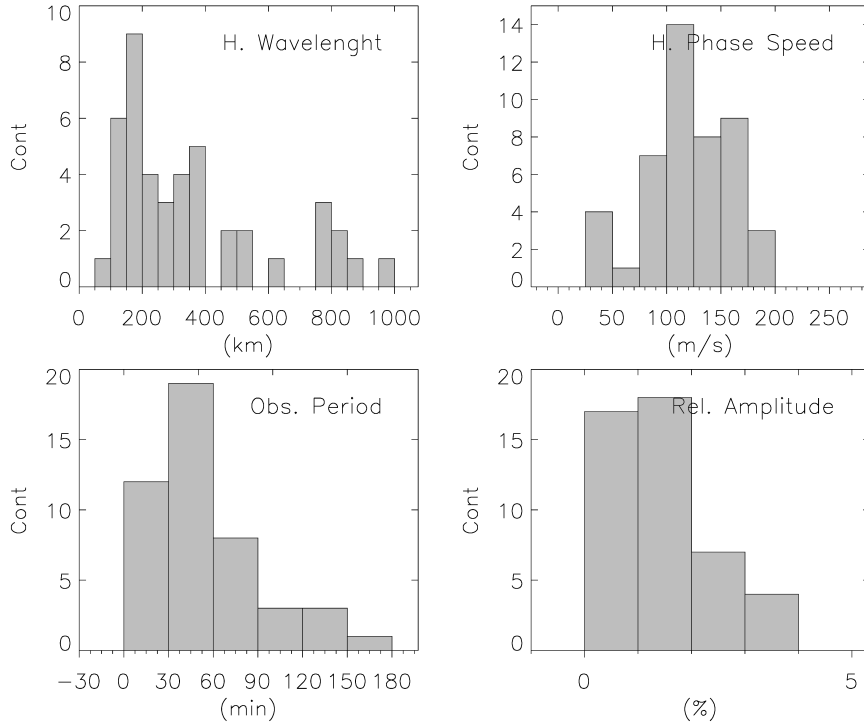


Figure 11. Histograms of the MSGW parameters observed at Antarctica in 2022.

6 Discussions of the methodology and MSGW results

This work describes a new methodology to determine medium-scale gravity wave parameters observed in a keogram automatically. Although it is consistently based on previous methods, we here highlight the new features: using the wavelet instead of the FFT transform to identify the timing of the waves, verifying the wave signal based on the wavelet's properties, and employing an automatic procedure with no human interference throughout. We identify as limitations the reliance on the fitting of linear phase lines and the necessity for meticulous human approval of the results after the process is concluded.

Additionally, this procedure addresses two common issues identified in the analysis: the waves are typically absent from some regions of the keogram and often interfere with noise and other waves. The superposition of waves is unavoidable, which represents a fundamental issue in oscillator theory. When specific wave properties, such as period, wavelength, or direction, are very similar, the resulting outcome may be a mixture of the two waves, as confirmed in our error propagation study through simulations. The threshold applied to the fitting deviation of phase lines and the multiple, time-spaced phase lines effectively minimized the impact of noisy and overlapping waves. However, we could still guard against these issues by visually inspecting the reconstruction to verify the presence and coherence of the waves, a capability lacking in earlier methods.

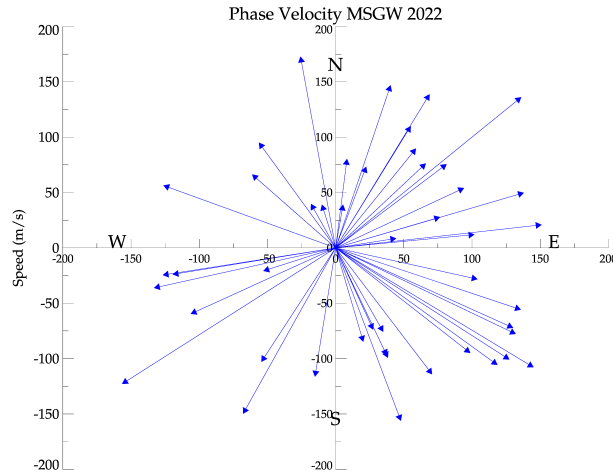


Figure 12. Phase velocity vectors of the analyzed MSGW. Each blue arrow is one MSGW phase velocity vector.

In Figure 10, the spectrum exhibits numerous higher error values resulting from the ambiguous selection of wave properties during wave interference. The resulting period can be closer to one wave, while the resulting wavelength is nearer to another. As shown in Figure 9, the analysis identified the period of one wave but the wavelength of another, creating visually tortuous phase lines. These conclusions led us to believe that an accurate selection of the waves must come after verifying the reconstruction
 330 of the phase line and ensuring there is no tortuous signal in those phase lines.

To emphasize the progress in the presented methodology, Figure 13 displays the results of the previous method for comparison and discussion. Panel (a) presents the keogram utilized for the analysis, whereas panels (b) and (c) illustrate the results for Waves 1 and 2. The upper panels illustrate the chosen human-oriented region, while the lower panels display the power spectrum for the components along with the analysis results. Further information regarding the method is available in Nyassor
 335 et al. (2025). Besides its simplicity, it is based on the FFT transform and the cross spectra to obtain the phase difference along the lines. The program operator should choose the region of interest and verify if the results align with their observations. For instance, they need to confirm that the phase fronts are closely spaced in accordance with the result period, and that their tilts correspond to the resulting propagation direction.

In comparison to the newly developed method, we emphasize the following points as significant enhancements in the
 340 methodology. The operator is not required to visually inspect the chosen areas to assess the reliability of the expected MSGW propagation direction. The outcome reflects the new model's reliability, as demonstrated by the reconstruction quality thoroughly analyzed and illustrated in Figure 10. Avoiding the Milky Way is a concern the operator must be cautious about; the phase line selection in our procedures indicates that it automatically avoids the Milky Way, which disrupts the phase continuity.

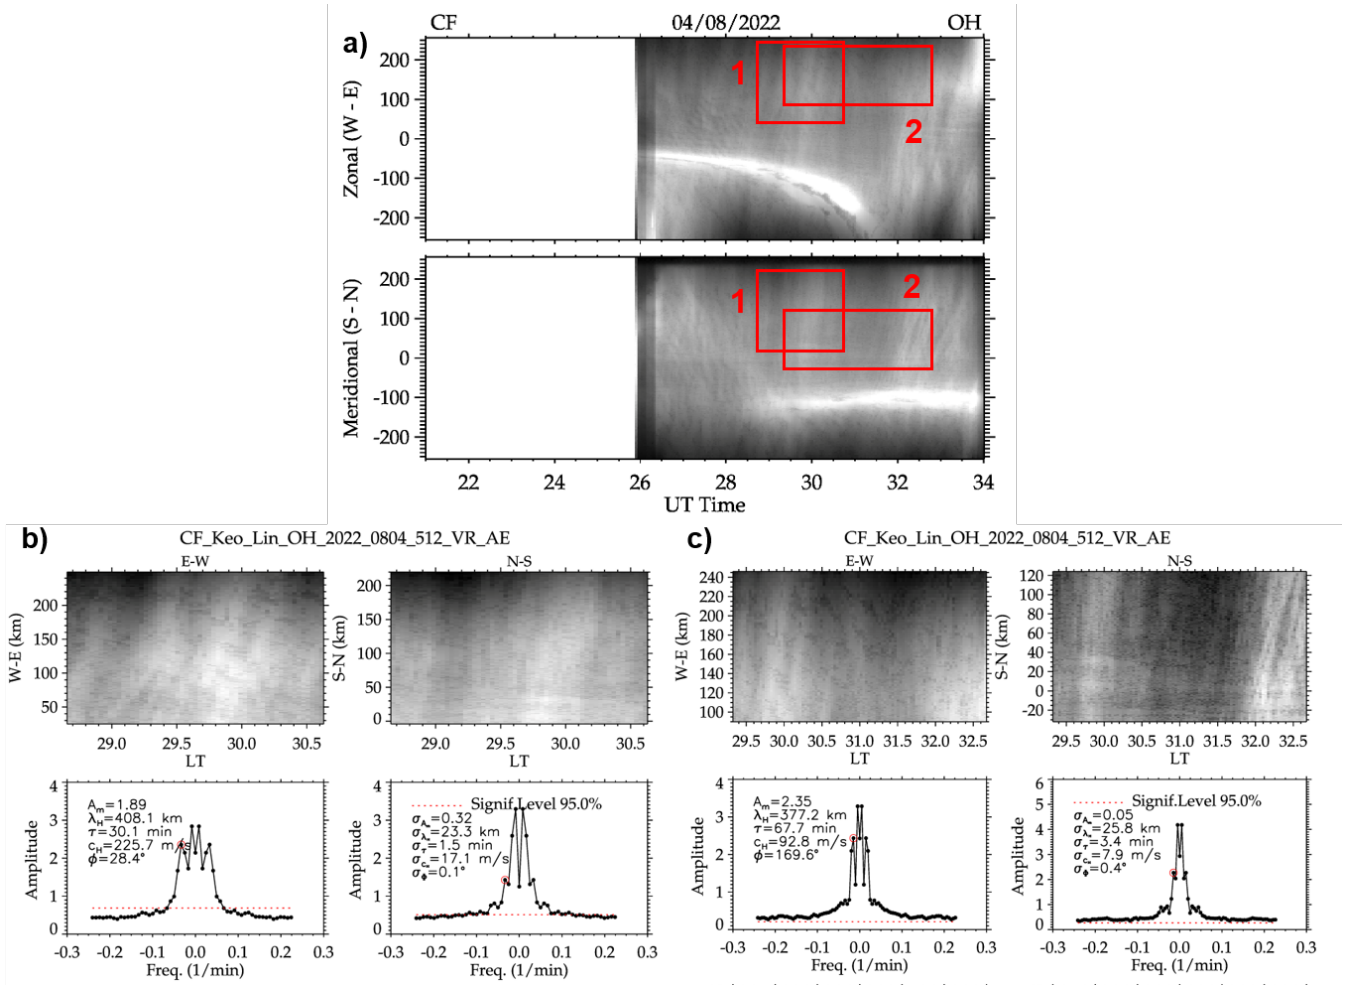


Figure 13. Example of the results of MSGW calculated using the previous methodology. (a) A keogram is used for the analysis; red boxes highlight the human-selected region for analyzing waves 1 and 2. The resulting images for the wave 1 analysis is presented in panel (b) and for the wave 2 in panel (c). The upper panels in the results display the selected regions, while the lower panels present the power spectrum plots and MSGW results with associated errors.

It has been observed that the previous analysis did not use the higher peak in the power spectrum. Indeed, the operator
 345 can select the wave they want; in the first case, the peak is the 60 minute wave, while the second identifies the 135 minute wave. Neither analysis was applied to the higher wave peak in the spectrum. Altering the selected region can modify the displayed parameters. This results from the superposition of the waves, an issue that remains in the new method. As mentioned in the section on errors, while accurately identifying peaks and distinguishing the wave from the background (which may include other waves) is important, parameter mixing can still occur, and there might not be effective solutions. In addition, our

350 innovative method automatically identifies and displays the key periods in the keogram separately, enhancing operator clarity and care.

Different regions were selected in the keograms components for each wave, sometimes far from the zenith. The authors believe that since the waves are medium-scale, their dimensions are large enough to be present to a significant extent in the images and consequently in the keograms. In the previous methodology, the operator must carefully select the same wave on
355 both keogram components. In the new methodology, we could configure the program to steer clear of selecting phase lines near the borders, yet we opted to allow the code to independently identify the wave packet. Nonetheless, results have consistently demonstrated strong performance in this region.

Finally, we assume that the simulated waves, shown in the synthetic images, propagate the same errors as observed waves in the airglow images when considering their discrete signal. In conclusion, the error estimation determined in the simulations
360 is used as the inherent error propagated in the analysis. It will be applied in future works on the observed airglow images for MSGW studies. Errors in phase speed are inherently more significant due to error propagation. Regarding the peaks outside the COI of the power spectrum, no major errors were identified in the MSGW parameters for selecting the peak, except for the amplitudes, which show consistent errors around 20%. While these errors are notable, the overall methodology remains highly satisfactory and achieves impressive results similar to earlier methods. Additionally, it may help minimize user bias by
365 automating much of the process.

In the tropical region of Brazil, medium-scale gravity waves were observed by Taylor et al. (2009) using airglow imaging with a different methodology. Their results showed waves with horizontal wavelengths ranging from 50 to 200 km, observed periods of 20 to 60 minutes, and horizontal phase speeds between 20 and 80 m/s, which were smaller and more concentrated than ours. Most of their waves were moving southeast and east. In the equatorial region, Essien et al. (2018) observed a
370 significant number of MSGW applying the Fourier Transform. Their results showed waves with 50 to 250 km, periods of 20 to 80 minutes, and speeds between 20 to 120 m/s, with the majority of the MSGW moving north and northeast. They also observed strong anisotropy in the propagation directions related to wind filtering. Gravity waves observed in this study differ from those in other locations, primarily in phase speed and wavelength distribution. The phase speed showed a broader distribution with higher values. The wavelengths exhibited a more extensive peak distribution, including a secondary peak around 800
375 km, which, to the authors' knowledge, has not yet been reported in airglow observations. In addition to some differences in the observed parameters, the results of our newly developed method agree with prior observations; the differences may be attributed to regional medium-scale gravity wave characteristics.

The amplitudes of medium-scale gravity waves observed by airglow imagers have not been previously addressed until now. Vargas et al. (2021) examined waves with periods comparable to ours directly in airglow images and estimated the amplitudes
380 of waves under 50 minutes, generally showing relative amplitudes of less than 5%; their findings agree with our observations. Medium-scale gravity waves have small amplitudes, which seems reliable since they are tenuous oscillations on the background of small-scale gravity waves. Thus, the present study could identify those faint waves through the applied image processing and distinguish overlapping waves by the phase line identification. At the same time, the work mentioned did not attempt to separate overlapping waves.

A new analysis methodology was developed for medium-scale gravity wave observations using keograms from airglow images. This method relies on wavelet transform, leveraging its characteristics to extract wave parameters efficiently while minimizing issues related to error propagation. The wavelet amplitudes were adjusted to ensure accurate wave amplitude measurements.

390 Simulated medium-scale gravity wave images were utilized to verify the error propagation throughout the procedure and to ensure reliable waveparameter estimation. Error propagation is minimal for all gravity wave parameters except the amplitudes, which, despite their correction, can still be underestimated when the peak lies outside the power spectrum cone of influence.

The MSGW parameters observed in Antarctica showed the typical behavior of medium-scale gravity waves observed at other sites using different methodological analyses. Overall, the newly developed methodology demonstrated remarkable effectiveness in wave identification and parameter estimation while also minimizing user bias, which was typically prominent in earlier
395 approaches. A drawback of the method lies in its reliance on a threshold for fitting quality estimation, which is influenced by image processing and data resolution. However, this has been demonstrated not to limit the method itself or the quality of the results. Despite its shortcomings, the new methodology is prepared to be used to analyze MSGW in other airglow observatories across the Antarctic continent, an initiative that is currently underway.

Data availability. Airglow images of the Comandante Ferraz Antarctic Station are available at the EMBRACE/INPE website.

400 *Author contributions.* Conceptualization, GAG, JVB and CMW; Data curation, JVB, CMW, PKN, CAOBF, AB, and DG; Formal analysis, GAG and PDP; Methodology, GAG, CMW, CAOBF and AB; Software, GAG, CMW, CAOBF; Validation, CMW and PDP; Visualization, GAG, CMW, PDP and HT; Writing – original draft, GAG; Writing – review & editing, GAG, CMW, PDP and PKN.

Competing interests. The authors declare that they have no conflict of interest.

Acknowledgements. This work is part of the First Author's Ph.D. studies at the National Institute for Space Research (INPE), supported
405 by CNPq (140401/2021-0) and Coordination for the Improvement of Higher Education Personnel (CAPES) finance code 001. The authors acknowledge the FAPESP Project under the grant 2019/05455-2 and the support of the Brazilian Antarctic Program (PROANTAR), which has guaranteed the re-establishment of the airglow observations at Ferraz in 2022. We extend our thanks to the Brazilian Ministry of Science, Technology, and Innovation (MCTI) and the Brazilian Space Agency (AEB) for grant no. 20VB.0009. G. Giongo thanks the CAPES for the exchange scholarship, financial code 001, and CNPq for grant number 140401/2021-0. PDP would like to acknowledge the National Science
410 Foundation grant 1443730. The authors acknowledge the Brazilian Study and Monitoring of Space Weather (Embrace) Program at INPE for providing all-sky airglow images used in this work.

References

- Alexander, M. J. and Barnet, C.: Using Satellite Observations to Constrain Parameterizations of Gravity Wave Effects for Global Models, *Journal of the Atmospheric Sciences*, 64, 1652–1665, <https://doi.org/10.1175/JAS3897.1>, publisher: American Meteorological Society
415 Section: *Journal of the Atmospheric Sciences*, 2007.
- Alexander, P., Luna, D., de la Torre, A., and Schmidt, T.: Distribution functions and statistical parameters that may be used to characterize limb sounders gravity wave climatologies in the stratosphere, *Advances in Space Research*, 56, 619–633, <https://doi.org/10.1016/j.asr.2015.05.007>, 2015.
- Alexander, S. P., Klekociuk, A. R., and Tsuda, T.: Gravity wave and orographic wave activity observed around the Antarctic and
420 Arctic stratospheric vortices by the COSMIC GPS-RO satellite constellation, *Journal of Geophysical Research: Atmospheres*, 114, <https://doi.org/10.1029/2009JD011851>, _eprint: <https://onlinelibrary.wiley.com/doi/pdf/10.1029/2009JD011851>, 2009.
- Bageston, J. V., Wrasse, C. M., Gobbi, D., Takahashi, H., and Souza, P. B.: Observation of mesospheric gravity waves at Comandante Ferraz Antarctica Station (62° S), *Annales Geophysicae*, 27, 2593–2598, <https://doi.org/10.5194/angeo-27-2593-2009>, 2009.
- Beldon, C. and Mitchell, N.: Gravity waves in the mesopause region observed by meteor radar, 2: Climatologies of gravity waves in the
425 Antarctic and Arctic, *Journal of Atmospheric and Solar-Terrestrial Physics*, 71, 875–884, <https://doi.org/10.1016/j.jastp.2009.03.009>, 2009.
- Bilibio, A. V.: ONDAS DE GRAVIDADE DE MÉDIA ESCALA OBSERVADAS NA AEROLUMINESCÊNCIA NOTURNA SOBRE CACHOEIRA PAULISTA, Dissertação de mestrado em geofísica espacial, Instituto Nacional de Pesquisas Espaciais, São José dos Campos, 2017.
- Ern, M., Preusse, P., Alexander, M. J., and Warner, C. D.: Absolute values of gravity wave momentum flux derived from satellite data, *Journal of Geophysical Research: Atmospheres*, 109, <https://doi.org/10.1029/2004JD004752>, _eprint: <https://onlinelibrary.wiley.com/doi/pdf/10.1029/2004JD004752>, 2004.
- Essien, P., Paulino, I., Wrasse, C. M., Campos, J. A. V., Paulino, A. R., Medeiros, A. F., Buriti, R. A., Takahashi, H., Agyei-Yeboah, E., and Lins, A. N.: Seasonal characteristics of small- and medium-scale gravity waves in the mesosphere and lower thermosphere over the
435 Brazilian equatorial region, *Annales Geophysicae*, 36, 899–914, <https://doi.org/10.5194/angeo-36-899-2018>, 2018.
- Figueiredo, C. A. O. B., Takahashi, H., Wrasse, C. M., Otsuka, Y., Shiokawa, K., and Barros, D.: Medium-Scale Traveling Ionospheric Disturbances Observed by Detrended Total Electron Content Maps Over Brazil, *Journal of Geophysical Research: Space Physics*, <https://doi.org/10.1002/2017JA025021>, 2018.
- Fritts, D. C. and Alexander, M. J.: Gravity wave dynamics and effects in the middle atmosphere, *Reviews of Geophysics*, 41, <https://doi.org/10.1029/2001RG000106>, 2003.
440
- Garcia, F. J., Taylor, M. J., and Kelley, M. C.: Two-dimensional spectral analysis of mesospheric airglow image data, *Appl. Opt.*, 36, 7374–7385, <https://doi.org/10.1364/AO.36.007374>, 1997.
- Giongo, G. A., Bageston, J. V., Batista, P. P., Wrasse, C. M., Bittencourt, G. D., Paulino, I., Paes Leme, N. M., Fritts, D. C., Janches, D., Hocking, W., and Schuch, N. J.: Mesospheric front observations by the OH airglow imager carried out at Ferraz Station on King George
445 Island, Antarctic Peninsula, in 2011, *Annales Geophysicae*, 36, 253–264, <https://doi.org/10.5194/angeo-36-253-2018>, 2018.
- Giongo, G. A., Bageston, J. V., Figueiredo, C. A. O. B., Wrasse, C. M., Kam, H., Kim, Y. H., and Schuch, N. J.: Gravity Wave Investigations over Comandante Ferraz Antarctic Station in 2017: General Characteristics, Wind Filtering and Case Study, *Atmosphere*, 11, 880, <https://doi.org/10.3390/atmos11080880>, 2020.

- Hindley, N. P., Wright, C. J., Smith, N. D., and Mitchell, N. J.: The southern stratospheric gravity wave hot spot: individual waves and their momentum fluxes measured by COSMIC GPS-RO, *Atmospheric Chemistry and Physics*, 15, 7797–7818, <https://doi.org/10.5194/acp-15-7797-2015>, 2015.
- Hindley, N. P., Wright, C. J., Smith, N. D., Hoffmann, L., Holt, L. A., Alexander, M. J., Moffat-Griffin, T., and Mitchell, N. J.: Gravity waves in the winter stratosphere over the Southern Ocean: high-resolution satellite observations and 3-D spectral analysis, *Atmospheric Chemistry and Physics*, 19, 15 377–15 414, <https://doi.org/10.5194/acp-19-15377-2019>, 2019.
- Hoffmann, L., Xue, X., and Alexander, M. J.: A global view of stratospheric gravity wave hotspots located with Atmospheric Infrared Sounder observations, *Journal of Geophysical Research: Atmospheres*, 118, 416–434, <https://doi.org/10.1029/2012JD018658>, _eprint: <https://onlinelibrary.wiley.com/doi/pdf/10.1029/2012JD018658>, 2013.
- Kam, H., Jee, G., Kim, Y., Ham, Y.-b., and Song, I.-S.: Statistical analysis of mesospheric gravity waves over King Sejong Station, Antarctica (62.2°S, 58.8°W), *Journal of Atmospheric and Solar-Terrestrial Physics*, 155, 86–94, <https://doi.org/10.1016/j.jastp.2017.02.006>, 2017.
- Kam, H., Song, I.-S., Kim, J.-H., Kim, Y. H., Song, B.-G., Nakamura, T., Tomikawa, Y., Kogure, M., Ejiri, M. K., Perwitasari, S., Tsutsumi, M., and Kwak, Y.-S.: Mesospheric Short-Period Gravity Waves in the Antarctic Peninsula Observed in All-Sky Airglow Images and Their Possible Source Locations, *Journal of Geophysical Research: Atmospheres*, 126, <https://doi.org/10.1029/2021JD035842>, 2021.
- KEO SCIENTIFIC LTD: Keo Sentry Imagers for Airglow Research, <http://www.keoscientific.com/aeronomy-imagers.php>, acesso em 15 nov. 2022, 2022.
- Kogure, M., Nakamura, T., Ejiri, M. K., Nishiyama, T., Tomikawa, Y., and Tsutsumi, M.: Effects of Horizontal Wind Structure on a Gravity Wave Event in the Middle Atmosphere Over Syowa (69 ° S, 40 ° E), the Antarctic, *Geophysical Research Letters*, 45, 5151–5157, <https://doi.org/10.1029/2018GL078264>, 2018.
- Kubota, M., Fukunishi, H., and Okano, S.: Characteristics of medium- and large-scale TIDs over Japan derived from OI 630-nm nightglow observation, *Earth, Planets and Space*, 53, 741–751, <https://doi.org/10.1186/BF03352402>, 2001.
- Lehner, M. and Rotach, M. W.: Current Challenges in Understanding and Predicting Transport and Exchange in the Atmosphere over Mountainous Terrain, *Atmosphere*, 9, 276, <https://doi.org/10.3390/atmos9070276>, 2018.
- Liu, Y., San Liang, X., and Weisberg, R. H.: Rectification of the Bias in the Wavelet Power Spectrum, *Journal of Atmospheric and Oceanic Technology*, 24, 2093–2102, <https://doi.org/10.1175/2007JTECHO511.1>, 2007.
- Lu, X., Chu, X., Fong, W., Chen, C., Yu, Z., Roberts, B. R., and McDonald, A. J.: Vertical evolution of potential energy density and vertical wave number spectrum of Antarctic gravity waves from 35 to 105 km at McMurdo (77.8°S, 166.7°E), *Journal of Geophysical Research: Atmospheres*, 120, 2719–2737, <https://doi.org/10.1002/2014JD022751>, 2015.
- Matsuda, T. S., Nakamura, T., Ejiri, M. K., Tsutsumi, M., Tomikawa, Y., Taylor, M. J., Zhao, Y., Pautet, P., Murphy, D. J., and Moffat-Griffin, T.: Characteristics of mesospheric gravity waves over Antarctica observed by Antarctic Gravity Wave Instrument Network imagers using 3-D spectral analyses, *Journal of Geophysical Research: Atmospheres*, 122, 8969–8981, <https://doi.org/10.1002/2016JD026217>, 2017.
- Medeiros, A. F., Taylor, M. J., Takahashi, H., Batista, P. P., and Gobbi, D.: An investigation of gravity wave activity in the low-latitude upper mesosphere: Propagation direction and wind filtering, *Journal of Geophysical Research: Atmospheres*, 108, <https://doi.org/10.1029/2002JD002593>, 2003.
- Moffat-Griffin, T., Hibbins, R. E., Jarvis, M. J., and Colwell, S. R.: Seasonal variations of gravity wave activity in the lower stratosphere over an Antarctic Peninsula station, *Journal of Geophysical Research*, 116, D14 111, <https://doi.org/10.1029/2010JD015349>, 2011.

- 485 Moffat-Griffin, T. and Colwell, S. R.: The characteristics of the lower stratospheric gravity wavefield above Halley (75°S, 26°W), Antarctica, from radiosonde observations, *Journal of Geophysical Research: Atmospheres*, 122, 8998–9010, <https://doi.org/10.1002/2017JD027079>, 2017.
- Nakamura, T., Higashikawa, A., Tsuda, T., and Matsushita, Y.: Seasonal variations of gravity wave structures in OH airglow with a CCD imager at Shigaraki, *Earth, Planets and Space*, 51, 897–906, <https://doi.org/10.1186/BF03353248>, 1999.
- 490 Nappo, C. J.: An Introduction to Atmospheric Gravity Waves, no. 85 in INTERNATIONAL GEOPHYSICS SERIES, Academic Press, ISBN 978-0-12-514082-9, 2002.
- Nielsen, K., Taylor, M., Hibbins, R., and Jarvis, M.: Climatology of short-period mesospheric gravity waves over Halley, Antarctica (76°S, 27°W), *Journal of Atmospheric and Solar-Terrestrial Physics*, 71, 991–1000, <https://doi.org/10.1016/j.jastp.2009.04.005>, 2009.
- Nyassor, P. K., Wrasse, C. M., Paulino, I., Yiğit, E., Tsali-Brown, V. Y., Buriti, R. A., Figueiredo, C. A. O. B., Giongo, G. A., Egito, F.,
- 495 Adebayo, O. M., Takahashi, H., and Gobbi, D.: Momentum flux characteristics of vertically propagating gravity waves, *Atmospheric Chemistry and Physics*, 25, 4053–4082, <https://doi.org/10.5194/acp-25-4053-2025>, publisher: Copernicus GmbH, 2025.
- Paulino, I., Takahashi, H., Medeiros, A. F., Wrasse, C. M., Buriti, R. A., Sobral, J. H. A., and Gobbi, D.: Mesospheric gravity waves and ionospheric plasma bubbles observed during the COPEX campaign, *Journal of Atmospheric and Solar-Terrestrial Physics*, 73, 1575–1580, <https://doi.org/10.1016/j.jastp.2010.12.004>, 2011.
- 500 Perwitasari, S., Nakamura, T., Kogure, M., Tomikawa, Y., Ejiri, M. K., and Shiokawa, K.: Comparison of gravity wave propagation directions observed by mesospheric airglow imaging at three different latitudes using the M-transform, *Annales Geophysicae*, 36, 1597–1605, <https://doi.org/10.5194/angeo-36-1597-2018>, publisher: Copernicus GmbH, 2018.
- Plougonven, R., Hertzog, A., and Guez, L.: Gravity waves over Antarctica and the Southern Ocean: consistent momentum fluxes in mesoscale simulations and stratospheric balloon observations, *Quarterly Journal of the Royal Meteorological Society*, 139, 101–118, <https://doi.org/10.1002/qj.1965>, number: 670, 2013.
- 505 Plougonven, R., Jewtoukoff, V., Cámara, A. d. I., Lott, F., and Hertzog, A.: On the Relation between Gravity Waves and Wind Speed in the Lower Stratosphere over the Southern Ocean, *Journal of the Atmospheric Sciences*, 74, 1075–1093, <https://doi.org/10.1175/JAS-D-16-0096.1>, 2017.
- Song, B., Song, I., Chun, H., Lee, C., Kam, H., Kim, Y. H., Kang, M., Hindley, N. P., and Mitchell, N. J.: Activities of Small-Scale Gravity
- 510 Waves in the Upper Mesosphere Observed From Meteor Radar at King Sejong Station, Antarctica (62.22°S, 58.78°W) and Their Potential Sources, *Journal of Geophysical Research: Atmospheres*, 126, <https://doi.org/10.1029/2021JD034528>, number: 10, 2021.
- Swenson, G. R. and Mende, S. B.: OH emission and gravity waves (including a breaking wave) in all-sky imagery from Bear Lake, UT, *Geophysical Research Letters*, 21, 2239–2242, <https://doi.org/10.1029/94GL02112>, 1994.
- Takahashi, H., Wrasse, C. M., Figueiredo, C. A. O. B., Barros, D., Paulino, I., Essien, P., Abdu, M. A., Otsuka, Y., and Shiokawa, K.: Equatorial Plasma Bubble Occurrence Under Propagation of MSTID and MLT Gravity Waves, *Journal of Geophysical Research: Space Physics*, 125, e2019JA027 566, <https://doi.org/https://doi.org/10.1029/2019JA027566>, 2020.
- 515 Tang, J., Kamalabadi, F., Franke, S., Liu, A., and Swenson, G.: Estimation of gravity wave momentum flux with spectroscopic imaging, *IEEE Transactions on Geoscience and Remote Sensing*, 43, 103–109, <https://doi.org/10.1109/TGRS.2004.836268>, 2005.
- Taylor, M. J., Jr., W. R. P., Pautet, P.-D., Zhao, Y., Olsen, C., Badu, H. K. S., Medeiros, A. F., and Takahashi, H.: RECENT PROGRESS
- 520 IN MESOSPHERIC GRAVITY WAVE STUDIES USING NIGHTGLOW IMAGING SYSTEM, *Brazilian Journal of Geophysics*, 25, 49–58, <https://www.sbgf.org.br/revista/index.php/rbgf/article/view/1710>, 2007.

- Taylor, M. J., Pautet, P.-D., Medeiros, A. F., Buriti, R., Fechine, J., Fritts, D. C., Vadas, S. L., Takahashi, H., and São Sabbas, F. T.: Characteristics of mesospheric gravity waves near the magnetic equator, Brazil, during the SpreadFEx campaign, *Annales Geophysicae*, 27, 461–472, <https://doi.org/10.5194/angeo-27-461-2009>, 2009.
- 525 Torrence, C. and Compo, G. P.: A Practical Guide to Wavelet Analysis, *Bulletin of the American Meteorological Society*, 79, 61–78, [https://doi.org/10.1175/1520-0477\(1998\)079<0061:APGTWA>2.0.CO;2](https://doi.org/10.1175/1520-0477(1998)079<0061:APGTWA>2.0.CO;2), 1998.
- Vadas, S. L., Xu, S., Yue, J., Bossert, K., Becker, E., and Baumgarten, G.: Characteristics of the Quiet-Time Hot Spot Gravity Waves Observed by GOCE Over the Southern Andes on 5 July 2010, *Journal of Geophysical Research: Space Physics*, 124, 7034–7061, <https://doi.org/10.1029/2019JA026693>, number: 8, 2019.
- 530 Vargas, F., Chau, J. L., Charuvil Asokan, H., and Gerding, M.: Mesospheric gravity wave activity estimated via airglow imagery, multistatic meteor radar, and SABER data taken during the SIMONe–2018 campaign, *Atmospheric Chemistry and Physics*, 21, 13 631–13 654, <https://doi.org/10.5194/acp-21-13631-2021>, 2021.
- Vosper, S. B., Ross, A. N., Renfrew, I. A., Sheridan, P., Elvidge, A. D., and Grubisic, V.: Current Challenges in Orographic Flow Dynamics: Turbulent Exchange Due to Low-Level Gravity-Wave Processes, *Atmosphere*, 9, 361, <https://doi.org/10.3390/atmos9090361>, 2018.
- 535 Wrasse, C. M., Takahashi, H., de Medeiros, A. F., e Michael John Taylor, L. M. L., Gobbi, D., and Fechine, J.: Determinação dos parâmetros de ondas de gravidade através da análise espectral de imagens de aeroluminescência, *Brazilian Journal of Geophysics*, 25, <https://sbgef.org.br/revista/index.php/rbgef/article/view/1675>, 2007.
- Wrasse, C. M., Nyassor, P. K., Da Silva, L. A., Figueiredo, C. A. O. B., Bageston, J. V., Naccarato, K. P., Barros, D., Takahashi, H., and Gobbi, D.: Studies on the propagation dynamics and source mechanism of quasi-monochromatic gravity waves observed over São Martinho da
- 540 Serra (29° S, 53° W), Brazil, *Atmos. Chem. Phys.*, 24, 5405–5431, <https://doi.org/10.5194/acp-24-5405-2024>, 2024.
- Wright, C. J., Hindley, N. P., Moss, A. C., and Mitchell, N. J.: Multi-instrument gravity-wave measurements over Tierra del Fuego and the Drake Passage – Part 1: Potential energies and vertical wavelengths from AIRS, COSMIC, HIRDLS, MLS-Aura, SAAMER, SABER and radiosondes, *Atmospheric Measurement Techniques*, 9, 877–908, <https://doi.org/10.5194/amt-9-877-2016>, 2016.
- Wright, C. J., Hindley, N. P., Hoffmann, L., Alexander, M. J., and Mitchell, N. J.: Exploring gravity wave characteristics in 3-D using a novel
- 545 S-transform technique: AIRS/Aqua measurements over the Southern Andes and Drake Passage, *Atmospheric Chemistry and Physics*, 17, 8553–8575, <https://doi.org/10.5194/acp-17-8553-2017>, 2017.
- Wright, C. J., Hindley, N. P., Alexander, M. J., Holt, L. A., and Hoffmann, L.: Using vertical phase differences to better resolve 3D gravity wave structure, *Atmos. Meas. Tech.*, 14, 5873–5886, <https://doi.org/10.5194/amt-14-5873-2021>, 2021.
- Wu, Q., Chen, Z., Mitchell, N., Fritts, D., and Iimura, H.: Mesospheric wind disturbances due to gravity waves near the Antarctica Peninsula,
- 550 *Journal of Geophysical Research: Atmospheres*, 118, 7765–7772, <https://doi.org/10.1002/jgrd.50577>, 2013.
- Xu, S., Vadas, S. L., and Yue, J.: Quiet Time Thermospheric Gravity Waves Observed by GOCE and CHAMP, *Journal of Geophysical Research: Space Physics*, 129, e2023JA032 078, <https://doi.org/10.1029/2023JA032078>, 2024.
- Zhao, Y., Taylor, M., Randall, C., Lumpe, J., Siskind, D., Bailey, S., and Russell, J.: Investigating seasonal gravity wave activity in the summer polar mesosphere, *Journal of Atmospheric and Solar-Terrestrial Physics*, 127, 8–20, <https://doi.org/10.1016/j.jastp.2015.03.008>,
- 555 2015.