

Models of buoyancy-driven dykes using continuum plasticity ~~and-or~~ fracture mechanics: a comparison

Yuan Li¹, Timothy Davis^{1,2}, Adina E. Pusok¹, and Richard F. Katz¹

¹Department of Earth Sciences, University of Oxford, Oxford, UK

²School of Earth Sciences, University of Bristol, Bristol, UK

Correspondence: Yuan Li (Yuan.Li@earth.ox.ac.uk)

Abstract. Magmatic dykes ~~are thought to~~ play an important role in the thermomechanics of tectonic rifting of the lithosphere. Our understanding of this role is limited by the lack of models that consistently capture the interaction between magmatism, including dyking, and tectonic deformation. While linear elastic fracture mechanics (LEFM) has provided a basis for understanding the mechanics of dykes, it is difficult to consistently incorporate LEFM into geodynamic models. Here we further
5 develop a continuum theory that represents dykes as plastic tensile failure in a two-phase, Stokes–Darcy model with a poro-viscoelastic–viscoplastic (poro-VEVP) rheological law (Li et al., 2023). We validate this approach by making quantitative comparison with LEFM, enabled by a novel poro-LEFM formulation. The comparison shows that dykes in our continuum theory propagate slowly—a consequence of Darcian drag on the magma. Moreover, dissipation of mechanical energy in the poro-VEVP model implies a high critical stress intensity in LEFM. We improve the poro-VEVP model by reformulating the
10 compaction stress and incorporating anisotropic permeability in regions of plastic failure.

1 Introduction

Magmatic dykes, formed by fluid-driven fracture, are ~~important pathways~~ an important pathway for magma ascent across the lithosphere. This is particularly true at rift zones, where they are promoted by both magma supply and tectonic extension (Buck, 2006). Dykes may reach the surface and fuel volcanic eruptions, or may stall and solidify at depth within the crust
15 (Fiske et al., 1997; Gudmundsson and Loetveit, 2005; Delcamp et al., 2012; Passarelli et al., 2014; Maccaferri et al., 2014). Dyke propagation is affected by the ambient stress field comprising tectonic stress, topographic loading (McGuire and Pullen, 1989; Fernández et al., 2002; Maccaferri et al., 2014; Rivalta et al., 2015; Sigmundsson et al., 2024), and crustal heterogeneity (Thiele et al., 2020; Drymoni et al., 2023). However, dyke propagation can also modify the ambient stress field and weaken the lithosphere (Kjøll et al., 2019; Brune et al., 2023). Consistently incorporating dyking in geodynamic models is therefore
20 crucial for understanding rifting processes; this remains an outstanding challenge. Here we describe progress in developing and validating an approach whereby dyking is modelled as plastic failure in a continuum, two-phase theory for partially molten rock.

In most previous work, the mechanics of dykes is formulated in terms of linear elastic fracture mechanics (LEFM). LEFM conceptualises dykes as mode-I fractures (Griffith, 1921; Odé, 1957; McKenzie et al., 1992) opened at the tip and widened by

25 magma flow (~~Rivalta et al., 2015~~)(See Rivalta et al., 2015, and references therein). The magmatic flow is modelled as viscous and parallel, in the narrow gap between the dyke walls, as shown in the schematic in Fig. 1(a). The gap opens behind a sharp tip, where elastic stress in the wall rock overcomes the fracture toughness and promotes tip advance. The elastic stress arises from a combination of the pressure of fluid within the dyke and the preexisting stress field surrounding it.

LEFM models have explored the propagation rate and geometry of two-dimensional fractures with constant flux (Lister, 1990; Roper and Lister, 2007), as well as two- and three-dimensional fractures with constant volume (Spence and Turcotte, 1990; Davis et al., 2020, 2023). These magmatic fractures can be slowed or arrested due to loss of volatiles and heat, and by solidification (Rubin, 1995; McLeod and Tait, 1999; Bolchover and Lister, 1999; Taisne et al., 2011; Rivalta et al., 2015; Abdullin et al., 2024). The direction of propagation has been investigated in relation to tectonic stress, topographic loading, and crustal heterogeneity (Maccaferri et al., 2014; Acocella et al., 2024). Despite the many successes of the LEFM approach, 35 there are significant obstacles to consistently embedding it into models that account for the causes, dynamics and consequences of dyking.

In the geodynamic context of the hot, ductile asthenosphere, magma transport has long been modelled using a poro-viscous, Stokes–Darcy theory (~~McKenzie, 1984; Katz, 2022~~)(e.g., McKenzie, 1984; Katz, 2022). This two-phase continuum formulation has been applied to geological settings including mid-ocean ridges (e.g., Sim et al., 2020; Pusok et al., 2022b), subduction 40 zones (e.g., Rees Jones et al., 2018; Cerpa et al., 2018), and beneath continents (e.g., Schmeling et al., 2019). These studies were limited to hot asthenospheric regions by the use of a purely viscous rheological law.

In other work, the theory has been extended to accommodate elastic and brittle deformation at lower temperatures, where a solely viscous response to stress is inadequate to capture the mechanics (e.g. Connolly and Podladchikov, 1998; Bercovici et al., 2001; Kau. This extension was aimed to model melt transport upward across the ductile–brittle transition. Notably, Keller et al. (2013) first 45 incorporated plastic failure into a two-phase continuum model of magmatism. Li et al. (2023) improved the theoretical formulation by employing a poro-viscoelastic–viscoplastic (poro-VEVP) rheology (Duretz et al., 2021) and proposing a new hyperbolic yield surface (e.g. Abbo and Sloan, 1995; Carol et al., 1997) to address physical, mathematical and computational issues of Keller’s model. Li et al. (2023) showed how dyke-like features emerge from this formulation and bear a quantitative similarity with dykes described by LEFM theory. In particular, Li et al. (2023) observed that a poro-VEVP dyke can be narrow and fast 50 relative to advection and (de)compaction in poro-viscous dynamics (~~Katz et al., 2022~~)(Kelemen et al., 1997; Katz et al., 2022), and the stress distribution around its tip matches the LEFM model for some value of critical stress intensity.

However, ~~further validation and exploration of the capabilities of the continuum representation of dykes are necessary.~~ Key two significant differences with LEFM theory are readily noted: Darcian versus Poiseuille flow of the liquid phase ; and plastic yield versus brittle fracture of the solid phase. ~~In this comparison~~ Therefore, further exploration and validation 55 of the capabilities of the continuum representation of dykes are necessary. In the comparison with LEFM, two major issues require further investigation. The first is the slower propagation speed predicted by the poro-VEVP formulation (~ 1 m/yr versus ~ 1 km/day (Davis et al., 2023)). The second is the very high critical stress intensity needed in LEFM for consistency between the predictions (~ 1.5 GPa $m^{1/2}$). The previous benchmark in Li et al. (2023) is also incomplete in that the poro-VEVP

dyke was driven by far-field tensile stresses, not buoyancy, and did not reproduce the classic LEFM cases of constant-flux or constant-volume for comparison.

To organise our investigation of these issues, we propose two hypotheses. We hypothesise that the slow speed of poro-VEVP dyke propagation is due to the greater viscous resistance to magma ascent in Darcian porous flow compared to Poiseuille flow. Furthermore, we hypothesise that the fracture toughness that provides an equivalent resistance to dyke propagation can be directly calculated from the rate of plastic energy dissipation in the poro-VEVP model. We verify these hypotheses by simulating a constant-flux, buoyancy-driven fracture in the poro-VEVP model and making quantitative comparison to a corresponding LEFM model. ~~Our simulations are set up such that poro-VEVP fracture propagates vertically at a constant speed.~~

To facilitate the comparison, we introduce a modified LEFM model in which the interior of the dyke is a porous medium. This assumes a dyke region with fixed width but variable porosity (Fig. 1(b)). In this poro-LEFM model, Darcy flow supplies buoyant fluid to a toughness-dominated tip embedded in an elastic medium. The poro-LEFM model converges to the classical LEFM model in the limit of the porosity going to unity. However, at smaller porosity, it facilitates a direct comparison with the poro-VEVP model in terms of stress distribution, porosity profile and dyke propagation speed. We show that through the use of a poro-LEFM fracture toughness, calculated with a poro-VEVP energy analysis, there is a good match between the two models. This establishes a physics-based, quantitative relation between the poro-VEVP and LEFM models. Moreover, it advances our understanding of how distributed plastic failure affects dyke propagation.

As we detail below, this comparison also highlights a shortcoming of the poro-VEVP model. Isotropic permeability within the poro-VEVP dyke promotes widening by horizontal porous flow, a behaviour not associated with real (or LEFM) dykes. We resolve this discrepancy by introducing an anisotropic permeability tensor into the [two-dimensional](#) poro-VEVP model to limit leakage and enhance fracture propagation (e.g. Snow, 1969). Anisotropic permeability can arise from anisotropic stresses and aligned pores or fractures (e.g. Snow, 1969; Sibson, 1996; Daines and Kohlstedt, 1997; Li et al., 2009; Takei, 2010; Taylor-West and Katz, 2015; Lei et al., 2017; Li et al., 2023).

This manuscript is organised as follows. The next section (Sec. 2) develops the poro-LEFM model, details the poro-VEVP model, and explains how energy dissipation is used to evaluate fracture toughness. The results section (Sec. 3) illustrates the steadily propagating dykes produced by the poro-VEVP model. The results section also verifies the estimated toughness by comparing poro-VEVP and poro-LEFM models in terms of their porosity and stress distributions. We discuss the results and their broader relevance in section 4 and summarise in section 5.

2 Models of a buoyancy-driven dyke

In this section, we develop two distinct models that are both aimed to describe buoyancy-driven dyke ascent. We first introduce the poro-LEFM model, which differs from the standard LEFM model in that it treats the dyke interior as a porous medium. We then review the continuum mechanical, poro-VEVP model developed in Li et al. (2023), and equip it with two key enhancements: a reformulated compaction pressure for improved numerical robustness and anisotropic permeability to impose a

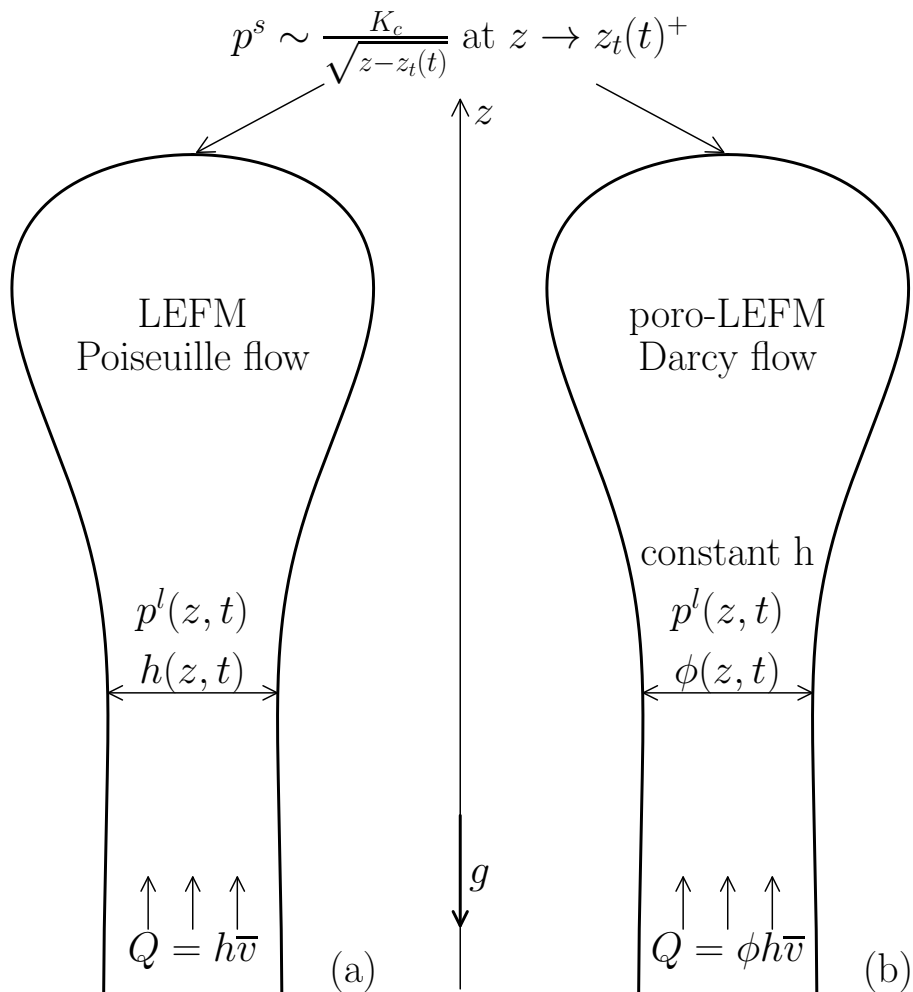


Figure 1. Sketch of the LEFM (e.g. Lister, 1990) and poro-LEFM models for a buoyancy-driven fracture. Here, Q denotes the volume flux through the fracture and \bar{v} represents the cross-section average of vertical velocity component of the liquid. Both Q and \bar{v} are constants at $z \rightarrow -\infty$. The far-field conditions and the definition of other notations are presented in section 2.

preferred dyke-parallel direction of Darcy flow. Finally, we develop an analysis of mechanical energy dissipation in the poro-VEVP representation of a dyke. This provides a quantitative estimate of the effective fracture toughness for the poro-LEFM model, and hence a basis for comparing the models.

95 2.1 The poro-LEFM formulation

The development of the poro-LEFM model follows Lister (1990) both conceptually and mathematically. This section gives an overview; full details are available in Appendix A.

Similar to the classic LEFM model in Figure 1(a), we consider a vertical, two-dimensional channel as shown in Figure 1(b), extending from $-\infty$ to a tip at position $z = z_t$. This channel represents an idealised dyke where buoyant fluid flows upward, deforms the elastic solid phase, and drives the fracture at the tip. Along the fracture walls, the elastic normal stress p^s is intensified by a critical factor K_c near the tip.

Unlike the LEFM model, which assumes Poiseuille flow in an open channel of variable width, the poro-LEFM model assumes porous flow in a permeable channel of uniform, fixed width h and variable porosity $\phi(z, t)$. The porous flow is modulated by a porosity-dependent mobility $M_\phi = k_\phi/\mu$, where k_ϕ is the permeability and μ is the liquid viscosity. We assume this porous flow is driven purely by buoyancy, leading to a constant porosity ϕ_0 in the tail region, which we refer to as the far field.

The mathematical formulation includes Darcy's law for the liquid flux ϕv , an elastic-stress balance equation, and boundary conditions at the tip and the far field,

$$\phi v = M_\phi \left(-\frac{\partial p^l}{\partial z} + \Delta \rho g \right), \quad (1)$$

$$110 \quad p^s(z, t) = -\left(\frac{G}{1-\nu} \right) \frac{1}{2\pi} \int_{-\infty}^{\infty} \frac{\partial h \phi(\xi, t)}{\partial \xi} \frac{d\xi}{\xi - z}, \quad (2)$$

$$p^s(z, t) \approx -\frac{K_c}{[2(z - z_t)]^{1/2}}, \quad \text{at } z \rightarrow z_t^+, \quad (3)$$

$$\phi \approx \phi_0, \quad \text{at } z \rightarrow -\infty. \quad (4)$$

Here v is the vertical component of liquid velocity, p^l is the dynamic liquid pressure (assumed equal to p^s inside the dyke), $\Delta \rho = \rho^s - \rho^l$ is the density difference between solid (s) and liquid (l), g is the gravitational force per unit mass, G and ν are the elastic shear modulus and Poisson's ratio of the solid, and K_c is the critical stress intensity. In this manuscript we select $\nu = 1/2$, which enforces that the solid phase is incompressible. [Note that Eq. \(2\) adapts the standard LEFM elastic stress formulation \(e.g., \(Lister, 1990\)\) to account for porosity effects on solid deformation.](#)

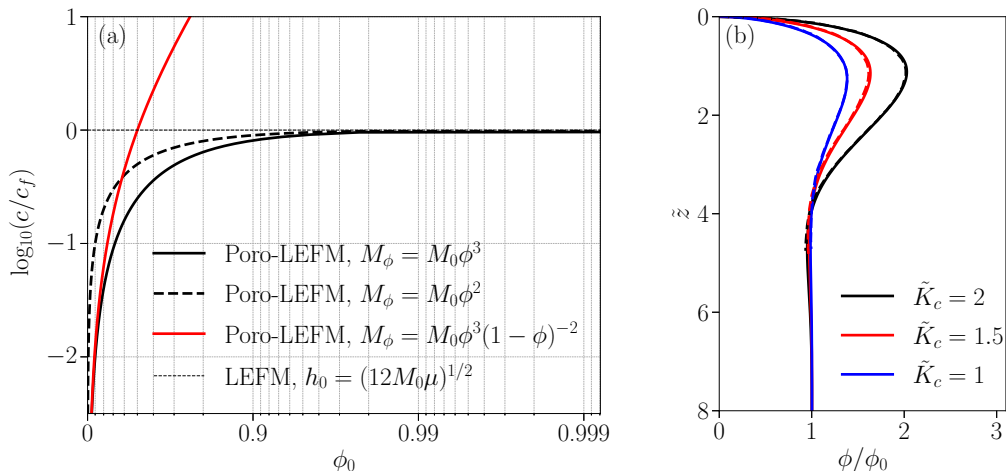


Figure 2. Comparison of LEFM and poro-LEFM models. (a) Tip propagation speed as a function of melt fraction. The horizontal axis is presented in a logarithmic scale. Three different permeability–porosity relationships are considered in the poro-LEFM model. The mobility prefactor M_0 is defined as $M_0 = h_0^2/12\mu$, ensuring that $c \rightarrow c_f$ when $\phi_0 \rightarrow 1$. (b) Profiles of porosity at different values of \tilde{K}_c in the poro-LEFM model (solid lines) compared with the profiles of scaled fracture width h/h_0 in the LEFM model (dashed lines) (Lister, 1990, Fig. 3). Here, \tilde{K}_c and \tilde{z} denote scaled K_c and z , respectively.

For a purely buoyancy-driven flow, buoyancy is balanced by the Darcian drag force and the propagation speed c becomes constant. This speed is obtained by solving Eq. (1) for v as $z \rightarrow -\infty$, where there is no gradient of dynamic pressure,

$$120 \quad c = \frac{M_\phi(\phi_0)}{\phi_0} \Delta\rho g. \quad (5)$$

Here $M_\phi(\phi_0)$ is the fluid mobility at $\phi = \phi_0$. This implies a constant volume flux from the far field, $Q_0 \equiv \phi_0 hc$. We compare this result with a canonical LEFM, buoyancy-driven, open fracture having far-field width h_0 and hence tip speed $c_f = h_0^2 \Delta\rho g / 12\mu$ (Lister, 1990).

Figure 2(a) shows how the poro-LEFM steady propagation speed c increases with the far-field porosity ϕ_0 for two choices of fluid mobility: a power-law relation $M_\phi = M_0\phi^n$, where $n = 2$ and 3 , and the Kozeny-Carman relation $M_\phi = M_0\phi^3(1-\phi)^{-2}$. We choose $M_0 = h_0^2/12\mu$ to achieve a convergence between c and c_f . In particular, with our choice of M_0 in the power-law permeability relation, the speed c approaches c_f as $\phi_0 \rightarrow 1$. We adopt the cubic porosity dependence for the remainder of this manuscript to enforce a quantitative relationship between poro-LEFM and canonical LEFM theory.

We solve the system of equations and boundary conditions (1)–(4) after rescaling variables and transforming into a coordinate system that moves with the tip (see Appendix A for details). Solutions for $\phi(z)$ are obtained with the numerical procedure given by Roper and Lister (2007).

Figure 2(b) presents results for three choices of K_c . The porosity is non-dimensionalised by the far-field porosity ϕ_0 . All porosity profiles show a bulging head approaching the tip at which $\phi = 0$, and a constant value in the tail where $\phi = \phi_0$. The

head widens (again, in terms of the porosity) with increasing K_c , giving a larger solid deformation and therefore reflecting the
 135 increasing stress required to propagate the tip.

Figure 2 verifies the anticipated alignment between the poro-LEFM and LEFM models. Panel (a) displays the convergence
 of propagation speeds when M_0 is judiciously selected as noted above. It is important to recognise that for the far-field volume
 flux to converge as $\phi \rightarrow 1$, the poro-LEFM width must equal the far-field width of the LEFM dyke, meaning $h = h_0$. Panel (b)
 shows the quantitative equivalence between the porosity distribution in a poro-LEFM dyke and the width variation in an
 140 LEFM dyke in dimensionless terms, corroborated by the numerical results from Lister (1990). This equivalence is also clear
 by comparing the dimensionless equations Eqs. (A10)–(A13) in Appendix A with Eqs. (2.8)–(2.10) of Lister (1990).

2.2 The poro-viscoelastic–viscoplastic (poro-VEVP) formulation

This section presents a two-dimensional (2-D) Stokes–Darcy model for simulating a buoyancy-driven dyke with constant liquid
 influx from the boundary. This model shares Darcy’s equation and mass continuity equation with the poro-LEFM model, but
 145 in 2-D form and taking into account the solid velocity. The stress–balance equation for the solid phase is more complex, bal-
 ancing stresses of the two-phase medium in the context of a poro-viscoelastic–viscoplastic (poro-VEVP) rheological law. The
 solid phase deforms as a Maxwell material combining viscous, elastic, and viscoplastic elements, with a Kelvin viscosity for
 regularisation of plasticity. For more details on this poro-VEVP model, see Li et al. (2023). Here, we focus on improvements to
 the poro-VEVP model for simulating a constant-width, fluid-driven fracture in a porous medium and explain the computational
 150 model setup.

2.2.1 Stress-balance equation and a new compaction formulation

Stress-balance of a two-phase medium satisfies

$$-\nabla p^l + \nabla \cdot [(1 - \phi)\boldsymbol{\tau}^s] - \nabla [(1 - \phi)\Delta P] - \phi\Delta\rho\mathbf{g} = \mathbf{0}. \quad (6)$$

Here, $(1 - \phi)\boldsymbol{\tau}^s$ and $-(1 - \phi)\Delta P$ represent the effective shear and decompaction stresses, respectively. [These are components
 155 of Terzaghi’s effective stresses \(Terzaghi, 1943\).](#) $\Delta P = p^s - p^l$ is the pressure difference between phases. The shear and de-
 compaction stresses must be expressed in terms of strain rates and must also be constrained by the plastic yield condition. This
 challenge was addressed by Li et al. (2023) and we follow their approach, with a small modification.

Previous studies employed an effective-viscosity method for both shear and compaction (e.g., Moresi et al., 2003; Keller
 et al., 2013; Li et al., 2023). While this approach is appropriate for shear, it can lead to a divergence of the effective compaction
 160 viscosity during plastic failure, compromising computational robustness (Appendix B). We propose a new formulation of ΔP
 to resolve this, which compares with the old formulation as follows,

$$\text{Old formulation:} \quad (1 - \phi)\Delta P = -\zeta_{\text{eff}}\mathcal{C}', \quad (7)$$

$$\text{New formulation:} \quad (1 - \phi)\Delta P = -\zeta^{\text{ve}}\mathcal{C}' + (1 - \phi)\Delta P_{dl}, \quad (8)$$

where

$$165 \quad C' = \left[C - \frac{(1 - \phi)\Delta P^o}{Z_\phi \Delta t} \right], \quad \zeta^{\text{ve}} = \left(\frac{1}{\zeta_\phi^{\text{v}}} + \frac{1}{Z_\phi \Delta t} \right)^{-1}. \quad (9)$$

Here, C is the solid decompaction rate, ζ_ϕ^{v} and Z_ϕ are the compaction viscosity and bulk modulus, Δt is the time step, and ΔP^o is the overpressure in previous time step. Both the effective viscosity ζ_{eff} in the old formulation and the dilatancy pressure $(1 - \phi)\Delta P_{dl}$ in the new formulation are parameters utilised to enforce the plastic yielding limit in the stress-balance equation.

When the plastic yield limit is not reached, $\zeta_{\text{eff}} = \zeta^{\text{ve}}$ and $\Delta P_{dl} = 0$, making the two formulations equivalent. During plastic
 170 yield, ΔP is calculated from the plastic model, and either formulation can be rearranged to obtain the corresponding parameter while maintaining a fixed C' . The old formulation calculates the effective compaction viscosity as $\zeta_{\text{eff}} = (1 - \phi)\Delta P/C'$ and feeds ζ_{eff} to the stress-balance equation as a constant, which becomes infinity when $C' = 0$. This infinite ζ_{eff} impacts the convergence of the solver for the velocity field from the stress-balance equation. The new formulation resolves this issue by calculating $(1 - \phi)\Delta P_{dl} = (1 - \phi)\Delta P + \zeta^{\text{ve}}C'$ instead, and feeding it to the stress-balance solver as a constant. **This approach**
 175 **only changes how the stress-balance equation is linked with the plastic yield condition, without altering either of the two physics.** The new constant always remains finite, improving the robustness of the computational codes.

2.2.2 Anisotropic permeability due to plastic failure

In the poro-VEVP model with isotropic permeability, a vertical, porous dyke inevitably widens over time due to liquid flux across the walls of the dyke. However, for consistency with the buoyancy-driven poro-LEFM model in Section 2.1, a constant
 180 width is essential. Therefore, to limit leakage through the walls, we introduce an anisotropic permeability (Snow, 1969). This is used to ensure that the poro-VEVP dyke's width can remain constant over time, even as porosity within it may vary due to (de)compaction.

Anisotropic permeability can be thought of as a macroscopic representation of melt-preferred orientation (MPO), which refers to the alignment of interconnected, melt-filled pores at grain scale in partially molten rocks (e.g. Daines and Kohlstedt,
 185 1997; Takei, 2010; Bader et al., 2024). Under the effect of differential stresses, these pores align and elongate perpendicular to the direction of maximum tension, causing differences in fluid transmissivity in different directions.

Mode-I fractures in a porous medium, from grain-scale microcrack damage to fractures that span large numbers of grains, have an effect on liquid permeability that is similar to MPO. They create anisotropic permeability that favours flow along the fracture. Indeed, macroscopic Mode-I fractures have been conceptualised as the result of the propagation of microcracks under
 190 tension, with the propagation direction perpendicular to the direction of maximum tension (e.g. Griffith, 1921; Murrell, 1964). Aligned microcracks are closely analogous to aligned, elongated pores. We therefore assume that mode-I fractures also cause an anisotropic permeability.

To incorporate permeability anisotropy, we use a rank-2 tensor \mathbf{M}_ϕ to express the liquid mobility, with a size matching the problem's dimensionality. Darcy's equation is then written as

$$195 \quad \phi(\mathbf{v}^l - \mathbf{v}^s) = -\mathbf{M}_\phi \cdot (\nabla p^l + \Delta \rho \mathbf{g}), \quad \text{where} \quad \mathbf{M}_\phi = M_0 \phi^n \mathbf{M}_a. \quad (10)$$

Here, \mathbf{v}^l and \mathbf{v}^s represent liquid and solid velocity, respectively. \mathbf{M}_a represents the anisotropic modification. When \mathbf{M}_a is the identity tensor, the mobility is isotropic and the equation above becomes the standard Darcy's equation.

For vertically propagating dykes simulated in this manuscript, \mathbf{M}_a is a diagonal matrix,

$$\mathbf{M}_a = \begin{pmatrix} k_{xx} & 0 \\ 0 & k_{zz} \end{pmatrix}, \quad \text{where} \quad k_{xx}, k_{zz} \in (0, k_a). \quad (11)$$

200 Here, k_a is a prescribed maximum permeability enhancement. We define k_{xx} and k_{zz} based on the plastic strain components, e_{xx}^K and e_{zz}^K , for example,

$$k_{xx} = \frac{k_a}{1 + (k_a - 1) \exp(r_{xx}/\epsilon)}, \quad \text{with} \quad r_{xx} = \frac{e_{xx}^K}{e_{xx}^K + e_{zz}^K} - \frac{1}{2}. \quad (12)$$

Similarly, k_{zz} is defined in terms of r_{zz} , which is written by replacing e_{xx}^K with e_{zz}^K in the numerator of r_{xx} . In equation (12) and its variant for k_{zz} , the quantities r_{xx} and r_{zz} measure the anisotropy of accumulated plastic strain in the x - and z -directions, respectively. Both are equal to 0 when $e_{xx}^K = e_{zz}^K$, leading to $k_{xx} = k_{zz} = 1$, indicating isotropic mobility. The anisotropy of mobility is related to the anisotropy of plastic strain by $\epsilon \sim 5\%$, a characteristic scale of strain anisotropy. As we model only small deformations in this manuscript, we neglect advection of plastic strains.

2.2.3 Rheological parameters

To facilitate comparison with the poro-LEFM model, we aim to align the rheology of the poro-VEVP model as closely as possible. Moreover, our focus here is on relating plastic deformation in a two-phase continuum to fluid-driven fracture. Therefore we suppress viscous deformation by assigning effectively infinite values to both the shear and compaction viscosity. Furthermore, we assign a relative small, constant value to the Kelvin viscoplastic viscosity η^K . The impact of this viscosity is discussed in section 2.3.

The elastic shear (G_ϕ) and bulk (Z_ϕ) moduli follow porosity-dependent ~~relations,~~

$$215 \quad \underline{G_\phi = (1 - \phi)G, \quad Z_\phi = (1 - \phi)Z.}$$

~~Here G , and Z are constant, reference values~~relationships, as shown in Table 1. Note that this bulk modulus relates to the compaction of a solid-liquid aggregate, not to the compressibility of the solid phase. In fact, we assume that the solid phase is incompressible, which is enforced in the mass conservation equation.

2.2.4 Computational model

220 The model formulation closely follows that of Li et al. (2023) with the modifications discussed above. Appendix C reviews the full system of equations. We solve the momentum and mass conservation equations using the FD-PDE framework (Pusok et al., 2022a), built on PETSc (Balay et al., 2022a). The model domain Ω is a tall rectangle, 2.44 km in width and 20 km in height. It is discretised using a 61×500 grid with a cell size of $\Delta x = \Delta z = 40$ m. We refer to the bottom boundary as B . A short time-step of $\Delta t = 1$ yr is chosen to ensure solution accuracy. This time-step is reduced further when the maximum permeability enhancement (k_a) increases. Details are discussed in section 3.1.

The initial porosity field has a maximum value of 0.2 at the centre of B . The initial porosity decays laterally with a length scale of 10^{-4} km and vertically with scale 0.8 km according to a Gaussian function. This ~~implies an initial~~ effectively prescribes an initial porous region having a width of one grid cell (40 m); within this region, porosity varies only vertically — not horizontally.

230 To exclude the effect of external forces on the solution within the domain, we prescribe zero shear and normal stresses on all boundaries except the bottom. Along B we prescribe zero shear stress and zero normal velocity of the solid phase. Liquid flows across B at a constant volume rate Q_0 given by

$$Q_0 = \int_B M_0 \phi^n k_{zz} \left(-\frac{\partial p^l}{\partial z} + \Delta \rho g \right) dx. \quad (13)$$

This is an integral of the vertical component of Eq. (10) over B . Assuming a constant pressure gradient ($\partial p^l / \partial z$) in the region where $\phi > 0$ at the bottom boundary, we can rearrange Eq. (13) as a boundary condition for $\partial p^l / \partial z$.

As we demonstrate below, this combination of domain, boundary and initial conditions are appropriate choices to simulate the poro-VEVP equivalent of dykes. We analyse their behaviour with reference to the poro-LEFM dyke model.

It should be noted that we do not prescribe the pressure gradient at the bottom boundary of the poro-VEVP model as $\partial p^l / \partial z = 0$, which is the far-field condition of the poro-LEFM model. This is primarily due to the limitation inherent in the finite computational domain and further affected by the two-dimensionality in the poro-VEVP model. Firstly, a finite domain cannot simulate an infinitely long dyke, thus the bottom boundary cannot be treated with a far-field condition. Secondly, unlike the poro-LEFM model which only considers horizontal displacement, the 2D continuum model allows for both vertical and horizontal deformation within the dyke due to solid phase (de)compaction. This results in a more complex solid stress tensor that must be balanced by the liquid pressure. These solid stresses remain significant even further away from the dyke tip, contrasting with the zero elastic solid pressure assumed in the poro-LEFM model (details in Appendix G). Given these ~~limitations~~ restrictions, we define a constant liquid volume rate Q_0 instead. The propagation rate of the tip is a key point of comparison with the poro-LEFM model. To quantify it, we define a tip location z_t as the highest point along the vertical cross section at $x = 0$ km where $\phi \geq 10^{-3}$. The tip speed is then diagnosed from the numerical results as $v_t = dz_t / dt$.

2.3 Energy analysis and the effective toughness

250 This section analyses the energy budget of the poro-VEVP model of a dyke. It estimates the effective fracture toughness in terms of the rate at which mechanical energy is dissipated by the propagation of the dyke tip.

In the poro-VEVP model, the total work rate \dot{W} deforming the solid phase over a domain Ω is written as

$$\dot{W} = \int_{\Omega} \dot{w} dA, \quad \text{with} \quad \dot{w} = \dot{w}^v + \dot{w}^e + \dot{w}^K. \quad (14)$$

Here, \dot{w} is the local work rate at a point, decomposed into viscous \dot{w}^v , elastic \dot{w}^e , and viscoplastic \dot{w}^K components for this
 255 Maxwell material. Appendix D provides details of the formulation for each local work rate. The total poro-VEVP work rate is similarly decomposed as

$$\dot{W} = \dot{W}^v + \dot{W}^e + \dot{W}^K. \quad (15)$$

This can be compared with the (poro-)LEFM model, where the work rate includes elastic and fracture components,

$$\dot{W}_{\text{LEFM}} = \dot{W}_{\text{LEFM}}^e + \dot{W}_{\text{LEFM}}^f, \quad (16)$$

260 where the term with superscript f is the work rate to create new surface area of the fracture.

As a basis for comparison of a steadily propagating, constant flux, poro-VEVP dyke with a poro-LEFM dyke under the same conditions, we require that $\dot{W} = \dot{W}_{\text{LEFM}}$. Then, assuming that the elastic contributions to these work rates are approximately equal, we obtain a relationship between the dissipative parts,

$$\dot{W}^v + \dot{W}^K \approx \dot{W}_{\text{LEFM}}^f. \quad (17)$$

265 We can use this result to diagnose a fracture toughness for the LEFM model.

In LEFM theory, the energy expended to propagate the fracture a unit distance is the fracture toughness \mathcal{G} (Anderson, 2017). We adopt the same definition in the poro-LEFM model and assume a constant propagation speed $c = v_t$, i.e., an identical speed between the two formulations. Thus the fracture energy rate is $\dot{W}_{\text{LEFM}}^f = \mathcal{G}v_t$ which is the fracture energy budget per unit time. Combining this with equation (17), we calculate fracture toughness \mathcal{G} and critical stress intensity K_c from the dissipation rate
 270 of the poro-VEVP model as

$$\mathcal{G} = \frac{\dot{W}^v + \dot{W}^K}{v_t}, \quad K_c = \left(\frac{2G\mathcal{G}}{1-\nu} \right)^{1/2} = \left[\frac{2G(\dot{W}^v + \dot{W}^K)}{v_t(1-\nu)} \right]^{1/2}. \quad (18)$$

Table 1. Dimensional parameters for computational modelling.

| Parameter | Name | Unit | Value |
|-------------|--|-------------------------------------|---------------------------|
| ρ^s | Solid density | kg m ⁻³ | 3000 |
| ρ^l | Melt density | kg m ⁻³ | 2500 |
| η^K | Viscoplastic viscosity | Pa s | 10 ¹⁰ |
| G_ϕ | <u>shear modulus</u> | GPa | $(1-\phi)G$ |
| Z_ϕ | <u>bulk modulus</u> | GPa | $(1-\phi)Z$ |
| G | Reference shear modulus | GPa | 5 |
| Z | Reference bulk modulus | GPa | 10 |
| C | Cohesion | MPa | 5 |
| θ | Friction angle | ° | 30 |
| σ_t | Tensile strength | MPa | 1.25 ($\sigma_t = C/4$) |
| M_0 | Mobility prefactor | m ² (Pa s) ⁻¹ | 10 ⁻⁹ |
| n | Exponent in the permeability-porosity relation | - | 3 |
| g | Gravity constant | m s ⁻² | 9.8 |
| ϕ_{bg} | Background porosity | - | 10 ⁻¹⁰ |
| Q_0 | Liquid volume flux rate | m ² yr ⁻¹ | 40 |
| k_a | Maximum permeability enhancement | - | 10 |
| ϵ | Characteristic anisotropy of plastic strain | - | 0.05 |

The second equation is obtained from the LEFM relationship between the critical stress intensity factor and the fracture toughness for plane-strain deformation (Anderson, 2017), with substitution of the first equation for the fracture toughness in terms of the poro-VEVP dissipation rate.

275 As noted above, we suppress viscous deformation by prescribing a Maxwell viscosity that is effectively infinite (without changing the problem formulation). Because of this we have $\dot{W}^v \approx 0$ and hence the dissipation in the poro-VEVP model is entirely viscoplastic. Furthermore, we choose a small viscoplastic viscosity η^K to reduce the viscous dissipation in the Kelvin component. Appendix D2 discusses the effect of η^K on the rate of mechanical energy dissipation.

3 Results

280 The results are divided into two parts. First we document the output of the poro-VEVP model in terms of its dyke-like solutions. Second, we describe the comparison of those solutions to the poro-LEFM model.

3.1 Results of the poro-VEVP model

This section presents numerical solutions of the poro-VEVP model. We first analyse a reference case (parameters listed in Table 1) that demonstrates a steadily propagating dyke. We then investigate the effects of varying viscoplastic viscosity (η^K) and maximum permeability enhancement (k_a).
285

Figure 3(a) shows a snapshot of the porosity field from a representative numerical solution. The field includes a porous dyke with uniform width that rises up through the middle of the domain. A close-up investigation reveals that the central column

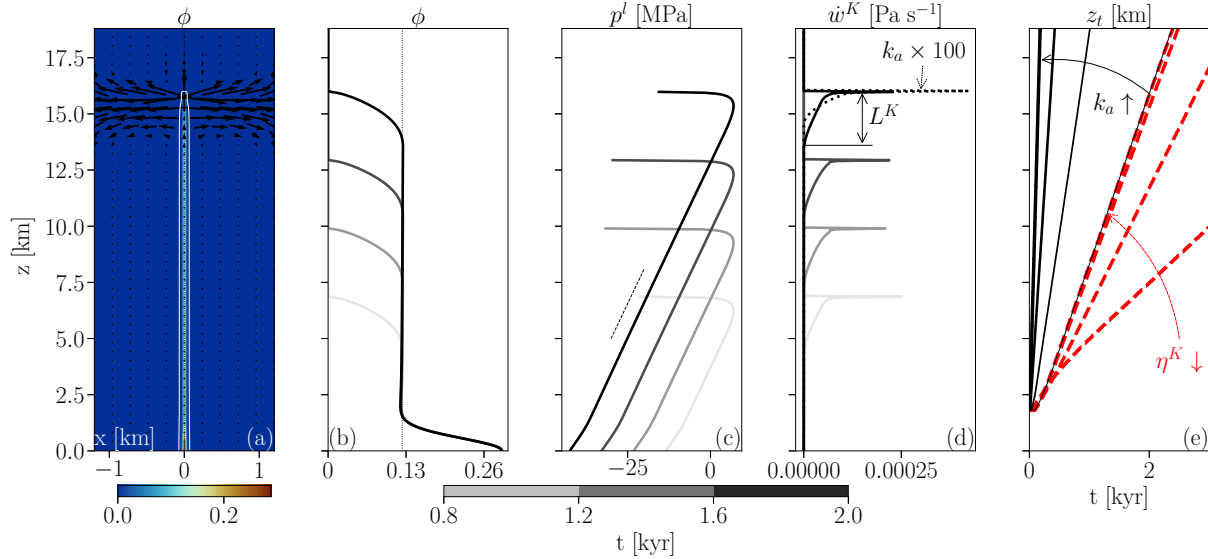


Figure 3. Results from a reference calculation of the poro-VEVP model. (a) Porosity and solid deformation field at $t = 2$ kyr. The white curve represents the contour of $\phi = 10^{-3}$. (b) Profiles of ϕ (solid lines) along a vertical cross section at $x = 0$ for $t = 0.8, 1.2, 1.6,$ and 2.0 kyr. The dotted line represents $\phi = 0.13$. (c) Profiles of p^l along $x = 0$ at the same time-steps as (b). The slope in the tail region matches the poro-LEFM prediction with a prescribed flow rate and porosity (the dotted line). (d) The corresponding local plastic dissipation rate along $x = 0$. Solid lines represent the reference case with $k_a = 10$; the dotted line shows a case with $k_a = 10^3$ for comparison. The region below the tip with non-zero \dot{w}^K is referred to as the head region; its size is denoted L^K . (e) Tip propagation for different η^K (red) and k_a (black). Dashed red lines show propagation rate convergence for decreasing η^K ($10^{18}, 10^{17}, 10^{16},$ and 10^{15} Pa s), as indicated by red arrows. The last one converges to the reference case, 10^{10} Pa s (thin solid line), with a speed of $v_t = 7.6$ m/yr, matching the poro-LEFM prediction. The black lines show the variation of propagation speed for $k_a = 10$ (reference case), $10^2, 10^3,$ and 10^4 .

of cells holds $> 90\%$ of the total volume of liquid in the domain. The porosity in laterally adjacent cells is at least ten times smaller. This shows a negligible leakage through the wall and can confine the porous dyke to one cell in width. This width remains constant over time, enabling one-dimensional analysis along the central column of cells that represents the dyke. While advantageous in terms of comparison with a poro-LEFM model in which dykes are narrow relative to our grid spacing, this pattern raises questions about the grid-size dependence of the results. ~~Because this dyke has a width of Δx , holding the volume rate Q_0 constant implies that the volume flux ($Q_0/\Delta x$) varies with the grid spacing. Consequently, the boundary condition for the pressure gradient in Eq. (13) also changes, significantly impacting the results. However, if we instead fix the pressure~~
290 ~~boundary condition and therefore the volume flux, we find the grid size has little impact; the relative variation in porosity is $< 5\%$ when Δx is further reduced from 40 m to 30 m. We address questions of grid-size dependence in Appendix E.~~

Figure 3(b)–(d) illustrates the steady advance of the dyke tip and the liquid phase. Panel (b) depicts porosity ϕ ; panel (c) depicts liquid pressure p^l ; panel (d) depicts local plastic dissipation rate \dot{w}^K . Each panel shows four curves at different times (0.8, 1.2, 1.6, and 2.0 kyr), confirming that the tip advances approximately the same distance in each 0.4 kyr interval. This constant speed implies that a dynamic equilibrium has been achieved at the moving tip, which is consistent with the assumptions of the LEFM model.
300 In panel (b) there is a region at $z < 2$ km where the interior solution adjusts to match the boundary

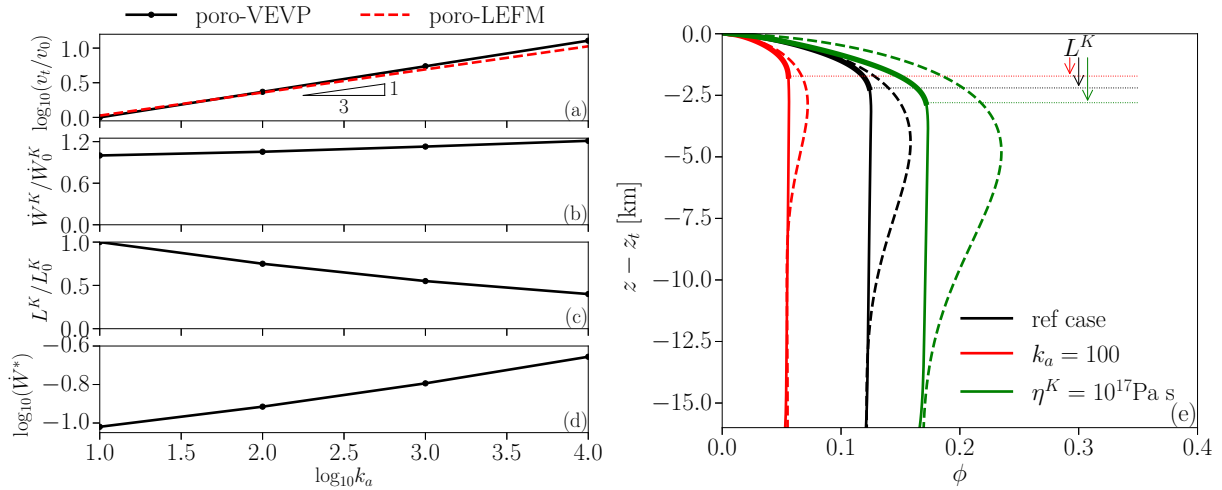


Figure 4. Key characteristics of simulated dykes as a function of the log of k_a . (a) The power-law relation between tip speed v_t and anisotropic permeability enhancement k_a . Here v_t is scaled by the speed in the reference case, $v_0 = 7.6$ m/yr. (b) The rate of plastic work \dot{W}^K increases with k_a , but only by $\sim 7\%$ or less for each tenfold increase of k_a . Here \dot{W}^K is scaled by the reference result $\dot{W}_0^K = 3.1$ Pa/s. (c) The size of plastic zone L^K decreases with k_a . The scaling factor is the reference result $L_0^K = 2.4$ km. (d) The dissipation intensity at the tip \dot{W}^* increases with k_a . It measures the ratio of the dissipation rate in the tip cell to the overall rate. (e) Comparison of the porosity profiles of the poro-VEVP model (solid lines) with the poro-LEFM model (dashed lines). The critical stress intensities are $K_c = 0.51$ (black), 0.34 (red), and 1.08 (green) GPa $\text{m}^{1/2}$, calculated using the energy analysis of the poro-VEVP model (Eq. (18)). Thicker solid lines indicate plastic zones in each case.

condition. Above this, for all four times, there is a region with uniform $\phi \approx 0.13$. The height of this region grows linearly with time. Above this uniform region, each curve has a region where the porosity varies from $\phi \approx 0.13$ to zero at the dyke tip.

Panel (d) shows that beneath the tip is a region where plastic work is done. Indeed the position of the tip is characterised by the spike in \dot{w}^K . We define the head of the poro-LEFM dyke as where \dot{w}^K is non-zero—that is, the entire region experiencing plastic tensile failure. In the reference case, this region is about 2.4 km high and confined to the column of grid cells that contain liquid. This height reduces to about 1.3 km when the permeability enhancement is 100 times larger (dotted line). The head region has a prominent solid displacement rate as shown in panel (a). At the dyke tip, panel (c) shows that the pressure gradient is nearly singular; this is the location of tensile yielding, also corresponding with the spike in dissipation rate.

The mechanics of the head region represents a key difference between the poro-VEVP and poro-LEFM models. In the poro-VEVP model, buoyancy induces plastic tensile failure throughout the head region, whereas in the poro-LEFM model, fracture is localised exclusively to the tip. This difference is reflected in the pattern of energy dissipation of each model: distributed over a finite zone in poro-VEVP versus localised to a point in poro-LEFM.

The tail region in Fig. 3(c) shows another distinction between the two models. The poro-VEVP model has a constant, non-zero pressure gradient $\partial p^l / \partial z \approx 3.2$ MPa/km in the tail, contrasting to the zero far-field pressure gradient in the poro-LEFM model. This distinction stems from the limitations of the finite domain and the significant solid stress gradient, which

necessitates a balancing liquid pressure gradient. This prevents the use of a zero pressure gradient as a boundary condition on the bottom, as explained in Section 2.2.4 and further detailed in Appendix G.

Figure 3(e) shows tip propagation at various values of viscoplastic viscosity η^K and permeability anisotropic enhancement k_a . All curves become linear in time after a short transient, indicating constant propagation speed. Speed increases as η^K decreases from 10^{18} Pa s, but converges to a constant value below 10^{15} Pa s. Increasing k_a further increases the tip speed.

Figure 4(a) confirms the effect of k_a on v_t in a log–log plot, indicating a power-law relationship arising from the mobility closure,

$$v_t \propto k_a^{1/3}, \quad (19)$$

at constant influx rate. This relationship informs the choice of time-step size to ensure the accuracy by maintaining a moderate Courant number.

Panel (a) also demonstrates the agreement between the power-law relationship measured in poro-VEVP numerical solutions and the analytical prediction of the poro-LEFM model. Use of Darcy’s law in the poro-LEFM model requires that $Q_0 \propto M_\phi$ for constant width, which translates to $Q_0 \propto k_a \phi_0^n$ when fluid mobility is matched to the poro-VEVP model. This relationship indicates that, for a fixed Q_0 , varying the permeability enhancement adjusts the far-field porosity according to $\phi_0 \propto k_a^{-1/n}$. Given that $Q_0 = \phi_0 h c$ in the far field, the propagation speed must therefore scale as $c \propto k_a^{1/n}$. Recalling that we choose $n = 3$, this scaling governs propagation speed in both models, despite their different values resulting from distinct pressure gradients in the tail region.

Figure 4(b) shows that the overall plastic dissipation rate increases with permeability enhancement, but only by 20% over a factor of 10^3 change in k_a . This change is negligible compared to the tenfold increase in propagation speed shown in panel (a). Therefore we can consider the total dissipation rate to be essentially independent of k_a . Recalling the calculation for fracture toughness and critical stress intensity in Eq. (18), we obtain the following power-law relationship for \mathcal{G} and K_c in terms of k_a ,

$$\mathcal{G} \propto k_a^{-1/3}, \quad K_c \propto k_a^{-1/6}. \quad (20)$$

This contrasts with (poro-)LEFM models, where fracture toughness is independent of permeability, while the fracture energy rate changes in proportion to propagation speed.

Figures 4(c) and (d) show that larger permeability enhancement leads to a shorter plastic zone L^K , meaning a smaller head region and more intense plastic dissipation at the tip. This intensity is measured by the ratio of dissipation rate in the tip cell to the overall dissipation rate, $\dot{W}^* \equiv \dot{w}_m^K \Delta x \Delta z / \dot{W}^K$. Here \dot{w}_m^K denotes the work rate at the tip, which corresponds to the maximum value of curves in Fig. 3(d). Given that \dot{W}^K is constant when fixing Q_0 and varying k_a , Fig. 4(d) also represents the variation of the peak dissipation rate \dot{w}_m^K as a function of the permeability enhancement. Together, panels (c) and (d) indicate that increasing k_a reduces head height L^K and focuses plastic failure onto the tip. This trend provides an explanation for the reduction of fracture toughness associated with increasing k_a .

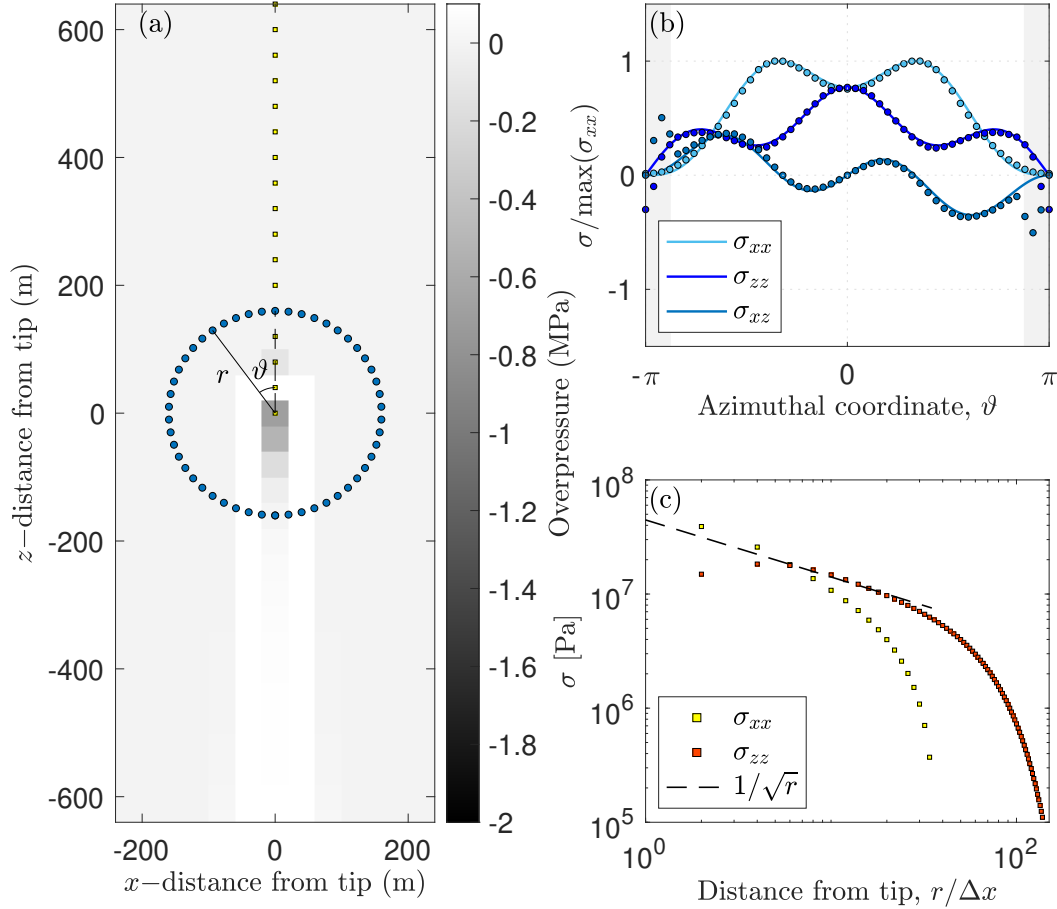


Figure 5. Comparison of stress components between the poro-VEVP model and the (poro-)LEFM model with $K_c = 510 \text{ MPa m}^{1/2}$. (a) Fracture-tip coordinate system, where angle ϑ is measured counter-clockwise from the vertical axis and radial distance r is measured from the origin. The background grey scale represents the liquid overpressure ΔP . (b) Fracture-tip stress distribution. LEFM solutions are depicted as solid lines, while poro-VEVP stress components as points evenly spaced in ϑ around the fracture at $r = 160 \text{ m}$ (indicated by blue dots in panel (a)). Regions where $|\vartheta| > 7\pi/8$ are shaded grey. (c) Fracture-tip stress asymptote. Squares represent poro-VEVP results directly ahead of the fracture tip (along $\vartheta = 0$; yellow points in panel (a)). The dashed line represents the LEFM $1/\sqrt{r}$ singularity.

3.2 Comparison between the poro-VEVP and poro-LEFM models

This section compares the poro-VEVP and poro-LEFM dykes in terms of porosity profiles and stress distribution. We impose
 350 that the poro-LEFM dyke has the same width as the poro-VEVP dyke and has a far-field porosity equal to the tail-region porosity. Based on the energy analysis of the poro-VEVP results, we estimate an effective fracture toughness \mathcal{G} and thus

a critical stress-intensity factor K_c , which we then apply to the poro-LEFM model. In the comparison below, we evaluate whether this estimated K_c is an appropriate value to link these two models.

On the basis of this estimated K_c , Figure 4(e) compares porosity profiles between the poro-VEVP (solid lines) and poro-LEFM (dashed lines) models. The panel shows three cases: the reference case (black), a case with increased viscoplastic viscosity η^K (green), and a case with increased maximum permeability enhancement k_a (red). When η^K is relatively small (black and red lines), the continuum and fracture models match well near the tip, suggesting that the plasticity-based K_c (and thus \mathcal{G}) can quantitatively relate these two models. However, when η^K is relatively large (green), the two models are not closely aligned, even near the tip. Considering all three cases, we notice that the poro-VEVP dykes do not have the bulbous head which appears in the poro-LEFM dykes. What we have defined as the head in the poro-VEVP model (L^K), where plastic failure takes place, is much shorter than the head height in the poro-LEFM model.

Figure 5 compares components of the stress tensor between the two models in the zero-porosity region. The tensor is evaluated at points (blue dots in panel (a)) around a circle centred at the dyke tip, and along a vertical line upwards from the tip (yellow dots in panel (a)). The stress calculation for the poro-LEFM is presented in Appendix F, which is identical to the LEFM model in the zero-porosity region. Panel (b) shows agreement of stress components between poro-VEVP and (poro-)LEFM along the azimuthal coordinate ϑ along a circle of radius $r = 160$ m ($= 4\Delta x$) in the region $\vartheta \in [-7\pi/8, 7\pi/8]$. Regarding the stress distribution along the radial direction, the (poro-)LEFM model predicts that σ_{xx} and σ_{zz} are both proportional to $1/\sqrt{r}$, where r is distance from the tip. Panel (c) shows that the poro-VEVP results is somewhat but not entirely consistent with this prediction; $\sigma_{xx} \sim r^{-1/2}$ when $r < 5\Delta x$ and $\sigma_{zz} \sim r^{-1/2}$ when $r \in [4, 16]\Delta x$.

Li et al. (2023) made a similar comparison of the stress distribution between models, but for the case of a dyke driven by uniform horizontal tension, imposed in the far field. The present manuscript enhances the credibility of such a comparison in two key ways: first, the poro-VEVP dyke is driven purely by buoyancy, consistent with the (poro-)LEFM dyke; second, the stress intensity factor is derived from the plastic dissipation rate of the poro-VEVP model, rather than using a fitted value.

4 Discussion

In the preceding sections, we compared poro-VEVP and LEFM models for simulating buoyancy-driven dykes. The comparison was facilitated by the introduction of an intermediary poro-LEFM model. This section discusses the results and addresses the slow propagation and high toughness of poro-VEVP dyking.

This study demonstrates that the poro-VEVP model can represent dykes with plastic tensile failure. Specifically, by incorporating anisotropic permeability, this model can simulate a long, thin dyke-like melt conduit with minimal liquid leakage through the walls, such that it is generally consistent with an LEFM model. The dyke width is determined by the grid size, which is a limitation of the present discretized solutions of the continuum models ([see Appendix E for details](#)). Despite this limitation, we can validate the poro-VEVP model against a poro-LEFM model, comparing the porosity and stress distributions of dykes with the same width.

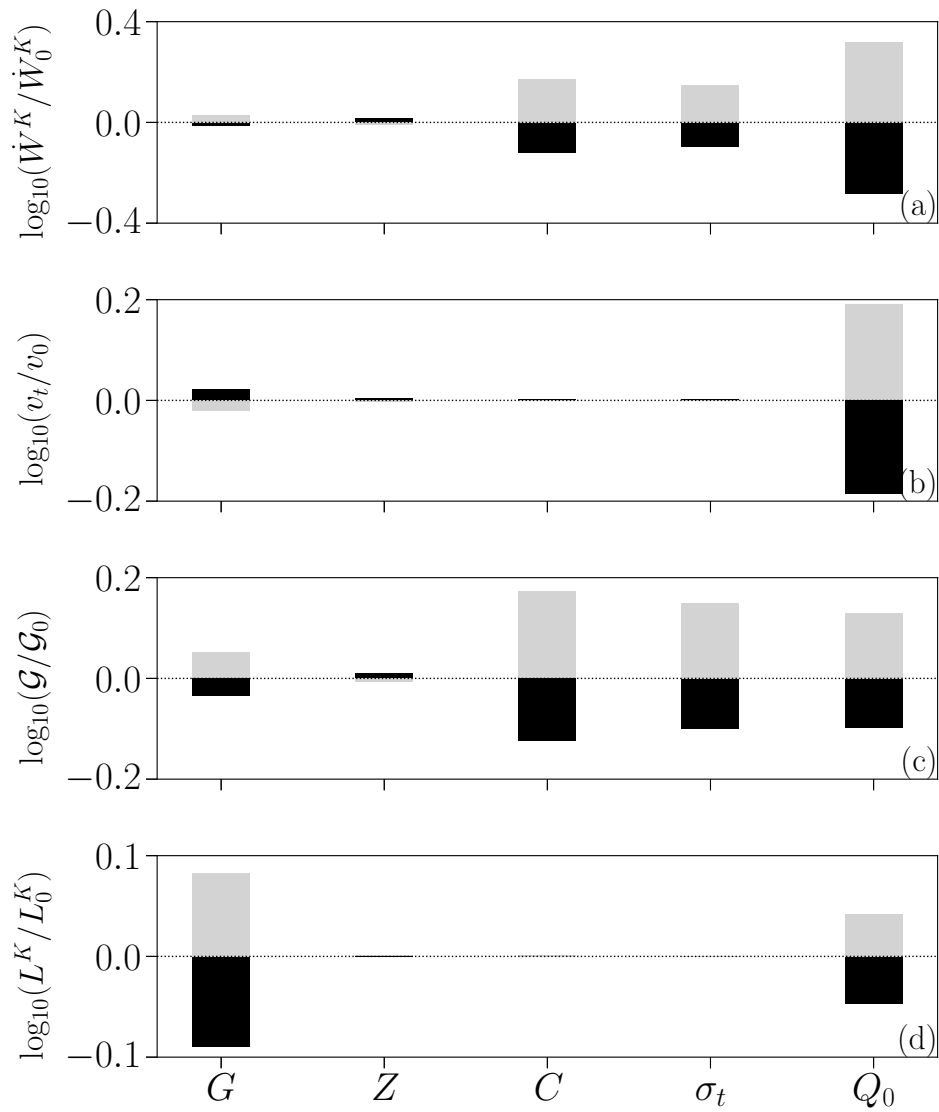


Figure 6. Dependence of the overall dissipation rate \dot{W}^K , propagation speed v_t , fracture toughness \mathcal{G} , and the head height L^K on the physical parameters: the shear modulus G , the bulk modulus Z , the cohesion C , the tensile strength σ_t , and the volume influx rate Q_0 . Gray and black bars in each panel represent the variation of each variable by changing $\times 2$ and $\times 1/2$, respectively, on the reference value of each parameter. The variation is shown as the change relative to the corresponding result in the reference case.

The slow propagation speed of poro-VEVP dykes arises from the large drag on fluid motion under Darcy flow compared to Poiseuille flow in the LEFM model. This is quantified by the mobility M_ϕ , the ratio of permeability to liquid viscosity. Mobility is parameterised in terms of the product of a prefactor M_0 and a power of the porosity ϕ . While ϕ is part of the solution and cannot be directly manipulated to control the speed, M_0 can be increased within a dyke by prescribing a permeability enhancement k_a . Above we showed that the speed increases with k_a following the power law, $\propto k_a^{1/n}$, when the liquid volume influx is fixed. However, a faster dyke requires a smaller time-step for accuracy, thereby increasing the computational cost. Therefore, when using the poro-VEVP model, consideration must be given to balancing the desire for more accurately rapid dyke propagation with the computational cost this incurs.

The fracture toughness of poro-VEVP dykes can be calculated from the plastic dissipation energy of the continuum model by assuming its equivalence to the fracture energy in the poro-LEFM model. In this way, we relate the toughness value to the speed of tip propagation and the size and intensity of the distributed plastic failure over a head region close to the dyke tip. This region is much shorter than the bulbous head in the poro-LEFM model, defined by where the porosity is distinct from the far-field porosity (2.4 km versus 12 km for the reference case). The finite-size failure region represents another difference to the poro-LEFM model, in which fracture occurs at the tip only. Despite this, by using the estimated toughness in the poro-LEFM model, we achieve reasonable agreement in the porosity profiles and stress distribution between the two models.

This toughness value is influenced by various physical parameters that alter the dynamics in the head region, including permeability enhancement (k_a), shear (G) and bulk (Z) modulus, cohesion (C), tensile strength (σ_t), and volume flux rate (Q_0). Figure 4 shows that increasing k_a leads to a decrease in \mathcal{G} , while Figure 6 demonstrates a positive correlation between \mathcal{G} and increasing values of G , C , σ_t , and Q_0 . The elastic bulk modulus Z does not have a significant effect on \mathcal{G} .

These parameters affect fracture toughness in different ways. Increasing k_a reduces the head height and localises dissipation to the tip (Fig. 4), resulting in a reduced toughness. A similar relationship between the localisation of plastic dissipation and toughness is obtained by varying the elastic shear modulus (Fig. 6, first column). Increasing G leads to increased toughness, accompanied by a longer plastic zone with a similar total dissipation rate, meaning a more distributed failure and taller head. Increasing cohesion and tensile strength also increases toughness, but it does so by increasing the overall dissipation rate without affecting the size of the plastic zone (Fig. 6, third and fourth column). In these cases, the strength of plastic failure, rather than its distribution, is the primary factor associated with the variation of toughness. Furthermore, while a higher liquid volume flux increases the overall dissipation rate more than cohesion or tensile strength, it has a lesser effect on fracture toughness (Fig. 6, fifth column). This can be attributed to the increased propagation speed, which lowers the dissipation work per unit length of fracture growth.

The dependence of toughness on liquid volume flux is intriguing because, in the poro-LEFM model, liquid-phase dynamics do not affect solid properties. This may be explained in terms of two related ideas. First, the toughness as evaluated in poro-VEVP is associated with the energetics of the head region. This region has non-zero porosity, making the dissipation a property of the two-phase medium, i.e., something affected by the liquid phase. In contrast, the non-zero porosity in the poro-LEFM dyke does not affect the fracture energy because the fracture occurs precisely at the tip, where the porosity is zero.

Second, this sensitivity of toughness to liquid flux resembles that of more complex fracture mechanics theories like Elastic Plastic Fracture Mechanics (EPFM) (Anderson, 2017). EPFM applies a plastic yield limit to an elastic fracture-mechanics model. On this basis it predicts a plastic zone around the fracture tip, where the intensified elastic stress reaches the yield limit. Papanastasiou (1999) uses EPFM to model a constant-flux fluid-driven fracture, showing that a higher liquid flux leads to a larger plastic zone and, consequently, higher effective toughness and stress intensity. A large toughness and stress intensity in the poro-VEVP model can therefore be broadly related to plastic dissipation in the EPFM model. In fact, observations suggest that a large toughness might be possible in the field: Gudmundsson (2009) suggests a toughness value in volcanic edifices two orders of magnitude larger than that reported by laboratory experiments. To quantitatively align the poro-VEVP model with both EPFM model and field observations is beyond the present scope.

One limitation of the present research arises from the simplified form of anisotropic permeability that we impose. In particular, our formulation modifies only the horizontal or vertical permeability. This is appropriate if the dyke (or sill) aligns with one of these two directions, but it is unsuitable for modelling curved dyke trajectories, such as those influenced by ambient stresses (Maccaferri et al., 2014). Thus, the formulation of anisotropic permeability needs to be generalised to enable dyke propagation in an arbitrary direction. We will address this in future work.

Another limitation of this work is the difference in boundary conditions between poro-VEVP (constant volume flux, leading to a non-zero pressure gradient) and poro-LEFM (zero pressure gradient at the far-field). This is, however, unavoidable because of the limitations of the finite domain and also the two-dimensionality of the continuum model. As a result, the stresses between the solid and liquid balance differently inside of the dyke (see Appendix G for details). Nonetheless, we still achieve a reasonable agreement between the two models near the tip by assuming the equivalence between plastic dissipation and fracture energy.

In conclusion, with some caveats, the representation of a dyke in the continuum, poro-VEVP formulation is consistent with linear elastic fracture mechanics. This consistency supports the validity of our approach for geodynamic applications. Moreover, it gives us confidence in incorporating poro-VEVP into large-scale rifting models requiring consistent magma transport in both ductile and brittle regions of the lithosphere (e.g. Pusok et al., 2024).

5 Summary

This study compares dyke propagation in a poro-viscoelastic–viscoplastic model with that in a canonical linear elastic fracture mechanics model. The comparison is enabled by interposing a novel poro-LEFM model. It highlights two key discrepancies: slow propagation speed of the poro-VEVP dyke, and the requirement for large fracture toughness in the LEFM model to match the poro-VEVP results. We have reported on our progress in addressing these discrepancies.

Slow propagation speed in the poro-VEVP model is primarily attributed to low permeability relative to an open fracture. This limitation can be mitigated by introducing an anisotropic permeability enhancement. The large equivalent toughness value inferred for the poro-VEVP model can be explained in terms of plastic dissipation of mechanical energy. This effective fracture toughness depends on various physical parameters that affect the plastic dissipation rate in the solid–liquid aggregate.

The poro-VEVP models now incorporates a new formulation for the constitutive relation between compaction stress and strain rates, which improves solver reliability over that used by (Li et al., 2023). Future development will focus on implementing the full anisotropic permeability tensor to investigate how the ambient stress field influences dyke (or sill) emplacement.

455 *Code availability.* The current version of model is available at <https://github.com/YuanLiAC/poroVEVP> under the MIT licence. The exact version of the model used to produce the results used in this paper is archived on Zenodo (Li et al., 2024), as are input data and scripts to run the model and produce the plots for all the simulations presented in this paper. The poro-VEVP model has dependencies on FD-PDE (Pusok et al., 2022a) and PETSc (Balay et al., 2022b). Visualisation and post-processing utilised the colour scheme from Scientific Color Maps (Cramer et al., 2020; Cramer, 2021). Full simulation data can be provided by YL on request.

Appendix A: Mathematical formulation of the poro-LEFM model

460 This section provides details of the mathematical formulation of the poro-LEFM model that was introduced in section 2.1. It explains how the governing equations of the liquid and solid phases are obtained and how they are non-dimensionalised.

A1 The liquid phase

We derive a mass continuity equation for the poro-LEFM model from Darcy's law and the mass conservation equation of a two-phase continuum model,

$$465 \quad \phi(\mathbf{v}^l - \mathbf{v}^s) = -M_\phi (\nabla P^l - \rho^l \mathbf{g}), \quad (\text{A1})$$

$$\frac{\partial \phi}{\partial t} + \nabla \cdot (\phi \mathbf{v}^l) = 0. \quad (\text{A2})$$

We decompose the full liquid pressure gradient, ∇P^l , into static and dynamic components as

$$\nabla P^l = \rho^s \mathbf{g} + \nabla p^l. \quad (\text{A3})$$

470 We denote the vertical component of liquid and solid velocity by v^l and v^s . Taking the vertical component of Eq. (A1) and assuming zero vertical solid velocity ($v^s = 0$), we obtain the liquid flux rate as

$$\phi v^l = M_\phi \left(-\frac{\partial p^l}{\partial z} + \Delta \rho g \right). \quad (\text{A4})$$

We assume zero horizontal component of liquid velocity, which implies no leakage through the fracture wall. Then Eq. (A2) reduces to

$$\frac{\partial \phi}{\partial t} + \frac{\partial \phi v^l}{\partial z} = 0. \quad (\text{A5})$$

475 For an infinitely long buoyancy-driven dyke, we expect uniform propagation at a fixed speed with constant far-field porosity. Assuming pure buoyancy drive (i.e., $\partial p^l / \partial z = 0$ at the far field), Eq. (A4) yields the constant propagation speed,

$$c = \frac{M_\phi(\phi_0)}{\phi_0} \Delta \rho g, \quad (\text{A6})$$

where ϕ_0 is the far-field porosity. In this case, the far-field liquid volume rate is $Q_0 = \phi_0 h c$.

A2 Solid and liquid stresses

480 We formulate the elastic solid stress distribution $p^s(z, t)$ of the poro-LEFM model following the LEFM model (e.g., Weertman, 1971; Lister, 1990; Roper and Lister, 2007). This elastic stress, associated with dyke opening in the x direction, intensifies towards infinity at the tip, characterised by a critical stress intensity K_c .

The mathematical formulations are

$$p^s(z, t) = - \left(\frac{G}{1 - \nu} \right) \frac{1}{2\pi} \int_{-\infty}^{\infty} \frac{\partial h \phi(\xi, t)}{\partial \xi} \frac{d\xi}{\xi - z}, \quad (\text{A7})$$

$$485 \quad p^s(z, t) = - \frac{K_c}{[2(z - z_t)]^{1/2}}, \quad \text{at } z \rightarrow z_t^+. \quad (\text{A8})$$

Here, $h\phi$ represents the horizontal deformation required to open a porous dyke of width h with porosity ϕ , and z_t is the tip location.

We assume force balance between the solid and liquid phases in the non-zero porosity region, so $p^l = p^s$ across the dyke in the poro-LEFM model.

490 A3 Non-dimensionalisation

We transform the coordinate system to be fixed with respect to the fracture tip, changing (z, t) to $z'(t) = (z_t^o + ct) - z$, where z_t^o is the initial tip location.

We take the following non-dimensionalisation,

$$\tilde{\phi} = \frac{\phi}{\phi_0}, \quad \tilde{z} = z' \left(\frac{G h \phi_0}{(1 - \nu) \Delta \rho g} \right)^{-1/2}, \quad \tilde{p}^s = p^s \left(\frac{G h \phi_0}{(1 - \nu) \Delta \rho g} \right)^{-1/2}, \quad \tilde{K}_c = K_c \left(\frac{G h \phi_0}{(1 - \nu) \Delta \rho g} \right)^{-3/4} (\Delta \rho g)^{-1/4}. \quad (\text{A9})$$

495 The system of governing equations (Eqs. (1) – (4)) then leads to the following non-dimensionalised system,

$$\frac{d\tilde{p}^s}{d\tilde{z}} = \left(\frac{1}{\tilde{\phi}}\right)^2 - 1, \quad (\text{A10})$$

$$\tilde{p}^s(\tilde{z}) = -\frac{1}{\pi} \int_0^\infty \frac{d\tilde{\phi}(\xi)}{d\xi} \frac{d\xi}{\xi - \tilde{z}}, \quad (\text{A11})$$

$$\tilde{p}^s \approx -\frac{\tilde{K}_c}{(-2\tilde{z})^{1/2}}, \text{ at } \tilde{z} \rightarrow 0^-, \quad (\text{A12})$$

$$\tilde{\phi} \approx 1, \text{ at } \tilde{z} \rightarrow \infty. \quad (\text{A13})$$

500 Appendix B: A new formulation of ΔP in the poro-VEVP model

This section addresses an issue with representing the constitutive law for ΔP using the effective viscosity approach and presents a new formulation to resolve this issue. This constitutive law relates the compaction stress ΔP to the compaction rate \mathcal{C} .

We recall that the compaction rate for a poro-VEVP rheology as

$$505 \quad \mathcal{C} = \mathcal{C}^v + \mathcal{C}^e + \mathcal{C}^K, \quad (\text{B1})$$

where superscripts v, e, and K represent viscous, elastic, and viscoplastic components, respectively. Substituting the rheological models of the viscous and elastic components into the right-hand side of (B1) (cf. Li et al. (2023)), we rearrange the resulting formulation as

$$(1 - \phi)\Delta P = -\zeta^{ve}(\mathcal{C}' - \mathcal{C}^K), \quad \text{where } \zeta^{ve} = \left(\frac{1}{\zeta_\phi^v} + \frac{1}{Z_\phi \Delta t}\right)^{-1}, \quad \mathcal{C}' = \left[\mathcal{C} - \frac{(1 - \phi)\Delta P^o}{Z_\phi \Delta t}\right]. \quad (\text{B2})$$

510 Here, ζ_ϕ^v and Z_ϕ are the compaction viscosity and bulk modulus, respectively, Δt is the time-step size, ΔP^o is the overpressure at the previous time-step, and \mathcal{C}^K is the plastic compaction rate.

The effective viscosity approach assumes

$$(1 - \phi)\Delta P = -\zeta_{\text{eff}}\mathcal{C}', \quad (\text{B3})$$

where ζ_{eff} is held constant when solving the force-balance equation for strain rates. It is determined as follows. If there is no plastic yielding or no dilatancy when yielding (i.e., $\mathcal{C}^K = 0$), then $\zeta_{\text{eff}} = \zeta^{ve}$. Otherwise, when $\mathcal{C}^K \neq 0$, $\zeta_{\text{eff}} = -\frac{(1 - \phi)\Delta P}{\mathcal{C}'}$, where ΔP is calculated using the return mapping method (Krieg and Krieg, 1977) to constrain stresses on the yield surface. However, ζ_{eff} becomes infinite when $\mathcal{C}' = 0$ and $\Delta P \neq 0$. In this circumstance, the effective viscosity approach is no longer appropriate.

To address this issue, we propose an alternative formulation of ΔP as

$$(1 - \phi)\Delta P = -\zeta^{\text{ve}}\mathcal{C}' + (1 - \phi)\Delta P_{dl}, \quad (\text{B4})$$

520 where $(1 - \phi)\Delta P_{dl} = \zeta^{\text{ve}}\mathcal{C}^{\text{K}}$ can be considered a dilatancy pressure. If dilatancy occurs during plastic failure ($\mathcal{C}^{\text{K}} \neq 0$), then $\Delta P_{dl} \neq 0$. Similar to ζ_{eff} , ΔP_{dl} is calculated after constraining stresses on the yield criteria and is held constant when solving force-balance equations for strain rates. This constant is calculated by

$$(1 - \phi)\Delta P_{dl} = (1 - \phi)\Delta P + \zeta^{\text{ve}}\mathcal{C}', \quad (\text{B5})$$

525 which is always a finite value. Thus, the new formulation using the parameter ΔP_{dl} resolves the degeneration issue in the effective viscosity approach.

Appendix C: Full system of equations for the poro-VEVP model

We list the full system of equations for the poro-VEVP model. Details on its development and implementation can be found in Li et al. (2023). Note that the new formulation of ΔP and the tensor-form permeability are employed in the equations below.

The system of conservation and porosity-evolution equations is

$$530 \quad -\nabla p^l + \nabla \cdot (2\eta_{\text{eff}}\dot{\epsilon}') + \nabla \cdot (\zeta^{\text{ve}}\mathcal{C}') - \nabla \cdot [(1 - \phi)\Delta P_{dl}] - \phi\Delta\rho\mathbf{g} = \mathbf{0}, \quad (\text{C1})$$

$$\nabla \cdot \mathbf{v}^s - \nabla \cdot [M_\phi \cdot (\nabla p^l + \Delta\rho\mathbf{g})] = 0, \quad (\text{C2})$$

$$\frac{\partial(1 - \phi)}{\partial t} + \nabla \cdot [(1 - \phi)\mathbf{v}^s] = 0, \quad (\text{C3})$$

where the modified deviatoric and isotropic strain rates are,

$$535 \quad \dot{\epsilon}' \equiv \frac{1}{2} \left[\left(\nabla \mathbf{v}^s + (\nabla \mathbf{v}^s)^T - \frac{2}{3} (\nabla \cdot \mathbf{v}^s) \mathbf{I} \right) + \frac{(1 - \phi)\boldsymbol{\tau}^o}{G_\phi \Delta t} \right], \quad \mathcal{C}' \equiv \nabla \cdot \mathbf{v}^s - \frac{(1 - \phi)\Delta P^o}{Z_\phi \Delta t}. \quad (\text{C4})$$

Here $\boldsymbol{\tau}^o$ and ΔP^o are the previous deviatoric stress and overpressure, Δt is the time-step size. The dilatancy pressure ΔP_{dl} is calculated by using Eqs. (B5). The effective viscosity η_{eff} is calculated as $\eta_{\text{eff}} = (1 - \phi)\tau_{II}/2\dot{\epsilon}_{II}$, that $\tau_{II} = \sqrt{\boldsymbol{\tau} : \boldsymbol{\tau}/2}$ and $\dot{\epsilon}_{II} = \sqrt{\dot{\boldsymbol{\epsilon}} : \dot{\boldsymbol{\epsilon}}/2}$. The deviatoric stress and overpressure are constrained by the rate-dependent yield surface that

$$\mathcal{F}(\dot{\lambda}, P_e, \tau_{II}) = \sqrt{\tau_{II}^2 + (C \cos \theta - \sigma_t \sin \theta)^2} - (C \cos \theta + P_e \sin \theta) - \eta^{\text{K}} \dot{\lambda} \leq 0, \quad (\text{C5})$$

where P_e is the effective pressure transiting from Terzaghi's stress ($\Delta P = P^l - P^s$) to the full solid stress (P^s)
 540 at small porosity,

$$P_e = \Delta P + [1 - \exp(-\phi_c/\phi)]P^l, \quad c_{dl} = \exp(-\phi_c/\phi). \quad (C6)$$

Here, P^l is the full liquid pressure taking into account of static pressure. We choose $\phi_c = 10^{-6}$.

The plastic modifier $\dot{\lambda}$ is defined associated with plastic potential Q that

$$\dot{\epsilon}^K = \dot{\lambda} \frac{\partial Q}{\partial \boldsymbol{\tau}}, \quad c^K = -\dot{\lambda} \frac{\partial Q}{\partial P_e}. \quad (C7)$$

545 Here Q is defined as

$$Q(P_e, \tau_{II}) = \sqrt{\tau_{II}^2 + (C \cos \theta - \sigma_t \sin \theta)^2} - (C \cos \theta + c_{dl} P_e \sin \theta), \quad \text{with } c_{dl} = \exp(-\phi_c/\phi). \quad (C8)$$

The dilatancy coefficient c_{dl} is defined in Eq. (C6) is the dilatancy coefficient.

550 For generality, we still keep the Note that we choose c_{dl} to depend on porosity. This choice contrasts with the stress-dependent formulation used in Carol et al. (1997), which studies cracks in an engineering context. In our model, $c_{dl} \approx 1$ everywhere the porosity is not vanishingly small, and $c_{dl} \approx 0$ in non-porous regions. The exponential function is chosen to provide a smooth transition between these two states.

Although our models in this paper are dominantly elastic and plastic, we retain viscosity in the formulation for generality. We employ the following porosity-dependent relationships for the Maxwell shear and bulk viscous terms and its porosity-dependent relation in the computational framework as viscosity;

$$555 \quad \eta_\phi = \eta_0 \exp(-27\phi), \quad \zeta_\phi = \eta_0/\phi. \quad (C9)$$

Here we choose $\eta_0 = 10^{30}$ Pa s. For numerical stability, we limit their variation range as $\eta_\phi \geq 10^{-3}\eta_0$ and $\zeta_\phi \leq 10^3\eta_0$. With this choice of parameter, the minimum shear Maxwell time is extremely large, $\eta_0/G \sim 10^9$ years, compared to the simulation time ($< 10^4$ years). The compaction Maxwell time has a similar magnitude too. Therefore, it is essentially a poro-elastic-viscoplastic rheology in this way.

560 Appendix D: Energy analysis of the poro-VEVP model

This sections explains the calculation of mechanical work rates in the poro-VEVP model associated with different rheological component of the solid phase. Then it discusses the condition that the viscous work in the Kelvin viscoplastic component is negligible.

D1 Local work rates

565 The local work rate associated with deformation at a point can be expressed as the product of the strain rates and effective stresses causing the deformation (Batchelor, 2000; Katz, 2022). In the poro-VEVP model, the local work rate is given by

$$\dot{w} = \bar{\boldsymbol{\sigma}}^{\text{eff}} : \dot{\boldsymbol{\epsilon}}, \quad (\text{D1})$$

where the effective stress and strain rates can be decomposed into isotropic and deviatoric parts,

$$\bar{\boldsymbol{\sigma}}^{\text{eff}} = -(1 - \phi)\Delta P \mathbf{I} + (1 - \phi)\boldsymbol{\tau}^s, \quad \dot{\boldsymbol{\epsilon}} = \frac{1}{3}\mathcal{C}\mathbf{I} + \dot{\boldsymbol{\epsilon}}. \quad (\text{D2})$$

570 Here, \mathcal{C} and $\dot{\boldsymbol{\epsilon}}$ denote the isotropic (compaction rate) and deviatoric strain rates, respectively.

Substituting Eq. (D2) into Eq. (D1) and regrouping with respect to deviatoric and isotropic deformation (cf. Katz (2022)), we obtain

$$\dot{w} = (1 - \phi)\boldsymbol{\tau}^s : \dot{\boldsymbol{\epsilon}} - (1 - \phi)\Delta P \mathcal{C}. \quad (\text{D3})$$

The strain rates can be further decomposed into viscous, elastic, and viscoplastic components

$$575 \quad \dot{\boldsymbol{\epsilon}} = \dot{\boldsymbol{\epsilon}}^v + \dot{\boldsymbol{\epsilon}}^e + \dot{\boldsymbol{\epsilon}}^K = \frac{1}{3}(\mathcal{C}^v + \mathcal{C}^e + \mathcal{C}^K)\mathbf{I} + (\dot{\boldsymbol{\epsilon}}^v + \dot{\boldsymbol{\epsilon}}^e + \dot{\boldsymbol{\epsilon}}^K) \quad (\text{D4})$$

Consequently, the local work rate can also be decomposed into viscous, elastic, and viscoplastic components,

$$\dot{w} = \dot{w}^v + \dot{w}^e + \dot{w}^K. \quad (\text{D5})$$

Each term on the right-hand side includes contributions from both deviatoric and isotropic terms. For example,

$$\dot{w}^K = \bar{\boldsymbol{\sigma}}^{\text{eff}} : \dot{\boldsymbol{\epsilon}}^K = (1 - \phi)\boldsymbol{\tau}^s : \dot{\boldsymbol{\epsilon}}^K - (1 - \phi)\Delta P \mathcal{C}^K. \quad (\text{D6})$$

580 D2 Viscoplastic viscous dissipation energy

In the poro-VEVP model, a Kelvin viscous element with viscosity η^K is introduced to regularise the computation of plastic deformation. It increases the total stress of the viscoplastic body by a rate-dependent overstress while sharing the same strain rates as the plastic element. Therefore, the dissipation rate of the viscoplastic component can be decomposed as

$$\dot{w}^K = \dot{w}^p + \eta^K \dot{\boldsymbol{\epsilon}}^K : \dot{\boldsymbol{\epsilon}}^K, \quad (\text{D7})$$

585 where the first and second terms on the right-hand side represent the Kelvin plastic and Kelvin viscous dissipation energy, respectively.

Comparing this equation with Eq. (D6), we find that the Kelvin viscous term is negligible if $\|\eta^K \dot{e}^K\| \ll \|\bar{\sigma}^{\text{eff}}\|$. In the tensile failure regime, the magnitude of effective stress is about the similar size to the tensile strength when the Kelvin viscosity is sufficiently small, that is $\|\bar{\sigma}^{\text{eff}}\| \sim \sigma_t$. Therefore, the condition for negligible Kelvin viscosity can be written as

$$590 \quad \eta^K \ll \frac{\sigma_t}{\|\dot{e}^K\|}. \quad (\text{D8})$$

We use preliminary computations to extract $\|\dot{e}^K\|$ and then estimate the conditions for η^K . The maximal plastic strain rate is higher when the propagation rate is faster. In a computation that has $v_t \sim 7$ m/yr, $\|\dot{e}^K\| < 10^{-10} \text{ s}^{-1}$. Taking $\sigma_t = 1.25$ MPa, we find $\eta^K \ll 10^{16}$ Pa s. A sensitivity test to the value of η^K can also confirm whether the effect of Kelvin viscosity is negligible.

595 In this manuscript, we choose $\eta^K = 10^{10}$ Pa s which is sufficiently small for all cases considered.

Appendix E: Mesh dependency of the poro-VEVP model

We perform mesh-dependency tests, varying both time-step and cell sizes, with results shown in Figure E1. Since the dyke width in our simulation always equals the width of one grid cell, these tests require consideration of the boundary conditions. Holding Q_0 (the volume flow rate into the domain) constant causes $Q_0/\Delta x$ (the volume flux) to vary with grid spacing, altering the pressure gradient boundary condition in Equation (13) and significantly affecting results. Conversely, holding the flux constant ensures a constant pressure gradient but results in a varying flow rate Q_0 as grid size changes. Therefore, we conducted two sets of tests: one with fixed flow rate and one with fixed flux.

Panel (a) demonstrates convergence in propagation speed (v_t) with respect to decreasing time-step size (Δt). Reducing Δt from 0.5 to 0.25 years increases v_t by only approximately 2%. Thus, $\Delta t = 0.5$ yr provides sufficient accuracy for the reference case.

Panel (a) further shows that propagation speed is independent of cell size when the flux ($Q_0/\Delta x$) is held constant, rather than the flow rate (Q_0). This difference highlights a limitation of the current model: the dyke width can not be smaller than the cell width.

Panel (b) indicates that the viscoplastic dissipation rate \dot{W}^K depends on cell size for both fixed flux and fixed flow rate conditions. For the fixed flux case, it follows an approximate power-law relationship, $\dot{W}^K \propto \Delta x^{1/2}$. Because the total dissipation rate is the integral of the local dissipation rate over the entire domain (Eq. (14)), this dependency reinforces the model's limitation stated above. Note that $\Delta z = \Delta x$ in these tests.

In summary, while the dyke propagation speed can be insensitive to grid spacing when fixing the liquid flux, the model requires further development to achieve convergence.

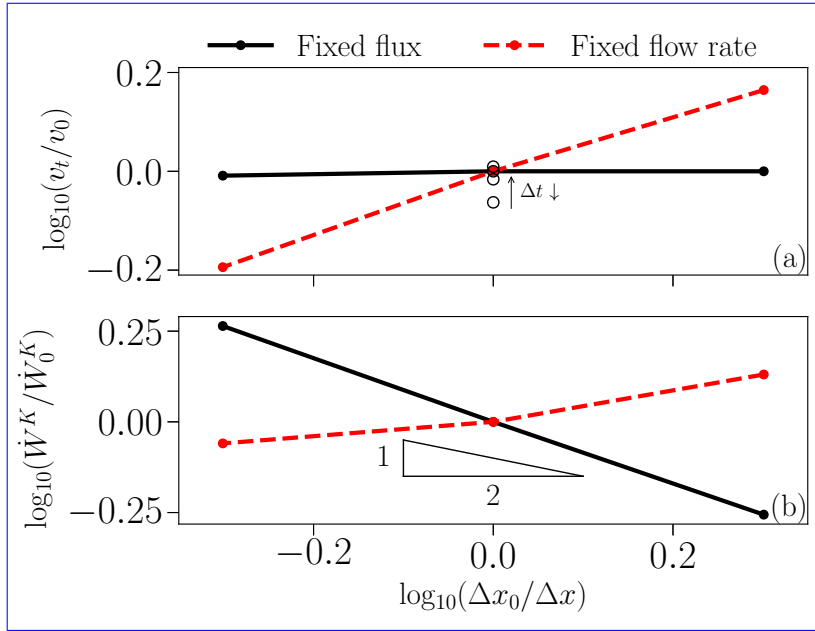


Figure E1. Mesh-dependency test for fixed-flux (solid black lines) and fixed-flow rate (dashed red lines) cases. The domain width is held constant while varying cell size of the mesh. (a) Variation of propagation speed (v_t) versus cell size (Δx). Solid circles represent variations in cell size with a fixed time step of $\Delta t = 0.5$ yr. Open circles that are aligned vertically represent variations in the time step ($\Delta t = 2, 1, 0.5,$ and 0.25 yr, from bottom to top). Decreasing Δt values leads to an increase of v_t until a convergence is achieved, as indicated by the arrow. The reference case uses $\Delta x = \Delta z = 40$ m and $\Delta t = 0.5$ yr. (b) Variation of the viscoplastic dissipation rate (\dot{W}^K) versus cell size (Δx). The inset triangle illustrates the approximate power-law relationship, $\dot{W}^K \sim \Delta x^{1/2}$, for the fixed flux case (black line).

615 Appendix F: Stress distribution of the (poro-)LEFM model

The stress distribution at the tip of the poro-LEFM model is identical to the mode-I fracture of the LEFM model,

$$\begin{Bmatrix} \sigma_{xx} \\ \sigma_{zz} \\ \sigma_{xz} \end{Bmatrix} = \frac{K_c}{\sqrt{2\pi r}} \begin{Bmatrix} \cos(\vartheta/2)[1 - \sin(\vartheta/2)\sin(3\vartheta/2)] \\ \cos(\vartheta/2)[1 + \sin(\vartheta/2)\sin(3\vartheta/2)] \\ \sin(\vartheta/2)\cos(\vartheta/2)\cos(3\vartheta/2) \end{Bmatrix}, \quad (\text{F1})$$

where r and ϑ are the polar coordinate system from the fracture tip, as shown in Fig 5 (a). This formulation has also been used in Li et al. (2023).

620 Appendix G: Stresses and pressure inside of the dyke

This section discusses the differences in stresses and pressure inside the dyke between the poro-VEVP and poro-LEFM models. Taking p^l (liquid pressure) at the tail as an example, we have $p^l = 0$ and $\partial p^l/\partial z = 0$ in the poro-LEFM model, but non-zero

values for both in the poro-VEVP model. These differences stem from the nature of geometry and the complexity of stress balances.

625 Firstly, the poro-LEFM model assumes an infinitely long dyke, while the poro-VEVP model cannot make such an assumption. Consequently, the far-field condition of zero pressure and pressure gradient can be applied directly to the poro-LEFM model, but not to the poro-VEVP model.

Secondly, the stress balance in the poro-LEFM model is simpler than in the poro-VEVP model. The poro-LEFM model assumes $p^l = p^s$ and takes p^s as an elastic stress of the solid phase under one-dimensional deformation, as shown in Eq. (A7).
 630 However, the poro-VEVP model has a two-dimensional force-balance equation involving the gradient of tensor-form solid stresses and an extra term of static pressure gradient $\phi\Delta\rho g$, as shown in Eq. (6).

This complexity is evident in the force balance equation along the dyke, which is the z-component of Eq. (6),

$$-\frac{\partial p^l}{\partial z} + \frac{\partial}{\partial x} [(1 - \phi)\tau_{xz}^s] + \frac{\partial}{\partial z} [(1 - \phi)\tau_{zz}^s] - \frac{\partial}{\partial z} [(1 - \phi)\Delta P] + \phi\Delta\rho g = 0. \quad (\text{G1})$$

Here, τ_{xz}^s and τ_{zz}^s are components of the tensor-form solid deviatoric stresses, and ΔP is the compaction stress. These stresses
 635 are associated with deformation in both x and z directions. Even assuming no solid deformation, we have $\partial p^l / \partial z = \phi\Delta\rho g$, where liquid pressure balances with static pressure. In general, none of the terms in the equation can be eliminated through scaling analysis.

Figure G1 shows numerical results of the vertical distribution for all five terms in the equation above for the reference case at $t = 2$ kyr. Sufficiently far from the tip, all terms become invariant with respect to their vertical position, and none can be
 640 considered zero. Therefore, p^l is coupled with the gradient of full tensor-form stresses of the solid phase, and thus also the full tensor-form strain rates. These values can only be determined through numerical computation, preventing us from prescribing boundary conditions consistent with the supposed stress gradient in the tail. This unavoidable difference leads to a boundary layer at the bottom serving as a transition in the numerical results, as shown in Fig. 3(b–c).

Hence, quantitatively comparing stresses inside the dyke between the poro-VEVP and poro-LEFM models may not be
 645 reasonable, as evidenced by the mismatch in the grey region in Fig. 5(b). However, we can compare stresses in the zero-porosity region outside the dyke (Fig. 5), where both models describe a two-dimensional elastic stress distribution associated with the tip fracture. The poro-LEFM model's 2D stress field components are shown in Eq. (F1), representing a toughness-dominated distribution. The poro-VEVP model's components are computed numerically, with the dominant rheology being elasticity and the strong plastic deformation at the tip qualitatively similar to a discrete fracture. This intense plastic deformation is seen as
 650 the abrupt peak of plastic dissipation energy in Fig. 3 (d).

We also observe similarity in the porosity distribution inside the dyke near the tip (Fig. 4(e)), implying similar $\partial p^l / \partial z$ near the tip due to Darcy's equation. Figure G1 shows $\partial p^l / \partial z$ can be a leading term in the force-balance equation near the tip, suggesting similar fracture-dominated deformation despite different far-field stresses in the poro-VEVP dyke.

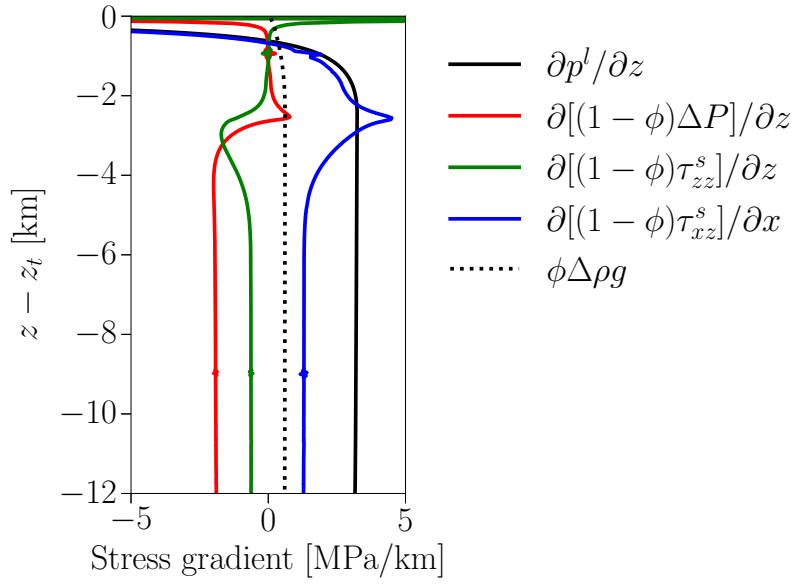


Figure G1. Components of vertical stress gradients of the reference case at $t = 2$ kyr.

Author contributions. All authors contributed through regular meetings and critical feedback. RK conceptualised the research, acquired the funding, and supervised the project. YL developed and implemented the poro-VEVP method, made the analysis and the visualizations. YL and TD developed codes for the poro-LEFM model. YL and AP developed the codes for the poro-VEVP model. YL and RK wrote the paper. TD and AP provided critical feedback on the writing. All authors revised the final version of the paper.

Competing interests. The authors have no competing interest to declare.

Acknowledgements. This research received funding from the European Research Council under Horizon 2020 research and innovation program grant agreement 772255. AP acknowledges support from the Royal Society (URF\R1\231613). Numerical simulations were computed on the Arcus-C cluster from the Advanced Research Computing (ARC) services at the University of Oxford.

References

- Abbo, A. J. and Sloan, S. W.: A Smooth Hyperbolic Approximation to the Mohr-Coulomb Yield Criterion, *Computers & Structures*, 54, 427–441, [https://doi.org/10.1016/0045-7949\(94\)00339-5](https://doi.org/10.1016/0045-7949(94)00339-5), 1995.
- 665 Abdullin, R., Melnik, O., Rust, A., Blundy, J., Lgotina, E., and Golovin, S.: Ascent of Volatile-Rich Felsic Magma in Dykes: A Numerical Model Applied to Deep-Sourced Porphyry Intrusions, *Geophysical Journal International*, 236, 1863–1876, <https://doi.org/10.1093/gji/ggae027>, 2024.
- Acocella, V., Ripepe, M., Rivalta, E., Peltier, A., Galetto, F., and Joseph, E.: Towards Scientific Forecasting of Magmatic Eruptions, *Nature Reviews Earth & Environment*, 5, 5–22, <https://doi.org/10.1038/s43017-023-00492-z>, 2024.
- 670 Anderson, T. L.: *Fracture Mechanics: Fundamentals and Applications*, Fourth Edition, CRC Press, Boca Raton, 4 edn., ISBN 978-1-315-37029-3, <https://doi.org/10.1201/9781315370293>, 2017.
- Bader, J., Zhu, W., Montési, L., Qi, C., Cordonnier, B., Kohlstedt, D., and Warren, J.: Effects of Stress-Driven Melt Segregation on Melt Orientation, Melt Connectivity and Anisotropic Permeability, *Journal of Geophysical Research: Solid Earth*, 129, e2023JB028065, <https://doi.org/10.1029/2023JB028065>, 2024.
- 675 Balay, S., Abhyankar, S., Adams, M. F., Benson, S., Brown, J., Brune, P., Buschelman, K., Constantinescu, E., Dalcin, L., Dener, A., Eijkhout, V., Gropp, W. D., Hapla, V., Isaac, T., Jolivet, P., Karpeev, D., Kaushik, D., Knepley, M. G., Kong, F., Kruger, S., May, D. A., McInnes, L. C., Mills, R. T., Mitchell, L., Munson, T., Roman, J. E., Rupp, K., Sanan, P., Sarich, J., Smith, B. F., Zampini, S., Zhang, H., Zhang, H., and Zhang, J.: *PETSc/TAO Users Manual*, Tech. Rep. ANL-21/39 - Revision 3.17, Argonne National Laboratory, 2022a.
- Balay, S., Abhyankar, S., Adams, M. F., Benson, S., Brown, J., Brune, P., Buschelman, K., Constantinescu, E. M., Dalcin, L., Dener, A., Eijkhout, V., Gropp, W. D., Hapla, V., Isaac, T., Jolivet, P., Karpeev, D., Kaushik, D., Knepley, M. G., Kong, F., Kruger, S., May, D. A., McInnes, L. C., Mills, R. T., Mitchell, L., Munson, T., Roman, J. E., Rupp, K., Sanan, P., Sarich, J., Smith, B. F., Zampini, S., Zhang, H., Zhang, H., and Zhang, J.: *PETSc Web page*, <https://petsc.org/>, <https://petsc.org/>, 2022b.
- 680 Batchelor, G. K.: *An Introduction to Fluid Dynamics*, Cambridge Mathematical Library, Cambridge University Press, Cambridge, ISBN 978-0-521-66396-0, <https://doi.org/10.1017/CBO9780511800955>, 2000.
- Bercovici, D., Ricard, Y., and Schubert, G.: A Two-Phase Model for Compaction and Damage: 1. General Theory, *Journal of Geophysical Research: Solid Earth*, 106, 8887–8906, <https://doi.org/10.1029/2000JB900430>, 2001.
- Bolchover, P. and Lister, J. R.: The Effect of Solidification on Fluid-Driven Fracture, with Application to Bladed Dykes, *Proceedings of the Royal Society of London. Series A: Mathematical, Physical and Engineering Sciences*, 455, 2389–2409, <https://doi.org/10.1098/rspa.1999.0409>, 1999.
- 690 Brune, S., Kolawole, F., Olive, J.-A., Stamps, D. S., Buck, W. R., Buitter, S. J. H., Furman, T., and Shillington, D. J.: Geodynamics of Continental Rift Initiation and Evolution, *Nature Reviews Earth & Environment*, pp. 1–19, <https://doi.org/10.1038/s43017-023-00391-3>, 2023.
- Buck, W. R.: *The Role of Magma in the Development of the Afro-Arabian Rift System*, Geological Society, London, Special Publications, 259, 43–54, <https://doi.org/10.1144/gsl.sp.2006.259.01.05>, 2006.
- 695 Burov, E. B.: Rheology and Strength of the Lithosphere, *Marine and Petroleum Geology*, 28, 1402–1443, <https://doi.org/10.1016/j.marpetgeo.2011.05.008>, 2011.
- Cai, Z. and Bercovici, D.: Two-Phase Damage Models of Magma-Fracturing, *Earth and Planetary Science Letters*, 368, 1–8, <https://doi.org/10.1016/j.epsl.2013.02.023>, 2013.

- Carol, I., Prat, P. C., and López, C. M.: Normal/Shear Cracking Model: Application to Discrete Crack Analysis, *Journal of Engineering Mechanics*, 123, 765–773, [https://doi.org/10.1061/\(asce\)0733-9399\(1997\)123:8\(765\)](https://doi.org/10.1061/(asce)0733-9399(1997)123:8(765)), 1997.
- 700 Cerpa, N. G., Guillaume, B., and Martinod, J.: The Interplay between Overriding Plate Kinematics, Slab Dip and Tectonics, *Geophysical Journal International*, 215, 1789–1802, <https://doi.org/10.1093/gji/ggy365>, 2018.
- Connolly, J. A. D. and Podladchikov, Yu. Yu.: Compaction-Driven Fluid Flow in Viscoelastic Rock, *Geodinamica Acta*, 11, 55–84, <https://doi.org/10.1080/09853111.1998.11105311>, 1998.
- 705 Cramer, F.: Scientific Colour Maps, Zenodo, <https://doi.org/10.5281/ZENODO.1243862>, 2021.
- Cramer, F., Shephard, G. E., and Heron, P. J.: The Misuse of Colour in Science Communication, *Nature Communications*, 11, 5444, <https://doi.org/10.1038/s41467-020-19160-7>, 2020.
- Daines, M. J. and Kohlstedt, D. L.: Influence of Deformation on Melt Topology in Peridotites, *Journal of Geophysical Research*, 102, 10 257–10 271, <https://doi.org/10.1029/97jb00393>, 1997.
- 710 Davis, T., Rivalta, E., and Dahm, T.: Critical Fluid Injection Volumes for Uncontrolled Fracture Ascent, *Geophysical Research Letters*, 47, <https://doi.org/10.1029/2020gl087774>, 2020.
- Davis, T., Rivalta, E., Smittarello, D., and Katz, R. F.: Ascent Rates of 3-D Fractures Driven by a Finite Batch of Buoyant Fluid, *Journal of Fluid Mechanics*, 954, A12, <https://doi.org/10.1017/jfm.2022.986>, 2023.
- Delcamp, A., Troll, V. R., van Wyk de Vries, B., Carracedo, J. C., Petronis, M. S., Pérez-Torrado, F. J., and Deegan, F. M.: Dykes and
715 Structures of the NE Rift of Tenerife, Canary Islands: A Record of Stabilisation and Destabilisation of Ocean Island Rift Zones, *Bulletin of Volcanology*, 74, 963–980, <https://doi.org/10.1007/s00445-012-0577-1>, 2012.
- Drymoni, K., Tibaldi, A., Bonali, F. L., and Mariotto, F. A. P.: Dyke to Sill Deflection in the Shallow Heterogeneous Crust during Glacier Retreat: Part I, *Bulletin of Volcanology*, 85, 73, <https://doi.org/10.1007/s00445-023-01684-7>, 2023.
- Duret, T., Borst, R., and Yamato, P.: Modelling lithospheric deformation using a compressible visco-elasto-viscoplastic rheology and the
720 effective viscosity approach, *Geochemistry, Geophysics, Geosystems*, <https://doi.org/10.1029/2021gc009675>, 2021.
- Fernández, C., de la Nuez, J., Casillas, R., and García Navarro, E.: Stress Fields Associated with the Growth of a Large Shield Volcano (La Palma, Canary Islands), *Tectonics*, 21, 13–1–13–18, <https://doi.org/10.1029/2000TC900038>, 2002.
- Fiske, R. S., Jackson, E. D., and Sutton, J.: Orientation and Growth of Hawaiian Volcanic Rifts: The Effect of Regional Structure and Gravitational Stresses, *Proceedings of the Royal Society of London. A. Mathematical and Physical Sciences*, 329, 299–326,
725 <https://doi.org/10.1098/rspa.1972.0115>, 1997.
- Griffith, A. A.: VI. The Phenomena of Rupture and Flow in Solids, *Philosophical Transactions of the Royal Society of London. Series A, Containing Papers of a Mathematical or Physical Character*, 221, 163–198, <https://doi.org/10.1098/rsta.1921.0006>, 1921.
- Gudmundsson, A.: Toughness and Failure of Volcanic Edifices, *Tectonophysics*, 471, 27–35, <https://doi.org/10.1016/j.tecto.2009.03.001>, 2009.
- 730 Gudmundsson, A. and Loetveit, I. F.: Dyke Emplacement in a Layered and Faulted Rift Zone, *Journal of Volcanology and Geothermal Research*, 144, 311–327, <https://doi.org/10.1016/j.jvolgeores.2004.11.027>, 2005.
- Katz, R. F.: *The Dynamics of Partially Molten Rock*, Princeton University Press, ISBN 0691176566, 2022.
- Katz, R. F., Jones, D. W. R., Rudge, J. F., and Keller, T.: Physics of melt extraction from the mantle: Speed and style, *Annual Review of Earth and Planetary Sciences*, 50, 507–540, 2022.
- 735 Kaus, B. J. P. and Podladchikov, Y. Y.: Initiation of Localized Shear Zones in Viscoelastoplastic Rocks, *Journal of Geophysical Research: Solid Earth*, 111, <https://doi.org/10.1029/2005JB003652>, 2006.

- Kelemen, P. B., Hirth, G., Shimizu, N., Spiegelman, M., and Dick, H.: A review of melt migration processes in the adiabatically upwelling mantle beneath oceanic spreading ridges, *Philosophical Transactions of the Royal Society of London. Series A: Mathematical, Physical and Engineering Sciences*, 355, 283–318, 1997.
- 740 Keller, T., May, D. A., and Kaus, B. J. P.: Numerical modelling of magma dynamics coupled to tectonic deformation of lithosphere and crust, *Geophysical Journal International*, 195, 1406–1442, <https://doi.org/10.1093/gji/ggt306>, 2013.
- Kiss, D., Moulas, E., Kaus, B. J. P., and Spang, A.: Decompression and Fracturing Caused by Magmatically Induced Thermal Stresses, *Journal of Geophysical Research: Solid Earth*, 128, e2022JB025341, <https://doi.org/10.1029/2022JB025341>, 2023.
- Kjøll, H. J., Galland, O., Labrousse, L., and Andersen, T. B.: Emplacement Mechanisms of a Dyke Swarm across the Brittle-
745 Ductile Transition and the Geodynamic Implications for Magma-Rich Margins, *Earth and Planetary Science Letters*, 518, 223–235, <https://doi.org/10.1016/j.epsl.2019.04.016>, 2019.
- Krieg, R. D. and Krieg, D. B.: Accuracies of Numerical Solution Methods for the Elastic-Perfectly Plastic Model, *Journal of Pressure Vessel Technology*, 99, 510–515, <https://doi.org/10.1115/1.3454568>, 1977.
- Lang, P. S., Paluszny, A., Nejati, M., and Zimmerman, R. W.: Relationship Between the Orientation of Maximum Permeability and Intermediate Principal Stress in Fractured Rocks, *Water Resources Research*, 54, 8734–8755, <https://doi.org/10.1029/2018WR023189>, 2018.
- 750 Lei, Q., Latham, J.-P., and Tsang, C.-F.: The Use of Discrete Fracture Networks for Modelling Coupled Geomechanical and Hydrological Behaviour of Fractured Rocks, *Computers and Geotechnics*, 85, 151–176, <https://doi.org/10.1016/j.compgeo.2016.12.024>, 2017.
- Li, J. H., Zhang, L. M., Wang, Y., and Fredlund, D. G.: Permeability Tensor and Representative Elementary Volume of Saturated Cracked Soil, *Canadian Geotechnical Journal*, 46, 928–942, <https://doi.org/10.1139/t09-037>, 2009.
- 755 Li, Y., Pusok, A. E., Davis, T., May, D. A., and Katz, R. F.: Continuum Approximation of Dyking with a Theory for Poro-Viscoelastic–Viscoplastic Deformation, *Geophysical Journal International*, 234, 2007–2031, <https://doi.org/10.1093/gji/ggad173>, 2023.
- Li, Y., Davis, T., Pusok, A., and Katz, R.: poroVEVP model with benchmark (v1.0.0), <https://doi.org/10.5281/zenodo.14238175>, 2024.
- Lister, J. R.: Buoyancy-Driven Fluid Fracture: The Effects of Material Toughness and of Low-Viscosity Precursors, *Journal of Fluid Mechanics*, 210, 263–280, <https://doi.org/10.1017/S0022112090001288>, 1990.
- 760 Maccaferri, F., Rivalta, E., Keir, D., and Acocella, V.: Off-Rift Volcanism in Rift Zones Determined by Crustal Unloading, *Nature Geoscience*, 7, 297–300, <https://doi.org/10.1038/ngeo2110>, 2014.
- McGuire, W. J. and Pullen, A. D.: Location and Orientation of Eruptive Fissures and Feederdykes at Mount Etna; Influence of Gravitational and Regional Tectonic Stress Regimes, *Journal of Volcanology and Geothermal Research*, 38, 325–344, [https://doi.org/10.1016/0377-0273\(89\)90046-2](https://doi.org/10.1016/0377-0273(89)90046-2), 1989.
- 765 McKenzie, D.: The Generation and Compaction of Partially Molten Rock, *Journal of Petrology*, 25, 713–765, <https://doi.org/10.1093/petrology/25.3.713>, 1984.
- McKenzie, D., McKenzie, J. M., and Saunders, R. S.: Dike Emplacement on Venus and on Earth, *Journal of Geophysical Research: Planets*, 97, 15 977–15 990, <https://doi.org/10.1029/92JE01559>, 1992.
- McLeod, P. and Tait, S.: The Growth of Dykes from Magma Chambers, *Journal of Volcanology and Geothermal Research*, 92, 231–245,
770 [https://doi.org/10.1016/S0377-0273\(99\)00053-0](https://doi.org/10.1016/S0377-0273(99)00053-0), 1999.
- Medici, G., Ling, F., and Shang, J.: Review of Discrete Fracture Network Characterization for Geothermal Energy Extraction, *Frontiers in Earth Science*, 11, <https://doi.org/10.3389/feart.2023.1328397>, 2023.
- Moresi, L., Dufour, F., and Mühlhaus, H.-B.: A Lagrangian Integration Point Finite Element Method for Large Deformation Modeling of Viscoelastic Geomaterials, *Journal of Computational Physics*, 184, 476–497, [https://doi.org/10.1016/s0021-9991\(02\)00031-1](https://doi.org/10.1016/s0021-9991(02)00031-1), 2003.

- 775 Murrell, S. A. F.: The Theory of the Propagation of Elliptical Griffith Cracks under Various Conditions of Plane Strain or Plane Stress: Part I, *British Journal of Applied Physics*, 15, 1195–1210, <https://doi.org/10.1088/0508-3443/15/10/308>, 1964.
- Odé, Helmer.: Mechanical analysis of the dike pattern of the Spanish Peaks Area, Colorado, *GSA Bulletin*, 68, 567–576, [https://doi.org/10.1130/0016-7606\(1957\)68\[567:MAOTDP\]2.0.CO;2](https://doi.org/10.1130/0016-7606(1957)68[567:MAOTDP]2.0.CO;2), 1957.
- Papanastasiou, P.: The Effective Fracture Toughness in Hydraulic Fracturing, *International Journal of Fracture*, 96, 127–147, 780 <https://doi.org/10.1023/A:1018676212444>, 1999.
- Passarelli, L., Rivalta, E., and Shuler, A.: Dike Intrusions during Rifting Episodes Obey Scaling Relationships Similar to Earthquakes, *Scientific Reports*, 4, 3886, <https://doi.org/10.1038/srep03886>, 2014.
- Pusok, A., May, D. A., Li, Y., and Katz, R.: apusok/FD-PDE: v1.0.0, <https://doi.org/10.5281/zenodo.6900871>, 2022a.
- Pusok, A., Li, Y. L., Davis, T., May, D., and Katz, R.: Inefficient melt transport across a weakened lithosphere led to reduced magmatism in 785 the Turkana Depression, submitted to *Geology*, 2024.
- Pusok, A. E., Katz, R. F., May, D. A., and Li, Y.: Chemical Heterogeneity, Convection and Asymmetry beneath Mid-Ocean Ridges, *Geophysical Journal International*, 231, 2055–2078, <https://doi.org/10.1093/gji/ggac309>, 2022b.
- Rees Jones, D. W., Katz, R. F., Tian, M., and Rudge, J. F.: Thermal Impact of Magmatism in Subduction Zones, *Earth and Planetary Science Letters*, 481, 73–79, <https://doi.org/10.1016/j.epsl.2017.10.015>, 2018.
- 790 Rivalta, E., Taisne, B., Bungler, A., and Katz, R.: A Review of Mechanical Models of Dike Propagation: Schools of Thought, Results and Future Directions, *Tectonophysics*, 638, 1–42, <https://doi.org/10.1016/j.tecto.2014.10.003>, 2015.
- Roper, S. M. and Lister, J. R.: Buoyancy-Driven Crack Propagation: The Limit of Large Fracture Toughness, *Journal of Fluid Mechanics*, 580, 359–380, <https://doi.org/10.1017/S0022112007005472>, 2007.
- Rubin, A. M.: Propagation of Magma-Filled Cracks, *Annual Review of Earth and Planetary Sciences*, 23, 287–336, 795 <https://doi.org/10.1146/annurev.earth.23.050195.001443>, 1995.
- Schmeling, H., Marquart, G., Weinberg, R., and Wallner, H.: Modelling Melting and Melt Segregation by Two-Phase Flow: New Insights into the Dynamics of Magmatic Systems in the Continental Crust, *Geophysical Journal International*, 217, 422–450, <https://doi.org/10.1093/gji/ggz029>, 2019.
- Seltzer, C., Peč, M., Zimmerman, M. E., and Kohlstedt, D. L.: Melt Network Reorientation and Crystallographic Preferred 800 Orientation Development in Sheared Partially Molten Rocks, *Geochemistry, Geophysics, Geosystems*, 24, e2023GC010927, <https://doi.org/10.1029/2023GC010927>, 2023.
- Sibson, R. H.: Structural Permeability of Fluid-Driven Fault-Fracture Meshes, *Journal of Structural Geology*, 18, 1031–1042, [https://doi.org/10.1016/0191-8141\(96\)00032-6](https://doi.org/10.1016/0191-8141(96)00032-6), 1996.
- Sigmundsson, F., Parks, M., Geirsson, H., Hooper, A., Drouin, V., Vogfjörd, K. S., Ófeigsson, B. G., Greiner, S. H. M., Yang, Y., Lanzi, 805 C., De Pascale, G. P., Jónsdóttir, K., Hreinsdóttir, S., Tolpekin, V., Friðriksdóttir, H. M., Einarsson, P., and Barsotti, S.: Fracturing and Tectonic Stress Drive Ultrarapid Magma Flow into Dikes, *Science*, 383, 1228–1235, <https://doi.org/10.1126/science.adn2838>, 2024.
- Sim, S. J., Spiegelman, M., Stegman, D. R., and Wilson, C.: The Influence of Spreading Rate and Permeability on Melt Focusing beneath Mid-Ocean Ridges, *Physics of the Earth and Planetary Interiors*, 304, 106486, <https://doi.org/10.1016/j.pepi.2020.106486>, 2020.
- Snow, D. T.: Anisotropic Permeability of Fractured Media, *Water Resources Research*, 5, 1273–1289, 810 <https://doi.org/10.1029/wr005i006p01273>, 1969.
- Spence, D. A. and Turcotte, D. L.: Buoyancy-Driven Magma Fracture: A Mechanism for Ascent through the Lithosphere and the Emplacement of Diamonds, *Journal of Geophysical Research*, 95, 5133, <https://doi.org/10.1029/JB095iB04p05133>, 1990.

- Taisne, B., Tait, S., and Jaupart, C.: Conditions for the Arrest of a Vertical Propagating Dyke, *Bulletin of Volcanology*, 73, 191–204, <https://doi.org/10.1007/s00445-010-0440-1>, 2011.
- 815 Takei, Y.: Stress-induced Anisotropy of Partially Molten Rock Analogue Deformed under Quasi-static Loading Test, *Journal of Geophysical Research*, 115, <https://doi.org/10.1029/2009jb006568>, 2010.
- Taylor-West, J. and Katz, R. F.: Melt-Preferred Orientation, Anisotropic Permeability and Melt-Band Formation in a Deforming, Partially Molten Aggregate, *Geophysical Journal International*, 203, 1253–1262, <https://doi.org/10.1093/gji/ggv372>, 2015.
- Terzaghi, K.: *Theoretical Soil Mechanics*, John Wiley & Sons, Inc., <https://doi.org/10.1002/9780470172766>, 1943.
- 820 Thiele, S. T., Cruden, A. R., Micklethwaite, S., Bungler, A. P., and Köpping, J.: Dyke Apertures Record Stress Accumulation during Sustained Volcanism, *Scientific Reports*, 10, 17 335, <https://doi.org/10.1038/s41598-020-74361-w>, 2020.
- Weertman, J.: Theory of Water-Filled Crevasses in Glaciers Applied to Vertical Magma Transport beneath Oceanic Ridges, *Journal of Geophysical Research (1896-1977)*, 76, 1171–1183, <https://doi.org/10.1029/JB076i005p01171>, 1971.