

Investigating parameter sensitivity and uncertainty in bedform analyses by using a Monte Carlo approach

Julius Reich¹, Axel Winterscheid¹

¹Federal Institute of Hydrology, Department M3 – Fluvial Morphology, Sediment Dynamics and Management, Koblenz, 56068, Germany

Correspondence to: Julius Reich (reich@bafg.de)

Abstract. Precise and reliable information about bedforms, regarding geometry and dynamics, is relevant for many applications – like ensuring safe conditions for navigation along the waterways, parameterizing the roughness of the riverbed in numerical models, or improving bedload measurement and monitoring techniques. There are many bedform analysis tools to extract these information from bathymetrical data. However, most of these tools require the setting of various input parameters, for which specific values have to be selected. How these settings influence the resulting bedform characteristics has not yet been comprehensively investigated. We therefore developed a workflow, to quantify this influence by performing a Monte Carlo Simulation. By repeating the calculations many times with varying input parameter settings, the possible range of results is revealed and procedure-specific uncertainties can be quantified. We implemented a combination of the widely used zerocrossing procedure to determine bedform geometries and a cross-correlation analysis to determine bedform dynamics. Both methods are well known and established, which ensures transferability and value of the findings. In order to increase the robustness of the workflow we implemented a wavelet analysis based on Bedforms-ATM (Guitierrez et al., 2018), which is carried out before the zerocrossing procedure. This provides further orientation and accuracy by identifying predominant bedform lengths in a given bed elevation profile. The workflow has a high degree of automation, which allows the processing of large amounts of data. We applied the workflow to a test dataset from Lower Rhine in Germany, which was collected by the Federal Waterways and Shipping Administration in February 2020. We found that bedform parameters reacted with different sensitivity to varying input parameter settings. For bedform heights uncertainties of up to 35 % and for bedform lengths uncertainties up to 50 % were identified. The setting of a window size in the zerocrossing procedure (especially for the superimposed small-scale bedforms in case they are present) was identified to be the most decisive input parameter. Here, however, the wavelet analysis offers orientation by providing a range of plausible input window sizes and thus allows a reduction of uncertainties. Concurrently, the time difference between two successive measurements has proven to have a significant influence on the determination of bedform dynamics. For the test dataset, the faster migrating small-scale bedforms were no longer traceable for intervals longer than two hours. At the same time, they contributed to up to 90 % of the total bedload transport, highlighting the need for measurements in high temporal resolution in order to avoid a severe underestimation.

1 Introduction

Bedforms are ubiquitous in rivers with sandy or gravelly beds (Carling et al., 2006; Kleinhans, 2001; Van Rijn, 1993). Their occurrence, shape and dimensions as well as their dynamics depend on hydraulic and morphological conditions. Knowing bedforms is crucial for various fields of application. For example, bedform crest heights influence the navigable depth along the waterways (e.g. Carling et al., 2006; Scheiber et al., 2021). This is why information about maximum bedform heights is required in order to ensure the safety and ease of navigation. From the perspective of hydraulics, bedforms increase the flow resistance at the river bed. In numerical modeling, bedform dimensions and shapes often need to be parametrized and transformed into form roughness (Lefebvre and Winter, 2016; Venditti, 2013). The erosion of particles on the bedforms' upstream faces and the accumulation on their downstream faces result in a downstream movement of sediments, contributing to bedload transport (Simons et al., 1965). Therefore, bedload transport rates can be estimated based on bedform migration - so-called dunetracking (e.g. Claude et al., 2012; Leary and Buscombe, 2019; Simons et al., 1965) - representing an alternative approach to direct bedload measurements.

Over the years many tools were developed to derive both bedform geometries and migration rates from multibeam echosounding (MBES)-data (e.g. Cisneros et al., 2020; Gilja et al., 2016; Guitierrez et al., 2018; Henning, 2013; Lee et al., 2021; Lebec et al., 2022; Lefebvre et al. 2022; Núñez-González et al., 2021; Ogor, 2019; Scheiber et al., 2021; Van der Mark and Blom, 2007; Van Dijk et al., 2008; Wang et al., 2020; Zomer et al., 2021a). Most of these tools require the setting of procedure-specific input parameters. Often, there are no theoretically sound criteria or anything like best practice for setting a specific value. For example, a widely used and established approach is the zerocrossing procedure, which is implemented in many published tools and has been used in many studies (e.g. Van der Mark & Blom, 2007, Leary and Buscombe, 2019, Wang et al., 2020; Zomer et al. 2021a). The identification of bedforms crests and troughs in a longitudinal bed elevation profile (BEP) is based on the calculation of a moving average, which requires the setting of a window size. However, there are no equations or guidelines for choosing a specific value. Therefore, the procedure is strongly influenced by the personal experience and subjective selection of the investigator. If applied by several investigators, different results will be obtained from the same procedure and for the same dataset. Despite the ubiquitous need to define the setting of these parameters, little attention has been paid on how different settings influence estimated bedform characteristics. A Monte Carlo Simulation (MCS) is a suitable approach to evaluate this influence of input parameter settings. An MCS is a computer based analytical method which utilizes sequences of random numbers as inputs into a model in order to obtain a probabilistic approximation to the solution (Adekitan, 2014). With regard to bedform analysis, repeated calculations with varying input parameters settings, reveal the possible range of results and enable robust estimates of the resulting bedform characteristics.

We therefore developed a workflow to perform extensive sensitivity and uncertainty analyses and applied it to a field dataset. The workflow includes an initial wavelet analysis, a zerocrossing procedure to determine bedform geometries and two different approaches to analyze bedform dynamics, which are partly based on existing tools. These individual steps are embedded in an MCS-routine to repeat the calculations with varying input parameter definitions. This is the key feature of the workflow and

65 allows to quantify the range of uncertainty for different bedform parameters (e.g. height, length, migration rate) due to the
input parameter settings. Further on, it allows to compare the sensitivity of the different input parameters. Both can be of great
value for future studies in order to estimate the uncertainty and the robustness of produced results.

Essentially, there are two key research questions for this study: What is the sensitivity of the individual input parameters?
What is the total level of uncertainty to be expected due to varying input parameter settings? In order to adequately address
70 these research questions, the following aspects were decisive for the development of the workflow:


- **Automation:** Due to increasing data availability and the need for repeated calculations (within the MCS), it was
essential to achieve a high degree of automation to enable a batch processing of large datasets. So, the algorithm was
coded in a way that allows easy selection of multiple datasets and the performance of many iterations.
- **Transferability & value:** As mentioned earlier there are lots of different bedform analysis tools available. Each of
75 them is complex and it would be beyond the scope of this work to combine them within one comprehensive study.
Therefore, we selected the well-established zerocrossing procedure to determine bedform geometries in combination
with the cross-correlation analysis to determine bedform dynamics. Both approaches have been used in many studies
or are even implemented in recently published tools (see list above). This way, value and transferability of the findings
for future research can be increased. With regard to bedform dynamics, we use the zerocrossing procedure in
80 combination with a newly introduced method as a second approach, which allows further validation and provides new
insights into bedform dynamics.
- **Robustness:** Before the MCS can be carried out, a value range must be specified within which the input parameters
are varied. In order to provide orientation and thus avoid diverging results, a wavelet analysis was added to the
workflow based on Bedforms ATM (Guitierrez et al., 2018). This allows initial estimates about prevailing bedform
85 lengths in a given BEP, which is a required input parameter for the zerocrossing procedure. So, this way, the boundary
conditions for the MCS can be defined and the accuracy and robustness of the procedure can be increased. The
combination of wavelet analysis and zerocrossing procedure has already proven to be efficient in the algorithm
developed by Wang et al. (2020). A further aim was to increase the robustness of the statistical evaluation of bedform
characteristics. We therefore introduce a new parameter as a measure of total bedform height, which behaves more
90 robust compared to existing measures.

The entire workflow is based on the evaluation of longitudinal BEPs. Due to the high degree of automation large numbers of
BEPs can be analyzed. By a dense arrangement of the individual BEPs and by analyzing different angles, a 3D-analysis could
be approximated. We applied the workflow to a test dataset, which contains MBES-data of a 500 m stretch of the Lower Rhine
95 in Germany. The data were collected - during a three days campaign in February 2020 - by the Federal Waterways and Shipping
Administration.

The method section introduces the implemented workflow and contains detailed descriptions of the individual steps and
implemented methods. This is followed by a description of the MBES-dataset from Lower Rhine. In the results section the

resulting bedform parameters and bedload transport rates are presented. The discussion section focuses on the interpretation of the results as well as on the sensitivity of the different procedure-specific input parameters. Finally, the key findings are outlined in the conclusions section.

2 Method

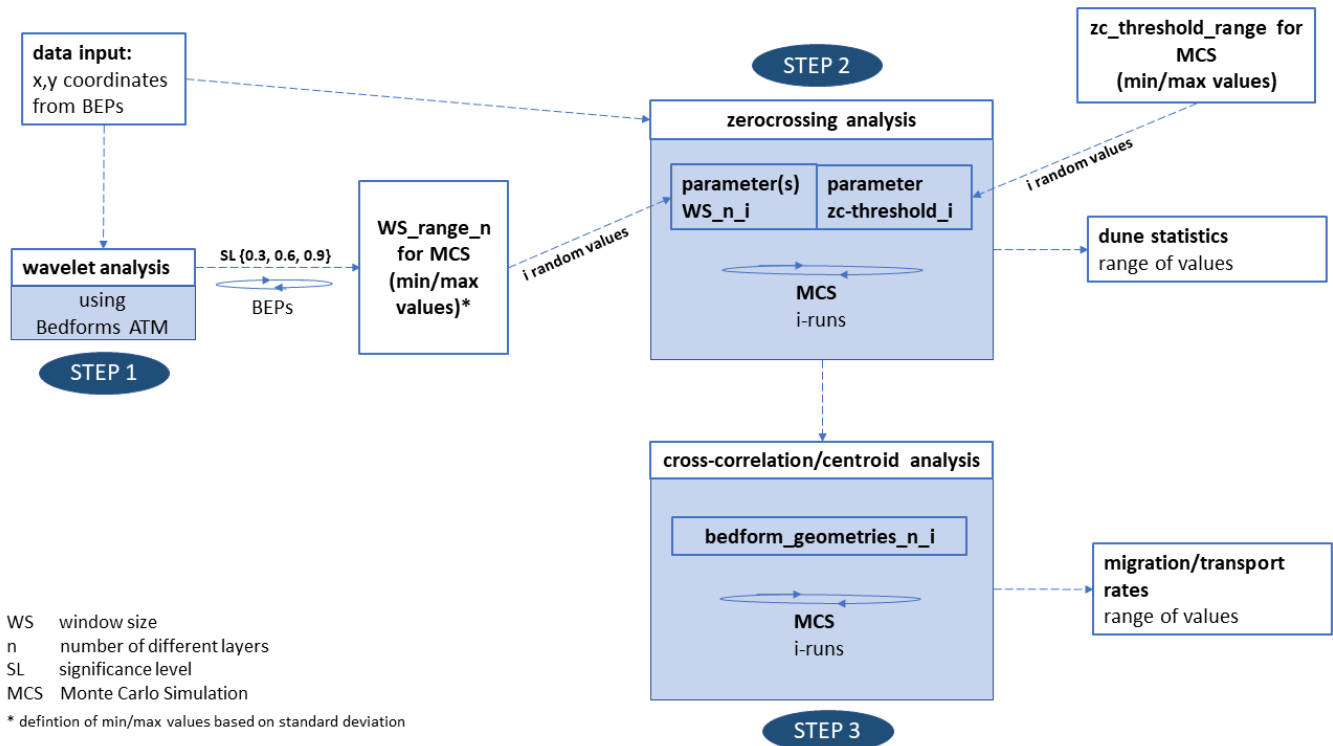

105 **Figure 1: The implemented workflow consists of three steps. For considering the uncertainties associated with the setting of various input parameters, parts of the workflow are performed as an MCS.**

Before describing the individual steps of the implemented workflow in detail, Figure 1 provides an overview for orientation.

The workflow consists of the following key points:

- **Input data:** Longitudinal BEPs derived from MBES-data.
- 110 • **Step 1 – wavelet analysis:** Based on Bedforms-ATM predominant bedform lengths are identified in a given BEP by a continuous wavelet transform. This is a required input parameter for step 2.
- **Step 2 – zero-crossing:** The identified predominant bedform lengths are required input parameters (window sizes) for the zero-crossing procedure, based on the software RhenoBT (Frings et al., 2012), which is used to determine bedform geometries. By extending the original algorithm, a data export of tables containing information about individual
- 115 bedform attributes (e.g. height, length, shape) was implemented, to enable extensive statistical analyses as an optional

post-processing routine. In addition, new statistical parameters for the characterization of bedform geometries were defined.

- **Step 3 – cross-correlation/centroid analysis:** Based on determined bedform geometries, bedform migration rates are calculated using a cross-correlation analysis or a newly introduced centroid analysis that detects the migration of the geometrical centroids of individual bedform areas. From a known migration rate bedload transport rates can be derived by considering grain density and porosity.
- **MCS:** At various points in the workflow the setting of input parameters is required. This has an impact on the results that is not immediately apparent to the user. Therefore, the calculations are repeated multiple times with different input parameter settings in order to reveal the range of plausible results and to evaluate the level of uncertainties.

120

125 2.1 Preprocessing & data preparation

Before the actual analysis, the spatial discretization of the river section under investigation has to be defined. Spatial discretization lateral to the flow direction is given by the distance between the BEPs to each other. The more heterogeneous the investigated bedform field (high spatial variation of bedform dimensions), the denser the arrangement of BEPs should be. In longitudinal direction a division into subsections is mandatory. Later, the statistical parameters (e.g. the average bedform height and length) are calculated per subsection (see section 2.4).

130

In order to obtain the BEPs from the MBES-data, some hydrographic preprocessing steps are required. Based on the plausibilized raw MBES-data, a geometric modeling is suitable to reduce included measurement uncertainties. For this purpose, the measurement data is gridded and for each grid point, a polynomial is approximated to the 3D point cloud within a given radius. In case of the test dataset from Lower Rhine, a surface approximation with polynomials using least squares fit was applied. Along the considered profile tracks the individual BEPs are derived from the DEMs. A detailed description of hydrographic preprocessing steps can be found e.g. in Lorenz et al. (2021a).

135

2.2 Wavelet analysis


The first step of the workflow is a continuous wavelet transform based on Bedforms-ATM. It is performed to identify the predominant wavelengths (interpreted as bedform lengths) in the individual BEPs. The predominant bedform lengths are required input parameters for the zerocrossing procedure that follows in the second step. Wavelet transforms have been used in a variety of applications to analyze riverbed roughness (Nyander et al., 2003) or to discriminate engineering surfaces (Raja et al., 2002). Compared to Fourier methods they are more suitable for signals containing discontinuities. In terms of bedform analyses the so-called Morlet wavelet has appeared to be the most efficient (Guitierrez et al., 2018) and has been used for all analyses in this study. As a result of the wavelet transform, a spectrum is obtained, which indicates the dominance of individual wavelengths in a BEP. Figure 2 shows the so-called wavelet power spectrum for an exemplary BEP excerpt. Based on the chosen significance level, the predominant wavelengths are identified. Only those peaks in the wavelet power spectrum that are greater than the global significance level are considered. By default, the significance level has to be set by the user. In the

145

shown example (Figure 2) three different significance levels lead to three different results. Accordingly, the workflow has been adapted, so that the analysis is executed three times for each BEP with significance levels of 0.3, 0.6 and 0.9. If two predominant wavelengths (equal to two individual peaks included in the wavelet power spectrum) have been detected, it is assumed that two coexistent layers of bedforms are present. For example, small-scale secondary bedforms might be migrating over large-scale underlying bedforms with (likely) higher migration rates (e.g. Carling et al., 2006; Gilja et al., 2013; Kleinhans et al., 2002).

The resulting wavelengths from all analyzed BEPs are stored in a table. This table contains the total number of detected wavelengths and is passed to the next step in the workflow (zerocrossing procedure) after outliers have been removed. For this purpose, mean value and standard deviation σ are calculated for each detected bedform layer. Values that lie outside the range of $\pm 2\sigma$ around the mean value are removed. Nevertheless, before carrying out the further calculation steps, it is recommended to check the results from the wavelet analysis for plausibility, to compare them with site-specific knowledge about occurring bedform dimensions and to make manual adjustments if necessary. The most sensitive step is deciding on the number of bedform layers representing features with predominant wavelengths. Due to potential ambiguity of the results, this step is not automated but requires a critical assessment based on the present morphological conditions. In the example shown in Figure 2 different significance levels indicate a different number of bedform layers for the same BEP. In the first case (Figure 2b), two bedform layers are detected with wavelengths of 8 m and 26 m. In the second case (Figure 2c), two bedform layers are detected with wavelengths of 8 m and 23 m. In the third case (Figure 2d), only one layer with a wavelength of 8 m is detected because the second peak is below the global significance. This decision has a great impact on all analyses that follow (in a recently published meta-analysis by Scheiber et al. (2024), in which five bedform analysis algorithms were compared, the consideration of a second bedform layer was also identified as the most significant cause of deviations between the results of the different algorithms). For instance, the estimated bedload transport rates at the end of the procedure can be over- or underestimated based on the selected number of bedform layers. To make this decision, a visual inspection of the BEPs is recommended. In addition, the calculation of bedform migration rates can be used as validation. If migration rates with high correlation coefficients can be detected for both bedform layers, it can be assumed that the number of layers has been chosen correctly. Optionally - especially in case of larger-scale gradients of the channel bed (e.g. due to underlying bars) - a detrending of the BEPs can be performed, using robust-spline filter techniques. The algorithm is based on a discrete cosine transform and is used to smooth the initial signal. The degree of smoothing depends on the adjustable s-parameter (for further information refer to Guitierrez et al., 2013).

BEP (excerpt)

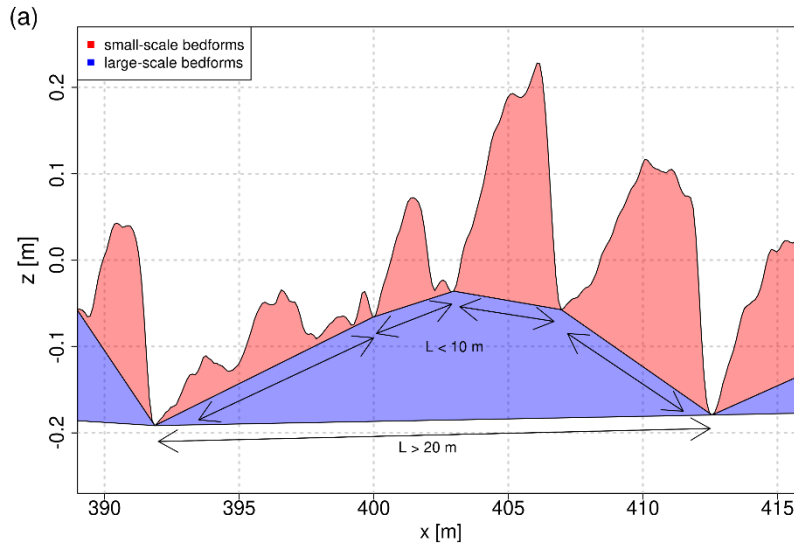

wavelet analysis

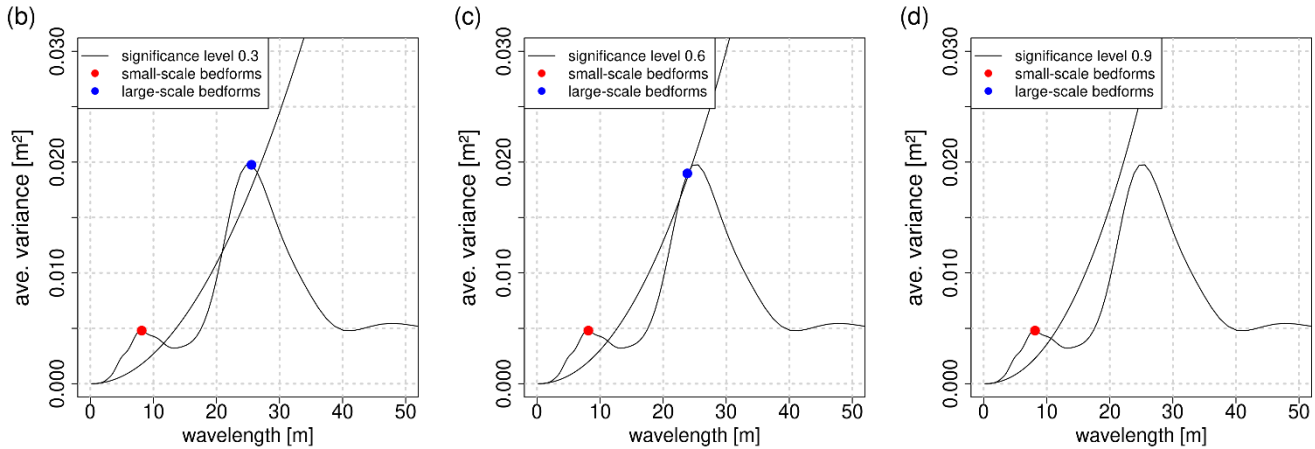


Figure 2: Identifying predominant wavelengths of a BEP by means of wavelet analysis: Depending on the chosen significance level different wavelengths are identified. (a) - Excerpt of an exemplary BEP of the test dataset from Lower Rhine separated into two layers of bedforms. (b-d) – Identified predominant wavelengths by means of wavelet analysis with a significance level of 0.3, 0.6 and 0.9. In the first two cases (b, c) two layers of bedforms are identified. In the third case (d) only one layer of bedforms is identified.

2.3 Zerocrossing procedure

The zerocrossing procedure is adapted from the software RhenoBT, respectively the bedform tracking tool by Van der Mark and Blom (2007). It is a widely used approach for analyzing BEPs with respect to bedform geometries (see section 1). Herein

185 a moving average is calculated over the considered BEP by setting a window size. Ideally, the chosen window size should

approximately correspond to the expected bedform length. For this reason, the results from step 1 (wavelet analysis) provide the rationale for setting the adequate window size. Based on the moving average the zerocrossings are calculated. The local minima between each two zerocrossings are interpreted as bedform troughs. To limit the effect of small-scale fluctuations in the BEPs a *zc*-threshold is used, which defines the minimum distance between a bedform trough and the moving average. Only local minima with distances larger than the *zc*-threshold are considered. There are no objective criteria for its exact definition, but globally, it must not be greater than the minimum expected bedform height. At the end of the procedure, one or two (depending on the selected number of bedform layers) baselines are constructed that separate the individual bedform layers from each other. The lowest baseline separates the bedforms from the non-active layer of the river bed. Based on this separation the individual bedform attributes (height, length and shape) are calculated. If two bedform layers are present, the individual attributes are calculated for each layer separately. In such a case the baseline of the small-scale bedforms is calculated first. Then, the procedure is repeated by calculating the moving average - with the corresponding window size for the underlying large-scale bedforms - over the previously calculated baseline of the small-scale bedforms. The procedure is illustrated in Figure A1, Appendix A.

2.4 Bedform statistics

The results of the zerocrossing procedure can be exported as tables, which summarize geometric attributes for each individual bedform as well as the chosen input parameter settings (Table 1), e.g. to enable subsequent statistical analyses as a post-processing routine. The tables are exported for each BEP, subsection, bedform layer and iteration of the MCS.

Table 1: Output from the analysis containing geometrical attributes for each bedform layer


attribute	definition
x-position [m]	x-position along the BEP
length [m]	bedform length
height [m]	bedform height
points [-]	number of points
area [m ²]	exact bedform area
shape factor [-]	relation between the exact bedform area and the area of the triangle formed by two adjacent bedform troughs and the bedform crest
layer [-]	related bedform layer
iteration [-]	iteration within MCS
window size [m]	selected window size
<i>zc</i> -threshold [m]	selected <i>zc</i> -threshold

In accordance to the definition of individual attributes described in Wesseling & Wilbers (2000), bedform length is defined as the length of the line connecting two adjacent troughs, while bedform height is the height of the triangle formed by a crest and its two adjacent troughs. Total height H_{total} is determined by measuring the height of the triangle which is defined by two

adjacent troughs of the large-scale bedforms and the maximum of the BEP in between (see Figure 3a). Total length L_{total} is
 210 equal to the length of the large-scale bedforms. The shape factor S (-) is the relation between the exact bedform area and the
 simplified bedform area resulting from the triangle formed by bedform height and length (Ten Brinke et al., 1999).

$$S = \frac{A}{0.5 \cdot H \cdot L} \quad (1)$$

Based on these individual bedform attributes, statistical parameters are calculated to describe average bedform characteristics
 in a defined subsection of the BEP. For this purpose, the median is formed over all individual bedform attributes contained in
 215 a subsection. Since the determination of these parameters results from the averaging of individual attributes, their significance
 depends on the number of detected bedforms in the considered subsection. For this reason, another parameter for estimating
 the total bedform height was implemented, which is independent of the number of identified bedforms. For obtaining the so-
 called T_{90} -parameter, in each x -value the vertical difference between lowest baseline and the BEP is calculated (see Figure
 3b). Finally, the 90th percentile of the resulting values is formed within each subsection. The parameter is therefore not based
 220 on measuring the height of individual bedforms but on measuring the accumulated bedform layer thickness (T) along the entire
 BEP. The 90th percentile approximately corresponds to the average total bedform height of individual bedforms in a
 subsection. This means that both T_{90} and H_{total} are used to quantify the same property, but T_{90} is expected to behave more
 robust due to the mentioned aspects. A definition of all parameters is summarized in Appendix A, Table A1.

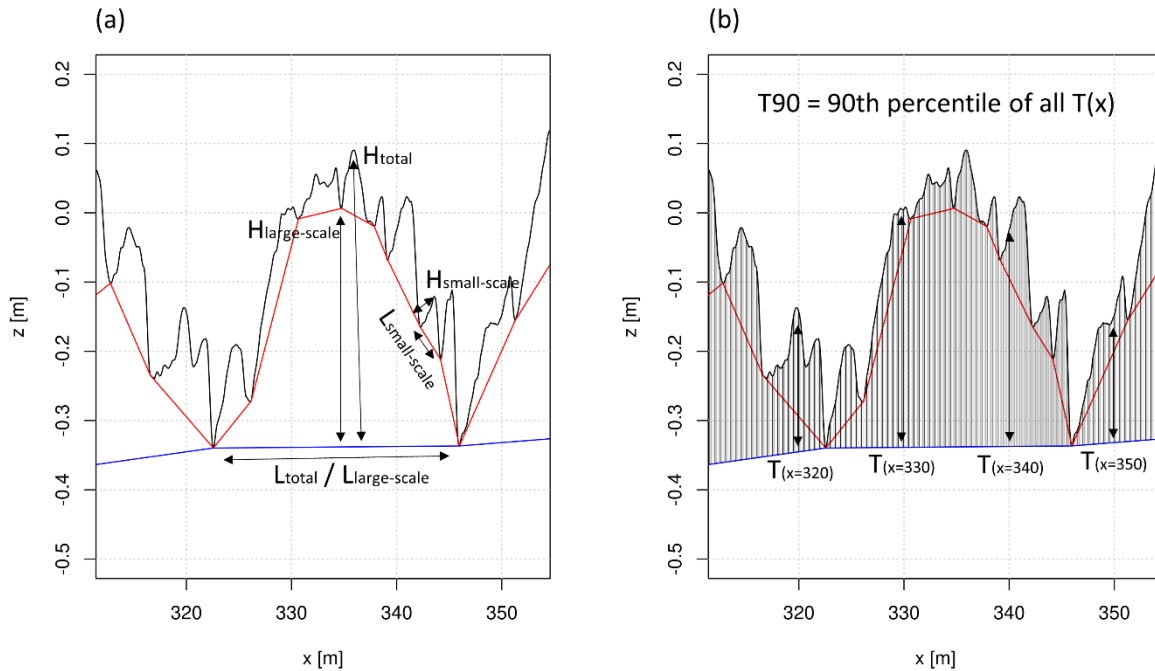

225 **Figure 3: (a) – Definition of individual bedform attributes. (b) – Determination of the T90-parameter.**

2.5 Estimation of bedform migration & bedload transport

Bedform migration rates can be determined if consecutive measurements over time are available. For this purpose, two different methods were implemented. By means of a cross-correlation analysis the spatial offset between two consecutive BEPs is identified (Leary and Buscombe, 2019; McElroy and Mohrig, 2009; Van der Mark and Blom, 2007). With the known time difference between each two measurements, migration rates are determined. They can be estimated for the total BEP as well as for the individual bedform layers by using the constructed baselines from the zerocrossing procedure. This can be a decisive aspect in case bedforms of different dimensions occur that migrate with different rates. As many different solutions emerge from the MCS for constructing the baselines (because different input parameter settings are used), the cross-correlation analysis is also carried out as an MCS. So, many iterations are performed with different baselines for the same BEP. To consider the small-scale bedforms of the upper layer separately, the upper baseline is subtracted from the initial BEP. The resulting geometries represent the isolated small-scale bedforms and are subsequently used in the cross-correlation analysis. To consider the large-scale bedforms of the lower layer, there are two possible approaches which were evaluated before the final implementation. The first approach is based on a subtraction of the lower baseline from the upper baseline. However, preliminary results (not shown here) indicate that correlations are relatively low for this approach. Another option is to directly use the upper baseline in the cross-correlation analysis. Both approaches lead to an isolated representation of the large-scale bedforms. The second approach proved to be more suitable, as higher correlations could be achieved and was therefore implemented.

In addition to the cross-correlation analysis an alternative method has been developed to better determine the migration rates of the small-scale bedforms. The migration of smaller superimposed bedforms decisively contributes to total bedload transport. The resulting quantity may even exceed the transport associated with larger underlying bedforms (Zomer et al., 2021b). This highlights the need for a more detailed analysis of this process. In the presented method, individual migration rates are obtained - instead of an average migration rate along the entire BEP - by tracking the geometric centroids of individual bedform areas. For two consecutive measurements geometric centroids are calculated for all individual bedform areas obtained from the zerocrossing procedure. Each centroid from the first measurement is assigned to the centroid from the second measurement with the smallest distance in downstream direction. The offset between each pair of centroids corresponds to the individual migration distance. By knowing the time difference between both measurements, migration rates are determined. In order to ensure a correct assignment of corresponding centroids some plausibility check criteria have been defined. For each pair of bedforms, the ratio of bedform length ($L(t2)/L(t1)$) and bedform area ($A(t2)/A(t1)$) is calculated. To ensure a reliable assignment, a threshold allowing 25 % of deformation (concerning length and area) was set. All pairs of bedforms whose ratios exceed this threshold are excluded. This means that bedforms, whose shape has already changed too much to allow for a reliable assignment are not included in the further analysis. The obtained results provide insights into the variability of bedform migration rates along a BEP and can be related to specific geometric attributes. To derive a weighted average migration rate

(c_m) from the individual rates for a considered BEP, the products of individual migration rate (c_i) and corresponding bedform length (L_i) are summed up and divided by the total length of the BEP (L_{BEP}).

$$c_m = \frac{\sum c_i \cdot L_i}{L_{BEP}} \quad (2)$$

Like the cross-correlation analysis, the centroid analysis is also carried out as an MCS by using the various bedform geometries determined in step 2.

Figure 4 illustrates the two methods for a pair of BEPs selected for demonstration purpose. Figure 4a shows the results from the cross-correlation analysis and the shifted BEPs. Figure 4b shows the calculated individual offsets from the centroid analysis. In the following, the cross-correlation analysis is referred to as method 1 and the centroid analysis as method 2.

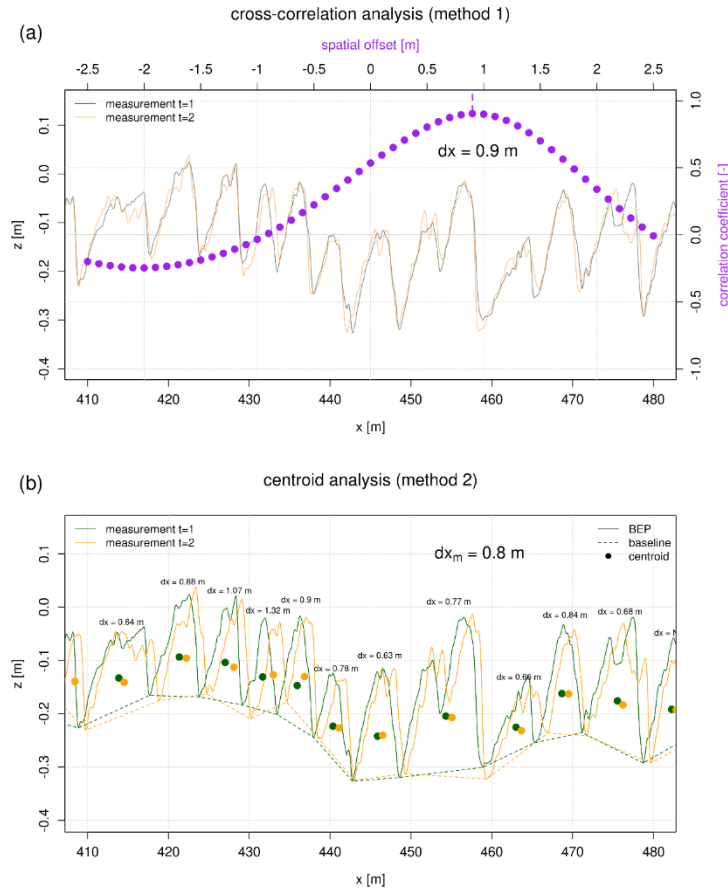


Figure 4: Calculation of bedform migration based on the cross-correlation analysis (a) and by comparing the geometrical centroids individual bedform areas (b). The time difference between both measurements was 0.4 h (corresponding to measurement pair no. 2 in Table A3, Appendix A).

Based on the obtained migration rates - and by considering porosity and density, bedload transport rates (given in $\text{g s}^{-1} \text{m}^{-1}$) can be estimated. The approach by Ten Brinke et al. (1999) includes migration rate c (m s^{-1}), density ρ (g cm^{-3}), porosity n (-), bedform height H (m) and shape factor S (-).

$$q_b = c \cdot H \cdot S \cdot 0.5 \cdot \rho \cdot (1 - n) \quad (3)$$

Since during the procedure the exact area of each single bedform is calculated, shape factor and bedform height can be replaced. For this purpose, the sum A (m^2) of the individual bedform areas is used. This way, no averaging of bedform characteristics along the BEP is necessary. To obtain the correct unit, the result must be divided by the total length of the BEP.

$$q_b = c \cdot \frac{A}{L_{BEP}} \cdot \rho \cdot (1 - n) \quad (4)$$

The calculation of bedload transport is also part of the MCS as the results depend on the obtained bedform geometries and migration rates.

2.6 Monte Carlo simulation

According to Figure 1, steps 2 and 3 of the developed workflow are executed as an MCS in order to address the possible range of results and the correspondent level of uncertainty. Concerning step 1, the results of the wavelet analysis provide an orientation for setting the window sizes in step 2 (zerocrossing procedure). For each BEP, the wavelet analysis is performed three times with significance levels of 0.3, 0.6 and 0.9. The resulting bedform lengths from all analyzed BEPs are stored in a table. This table now contains the total number of detected bedform lengths. In order to exclude outliers, mean value and standard deviation σ are calculated for each layer. The final range of considered bedform lengths for each layer results from $\pm 2\sigma$ around the mean value (denoted as 'WS_range_n' in Figure 1). These steps ensure an automated and a reproducible procedure. The obtained ranges of bedform lengths are then used in the following zerocrossing procedure.

For applying the zerocrossing procedure in step 2, the user-defined inputs are the following parameters: i) the respective *window sizes* for calculating the moving average of the individual bedform layers (denoted as 'WS_n_i' in Figure 1), and ii) the *zc-threshold* (denoted as 'zc-threshold_i' in Figure 1). Within a given range, random values are generated for each parameter according to a uniform distribution. Concerning the *window sizes*, the ranges of bedform lengths resulting from the wavelet analysis are used ('WS_range_n_for MCS'). For *zc-threshold* there is a lack of objective criteria, but globally, it must not be greater than the minimum expected bedform height. The random values for i) and ii) are generated once and are then used for all BEPs and all repeated measurements, in order to ensure comparability. Using all available sets of generated random values results in multiple representations of the bedform geometries for each BEP (denoted as 'bedform_geometries_n_i' in Figure 1). All these representations are then used to calculate bedform migration and bedload transport rates in step 3, in which

two consecutive measurements over time are always considered in pairs. To ensure comparability, only pairs of representations of the bedform geometries with identical parameter settings are considered.


305 By performing this MCS, the possible range of results can be quantified for all steps of the procedure. At the same time, the various statistical parameters can be examined with respect to their robustness. For examining the behavior of each input parameter separately, additional runs can be executed in which only one parameter is varied at a time while all the other parameters are kept constant. The number of iterations is freely selectable. The higher the number the more robust the estimates. On the other hand, a very high number of iterations leads to longer computational times. With respect to the analyses
310 shown here, 100 iterations per BEP were performed.

3 Dataset

The developed workflow was applied to an MBES-dataset from Lower Rhine in Germany. The dataset was obtained during a field measurement carried out by the German Federal Waterways and Shipping Administration in February 2020. All hydrographic processing steps (e.g. plausibility checks, geometric modelling, extraction of longitudinal BEPs from spatial
315 data) were carried out by the Federal Institute of Hydrology.

The study area is located close to Emmerich at Rhine-kilometer 860.0 to 860.5 and covers 500 meters in length and about 200 meters in width (see Figure 5). The section is characterized by a mixed sand and gravel bed with grain sizes in the order of 6 mm (D50). According to BfG (2011) grain density was assumed to be 2.603 g cm^{-3} and for porosity a value of 0.30 was selected. The measurements were taken on consecutive days at medium to high flow conditions with discharges ranging from
320 4000 to $4200 \text{ m}^3 \text{ s}^{-1}$ at gauging station Emmerich (long term mean discharge at $2260 \text{ m}^3 \text{ s}^{-1}$) and depth-averaged flow velocities of about 1.9 m s^{-1} in the main channel. There was a peak in discharge ten days before the first day of the campaign exceeding a discharge of $6000 \text{ m}^3 \text{ s}^{-1}$. The total area covered with bedforms was measured four times with intervals between 3.2 and 24 hours. Additional MBES-data were collected along a single measurement swath in the center of the bedform field at shorter intervals, allowing a more detailed analysis of bedform migration and bedload transport. All measurements were collected
325 using a Kongsberg Maritime multibeam echosounder EM3002 combined with the positioning by a Trimble antenna SPS185 in PDGPS mode, an estimation of heading by a Seapath 330 system and an inertial measurement unit (MRU5+). Beam footprints can be quantified in the range of 0.09–0.27 m for a typical depth of 3.5 m and a beam divergence of $1.5^\circ \times 1.5^\circ$. The point cloud density is about 330 points per m^2 and the measurement uncertainty regarding the elevation of a single point can be specified by 0.15 m (95 % confidence level).

330 Table A2 in Appendix A contains all measurements performed during the campaign. In order to expand the data basis with respect to bedform migration and bedload transport, not only directly consecutive measurements but all possible combinations (for $dt > 0$) are considered. The 10 available detailed measurements thus result in $\binom{10}{2} = 45$ possible combinations (see Table A3 in Appendix A).

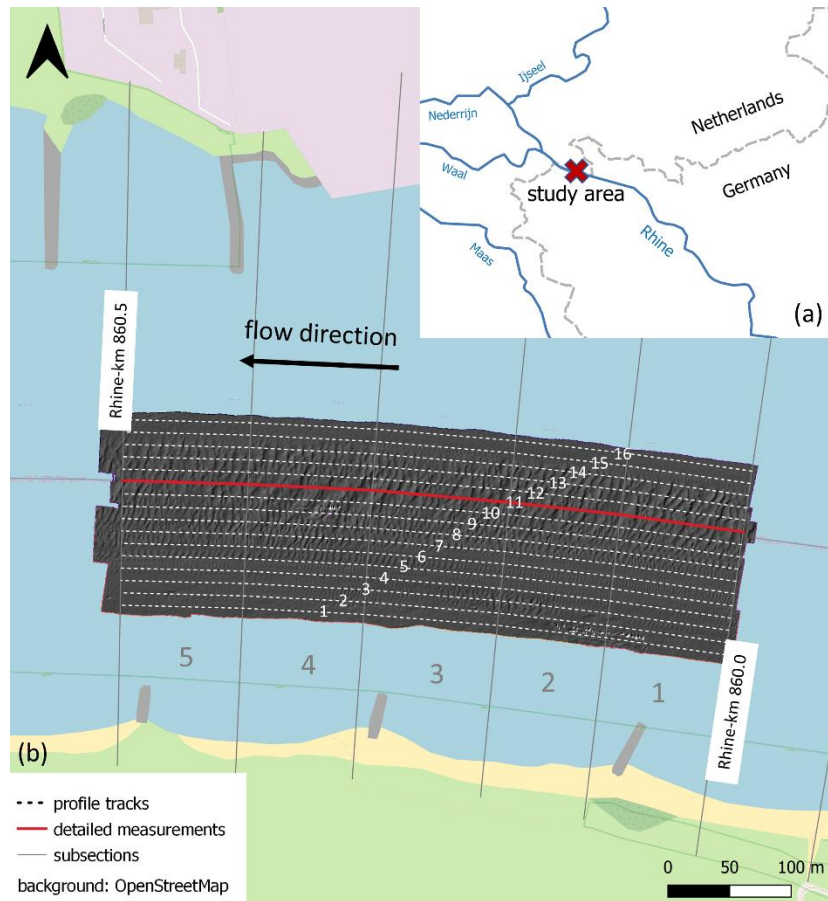

335 **Figure 5: Study area near Emmerich (Rhine-km 860.0 to 860.5). Spatial discretization into 16 profile tracks lateral to flow direction and into 100-meter subsections in longitudinal direction. Base map is from © OpenStreetMap contributors 2023. Distributed under the Open Data Commons Open Database License (ODbL) v1.0.**

Hydrographic processing was performed according to Lorenz et al. (2021a). The measurement data were plausibilized and
 340 modelled to a regular grid with a point spacing of 10 cm by a surface approximation with polynomials using least squares fit. By triangular meshing of the DEM longitudinal BEPs were derived. The measured bedform field was subdivided into 16 BEPS with a lateral distance of 10 m to each other (see Figure 5b). Starting from the left boundary of the navigation channel, the profile lines were shifted parallel as a polyline in specific intervals so that all profile lines were parallel and equidistant (10 m) to each other. Figure 6 shows some selected BEPs. All BEPs derived from MBES-data from 17 February 2020 can be found
 345 in Appendix A (Figure A2). Largest bedforms are located between BEP 8 and BEP 14 covering the entire length of the study area (see Figure 6c). Between BEP 3 and BEP 7 smaller bedforms are located, occurring only occasionally in individual subsections (see Figure 6b). Along BEP 15 and 16 no significant bedforms were measured (see Figure 6d). A macro structure is recognizable, particularly in BEPs 1 to 4 (see Figure 6a). It extends from the head of the groyne on the left bank to the middle of the channel. The length of the structure exceeds that of the longest other bedforms by an order of magnitude. By
 350 analyzing the collected MBES-data no migration of the structure could be identified within 48 hours. We therefore assume

that this is not a migrating bedform, but an accumulation of sediments that were washed out between the groynes during the previous flood event. This is why we decided, not to include it in the analyses shown in section 4.2.

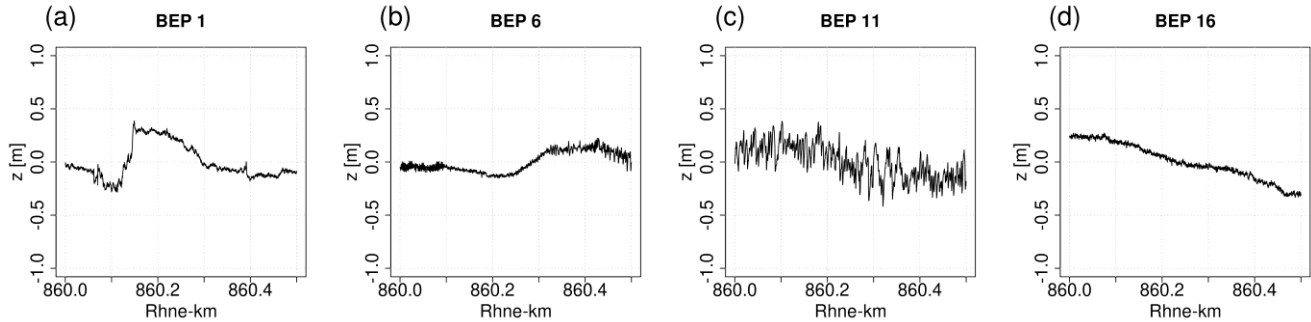



Figure 6: Selected BEPs derived from MBES-data of the first measurement from 17 February 2020.

355 4 Results

4.1 Wavelet analysis

Figure 7 shows the identified predominant wavelengths calculated in the first step (wavelet analysis based on Bedforms-ATM). Wavelengths of the small-scale bedforms slightly increase from left to right reaching a maximum of 13 meters. Near the boundaries of the study area no wavelengths could be identified (BEPs 1 & 2 as well as 15 & 16). In the center of the bedform
 360 field, a second layer of large-scale bedforms with wavelengths in the order of 25 meters was detected. A visual comparison of the results with the BEPs shown in Figure 6 confirms the plausibility of the results. The resulting migration rates from the cross-correlation analysis (see section 4.3) will also verify the assumption of two separate layers. The detected wavelengths are based on all four measurements of the total bedform field and on different settings of the significance level which were 0.3, 0.6 and 0.9. Values have been rounded to whole meters. Therefore, there are overlaps (up to 12 points per BEP and
 365 bedform scale) that cannot be recognized in the figure.

In the further analyses only the center of the bedform field (BEP 8 to 14) was considered. Along the other BEPs, either only very small bedforms occur or bedforms only cover a limited section. The ranges of respected wavelengths are defined by twice the standard deviation around the mean value (see section 2.2). All detected wavelengths were within the specified ranges.

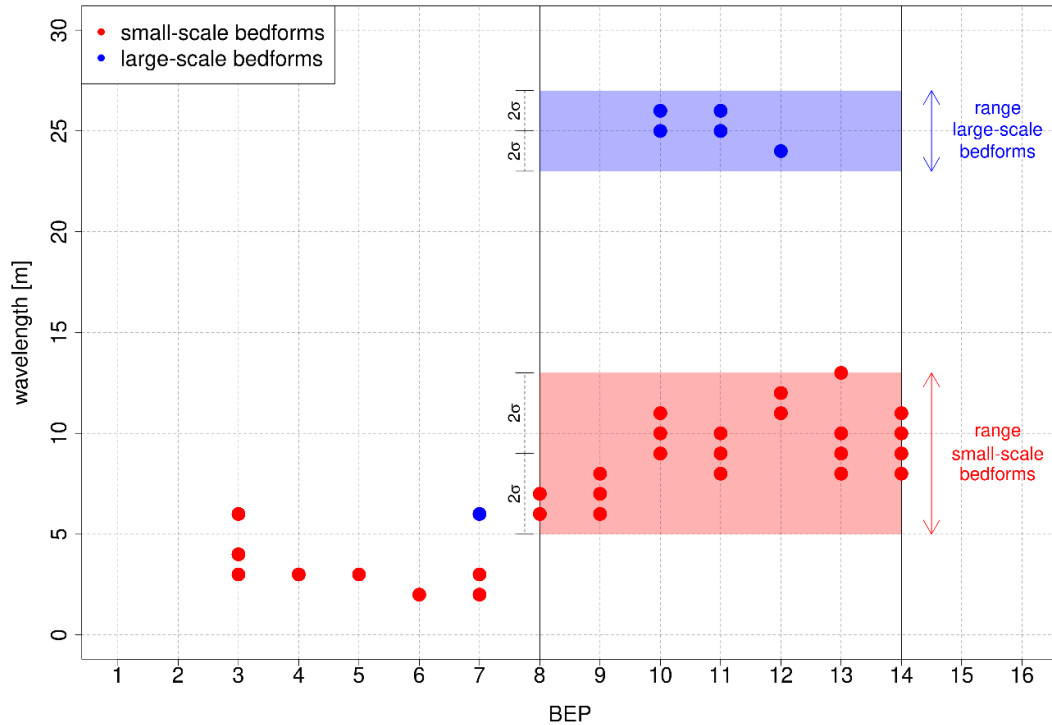

370 **Figure 7: Derivation of the ranges of window sizes for the zerocrossing procedure from the identified predominant wavelengths in individual BEPs by means of wavelet analysis.**

4.2 Bedform geometries

The wavelet analysis determines the range of values for the input parameter *window size* in the zerocrossing procedure (step 2). For each BEP, 100 iterations were performed with varying settings (MCS). *Window sizes* for small-scale bedforms were varied between five and 13 meters while *window sizes* for large-scale bedforms were varied between 23 and 27 meters (according to $\pm 2\sigma$ in Figure 7). The setting of *zc-threshold*, the second input parameter, was varied between 0.5 and 5 cm, which are assumed to be smaller values than the expected minimum bedform height. At the same time, the derivation of even smaller structures would reach the limits of measurement accuracy. Based on the specified ranges for each input parameter, random values are generated according to a uniform distribution. Figure 8 shows the bedform parameters obtained from 100 iterations. The parameters were averaged along each BEP. With respect to bedform geometries temporal changes can be neglected due to the short time differences between the individual measurements. Therefore, only the first measurement (no. 1 in) is considered in this context.

Regarding total bedform height, the T_{90} parameter remains nearly constant over all iterations for all BEPs, whereas the H_{total} parameter has a higher scattering with a maximum range of about 5 cm (Figure 8a/b). The mean for both parameters takes a maximum in BEP 11 (values of 33 and 35 cm). Considering the individual bedform layers (Figure 8c/d), the large-scale bedforms appear to be slightly lower (mean values range from 15 cm to 19 cm for the small-scale bedforms and from 5 cm to

15 cm for the large-scale bedforms) but much longer than the identified small-scale bedforms (mean values range from 5 m to 6 m for the small-scale bedforms and from 17 m to 22 m for the large-scale bedforms). Bedform lengths appear to behave very sensitive with respect to varying input parameter settings. Lengths of the small-scale bedforms have a maximum total range of 4 m while lengths of the large-scale bedforms have a maximum total range of up to 10 m in BEP 14. It should be noted that spatial averaging (over the cross section) can lead to a stabilization and thus to a decreased scattering of the results, which is shown in (Figure 8e). The relative ranges ((max-min)/mean) of the individual parameters are shown here, which were averaged over the BEPs no. 8-14. By far the lowest values are found for the total bedform height (values of 2 % for T_{90} and 10 % for H_{total}). Individual bedform heights show much higher values between 30 % and 35 %. Highest values, however, are found for bedform lengths with a value of almost 50 % for the small-scale bedforms.

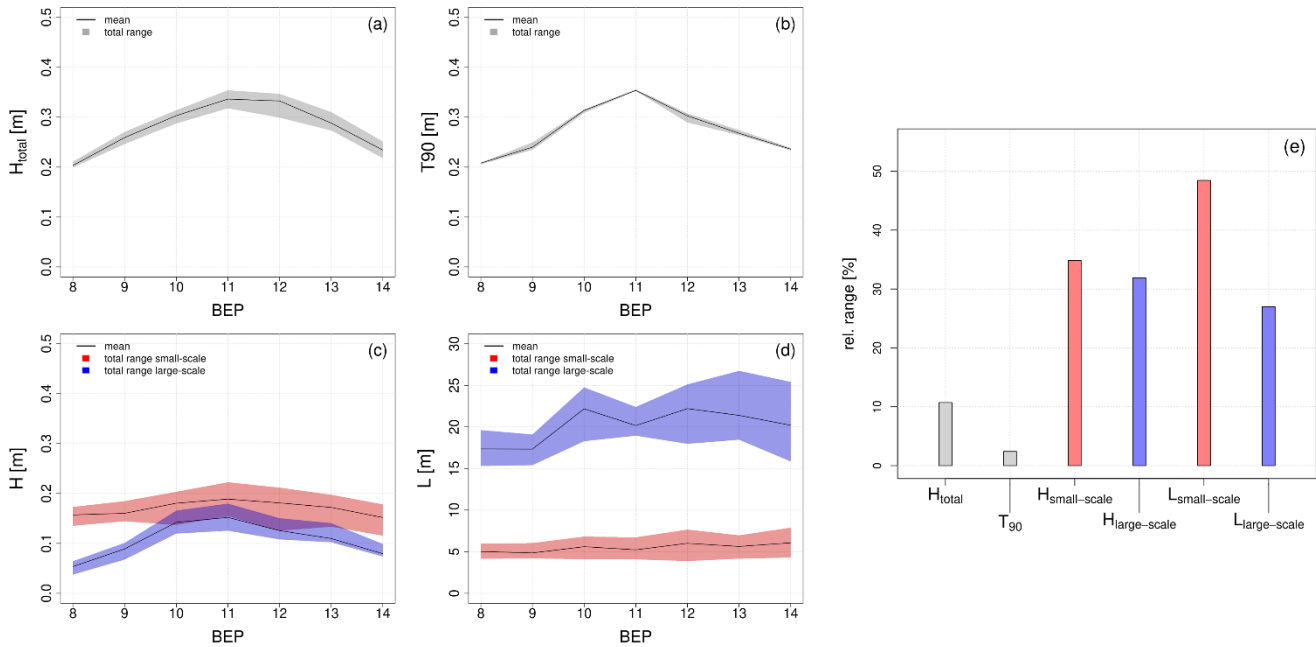



Figure 8: Resulting bedform parameters of the Monte Carlo Simulation. (a-d) - Identified ranges and mean values for individual BEPs. (e) – Averaged relative ranges over BEPs 8-14.

4.3 Bedform migration & bedload transport

400 To enable the calculation of bedform migration rates, repeated MBES-measurements were performed during the campaign, with a minimum time difference of 3.2 hours between two successive measurement for the entire bedform field. These intervals turned out to be too long, in order to track the faster migrating small-scale bedforms. Therefore, only the detailed measurements of the single measurement swath in the center (no. 5-14 in) are considered for the analysis of migration rates. Here, intervals are much shorter and start from 0.2 h. Based on the 10 available measurements, 45 pairwise combinations can be analyzed

405 (see Appendix A, Table A1). Migration rates were calculated using two different methods as introduced in section 2.5.

Figure 9 shows the correlation coefficients derived from the cross-correlation analysis (method 1) as a function of time difference dt between two measurements. Correlation coefficients are shown here for the total BEP (without considering separate layers of bedforms) as well as for the individual layers. For considering the individual layers the constructed baselines from the MCS were used. Accordingly, for each measurement results from 100 iterations are available. For the total BEP, on the other hand, only one result per measurement is available. Correlation coefficients obviously decrease with increasing dt due to the deformation of bedforms. However, correlation coefficients of the large-scale bedforms and of the total BEP remain above a value of 0.7 even after 20 hours. Concerning the small-scale bedforms correlation coefficients decrease much more rapidly and drop below a value of 0.5 after less than two hours, highlighting that longer time differences between measurements are unsuitable for tracking these bedforms.

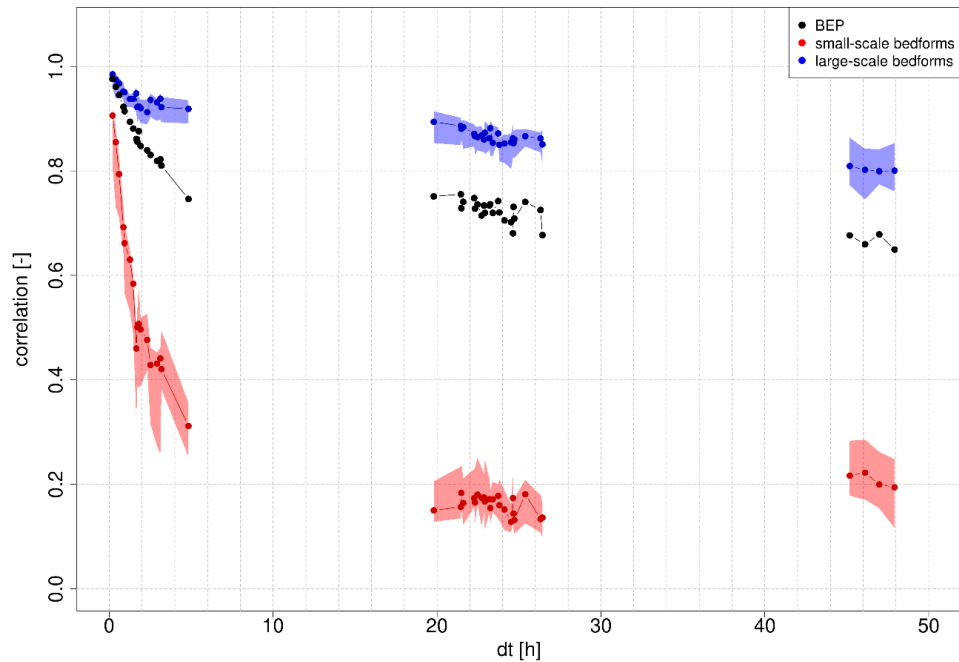

415

Figure 9: Correlations coefficients from the cross-correlation analysis (method 1) as a function of time difference between successive measurements. The red and blue dots represent the median values for small-scale and large-scale bedforms obtained from MCS. Polygons show the total range of results. For the total BEP only one result per measurement is available.

By using method 2 (centroid analysis), migration rates for individual bedforms are determined. Individual migration rates are then filtered by the defined quality criteria considering the geometrical similarity of corresponding bedforms from two measurements. Figure 10 shows the remaining number of traceable bedforms. For the small-scale bedforms, the number of traceable bedforms strongly decreases as dt increases. For this reason, the results for longer measurement intervals should be assessed with particular caution, as they are influenced by only a few observations. In contrast, the number of traceable large-scale bedforms is low for all measurement pairs and does not change significantly as dt increases, which is why we do not recommend to use this method to track underlying large-scale bedforms (see discussion section).

425

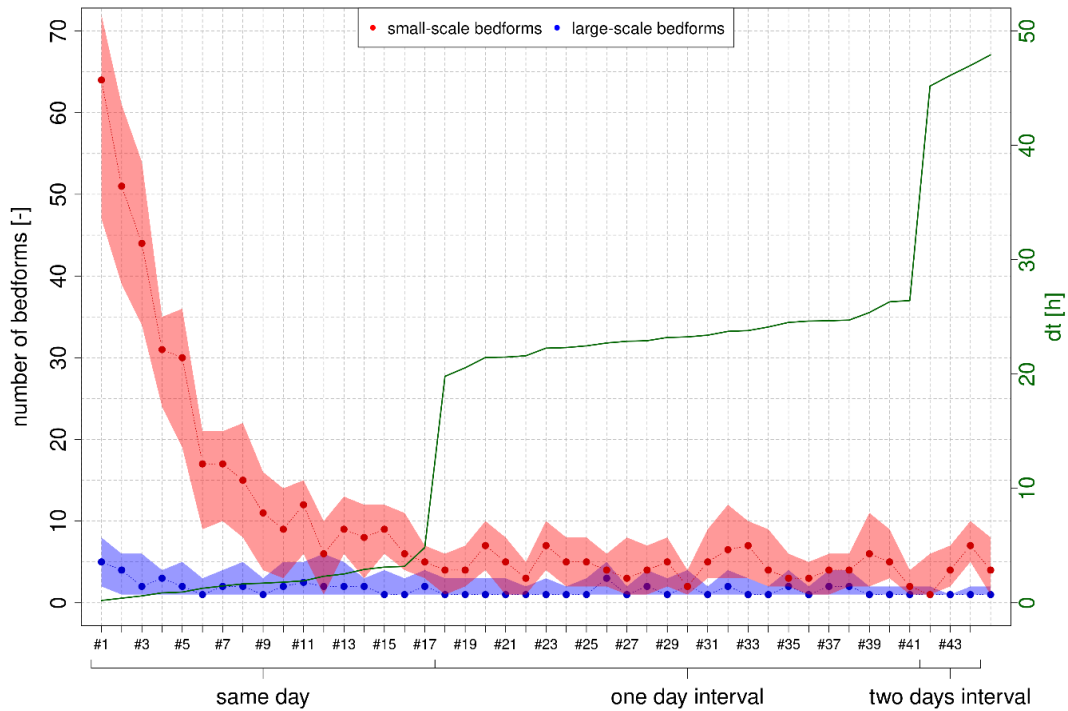


Figure 10: Number of traceable bedforms depending on measurement interval (centroid analysis, method 2). The red and blue dots represent the median values for small-scale and large-scale bedforms obtained from MCS. Polygons show the total range of results.

430 Figure 11 summarizes determined migration rates for all 45 possible combinations of measurements for both methods. For method 1 (cross-correlation analysis), results with correlation coefficients smaller than 0.5 were excluded. For method 2 (centroid analysis), after filtering the results, outliers exceeding a 95th percentile were removed and then weighted average migration rates were calculated along the BEP.

435 For method 1 median migration rates of the small-scale bedforms fluctuate between 1.5 and 2.2 m h⁻¹. For all measurement pairs with a time difference of 2.5 h or more (above pair #12), the correlation coefficients drop below the 0.5 threshold value, thus no reliable results are available. For the large-scale bedforms, median migration rates fluctuate between 0.1 and 0.8 m h⁻¹. For measurement pairs with a time interval of one day or more fluctuations are much lower. Concerning migration rates of the total BEPs (without considering individual layers of bedforms), results for short measurement intervals are close to the migration rates of the small-scale bedforms, while results for longer measurement intervals are close to the migration rates of the large-scale bedforms, depending on which process is dominant. This highlights the need for considering individual bedform layers in order to make precise statements about migration rates. Both, migration rates for the small-scale bedforms as well as for the BEP decrease with increasing measurement intervals. This effect can probably be attributed to the fact that small bedforms tend to migrate faster, but at the same time can only be reliably tracked for very short measurement intervals. For

440

small dt , the migration of small bedforms has a significant effect on the cross-correlation analysis (and thus on the
 445 determination of the best fitting spatial offset). With increasing dt , deformation of bedforms increases so that the smallest
 bedforms are no longer traceable and the average migration rate decreases (see also section 5.1.2). This effect can be found in
 the results of both methods.

Regarding method 2 (Figure 11b), fluctuations are higher compared to method 1. For the small-scale bedforms median
 migration rates vary between 1 m h^{-1} and 2 m h^{-1} for most of the measurement pairs that contain measurements of the same
 450 day. For longer measurement intervals (one day or two days interval) values vary between 0 m h^{-1} and 0.5 m h^{-1} . As shown in
 in Figure 10 the number of traceable bedforms drastically decreases with increasing dt , which is why only the results for very
 short measurement intervals are sufficiently reliable. Here, the results are quite comparable to those of method 1. Again,
 migration rates decrease with increasing dt . The number of traceable large-scale bedforms is constantly low (≤ 5). For short
 measurement intervals fluctuations are very high. For longer measurement intervals, however, median migration rates are
 455 again comparable to those obtained from method 1 and vary from 0.1 to 0.6 m h^{-1} .


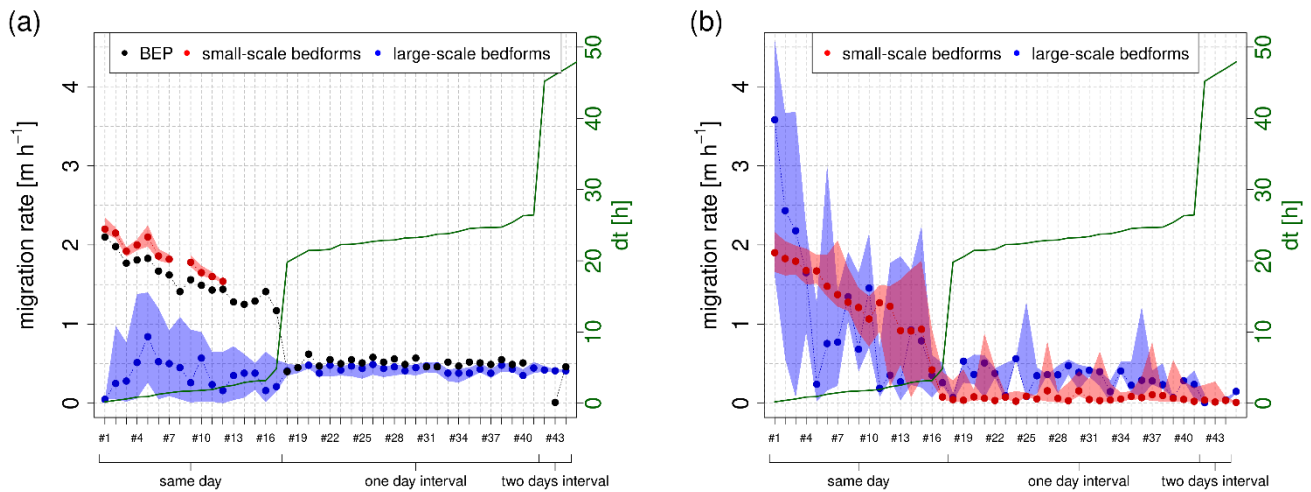


Figure 11: Calculated migration rates for all respected measurement pairs by means of cross-correlation analysis (method 1, a) and centroid analysis (method 2, b).

460 Based on the migration rates calculated by the two methods, bedload transport rates were estimated using Eq (4). As just
 shown, the time difference between two measurements has a strong impact on resulting migration rates. The small-scale
 bedforms can only be tracked accurately by using short measurement intervals while longer intervals are more suitable for the
 large-scale bedforms. For this reason, only measurement intervals shorter than two hours were considered for the estimation
 of bedload transport due to the small-scale bedforms, whereas only measurement intervals longer than 19 hours
 465 (measurements carried out on different days) were considered for the large-scale bedforms. For estimating the total transport,
 the quantities derived from both bedform layers were summed up. Figure 12 shows estimated bedload transport rates and their
 ranges resulting from the different input parameter settings within the MCS for both methods. Again, the results obtained from

the centroid analysis are more affected leading to total bedload transport rates fluctuating within a range of about $60 \text{ g s}^{-1} \text{ m}^{-1}$ (corresponding to more than 50 % in relation to the median). In comparison those obtained from the cross-correlation analysis only fluctuate within a range of about $40 \text{ g s}^{-1} \text{ m}^{-1}$ (corresponding to about 30 % in relation to the median). Median values, however, are in the same order of magnitude for both methods. Further on, both methods indicate that bedload transport associated with the small-scale bedforms accounts for nearly 90 % of the total transport, while bedload transport associated with the large-scale bedforms accounts for only slightly more than 10 %.

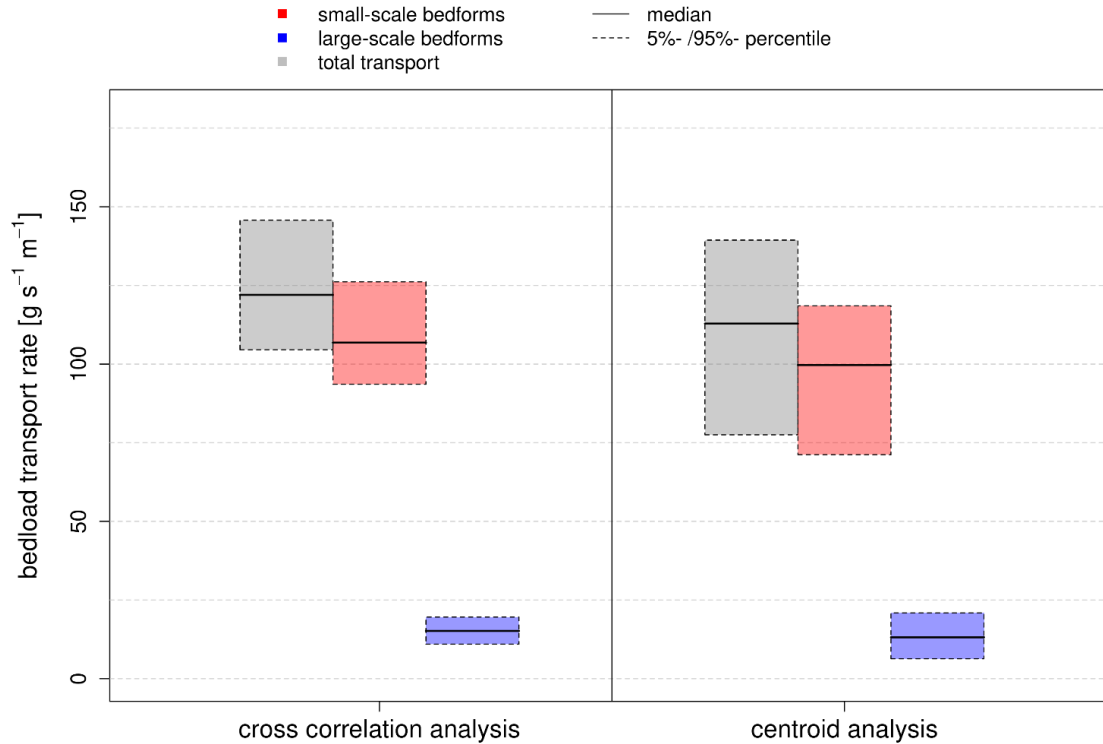

475 **Figure 12: Comparison of bedload transport rates derived from cross-correlation and centroid analysis along the evaluated BEP.**

5 Discussion

5.1 Interpretation of the results


5.1.1 Bedform geometries

480 The results for bedform geometries (refer to section 4.2) show lowest uncertainties for the bedform parameters, that measure the total height. Here, we determined values of 2 % for T_{90} and 10 % for H_{total} . The heights of the individual layers, on the

other hand, show significantly higher uncertainties of 30 to 35 %. The greatest uncertainties arise in the determination of bedform lengths, which reach values of up to 50 %. We recognized that uncertainties in the determination of bedform geometries are lower if the geometries of the individual layers are considered together as composite entities. In this case, the calculated attributes only depend on the baseline of the large-scale bedforms, which separates the bedforms from the underlying non-active layer of the river bed. They are independent of the baseline of small-scale bedforms which separates both layers from each other. At the same time, we show in section 5.2 that the *window size* for the small-scale bedforms is the most sensitive input parameter. This explains why determined uncertainties are lower for total heights compared to heights of the individual layers.

Furthermore, bedform lengths were subject to higher uncertainties than bedform heights, especially for the small-scale bedforms. The specific morphological situation for the test dataset from Lower Rhine could have had an influence on this result. It is noticeable that the analyzed bedforms of both layers are rather similar in height and differ mainly in their length (see Figure 8c/d). For most BEPs both layers have average heights of approx. 10 cm to 20 cm, while the average lengths are approx. 5 m to 6 m and 17 m to 22 m respectively. There are other cases where both length and height differ by an order of magnitude, as e.g. in datasets from the Rio Paraná as published in Parsons et al. (2005) or from the river Waal as published in Zomer et al. (2023). The analysis should therefore be continued by using datasets with different morphological conditions in order to validate this finding.

The measurements from Lower Rhine were carried out a few days after a peak in discharge. Findings from other studies indicate that significant changes in bedform characteristics may occur during the falling flood limb, which are very much in line with our observations for the dataset from Lower Rhine. According to Martin and Jerolmack (2013) the larger primary bedforms become inactive during the fall of the flood and are cannibalized by the formation of smaller bedforms, in equilibrium with the decreased discharge. In the study of Wilbers and Ten Brinke (2003), smaller secondary bedforms were observed emerging during the falling flood limb while shrinking heights and increasing lengths were observed for primary bedforms. In Zomer et al. (2023), however, secondary bedforms were observed over the full range of flow conditions. To demonstrate that we found similar conditions for the dataset from Lower Rhine, the height to length ratio of detected bedforms is plotted in comparison to the maximum and mean bedform height according to Flemming (1988) in Figure 13. While the small-scale bedforms fit in quite well with Flemming's ratio, the large-scale bedforms are less steep and are shifted accordingly to the right. Corresponding to the observations of the aforementioned studies, the emergence and migration of small-scale bedforms could have resulted in shrinking heights (and retarded migration) of the large-scale bedforms after the peak in discharge (this would also explain the high contribution of the small-scale bedforms to the total bedload transport). However, no further measurement data are available to confirm this conclusively, as investigating the temporal development of bedforms during a flood wave was no initial objective of this study.

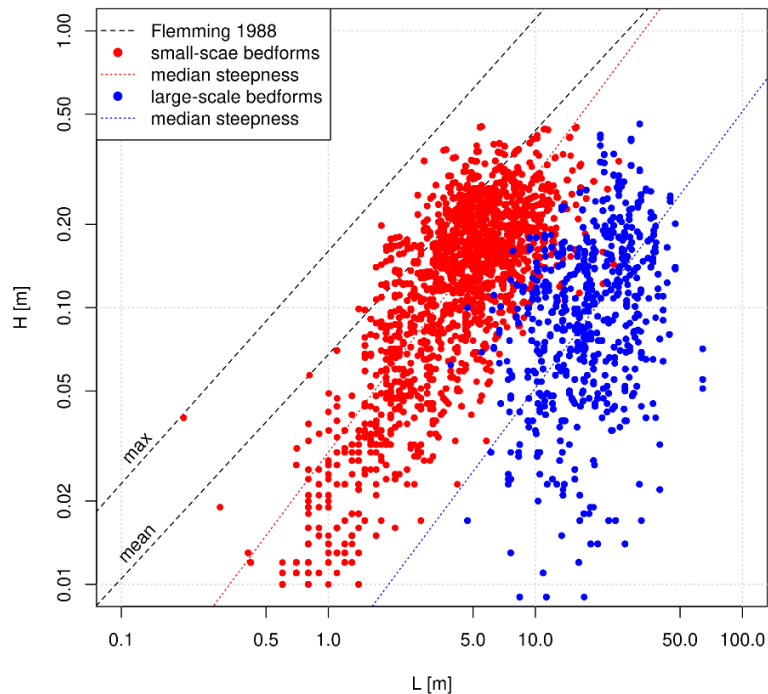

515 **Figure 13: Ratio of identified bedform heights and lengths obtained from MBES-data from Lower Rhine (February 2020) compared to mean and maximum bedform height according to Flemming (1988).**

The performed MCS revealed high uncertainties in the determination of bedform geometries, which resulted from different input parameter settings. However, there are other sources of uncertainty in the determination of bedform geometry like the choice of method or tool in general. For example, in the recently published meta-analysis by Scheiber et al. (2024) five bedform identification algorithms were compared. They were divided into two groups based on methodological similarities. Within
520 each group deviations in median heights and lengths did not exceed a value of 25 % after efforts were made to standardize inputs (e.g. harmonizing definitions of bedform attributes). Between the two groups much higher deviations were found. Another source of uncertainty is described by Scheiber & Lefebvre (2023). They show that the definition of bedform height (there are various possible and common ways to geometrically determine the height of an individual bedform) can have an even higher influence on the resulting values. Here, relative differences of over 100 % were identified. Further on, the influence
525 of data preprocessing like the generation of DEMs and BEPs could also be considered. By collating all this information about the multiple sources of uncertainty, the picture can be gradually completed.

5.1.2 Bedform migration & bedload transport

In section 4.3 we showed the results for bedform migration that were derived from the MCS by using the multiple solutions obtained from the zerocrossing procedure. We investigated how the influence of the different input parameter settings for the
530 zerocrossing procedure propagates to the determination of bedform dynamics. In addition, the influence of the measurement

interval was evaluated. These results reveal that the determined migration rates as well as their uncertainties depend on the time difference between two measurements. This time difference determines the highest possible traceable migration rate and thus, at the same time, the minimum bedform dimensions that can be considered (since it is assumed that migration rates increase with decreasing bedform dimensions). Even within an individual layer, there is heterogeneity in terms of bedform dimensions. The smaller the time difference, the smaller the bedforms that can be tracked accurately. An increase in time difference leads to an increasing loss of information and eventually to a potential underestimation of bedform migration and bedload transport rates, since the faster migrating smaller bedforms are no longer identified. In the centroid analysis these are successively removed from the analysis as they no longer meet the defined quality criteria. In the cross-correlation analysis the influence of larger bedforms within an individual layer increases with increasing time difference. This explains the decreasing trend in Figure 11 regarding migration rate of the small-scale bedforms, which was found by using both methods. Exceeding a measurement interval of two hours, migration of small-scale bedforms can no longer be tracked, which eventually leads to an underestimation of bedform migration and bedload transport (it was shown that the migration of small-scale bedforms accounted for about 90 % of the total bedload transport!). On the other hand, in order to track the underlying large-scale bedforms, longer measurement intervals appeared to be more suitable as they are subject to significantly lower scattering. For short intervals (measurements carried out on the same day) deviations of more than 100 % were reached in cross-correlation analysis (Figure 11a). This underlines that in order to track both small- and large-scale bedforms accurately, different intervals and therefore multiple measurements are required. It could be helpful to perform preliminary measurements to get a first impression about prevailing bedform dimensions and migration rates and to select suitable intervals based on this.

In this study, a second method was used for determining bedform dynamics. The newly introduced centroid analysis appeared to be subject to greater uncertainties, especially regarding migration of large-scale bedforms. As shown in Figure 10 the number of traceable bedforms is constantly low for the large-scale bedforms. We therefore recommend not to use this new method to track underlying large-scale bedforms, since for short measurement intervals the spatial offset is too small to enable a precise assignment (approaching the limit in terms of measurement accuracy) whereas for large intervals deformation already has too much influence on the calculation of the geometric centroids. However, another reason for the smaller number of traceable large-scale bedforms can be found in the distribution of larger bedforms along the BEPs. While small-scale bedforms can be found along the entire BEP, large-scale bedforms are only present in certain subsections and are not covering the total length of the BEP. The added value of the new method is a deeper look at the behavior of individual bedforms – in relation to their geometric attributes – as well as information on the longitudinal variability of bedload transport. From this, new insights can be gained especially concerning the behavior of rapidly migrating smaller bedforms, which can end up contributing the largest part to the total bedload transport.

As mentioned above there are multiple sources of uncertainty in the determination of bedform geometries. When deriving bedload transport rates from these, others are added like the uncertainty in the estimation of porosity and grain density. Since both parameters are linearly related to bedload transport, a variation of e.g. 10 % will also result in a change of 10 % concerning

bedload transport rates. The choice of an empirical formula for the calculation could even be a further source of uncertainty. Again, these sources of uncertainty must be added, in order to complete this consideration.

A more detailed look at the performance of different bedload transport measurement techniques and – among other aspects - at possible factors influencing the dunetracking method were the subject of the so-called LILAR-campaign (Onjira et al., 2023). The campaign was carried out in November 2021 as cooperation of German and Dutch authorities. One of the objectives was to compile, compare and evaluate different methods for measuring sediment transport. In addition, we are planning to perform further campaigns to investigate the influence of different discharge conditions on bedform characteristics in more detail. For this kind of comparative studies, it is again essential to estimate the uncertainties in bedform analyses, in order to robustly evaluate occurring changes.

5.2 Sensitivity of the input parameters

In section 5.1 we discussed the influence of input parameter settings on the calculated bedform characteristics and bedload transport rates. In this section, we discuss which of the input parameters has the greatest influence. A sensitivity analysis was performed, in which only one input parameter was varied at a time while the others were kept constant. Table 2 shows the three chosen input parameter settings. For the parameters that were kept constant, a mean value was set based on the results from the wavelet analysis (see Figure 7).

Table 2: Input parameter for sensitivity analyses.

setting	window size small-scale bedforms [m]	window size large-scale bedforms [m]	zc-threshold [cm]
1	1 – 20	25	0.5
2	8	20 – 30	0.5
3	8	25	0.5 – 5

5.2.1 Bedform geometries

Figure 14 shows the potential influence of the input parameters *window size* for small- (a-c) and large-scale bedforms (d-f) as well as *zc-threshold* (g-i) on the resulting bedform geometries (T_{90} , H_{total} , $L_{1,2/total}$). The resulting bedform geometries were averaged over the considered BEPs no. 8-14. Increasing the *window size* for the small-scale bedforms (setting 1) results in increasing bedform heights and lengths. The parameter is especially sensitive during the first iterations. When exceeding a value of about five meters, increasing convergence can be observed for both bedform heights and lengths. Within the selected range of *window sizes* based on the wavelet analysis (grey area), only a very low variability can be observed. So, the sensitivity is particularly high outside this selected range. Overall, with respect to bedform height the T_{90} -parameter behaves less sensitive

590 than the H_{total} -parameter. The reason for this is that the T_{90} -parameter is independent of the number of identified bedforms. It is not based on measuring individual bedform heights but on measuring the accumulated bedforms layer thickness (T) in every x -position along the entire BEP. So, always the same number of input values is used for the calculation.

The *window size* for the large-scale bedforms (setting 2) has almost no influence on the T_{90} -parameter (Figure 14d). With respect to the H_{total} -parameter, a very slight increase (2 cm) can be observed with increasing *window size* (Figure 14e). Bedform length (in this case only the large-scale bedforms are affected), again, exhibits more sensitivity. Here, no convergence can be observed (Figure 14f). Nevertheless, variability is much smaller compared to setting 1. It can be assumed that convergence will eventually occur with increasing values, as the calculated moving average value successively approaches a horizontal line. The influence of the *zc-threshold* (setting 3) is also much smaller than that of the *window size* for the small-scale bedforms. Bedform heights exhibit less sensitivity than bedform lengths, for which no convergence occurs (Figure 14i). By increasing the *zc-threshold*, local minima are filtered out successively (see section 2.3). Thereby, several individual bedforms are summarized, resulting in a smaller number of longer bedforms. While the maximum height is limited by the lowest and the highest point in a BEP, a successive increase in length - by combining several individual bedforms - is technically possible. This is why it is important to consider the expected bedform dimensions in advance, in order not to obtain implausible results.

605

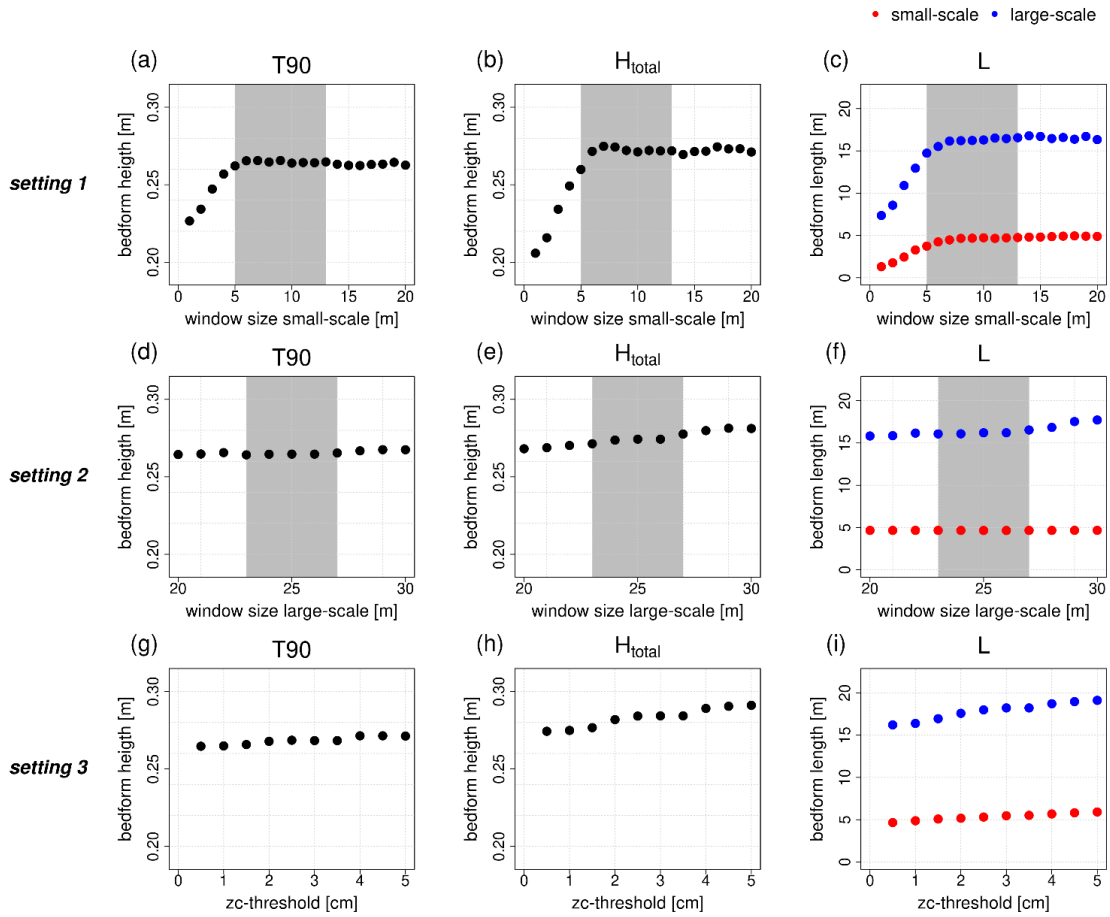


Figure 14: Influence of variation in the input parameters on derived bedform geometries (grey area corresponds to the selected value range based on the wavelet analysis). Setting 1: window size small-scale 1 m - 20 m, window size large-scale 25 m, zc-threshold 0.5 cm. Setting 2: window size small-scale 8 m, window size large-scale 20 m – 30 m, zc-threshold 0.5 cm. Setting 3: window size small-scale 8 m, window size large-scale 25 m, zc-threshold 0.5 cm – 5 cm.

610

Changing *window size* for the small-scale has the strongest impact on resulting bedform geometries. Concerning bedform height, the T_{90} -parameter appears to be more robust towards varying input parameter settings compared to the H_{total} -parameter. Overall, bedform lengths appear to be more sensitive and include a higher degree of uncertainty. While the H_{total} -parameter shows a maximum variability of about 30 %, the total length (corresponding to the length of the large-scale bedforms) shows a maximum variability about 60 %. (both for setting 1). The delineation of two adjacent bedforms is not always obvious and several different solutions might be conceivable. Even a manual delineation is a highly subjective process and could lead to different solutions for different investigators. For many cases a convergence pattern can be observed, that starts at the lower margin of *window sizes* based on the results from the wavelet analysis (grey shaded area in Figure 14). *Window sizes* smaller than the lower margin, lead to diverging results, which confirms the need for performing the wavelet analysis as an orientation.

615

620 These findings should be taken into account when analyzing bedform geometries, such as studies on the relationship between
bedform height and length (e.g. Flemming 1988; Lefebvre et al. 2022). Individual bedform attributes are often displayed in
scatterplots. According to the findings of this study, an uncertainty range would have to be specified for each data point in a
scatterplot, based on different input parameter settings in the evaluation procedure. So, we would recommend to investigate
the sensitivity of input parameters for other methods as well. The shown results provide an indication of the possible order of
625 magnitude.


5.2.2 Bedform migration & bedload transport

Figure 15 shows the results of the sensitivity analysis for the calculation of bedform migration and bedload transport rates
based on the cross-correlation analysis (method 1). For this purpose, the resulting parameters were averaged over different
measurement intervals. Based on the findings presented in section 4.3, only measurement intervals shorter than two hours were
630 considered for the small-scale bedforms whereas only measurement intervals longer 19 hours (measurements carried out on
different days) were considered for the large-scale bedforms.

Increasing *window sizes* for the small-scale bedforms lead to decreasing bedform migration rates that converge to a value of
about 2 m s^{-1} for *window sizes* $> 5\text{m}$ (Figure 15a). For smaller *window sizes* smaller bedforms are derived from the BEPs,
which are migrating with higher rates. At the same time, bedload transport rates for the small-scale bedforms increase with
635 increasing *window size* as bedform area increases, which overweighs the influence of decreasing migration rates. They
converge to a value of about $110 \text{ g s}^{-1} \text{ m}^{-1}$ (Figure 15b). Bedform area for the large-scale bedforms, however, decreases with
increasing bedform area for the small-scale bedforms due to a different delineation of the total geometry. As a result, bedload
transport rates for the large-scale bedforms decrease as well. Correlation coefficients increase with increasing *window size* for
the small-scale bedforms (Figure 15c). This is because small bedforms resulting from small *window sizes* can only be traced
640 accurately for very short measurement intervals. So, averaged correlation coefficients are lower for smaller window sizes. The
large-scale bedforms are only slightly affected. Overall, highest variability can be found outside the chosen range of *window*
sizes for the small-scale bedforms based on the wavelet analysis.

Varying *window sizes* for the large-scale bedforms do not have any influence on the cross-correlation analysis. This is because
the baselines of the large-scale bedforms are not included in the analysis (see section 2.5). Only the changing (increasing)
645 bedform areas result in a slight increase in bedload transport rates for the large-scale bedforms (Figure 15e).

Concerning the behavior of the *zc-threshold*, similar effects can be observed as for the *window size* for the small-scale bedforms
at setting 1, however, they turn out to be significantly less sensitive (Figure 15g-i). Correlation coefficients stay rather constant
over all iterations (Figure 15i).

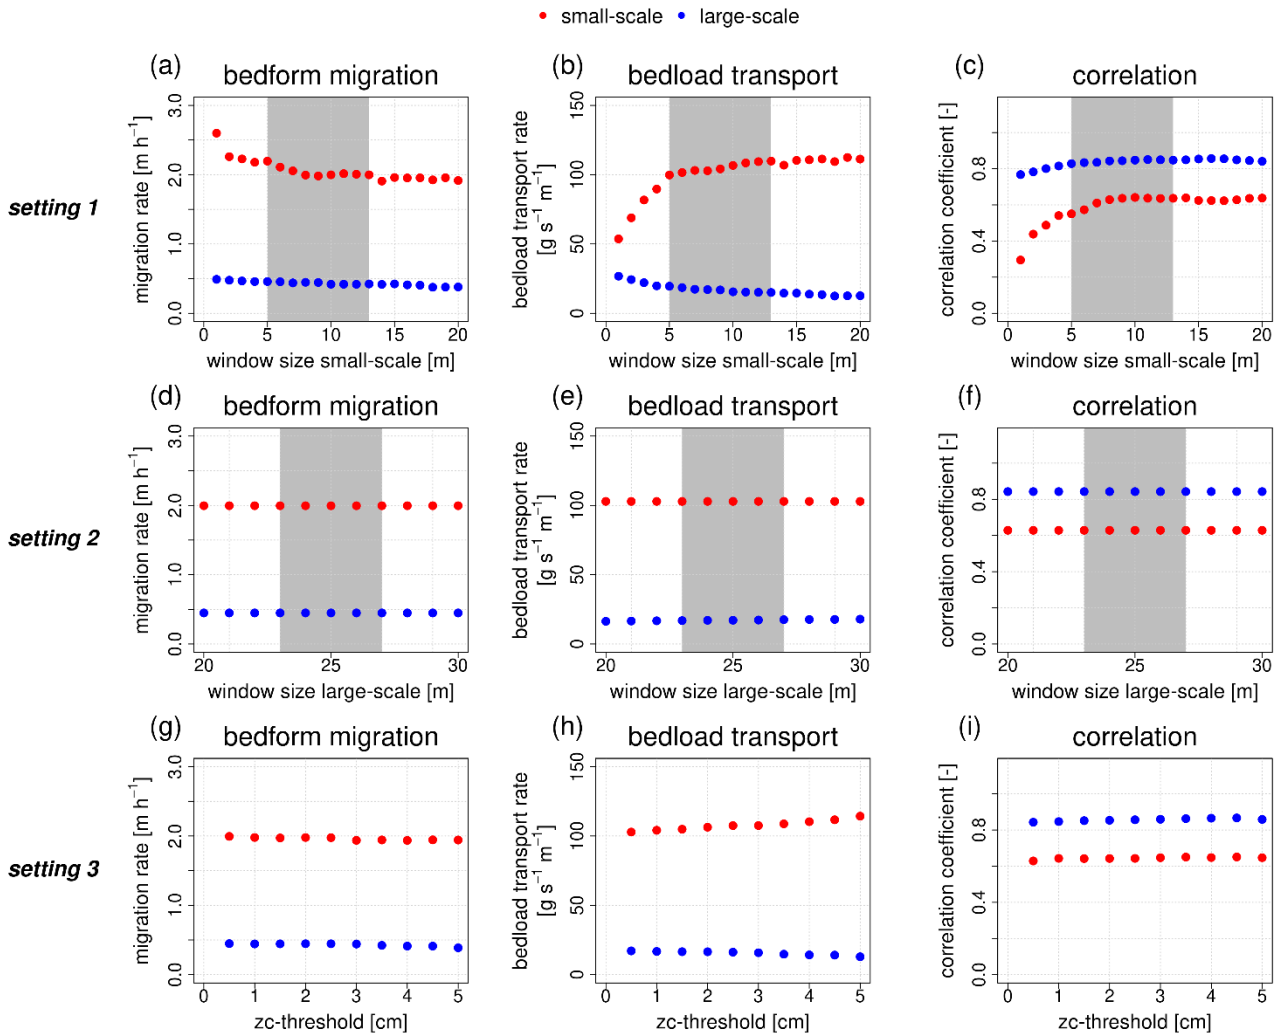

650 **Figure 15: Influence of variation in the input parameters on the cross-correlation analysis (grey area corresponds to the selected value range based on the wavelet analysis). Setting 1: window size small-scale 1 m - 20 m, window size large-scale 25 m, zc-threshold 0.5 cm. Setting 2: window size small-scale 8 m, window size large-scale 20 m – 30 m, zc-threshold 0.5 cm. Setting 3: window size small-scale 8 m, window size large-scale 25 m, zc-threshold 0.5 cm – 5 cm.**

655 Figure 16 shows the influence of input parameter settings on the centroid analysis (method 2). As explained in the previous sections the method is rather suitable for small-scale bedforms and short measurement intervals. This is why the small-scale bedforms and only those measurement pairs with intervals shorter than two hours are considered here (see section 4.3).

At setting 1, migration rates initially increase with increasing *window size* (Figure 16a). A maximum is reached at a value of 3 m. A further increase in *window size* leads to decreasing migration rates with a tendency to convergence to a value of 1.5 m s⁻¹. Bedload transport rates first increase and then tend towards a value of 100 g s⁻¹ m⁻¹ (Figure 16b). Very small bedforms can
 660 only be traced accurately at very short measurement intervals, so that a rapid increase in the number of detected bedforms can be observed with increasing *window size* (Figure 16c). After reaching a maximum at a value of 10 m the number of traceable

bedforms decreases again. An increasing *window size* leads to increasing bedform areas and thus to a decreasing number of bedforms. Again, for all parameters highest variations are found outside the chosen range of *window sizes*.

Varying the setting of the *zc-threshold* again has much less impact on the results. No systematic effect on the centroid analysis can be observed (Figure 16d-e).

665

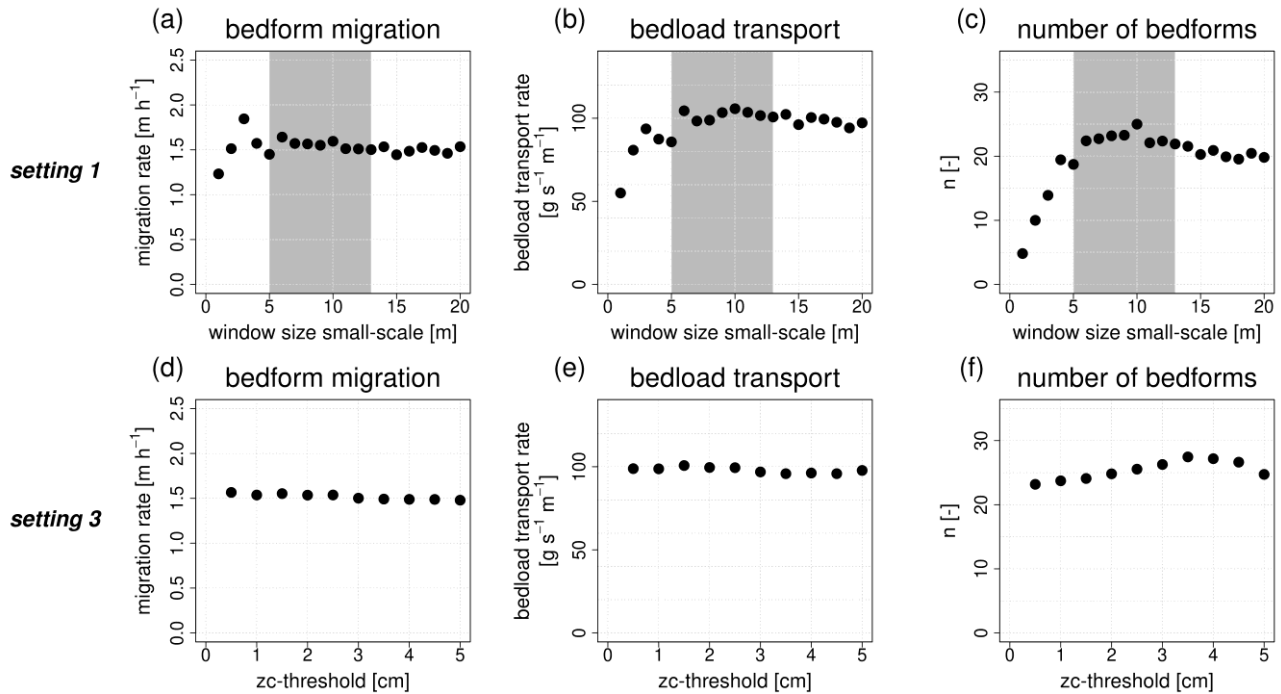


Figure 16: Influence of variation in the input parameters on the centroid analysis (grey area corresponds to the selected value range based on the wavelet analysis). Setting 1: window size small-scale 1 m - 20 m, window size large-scale 25 m, *zc-threshold* 0.5 cm. Setting 3: window size small-scale 8 m, window size large-scale 25 m, *zc-threshold* 0.5 cm – 5 cm.

670 As for bedform geometries, it can also be observed for bedform migration and bedload transport that setting 1 has the greatest influence on the resulting parameters. This is true for both methods. Again, outside the chosen range of *window sizes* based on the results from the wavelet analysis, increasing divergence can be seen. The results illustrate that the effect of varying input parameter settings in the zerocrossing procedure propagates to the determination of bedform dynamics.

Conclusions

675 Bedform analysis tools are sensitive to the influence of input parameters. Often, no theoretically sound criteria are available for the setting of input parameters with specific values. So, this decision depends on the subjective assessment of the investigator. Therefore, we developed a highly automated workflow, which allows the quantification of uncertainties in the calculation of bedform parameters due to different input parameter settings by an MCS-routine. We implemented different methods to analyze both, bedform geometry and dynamics (migration and bedload transport). In terms of bedform geometry,

680 we combined a wavelet analysis based on Bedforms-ATM (Gutierrez et al., 2018) with the well-established and widely used
zerocrossing-procedure. In terms of bedform dynamics we implemented a cross-correlation analysis as well as the newly
introduced centroid analysis. By applying this workflow to a test dataset from Lower Rhine in Germany, the following main
results and key conclusions can be derived.

- 685
- Bedform parameters react with different sensitivity to varying input parameter settings. Lowest uncertainties were
found when individual layers of bedforms were considered together as composite entities without discriminating
between them. Especially the introduced T_{90} -parameter, as a measure of total bedform height, proved to be very robust
with uncertainties of only 2 %. Uncertainties for the heights of individual bedform layers, on the other hand, appeared
to be much higher between 30 % and 35 %. Highest uncertainties were identified for bedform lengths reaching values
690 of up to 50 % for the small-scale bedforms. Uncertainties regarding bedform geometries are propagated to the
determination of bedform migration and bedload transport rates.
 - Dunetracking-induced uncertainties for bedload transport rates were found in the order of 30 % (by using the cross-
correlation analysis) to 50 % (by using the centroid analysis). By applying both methods it could be shown that the
migration of the small-scale bedforms accounted for about 90 % of the total bedload transport.
 - 695 • Regarding bedform dynamics there also is an uncertainty due to varying time differences between two consecutive
measurements. Rapidly migrating secondary bedforms were only traceable for measurements with time differences
of less than two hours. For those measurements a decrease in migration rate was observed for increasing time
difference. On the other hand, for tracking the underlying large-scale bedforms using longer measurement intervals
resulted in lower uncertainties. We therefore recommend choosing measurement intervals with care and depending
700 on the process under investigation. Performing preliminary measurements to get a first impression about prevailing
conditions may support this decision.
 - With regard to the question of which input parameter has the greatest influence on the resulting bedform parameters,
the *window size* for the small-scale bedforms exhibited the highest sensitivity. Especially for very small values, an
increase *in window size* has a significant impact on bedform geometries as well as on bedform migration and bedload
705 transport rates.
 - The most stable results were found inside the range of values provided by the wavelet analysis (based on Bedforms-
ATM) in the first step of the workflow. This underlines the importance of performing the wavelet analysis to narrow
the range of values entering the MCS. It was shown that values below the specified range strongly influence the
results and lead to divergence.
 - 710 • Overall, it was shown that varying input parameter settings can have a large influence on the determination of bedform
parameters. But at the same time, we have introduced a workflow that can provide proof of robust estimates of these
parameters. We therefore recommend carrying out similar investigations for other bedform analysis methods and
datasets, in order to assess the robustness of derived results. However, in this study we focused on the uncertainties

resulting from varying input parameter settings. There are multiple sources of uncertainties in bedform analyses like the choice of a method or tool in general or the geometric definitions of bedform attributes. All these uncertainties must be considered together in field studies characterizing prevailing bedform conditions derived from measurement data.

Appendices

Appendix A

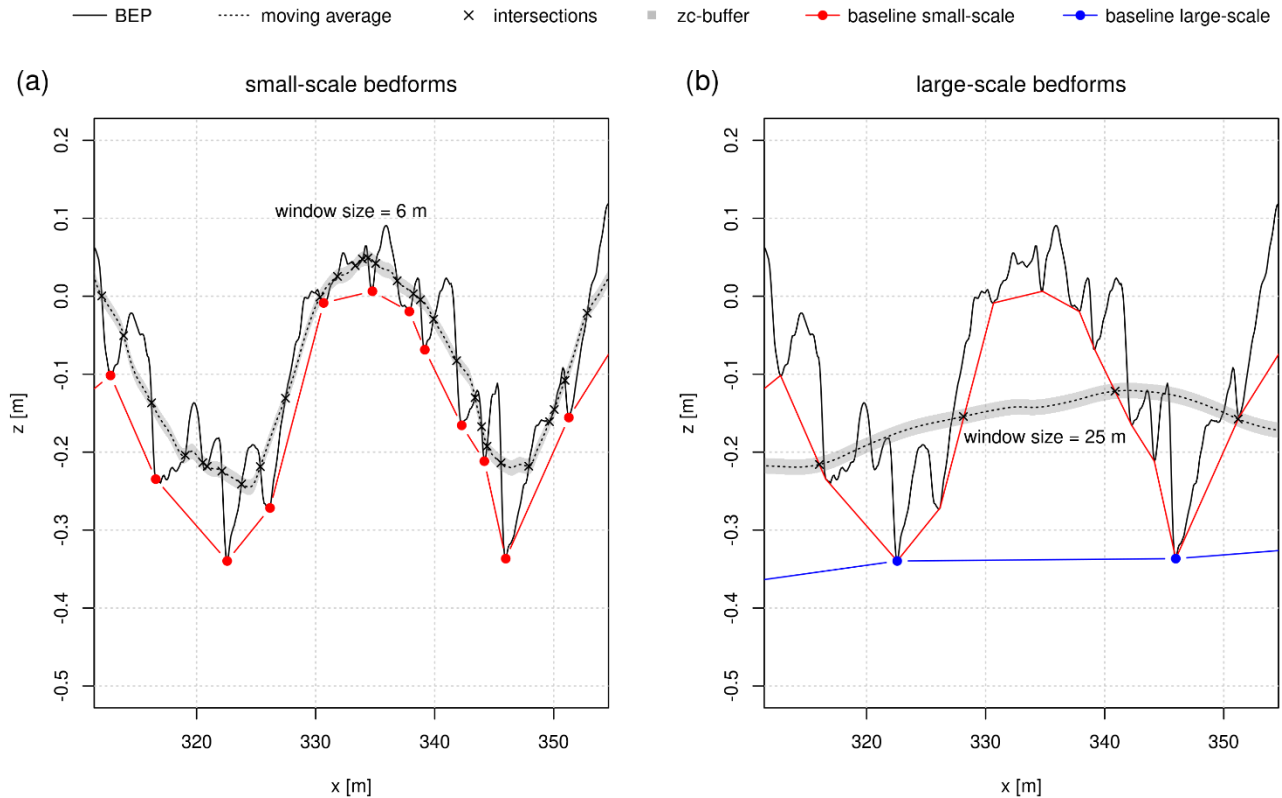


Figure A1: Zerocrossing procedure. (a) - Calculation of the baseline of the small-scale bedforms. (b) - Calculation of the baseline of the large-scale bedforms.

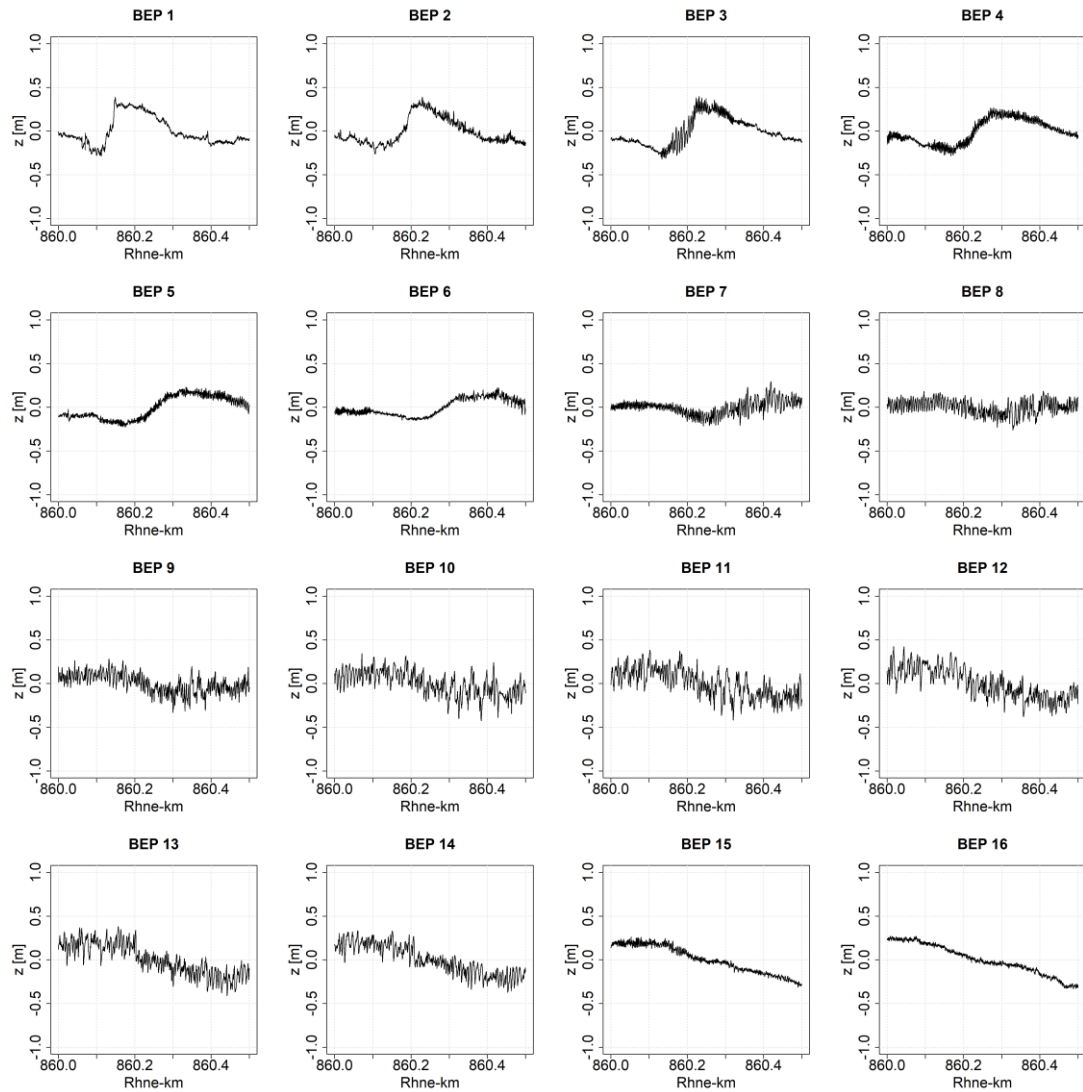


Figure A2: All BEPs derived from MBES-data of the first measurement from 17 February 2020.

725

Table A1: Definition of bedform parameters.

parameter	Definition	description
T_{90}	90th percentile of all $T(x)$ along a subsection with distance dx	Measure for average total bedform height in a subsection.
H_{total}	Median of all $H_{total}(i)$ in a subsection	Measure for average total bedform height in a subsection.

$H_{\text{small-scale}}$	Median of all $H_{\text{small-scale}}(i)$ in a subsection	Measure for average small-scale bedform height in a subsection.
$H_{\text{large-scale}}$	Median of all $H_{\text{large-scale}}(i)$ in a subsection	Measure for average large-scale bedform height in a subsection.
$L_{\text{small-scale}}$	Median of all $L_{\text{small-scale}}(i)$ in a subsection	Measure for average small-scale bedform length in a subsection.
$L_{\text{large-scale}}/L_{\text{total}}$	Median of all $L_{\text{large-scale}}(i)/L_{\text{total}}(i)$ in a subsection	Measure for average large-scale/total bedform length in a subsection.

Table A2: Performed MBES-measurements during the field campaign.

No.	date	time (MET)	measured area	Δt [h] ²
1	17 February 2020	09:35–10:41	total bedform field	-
2	18 February 2020	09:35–10:21	total bedform field	24.0
3	18 February 2020	12:48–13:31	total bedform field	3.2
4	19 February 2020	09:52–10:36	total bedform field	21.1
5	17 February 2020	11:17–11:24	center	-
6	17 February 2020	12.13–12:20	center	0.9
7	18 February 2020	08:46–08:54	center	20.6
8	18 February 2020	10:29–10:37	center	1.7
9	18 February 2020	10:41–10:48	center	0.2
10	18 February 2020	11:05–11:13	center	0.4
11	18 February 2020	11:57–12:04	center	0.9
12	18 February 2020	13:36–13:43	center	1.6
13	19 February 2020	09:24–09:32	center	19.8
14	19 February 2020	11:12–11:20	center	1.8

730 **Table A3: 45 evaluated measurement pairs obtained from detail measurements.**

no.	date 1	time 1 (MET)	date 2	time 2 (MET)	Δt [h]
1	18 February 2020	10:29	18 February 2020	10:41	0.2
2	18 February 2020	10:41	18 February 2020	11:05	0.4

² time difference to previous measurement

3	18 February 2020	10:29	18 February 2020	11:05	0.6
4	18 February 2020	11:05	18 February 2020	11:57	0.9
5	17 February 2020	11:17	17 February 2020	12:13	0.9
6	18 February 2020	10:41	18 February 2020	11:57	1.3
7	18 February 2020	10:29	18 February 2020	11:57	1.5
8	18 February 2020	11:57	18 February 2020	13:36	1.6
9	18 February 2020	8:46	18 February 2020	10:29	1.7
10	19 February 2020	9:24	19 February 2020	11:12	1.8
11	18 February 2020	8:46	18 February 2020	10:41	1.9
12	18 February 2020	8:46	18 February 2020	11:05	2.3
13	18 February 2020	11:05	18 February 2020	13:36	2.5
14	18 February 2020	10:41	18 February 2020	13:36	2.9
15	18 February 2020	10:29	18 February 2020	13:36	3.1
16	18 February 2020	8:46	18 February 2020	11:57	3.2
17	18 February 2020	8:46	18 February 2020	13:36	4.8
18	18 February 2020	13:36	19 February 2020	9:24	19.8
19	17 February 2020	12:13	18 February 2020	8:46	20.6
20	18 February 2020	11:57	19 February 2020	9:24	21.4
21	17 February 2020	11:17	18 February 2020	8:46	21.5
22	18 February 2020	13:36	19 February 2020	11:12	21.6
23	17 February 2020	12:13	18 February 2020	10:29	22.3
24	18 February 2020	11:05	19 February 2020	9:24	22.3
25	17 February 2020	12:13	18 February 2020	10:41	22.5
26	18 February 2020	10:41	19 February 2020	9:24	22.7
27	17 February 2020	12:13	18 February 2020	11:05	22.9
28	18 February 2020	10:29	19 February 2020	9:24	22.9
29	17 February 2020	11:17	18 February 2020	10:29	23.2
30	18 February 2020	11:57	19 February 2020	11:12	23.2
31	17 February 2020	11:17	18 February 2020	10:41	23.4
32	17 February 2020	12:13	18 February 2020	11:57	23.7
33	17 February 2020	11:17	18 February 2020	11:05	23.8

34	18 February 2020	11:05	19 February 2020	11:12	24.1
35	18 February 2020	10:41	19 February 2020	11:12	24.5
36	18 February 2020	8:46	19 February 2020	9:24	24.6
37	17 February 2020	11:17	18 February 2020	11:57	24.7
38	18 February 2020	10:29	19 February 2020	11:12	24.7
39	17 February 2020	12:13	18 February 2020	13:36	25.4
40	17 February 2020	11:17	18 February 2020	13:36	26.3
41	18 February 2020	8:46	19 February 2020	11:12	26.4
42	17 February 2020	12:13	19 February 2020	9:24	45.2
43	17 February 2020	11:17	19 February 2020	9:24	46.1
44	17 February 2020	12:13	19 February 2020	11:12	47
45	17 February 2020	11:17	19 February 2020	11:12	47.9

Code & data availability

The introduced tool (code and test dataset) is accessible via: <https://github.com/JRbfg/DTMCS>

Author contribution

735 JR developed the code, performed all analyses and prepared the paper with the cooperation of AW. AW provided support regarding the technical discussion of the results as well as regarding the composition of the paper.

Competing interests

The contact author has declared that none of the authors has any competing interests.

Acknowledgements

740 The measurements to collect test dataset used in this paper were performed by the Federal Waterways and Shipping Administration (Wasserstraßen- und Schifffahrtsverwaltung des Bundes, WSV). The hydrographic processing and the provision of the individual BEPs were carried out by Felix Lorenz and Thomas Artz from the Federal Institute of Hydrology (Department for Geodesy and Remote Sensing). We are grateful for the provision of the data.

Funding

- 745 Large parts of this work were part of the MAhyD project (morphodynamic analyses using hydroacoustic data, Morphodynamische Analysen mittels hydroakustischer Daten – Sohlstrukturen und Geschiebetransport). The MAhyD project was funded by the Federal Ministry for Digital and Transport (BMDV).

References

- Adekitan, A.I.: Monte Carlo Simulation, <https://doi.org/10.13140/RG.2.2.15207.16806>, 2014.
- 750 BfG: Sedimentologisch-Morphologische Untersuchung des Niederrheins. BfG 1768, 32, 2011.
- Onjira, P., Hillebrand, G., Struck, M., Huber, N., Schielen, R.M.J., Brils, J., Bode, C., and Siering, F.: Living Lab Rhine (LILAR): Comparison of Sediment Measurement Methods Between the Netherlands and Germany, <https://doi.org/10.5675/BfG-2141>, 2023.
- Carling, P., Götz, E., Orr, H., and Radecki-Pawlik, A.: The morphodynamics of fluvial sand dunes in the River Rhine, near
755 Mainz, Germany, I, Sedimentology and morphology, *Sedimentology*, 47, 227 – 252, <https://doi.org/10.1046/j.1365-3091.2000.00290.x>, 2000.
- Cisneros, J., Best, J., van Dijk, T., Almeida, R. P. D., Amsler, M., and Boldt, J.: Dunes in the world's big rivers are characterized by low-angle lee-side slopes and a complex shape, *Nature Geoscience*, 13(2), 156–162, <https://doi.org/10.1038/s41561-019-0511-7>, 2020.
- 760 Claude, N., Rodrigues, S., Bustillo, V., Bréhéret, J., Macaire, J., and Jugé, P.: Estimating bedload transport in a large sand–gravel bed river from direct sampling, dune tracking and empirical formulas, *Geomorphology*, 179, 40–57, <https://doi.org/10.1016/j.geomorph.2012.07.030>, 2012.
- Flemming, B. W.: On the classification of subaquatic flow-transverse bedforms, *Bochumer Geologische und Geotechnische Arbeiten*, 29, 44–47, retrieved from https://www.researchgate.net/profile/Burghard-Flemming/publication/271909932_On_the_classification_of_subaquatic_flow-transverse_bedforms/links/54d679a80cf2970e4e6dc399/On-the-classification-of-subaquatic-flow-transverse-bedforms.pdf,
765 1988.
- Frings, R.M., Gehres, N., de Jong, K., Beckhausen, C., Schüttrumpf, H., and Vollmer, S.: Rheno BT, User Manual, Institute of Hydraulic Engineering and Water Resources Management, RWTH Aachen University, 2012.
- 770 Gilja, G., Kuspilić, N., and Brekan, B.: Computer algorithm for analysis of bedform geometry, Conference: 13th International Symposium on Water Management and Hydraulic Engineering, retrieved from https://www.researchgate.net/publication/309615540_Computer_algorithm_for_analysis_of_bedform_geometry, 2013.
- Gutierrez, R. R., Abad, J. D., Parsons, D. R., and Best, J. L.: Discrimination of bed form scales using robust spline filters and wavelet transforms: Methods and application to synthetic signals and bed forms of the Río Paraná, Argentina, *Journal of Geophysical Research: Earth Surface*, 118(3), 1400– 1418, <https://doi.org/10.1002/jgrf.20102>, 2013.
- 775

- Gutierrez, R.R., Mallma, J.A., Núñez-González, F., Link, O. and Abad, J.D.: Bedforms-ATM, an open source software to analyze the scale-based hierarchies and dimensionality of natural bed forms. *SoftwareX*, 7, pp.184-189, <https://doi.org/10.1016/j.softx.2018.06.001>, 2018.
- 780 Henning, M.: Mehrdimensionale statistische Analyse räumlich und zeitlich hoch aufgelöster Oberflächen von Dünenfeldern, <https://doi.org/10.24355/dbbs.084-201306140925-0>, 2013.
- Kleinhans, M.: The key role of fluvial dunes in transport and deposition of sand–gravel mixtures, a preliminary note, *Sedimentary Geology*, 143, 7-13, [https://doi.org/10.1016/S0037-0738\(01\)00109-9](https://doi.org/10.1016/S0037-0738(01)00109-9), 2001.
- Kleinhans, M., Wilbers, A.W.E., Swaaf, A., and Berg, J.: Sediment Supply-Limited Bedforms in Sand-Gravel Bed Rivers, *Journal of Sedimentary Research*, 72. <https://doi.org/10.1306/030702720629>, 2002.
- 785 Leary, K., and Buscombe, D.: Estimating sand bed load in rivers by tracking dunes: a comparison of methods based on bed elevation time series, *Earth Surface Dynamics*, 8, 161-172, <https://doi.org/10.5194/esurf-8-161-2020>, 2020.
- Lebrec, U., Riera, R., Paumard, V., O'Leary, M. J., and Lang, S. C.: Automatic mapping and characterisation of linear depositional bedforms: Theory and application using bathymetry from the North West Shelf of Australia, *Remote Sensing*, 14(2), 280, <https://doi.org/10.3390/rs14020280>, 2022.
- 790 Lee, J., Musa, M., and Guala, M.: Scale-dependent bedform migration and deformation in the physical and spectral domains, *Journal of Geophysical Research: Earth Surface*, 126(5), e2020JF005811, <https://doi.org/10.1029/2020JF005811>, 2021.
- Lefebvre, A. and Winter, C.: Predicting bed form roughness: the influence of lee side angle, *Geo-Marine Letters*, 36, <https://doi.org/10.1007/s00367-016-0436-8>, 2016.
- Lefebvre, A., Herrling, G., Becker, M., Zorndt, A., Krämer, K., and Winter, C.: Morphology of estuarine bedforms, *Weser*
795 *Estuary, Germany, Earth Surface Processes and Landforms*, 47(1), 242–256, <https://doi.org/10.1002/esp.5243>, 2022.
- Lorenz, F., Artz, T., Brüggemann, T., Reich, J., Weiß, R., and Winterscheid, A.: Simulation-based Evaluation of Hydrographic Data Analysis for Dune Tracking on the River Rhine, *PFG – Journal of Photogrammetry Remote Sensing and Geoinformation Science*, 89, 1-10, <https://doi.org/10.1007/s41064-021-00145-0>, 2021a.
- Lorenz, F., Artz, T., Brüggemann, T., Reich, J., Weiß, R. and Winterscheid, A.: Simulation-based Measurement Strategies for
800 *Dune Tracking with Multi Beam Echosounders*, FIG e-Working Week 2021, retrieved from https://fig.net/resources/proceedings/fig_proceedings/fig2021/papers/ts05.1/TS05.1_lorenz_artz_et_al_11006.pdf , 2021b.
- McElroy, B., and Mohrig, D.: Nature of deformation of sandy bed forms, *J. Geophys. Res.-Earth*, 114, F00A04, <https://doi.org/10.1029/2008JF001220>, 2009.
- Martin, R. L. and Jerolmack, D. J.: Origin of hysteresis in bed form response to unsteady flows, *Water Resour. Res.*, 49, 1314–
805 1333, <https://doi.org/10.1002/wrcr.20093>, 2013.
- Nyander, A., Addison, P.S., McEwan, I., and Pender, G.: Analysis of river bed surface roughnesses using 2D wavelet transform-based methods, *The Arabian Journal for Science and Engineering*, 28(1C):107-121, 2003.

- Ogor, J.: Design of algorithms for the automatic characterization of marine dune morphology and dynamics, Ocean, Atmosphere, ENSTA Bretagne - École nationale supérieure de techniques avancées Bretagne, retrieved from
810 https://theses.hal.science/tel-02354454v1/file/2018_julien_ogor.pdf, 2018.
- OpenStreetMap contributors. Planet dump retrieved from <https://planet.openstreetmap.org> (accessed on 23 August 2023).
- Parsons, D. R., Best, J. L., Orfeo, O., Hardy, R. J., Kostaschuk, R., and Lane, S. N.: Morphology and flow fields of three-dimensional dunes, Rio Paraná, Argentina: Results from simultaneous multibeam echo sounding and acoustic Doppler current profiling, *Journal of Geophysical Research*, 110(F4), F04S03, <https://doi.org/10.1029/2004JF000231>, 2005.
- 815 Raja, J., Muralikrishnan, B., and Fu, S.: Recent advances in separation of roughness, waviness and form, *Precision Engineering*, 26:222-235, [https://doi.org/10.1016/S0141-6359\(02\)00103-4](https://doi.org/10.1016/S0141-6359(02)00103-4), 2002.
- Scheiber, L., and Lefebvre, A.: The influence of different geometric definitions on dune characteristics, In A. Valance, T. Garlan, A. Crave, and A. Gangloff (Eds.), *MARID VII: Seventh international conference on marine and river dune dynamics* (pp. 293–298), University of Rennes, 1 and Shom. 344 p, ISBN: 978-2-11-139512-1, 2023.
- 820 Scheiber, L., Lojek, O., Götschenberg, A., Visscher, J., and Schlurmann, T.: Robust methods for the decomposition and interpretation of compound dunes applied to a complex hydromorphological setting, *Earth Surface Processes and Landforms*, 46(2), 478–489, <https://doi.org/10.1002/esp.5040>, 2021.
- Scheiber, L., Zomer, J., Wang, L., Cisneros, J., Gutierrez, R. R., and Lefebvre, A.: Automated bedform identification—A meta-analysis of current methods and the heterogeneity of their outputs, *Journal of Geophysical Research: Earth Surface*, 129, e2023JF007607, <https://doi.org/10.1029/2023JF007607>, 2024.
- 825 Simons, D. B., Richardson, E. V., and Nordin, C. F.: *Bedload equation for ripples and dunes*, US Government Printing Office, Washington D.C., USA, retrieved from <https://pubs.usgs.gov/pp/0462h/report.pdf>, 1965.
- Ten Brinke, W.B.M., Wilbers, A.W.E., and Wesseling, C.: Dune growth, decay and migration rates during large-magnitude flood at sand and mixed sand-gravel bed in the Dutch Rhine river system, *Special Publication of the International Association of Sedimentologists* 28, 15-32, <https://doi.org/10.1002/9781444304213.ch2>, 1999.
- 830 Van der Mark, R., and Blom, A.: A new and widely applicable tool for determining the geometric properties of bedforms, <https://doi.org/10.13140/RG.2.2.17637.40161>, 2007.
- Van Dijk, T. A. G. P., Lindenbergh, R. C., and Egberts, P. J. P.: Separating bathymetric data representing multiscale rhythmic bed forms: A geostatistical and spectral method compared, *Journal of Geophysical Research*, 113(F4), F04017, <https://doi.org/10.1029/2007JF000950>, 2008.
- 835 Van Rijn, L.C. (1993). *Principles of sediment transport in rivers, estuaries and coastal seas*, ISBN: 9789080035690, 1993.
- Van Rijn, L.C.: Unified View of Sediment Transport by Currents and Waves. I: Initiation of Motion, Bed Roughness, and Bed-Load Transport, *Journal of Hydraulic Engineering*, 133. [https://doi.org/10.1061/\(ASCE\)0733-9429\(2007\)133:6\(649\)](https://doi.org/10.1061/(ASCE)0733-9429(2007)133:6(649)).
- Venditti, J. (2013). 9.10 Bedforms in Sand-Bedded Rivers. <https://doi.org/10.1016/B978-0-12-374739-6.00235-9>, 2007.

- 840 Wang, L., Yu, Q., Zhang, Y., Flemming, B. W., Wang, Y., and Gao, S.: An automated procedure to calculate the morphological parameters of superimposed rhythmic bedforms, *Earth Surface Processes and Landforms*, 45(14), 3496–3509, <https://doi.org/10.1002/esp.4983>, 2020.
- Wesseling, C., Wilbers, A. W. E. (2000). Manual DT2D version 2.3: Software for dune-tracking in two dimensions. (In Dutch). Tech. rep., Faculteit der Ruimtelijke Wetenschappen, Universiteit Utrecht, Utrecht.
- 845 Wilbers, A. W. E. and Ten Brinke, W. B. M.: The response of subaqueous dunes to floods in sand and gravel bed reaches of the Dutch Rhine, *Sedimentology*, 50, 1013–1034, <https://doi.org/10.1046/j.1365-3091.2003.00585.x>, 2003.
- Zomer, J.Y., Naqshband, S., and Hoitink, A.J.F.: Short communication: A new tool to define multiscale bedform characteristics from bed elevation data, <https://doi.org/10.5194/esurf-2021-98>, 2021a.
- Zomer, J.Y., Naqshband, S., Vermeulen, B., and Hoitink, A.J.F.: Rapidly migrating secondary bedforms can persist on the lee of slowly migrating primary river dunes, *Journal of Geophysical Research: Earth Surface*, 126, e2020JF005918, <https://doi.org/10.1029/2020JF005918>, 2021b.
- 850 Zomer, J. Y., Vermeulen, B., and Hoitink, A. J. F.: Coexistence of two dune scales in a lowland river, *Earth Surf. Dynam.*, 11, 1283–1298, <https://doi.org/10.5194/esurf-11-1283-2023>, 2023.

855