

# Simulating the Tone River Eastward Diversion Project in Japan Carried Out Four Centuries Ago

Joško Trošelj<sup>1,2\*</sup> and Naota Hanasaki<sup>1</sup>

5 <sup>1</sup> Center for Climate Change Adaptation, National Institute for Environmental Studies (NIES), Japan

<sup>2</sup> Laboratory for Informatics and Environmental Modelling, Division for Marine and Environmental  
Research, ~~Institute~~ Ruđer Bošković (~~IRB~~[Institute \(RBI\)](#)), Croatia

\* *Correspondence to:* Joško Trošelj ([josko.troselj@nies.go.jp](mailto:josko.troselj@nies.go.jp), [josko@irb.hr](mailto:josko@irb.hr))

\*\* *Secondary contact:* Naota Hanasaki ([hanasaki@nies.go.jp](mailto:hanasaki@nies.go.jp))

10

## Abstract

The Tone River is the largest river in Japan, flowing from the Kanto Plain westward to the Pacific Ocean. The river originally flowed southward, entering Tokyo Bay, but the Tone River Eastward Diversion Project in the 17<sup>th</sup> century and many later projects changed the flow route to that of today. The gradual process of eastward diversion has been extensively studied from the historical viewpoint, revealing that the initial project in the 17<sup>th</sup> century was principally intended to establish a stable navigation route. However, no scholars have yet proven this hypothesis via hydrological modeling.

We used the H08 global hydrological model to reconstruct historical flow direction maps at 60-arcsecond spatial resolution with a 1-day temporal resolution. We hypothesized that the historical claims could be numerically verified using a relatively simple simulation. First, we confirmed that our modeling framework reasonably reproduced the present river flows by adding two present-day bifurcation functions. Next, using the reconstructed historical maps, we quantified low flows (20<sup>th</sup> percentile) in the 17<sup>th</sup> century and confirmed that the Tone River diversion aided navigation because it connected areas that increased low flows. Finally, the validity of our historical simulation was proven by contrasting the distribution of simulated low flow rates with the flows at the historical river ports that lay furthest upstream. We show that it is possible to bridge two different disciplines, history and numerical hydrological modeling, to obtain a better understanding of human–water interactions. One limitation is that we only reconstructed historical land maps in the present study; the meteorological forcing inputs employed were identical to those of the 20<sup>th</sup> century; the historical inputs are not known.

**Keywords:** Paleo-hydrological bridge; H08 global hydrological model; Tone River Eastward Diversion; 17<sup>th</sup> century; maps reconstruction; low flows; navigable paths;

## 1 Introduction

### 35 1.1 Background

The courses of rivers, particularly those flowing in densely populated areas, are sometimes heavily altered by humans. Such changes are easily recorded if they are recent but not if they happened more than a few centuries ago. One such example is the Tone River, Japan's largest river. The Tone River basin is the Kanto Plain, where the capital, Tokyo, is located. The Tone River rises in a mountainous region northwest of the Kanto Plain that now ends at the southeastern corner of the plain, where it flows into the Pacific Ocean. Originally, however, the river flowed through only the western half of the Kanto Plain and ended at Tokyo Bay. The eastern half was drained by another river, the Hitachi River, running in the lower reach of the present-day Tone River. Principally during the 17<sup>th</sup> century (in the Edo Period, see **Supplementary Text 1**), several remarkable projects connected the two basins of the Tone and the Hitachi. In this study, we term the series of projects the Tone River Eastward Diversion Project (TREDP). The considerable changes in the river courses have attracted the attention of not only hydrologists but also archaeologists and geologists.

### 1.2 Earlier studies

50 The history of the Tone River has been investigated by numerous researchers over a century. Takashi Kawada wrote the first report on the history of the development of the Tone River (Kawada, 1893). Later, Ryosuke Kurihara wrote a book on the same topic, which became the established view (Kurihara, 1943). In short, both authors claimed that the primary purpose of the 17<sup>th</sup> century TREDP was to protect the capital Edo (the Tokyo of today, see **Supplementary Text 2**) from floods. At that time, bypassing of flood water through flood channels was already common in Japan, and was one of the main reasons why the TREDP was conducted (Koide, 1975; Kosuge, 1981). After World War II, Haku Koide and Takashi Okuma

proposed a different view: the primary purpose of the TREDP was to enlarge the navigation network and enhance low flow to maintain network stability (Koide, 1975; Okuma 1981).

60 Okuma (1981) hypothesized that the Tone River diversion of the Edo Period greatly enhanced the sustainable socioeconomic development of the Kanto region. In those days, a substantial number of people relied on the renewable resources of the Japanese Archipelago but of course lacked modern technology. Increased low flows and uninterrupted connections between mountainous and coastal regions expanded the business and trade possibilities, sustaining the  
65 historical supply of food and commodities to the capital Edo. This view is supported by a great deal of historical evidence and is now regarded as accurate.

### *1.3 The shortcomings of earlier studies*

Although the claims of Koide and Okuma have been established from the historical perspective, little is quantitatively known; ideally, numerical hydrological simulations are  
70 required. To the best of the authors' knowledge, numerical hydrological simulations that targeted events that took place more than a century ago have seldom been performed, particularly in Japan. The exceptions include the following studies. Luo et al. (2014) evaluated the paleo-hydrological anthropogenic impacts of land use changes in the Kamo River basin in Kyoto, Japan, by reconstructing historical land use maps from 1902. They reported delayed  
75 and reduced peak discharges under the land use regime of 1902 compared to that of 1976 because of decreases in forest and paddy field coverage. Nemoto et al. (2011) developed a numerical model to investigate the hydraulic effect of the Shingen-tsutumi (a series of dikes built in the 16<sup>th</sup> century in Yamanashi Prefecture, Japan). They confirmed the hydraulic efficiency of dikes described in the ancient texts and effectively countered certain recent  
80 alternative views. Nemoto et al. (2013) developed a hydrological model to estimate the inundation depth at the time of the battle of Bicchu Takamatsu castle in 1582, during which it is known that the attackers created a temporary earth dike to flood the castle and thus force the

defenders to surrender. It was found that building a relatively short and low structure at a hydrologically critical point was sufficient to inundate the castle; this provided a hydraulic basis for the historical event. Outside Japan, the following studies tackled century-wide historical hydrological reconstruction. Balasch et al. (2019) qualitatively reconstructed and estimated peak flows in different subbasins of the Ebro River basin over the last 400 years. They reconstructed peak flows with possible errors of 10% after calibrating the hydraulic model and found that the geometry of the modeled reach of the riverbed and the flood plain was the greatest source of uncertainty. Werther et al. (2021) reconstructed river channel lengths from the pre-modern period (19th century) to today in the Bavaria region of Germany and calculated changes in the main channels of all major rivers in the study area after the channels were straightened.

#### ***1.4 Objectives and new contributions***

In this study, we model and evaluate the river discharges of the Tone and various other rivers and quantitatively investigate the hydrological consequences thereof during the various stages of the TREDP waterworks, which established more stable navigational routes in the Kanto Plain, including the capital Edo. We use the H08 global hydrological model for this purpose (Hanasaki et al., 2018). This choice was made because global hydrological models are designed for data-sparse regions, and an earlier study indicated that the H08 was capable of simulating Japanese rivers at a reasonably high spatiotemporal resolution (Hanasaki et al., 2022). In particular, the specific questions addressed in this study are summarized as follows:

- 1) How can we establish a hydrological simulation of events that occurred several centuries ago and that are thus associated with data limitations?
- 2) How can we validate the simulations for periods when modern river gauging did not exist?

3) What were the implications of TREDP? Were the implications consistent with the views of Koide and Okuma, who claimed that enhancement of navigation was key?

## 110 2 Study sites

### *2.1 Climatological and hydrological characteristics*

The Tone River watershed area is 16,940 km<sup>2</sup>, and the main channel runs for 322 km from its source to the Pacific Ocean (MLIT, 2023a). The mean annual rainfall in the upper Tone River basin is 1,381 mm with a standard deviation of 148 mm (Ibbitt et al., 2002). The mean Ara, Edo, and Tone discharges (MLIT, 2023b) for the period between 2004 and 2008 at the most downstream stations (Jisui Bashi, Nagareyama, and Toride, respectively) were 103, 111, and 242 m<sup>3</sup>/s, respectively.


Three rivers, the Tone, the Ara, and the Edo, are connected by two major bifurcations that are too large to ignore. The first bifurcation is the Tone Ozeki Weir, where some Tone River water is diverted to the Ara River (hereafter T2A), and the second bifurcation is the Sekiyado Dam in the Tone River, which controls the amount of water that flows downstream toward the Edo River (hereafter T2E). Presently, the T2E diversion is operated using a gate, whereas there was natural diversion in the 17<sup>th</sup> century. The only structure was earthen; this narrowed the inlet of the Edo River (termed “Bo-dashi” in Japanese, which means “stick out”).

### *2.2 Study sites relevant to the historical Edo Period*

As mentioned earlier, TREDP involved numerous subprojects. We focus on six subprojects and reconstruct historical maps of the Tone, Edo, and Ara Rivers in the Kanto region of Japan. The six historical maps were generated electronically by manually changing the flow directions by reference to historical reports on TREDP development, as follows:

130 before 1593; after checking part-blockage by the Aino River diversion (a bifurcating channel  
of the mid-Tone River) in 1594, which is considered to be the first step of TREDP; after  
completion of the Shinkawa-Dori channel (straightening of the mid-Tone River) in 1621; after  
the Kinu and Kokai River diversions, which moved the confluent points upstream, together  
with the Ara River diversion in 1630, which connected the upper basin to a southern river; after  
135 the Akahori River diversion (a new section that connected the upper and lower Tone River) in  
1654; and after the Sakasa River diversion and relevant constructions in 1666. Construction of  
the Sakasa River with a near-zero slope changed the flow direction from the Tone to the Edo  
River and vice versa (“sakasa” translates to “opposite” in English). This was achieved by  
narrowing the Edo River; otherwise, all river water drained toward Tokyo Bay, which reduced  
140 the water flowing eastward.

**Figure 1** shows the historical and present-day river basin maps, from 1593 (before the  
TREDP) to 2023. All three river basins are located between 35°N and 37.4°N and 138°E to  
141°E (i.e., within an area approximately 220 km × 160 km). Using the catchment areas of the  
stations farthest downstream that collect discharge data, the three rivers are classified as  
145 follows: Tone (5,002 km<sup>2</sup> on historical maps corresponding to the eastern part of the present  
Tone River; 11,376 km<sup>2</sup> on the present-day map), Edo (7,946 km<sup>2</sup> on historical maps  
corresponding to the western part of the present-day Tone River; 787 km<sup>2</sup> on the present-day  
map), and Ara (1,383 km<sup>2</sup> on historical maps; 2,168 km<sup>2</sup> on the present-day map). On historical  
maps, the easternmost river basin was termed the Hitachi River and the middle river basin the  
150 Tone River; they were not connected. However, in the chapters below we use the present-day  
nomenclature; the middle river basin is termed the Edo River and the easternmost river basin  
the Tone River. Below, we apply this nomenclature to both the present-day and historical maps  
for convenience.

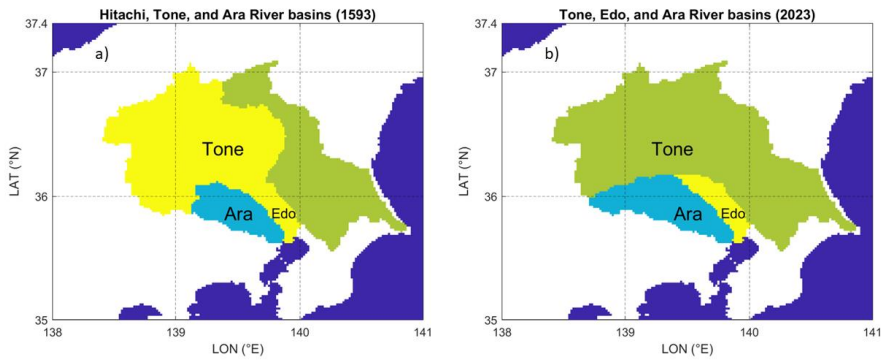

155 **Figure 1.** The Tone (green), Edo (yellow), and Ara (blue) River basins in (a) 1593 and (b) 2023. In 1593, the Tone River  
 160 mouth corresponded to the 2023 Edo River Mouth, whereas the 2023 Tone River Basin was termed the Hitachi River  
 Basin.

**Table 1** shows the locations and other information for 20 river gauging stations (MLIT, 2023b), and **Figure 2** presents the river sequences of today with the positions of all 20 gauging  
 160 stations relative to the bifurcations.

**Table 1.** The present-day gauging locations with observed river discharge. From the left, the columns  
 contain station identification numbers (IDs), station names, the river systems, longitudes, latitudes,  
 watershed areas of the observed data, watershed areas of the H08 model, and errors in the watershed areas  
 of H08. The tributaries in Table 1 are shown later in Figure 2.

165

ID	Station	River	Lon [°E] (obs)	Lat [°N] (obs)	Area [10 <sup>3</sup> km <sup>2</sup> ] (obs)	Area [10 <sup>3</sup> km <sup>2</sup> ] (H08)	Areal error [%] (H08/obs)
1	Iwahana	Karasu	139.08	36.29	1.23	1.39	+13
2	Koga	Watarase	139.69	36.19	2.20	2.57	+17
3	Mitsukaido	Kinu	139.98	36.02	1.74	1.94	+12



4	Todai	Kokai	140.13	35.88	1.04	0.98	-06
5	Kamifukushima	Tone	139.12	36.31	3.66	3.30	-10
6	Yattajima	Tone	139.20	36.26	5.15	5.54	+08
7	Furuto	Tone	139.38	36.24	5.99	6.02	+01
8	Kawamata	Tone	139.52	36.19	6.02	6.14	+02
9	Kurihashi	Tone	139.70	36.14	8.59	8.90	+04
10	Tonesekiyado	Tone	139.77	36.12	8.56	8.96	+05
11	Kitasekiyado	Tone	139.79	36.10	8.77	8.99	+03
12	Mefukibashi	Tone	139.89	35.98	8.85	9.37	+06
13	Toride	Tone	140.06	35.89	12.2	11.5	-06
14	Fukawa	Tone	140.14	35.85	12.5	12.6	+01
15	Nishisekiyado	Edo	139.78	36.09	8.66	8.99	+04
16	Noda	Edo	139.85	35.94	8.69	9.33	+07
17	Nagareyama	Edo	139.89	35.85	8.71	9.71	+12
18	Uematsubashi	Ara	139.28	36.14	0.97	0.97	+00
19	Oashibashi	Ara	139.44	36.08	1.02	1.06	+04
20	Sugama	Iruma (Ara)	139.51	35.95	0.71	0.82	+16

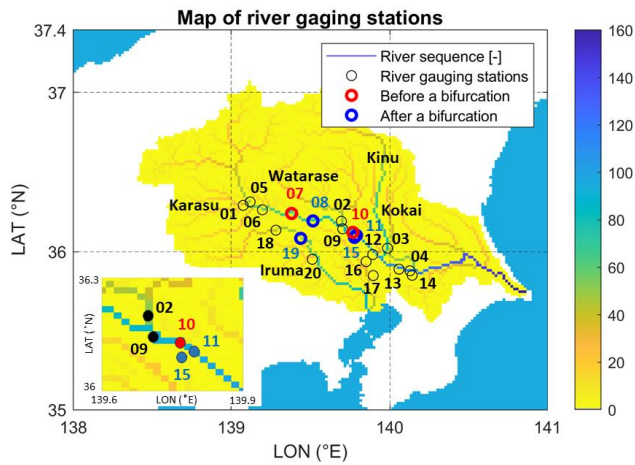


Figure 2. The present-day river sequences with the positions of all 20 gauging stations relative to the locations of bifurcations. Numbers near stations before (red color) and after (blue color) bifurcations correspond to the station IDs listed in Table 1.

### 3 Materials and Methods

#### 3.1 Overview

The H08 is a grid-based, physically driven hydrological model that calculates the global hydrological cycle with consideration of major human activities (e.g., sector-wise water abstraction and reservoir operation) and assesses water resource status at 30 arc-min spatial resolution (Hanasaki et al., 2008a; Hanasaki et al., 2008b; Hanasaki et al., 2018). The H08 is applicable to small spatial domains and low resolutions. Recently, the H08 model was expanded because of the need for regional application in Kyushu Island of Japan; the fine spatial resolutions are 1 arc-min and a 1-day time step (Hanasaki et al., 2022). We applied the H08 model to the present-day river map of the Kanto plain, which has the two existing bifurcation functions T2A and T2E that divert the flow of the Tone River to the Ara and the

Edo Rivers, respectively, at certain fixed rates. Next, we validated the simulated river discharges of the present-day river map using observed data. Then, the historical river discharges were estimated by replacing the present-day river map with historical maps. Finally, we indirectly validated the results by comparing the distributions of low flow and the most upstream locations of navigable river ports.

### 3.2 H08 model


H08 consists of six submodules, namely land surface hydrology, river routing, reservoir operation, irrigation water estimation, environmental water estimation, and water withdrawal submodules. A detailed description, including all fundamental equations together with the validation results, has appeared elsewhere (Hanasaki et al., 2008a; Hanasaki et al., 2008b; Hanasaki et al., 2018, Hanasaki et al., 2022). In this study, only the land surface hydrology and river routing submodules were used. The land surface hydrology submodule calculates the surface water and energy balance. This submodule requires daily precipitation, air temperature, wind speed, surface pressure, shortwave and longwave radiation, and relative humidity data as meteorological forcers. The river routing submodule calculates the daily river discharge by routing the daily runoff at a constant velocity.

The approach and methodology of Hanasaki et al. (2022) were applied in this study when using the land surface hydrology and river routing submodules to analyze data from 1993 to 2008. The other submodules were disabled, mainly because their application to historical maps would render the historical simulations very uncertain given the lack of input data. The calibration period was 1993–2000, and the validation period was 2001–2008. During this period, quantitative rainfall and river discharge data were consistently available from all observation stations.

### 3.3 Data

#### 3.3.1 Meteorological data

The observed meteorological variables were collected from the Automated Meteorological Data Acquisition System (AMeDAS, 2023) online database of the Japan Meteorological Agency. These were point data from all 91 rain gauges of the three river basins; the records have been published and are thus readily available. The modeling framework formulated for this study is schematically shown in **Figure 3**.

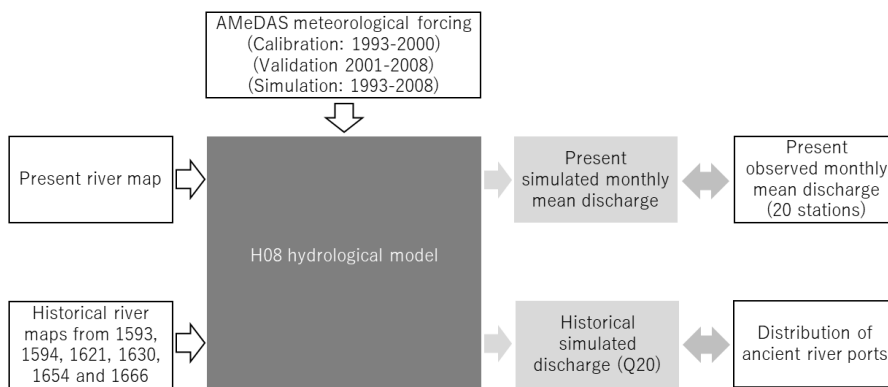

215 **Figure 3. Schematic of the methodology and framework used in this study.**

#### 3.3.2 River discharge data

The river discharge data were collected from the online database of the Ministry of Land, Infrastructure, Transport and Tourism (MLIT, 2023b).

#### 3.3.3 Flow direction data

220 Matsumura et al. (2021) developed a flow direction map for the present-day Tone, Edo, and Ara River basins with a resolution of 1 arc-min (approximately 2 km). [The reconstructed](#)

225 digital historical maps are built from printed reconstructed flow direction maps in publications.  
As the base digital flow direction map, we used the one developed by Matsumura et al. (2021).  
Then, starting from the oldest reconstructed digital historical map in 1593, we have changed  
one or more flow directions on the way to complete TREDP by referring to available printed  
historical maps. During reconstruction of historical maps, the flow direction was manually  
changed at one or more points to match the available historical maps (i.e., MLIT, 2023c;  
Inazaki et al., 2014). When it was difficult to ~~determine the exact historical river route (the~~  
230 ~~available historical maps are often hand-drawn), both administrative borders and the associated~~  
~~terrain slopes were used as guidelines, because we assumed that these did not change over time~~  
~~even when the river routes varied.~~obtain the exact historical maps, then administrative borders  
were used as guidelines because we found that, when a river changes its route, its administrative  
borders usually do not change simultaneously with it. For instance, the flow direction for  
excavating Shinkawa-Dori diversion in 1621 was determined as the northern border between  
235 Saitama and Tochigi Prefecture (nowadays Watarase River), which remained the same until  
today, yet after the excavation of the Shinkawa-Dori the Tone River route moved slightly  
southward of the prefectural border. Another example is the diversion of Kinu River towards  
Kokai River in 1630, whose route followed the border between Moriya and Tsukubamirai  
Districts, which is a densely populated area nowadays. The parts of the domain that did not lie  
240 inside the three river basins were treated as no-data points.

First, the map before the waterworks started is termed “1593”, indicating the year in  
which the map was prepared. Second, we used the map obtained after part-blockage of the  
Aino River (1594). Third, we used the maps created after the Shinkawa-Dori diversion (1621),  
followed by the diversions of the Ara, Kinu, and Kokai Rivers (1630), the Akahori River (1654),  
245 and the Sakasa River (1666).

### 3.4 Simulation

#### 3.4.1 Parameter calibration

The parameters of the land surface hydrology submodule were tuned using a simple Monte-Carlo-based method that has been described previously (Hanasaki et al., 2022; Mateo et al., 2014; Masood et al., 2015). The sensitivities of four hydrological parameters were evaluated by deriving the Nash–Sutcliffe Efficiency (NSE; **Equation 1**, Nash and Sutcliffe, 1970) of the monthly average river discharges using three possible values of each of the four parameters, for a total of 81 possible parameter combinations (**Table 2**). The calibration period was 1993–2000, and the validation period was 2001–2008. The most frequently occurring best-calibrated parameters from all gauging stations were termed “ensemble optimum parameters” (EOPs). For the validation period, simulated discharges were evaluated and compared to observations using both the best parameters at each station and the EOPs obtained during the calibration period with respect to the computed monthly NSE values.

$$NSE = 1 - \frac{\sum_{t=1}^T (Q_s^t - Q_o^t)^2}{\sum_{t=1}^T (Q_o^t - \bar{Q}_o)^2} \quad (1)$$

where  $Q_o^t$  is the observed discharge at time  $t$ ,  $Q_s^t$  is the simulated discharge at time  $t$ , and  $\bar{Q}_o$  is the mean observed discharge during an event.

**Table 2. The four calibrated parameters SD, CD,  $\gamma$ , and  $\tau$ , and the three possible outcomes A, B, and C.**

Parameter/Outcome	A	B	C
Soil Depth (SD) [m]	0.25	1.00	4.00
Bulk Factor (CD) [-]	0.002	0.006	0.010
Shape Factor ( $\gamma$ ) [-]	1.0	2.0	3.0
Time Constant ( $\tau$ ) [d]	25	100	400

265

### 3.4.2 Present-day simulation

The results of three present-day simulations using (a) the default uniform global H08 model parameters, b) the best-calibrated parameters at each gauging station, and c) the EOPs obtained during the calibration period were validated using the observed daily discharge values (MLIT, 2023b) from 20 river gauging stations in the present Tone, Edo, and Ara Rivers. Furthermore, we also ~~conducted sensitivity analyses of~~ analyzed both the T2A and T2E operational functions ~~(data not shown)~~ to determine the constant diversion rates (i.e., the percentages of river discharge flowing towards each river) ~~when~~ by varying the percentages of river discharge flowing toward the Edo and Tone Rivers. The ~~sensitivity~~ analysis showed that the NSE values for Tone River observation stations downstream from Toneseikiyado were highest when the diversion rates were set to 70% of river discharge toward the Tone River and 30% toward the Edo River. To estimate the flow rate of the T2A diversion, based on the observed river discharge data from the Furuto (upstream, before diversion,  $Q_F$ ) and Kawamata (downstream, after diversion,  $Q_K$ ) stations (see Fig. 2), we obtained the following relationship (Equation 2).

$$Q_K = 0.1432Q_F + 28.78 \quad (2)$$

This functional relationship is employed to recalculate the river discharge at Kawamata from the modeled river discharge at Furuto at every simulation step. This relationship was used throughout all present-day river map simulations; it was the operational rule of the T2A diversion.

### 3.4.3 Historical simulation

The default uniform global H08 model parameters and the EOPs from the present-day maps were selected for the historical simulations of all grid cells when we analyzed historical changes in river discharges. For the historical simulations, the meteorological inputs were the same as for the present-day simulation; we lacked historical meteorological data from the 17<sup>th</sup>

290 century. We applied the same modeling configurations as employed for the present-day  
simulation, but without T2A and with a modified T2E; the T2E bifurcation function was  
adjusted from 70:30% for the present-day to 50:50% for the historical maps (hereafter the old  
T2E). This was because the flood control of high waters flowing towards the Edo River was  
not as efficient as is afforded by the Sekiyado Dam of today (Okuma, 1981) and because we  
295 assumed that one of the main goals of enhanced navigation through the Sekiyado point was to  
increase the minimum water levels of both the Tone and Edo Rivers as much as possible and  
to equal extents. The bifurcation between the Tone and the Ara River did not exist in the 17<sup>th</sup>  
century, and the bifurcation between the Tone and Edo Rivers differed from that of today. We  
assumed that the optimal reproducibility metrics for the old T2E on the historical maps  
300 included 50% flow in each direction, because the discharge of low flows toward each river at  
the bottleneck crossover of Sekiyado would then be optimal.

### 3.5 Analysis

As historical river discharge records are not available, we indirectly validated our  
findings using the records of riverine ports. We collected data on the most historically upstream  
305 river port locations for each river (Figures with similar data are also in Inazaki et al. (2014),  
Kubo (2012) and Okuma (1981)). The names of ports were taken from historians' books (e.g.,  
Okuma, 1981) and confirmed by the name of "aza", an administrative designation of small  
sections into which some of the rural districts of Japan are divided. The old river routes were  
also taken from figures in books and digitalized to maintain the geometry of routes. As the  
310 widths and depths of historical river routes differed from those of the present-day, it was  
challenging to determine the historical thresholds for navigable river routes. We evaluated  
various historical navigation possibilities under the assumption that navigable river route  
thresholds would be met when Q20 exceeded 20 m<sup>3</sup>/s throughout the Kanto plain, and  
particularly throughout the Hitachi River, which was a bottleneck compromising smooth



315 navigation through the Tone River in the Edo Period. The validity of the 20 m<sup>3</sup>/s threshold is  
discussed below.


#### 4 Results and Discussion

In the following, we discuss the results presented in this study as they relate to the three  
320 specific questions that were the objectives of the study. Each of the specific questions was  
evaluated separately and is discussed in subsections 4.1–4.3, as follows:

- 1) How can we establish a hydrological simulation of events that occurred several centuries ago and that are thus associated with data limitations?
- 2) How can we validate the simulations for periods when modern river gauging did not exist?
- 325 3) What were the implications of TREDP? Were the implications consistent with the views of Koide and Okuma, who claimed that enhancement of navigation was key?

##### *4.1 Reconstruction of historical Tone River basin maps*

As we proceeded through the various steps of the TREDP, we reconstructed the six  
aforementioned historical maps. **Figure 4** shows the reconstructed river sequences of five  
330 historical maps and also the present-day Tone, Edo, and Ara River basins; the color bars  
indicate unitless river sequences.

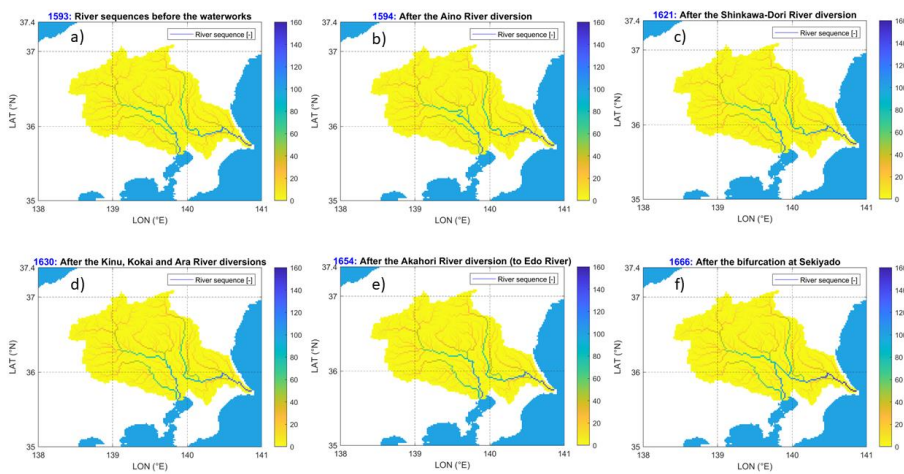

**Figure 4. Reconstructed river sequences [-] of the Tone, Edo, and Ara River routes on five historical maps (a: 1593, b: 1594, c: 1621, d: 1630, e: 1654, f: 1666 map).**

335 The river sequences after the old T2E bifurcation of 1666 that sent 50% of the water flow toward the Edo and Tone Rivers at the Sekiyado point are visualized in **Figure 4f**. The historical maps reconstructed from the several individual steps of the TREDP enhance our understanding of engineering technologies that were well-understood and applied even in the 17<sup>th</sup> century. Particularly, the 17<sup>th</sup> century engineers planned TREDP step-by-step, and thus 340 gradually moved the Tone River mouth to a distance about 100 km from the original mouth.

#### **4.2 Calibration and validation: Present-day Tone River discharge**

##### **4.2.1 Tone River to Ara River (T2A)**

The relationship between the discharge at Furuto (before T2A; see **Fig. 2** and **Table 1**) 345 and Kawamata (after T2A) stations from 1993 to 2008 is shown in **Figure 5**. After removing the five outlier data points, we obtained **Equation (2)**, as introduced in chapter 3.4.2.


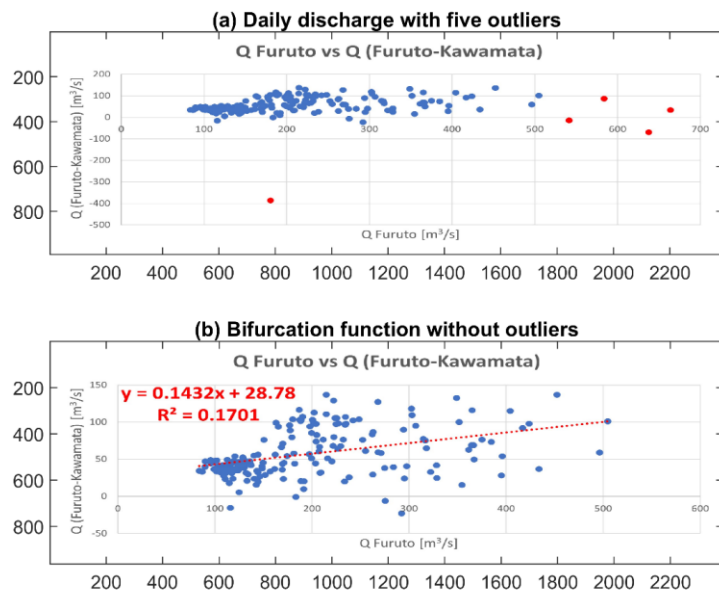


Figure 5. The process used to obtain the observed discharge correlation function between (a) Furuto and (b) Kawamata stations, as formulated by Equation (2).

350

Figure 6 shows the best NSE reproducibility metrics at the Kawamata and Toneseiyado gauging stations for the monthly discharge simulations from 1993 to 2008.

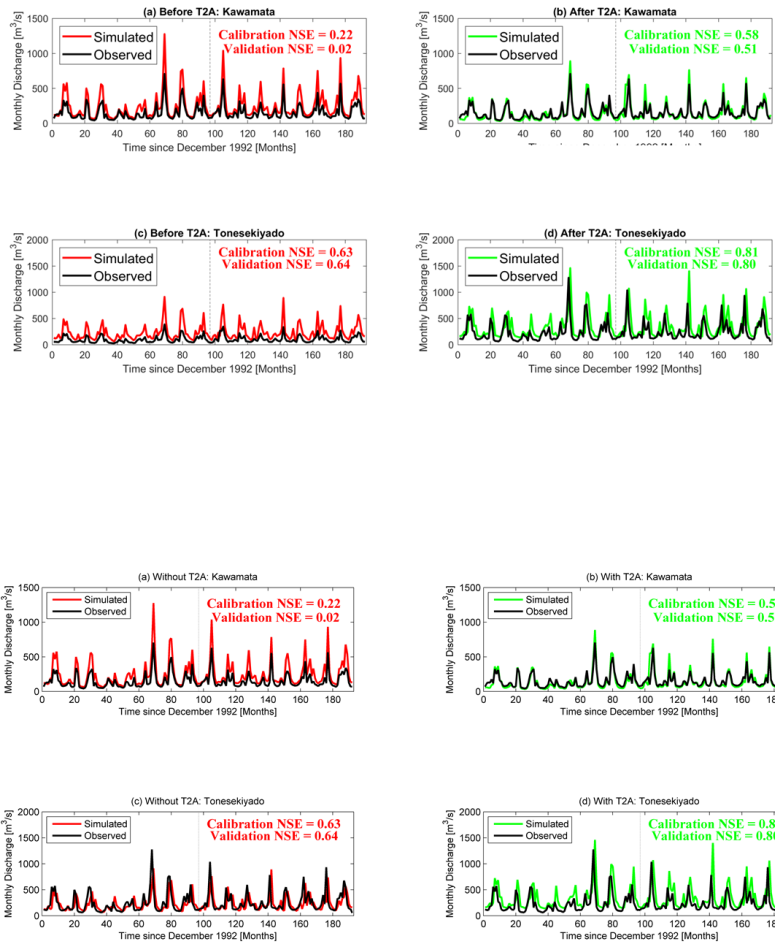


355 **Figure 6. The best NSE reproducibility metrics at the Kawamata (upper panels) and Toneseikiyado (lower panels) gauging stations before/without (a, c) and after/with (b, d) implementation of the T2A bifurcation, for both the calibration and validation periods.**


360 The monthly NSE value at Kawamata station was only 0.22 for the calibration and 0.02 for the validation period when the bifurcation function was not applied between the Furuto and

Kawamata stations at the point of the Tone Ozeki Weir. We obtained the relationships at Furuto and Kawamata from the observed data, as explained in section 3.3.2. After implementing the T2A bifurcation function mentioned above, the monthly NSE value at Kawamata station greatly increased from 0.22 for the calibration and 0.02 for the validation period (**Fig. 6a**) to 0.58 and 0.51 (**Fig. 6b**) and, further downstream at Tonesekiyado station, increased from 0.63 and 0.64 (**Fig. 6c**) to 0.81 and 0.80 (**Fig. 6d**), respectively. Consequently, the reproducibility metrics of all downstream stations also significantly increased (data not shown).

#### 4.2.2 Tone River to Edo River (T2E)

**Figure 7** shows the best NSE reproducibility metrics at the Kitasekiyado and Nishisekiyado gauging stations for the monthly discharge simulations from 1993 to 2008 after the T2A and T2E bifurcations. Tonesekiyado station is located upstream from T2E, followed by the downstream stations Kitasekiyado in the Tone River and Nishisekiyado in the Edo River (see **Fig. 2**; zoomed region in the lower left corner).

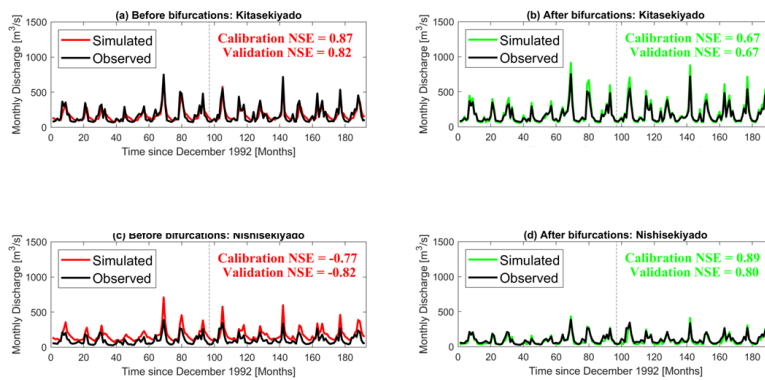

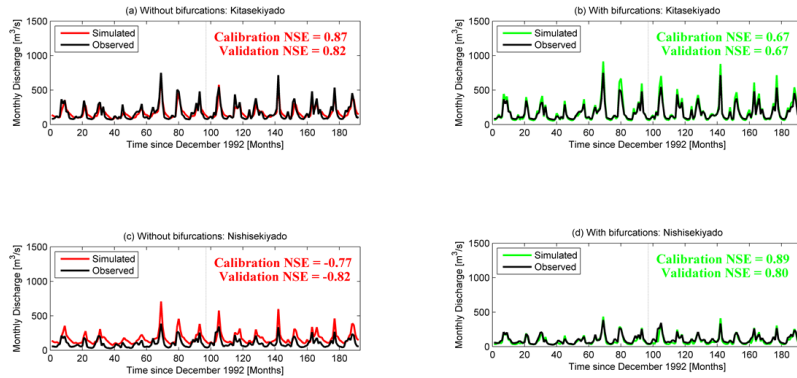

375

**Figure 7.** The best NSE reproducibility metrics at the Kitasekiyado (upper panels, after T2E toward Tone) and Nishisekiyado (lower panels, after T2E toward Edo) stations before (a, c) and after (b, d) implementation of the T2A and T2E bifurcations, for both the calibration and validation periods.

As shown in **Figure 7**, the monthly NSE value at Kitasekiyado station, located just  
 380 downstream from T2E, decreased from 0.87 for the calibration and 0.82 for the validation  
 period to 0.67 and 0.67, respectively, when using the best combination of calibrated parameters  
 during implementation of the T2A function into our H08 modeling system. This shows the  
 impact 30 km downstream of the T2A bifurcation. However, the validity at Nishisekiyado  
 station greatly increased from -0.77 for the calibration and -0.82 for the validation period to  
 385 0.89 and 0.80, respectively. The rationale for choosing 70% flow toward the Tone River and  
 30% flow toward the Edo River at the T2E bifurcation was that the Kitasekiyado and  
 Nishisekiyado stations should exhibit the best and near-equal NSE metrics performance after  
 implementation of the bifurcation, which was achieved.

#### *4.2.3 Validation at stations*

390 **Table 3** shows the calibration and validation data for the modeled monthly river discharges using the observed river discharges from 20 gauging stations and their EOPs for the present-day map.

395

**Table 3.** Calibration (from 1993 to 2000) and validation (from 2001 to 2008) of the modeled monthly river discharges based on the observed river discharges from 20 gauging stations for which NSEs were derived using the best parameters and the EOPs for the present-day map. The columns (from left) are the station IDs, the optimum parameters for the calibration period, the best NSEs for the calibration period, the best NSEs for the validation period, the NSEs of the EOPs for the calibration period, and the NSEs of the EOPs for the validation period.

Station ID	Calibration period best parameters combination	Calibration period best parameters NSE	Validation period best parameters NSE	Calibration period EOPs NSE	Validation period EOPs NSE
1	CAAC	0.56	0.62	0.56	0.58
2	CACB	0.35	0.82	0.33	0.81
3	CBAC	0.87	0.87	0.82	0.77
4	CCCC	0.74	0.52	0.64	0.47
5	CACB	0.24	0.01	0.24	-0.14
6	CAAC	0.39	0.18	0.39	0.04
7	CAAC	0.58	0.39	0.58	0.35
8	BACA	0.58	0.51	0.58	0.38
9	CAAC	0.81	0.81	0.81	0.80
10	CAAC	0.81	0.80	0.81	0.79
11	CAAC	0.67	0.67	0.67	0.67
12	CAAC	0.61	0.51	0.61	0.50
13	CAAC	0.66	0.79	0.66	0.75
14	CAAC	0.55	0.75	0.55	0.71
15	BACA	0.89	0.80	0.88	0.76
16	CAAC	0.90	0.90	0.90	0.88
17	BACA	0.70	0.71	0.66	0.69
18	BABA	0.22	0.27	0.19	0.26
19	BACA	0.58	0.55	0.58	0.54
20	CACC	0.77	0.64	0.76	0.64
<b>Ensemble optimum parameters</b>	<b>CAAC</b>	<b>0.62</b>	<b>0.60</b>	<b>0.61</b>	<b>0.56</b>

400

**Table 3** provides an overview of the simulation results; it is apparent that 16 of 20 stations had NSE values > 0.50 during both the calibration and validation periods. The stations that exhibited the lowest NSE values in both the calibration and validation periods were the most upstream stations on the Tone (Kamifukushima, Yattajima) and Ara (Uematsubashi)



405 Rivers. This may indicate that these relatively smaller subbasins may require different optimal  
combinations of parameters than the combinations that we selected. However, as the  
downstream parts of all three rivers yielded relatively high reproducibility metrics, we selected  
CABC to be the set of EOPs (see **Tables 2 and 3**) when further analyzing river discharges. The  
mean NSE values of all 20 stations obtained using the best parameters for every station were  
410 0.62 for the calibration period and 0.60 for the validation period, which are satisfactorily high  
values. When the EOPs were applied to the entire basin over the calibration and validation  
periods, the obtained mean NSE values were 0.61 and 0.56, respectively. The very small drops  
in the NSE reproducibility metrics from the cases with the best NSE values for each station to  
the cases with the NSE values obtained using the EOPs indicate that it is appropriate to use the  
415 CABC EOPs for the entire basin.

#### *4.2.4 Basin-wise water balance*

**Table 4** analyzes and compares the present-day simulated and observed data on the  
mean annual simulated discharges from 1993 to 2008 at the Tone, Edo, and Ara River mouths  
using the default uniform global H08 model parameters when (a) both the T2A and T2E  
420 bifurcation functions were operating simultaneously and when (b) only the T2E bifurcation  
was operating.

425 **Table 4. Mean annual simulated discharges at the mouths of three rivers in the present-day ( $\text{m}^3\text{s}^{-1}$ ) using the default uniform global H08 model parameters.**

	Present Simulation including both T2A and T2E bifurcations		Present Simulation including only the T2E bifurcation
	Sim	Obs	Sim
Tone	303	242	332
Edo	76	111	89
Ara	104	103	62
T2A	42		0
T2E	54		67

**Table 4** shows the obtained present-day mean discharges at the mouths of the Tone, Edo, and Ara Rivers. These are 303, 76, and 104  $\text{m}^3/\text{s}$ , respectively, when the T2A and T2E bifurcations operate. The Ara River value is similar to the 2004–2008 mean annual observed discharge (MLIT, 2023b) of the Ara River (103  $\text{m}^3/\text{s}$ ), but the Edo River discharge is underestimated and the Tone River discharge is overestimated compared to the observed values (111 and 242  $\text{m}^3/\text{s}$ , respectively). Without the T2A bifurcation, the errors are greater, as expected. Importantly, the observed discharges were those at the most downstream stations but the simulated discharges were those at the mouths; it would thus be expected that the simulated discharges would be slightly larger. The mean annual discharges of the Tone River are 151 and


101 m<sup>3</sup>/s before and after the T2A point, and those of the Ara River are 24 and 66 m<sup>3</sup>/s, respectively. Thus, about 42 m<sup>3</sup>/s is diverted by T2A on average.

Summarizing **Figures 6 and 7** and **Tables 3 and 4**, we conclude that our H08 modeling framework with T2A and T2E accurately reproduces the present-day Tone, Edo, and Ara River discharges, especially in the most downstream parts.

#### ***4.3 Quantification of increasing low flows during and after the waterworks***

In the following, we quantify the low flows of the Tone and Edo Rivers that were altered by the TREDP. The need to increase low-flow water levels along the Tone and Edo River systems, particularly in the unnavigable upmost section of the Hitachi River (presently between the Mefukibashi and Tonesekiyado stations of the Tone River; see **Table 1**), has been assumed to be the main reason why the TREDP was conducted and proceeded (Koide, 1975; Okuma, 1981). Note that the capital Edo was also protected from floods by these waterworks (Sippel, 2014). One constraint imposed on flood protection was the Akahori River, which was artificially constructed in 1654 and only 18 m wide at the time of construction (Okuma, 1981) but was subsequently further widened in multiple steps for decades and centuries after the TREDP; however, high flows are not the topic of the present study.

**Figure 8** shows the 20<sup>th</sup> percentiles (Q20) of monthly river discharges from 1993 to 2008 using the default uniform global H08 model parameters, which served as the reference level when evaluating low flow conditions. Additionally, **Figure 8** also shows the most upstream navigable historical river ports with their Q20 thresholds for 1593, 1630, and 1666 (panels a–c) and compares these to those of all recorded navigable historical ports (panel d).

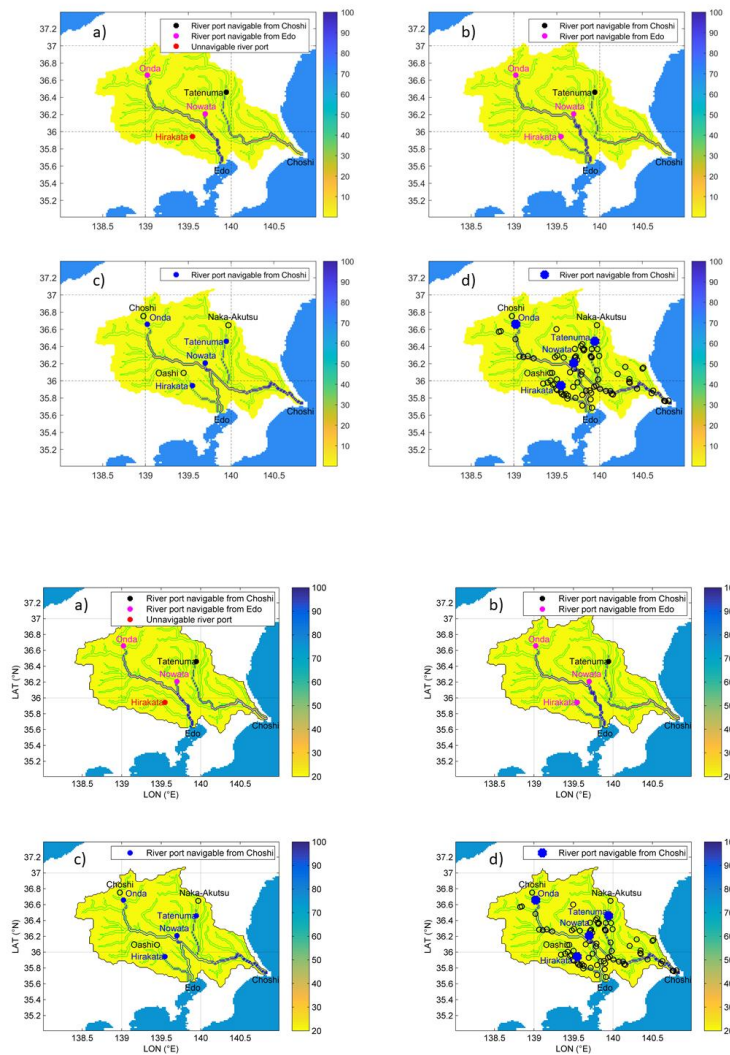

460 **Figure 8.** The contours of  $Q_{20}$  values  $> 20 \text{ m}^3/\text{s}$  for the historical maps from (a) 1593, (b) 1630, (c) 1666 with the locations  
of the most upstream navigable historical river ports and (d) all recorded navigable historical ports using the default  
uniform global H08 model parameters, same as (c) but with all recorded navigable historical ports using the default  
uniform global H08 model parameters. The color bar indicates the  $Q_{20}$  values of river flow of the basin in the unit of  
 $\text{m}^3/\text{s}$ . The main channel indicates river flow which meets the condition of  $Q_{20} > 20 \text{ m}^3/\text{s}$ , which increases downstream.  
465  $Q_{20}$  values  $< 20 \text{ m}^3/\text{s}$  are shown with yellow color. Channels with pale colors represent river flow slightly greater than  
 $Q_{20} > 20 \text{ m}^3/\text{s}$ , while the ones with dark blue colors indicate greater discharge up to maximal values shown in the color

bar. The hollow circles represent all recorded navigable historical ports except the most upstream navigable ones.

Historically, there were two Choshi ports, one at the river mouth and the other upstream of the Tone River.

The key confirmation of the expectation enunciated by Koide (1975) is shown in **Figure 8**, which is an indirect validation of the historical maps. **Figure 8** shows our H08-modeled Q20 values and compares these with those of the river ports, whose most upstream locations with Q20 values  $> 20 \text{ m}^3/\text{s}$  are shown. Q20 values  $> 20 \text{ m}^3/\text{s}$  indicate navigable points. Note that, in 1593, the eastern half of the present-day Tone River (the Hitachi River) and the western half of the Tone River were not connected and thus were unnavigable (**Fig. 8a**)-**8a**, the southeast part from the Nowata port). Moreover, the Q20 of the Hitachi River exceeded  $20 \text{ m}^3/\text{s}$  only after the confluence of the Kinu and Kokai Rivers-, south from the Tatenuma port. In 1630, after diversion of the Kinu River, the section wherein Q20 exceeded  $20 \text{ m}^3/\text{s}$  moved upstream (**Fig. 8b**)-**8b**, south from the Tatenuma port). After the Sekiyado bifurcation (i.e., the old T2E) in 1666, the navigable section was substantially extended, now connecting the upper streams of major tributaries to the Pacific Ocean and Tokyo Bay (**Fig. 8e**)-**8c**, the part connecting southeast from the Nowata port and south from the Tatenuma port). Furthermore, the distances between the most navigable river ports modeled in **Figure 8c** and the most upstream navigable historical river ports (i.e., Noda and Choshi for the Tone River; Tatenuma and Naka-Akutsu for the Kinu River; Hirakata and Oashi for the Ara River) are rather small. Thus, we indirectly validated the modeled locations of the uppermost reachable ports of the mainstream Tone and its tributaries via comparisons with the reconstructed historical uppermost ports.

**Figure 9** shows the validationssimulated streamflow of the Tone River discharges at Toride station for 3 key historical years, thus 1593, 1630, and 1666, compared to the observed data from 1993 to 2008 derived using the EOPs. For these historical validations, we used the old T2E historical bifurcation ratio at Sekiyado.

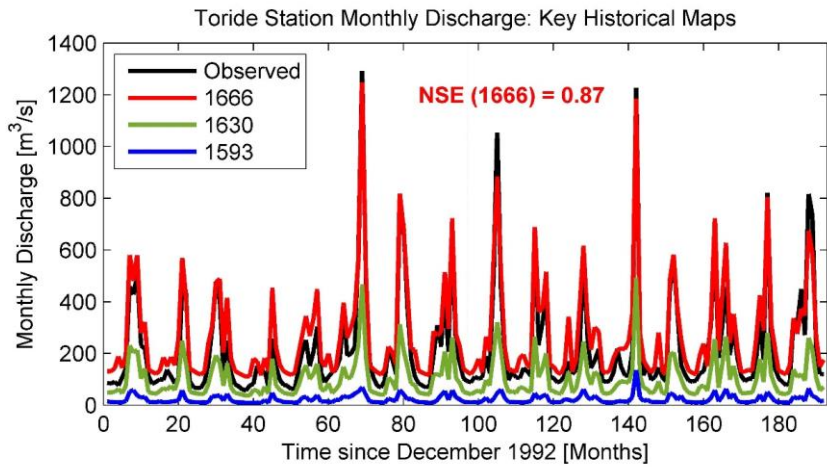
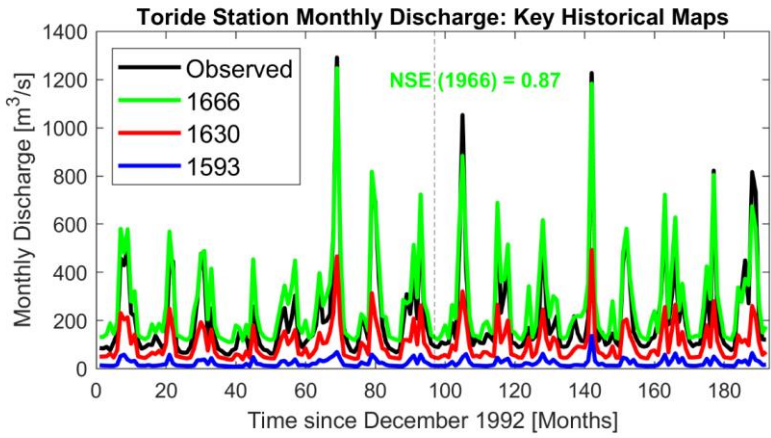


Figure 9. The Tone River discharges at Toride station in 1593 (blue), 1630 (red), and 1666 (green) compared to the observed data from 1993 to 2008 derived using the EOPs and the old T2E historical bifurcation ratio at Sekiyado.

495 The aforementioned increases in low flows are shown in **Figure 9** for Toride station,  
and the modeled river discharges are compared to the observed values of the present-day  
observed values, because these yielded the best reproducibility metrics over all river basins. A  
gradual historical increase of Q20 at Toride station is apparent; the values were 11, 53, and 131  
m<sup>3</sup>/s for the maps of 1594, 1630, and 1666, respectively. These findings confirm the  
500 expectation of Koide (1975) that the main goal of the TREDP was a step-by-step increase in  
low flows to enhance navigation. Other reasons might also be as important as enhanced river  
routes for navigation and trading, but a very different modelling setup would be needed to test  
and show the other hypotheses (e.g., irrigation area expansion, flood protection, military  
purpose, etc.). Testing them would also be a very interesting contribution to a better  
505 understanding of the historical hydrology of the rivers in the Kanto Plain, but apparently, they  
are out of the intended scope of this study.

Summarizing **Figures 8 and 9**, the TREDP was useful in that it revealed increasing low  
flows over time in the Tone River between Sekiyado and Choshi. TREDP principally used  
human power to build earthen and wooden structures that allow only limited water diversion.  
510 In the early 20<sup>th</sup> century, modern steel and concrete structures permitted large-scale water  
transfer during severe floods. Inland transportation has gradually lost importance given the  
development of a sophisticated rail network in the region. It is thus not immediately intuitive  
to assume that transport was the main reason for the TREDP when viewing the scenario today.  
The socio-hydrological implications and societal contributions of the TREDP expanded the  
515 business and trade of the Kanto Plain, which historically supplied food and commodities to the  
capital Edo. The results support the claims of Haku Koide and Takashi Okuma: the TREDP  
was indeed intended to expand the riverine transport network of the entire Kanto Plain.

#### 4.4 Uncertainties

Here and below, we note some important limitations of our study. First, the H08  
520 historical maps were forced using present-day meteorological data. The flows may have  
differed from what we derived because the climatological conditions may have varied. Thus,  
although we claim that we accurately reconstructed historical river maps, this is not necessarily  
the case for streamflow due to different climatological factors from the past. Yet, we provided  
indirect validation by comparing the distribution of the Q20 river discharge with the most  
525 upstream navigable river ports in the past. Recently, a few studies (i.e., Hatono et al., 2022)  
have developed long-term historical meteorological datasets for Japan, which should enable  
this limitation to be minimized in future studies. In the cited work, the period from 1926 to  
2020 was reconstructed. Such long-term meteorological reanalyses are needed to extend input  
precipitation data coverage further into the past. Second, when tuning the present-day climate  
530 parameters, the effects of dams were not included, and the subbasins of tributaries were not  
calibrated separately. Instead, the best-calibrated parameters for each gauging station were  
validated using the observed daily discharge values and then applied uniformly throughout the  
entire basin. Third, water withdrawal and consumption were not included in the simulation.  
This might affect the water balance in both the middle reaches, where irrigation is concentrated,  
535 and the lower reaches where municipalities are concentrated. Fourth, changes in historical land  
use were not considered because available historical data were lacking. Fifth, given the lack of  
data, we did not consider river channel cross-sections. Although navigability is primarily  
determined by the water depth, width, and flow velocity, we considered only the flow rate for  
simplicity.

540



## 5 Conclusions

In this study, we asked and answered the three questions: how can we establish a hydrological simulation of events that occurred several centuries ago and that are thus associated with data limitations?; how can we validate the simulations for periods when modern river gauging did not exist?; and what were the implications of TREDP? Moreover, were the implications consistent with the views of Koide and Okuma, who claimed that enhancement of navigation was key?

First, we modeled the Tone, Edo, and Ara River discharges before and after the various steps of TREDP and evaluated the results of each step (**Fig. 4**). We used the H08 global hydrological model to reconstruct historical flow-direction maps and determined the operational patterns of the two present-day bifurcation functions, T2A and T2E. Thus, we successfully established a hydrological simulation commencing four centuries ago.

Second, we found that the navigability paths for low flows (Q20) became connected between the Pacific Ocean and the capital Edo after the TREDP waterworks were completed (**Fig. 8**) and that the river discharges at the bottleneck Toride station were gradually increased after conducting each significant waterwork of TREDP (**Fig. 9**).

Third, the societal implications of the diversion afforded numerous advantages, as previously indicated by other scholars. Our simulation results show that the increasing low-flow water levels and thus the improved navigability routes were the most significant societal implication. Thus, our findings are consistent with those of the historians Koide and Okuma.

This is the first study to show that securing stable and adequate low riverine flows permitted navigation, the transport of large amounts of goods from the eastern Kanto Plain to inland areas, and ultimately to the capital Edo, which became safer and economically more efficient than with combined sea navigation and land transportation; we used a historical

565 hydrological modeling framework to discover this. Other reasons might also be as important societal implication as improved navigability routes, but they are out of the scope of this study.

Learning from historical technologies, followed by efforts to implement what is learnt in the present-day, may be an important step toward more sustainable present-day and future water resources management. We expect that the findings of this study will motivate the scientific community to consider that learning from the past is no less important than projecting  
570 and predicting the future, where such learning may yield valuable tools aiding present-day and future climate studies. For example, in this study, we learnt that low-flow but navigable river routes were designed in a very organized manner even four centuries ago.

#### **Code and data availability**

575 The code and data associated with this study can be accessed at <https://doi.org/10.5281/zenodo.10719388>.

#### **Supplementary material**

Supplementary material related to this article is available online.

#### **Author contributions**

580 Both co-authors reviewed, discussed, and suggested revisions for the submitted version of the manuscript, conceptualized and designed the experiments, which were then conducted by JT. NH developed the model code and JT further improved it for the particular application and performed the simulations. JT wrote and revised the manuscript with contributions from NH.

#### **Competing interests**

585 The corresponding author declares that none of the co-authors have any competing interests.

## Acknowledgments

This study was supported by the Japan Society for the Promotion of Science (KAKENHI; grant no. 21H05178). The authors sincerely thank Akiko Matsumura for providing flow direction maps of the present-day Tone, Edo, and Ara Rivers; Kinuyo Tarumoto for digitizing the historical river port locations; and Kedar Otta and Ai Zhipin for their useful suggestions in the early phases of H08 model framework development.

## Financial support

This study was supported by the Japan Society for the Promotion of Science (KAKENHI; Grant Number 21H05178).

Formatted: English (United States)

Formatted: Level 1, Space Before: 12 pt, After: 0 pt, Keep with next, Keep lines together

## References

- [dataset] AMeDAS, 2023: <https://www.data.jma.go.jp/obd/stats/etrn/> (last accessed April 20, 2023).
- Balasch, JC., Pino, D., Ruiz-Bellet, JL., Tuset, J., Barriendos, M., Castellort, X., Peña, JC., 2019. The extreme floods in the Ebro River basin since 1600 CE, *Science of the Total Environment* 646: 645-660. <https://doi.org/10.1016/j.scitotenv.2018.07.325>
- 600 Hanasaki, N., Kanae, S., Oki, T., Masuda, K., Motoya, K., Shirakawa, N., Shen, Y., Tanaka, K., 2008a. An integrated model for the assessment of global water resources—Part 1: Model description and input meteorological forcing, *Hydrology and Earth System Sciences* 12:4, <https://doi.org/10.5194/hess-12-1007-2008>
- 605 Hanasaki, N., Kanae, S., Oki, T., Masuda, K., Motoya, K., Shirakawa, N., Shen, Y., Tanaka, K., 2008b. An integrated model for the assessment of global water resources—Part 2: Applications and assessments, *Hydrology and Earth System Sciences* 12:4, <https://doi.org/10.5194/hess-12-1027-2008>
- Hanasaki, N., Yoshikawa, S., Pokhrel, Y., Kanae, S., 2018. A global hydrological simulation to specify the sources of water used by humans, *Hydrology and Earth System Sciences* 22:1, <https://doi.org/10.5194/hess-22-789-2018>
- 610 Hanasaki, N., Matsuda, H., Fujiwara, M., Hirabayashi, Y., Seto, S., Kanae, S., Oki, T., 2022. Toward hyper-resolution global hydrological models including human activities: application to Kyushu Island, Japan, *Hydrology and Earth System Sciences* 26:8, <https://doi.org/10.5194/hess-26-1953-2022>
- Hatono, M., Kiguchi, M., Yoshimura, K., Kanae, S., Kuraji, K., Oki, T., 2022. A 0.01-degree gridded precipitation dataset for Japan, 1926-2020, *Scientific Data* 9:422, <https://doi.org/10.1038/s41597-022-01548-3>
- 615

- Ibbitt, R., Takara, K., Desa, MNBM., Pawitan, H. 2002. Catalogue of Rivers for South East Asia and the Pacific-Volume IV, The UNESCO-IHP Regional Steering Committee for Southeast Asia and the Pacific.
- Inazaki, T., Ota, Y., Maruyama, S., 2014. The largest and longest project in Japan—Spanning over 400 years, *Journal of Geography (Chigaku Zasshi)* 123:4, <https://doi.org/10.5026/jgeography.123.401>
- 620 Kawada, T.: On the history of the Tone River basin, *Journal of Geography (Chigaku Zasshi)*, 43, 367-389, 1893.
- Koide, H., 1975: Tone River and Yodo River - Historical Development in Eastern and Western Japan (in Japanese)
- Kosuge, N., 1981. The development of waterworks in Japan, The United Nations University, HSDRJE-29/UNUP-240, ISBN 92-808-0240-2, ISSN 0379-5780
- 625 Kubo, S., 2012. Shifting of the Arakawa river in the Kanto Plain, central Japan, during the Late Holocene: a geomorphological approach, *Geographical Review of Japan Series B* 84(2): 71–80, <https://doi.org/10.4157/geogrevjapanb.84.71>
- Kurihara, R.: Flood control history of the Tone River, *Kankaikoronsya*, Tokyo, 331 pp., 1943.
- Luo, P., Takara, K., Apip, He, B., Nover, D., 2014. Palaeoflood simulation of the Kamo River basin using a grid-cell distributed rainfall run-off model, *Journal of Flood Risk Management* 7, <https://doi.org/10.1111/jfr3.12038>
- 630 Masood, M., Yeh, P. J.-F., Hanasaki, N., Takeuchi, K., 2015. Model study of the impacts of future climate change on the hydrology of Ganges–Brahmaputra–Meghna basin, *Hydrol. Earth Syst. Sci.*, 19, 747–770, <https://doi.org/10.5194/hess-19-747-2015>
- 635 Mateo, C. M., Hanasaki, N., Komori, D., Tanaka, K., Kiguchi, M., Champathong, A., Sukhannaphan, T., Yamazaki, D., Oki, T., 2014. Assessing the impacts of reservoir operation to floodplain inundation by combining hydrological, reservoir management, and hydrodynamic models, *Water Resour. Res.*, 50, 7245–7266, <https://doi.org/10.1002/2013wr014845>, 2014.
- Matsumura, A. Mitsunashi, T., Suga, K., Terashima, A., Kanayama, T., Ogawada, D., Yano, S., Hanasaki, N., 640 Oki, T., 2021. Global Water Cycle Model H08 assessment of water supply and demand in a watershed considering the intake and drainage systems, *J. Japan Soc. Civ. Eng. Ser. B1 (Hydraulic Eng.)*, [https://doi.org/10.2208/jscejhe.77.2\\_I\\_205](https://doi.org/10.2208/jscejhe.77.2_I_205) (in Japanese)
- MLIT, 2023a: [https://www.mlit.go.jp/river/toukei\\_chousa/kasen/jiten/nihon\\_kawa/index.html](https://www.mlit.go.jp/river/toukei_chousa/kasen/jiten/nihon_kawa/index.html) (last accessed December 19, 2023).
- 645 [dataset] MLIT, 2023b: <http://www1.river.go.jp/> (last accessed April 20, 2023).

- MLIT, 2023c: <https://www.ktr.mlit.go.jp/tonejo/tonejo00185.html> (last accessed April 20, 2023).
- Nash, J.E., Sutcliffe, J.V., 1970. River flow forecasting through conceptual models: Part I - A discussion of principles. *J. Hydrol.* [https://doi.org/10.1016/0022-1694\(70\)90255-6](https://doi.org/10.1016/0022-1694(70)90255-6)
- 650 Nemoto, Y., Nakayama, D., and Matsuyama, H.: Reevaluation of Shingen-tsutsumi based on inundation flow simulations with special focus on the flood control facilities along the Midai River, *Geographical Review of Japan Series A*, 84, 553-571, [10.4157/grj.84.553](https://doi.org/10.4157/grj.84.553), 2011.
- Nemoto, Y., Izumi, T., Nakayama, D., and Matsuyama, H.: Hydrologic study of artificial flooding tactics at Bicchutakamatsu Castle by Hideyoshi based on a flood-inundation simulation, subtitles\_in\_Japanese, *Geographical Review of Japan Series A*, 86, 315-337, [10.4157/grj.86.315](https://doi.org/10.4157/grj.86.315), 2013.
- 655 Okuma, T., 1981. *Tonegawa chisui no hensen to suigai* (Changes in the Tone River improvements and its floods). Tokyo: The University of Tokyo Press. (in Japanese)
- Sippel, P., 2014. Japan's first urban water disaster: The Great Kanto Flood of 1742, *Contemporary History Research* 10, 1-34, <http://id.nii.ac.jp/1093/00000437/>
- 660 Werther L., Menn, T., Schmidt, J., Müller H., 2021. Modelling pre-modern flow distances of inland waterways – A GIS study in southern Germany, *Virtual Archaeology Review*, 12(25): 42-56. <https://doi.org/10.4995/var.2021.15245>