

# Spatially Resolved Rainfall Streamflow Modeling in Central Europe

Marc Aurel Vischer<sup>1</sup>, Noelia Otero<sup>1</sup>, and Jackie Ma<sup>1</sup>

<sup>1</sup>Fraunhofer Heinrich-Hertz Institute, Applied Machine Learning Group, 10587 Berlin, Germany

**Correspondence:** Marc Aurel Vischer (marc.aurel.vischer@hhi.fraunhofer.de) and Jackie Ma (jackie.ma@hhi.fraunhofer.de)

**Abstract.** Climate change increases the risk of disastrous floods and makes intelligent fresh water management an ever more important issue for society. A central prerequisite is the ability to accurately predict the water level in rivers from a range of predictors, mainly meteorological forecasts. The field of rainfall runoff modeling has seen neural network models surge in popularity over the ~~last-past~~ few years, but a lot of this early research on model design has been conducted on catchments with smaller size and a low degree of human impact to ensure optimal conditions. Here we present a pipeline that extends the previous neural network approaches in order to better suit the requirements of larger catchments or those characterized by human activity. Unlike previous studies, we do not aggregate the inputs per catchment, but train a neural network to predict local runoff spatially resolved on a regular grid. In a second stage, another neural network routes these quantities into and along entire river networks. The whole pipeline is trained end-to-end, exclusively on empirical data. We show that this architecture is able to capture spatial variation and model large catchments accurately, while increasing data efficiency. Furthermore, it offers the possibility ~~to interpret and influence~~ of interpreting and influencing internal states due to its simple design. Our contribution helps to make neural networks more operations-ready in this field and opens up new possibilities to more explicitly account for human activity in the water cycle.

## 1 Introduction

As one of the most frequent and destructive natural disasters, floods are expected to become more common due to climate change (Bevacqua et al., 2021) and more hazardous as the worldwide population in high risk areas is likely to increase (Kam et al., 2021). Heavy precipitation is expected to become more frequent, which will increase flooding risks (Gründemann et al., 2022). Europe is becoming increasingly more vulnerable to flooding due to large-scale atmospheric patterns that lead to widespread precipitation extremes (Bevacqua et al., 2021) and certain landscape properties. This study focuses on river floods in central Europe, where heavy precipitation and ~~snowmelt~~ snow melt are driving the expansion of flood-impacted areas (Fang et al., 2024). Accurate prediction of such events is the foundation for creating resilience and preventing material damages, displacement of people, and loss of human lives. The field of hydrological research concerned with predicting river levels from meteorological variables is called rainfall streamflow modeling<sup>1</sup>. The aim is to capture the process ~~how-by which~~ precipitation feeds into rivers and other bodies of water. Predicting runoff, i.e. the amount of excess precipitation being drained away on the

---

<sup>1</sup>Another commonly used term is rainfall runoff modeling. As this paper aims to predict ~~stream-flow~~ streamflow in rivers, we decided to use the more specific term rainfall streamflow modeling, but we will use rainfall runoff modeling to refer to the general literature.

25 surface, requires modeling different processes that take place inside or right above the ground, such as evaporation and seepage. It hinges on keeping some record of the state of the surface, e.g. the amount of precipitation in the last days or how much water is stored as snow during winter season. These processes are highly localized, and as a next step, the resulting local runoff needs to be converted into streamflow along a network of rivers. This modeling step is called routing. There is a large body of research ~~employing that employs~~ (conceptually simplified) physical models for both these tasks (Beven, 2012). Furthermore, 30 models based on neural networks have increasingly been proposed in recent years, e.g. Kratzert et al. (2018); Nearing et al. (2024). We build upon this line of work by introducing a neural network that performs both local rainfall-runoff modeling *on a regular grid* and routing along the river network to predict streamflow time series measured at river gauges. ~~All of this is learned~~ The model is trained to do this in a data-driven, end-to-end fashion. ~~Here, we present a~~ This spatially distributed modeling framework ~~-, more versatile than other neural networks as it captures the~~ is able to capture spatial co-variability of 35 the input features, thereby enhancing prediction accuracy in larger basins (Yu et al., 2024). ~~This approach~~ It also allows for controllability and scientific discovery, and it is ready to scale to higher spatial and temporal resolution.

The following Section 2 discusses in detail which types of neural networks have been considered for rainfall runoff prediction and routing, and ~~explain~~ explains our contribution to this ongoing field of research. In Section ~~?? we describe our model architecture and~~ 3 we introduce a novel, publicly available dataset for spatially resolved rainfall streamflow modeling in five 40 river basins in Germany and neighboring countries, and we describe our model architecture in Section 4. Section 5 presents the main results from the experiments. Section 6 concludes with a brief outlook onto future directions, highlighting the influence of human activity.

## 2 Related Work

We start this section by introducing a classification scheme for rainfall streamflow models. This scheme will ~~allow us to keep~~ 45 ~~an overview~~ provide orientation as we subsequently present previous work on neural networks in rainfall runoff modeling in general, and spatially resolved processing and routing in particular. We carve out how our approach is different and end this section with an overview over this paper’s contributions.

### 2.1 Typology of Rainfall Runoff Models

We adapt a classification scheme for rainfall streamflow models originally introduced by Sitterson et al. (2018): Depending on 50 the level of abstraction, models are said to be *empirical* (also *detailed* or *physical*) if they involve physical equations of the involved processes (Horton et al., 2022). *Conceptual* (or physically inspired) models make some substantial simplifications, but still contain (abstract) subsystems or quantities that can be identified with physical entities. Finally, *statistical* models refrain from explicit modeling of anything physical and instead focus on the statistical relationship between inputs and outputs exclusively. Our approach is based on neural networks and falls into the latter category, while most operational models such as 55 LISFLOOD (Van Der Knijff et al., 2010) fall under the conceptual category.

Another criterion for classifying models is the way space is represented in the model: *Lumped* models aggregate all variables (temporal or static) across a station’s catchment area before modeling starts. Not representing the spatial extension of a catchment can be a reasonable modeling assumption for small catchments, but it implies losing the opportunity to model spatial co-variance within the catchment, ~~such as the different effect of heavy rainfall.~~ An example of the importance of spatial  
60 co-variance is the different effect that heavy rainfall might have over a forested area versus on sealed soil. *Distributed* models on the other hand explicitly model local processes, usually on a grid, less commonly on an irregular mesh vector-based, e.g. Hitokoto and Sakuraba (2020); Sun et al. (2022). Most physical or conceptual models fall under the latter category, as the underlying formulas are local and it is straightforward to resolve them on a regular grid for computation. Neural networks in this domain on the other hand started to be developed as lumped models for a combination of historical and technical reasons  
65 which we discuss in the next Subsection 2.2.1. In between sits a class of models called *semi-distributed*, where some sort of sub-structure is modeled. Many routing models fall under this category. An example of a neural network based routing model is Nearing et al. (2024), where a network of gauging stations is modeled with high temporal resolution, but not the processes inside each station’s catchment area. As we detail below, our model first predicts runoff fully distributed in space, then mapping these runoffs onto the river network in a second stage.

## 70 2.2 Neural Networks in Rainfall Runoff Modeling

Neural networks have been used for rainfall runoff modeling since the 1990s (Smith and Eli, 1995), but have surged in popularity since Kratzert et al. (2018), when long short term memory (LSTM) layers (Hochreiter and Schmidhuber, 1997) were employed for the first time. Kratzert et al. (2019c) then described the beneficial effects of adding static ~~information about the~~  
75 ~~locations~~ location information to the meteorological inputs, albeit in an aggregated manner. This type of model has since been demonstrated to ~~predicting~~ predict streamflow more accurately than models not based on neural networks, across a variety of locations and experimental setups (Lees et al., 2021; Mai et al., 2022; Clark et al., 2024). It also transfers more readily to ungauged basins (Kratzert et al., 2019b). Calibrating physical or conceptual rainfall runoff models usually requires hand-crafting ancillary input features to support the meteorological forcing variables, such as catchments’ climate type or hydrological signature (see Beven (2012) for an overview). Sometimes, the dataset ~~needs to be~~ is first partitioned into hydrologically homogeneous  
80 subsets, on which separate parameters are then calibrated (Beven, 2012). Neural networks do not require such human labor and in contrast profit from processing all catchments indiscriminately and with a single model (Kratzert et al., 2024). As we demonstrate in this study, neural networks can be stacked flexibly into a task-specific pipeline and trained end-to-end, without any manual calibration or intermediate steps. They are capable of extracting task-relevant information from a large array of potentially informative, raw static features (Kratzert et al., 2019c). These data sources can include categorical information such  
85 as land cover or soil classes, which can not be readily integrated into physical formulas. Neural networks can also leverage entirely new types of input data, such as large-scale remote sensing data (Zhu et al., 2023), concentrations of isotopes (Smith et al., 2023) and chemical compounds (Sterle et al., 2024). ~~As we demonstrate in our study, neural networks can be stacked flexibly into a pipeline designed for a specific task and trained end-to-end without any manual calibration or intermediate steps.~~ Additionally, In addition, research on the explainability of neural networks has been conducted by Kratzert et al. (2019a) and

90 Lees et al. (2022), ~~who~~. These studies focused on identifying hydrological quantities and concepts ~~in~~ within neural networks. ~~Similarly, using~~ Cheng et al. (2023) used an explainability framework ~~Cheng et al. (2023) to~~ extracted hydrological signatures from networks in a data driven fashion. Furthermore, ~~as shown in Jiang et al. (2022)~~ Jiang et al. (2022) show that the use of explainability methods can provide a better understanding ~~about~~ of the dominant flooding mechanisms across different catchments. Explainability is crucial for reliable operations in real-life applications because it allows for controlling of risk, ~~as well~~ as for. It also enables scientific discovery (Shen et al., 2018). In summary, LSTM-based models have been firmly established as state of the art in rainfall runoff modeling with a combination of consistently superior performance and addressing the most pressing concerns regarding reliability, even though many questions remain to be answered. Due to their flexibility, they are primary candidates for entirely novel approaches that will become more relevant as climate change gives rise to questions of human influence and multi-factor disasters.

### 100 2.2.1 Spatially Resolved Processing

Smith and Eli (1995), the first study on neural networks in rainfall runoff modeling ~~trained~~, train a simple, non-recurrent neural network on a five-by-five grid of synthetic data as a proof of concept. Another early example of semi-distributed processing is Hu et al. (2007). The authors evaluate the effect of lumping, but use only five rain gauging stations as input instead of a full grid, and a single catchment as a target. Xiang and Demir (2022), unfortunately not peer-reviewed, presents an architecture closely  
105 resembling the first stage of our model, which they call GNRMM-TS: Inputs are processed separately on a regular grid before being aggregated using a manually computed flow direction map. ~~Here, too~~, Also here the scope is limited to a single station and the only inputs are precipitation and drainage area of each grid cell. Xie et al. (2022) use LSTMs in a gridded fashion to estimate monthly baseflow instead of daily runoff. ~~But similar to us, they~~ They also include static information as inputs ~~and~~, but they train their model on hand-selected subgroups of catchments. Muhebwaa et al. (2024) propose a nuanced semi-distributed  
110 strategy, which instead of aggregating entire catchments, aggregates regions within a catchment that are similarly far upstream. The resulting set of input features for each region group are concatenated and jointly processed by a LSTM model. Hitokoto and Sakuraba (2020) is an interesting example of using an irregular vector-mesh rather than a regular grid. For each node, a conceptual model provides estimates of local runoff that are then aggregated by iteratively simplifying a mesh using a technique that is inspired by particle filters. Once coarsened to 96 nodes, they use a relatively simple four layer fully connected neural  
115 network for routing. This approach can be classified as semi-distributed When considering only the portion of the pipeline managed by the neural network ~~—i.e., i.e.~~ after the conceptual model’s outputs have been coarsened ~~—this approach can be classified as semi-distributed~~. Sun et al. (2022) also act on an irregular mesh, this time training a graph neural network on the outputs of a conceptual model. After this pre-training, they fine-tune the neural network on streamflow observations - an elegant way to deal with sparse empirical data in this context. However, their study ~~is also~~, too, is limited to a single smaller  
120 basin in the western United States, ~~and they have to~~. Because their model consists of complexly interleaved graph and time convolution layers, they rely on graph coarsening to ~~scale this approach up~~ be able to scale up this approach to another, larger basin, ~~as their model consists of complexly interleaved graph and time convolution layers~~. Yu et al. (2024) propose ~~to apply a~~



~~a combination of a~~ LSTM model on the catchment level ~~, then use and~~ a conceptual model ~~to route the predicted streamflows along the gauges in the river network for routing.~~

## 125 2.2.2 Routing

Routing refers to modeling the flow of water between gauging stations in a river network. Neural networks have been successfully employed for this task as well. ~~Within~~ In this context, streamflow at a given station is predicted from the streamflows of upstream stations alone, typically at an hourly resolution. At ~~this such high~~ temporal resolution, routing within the river system can ignore slower process like runoff generation or baseflow, and instead focus entirely on the movement of runoff along the river network. Since the stations within a river system can be conceptualized as nodes ~~of in~~ a directed acyclic graph, it seems natural to model this data with a graph neural network, although this term is fairly broad (Bronstein et al., 2021). Example of this approach include Moshe et al. (2020), Sit et al. (2021), Sun et al. (2021), Sun et al. (2022), Nevo et al. (2022) and Nearing et al. (2024) all of which demonstrated excellent performance in this setting. In comparison, the design of the routing stage in our model as detailed below is much more ~~minimal parsimonious~~ in order to give the user more fine-grained control and interpretability.

Another line of research investigates models that act on networks of rain gauges instead of a regular grid of inputs. ~~These~~ Such models can be considered semi-distributed as well. The general focus here seems to ~~lie more be~~ on finding suitable architectures for this task, combining self-attention, LSTM, convolution and more complex graph convolution layers. For example, Chen et al. (2023) intricately stack several LSTM layers to represent the river network structure, while Zhou et al. (2023) propose a mixture of self-attention, recurrency and convolution to build a graph neural network for this routing task. Zhu et al. (2023) aggregate remote-sensing rain data within each catchment in a data-driven fashion by training separate convolutional neural networks for every input product. They then concatenate each sub-basin’s lumped information with rain gauge data for further routing in a semi-distributed scheme. ~~The~~ This convolutional approach amounts to a more sophisticated form of lumping, as ~~integrating the different data sources as well as temporal modeling happens it is concerned with unimodal spatial integration of data that will be integrated and temporally modeled only~~ at a later stage, ~~once all spatial data has been fully aggregated~~. Hu et al. (2024) partially work on gridded data, namely remote-sensing measurements of rainfall. Each sub-basin is aggregated separately using a convolutional LSTM to produce a spatially aggregated timeseries of rainfall in the sub-basin, concatenate it with static information and recent runoff and continue processing this information in a semi-distributed fashion. The crucial difference here is that the convolutional LSTM serves as a data-driven aggregation mechanism for the gridded rainfall input data, but hydrological modeling again takes place in the semi-distributed domain.

## 2.2.3 CAMELS-type datasets

~~Apart from the studies which we just diseussed,~~ We have just discussed several studies featuring individual or a few select catchments, ~~Yet the bulk of~~ large-scale rainfall runoff modeling with neural networks has extensively featured the CAMELS dataset or one of its derivatives, based on Newman et al. (2015) and extended to its current form by Addor et al. (2017). It contains meteorological time series and ancillary data for 671 catchments located within the contiguous United States, manually

selected for minimal human impact. This implies that the catchments are relatively small, but on the other hand ensures "laboratory conditions" for hydrological modeling. The downside of this is the limited applicability of findings generated with this data to areas of the world where human influence contributes significantly to streamflow, such as central Europe. But as the dataset covers the contiguous US homogeneously, spans a large area, contains many catchments and with a wide variety of different climates, it offers optimal conditions for training neural networks. And so CAMELS rose to popularity together with the neural network approach in rainfall runoff modeling. Since then, similar ~~public~~ datasets were introduced to the public that cover other parts of the world: Chile (Alvarez-Garreton et al., 2018), Great Britain (Coxon et al., 2020), Brazil (Chagas et al., 2020), Australia (Fowler et al., 2021), the upper Danube basin (Klingler et al., 2021), France (Delaigue et al., 2022), Switzerland (Höge et al., 2023), Denmark (Liu et al., 2024) and Germany (Loritz et al., 2024).

## 2.3 Contributions

~~The~~ In this paper, we present three contributions that go beyond what we have discussed so far: We process the data in a spatially resolved manner without prior aggregation, we use a simple routing module that allows for interpretability, and we train this model in an end-to-end fashion on a novel, spatially resolved dataset in central Europe.

Spatially resolved processing takes place in the first or *local* stage of our model, detailed in Subsection 4.1. ~~Its architecture~~ largely follows the ~~architecture one~~ presented in Kratzert et al. (2019b), ~~but instead~~. Instead of using lumped basins as ~~input~~ inputs, we apply ~~a single the same~~ neural network in parallel to each cell of a regular grid of meteorological time series and ancillary inputs. ~~This novel kind of spatially resolved processing is enabled by modern GPUs with large memory.~~ We show that this finer spatial resolution allows us to capture co-variances and provide regularization, ~~benefiting especially~~ benefiting larger catchments. This approach is natural for physical or conceptual models ~~, which have to that~~ solve local equations at a ~~certain level of given~~ rasterization. Yet, no one to our knowledge has applied a neural network directly to the grid of inputs in a way that scales up to entire river basins.

~~The right panel of Figure 6 visualizes the output of the local stage in an exemplary fashion. These local runoff quantities are then mapped onto a river network in the~~ The local stage yields a local runoff quantity for each grid cell, exemplarily visualized in the right panel of Figure 6.

~~The~~ The second or routing stage ~~described in Subection 4.2. It consists of~~, detailed in Subsection 4.2, consists of only two simple network layers without any nonlinearity. ~~, efficiently mapping these local runoff quantities onto a river network. Both stages are trained jointly in an end-to-end fashion on the entire dataset, rendering any kind of expert knowledge obsolete. This also means that the model is fitted exclusively on empirical data, enabling scientific discovery from raw data.~~ We show that the river network connectivity graph can be used as inductive bias to constrain the model to reproduce the river's natural layout. This increases data efficiency and allows for better interpretability. ~~Below we discuss that~~ We explain how in principle, although this has yet to be shown in practice, the model can be controlled interactively: Extracting or injecting quantities of water can simulate human influence such as industrial, agricultural or hydroelectric energy generation activity, which significantly contributes to streamflow but is independent of the modeled hydrological processes. ~~Both stages are trained jointly in an~~

end-to-end fashion on the entire dataset, rendering any kind of expert knowledge obsolete. This also means that the model is fitted exclusively on empirical data, enabling scientific discovery from raw data.

The ~~Lastly, the~~ lumped datasets discussed above are unsuited for ~~our approach, as it requires non-aggregated information for spatial processing as well as entire basins for routing~~ this spatially resolved modeling approach, since it requires both non-spatially-aggregated inputs and streamflow data for entire basins. Hence, for this study we compiled gridded meteorological and static data as well as river streamflow records for five entire basins in central Europe. ~~These basins are~~ characterized by an overall high level of human activity, compared to the CAMELS dataset. The data is publicly available and described in more detail in Vischer et al. (2025, under review).


### 3 Data ~~and~~ Methods

As discussed above, previously released datasets for rainfall streamflow modeling are unsuited for spatially resolved processing, so we compiled a new, publicly available dataset, referenced in the data availability statement. We present the data sources, preprocessing steps and ~~how to handle the files~~ practical aspects in more detail in a separate publication (Vischer et al., 2025, under review). The river discharge data that we use as targets for training ~~and the catchment information as well as the catchment metadata~~ from which we derive the river connectivity ~~information is publicly available for download is available~~ from the original provider. We provide code that processes and combines it with the input data after manual download. ~~The following subsections give an overview of the data, followed by an introduction of our neural network.~~


#### 3.1 Study Area, Study Period and Resolution

~~The focus of our study is on~~ Our study covers five river basins ~~covering in~~ Germany and parts of neighboring countries: Elbe, Oder, Weser, Rhine as well as the upstream part of the Danube river up to Bratislava (see Figure 1c, right panel). Due to the sparser coverage of gauging stations in the lower reaches of the Danube basin, we decided to focus on the upper reaches where the station network is more homogeneous. Additionally, the placement of river gauging stations varies across countries, as each follows distinct policies for station location. From a machine learning perspective, this results in diverse sampling strategies across the river network. We ~~restricted our study to this region to prevent variations in sampling distributions from affecting the assessment of routing performance. We~~ decided to limit our study to this region so as not to confound the performance of routing with such different sample distributions. The total study area covers a contiguous 570.581 km<sup>2</sup> area ~~of Germany and neighboring countries~~. Figure 1c also visualizes exemplary features in the study area with boundaries of the river basins and Germany for geographic reference. Based on the consistent availability of streamflow data, we decided to conduct our experiments on the water years 1981-2011. A water year lasts from October 1st of the previous year to September 30th. Due to data availability, we homogenized all input data to daily temporal resolution and regular grid ~~covering the that is compatible with the ERA5-Land dataset (Muñoz Sabater, 2019) and covers the~~ earth's surface with a spatial resolution of 0.1° × 0.1° or


<sup>2</sup>Orography was adapted from the European Space Agency's Copernicus Global 90 m DEM (GLO-90, doi:10.5270/ESA-c5d3d65) © EuroGeographics for the administrative boundaries in panel (a) and (c).

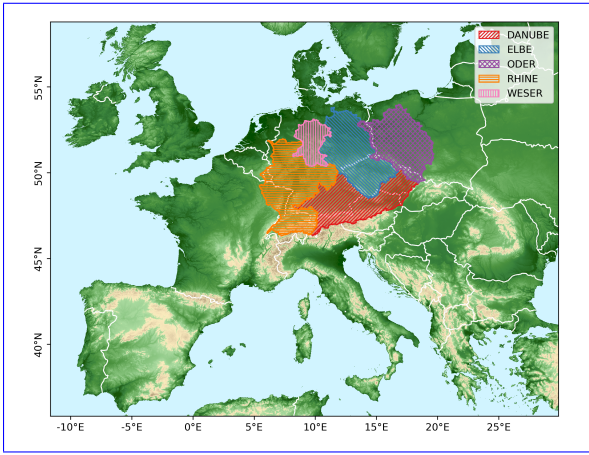

(a) Study Area

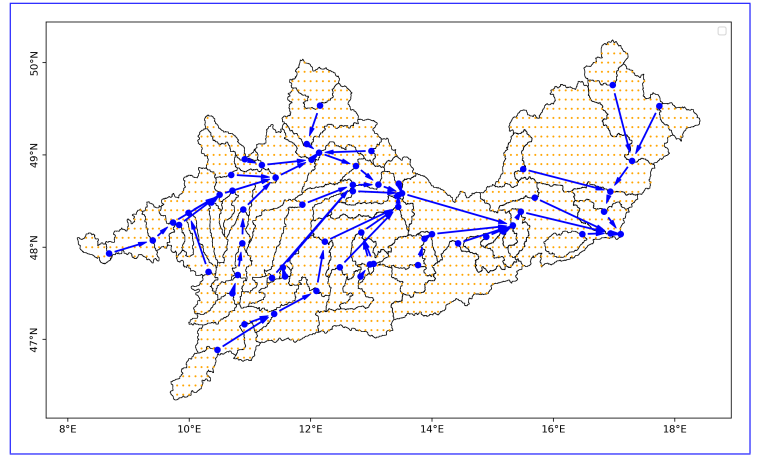

(b) Input Grid and Station Network in Upper Danube Basin

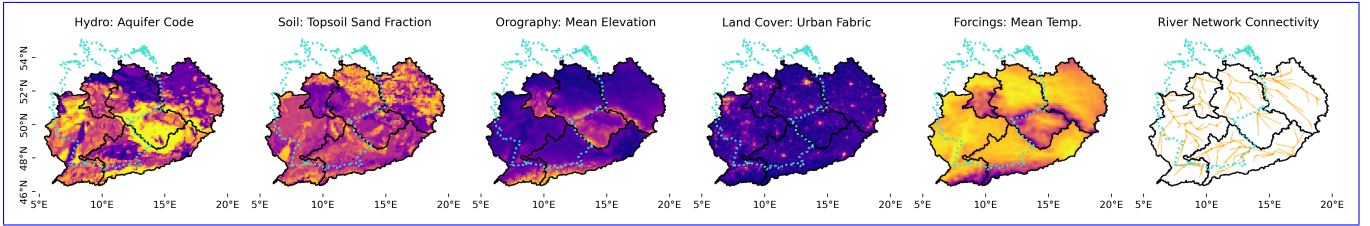

(c) Examples for each Input Type

**Figure 1.** Overview of study area, input grid and data types. (a) The study area comprises 5 basins that cover a contiguous area in central Europe<sup>2</sup>. (b) Cells of input grid (orange) for Upper Danube basin. Catchment boundaries (black) are overlaid with corresponding stations (blue), as well as connecting arrows representing the station connectivity network. Cells along catchment boundaries are assigned entirely to the catchment that contains their center point. (c) Visualizations for one example feature of each type of input. Basin outlines (black) and borders of Germany (turquoise) are plotted for reference.

roughly  $9km \times 9km$ . If a grid cell is located along a catchment boundary, we assign it entirely to the catchment that contains the cell's center point. This avoids having to represent fractional cells in the pipeline and seemed an acceptable trade-off for the sake of simplicity, considering that the area covered by each grid cell is relatively small.

Overview of study area and visualizations for an example feature of each type. Basins are outlined in black, the boundaries of Germany are shown in turquoise. The right hand panel shows additional river network information as yellow arrows.

### 3.2 Dynamic Input Data

Runoff is primarily driven by precipitation, but to properly capture processes like evaporation or snow dynamics, temperature and solar radiation need to be taken into account as well. Our meteorological input variables, also called to properly capture processes like evaporation or snow dynamics. Thus, our metrological input variables or forcings are thus daily minimum,

average and maximum temperature, daily sum and standard deviation of precipitation and average potential evaporation - a score computed from radiation, temperature, air pressure and humidity. This set of variables is widely used in previous studies (Kratzert et al., 2018, 2019b) and was retrieved from ERA5-Land (Muñoz Sabater, 2019). The variables, downloaded at three hour intervals, were aggregated to a daily time step to match the time resolution of the target ~~-.These time series were obtained by aggregating daily the values contained in the ERA5 database time series.~~<sup>3</sup> (CopernicusClimateChangeService, 2022). We amend these six meteorological input ~~dimensions~~ features with two more sine-cosine embeddings of day of the week and day of the year, which can be considered as a coarse proxy to human activity (Otero et al., 2023).

### 235 3.3 Static Input Data

Following the insights from Kratzert et al. (2019c) and Shalev et al. (2019), we include static data, also ~~termed ancillary data, to enable genuinely data-driven and transferable models, trained~~ called ancillary data with the aim of training models jointly on all locations and thus increasing transfer performance. Specifically, we include hydrogeological properties, soil class, land cover, and orographic features derived from a digital elevation map for a total of 46 feature dimensions. Please refer to ~~(Vischer et al., 2025, under review)~~ Vischer et al. (2025, under review) for a detailed description of the origin and pre-processing steps of all input features. ~~Cheng et al. (2023) demonstrated that relevance propagation could help to streamline the model's inputs by identifying~~ The number of inputs could be streamlined in the future, as Cheng et al. (2023) shows how relevance propagation identifies non-task relevant features.

### 3.4 Target Streamflow Time Series, Station Information and River Networks

245 Target time series of streamflow at each station were obtained from the Global Runoff Data Center (GRDC) data portal. Together with the streamflow data, the GRDC offers a catalog of station information. We considered all stations in the station catalog, but excluded stations that had ten or more values missing in the time series for the selected study period. Furthermore, initial experiments showed that including stations with less than 500 km<sup>2</sup> drainage area in training decreased performance, even when evaluating exclusively on larger stations. We decided to exclude these small catchments, and discuss this decision in  
250 Section 6. Another natural limitation on the spatial scope of this approach is that it only captures rainfall-streamflow dynamics in locations contained in the drainage area of a gauging station. In coastal areas, runoff might directly enter the sea through smaller streams that are not gauged. Hence, our study area usually starts several kilometers inland from the sea. The following number of stations resulted in each basin: 62 in upper Danube, 34 in Elbe, 36 in Oder, 78 in Rhine and 29 in Weser basins, for a total of 239 stations. For comparison, the CAMELS dataset contains 671 catchments. Further visualizations of the river  
255 networks can be inspected in the preprocessing scripts, along with all details on how the metadata was processed.


---

<sup>3</sup>The dataset was downloaded from the Copernicus Climate Change Service (2022). The results contain modified Copernicus Climate Change Service information 2020. Neither the European Commission nor ECMWF is responsible for any use that may be made of the Copernicus information or data it contains.

## 4 Methods

This section provides detail on our model’s local and routing stage. This is followed by an explanation of how the river network connectivity graph is calculated and integrated into the routing stage of the model as inductive bias. We then describe the end-to-end training process and which metrics and baselines were used in our experiments.

### 4.1 Model Local Stage (H)– Modeling Spatially Resolved Runoff

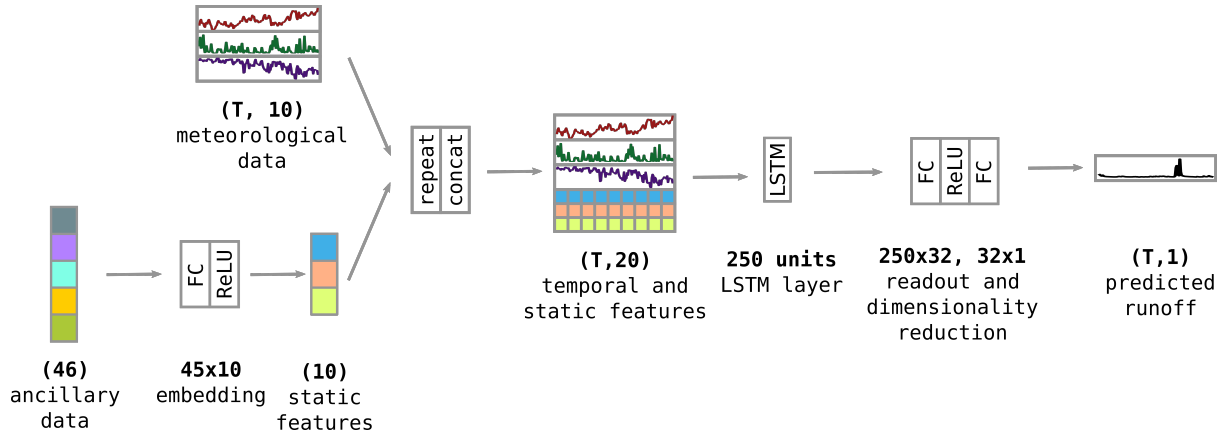

**Figure 2.** Overview of the local stage of the network architecture, acting in parallel on each of the regular-grid input. Each grid cell’s static cells. Static inputs are reduced to ten features by feeding them through a simple, fully connected embedding layer and applying a nonlinearity function. The resulting feature vector is repeated for every time step  $T$  of the meteorological forcing time series and concatenated for a total of with the time series. The resulting 20 features are fed into the through a 250-unit LSTM layer consisting of 250 parallel units. The recurrent layer’s output is then reduced to the a 1D output time series by sequentially applying two fully connected readout layers plus a nonlinearity in between. Numbers in parentheses signify feature vectors at a given stage in the model pipeline, numbers without parentheses signify the size of the weight matrix of a given layer’s weight matrix.

Figure 2 visualizes the simple network architecture used in the local stage to predict locally generated runoff. The task of the model’s local stage is to integrate all input modalities and predict local runoff quantities on a regular grid. These local quantities are then fed through the routing layer described in the following subsection. As mentioned before, following Kratzert et al. (2019b) we add we follow Kratzert et al. (2019b) by adding static information to the meteorological inputs. This input and adapting their original model design for the local stage. While this model was originally conceived to model aggregated catchments, but we adapt the design and used on aggregated catchment time series, we apply it to all grid locations in parallel, which are then fed into a routing layer. Our pipeline features 46 static input dimensions, which we reduce to ten by adding. Also contrary to the original design, we add a simple, fully connected embedding layer. The resulting static features layer that reduces the 46 static input dimensions down to ten dimensions. They are concatenated with another ten dimensions of meteorological forcings. The for a total input dimensionality to the LSTM layer is thus of 20 in our case, compared to 32 in the




case of Kratzert et al. (2019b). Their LSTM layer consists of 256 units, ours of 250. However, we reduce the 250 output values of the LSTM layer by using two regression layers instead of one. We do not employ a nonlinearity after the second readout layer, meaning that the network's outputs are not confined to the range of e.g.  $[-1, 1]$ , but rather live in the range of actual, physical quantities. ~~The model itself~~ Figure 2 visualizes the simple network architecture. In summary, the routing stage of our  
 275 ~~model is largely identical to the model used in Kratzert et al. (2019b) with a few small modifications. We want to emphasize here that the model~~ does not have any predictive capabilities ~~, but produces a forecast of streamflow if the inputs lie in the future, i.e. are taken from a meteorological forecast~~in itself. It uses meteorological forecasts to produce a forecast of runoffs.

In an exploratory experiment, we compared concatenating static inputs to dynamic inputs before and after the LSTM layer. Feeding the static inputs through the LSTM together with the dynamic inputs resulted in substantially better performance. This  
 280 is consistent with the findings of Kratzert et al. (2019b) and can be explained by the static inputs helping the LSTM to better adapt to the hydrological dynamics of a location. ~~This~~ It is similar to training separate models for different climatic zones, but in a data-driven fashion. Indeed, Cheng et al. (2023) show that clustering on the relevance values of the different inputs results in hydrologically plausible clusters. Concatenating all features before feeding them through the LSTM layer requires more parameters in this layer, which due to its intricate inner workings is particularly expensive to train in terms of data and  
 285 compute. We also used gated recurrent units (GRU) (Cho et al., 2014) instead of LSTMs as a backend, which mitigates this problem a little because they are computationally more efficient. We found that they do not affect performance, but decided to stick with LSTM as our main backbone as it is more ~~popular~~ common in the literature. Nevertheless, using GRUs could be another way to further optimize the model.

#### 4.2 Model Routing Stage (2)- ~~Mapping Integrating~~ Local Runoff ~~to the River Network~~ and Routing

290 The task of the routing stage of our model is to map the locally generated runoff to a station's catchment area, and then routing the runoff along the river network to predict streamflow time series for every station in the basin. Figure 3 visualizes the layout. Within a given river basin, we concatenate the predicted runoff time series of all grid cells. The network learns a simple, strictly linear mapping consisting of two layers: First, a fully connected layer without nonlinearity maps all grid cells  $G$  to their respective stations  $S$ . Since no nonlinearity is added, this layer can be translated into a weighted, time dependent average  
 295 of all grid cells within a catchment. Location information from the station catalog, described below, can be used as an inductive bias to constrain this layer so as to only route water in a physically plausible way. Then, a 1D-convolution layer (Kiranyaz et al., 2021) performs time convolution on each station's time series to combine information inside the river network over the last nine days. Separate kernel values can be learned for each day, but the same kernel is applied jointly over the entire time series. The ~~value~~ kernel length of nine days was chosen as a conservative estimate of the maximum time that ~~water would be~~  
 300 ~~running inside the~~ it would take water to run along the entirety of any of the river networks considered in this study, but of course awaits empirical validation and further optimization. The kernels in this layer are constrained by the connectivity of the river network in order to be physically plausible as we explain in the following subsection. Crucially, this stage does not involve any nonlinearity. Hence, both the fully connected as well as the time convolution layer are linear functions and as such can be chained to form yet another linear function. This means that the quantities of water "flowing" through this pipeline are



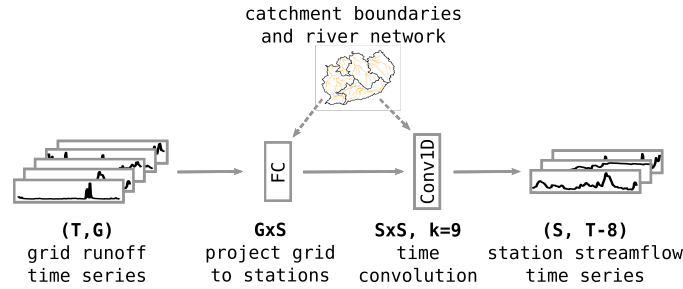

**Figure 3.** ~~Runoff~~ Overview of the routing stage of the network architecture, acting on the output of the local stage. The local runoff time series ~~for every of all grid cell within cells in a given basins basin~~ are concatenated ~~and~~. Together, they are fed through a fully connected layer that projects them down onto the number of ~~the basin's~~ stations. The weight matrix in this layer is constrained to be non-zero only ~~when-if~~ a grid cell lies in the catchment of a given station. The stations' time series are then time-convolved with a kernel length of 9 time steps ~~to model he flow of water in between stations~~. Each ~~Again, each~~ kernel is ~~also~~ constrained to be only non-zero ~~only~~ if a given station is directly upstream of another station. ~~This~~ The routing stage yields time series for all stations in the ~~network~~ basin. It does not include any nonlinearity, so all activation values can be interpreted as streamflow quantities. The basin map ~~icon~~ and dotted arrows indicate that the river connectivity information serves as inductive bias on these two layers, constraining the activations to replicate the real river network.

305 physically interpretable, ~~or put differently, that~~. ~~Put differently~~, input quantities can be added or subtracted meaningfully to and from the input. A practical application example of this, which we plan to further investigate, is the injection or extraction of water in between two stations ~~as a result of to simulate~~ agricultural, industrial or hydroelectric human activity. This sets our approach apart from previous routing approaches. We also investigated the effect of not constraining the weight matrices with the connectivity matrices, which leads to slightly poorer performance when data is scarce (see Subsections 4.5 and 5.5).

### 310 4.3 Structural Bias

~~Among many other kinds of information, the station catalog contain polygons describing~~ The station catalog contains polygons ~~of~~ each station's catchment area. From this, we can derive two important kinds of information: ~~first~~ First, for every grid cell we can determine in which station's catchment it is located; ~~second~~. Second, for each station ~~we~~ we can determine how it is connected to upstream and downstream stations. ~~This subsection explains how this information is extracted and how we use it~~ ~~as structural inductive bias to constrict the routing layer to only consider physically plausible routes of water flow.~~

#### 4.3.1 Catchment Matrices

Mapping grid cells to stations is important to ensure that the runoff predicted at a given location ends up at the only station that is physically plausible. Since a given station's catchment area is contained within all the downstream stations' catchment areas, we need to make sure that we select the one where the generated runoff first enters the river network. To do so, we

320 select the station with the smallest catchment area that contains a given grid cell. For each river network, we represent this information conveniently in a one-hot matrix with grid cells as rows and stations as columns. This matrix is then used to

constrain the fully connected layer in the routing stage of the network. This is achieved by multiplying the one-hot matrix point-wise with the freshly initialized weight matrix of this layer before training begins. Weights corresponding to physically impossible connections are thus set to zero from the start. Zero weights can not contribute to gradients, and will remain zero throughout the training. All other weights ~~can be freely~~ are free to be optimized.

### 4.3.2 Connectivity Matrices

From the catchment area polygons, a graph representing the connectivity between stations in the river network can be derived. Each node in the graph represents a station, a directed edge exists between a station  $A$  and  $B$  if  $A$  is directly upstream of  $B$ . We determine this by verifying if the catchment area of  $A$  is contained in the catchment area of  $B$ , ensuring that there are no intermediary stations in between, i.e. contained by  $B$  and containing  $A$ . Note that this automatically leads to a directed, acyclic graph. This fits our approach well, as it does not require us to apply any model of routing iteratively in order to capture cyclic movements within the graph. The graph is represented by a connectivity matrix, i.e. a square matrix with rows (input) and columns (output) corresponding to stations, where the entries are 1 if a directed edge exists and 0 otherwise. This matrix is used to constrain the time convolution layer in a manner similar to the catchment matrix. After initialization of the weight matrix, the connectivity matrix is multiplied point-wise, preserving the weights where a connection exists and setting them to zero where no connection is present. The only difference is that the connectivity matrix needs to be repeated by the depth of the temporal convolution, nine times in our case for the nine days of past information that we convolve.

## 4.4 Training and Metrics

We split the data into three parts, all containing entire water years: A training set from water years 1981 to 2005, a validation set for model selection from 2005 to 2008, and a test set to report the final performance from 2008 to 2011. We also created two special training datasets to illustrate how the models perform on less training data: A medium length training set ~~comprising~~ ranging from 1991 to 2005 and a short training set from 1999 to 2005. Regardless of the length of the training set, we divide it into chunks of 400 days that partially overlap. The first 30 days are used as a warm up period for the LSTM. During this time no gradients are computed and the LSTM can stabilize into an operating regime before starting the learning process. The value of 400 was chosen to accommodate an entire year plus the warm up period, while still being able to fit the gradients calculated during training into GPU memory. It would not be detrimental to use even longer time series ~~, but this cutoff is dictated by GPU memory space. When calculating scores and the model is capable of processing time series of arbitrary length. In fact,~~ no gradients are computed ~~, resulting in a significantly smaller memory footprint. This allows us~~ during inference, which significantly reduces the memory footprint and allows us to calculate all ~~scores~~ metrics on uninterrupted time series in a single model forward pass. In all experiments, we trained for 2000 epochs of the training data. This number of epochs is generous for all models to converge. Since the purpose of this study is to provide a proof of concept of this type of spatially resolved processing, we decided to not conduct an extensive hyperparameter optimization or perform input feature ablation. Instead, we included all potentially relevant static data and ran hyperparameter tuning experiments only on a limited set of

values for a few key hyperparameters, summarized in Table A3. We trained ten different random seeds for every setting, and  
355 report the best seed in terms of station-wise median Nash-Sutcliffe Efficiency (NSE) score on the ~~validation~~-test period.

We use the widespread NSE metric (Nash and Sutcliffe, 1970) both as a loss function in training as well as a score to quantify performance. The NSE normalizes the square loss of each station by the standard deviation of the station’s values in the training period, so as to count each station equitably towards the loss or performance, regardless of the magnitude of the river at this point. We do not split training and test partitions geographically, as breaking up basins would make routing impossible. We  
360 also refer to Klotz et al. (2024) for a word of caution when combining NSE values that are calculated on partitions of a dataset. Unless noted otherwise, the scores we report were calculated on the test period. The median NSE over all stations serves as a robust point estimate of performance, but for the interested reader we provide mean NSE scores in Table A1, which we found to correlate strongly with the median NSE for all seeds. Likewise, we report the percentage of stations with a NSE score below zero, which indicates predictive performance worse than simply using the average value of a station’s runoff for prediction, i.e.  
365 chance level. The popular Kling-Gupta efficiency (KGE) metric (Gupta et al., 2009) was developed in the context of univariate, convex optimization - both these assumptions do not hold in the case of training a neural network. However for the sake of comparability, we also report the KGE values in the appendix as well.

As stated before, in this study we refrained from extensive hyperparameter optimization to maximize the performance. A few exploratory experiments to calibrate our pipeline seemed necessary nonetheless: Dropout (0, 10%, 30%, 50% separately  
370 in recurrent and readout layers of the routing stage) did not increase performance, so we removed it entirely. 250 units in the LSTM layer (out of 150, 200, 250 and 300) yielded the best results. We use an automatic learning rate scheduler, the ReduceLROnPlateau scheduler provided by Pytorch (Ansel et al., 2024) with threshold 1e-3 and patience 10, so the pipeline trains robustly with regard to the initial learning rate (1e-4, 5e-4, 1e-5). But as the baselines in the experiments have vastly different number of parameters, we decided to continue the experiments by always trying out both of the lower values. Unless  
375 ~~explicitly~~-explicitly mentioned, we report the performance resulting from the better value for every condition, table A3 lists the results in detail.

## 4.5 Baselines

We introduce two baselines in order to evaluate the performance gains of the two central aspects of our pipeline: spatially resolved processing in the local stage and the inclusion of structural bias in the routing stage. In the first baseline experiment,  
380 we aggregate all spatial information within a catchment and feed it through the same architecture as used in the local stage. Normally, this stage of the model processes individual grid cells, ~~but~~-But here it processes entire, aggregated catchments, and the output is a prediction of the runoff measured at the corresponding station. ~~This~~-The aggregated baseline does not require any further routing ~~and is virtually~~-. This model and processing pipeline is identical to the approach in Kratzert et al. (2019b) -We will use this as baseline and coin it one in Kratzert et al. (2019b), apart from the small differences in parameter values listed in Subsection 4.1. As we discussed above, it has been widely used in the literature since its introduction, which allows us to compare our own results from our custom dataset to a wider body of literature. We will call this baseline aggregated,  
385 whereas our default model is-will be referred to as *spatially resolved*.

The second baseline leaves the local stage unaltered, ~~while but does not constrain the weight matrices~~ in the routing stage ~~the weight matrices are not constrained~~. Instead, we use two fully connected time convolution layers with a kernel size of nine and three days, respectively, and a nonlinearity in between, ~~as simple and more conventional neural network approach~~. The design is intended to be more simple and conventional for neural networks. We will refer to this baseline as *naive routing*, and to our default model as *structured routing*.

## 5 Results and Discussion

We start this section by presenting and contextualizing the general performance of our model. We then show that our model excels in modeling large catchments, is less prone to overfitting and learns from the data more efficiently than the baselines. Inductive bias does not make a big difference to performance. We end this section by showcasing that our model is, unlike most neural networks, not an entirely black box model, and that capturing human influence seems to be the biggest challenge in our study area.

### 5.1 Model Performance


~~Our model reaches~~ The aggregated baseline achieves a median NSE ~~performance on the test dataset~~ test performance of ~~0.77~~. ~~This is on par with the~~ 0.69 on our dataset. As discussed above, it is virtually identical to the model from Kratzert et al. (2019b), who report a median NSE of 0.74 ~~reported by Kratzert et al. (2019b) and on the CAMELS dataset~~. These results were subsequently confirmed, small modifications of the model parameters or test period notwithstanding, by Shalev et al. (2019) (median NSE 0.73 ~~reported by Shalev et al. (2019), both on the CAMELS dataset~~ - Training-), Acuña Espinoza et al. (2024) (median NSE 0.75) and Frame et al. (2022) (median NSE between 0.72 and 0.81). We conjecture that our baseline performance is probably lower due to our dataset being smaller than CAMELS and likely containing greater human activity. Turning to other regions, the same model was used for example by Mai et al. (2022) for the Great Lakes Area (median KGE of 0.76), by Lees et al. (2021) for Great Britain (median NSE 0.88) and by Loritz et al. (2024) for Germany (median NSE 0.84). The latter two results go against our conjecture for inferior performance due to human signal. The fact that Loritz et al. (2024) use an ensemble of models might be a factor at play, but in any case this requires further investigation. These studies provide valuable comparisons with other model types: In all studies just mentioned, the authors compared the neural network model against a variety of physical, conceptual or hybrid models and consistently found that the alternatives were outperformed by the neural network.

Our model achieves a median NSE performance on the test dataset of 0.77 compared to the baseline of 0.69 and thus appears to be able to compensate somewhat for the more demanding modeling context. Only training and testing our model on a spatially extended version of CAMELS would allow for more direct comparability with other approaches, ~~but~~. Unfortunately this has to be left for future research. ~~The aggregated baseline only achieves a median NSE of 0.69. This is a first indicator that our spatially resolved modeling pipeline is able to compensate our dataset being smaller than CAMELS and probably containing a larger human signal. Despite~~ as it requires creating a spatially resolved version of CAMELS first. In any case,

420 despite the data being different and not allowing for a straightforward comparison, this shows that runoff generation and routing can be learned end-to-end by a single model pipeline and without additional data along the way. Moreover, the simplicity of the routing module’s design, along with the possibilities it offers, does not come at a significant performance cost. An example in case is that the internal activations inside the network between local and routing stage appear to be hydrologically plausible, as Figure 6 illustrates, ~~despite not enforcing this property~~. We want to stress that this is an emergent property and was not  
 425 incentivized during training.

## 5.2 Modeling Large Catchments

~~Figure 4 compares our model and the aggregation baseline, depending on the catchment area and separately. Do larger catchments benefit more from spatially resolved processing like we expected? Figure 4 shows the effect of catchment size on per-catchment performance, comparing our spatially resolved model to the aggregated baseline for training and testing~~  
 430 periods. We focus on the test results first (right panel): For aggregated processing, we observe a negative trend between performance and catchment size, ~~which does not exist for spatially resolved processing. This is expected, as the benefits of~~. This might be explained by the assumption that underlies spatial aggregation, namely the homogeneity of the aggregated area, not holding for large catchments. Indeed, the trend is reversed for spatially resolved processing~~are more pronounced for larger catchments, which tend to be more heterogeneous, where larger catchments outperform smaller ones.~~ Our results suggest  
 435 that spatially resolved processing should be considered ~~in such situations~~ particularly when modeling large and heterogeneous catchments.

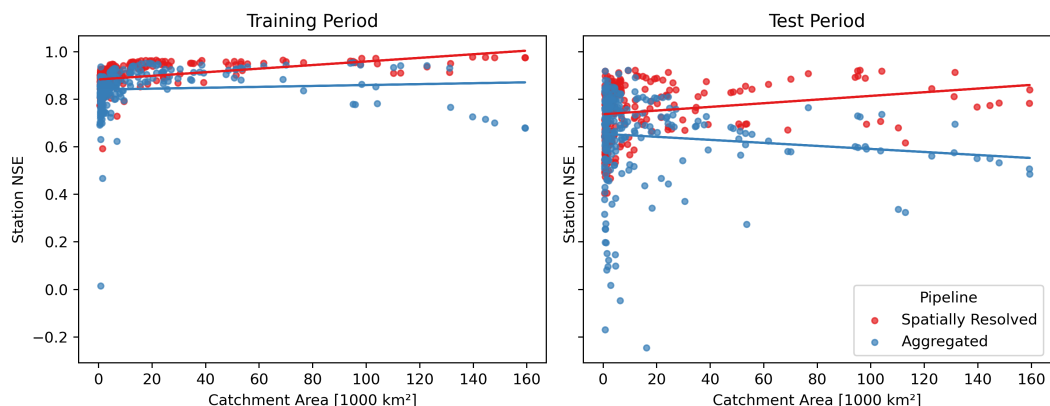


**Figure 4.** ~~Station-wise~~ Effect of catchment size: Each point corresponds to a station’s performance vs. the size of its catchment, for aggregated baseline (blue) and spatially resolved pipeline (red) on training (left panel) and test (right panel) period. The individual data points are fitted linearly to show the trend. Aggregated processing impairs performance, especially in larger catchments. The trend is more pronounced on the test dataset, indicating overfitting on the training dataset. Spatially resolved processing is less prone to overfitting and manages to handle large catchments accurately in a low data setting.

### 5.3 Inherent Regularization

A comparison between the left and right panel of Figure 4 reveals a substantial performance drop between train and test period. To a certain degree, this is ~~expected, but normally to be expected due to overfitting.~~ But the effect is much more pronounced for the aggregated than for the spatially resolved model. It stands to reason that the neural network in the aggregated baseline with its associated reduction of data ~~severely overfits-overfits severely~~. This also becomes apparent when looking at the median NSE values in training and test datasets. While overall performance drops from 0.86 in training to 0.69 in ~~the case of test~~ for aggregated processing, spatially resolved processing deteriorates more gracefully from 0.90 to 0.77. Spatially resolved processing, with its shared local stage and overall much more data, seems to have an intrinsic regularization effect.

### 5.4 Data Efficiency

The positive effect of spatially resolved training, especially for large catchments, becomes even more pronounced when looking at modeling in an environment with limited available training data. Figure 5 visualizes the difference in NSE score between spatial and aggregated processing on a per-catchment level, when training on 25, 15 and six years of training data. ~~While differences-Differences~~ are positive across all sizes of catchments, meaning spatial processing on average performs better regardless of the catchment size, ~~Yet~~ the positive trend becomes stronger as data becomes more scarce. Spatially resolved processing utilizes the available data more efficiently.

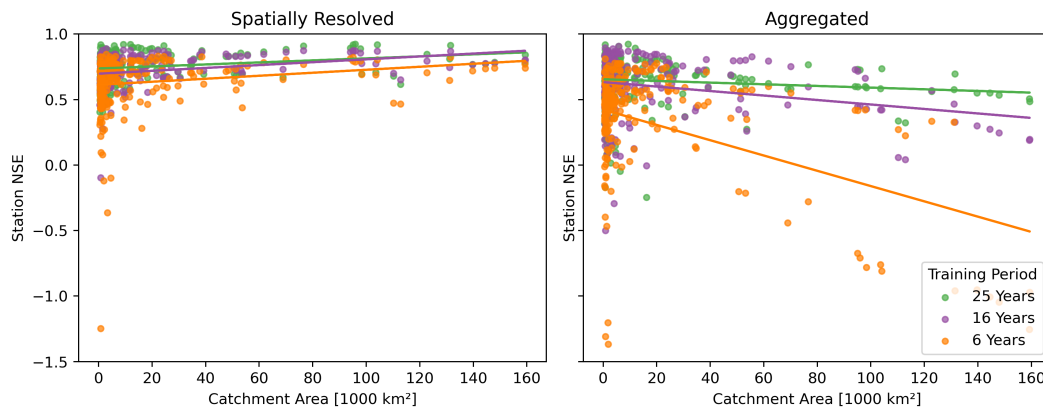

**Figure 5.** ~~Station-wise differences in NSE performance between spatial and aggregated training, plotted against the size~~ Effect of the training period length: Each point corresponds to a station's catchment. Positive values indicate that spatial processing performs better. The individual data points are fitted linearly. Colors correspond to NSE test performance after training for 25 years of training data (green), 15 years (purple), and 6 years (orange). Differences are positive across Across all catchment sizes and different amount-amounts of training data. But as data becomes scarcer, the trend of spatial processing-outperforming pipeline (left panel) outperforms the aggregated processing in large catchments becomes-baseline (right panel). The latter's performance deteriorates quickly when training data is scarce. The spatially resolved pipeline is much more pronouncedrobust in this regard, demonstrating its increased data efficiency.

## 5.5 Inductive Bias

Including inductive bias for what we call structured routing leads to slightly better performance than naive routing without the additional real-world information, ~~with resulting in~~ a median NSE of 0.77 compared to 0.72. Figure A1 contains more detailed results, but also shows that the performance gain is small. The point we want to make here is that the practical benefit of being able to simulate the injection or extraction of quantities of water in routing process does not come at the cost of lowering performance. As we mentioned before, naive routing on the other hand does remain an important tool in modeling basins where catchment delineation information is unavailable or unreliable, or where lateral transport of water inside the bedrock layer across catchment boundaries is suspected. Whether or not we use inductive bias in the routing layer, our networks are extremely simple compared to other networks proposed in the literature for routing that we discuss above. Certainly, we demonstrate that routing modules do not need to be complex, and river network extraction algorithms are not necessary for end-to-end routing, e.g. when no catchment boundary information is available.

## 5.6 Interpretable Internal States

~~The simple architecture of our model, particularly the shared recurrent layer in~~ Internal states of neural networks are usually not interpretable. In our case, however, the activations of the final layer of the local stage ~~and inductive bias and linearity of the routing stage, lead to interpretable internal states within the network~~ which would go into the routing module stage of the model appear to be hydrologically plausible. As an illustrating example, Figure 6 displays ~~the activation values after the local stage and before the routing stage~~ these activation values for two exemplary days in spring and summer. The spatio-temporal correlation seems to suggest that in the example day in spring, runoff is primarily driven by snow melt in low mountain ranges, whereas in summer, it seems to be driven by heavy precipitation events. We want to make the point that ~~these activations are hydrologically plausible, yet~~ we did not enforce this property during the training process, e.g. by providing additional target information or training a special readout layer. ~~It~~ This is a purely data-driven, emergent behavior, resulting from both the end-to-end training process and the model's parsimonious design. ~~Particularly, we attribute this phenomenon to the shared recurrent layer in the local stage and the combination of inductive bias and linearity of the routing stage.~~ Unlike more complex neural network designs which are generally considered black box models, this suggests that our model naturally allows for a certain degree of internal control by manipulating ~~the internal states (e.g. these internal states, e.g. by~~ subtracting or adding quantities of water to the natural runoff), ~~as well as enabling~~. ~~It also creates new opportunity for~~ further scientific discovery from large quantities of data.


## 5.7 On Human Influence

We conclude this section by discussing a specific negative outlier in terms of station-wise NSE. As explained above, a negative NSE values indicates performance below chance level. The only two stations that yield negative NSE values after training - consistently across all ten random seeds - are Spremberg and Boxberg (GRDC numbers 6340800 and 6340810) located along

---

<sup>3</sup>~~The country boundary information was downloaded from simplemaps.~~



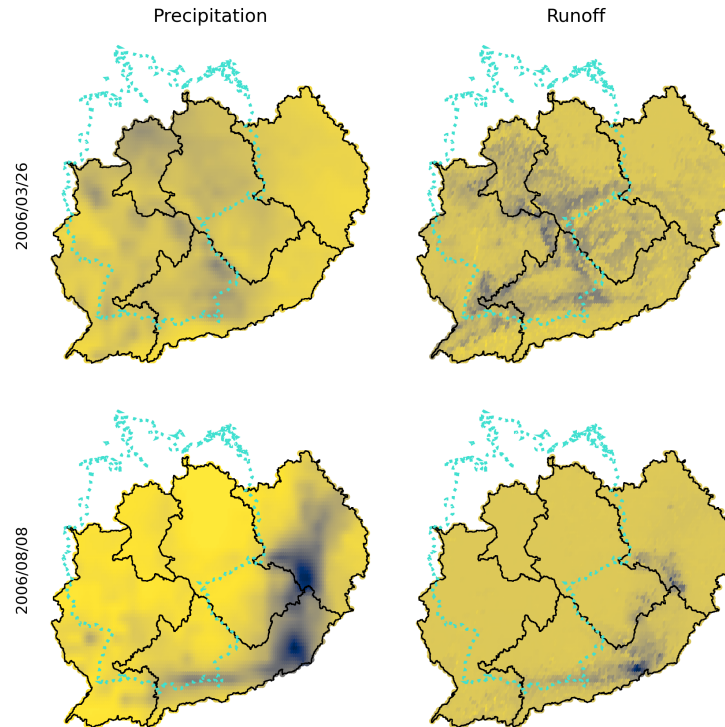

**Figure 6.** Input feature Internal states of the model are hydrologically interpretable. This figures shows precipitation data from the input (left column) and activation values after the local stage of the model (right column) for two days in March (top row) and August 2006 (bottom row). The days were manually selected for illustration purposes. Values are displayed in arbitrary units, with blue signifying more runoff or precipitation. We included the outline of Germany (© EuroGeographics for the administrative boundaries) in dotted lines for geographic reference. For the day in march-spring (top row), a low spatial correlation between precipitation and runoff together with a pattern of high runoff values in low mountain ranges suggests that runoff on this day is primarily driven by snow melt in medium-high-intermediate altitudes. For the day in August-summer (bottom row) on the other hand, we see runoff that is driven by two clusters of heavy precipitation in the East eastern part of our study area.

small rivers next to large brown coal surface mining operations in the Lusatia region. A potential explanation for these extreme outliers is that those mining operations have an influence on the overall water balance that is relatively large compared to the hydrological processes in such catchments. This seems to support our assumption that human influence is one of the main obstacles to be overcome by rainfall streamflow models in the densely populated areas of central Europe. We want to emphasize that the two stations in question only performed very poorly in the validation period, but not in the test period. We hypothesize that operations might have changed in the meantime or the test period simply lacks substantial events of human influence by chance. We plan to investigate this phenomenon more closely and explore potential solutions in future work.

We have successfully trained a neural network in an end-to-end fashion to capture runoff generation in a spatially resolved manner ~~and on a large scale and shown the advantage of this approach on large scale. Training on five entire river basins in central Europe, we have shown that this approach is advantageous~~ especially in large catchments. ~~We have also managed to simultaneously train a very simple neural network to perform routing in five river basins in central Europe~~ The parsimonious  
 495 network design of the module that performs routing within these river basins is also noteworthy. Not only does this approach mitigate overfitting and increase data efficiency, but the simplicity of the design and the ability to integrate inductive bias opens new possibilities to control the inner workings of the model, ~~which is unusual. This is not common~~ for neural networks.

Our model reaches a level of performance comparable to that of other benchmark models, both conceptual and statistical. In future work, we plan to compare our model to other ~~state-of-the-art models that are~~ state-of-the-art models used in science  
 500 and operations. The ~~former requires creation of~~ a spatially resolved version of the popular CAMELS dataset ~~to allow for direct comparability with much~~ would make our model's performance directly comparable with a large portion of the neural networks literature. A direct comparison of our overall pipeline to that of an operational system like LISFLOOD would be similarly interesting. Another question that needs to be addressed in the future is how the performance of our model decreases with the forecast horizon. As we discussed before, our model ~~requires~~ does not have predictive capabilities of its own. Instead,  
 505 it relies on a suitable meteorological forecast as input to generate a forecast of streamflow quantities, and the quality of the model's predictions thus depends on the quality of the forecast meteorological input. Quantifying this effect is important for real-world applications.

In this study, we excluded catchments where we suspected that human influence is too strong based on a simple catchment area heuristic. Unlike much research in this area, we do not train our model exclusively on catchments with little human  
 510 influence. But a more sophisticated strategy, inspired e.g. by Loritz et al. (2024) or Tursun et al. (2024) is needed to ~~identify catchments with a large human footprint,~~ properly quantify human impact and thus being able to ~~properly~~ disentangle the effects of catchment area and human influence ~~on performance. Likewise, while we included day of the week and day of the year as simple approximations to human influence, the effectiveness of this measure can only be properly evaluated with a suitable ground truth.~~


Another big limitation in terms of data availability is the temporal and spatial resolution: The relatively small size of the recurrent layer enables our model to process time series at a higher than daily temporal resolution. Because the local stage ~~;~~  
~~where most computation happens,~~ is applied in parallel to all input locations, the number of parameters is independent of the  
 number of inputs, ~~and computational demand grows.~~ This is where most of the computation happens, and its computational demands grow only linearly with the number of locations. The weight matrices in the routing stage grow quadratically, but are  
 520 much smaller in the first place.

Another important aspect that we will address in future work is discussed in Klotz et al. (2022), where the authors extend a model similar to ours by using the outputs as parameters of a distribution. Such distributional predictions could be obtained from our model in the same way ~~;~~ which is a relevant feature and would be of great interest for many real-world applications.

Producing genuinely probabilistic forecasts and warnings in this fashion is theoretically more sound than training an ensemble  
525 of more or less different models and combining their predictions.

As would be expected from the high degree of human activity in our study area, we found evidence that the effect of  
human influence is the central obstacle to further improving model performance in such an environment. Yet, a comprehensive  
investigation of the extent and impact of this phenomenon is still required. Future research could demonstrate that our neural  
network is capable of incorporating simulated human activity, such as water extraction or diversion, into the modeling of  
530 hydrological processes.

*Code and data availability.* The data used in this study is publicly available under CC BY-NC-SA license at hydroshare, the code used to  
preprocess it is available under Clear BSD license at our repository.

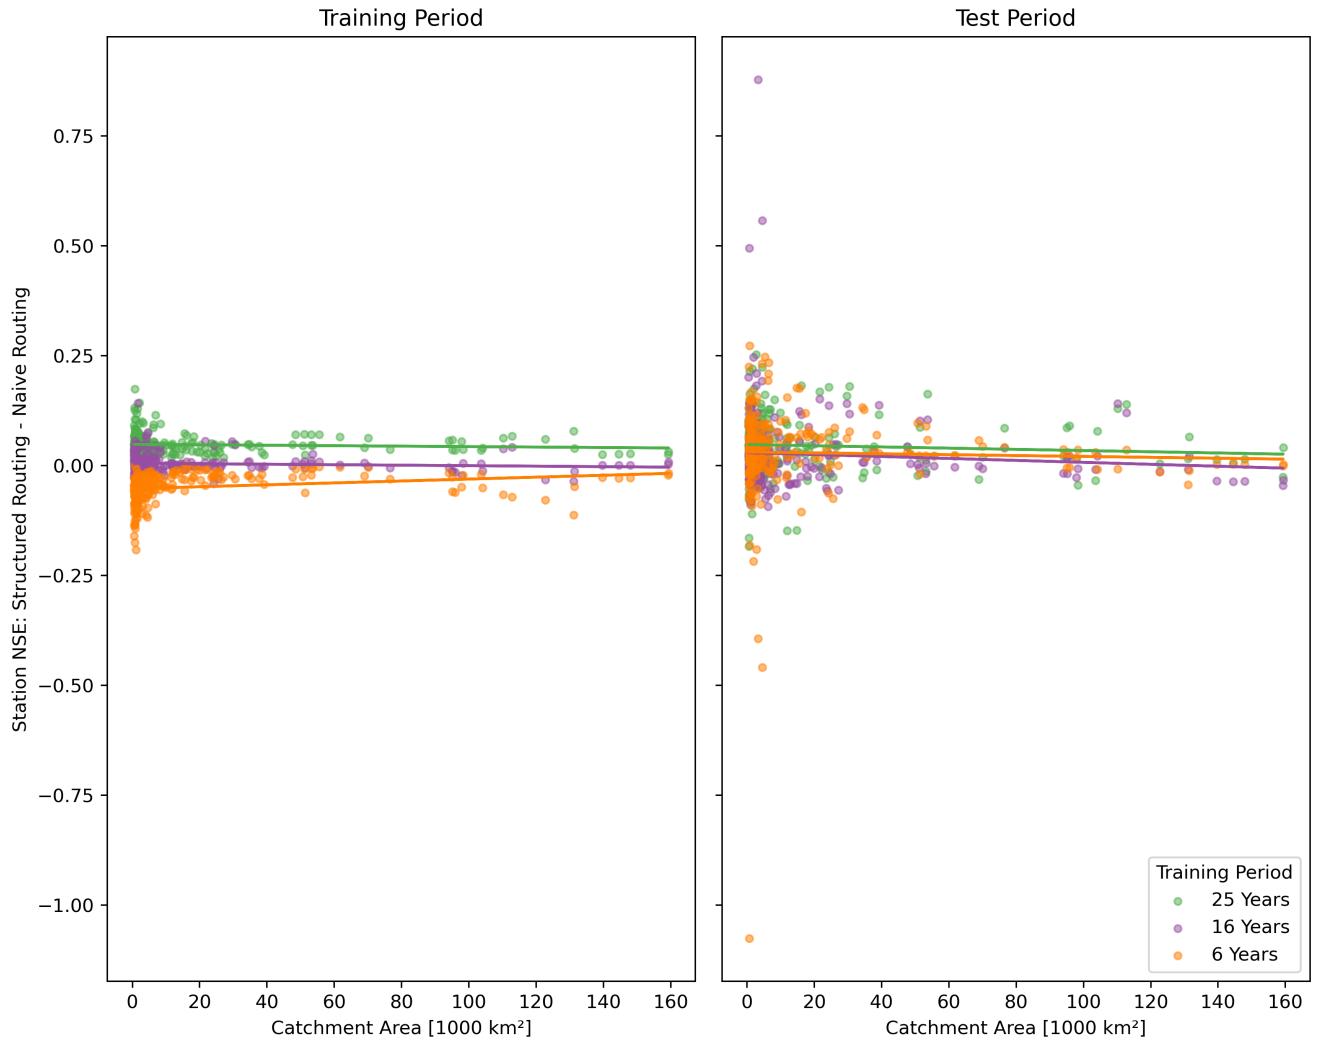

**Figure A1.** Station-wise differences in NSE performance between structured and naive routing, plotted against the size of the station's catchment on training (left panel) and test ~~dataset~~period (right panel). Positive values indicate that structured routing performs better. The individual data points are fitted linearly. Structured routing marginally outperforms naive routing on the test dataset (indicated by values greater zero). On the training dataset, naive routing performs better when data is scarce (values below zero for short training period in green), indicating overfitting.

Input Processing	Routing	Train Period	median NSE	mean NSE	NSE < 0	median KGE	mean KGE
spatially res.	structured	long	0.773	0.751	0.000	<del>-0.077</del> <u>-0.803</u>	<del>-0.092</del> <u>-0.779</u>
spatially res.	naive	long	0.719	0.706	0.000	<del>-0.022</del> <u>-0.791</u>	<del>-0.035</del> <u>-0.775</u>
aggregated	-	long	0.691	0.643	0.013	<del>-0.065</del> <u>-0.731</u>	<del>-0.078</del> <u>-0.702</u>
spatially res.	structured	med.	0.739	0.717	0.004	<del>-0.051</del> <u>-0.775</u>	<del>-0.062</del> <u>-0.753</u>
spatially res.	naive	med.	0.735	0.692	0.008	<del>-0.052</del> <u>-0.776</u>	<del>-0.055</del> <u>-0.744</u>
aggregated	-	med.	0.642	0.603	0.013	<del>-0.072</del> <u>-0.708</u>	<del>-0.097</del> <u>-0.666</u>
spatially res.	structured	short	0.687	0.633	0.017	<del>-0.004</del> <u>-0.752</u>	<del>-0.030</del> <u>-0.724</u>
spatially res.	naive	short	0.653	0.605	0.004	<del>-0.023</del> <u>-0.739</u>	<del>-0.033</del> <u>-0.709</u>
aggregated	-	short	0.485	0.318	0.126	<del>-0.056</del> <u>-0.610</u>	<del>-0.138</del> <u>-0.513</u>

**Table A1.** Various performance metrics for the experiments presented in section 5. The metrics were calculated after picking the best out of ten random seeds for each condition in terms of median NSE.

<u>Input Processing</u>	<u>Routing</u>	<u>median NSE</u>	<u>NSE &lt; 0</u>
<u>spatially resolved</u>	<u>structured</u>	<u>0.773</u>	<u>0.000</u>
<u>spatially resolved</u>	<u>naive</u>	<u>0.719</u>	<u>0.000</u>
<u>aggregated</u>	<u>-</u>	<u>0.691</u>	<u>0.013</u>

**Table A2.** Comparison of median catchment NSE-scores and fraction of catchments with NSE scores below zero for spatially resolved pipeline (structured and naive routing) and the aggregated baseline. Structured routing outperforms naive routing, and spatial processing outperforms aggregated processing. Metrics are reported for the best of ten random seeds in terms of median NSE score. An extended version of this table including KGE scores and shorter training times can be found in A1.

Input Processing	Routing	initial LR	median NSE
spatially res.	structured	5e-4	0.738
spatially res.	naive	5e-4	0.724
aggregated	-	5e-4	0.691
spatially res.	structured	1e-3	0.745
spatially res.	naive	1e-3	0.721
aggregated	-	1e-3	0.704

**Table A3.** Median NSE over 20 seeds for exploratory experiments on the optimal initial learning rate. Performance was evaluated on the *validation* period, as this is part of the model selection process.



*Author contributions.* M.A.V. and J.M. designed the experiments with crucial suggestions from N.O. M.A.V. prepared the data, implemented the model, performed experiments, and analyzed the results. M.A.V. prepared the manuscript with significant contributions from J.M and  
535 N.O. All authors reviewed the manuscript.

*Competing interests.* The authors declare no competing interests.

*Acknowledgements.* This work was supported by the Federal Ministry for Economic Affairs and Climate Action (BMWK) as grant DAKI-FWS (01MK21009A).

## References

- 540 Acuña Espinoza, E., Loritz, R., Kratzert, F., Klotz, D., Gauch, M., Álvarez Chaves, M., Bäuerle, N., and Ehret, U.: Analyzing the Generalization Capabilities of Hybrid Hydrological Models for Extrapolation to Extreme Events, *EGUsphere*, pp. 1–17, <https://doi.org/10.5194/egusphere-2024-2147>, 2024.
- Addor, N., Newman, A. J., Mizukami, N., and Clark, M. P.: The CAMELS Data Set: Catchment Attributes and Meteorology for Large-Sample Studies, *Hydrol. Earth Syst. Sci.*, p. 21, 2017.
- 545 Alvarez-Garreton, C., Mendoza, P. A., Boisier, J. P., Addor, N., Galleguillos, M., Zambrano-Bigiarini, M., Lara, A., Puelma, C., Cortes, G., Garreaud, R., McPhee, J., and Ayala, A.: The CAMELS-CL Dataset: Catchment Attributes and Meteorology for Large Sample Studies – Chile Dataset, *Hydrology and Earth System Sciences*, 22, 5817–5846, <https://doi.org/10.5194/hess-22-5817-2018>, 2018.
- Ansel, J., Yang, E., He, H., Gimelshein, N., Jain, A., Voznesensky, M., Bao, B., Bell, P., Berard, D., Burovski, E., Chauhan, G., Chourdia, A., Constable, W., Desmaison, A., DeVito, Z., Ellison, E., Feng, W., Gong, J., Gschwind, M., Hirsh, B., Huang, S., Kalambarkar, K., Kirsch, L., Lazos, M., Lezcano, M., Liang, Y., Liang, J., Lu, Y., Luk, C. K., Maher, B., Pan, Y., Puhersch, C., Reso, M., Saroufim, M., Siraichi, M. Y., Suk, H., Zhang, S., Suo, M., Tillet, P., Zhao, X., Wang, E., Zhou, K., Zou, R., Wang, X., Mathews, A., Wen, W., Chanan, G., Wu, P., and Chintala, S.: PyTorch 2: Faster Machine Learning Through Dynamic Python Bytecode Transformation and Graph Compilation, in: *Proceedings of the 29th ACM International Conference on Architectural Support for Programming Languages and Operating Systems*, Volume 2, pp. 929–947, ACM, La Jolla CA USA, ISBN 9798400703850, <https://doi.org/10.1145/3620665.3640366>, 2024.
- 555 Bevacqua, E., Shepherd, T. G., Watson, P. A. G., Sparrow, S., Wallom, D., and Mitchell, D.: Larger Spatial Footprint of Wintertime Total Precipitation Extremes in a Warmer Climate, *Geophysical Research Letters*, 48, e2020GL091990, <https://doi.org/10.1029/2020GL091990>, 2021.
- Beven, K. J.: *Rainfall-Runoff Modelling: The Primer*, Wiley-Blackwell, Chichester, West Sussex ; Hoboken, NJ, 2nd ed edn., ISBN 978-0-470-71459-1, 2012.
- 560 Bronstein, M. M., Bruna, J., Cohen, T., and Veličković, P.: Geometric Deep Learning: Grids, Groups, Graphs, Geodesics, and Gauges, *arXiv:2104.13478 [cs, stat]*, 2021.
- Chagas, V. B. P., Chaffe, P. L. B., Addor, N., Fan, F. M., Fleischmann, A. S., Paiva, R. C. D., and Siqueira, V. A.: CAMELS-BR: Hydrometeorological Time Series and Landscape Attributes for 897 Catchments in Brazil, *Earth System Science Data*, 12, 2075–2096, <https://doi.org/10.5194/essd-12-2075-2020>, 2020.
- 565 Chen, Z., Lin, H., and Shen, G.: TreeLSTM: A Spatiotemporal Machine Learning Model for Rainfall-Runoff Estimation, *Journal of Hydrology: Regional Studies*, 48, 101474, <https://doi.org/10.1016/j.ejrh.2023.101474>, 2023.
- Cheng, X., Vischer, M., Schellin, Z., Arras, L., Kuglitsch, M. M., Samek, W., and Ma, J.: Explainability in GeoAI, in: *Handbook of Geospatial Artificial Intelligence*, CRC Press, ISBN 978-1-00-330842-3, 2023.
- Cho, K., van Merriënboer, B., Gulcehre, C., Bahdanau, D., Bougares, F., Schwenk, H., and Bengio, Y.: Learning Phrase Representations Using RNN Encoder-Decoder for Statistical Machine Translation, 2014.
- 570 Clark, S. R., Lerat, J., Perraud, J.-M., and Fitch, P.: Deep Learning for Monthly Rainfall–Runoff Modelling: A Large-Sample Comparison with Conceptual Models across Australia, *Hydrology and Earth System Sciences*, 28, 1191–1213, <https://doi.org/10.5194/hess-28-1191-2024>, 2024.
- CopernicusClimateChangeService: ERA5-Land Hourly Data from 1950 to Present. Copernicus Climate Change Service (C3S) Climate Data Store (CDS), DOI: 10.24381/Cds.E2161bac (Accessed on 23-Oct-2021), 2022.

- Coxon, G., Addor, N., Bloomfield, J. P., Freer, J., Fry, M., Hannaford, J., Howden, N. J. K., Lane, R., Lewis, M., Robinson, E. L., Wagener, T., and Woods, R.: CAMELS-GB: Hydrometeorological Time Series and Landscape Attributes for 671 Catchments in Great Britain, *Earth System Science Data*, 12, 2459–2483, <https://doi.org/10.5194/essd-12-2459-2020>, 2020.
- 580 Delaigue, O., Brigode, P., Andréassian, V., Perrin, C., Etchevers, P., Soubeyroux, J.-M., Janet, B., and Addor, N.: CAMELS-FR: A Large Sample Hydroclimatic Dataset for France to Explore Hydrological Diversity and Support Model Benchmarking, *Other*, display, <https://doi.org/10.5194/iahs2022-521>, 2022.
- Fang, B., Bevacqua, E., Rakovec, O., and Zscheischler, J.: An Increase in the Spatial Extent of European Floods over the Last 70 Years, *Hydrology and Earth System Sciences*, 28, 3755–3775, <https://doi.org/10.5194/hess-28-3755-2024>, 2024.
- Fowler, K. J. A., Acharya, S. C., Addor, N., Chou, C., and Peel, M. C.: CAMELS-AUS: Hydrometeorological Time Series and Landscape  
585 Attributes for 222 Catchments in Australia, *Earth System Science Data*, 13, 3847–3867, <https://doi.org/10.5194/essd-13-3847-2021>, 2021.
- Frame, J. M., Kratzert, F., Klotz, D., Gauch, M., Shalev, G., Gilon, O., Qualls, L. M., Gupta, H. V., and Nearing, G. S.: Deep Learning Rainfall–Runoff Predictions of Extreme Events, *Hydrology and Earth System Sciences*, 26, 3377–3392, <https://doi.org/10.5194/hess-26-3377-2022>, 2022.
- Gründemann, G. J., van de Giesen, N., Brunner, L., and van der Ent, R.: Rarest Rainfall Events Will See the Greatest Relative Increase in  
590 Magnitude under Future Climate Change, *Communications Earth & Environment*, 3, 1–9, <https://doi.org/10.1038/s43247-022-00558-8>, 2022.
- Gupta, H. V., Kling, H., Yilmaz, K. K., and Martinez, G. F.: Decomposition of the Mean Squared Error and NSE Performance Criteria: Implications for Improving Hydrological Modelling, *Journal of Hydrology*, 377, 80–91, <https://doi.org/10.1016/j.jhydrol.2009.08.003>, 2009.
- 595 Hitokoto, M. and Sakuraba, M.: Hybrid Deep Neural Network and Distributed Rainfall–Runoff Model for Real-Time River-Stage Prediction, *Journal of JSCE*, 8, 46–58, [https://doi.org/10.2208/journalofjsce.8.1\\_46](https://doi.org/10.2208/journalofjsce.8.1_46), 2020.
- Hochreiter, S. and Schmidhuber, J.: Long Short-term Memory, *Neural Computation MIT-Press*, 9, 1735–1780, 1997.
- Höge, M., Kauzlaric, M., Siber, R., Schönenberger, U., Horton, P., Schwanbeck, J., Floriancic, M. G., Viviroli, D., Wilhelm, S., Sikorska-Senoner, A. E., Addor, N., Brunner, M., Pool, S., Zappa, M., and Fenicia, F.: CAMELS-CH: Hydro-Meteorological Time Series and Land-  
600 scape Attributes for 331 Catchments in Hydrologic Switzerland, *Earth System Science Data*, 15, 5755–5784, <https://doi.org/10.5194/essd-15-5755-2023>, 2023.
- Horton, P., Schaeffli, B., and Kauzlaric, M.: Why Do We Have so Many Different Hydrological Models? A Review Based on the Case of Switzerland, *WIREs Water*, 9, e1574, <https://doi.org/10.1002/wat2.1574>, 2022.
- Hu, F., Yang, Q., Yang, J., Luo, Z., Shao, J., and Wang, G.: Incorporating Multiple Grid-Based Data in CNN-LSTM Hybrid Model  
605 for Daily Runoff Prediction in the Source Region of the Yellow River Basin, *Journal of Hydrology: Regional Studies*, 51, 101652, <https://doi.org/10.1016/j.ejrh.2023.101652>, 2024.
- Hu, T., Wu, F., and Zhang, X.: Rainfall–Runoff Modeling Using Principal Component Analysis and Neural Network, *Hydrology Research*, 38, 235–248, <https://doi.org/10.2166/nh.2007.010>, 2007.
- Jiang, S., Bevacqua, E., and Zscheischler, J.: River Flooding Mechanisms and Their Changes in Europe Revealed by Explainable Machine  
610 Learning, *Hydrology and Earth System Sciences*, 26, 6339–6359, <https://doi.org/10.5194/hess-26-6339-2022>, 2022.
- Kam, P. M., Aznar-Siguan, G., Schewe, J., Milano, L., Ginnetti, J., Willner, S., McCaughey, J. W., and Bresch, D. N.: Global Warming and Population Change Both Heighten Future Risk of Human Displacement Due to River Floods, *Environmental Research Letters*, 16, 044026, <https://doi.org/10.1088/1748-9326/abd26c>, 2021.

- Kiranyaz, S., Avci, O., Abdeljaber, O., Ince, T., Gabbouj, M., and Inman, D. J.: 1D Convolutional Neural Networks and Applications: A Survey, *Mechanical Systems and Signal Processing*, 151, 107398, <https://doi.org/10.1016/j.ymssp.2020.107398>, 2021.
- Klingler, C., Schulz, K., and Herrnegger, M.: LamaH-CE: LArge-SaMple DAta for Hydrology and Environmental Sciences for Central Europe, *Earth System Science Data*, 13, 4529–4565, <https://doi.org/10.5194/essd-13-4529-2021>, 2021.
- Klotz, D., Kratzert, F., Gauch, M., Keefe Sampson, A., Brandstetter, J., Klambauer, G., Hochreiter, S., and Nearing, G.: Uncertainty Estimation with Deep Learning for Rainfall–Runoff Modeling, *Hydrology and Earth System Sciences*, 26, 1673–1693, <https://doi.org/10.5194/hess-26-1673-2022>, 2022.
- Klotz, D., Gauch, M., Kratzert, F., Nearing, G., and Zscheischler, J.: Technical Note: The Divide and Measure Nonconformity, *Hydrology and Earth System Sciences Discussions*, pp. 1–25, <https://doi.org/10.5194/hess-2024-59>, 2024.
- Kratzert, F., Klotz, D., Brenner, C., Schulz, K., and Herrnegger, M.: Rainfall–Runoff Modelling Using Long Short-Term Memory (LSTM) Networks, *Hydrology and Earth System Sciences*, 22, 6005–6022, <https://doi.org/10.5194/hess-22-6005-2018>, 2018.
- Kratzert, F., Herrnegger, M., Klotz, D., Hochreiter, S., and Klambauer, G.: NeuralHydrology – Interpreting LSTMs in Hydrology, in: *Explainable AI: Interpreting, Explaining and Visualizing Deep Learning*, edited by Samek, W., Montavon, G., Vedaldi, A., Hansen, L. K., and Müller, K.-R., *Lecture Notes in Computer Science*, pp. 347–362, Springer International Publishing, Cham, ISBN 978-3-030-28954-6, [https://doi.org/10.1007/978-3-030-28954-6\\_19](https://doi.org/10.1007/978-3-030-28954-6_19), 2019a.
- Kratzert, F., Klotz, D., Herrnegger, M., Sampson, A. K., Hochreiter, S., and Nearing, G. S.: Toward Improved Predictions in Ungauged Basins: Exploiting the Power of Machine Learning, *Water Resources Research*, 55, 11344–11354, <https://doi.org/10.1029/2019WR026065>, 2019b.
- Kratzert, F., Klotz, D., Shalev, G., Klambauer, G., Hochreiter, S., and Nearing, G.: Towards Learning Universal, Regional, and Local Hydrological Behaviors via Machine Learning Applied to Large-Sample Datasets, *Hydrology and Earth System Sciences*, 23, 5089–5110, <https://doi.org/10.5194/hess-23-5089-2019>, 2019c.
- Kratzert, F., Gauch, M., Klotz, D., and Nearing, G.: Never Train a Long Short-Term Memory (LSTM) Network on a Single Basin, *Hydrology and Earth System Sciences*, 28, 4187–4201, <https://doi.org/10.5194/hess-28-4187-2024>, 2024.
- Lees, T., Buechel, M., Anderson, B., Slater, L., Reece, S., Coxon, G., and Dadson, S. J.: Benchmarking Data-Driven Rainfall–Runoff Models in Great Britain: A Comparison of Long Short-Term Memory (LSTM)-Based Models with Four Lumped Conceptual Models, *Hydrology and Earth System Sciences*, 25, 5517–5534, <https://doi.org/10.5194/hess-25-5517-2021>, 2021.
- Lees, T., Reece, S., Kratzert, F., Klotz, D., Gauch, M., De Bruijn, J., Kumar Sahu, R., Greve, P., Slater, L., and Dadson, S. J.: Hydrological Concept Formation inside Long Short-Term Memory (LSTM) Networks, *Hydrology and Earth System Sciences*, 26, 3079–3101, <https://doi.org/10.5194/hess-26-3079-2022>, 2022.
- Liu, J., Koch, J., Stisen, S., Trolldborg, L., Højberg, A. L., Thodsen, H., Hansen, M. F. T., and Schneider, R. J. M.: CAMELS-DK: Hydrometeorological Time Series and Landscape Attributes for 3330 Catchments in Denmark, *Earth System Science Data Discussions*, pp. 1–30, <https://doi.org/10.5194/essd-2024-292>, 2024.
- Loritz, R., Dolich, A., Acuña Espinoza, E., Ebeling, P., Guse, B., Götze, J., Hassler, S. K., Hauffe, C., Heidbüchel, I., Kiesel, J., Mälicke, M., Müller-Thomy, H., Stölzle, M., and Tarasova, L.: CAMELS-DE: Hydro-Meteorological Time Series and Attributes for 1555 Catchments in Germany, *Earth System Science Data Discussions*, pp. 1–30, <https://doi.org/10.5194/essd-2024-318>, 2024.
- Mai, J., Shen, H., Tolson, B. A., Gaborit, É., Arsenault, R., Craig, J. R., Fortin, V., Fry, L. M., Gauch, M., Klotz, D., Kratzert, F., O’Brien, N., Princz, D. G., Rasiya Koya, S., Roy, T., Seglenieks, F., Shrestha, N. K., Temgoua, A. G. T., Vionnet, V., and Waddell, J. W.: The Great

- Lakes Runoff Intercomparison Project Phase 4: The Great Lakes (GRIP-GL), *Hydrology and Earth System Sciences*, 26, 3537–3572, <https://doi.org/10.5194/hess-26-3537-2022>, 2022.
- Moshe, Z., Metzger, A., Elidan, G., Kratzert, F., Nevo, S., and El-Yaniv, R.: HydroNets: Leveraging River Structure for Hydrologic Modeling, <https://doi.org/10.48550/arXiv.2007.00595>, 2020.
- 655 Muhebwa, A., Gleason, C. J., Feng, D., and Taneja, J.: Improving Discharge Predictions in Ungauged Basins: Harnessing the Power of Disaggregated Data Modeling and Machine Learning, *Water Resources Research*, 60, e2024WR037122, <https://doi.org/10.1029/2024WR037122>, 2024.
- Muñoz Sabater, J.: ERA5-Land Hourly Data from 1950 to Present. Copernicus Climate Change Service (C3S) Climate Data Store (CDS). DOI: 10.24381/Cds.E2161bac (Accessed on 17-Sep-2024), 2019.
- 660 Nash, J. E. and Sutcliffe, J. V.: River Flow Forecasting through Conceptual Models Part I — A Discussion of Principles, *Journal of Hydrology*, 10, 282–290, [https://doi.org/10.1016/0022-1694\(70\)90255-6](https://doi.org/10.1016/0022-1694(70)90255-6), 1970.
- Nearing, G., Cohen, D., Dube, V., Gauch, M., Gilon, O., Harrigan, S., Hassidim, A., Klotz, D., Kratzert, F., Metzger, A., Nevo, S., Pappenberger, F., Prudhomme, C., Shalev, G., Shenzen, S., Tekalign, T. Y., Weitzner, D., and Matias, Y.: Global Prediction of Extreme Floods in Ungauged Watersheds, *Nature*, 627, 559–563, <https://doi.org/10.1038/s41586-024-07145-1>, 2024.
- 665 Nevo, S., Morin, E., Gerzi Rosenthal, A., Metzger, A., Barshai, C., Weitzner, D., Voloshin, D., Kratzert, F., Elidan, G., Dror, G., Begelman, G., Nearing, G., Shalev, G., Noga, H., Shavitt, I., Yuklea, L., Royz, M., Giladi, N., Peled Levi, N., Reich, O., Gilon, O., Maor, R., Timnat, S., Shechter, T., Anisimov, V., Gigi, Y., Levin, Y., Moshe, Z., Ben-Haim, Z., Hassidim, A., and Matias, Y.: Flood Forecasting with Machine Learning Models in an Operational Framework, *Hydrology and Earth System Sciences*, 26, 4013–4032, <https://doi.org/10.5194/hess-26-4013-2022>, 2022.
- 670 Newman, A. J., Clark, M. P., Sampson, K., Wood, A., Hay, L. E., Bock, A., Viger, R. J., Blodgett, D., Brekke, L., Arnold, J. R., Hopson, T., and Duan, Q.: Development of a Large-Sample Watershed-Scale Hydrometeorological Data Set for the Contiguous USA: Data Set Characteristics and Assessment of Regional Variability in Hydrologic Model Performance, *Hydrology and Earth System Sciences*, 19, 209–223, <https://doi.org/10.5194/hess-19-209-2015>, 2015.
- Otero, N., Horton, P., Martius, O., Allen, S., Zappa, M., Wechsler, T., and Schaeffli, B.: Impacts of Hot-Dry Conditions on Hydropower Production in Switzerland, *Environmental Research Letters*, 18, 064038, <https://doi.org/10.1088/1748-9326/acd8d7>, 2023.
- 675 Shalev, G., El-Yaniv, R., Klotz, D., Kratzert, F., Metzger, A., and Nevo, S.: Accurate Hydrologic Modeling Using Less Information, 2019.
- Shen, C., Laloy, E., Albert, A., Chang, F.-J., Elshorbagy, A., Ganguly, S., Hsu, K.-I., Kifer, D., Fang, Z., Fang, K., Li, D., Li, X., and Tsai, W.-P.: Deep Learning as a Promising Avenue toward Knowledge Discovery in Water Sciences, <https://doi.org/10.5194/hess-2018-168>, 2018.
- 680 Sit, M., Demiray, B., and Demir, I.: Short-Term Hourly Streamflow Prediction with Graph Convolutional GRU Networks, <https://doi.org/10.48550/arXiv.2107.07039>, 2021.
- Sitterson, J., Knightes, C., Parmar, R., Wolfe, K., Avant, B., and Muche, M.: An Overview of Rainfall-Runoff Model Types, *International Congress on Environmental Modelling and Software*, 2018.
- Smith, A., Tetzlaff, D., Marx, C., and Soulsby, C.: Enhancing Urban Runoff Modelling Using Water Stable Isotopes and Ages in Complex Catchments, *Hydrological Processes*, 37, e14814, <https://doi.org/10.1002/hyp.14814>, 2023.
- 685 Smith, J. and Eli, R. N.: Neural-Network Models of Rainfall-Runoff Process, *Journal of Water Resources Planning and Management*, 121, 499–508, [https://doi.org/10.1061/\(ASCE\)0733-9496\(1995\)121:6\(499\)](https://doi.org/10.1061/(ASCE)0733-9496(1995)121:6(499)), 1995.

- Sterle, G., Perdrial, J., Kincaid, D. W., Underwood, K. L., Rizzo, D. M., Haq, I. U., Li, L., Lee, B. S., Adler, T., Wen, H., Middleton, H., and Harpold, A. A.: CAMELS-Chem: Augmenting CAMELS (Catchment Attributes and Meteorology for Large-sample Studies) with Atmospheric and Stream Water Chemistry Data, *Hydrology and Earth System Sciences*, 28, 611–630, <https://doi.org/10.5194/hess-28-611-2024>, 2024.
- Sun, A. Y., Jiang, P., Mudunuru, M. K., and Chen, X.: Explore Spatio-Temporal Learning of Large Sample Hydrology Using Graph Neural Networks, *Water Resources Research*, 57, e2021WR030394, <https://doi.org/10.1029/2021WR030394>, 2021.
- Sun, A. Y., Jiang, P., Yang, Z.-L., Xie, Y., and Chen, X.: A Graph Neural Network (GNN) Approach to Basin-Scale River Network Learning: The Role of Physics-Based Connectivity and Data Fusion, *Hydrology and Earth System Sciences*, 26, 5163–5184, <https://doi.org/10.5194/hess-26-5163-2022>, 2022.
- Tursun, A., Xie, X., Wang, Y., Peng, D., Liu, Y., Zheng, B., Wu, X., and Nie, C.: Streamflow Prediction in Human-Regulated Catchments Using Multiscale Deep Learning Modeling With Anthropogenic Similarities, *Water Resources Research*, 60, e2023WR036853, <https://doi.org/10.1029/2023WR036853>, 2024.
- Van Der Knijff, J. M., Younis, J., and De Roo, A. P. J.: LISFLOOD: A GIS-based Distributed Model for River Basin Scale Water Balance and Flood Simulation, *International Journal of Geographical Information Science*, 24, 189–212, <https://doi.org/10.1080/13658810802549154>, 2010.
- Vischer, M. A., Felipe Otero, N., and Ma, J.: Spatially Resolved Meteorological and Ancillary Data in Central Europe for Rainfall Streamflow Modeling, under review, 2025.
- Xiang, Z. and Demir, I.: Fully Distributed Rainfall-Runoff Modeling Using Spatial-Temporal Graph Neural Network, <https://doi.org/10.31223/X57P74>, 2022.
- Xie, J., Liu, X., Tian, W., Wang, K., Bai, P., and Liu, C.: Estimating Gridded Monthly Baseflow From 1981 to 2020 for the Contiguous US Using Long Short-Term Memory (LSTM) Networks, *Water Resources Research*, 58, e2021WR031663, <https://doi.org/10.1029/2021WR031663>, 2022.
- Yu, Q., Tolson, B. A., Shen, H., Han, M., Mai, J., and Lin, J.: Enhancing Long Short-Term Memory (LSTM)-Based Streamflow Prediction with a Spatially Distributed Approach, *Hydrology and Earth System Sciences*, 28, 2107–2122, <https://doi.org/10.5194/hess-28-2107-2024>, 2024.
- Zhou, F., Chen, Y., and Liu, J.: Application of a New Hybrid Deep Learning Model That Considers Temporal and Feature Dependencies in Rainfall–Runoff Simulation, *Remote Sensing*, 15, 1395, <https://doi.org/10.3390/rs15051395>, 2023.
- Zhu, S., Wei, J., Zhang, H., Xu, Y., and Qin, H.: Spatiotemporal Deep Learning Rainfall-Runoff Forecasting Combined with Remote Sensing Precipitation Products in Large Scale Basins, *Journal of Hydrology*, 616, 128 727, <https://doi.org/10.1016/j.jhydrol.2022.128727>, 2023.