

Riming-dependent Snowfall Rate and Ice Water Content Retrievals for W-band cloud radar

Nina Maherndl^{1,a}, Alessandro Battaglia^{2,3}, Anton Kötsche¹, and Maximilian Maahn¹

¹Leipzig Institute of Meteorology (LIM), Leipzig University, Leipzig, Germany

²Politecnico of Torino, Torino, Italy

³University of Leicester, Leicester, UK

^anow at: Geoscience and Remote Sensing Department, Delft University of Technology, Delft, Netherlands

Correspondence: Nina Maherndl (n.m.maherndl@tudelft.nl)

Abstract.

Accurate measurements of snowfall in mid- and high-latitudes are particularly important, because snow provides a vital freshwater source, and impacts glacier mass balances as well as surface albedo. However, ice water content (IWC) and snowfall rates (SR) are hard to measure due to their high spatial variability and the remoteness of polar regions. In this study, we present novel ice water content - equivalent radar reflectivity (IWC- Z_e) and snowfall rate - equivalent radar reflectivity (SR- Z_e) relations for 40° slanted and vertically pointing W-band radar. The relations are derived from joint in situ snowfall and remote sensing (W-band radar and radiometer) data from the SAIL site (Colorado, USA) and validated for sites in Hyytiälä (Finland), Ny-Ålesund (Svalbard), and Eriswil (Switzerland). In addition, gauge measurements from SAIL and Hyytiälä are used as an independent reference for validation. We show the dependence of IWC- Z_e and SR- Z_e on riming, which we utilize to reduce the spread in the IWC- Z_e and SR- Z_e spaces. Normalized root mean square errors (NRMSE) are below 25% for IWC > 0.1 gm⁻³. For SR, the NRMSE is below 70% over the whole SR range. We also present relations using liquid water path as a proxy for the occurrence of riming, which can be applied to both ground-based and space-borne radar-radiometer instruments. The latter is demonstrated using the example of the proposed ESA Earth Explorer 11 candidate mission WIVERN. With this approach, NRMSE are below 75% for IWC > 0.1 gm⁻³ and below 80% for SR > 0.2 mmhr⁻¹.

15 1 Introduction

At mid- and high-latitudes, most precipitation stems from ice clouds (Mülmenstädt et al., 2015). Solid precipitation in the form of snow plays an important role in the Earth's hydrological cycle and energy budget, affecting surface albedo, glacier mass balance, freshwater storage, and cloud lifetime. However, ice water content (IWC) and snowfall rates (SR) are difficult to measure in part due to their high spatial variability. At high latitudes, ground-based precipitation observations are sparse and complicated by harsh environmental conditions (e.g., Førland et al., 2011).

Precipitation gauges are commonly used to measure liquid equivalent SR amounts. While gauges provide direct measurements of [snowfall accumulation, which is used to compute](#) SR, they are prone to large uncertainties (e.g., Saltikoff et al., 2015). Particle size and velocity size distribution data from snowfall cameras can also be used to estimate SR, given the observational

25 volume is large enough. The advantage of this approach over gauge measurements is that IWC and SR can jointly be derived
with a high temporal resolution. However, the particle mass distribution cannot be measured directly with optical instruments,
thus mass-size relations need to be assumed from literature (e.g., Heymsfield et al., 2016) or retrieved (e.g., von Lerber et al.,
2017). SR derived from radar can provide more information on the spatial distribution as compared to the point-measurement
of a gauge or snowfall camera. In addition, radar observations are vertically resolved and can be used to derive vertical profiles
of IWC. W-band radars, which operate at about 94 GHz, are commonly used due to their high sensitivity to cloud particles.
30 Space-borne W-band radar can provide global observations of IWC and SR as demonstrated by the CloudSat Cloud Profil-
ing Radar (Tanelli et al., 2008), that has provided the first global climatology of SR (Hiley et al., 2011; Milani et al., 2018)
and, combined with the CALIPSO lidar, of IWC (e.g., Delanoë and Hogan, 2010). However, current satellite-derived snowfalls
products suffer from poor sampling (~~Sears et al., 2024b~~) ([Scarsi et al., 2024a](#)) and a "blind-zone" close to ground, thus missing
shallow precipitation (Maahn et al., 2014; Schirmacher et al., 2023). Further, the information content of satellite observations
35 is typically not sufficient to constrain the highly variable microphysical properties of snow and ice particles unambiguously
([Wood and L'Ecuyer, 2021](#)).

SR and IWC cannot be measured directly by radar, but has to be inferred from radar reflectivity. Power law relations between
 z_e in linear units, defined as $z_e [\text{mm}^6 \text{m}^{-3}] = 10^{0.1 \cdot Z_e [\text{dBZ}]}$, and IWC or z_e and SR in the form of $z_e = a \cdot \text{IWC}^b$ and $z_e = c \cdot \text{SR}^d$
are commonly used for IWC and SR estimation (e.g., Fuller et al., 2023, provide an overview of SR- Z_e relations for W-band
40 radar). These relations show differences of about one order of magnitude in estimates of IWC and SR. The large spread stems
from the large variability among ice and snow particle [size](#) distributions (PSDs), density, shape, orientation, crystal habit, etc.
~~Although these relations~~ [Relations](#) can have significant uncertainties for individual cases, ~~they~~ [but](#) are successfully applied to
space-borne radar data sets because the random errors cancel ~~partly out~~ [out partly](#) in seasonal time scales [assuming they are](#)
[trained on a large enough data set to capture the full snowfall climatology](#) (Kulie and Bennartz, 2009).

45 To reduce the variability in Z_e -IWC and Z_e -SR space, additional variables are commonly included in retrievals like air
temperature T for both ground-based and space-borne radar (e.g., Wood and L'Ecuyer (2021)) or polarimetric variables such
as KDP or ZDR for ground-based radar (Bukovčić et al. (2020), for S-band radar). Recent studies have demonstrated the
potential of including brightness temperature T_B and/or nadir Doppler observations (like available for the EarthCARE radar,
Illingworth et al., 2015; Kollias et al., 2023) to constrain SR estimates from space (Battaglia and Panegrossi, 2020; Mroz et al.,
50 2023). T_B and/or Doppler can give insight on the location and amount of supercooled liquid water layers, which can lead to
higher ice particle densities due to supercooled droplets freezing onto ice particles upon contact, which is commonly referred
to as riming. Riming drives Z_e variability (Maherndl et al., 2024b) and Fuller et al. (2023) show that most literature SR- Z_e lead
to strong biases when applied to rimed snow particles. Fuller et al. (2023) argue new research is needed to refine the SR- Z_e
relationship for rimed snow particles.

55 WIVERN (WInd VELOCITY Radar Nephoscope, Illingworth et al., 2018; Battaglia et al., 2022), one of the two remaining
ESA Earth Explorer 11 candidate missions, is planned to be equipped with a conical scanning 94 GHz radar and a passive 94
GHz radiometer. While the main objective of the mission is to measure global in-cloud winds (e.g., inside tropical cyclones,
Tridon et al., 2023), WIVERN reflectivity data can also be used to derive IWC and SR. Compared to CloudSat (Tanelli et al.,

2008) and EarthCARE (Illingworth et al., 2015), WIVERN’s 800 km swath provides better coverage (70 times better than
60 CloudSat) ~~leading to significantly reduced~~ significantly reducing the uncertainty of polar snowfall estimates (Scarsi et al.,
2024b). In addition, WIVERN’s 42° angle of incidence results in a ~~thinner~~ smaller radar blind zone near the surface (especially
over the ocean) (~~Coppola et al., 2024~~)(Coppola et al., 2025).

In this study, we present Z_e -IWC and Z_e -SR relations for both 40° slanted and vertically pointing W-band radar. The re-
lations were derived from joint radar and in situ snowfall observations during winter 2022/2023 in Gothic (Colorado, USA)
65 and validated for additional mid- and high-latitude sites in Hyytiälä (Finland), Ny-Ålesund (Svalbard Norway), and Eriswil
(Switzerland). We investigate the dependence of Z_e -IWC and Z_e -SR on snow particle riming based on joint in situ and radar
data. Further, we include liquid water path (LWP) as an additional parameter in the relations as a proxy for the occurrence
of riming (Moisseev et al., 2017). This approach allows to reduce uncertainty in the Z_e -IWC and Z_e -SR spaces when in situ
data is not available. The novel relations can therefore be applied to both ground-based and space-borne radar (and radiome-
70 ter). The latter is demonstrated with synthetic WIVERN observations accounting for the space-borne geometry and estimated
uncertainties.

The paper is structured as follows. We first give an overview of all ground-based measurement sites and instruments we use
to derive our reference data in Sect. 2. In Sect. 3, we 1. explain the riming retrieval we use, 2. demonstrate a novel approach
allowing us to correct Z_e for the 40° viewing angle, 3. describe the reference IWC and SR data, and 4. show our methods to
75 fit Z_e -IWC and Z_e -SR relations. Results of the fits are presented in Sect. 4.1, and their performance is evaluated in Sect. 4.2.
Sect. 5 draws a conclusion.

2 Measurement Sites and Instruments

We use data from the the U. S. Department of Energy Atmospheric Radiation Measurement (ARM) user facility’s Surface
Atmosphere Integrated Field Laboratory (SAIL, Feldman et al., 2023; Kötsche et al., 2025) site in Gothic, Colorado (USA)
80 to develop Z_e -SR and Z_e -IWC relations for (slanted) W-band radar. The performance of the new relations are tested using
data from three additional mid- and high-latitude sites at Hyytiälä (Finland), Ny-Ålesund (Svalbard Norway), and Eriswil
(Switzerland). In the following, we describe the measurement sites and the main instrumentation used in this study.

2.1 Field Experiment at the SAIL Site

In winter 2022/23, the Leipzig University 94 GHz radar (LIMRAD94) and a Video In Situ Snowfall Sensor (VISS, Maahn
85 et al., 2024) were deployed at the SAIL site in Gothic, Colorado, USA, (38.95621°N, 106.98796°W; 2885 m above mean sea
level (MSL), Feldman et al., 2023). LIMRAD94 is a polarimetric simultaneous transmission simultaneous reception (STSR)
Doppler cloud radar manufactured by Radiometer Physics GmbH (RPG, instrument type RPG-FMCW-94-DP, Kuchler et al.,
2017). The radar scanning strategy included slanted observations at a constant angle of 40° during December 2022 and January
2023, and range height indicator (RHI) scans in February 2023 (Kalesse-Los et al., 2023). LIMRAD94 (at 2905 m MSL) was
90 operated at a range resolution of about 12 m for ranges below 2000 m, which corresponds to a vertical resolution of 7.7 m

below 1288 m at the 40° observation angle. The VISSS (at 2885 m MSL) was deployed below the line of sight of the radar, at a horizontal distance of about 500 m. The VISSS consists of two cameras with telecentric lenses, mounted perpendicular to each other. The set-up allows for accurate characterization of snow particle shape and size. At the SAIL site, the first generation VISSS, here denoted VISSS1, was deployed. VISSS1 has a pixel resolution of $58.832 \mu\text{m px}^{-1}$, a frame rate of 140 Hz, and an observation volume of $w \times d \times h = 75.2 \times 75.2 \times 60.1 \text{ mm}^3$. VISSS data products relevant to this study include time averaged particle size distributions (PSDs) and sedimentation velocity distributions.

We use additional data acquired by ARM of near-surface air temperature T , SR from a Pluvio weighing precipitation gauge and liquid water path (LWP). ~~The latter product~~ For the latter, we use the ARM 3-channel microwave radiometer LWP, which is derived from a site-specific statistical retrieval from microwave radiometer brightness temperature measurements. LWP, T , and Pluvio SR data are obtained from the ARM data portal (<https://adc.arm.gov/discovery/>, last access: 18 Nov 2024).

2.2 Additional mid- and high-latitude sites for validation

For validation and evaluation we use joint vertically-pointing 94 GHz radar and VISSS observations obtained at the Hyytiälä Forestry Field Station of the University of Helsinki, Finland (HYY), in 2021/21 and 2023/24, at Eriswil, Switzerland, during the PolarCAP (Polarimetric Radar Signatures of Ice Formation Pathways from Controlled Aerosol Perturbations) campaign 2023/24, and at the French German atmospheric observatory AWIPEV (named after the Alfred Wegener Institute for Polar and Marine Research and the French Polar Institute Paul Emile Victor, Ebell et al., 2020) in Ny-Ålesund (NYA), Svalbard, from 2021 onward (Fig. 1). The selected time periods used in this study are the result of several criteria: availability of joint in situ and radar data, snowfall at the ground, and temperatures below -1°C to remove melting snowflakes, which are not represented in our scattering simulations.

2.2.1 Measurement Site Hyytiälä

In Hyytiälä, Finland, the University of Helsinki operates a Forestry Field Station (61.84398°N , 24.28758°E ; 150 m MSL). The station is equipped with a vertically pointing, 94 GHz cloud radar by RPG (instrument type RPG-FMCW-94-DP). The radar has a range resolution of about 25.5 m in the height range near-ground that we use. VISSS1 was deployed in the field close to the radar during winter 2021/2022. Since November 2023, the third generation VISSS (VISSS3) is set up there which has a pixel resolution of $46.0 \mu\text{m px}^{-1}$, a frame rate of 220 Hz, and an observation volume of $w \times d \times h = 47.1 \times 47.1 \times 58.9 \text{ mm}^3$. Near-surface air temperature T from the site's weather station and the LWP product from a HATPRO microwave radiometer (Rose et al., 2005) are used as auxiliary data. Equivalent liquid SR data from a Pluvio gauge is used for validation. Radar, LWP, Pluvio SR, and T , data are accessed via the Cloudnet data portal (Moisseev and Petäjä, 2024).

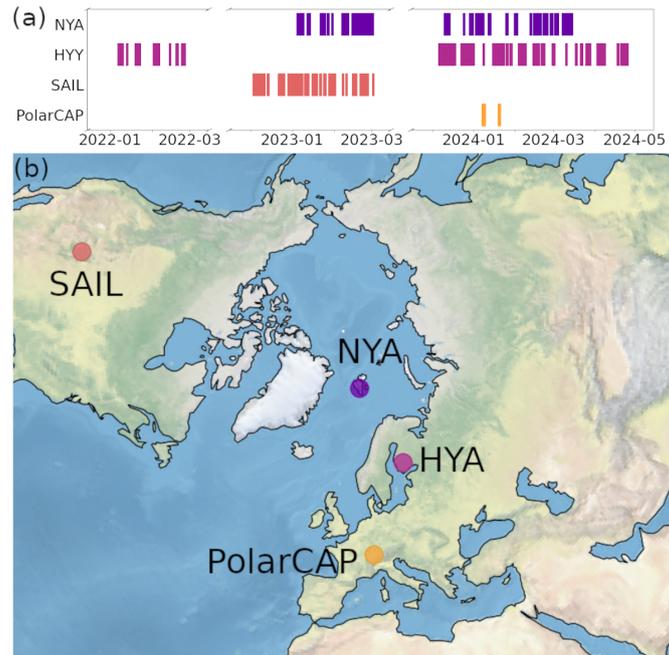


Figure 1. (a) temporal coverage and (b) locations of evaluation datasets: Ny-Ålesund site (NYA) in Svalbard; Hyytiälä site (HYY) in Finland; SAIL site in Crested Butte, Colorado, USA; PolarCAP campaign in Eriswil, Switzerland. For SAIL, polarimetric W-band measurements at 40° elevation were obtained.

120 2.2.2 Measurement Site Ny-Ålesund

The joint French-German Arctic research station AWIPEV is located in Ny-Ålesund, Svalbard (78.92308°N , 11.92108°E ; 11 m MSL). On the roof of the AWIPEV observatory a 94 GHz radar is operated by the University of Cologne (JOYRAD-94). JOYRAD-94 is a non-scanning, Doppler cloud radar manufactured by RPG (instrument type RPG-FMCW-94-SP). JOYRAD-94 has a range resolution of about 3.2 m in the height range we are interested in. Since December 2021, the second generation
 125 VISSS (VISSS2) is located on the measurement field close to the observatory. VISSS2 has a pixel resolution of $43.266 \mu\text{m px}^{-1}$, a frame rate of 250 Hz, and an observation volume of $w \times d \times h = 55.2 \times 55.2 \times 44.2 \text{ mm}^3$. Additionally, we use near-surface air temperature T from the site and the LWP product from a HATPRO. JOYRAD-94, LWP, and T , data are accessed via Cloudnet (Ebell and Ritter, 2024).

2.2.3 Field Experiment at Eriswil, Switzerland

130 Similar to SAIL, LIMARD94 and VISSS1 were deployed jointly in Eriswil, Switzerland (47.07056°N , 7.87278°E ; 921 m MSL) during the PolarCAP (Polarimetric Radar Signatures of Ice Formation Pathways from Controlled Aerosol Perturbations) field experiment in winter 2023/24. The field experiment was conducted under the umbrella of the ERC research project CLOUDLAB (Henneberger et al., 2023) by ETH Zurich. LIMRAD94 was operated with a range resolution of about 12 m below

2000 m. Auxiliary T , and LWP data (derived from a HATRPO) is available from the mobile exploratory platform LACROS of
 135 the Leibniz Institute for Tropospheric Research (TROPOS) and accessed via Cloudnet (Seifert, 2024). Only a small subset of
 the campaign data can be used for this study due to warm near-surface temperatures at Eriswil during PolarCAP.

3 Methods

Figure 2 summarizes the overall logic of the paper and gives an overview of the methods described in the following sections.
 We use ground-based in situ and radar data to derive reference IWC and SR (Sect. 3.2). A riming retrieval is used to get more
 140 accurate estimations of snow particle masses (Sect. 3.1). In addition, auxiliary data is used for the retrieval development and
 validation. Two variants of IWC and SR relations (Sect. 3.4) are derived based on SAIL data and validated with HYY, NYA,
 and PolarCAP data: 1. depending on radar reflectivity Z_e , air temperature T and normalized rime mass M and 2. depending
 on radar reflectivity Z_e , air temperature T and LWP. We show the applicability of 1. to ground-based and of 2. to both ground-
 based and space-borne data.

145 3.1 Normalized rime mass retrieval

We take advantage of the joint radar and in situ observations to quantify ice and snow particle riming. To describe riming, we
 use the normalized rime mass M introduced by Seifert et al. (2019). M is defined as the particle's rime mass m_{rime} divided by
 the mass of a size-equivalent spherical graupel particle m_g , where we assume a rime density of $\rho_{\text{rime}} = 700 \text{ kg m}^{-3}$:

$$M = \frac{m_{\text{rime}}}{m_g}, \quad (1)$$

150 where

$$m_g = \frac{\pi}{6} \rho_{\text{rime}} D_{\text{max}}^3. \quad (2)$$

D_{max} is the maximum dimension defined as the diameter of the smallest circle encompassing the ice particle in m.

M is a quantitative measure of how heavily rimed an ice particle is with $M = 0$ meaning completely unrimed and $M \rightarrow 1$
 meaning spherical graupel. M is not necessarily dependent on particle size. However, assuming a fixed amount of liquid water
 155 available for riming, larger particles will have lower M than smaller particles after riming (Maherndl et al., 2023).

We use the combined method from Maherndl et al. (2024a) to retrieve M , which was originally developed for airborne data.
 Here, we adopted the method for application to ground-based data. In the following, we give a brief description of the retrieval
 and our adaptations for ground-based data. For more details, we refer the reader to Maherndl et al. (2024a).

The combined method derives a time series of M from collocated PSD and radar reflectivity Z_e measurements. Here, we
 160 assume PSDs derived from VISSS observations at the ground are representative of particles in the minimum radar measurement
 volume above ground. For SAIL, we use the radar range gate in an altitude of about 355 m, which is located closest to VISSS
 due to the radar elevation angle. We derive the standard deviation of Z_e between 410 m and 355 m (corresponding to five
 range gates) and remove all time stamps with standard deviation larger 2 dB. This is done to remove times with strong vertical

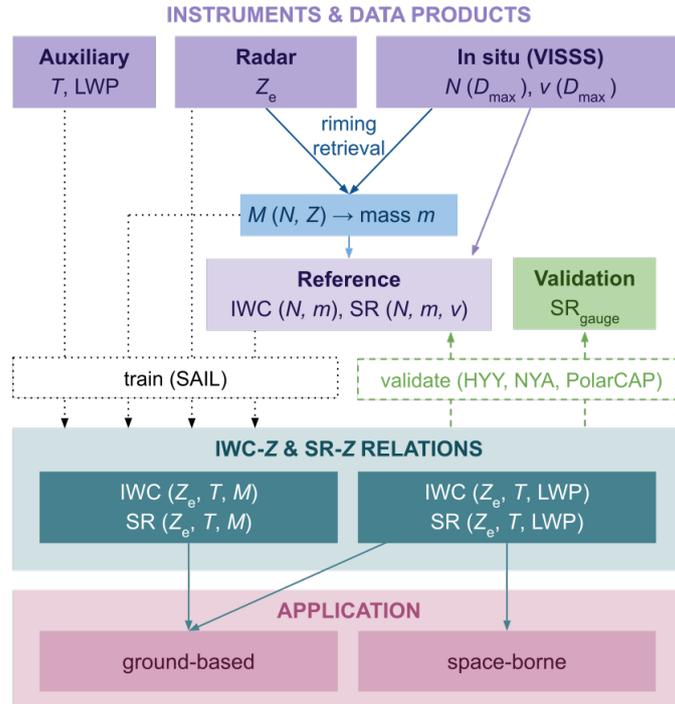


Figure 2. Overall logic of the paper. The purple section gives an overview of the used instruments and data products, where Z_e is the W-band radar reflectivity, D_{\max} the maximum dimension of snow and ice particles, N the number concentration, v the fall velocity, M the normalized rime mass, m the particle mass, T the air temperature, LWP the liquid water path, SR the snowfall rate and IWC the ice water content. The data products from the SAIL site are used to train the IWC and SR relations shown in the mint section. Data from the HYY, NYA, and PolarCAP sites are used for validation (green). The relations depending on M can be applied to ground-based data; the relations depending on LWP can be applied to both ground-based and space-borne data (pink section).

gradients of Z_e close to ground, where the assumption that the PSD does not change from the radar range gate to the ground
 165 does not hold. Further, we filter for $Z_e > -5$ dBZ to remove very light snowfall cases. For HYY, NYA, and PolarCAP, we select
 the closest range gate to the ground, i.e., the range gate above the minimum measurement range (corresponding to altitudes of
 about 100-150 m) and derive standard deviations of Z_e over all range gates below 200 m. We also filter for standard deviations
 smaller than 2 dB and $Z > -5$ dBZ. PSDs and Z_e are averaged for 100 s to account for the different observational volume (at
 least to a certain extent). We tested different time offsets of up to 5 minutes between radar and VISSS to account for the typical
 170 sedimentation time of snow particles to the ground. However, we found that the M results did not change within the retrieval
 uncertainties and therefore chose to use no time offset. 100 s averaging windows ~~corresponds~~ correspond to a spatial distance
 of about 1 km assuming a horizontal wind speed of 10 ms^{-1} .

The retrieval uses Optimal Estimation (Rodgers, 2000) with the pyOptimalEstimation Python library (Maahn et al., 2020)
 to derive M by forward simulating Z_e based on the observed in situ PSD and and comparing to the matched, observed Z_e .

175 As forward operator, the Passive and Active Microwave radiative TRAnsfer tool (PAMTRA, Mech et al., 2020) is used, which includes empirical relationships from Maherndl et al. (2023) for estimating particle scattering properties based on the Self-Similar Rayleigh-Gans Approximation (SSRGA, Hogan and Westbrook, 2014; Hogan et al., 2017) as a function of M . Maherndl et al. (2023) assumed horizontally aligned ice particles viewed by vertically pointing radar. We therefore recalculated the SSRGA coefficients for a viewing angle of 40° to be applicable for the slanted SAIL data and present the results in Appendix
 180 A. Particle mass $m(D_{\max})$ is approximated by a power law relation with prefactor a_m and exponent b_m

$$m(D_{\max}) = a_m D_{\max}^{b_m}. \quad (3)$$

We use the riming-dependent mass-size parameters a_m and b_m (i.e., the “mean” parameters from Maherndl et al., 2023) that were estimated for different degrees of riming, i.e., M values. In Maherndl et al. (2023), discrete mass-size parameter are given, which we interpolate for continuous M . Because currently no particle classification product is available for all sites and mass-
 185 size parameter variability is rather dominated by riming than by particle shape (Maherndl et al., 2023; Mason et al., 2018b), we assume a mixture of particle shapes (columns, dendrites, needles, plates, rosettes) and use the “mean” mass-size parameters, which are closest to the parameters for aggregates of plates. Maherndl et al. (2024a) investigated the dependence of the retrieved M on the particle shape assumption and showed that assuming plates or dendrites result in the same M within the retrieval uncertainty estimates. M results assuming columns are slightly lower than assuming dendrites. Our results could therefore
 190 have a slight positive bias during snowfall events with column-like shapes.

The M retrieval results are used for multiple purposes in this study. First, we use M to estimate particle masses by choosing the appropriate parameters from Maherndl et al. (2023) for each time step (Sect. 3.2). Second, we use M to select time periods with predominately unrimed particles to derive a relation between $Z_e(\text{IWC})$ for vertically pointing radar and $Z_e(\text{IWC})$ for a viewing angle of 40° (Sect. 3.3). Third, we investigate the dependence of $Z_e\text{-IWC}$ and $Z_e\text{-SR}$ relation on M (Sect. 4.1.1).

195 3.2 Reference IWC and SR data

To derive IWC from in situ PSD observations, size-resolved ice particle mass must be assumed. For our IWC reference dataset, IWC is calculated by summing the product of ice particle mass $m(D_{\max})$ and VISSS observed $N(D_{\max})$ for the lower to upper size ranges of the VISSS, D_{lower} to D_{upper}

$$\text{IWC} = \sum_{D_{\text{lower}}}^{D_{\text{upper}}} m(D_{\max}) N(D_{\max}) \Delta D_{\max}, \quad (4)$$

200 where ΔD_{\max} is the size bin width. $N(D_{\max})$ is taken from the “level2match” VISSS data, where particles observed with both VISSS cameras are matched and binned particle properties are available as a function of time either from one of the cameras or using the minimum, average, or maximum from both cameras. We use the maximum D_{\max} observed from both cameras for each matched particle to approximate the true D_{\max} . $m(D_{\max})$ is approximated by a power law relation with M -dependent mass-size parameters as described in Sect. 3.1.

205 SR is calculated by summing the product of ice particle mass $m(D_{\max})$, VISSS observed $N(D_{\max})$, and VISSS observed particle sedimentation speed $v(D_{\max})$ for the lower to upper size ranges of the VISSS, D_{lower} to D_{upper}

$$\text{SR} = \sum_{D_{\text{lower}}}^{D_{\text{upper}}} m(D_{\max}) N(D_{\max}) v(D_{\max}) \Delta D_{\max}. \quad (5)$$

Because sedimentation velocity can only be determined for a subset of observed particles, who are detected multiple times (see Maahn et al., 2024) NaN values must be interpolated. To avoid unrealistic behavior at the edges of the size spectrum, NaN
210 values of v are filled with v from the closest available size bin. [Removing cases with NaN values would greatly reduce the number of data points.](#)

[It must be noted that our reference IWC and SR data are not fully independent of \$Z_e\$ because we derive the particle mass from the retrieved normalized rime mass \$M\$. This is a necessary limitation because IWC and SR cannot be inferred from the available in situ measurements alone. For SR, we evaluate our approach with completely independent SR gauge measurements.](#)

215

3.3 Viewing angle correction

Falling ice and snow particles typically orient themselves horizontally in the atmosphere (List and Schemenauer, 1971; Zikmunda and Vali, 1972; Wang, 2021; Stout et al., 2024), thus their radar reflectivity depends on the viewing angle. Because only vertically-pointing radar observations are available for the validation sites, a Z_e correction must be applied to compare to the
220 40° observation angle at SAIL. To derive the correction term, HYY, NYA, PolarCAP, and SAIL data are filtered for $M < 0.01$ to get all time intervals with (predominately) unrimed particles. Because for PolarCAP only 155 data points remain, PolarCAP data is excluded in the further steps. Then, median Z_e for IWC in 30 logarithmic bins between 10^{-5} kgm^{-3} and 10^{-2} kgm^{-3} are derived for HYY, NYA, and SAIL. Logarithmic bins were chosen because the reference IWC data follows approximately a normal distribution in logarithmic space; the number of bins was selected such that there is a sufficient amount of data points
225 per bin.

The results show (Fig. 3) that medians for HYY and NYA are nearly identical and therefore a joint median is derived. The reduction of median Z_e by using slanted observations at SAIL instead of vertically pointing observations at HYY and NYA ~~between the vertically pointing~~ is nearly constant with IWC and results to $2.29 \pm 0.39 \text{ dB}$ (mean \pm standard deviation). Thus, the offset can be subtracted from the vertically-pointing Z_e data to correct for the 40° observation angle. To test whether radar
230 calibration or climatological differences causes the derived offset instead of the viewing angle, we performed a similar analysis comparing 90° SAIL observations for the time when they ~~when~~ [where](#) available together with the 40° data in February 2023. The threshold for unrimed particles had to be increased to $M < 0.02$, to have a sufficient number of data per IWC bin for the analysis ($M < 0.02$: on average over 30 per bin and 700 data points in total; $M < 0.01$: only 200 data points in total). We found a similar offset of $2.25 \pm 0.80 \text{ dB}$, albeit with a higher standard deviation likely due to the smaller number of observations. This
235 indicates the offset is indeed caused by viewing angle. Distributions of 40° and (corrected) 90° Z_e during scans in Feb 2023 are shown in Appendix B. The offset likely depends on properties such as the PSD in addition to particle orientation. We tested

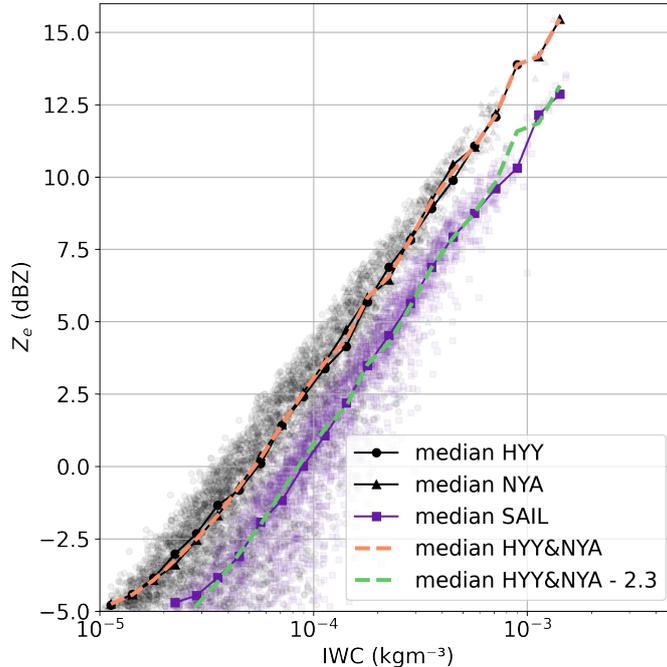


Figure 3. W-band Z_e as a function of IWC derived for unrimed particles for vertically pointing radar at Hyytiälä (HYY), Finland, and Ny-Ålesund (NYA), Svalbard (grey points) and for 40° observations from the SAIL site in Gothic, Colorado, USA (violet points). Data suggest an offset correction of $2.252,29 \pm 0.800,39$ dB. See text for further explanations.

the dependence on particle riming by performing a similar analysis for specific M ranges. We found the same offset within the respective standard-deviation ranges, albeit with larger standard deviations for larger M values, likely due to the smaller amount of data. We hypothesize that for single events the offset might differ but averages to the derived value over longer time spans for the analyzed sites.

3.4 Deriving IWC- Z_e and SR- Z_e relations

The reference IWC in kgm^{-3} and SR in liquid water equivalent mmhr^{-1} (Sect. 3.2) are related to the equivalent (40° slanted) radar reflectivity factor close to ground z_e in linear units mm^6m^{-3} , near-surface air temperature T in $^\circ\text{C}$, and normalized rime mass M for $M > 0$:

$$245 \quad \text{IWC} [\text{kgm}^{-3}] = p_1 \cdot z_e^{p_2} \cdot 10^{p_3 \cdot T} \cdot M^{p_4}, \quad (6)$$

and

$$\text{SR} [\text{mmhr}^{-1}] = p_5 \cdot z_e^{p_6} \cdot 10^{p_7 \cdot T} \cdot M^{p_8}, \quad (7)$$

where p_i are the respective fit coefficients. z_e in linear units is converted to Z_e in logarithmic units with $Z_e[dBZ] = 10 \cdot \log_{10}(z_e[\text{mm}^6\text{m}^{-3}])$. A multi-linear regression is performed to derive the coefficients p_i , which are presented in Sect. 4.1.1.

However, M is typically not available for sites without in situ PSD data. Therefore, we also relate the reference IWC in kgm^{-3} and SR in liquid water equivalent mmhr^{-1} to z_e in mm^6m^{-3} , T in $^\circ\text{C}$, and [the vertical LWP](#) in kgm^{-2} , which should indicate periods, where riming is likely (Moisseev et al., 2017):

$$\text{IWC} [\text{kgm}^{-3}] = q_1 \cdot z_e^{q_2} \cdot 10^{q_3 \cdot T} \text{LWP}^{q_4}, \quad (8)$$

and

$$\text{SR} [\text{mmhr}^{-1}] = q_5 \cdot z_e^{q_6} \cdot 10^{q_7 \cdot T} \cdot \text{LWP}^{q_8}, \quad (9)$$

where q_i are the respective fit coefficients. Again, a multi-linear regression is performed to derive the coefficients p_i , which are presented in Sect. 4.1.2.

[We chose the functional forms of Eq. 6-9, because power law relations are commonly used for IWC- \$Z_e\$ and SR- \$Z_e\$ \(Fuller et al., 2023\). \$T\$ in degree Celsius must be input linearly due to negative values. The logarithm of \$M\$ and LWP are used, because the logarithm of both variables often follows a Gaussian shape.](#)

4 Results and Discussion

In this section, we first present our novel IWC- Z_e and SR- Z_e relations (Sect. 4.1). We show results for the respective fit coefficients using Z_e , T , and M (Sect. 4.1.1), and Z_e , T , and LWP (Sect. 4.1.2). The latter can be applied when there is no in situ snowfall data, but a radiometer LWP product available, as is common for Cloudnet sites or certain space-borne instruments such as WIVERN. All relations are then evaluated against the reference IWC and SR dataset (described in Sect. 3.2) and their application to space-borne radar is tested using WIVERN as an example in Sect. 4.2. In addition, we compare the performance of the IWC- Z_e relations to literature relations and evaluate results for the SR- Z_e relations with gauge data.

4.1 Empirical relations to derive IWC and SR

In general, the fit functions presented in the following should be applied to attenuation corrected 40° slanted Z_e . By applying the correction term from Sect. 3.3, vertically pointing Z_e can also be used. Here, we only use Z_e data from ground-based radar close to ground (to be able to compare to in situ snowfall observations at ground). Attenuation due to atmospheric gases and hydrometers from the ground to the near-surface radar volume can be neglected thus we did not perform attenuation corrections of Z_e .

4.1.1 Dependence on Z_e , T , and M

Table 1 presents the fit coefficient results for Eq. 6 and Eq. 7. The resulting IWC- Z_e and SR- Z_e relations are shown together with the reference IWC and SR data in Fig. 4 for varying M from unrimed ($M < 0.01$) to spherical graupel ($M = 1.0$). The

Table 1. IWC in kgm^{-3} and SR in mmhr^{-1} fit coefficients using z_e in mm^6m^{-3} , T in $^\circ\text{C}$, and M .

IWC coefficients				SR coefficients			
p_1	p_2	p_3	p_4	p_5	p_6	p_7	p_8
$1.17 \cdot 10^{-5}$	0.95	-0.015	-0.38	0.044	1.10	0.00053	-0.31

p_1 is given in kgm^{-3} and p_5 in mmhr^{-1} .

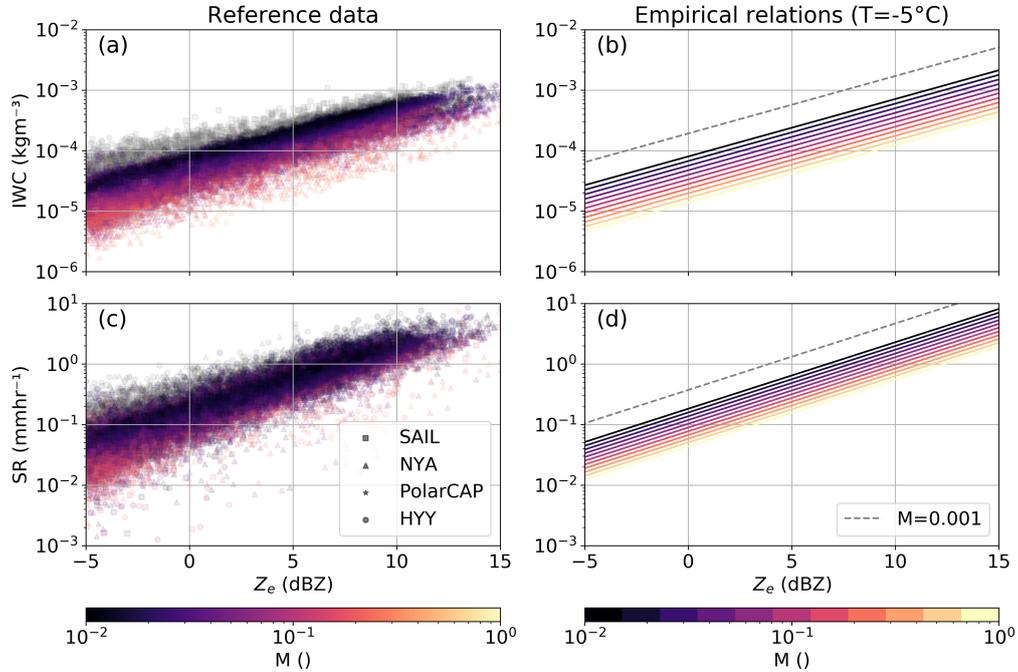


Figure 4. Reference data for (a) IWC- Z_e and (b) SR- Z_e for the different sites denoted with different symbols. M is color coded; Data points with $M < 0.01$ are considered (predominately) unrimed and shown in gray. (c) IWC- Z_e and (d) SR- Z_e empirical functions for $T = -5^\circ\text{C}$ and M ranging from 0.01 (nearly unrimed) to 1.0 (spherical graupel). The respective function for $M = 0.001$, which corresponds to the lowest 1% of M retrieval results, is shown as a gray dashed line in (c) and (d).

reference data set contains only few data points with M close to 1.0, due to the rare occurrence of particle populations consisting only of dense, spherical graupel. IWC and SR for unrimed particles are generally higher at constant W-band Z_e than for rimed particles and decrease with increasing amounts of riming. The spread in IWC- Z_e or SR- Z_e space due to riming is stronger for IWC than SR. This is likely due to increased fall velocities of rimed particles, which result in higher SR, counteracting the IWC- Z_e spread.

Table 2. IWC in kgm^{-3} and SR in mmhr^{-1} fit coefficients using z_e in mm^6m^{-3} , T in $^\circ\text{C}$, and LWP in kgm^{-2} .

LWP (kgm^{-2})	IWC coefficients				SR coefficients			
	q_1	q_2	q_3	q_4	q_5	q_6	q_7	q_8
≥ 0.1	$1.93 \cdot 10^{-5}$	0.94	-0.045	-0.23	0.096	1.05	-0.020	-0.13
< 0.1	$4.39 \cdot 10^{-5}$	1.01	-0.016	0.0	0.13	1.16	-0.0043	0.0

q_1 is given in kgm^{-3} and q_5 in mmhr^{-1} .

4.1.2 As functions of Z_e , T , and LWP

Table 2 presents the fit coefficient results for Eq. 8 and Eq. 9. Figure 5 shows the resulting IWC- Z_e and SR- Z_e relations for varying LWP and T conditions. Literature IWC- Z_e and SR- Z_e relations for W-band from Hogan et al. (2006); Protat et al. (2016); Matrosov (2007); Liu (2008); Kulie and Bennartz (2009) are included for comparison. Here, we applied our viewing angle correction to compute Z_e for 40° observations. At constant (W-band) Z_e , IWC and SR increase with decreasing temperature. This is similar to Hogan et al. (2006) and Protat et al. (2016) for $Z < 20$ dBZ. Because we lack data points with $Z > 20$ dBZ, we cannot confirm the inverse temperature behavior for such large Z_e values. Our SR- Z_e relations follow Matrosov (2007) more closely than to the others shown here.

Different threshold values for LWP to set q_4 and q_8 to zero—thereby excluding LWP from the IWC and SR relations—were tested and 0.1 kgm^{-2} offered the best trade-off between improvement in Pearson correlation (R^2) and RMSE, while assuring a sufficient amount of data with LWP above the threshold (about 26% of SAIL data).

4.2 Validation and uncertainty estimates

The empirical relations presented in Sect. 3.4 are validated based on data from SAIL data and additional mid- and high-latitude ground-based sites in Hyytiälä, Ny-Ålesund, and Eriswil (Sect. 2) and compared to literature IWC- Z_e relations from Hogan et al. (2006) and Protat et al. (2016). We first demonstrate the application to ground-based radar using the original vertical resolution of the respective instrument (Sect. 4.2.1). Second, we investigate the application to space-borne radar using the example of the planned WIVERN mission (Sect. 4.2.2). We compare IWC and SR derived with our empirical relations using reflectivity Z_e from the lowest range bin to the reference IWC and SR derived from in situ data (Sect. 3.2). IWC and SR derived with Eq. 6-9 relations are denoted $\text{IWC}_{\text{regression}}$ and $\text{SR}_{\text{regression}}$, respectively. Reference IWC and SR based on in situ data and retrieved normalized rime mass M (Eq. 4 and Eq. 5) are denoted $\text{IWC}_{\text{reference}}$ and $\text{SR}_{\text{reference}}$, respectively. We further derive the normalized root mean square error (NRMSE) as a function of IWC and SR, respectively, and compare SR results to gauge measurements at SAIL and Hyytiälä (Sect. 4.2.3).

4.2.1 Application to ground-based radar

Figure 6 shows a 2d density plot of $\text{IWC}_{\text{regression}}$ vs. $\text{IWC}_{\text{reference}}$ for SAIL data and all additional sites for the empirical functions using M as well as using LWP. Including M gives a high Pearson correlation coefficient for SAIL data and all

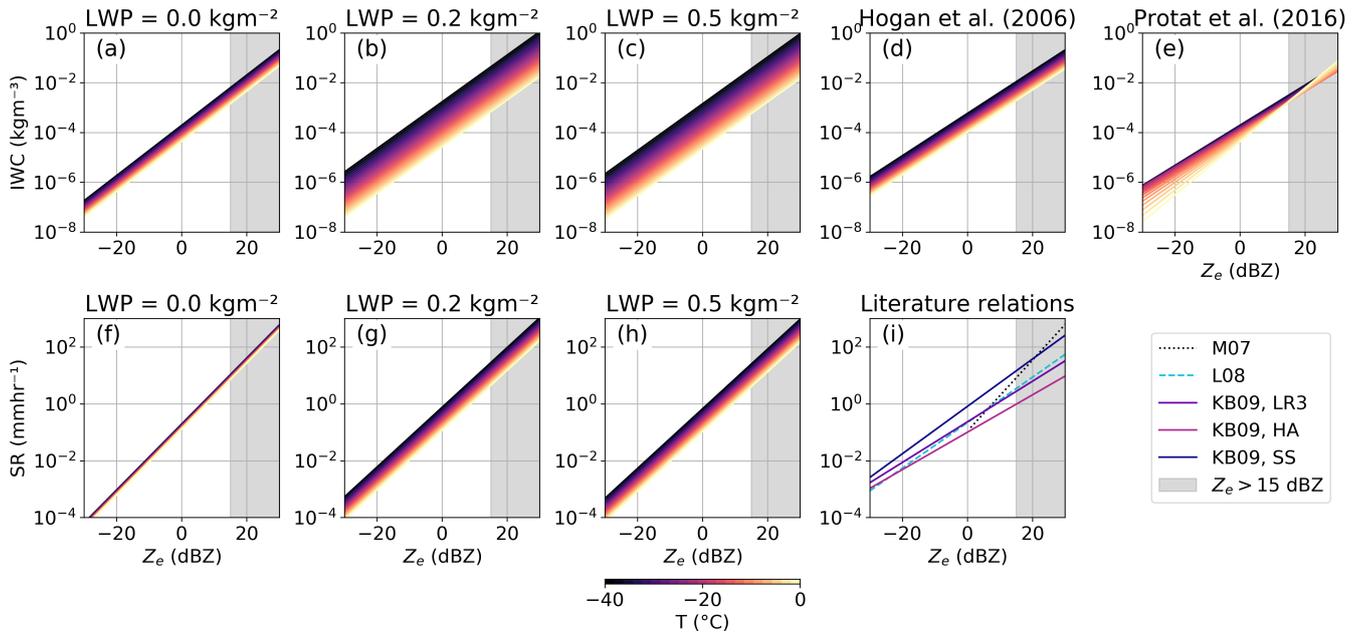


Figure 5. IWC- Z_e (top) and SR- Z_e (bottom) empirical functions for (a)&(f) $LWP = 0.0 \text{ kgm}^{-2}$, (b)&(g) 0.2 kgm^{-2} , (c)&(h) 0.5 kgm^{-2} and T ranging from -40° C to 0° C . Empirical IWC- Z_e functions from Hogan et al. (2006) and Protat et al. (2016) are shown in (d) and (e), respectively. SR- Z_e from Matrosov (2007) (M07), Liu (2008) (L08), and Kulie and Bennartz (2009) (KB09, LR3; KB09, HA; KB09, SS) are shown in (i). [Due to data availability, \$Z_e > 15 \text{ dBZ}\$ is shaded in black.](#)

310 [other sites](#) of about $R^2=0.96$. Without knowledge of M —i.e., when there are no in situ measurements at a given [site](#)— LWP can act as a proxy of riming, reducing uncertainties compared to using only Z_e and T . Fig. 6.c shows that the relation from Hogan et al. (2006) overestimates IWC for our data. This is likely [in part](#) due to Hogan et al. (2006) using mass-size parameters for unrimed particles in [there](#)-[their](#) calculations of reference IWC. [Differences in particle habit assumptions and PSD observations might also play a role.](#) As shown in Fig. 4, unrimed particles have higher IWC at the same Z_e as rimed particles. Therefore, applying an IWC relation derived for unrimed particles to data including riming leads to an overestimation of IWC. Protat et al. (2016) performs better (Fig. 6.d), but also shows a slight overestimation compared to our relations, especially for small IWC. Our relations have higher R^2 , lower RMSE, and ME closer to zero than the literature relations. R^2 , RMSE, and ME were derived over the whole IWC range to compare the different relations rather than give uncertainty estimates of IWC, as discussed later in Sect. 4.2.3.

315

Similarly, Fig. 7 shows the performance of our SR- Z_e relations compared to the reference SR. Again, the relation including M outperforms the one with LWP , but the difference is less drastic. This is likely due to high fall velocities at large M counteracting the effect of riming on IWC at constant Z_e . While the IWC relations developed for SAIL perform similarly well for the other sites, the SR relations performs noticeable worse indicating site-specific effects ([e.g., orographically induced](#)

320

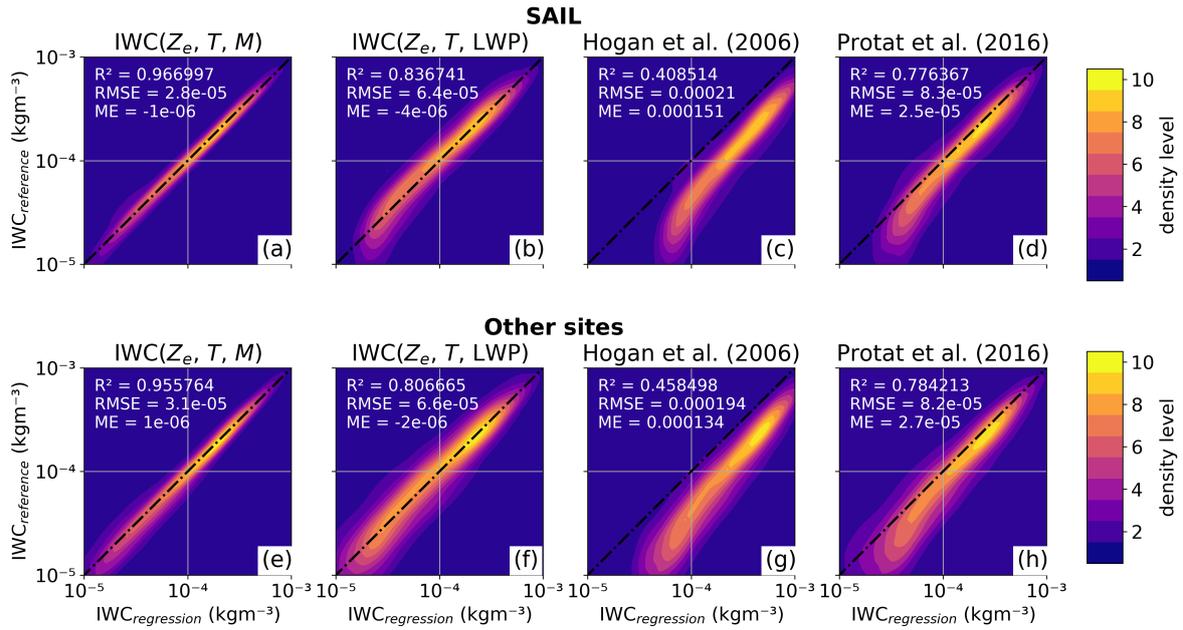


Figure 6. 2d density plot of IWC in kgm^{-3} derived with empirical functions from (a)&(e) equivalent radar reflectivity Z_e , air temperature T , and normalized rime mass M , and (b)&(f) from Z_e , T , and liquid water path LWP ($\text{IWC}_{\text{regression}}$) vs. in situ measurements ($\text{IWC}_{\text{reference}}$), which have been used to derive the empirical functions, for the SAIL site (top), and all [other sites](#) (bottom). (c)&(g) and (d)&(h) show the performance of literature relations from Hogan et al. (2006) and Protat et al. (2016), respectively, where the Z_e was corrected for the viewing angle. Pearson correlation coefficient R^2 , root mean square error (RMSE), and mean error (ME) derived for the linear IWC data are displayed in the left corner of each subpanel. The 1:1 line is shown as a black, dash-dotted line. Data point density is plotted in ten levels from lowest (blue) to highest (yellow).

[turbulence might affect snowfall at the SAIL site](#)). However, the largest density of data falls along the 1:1 line and slightly negative ME close to 0 indicate only a small negative bias.

4.2.2 Application to space-borne radar

325 We use the measurement geometry of the planned WIVERN (Illingworth et al., 2018; Battaglia et al., 2022) instrument as an example to demonstrate the application of our empirical relations to space-borne radar. WIVERN will be equipped with 94 GHz radar and a passive 94 GHz radiometer observing profiles of Z_e and brightness temperature T_B at an incidence angle of close to 40° . A LWP retrieval using the T_B data in a similar approach to Ruiz-Donoso et al. (2020) and Billault-Roux and Berne (2021) is planned. To approximate [\(attenuation corrected\) WIVERN \$Z_e\$ observations](#), the high resolution, ground-
 330 based data from SAIL and the additional sites are down-sampled to WIVERN geometry, i.e., a vertical resolution of about 580 m and a horizontal resolution of 1 km. [We consider only the lowest grid point of the regridded \$Z_e\$ \(meaning the lowest](#)

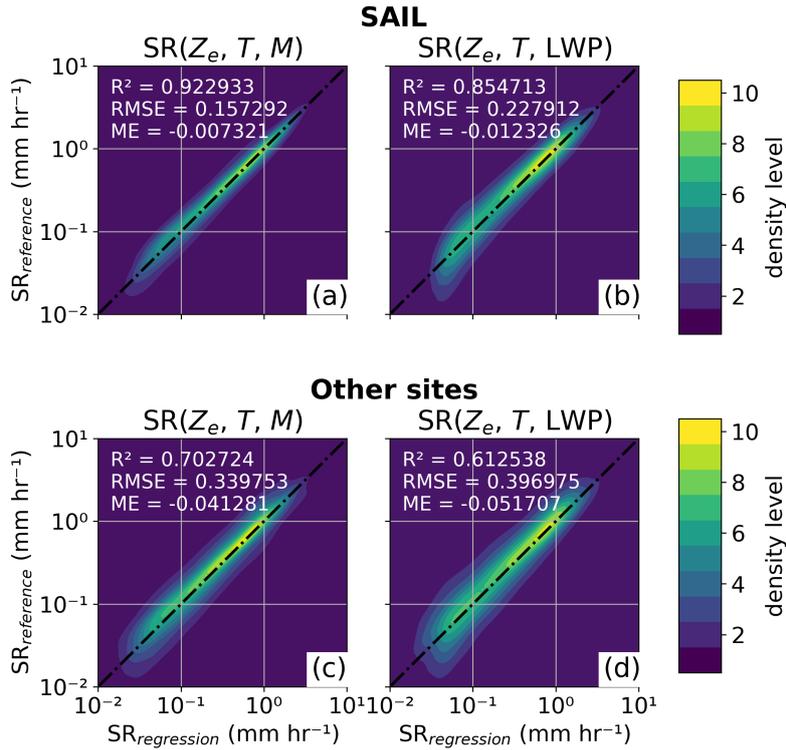


Figure 7. Same as Fig. 6 (a-b)&(e-f) but for liquid water equivalent SR.

about 580 m), which we use to compare to our reference IWC and SR. In addition, uncertainty estimates are applied to the regrided data to approximate WIVERN measurements. Uncertainties are applied in form of Gaussian noise and afterwards our relations are applied to the regrided and noisy data. Z_e uncertainties are derived based on simulations (Battaglia et al., 2024); for T an uncertainty of 2 K, and for LWP an uncertainty of 30 gm^{-2} are assumed. 30 gm^{-2} was chosen based on the maximum uncertainty of the retrievals from Ruiz-Donoso et al. (2020) and Billault-Roux and Berne (2021) (in mid- and high-latitudes). We also test assuming a higher LWP uncertainty of 60 gm^{-2} . We don't show the performance of Eq. 6 and Eq. 7, because currently, methods to derive M without in situ data do not exist. Methods based on Doppler velocity (Mosimann, 1995; Kneifel and Moisseev, 2020; Mason et al., 2018a) are not applicable in complex terrain due to orography-induced vertical air motions. The method by Vogl et al. (2022) would need to be calibrated for M first.

For space-borne application, the spread in IWC- Z_e space is larger than for ground-based data as is expected. However, the Pearson correlation coefficient is still reasonably high with $R^2=0.66$, even when we apply our empirical relations to all other sites. Doubling the LWP error from 30 gm^{-2} to 60 gm^{-2} has barely any impact, because other error sources (e.g., from averaging to the WIVERN resolution) dominate the resulting variability. The relations from Hogan et al. (2006) and Protat et al. (2016) again result in an overestimation of IWC with the latter performing better applied to our data.

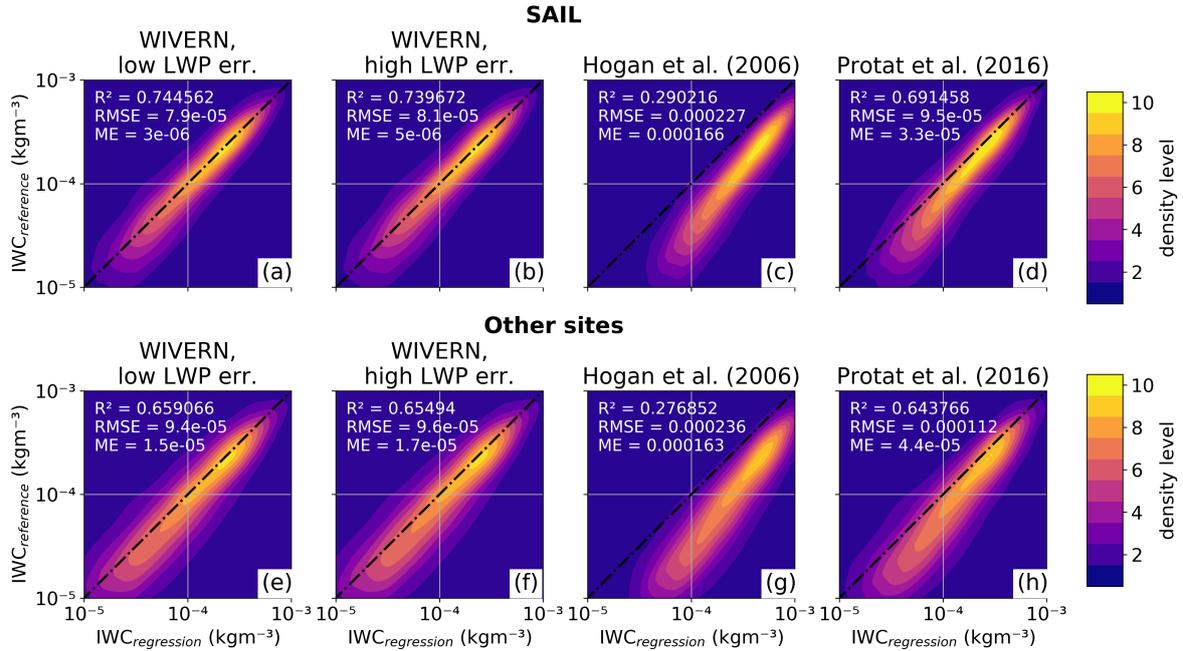


Figure 8. As in Fig. 6 but for approximated WIVERN observations (i.e., WIVERN geometry and uncertainty estimations). (a)&(e) and (b)&(f) show results for assuming a LWP uncertainty of 30 gm^{-2} (low) and 60 gm^{-2} (high), respectively.

Unsurprisingly, a larger spread for space-borne than ground-based is also present for our SR- Z_e relations. While the application to SAIL data results in higher R^2 , lower RMSE, and lower ME than to the other sites, the largest density of data is close to the 1:1 line and the increased spread predominately occurs for small SR. Positive ME show a slight positive bias, however the bias is small.

350 4.2.3 Error estimation and comparison to gauge measurements

In the previous section, we used RMSE derived over the whole IWC and SR ranges, respectively, to compare the performance of different relations. However, RMSE typically increases with increasing IWC and SR, thus deriving it over the whole IWC and SR ranges does not quantify their respective uncertainties well. The normalized RMSE as a function of IWC and SR, respectively, is a better tool to quantify uncertainties of our relations (Fig. 10). Here, we calculate RMSE of IWC (SR) for 20
 355 logarithmic bins between 0.01 gm^{-3} and 1 gm^{-3} (0.1 mmhr^{-1} and 10 mmhr^{-1}) excluding bins with less than 150 data points. We define NRMSE as RMSE divided by the center of each bin. As expected, NRMSE are generally lower when applying our relations to ground-based data than to space-borne data and decrease with increasing IWC and SR, respectively. Using M in the IWC function, NRMSE is below 75% over the whole IWC range and below 25% for $\text{IWC} > 0.1 \text{ gm}^{-3}$ outperforming the 40%-70% NRMSE range reported in Protat et al. (2016) for $\text{IWC} > 0.05 \text{ gm}^{-3}$. Using LWP, low IWC values close to 0.01 gm^{-3} have
 360 NRMSE of over 150%. NRMSE decreases with increasing IWC getting below 50% for $\text{IWC} > 0.2 \text{ gm}^{-3}$. For SR, NRMSE for

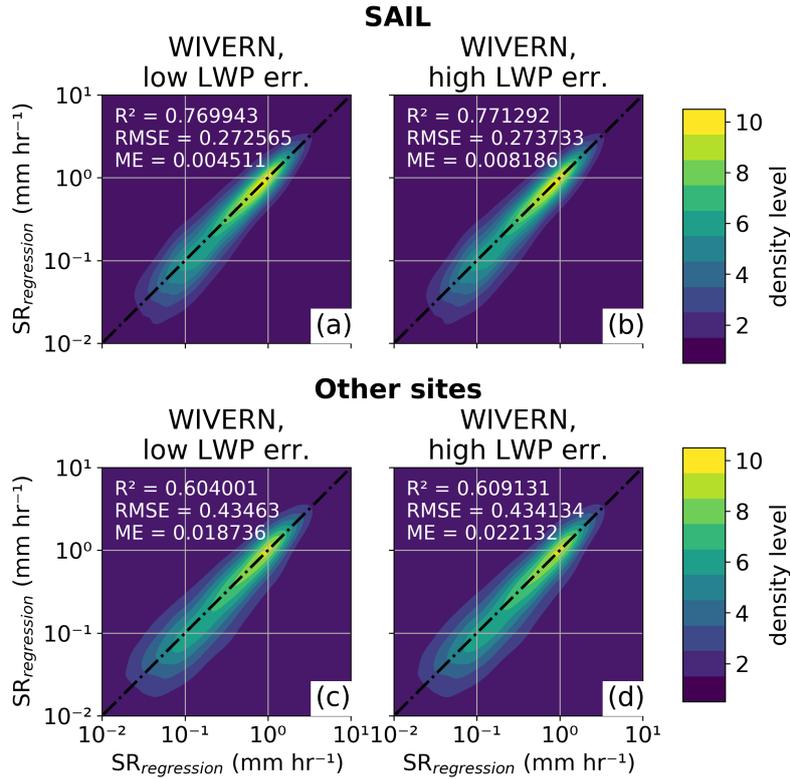


Figure 9. As in Fig. 8 (a-b)&(e-f) and but for liquid water equivalent SR.

both M and LWP dependent relations are in a similar range. For $SR > 0.2 \text{ mm hr}^{-1}$, the M relation results in NRMSE below 60% and the LWP relation below 70% and 80% for ground-based and space-borne application, respectively. While SR NRMSE generally decreases for both relations, there is more variability than for IWC. This is likely due to multiple reasons. First, high SR events are rare and therefore the number of data points for the highest SR bins is lower than for the highest IWC bins.

365 Second, the variability of fall velocities of particles during events with large SR might be larger. The resulting uncertainty of particle fall velocities is likely not covered by our relations. Fig. 4 also shows that at low Z_e , meaning generally lower SR, there is a clear spread dependent on particle riming with larger values of M resulting in lower SR. However, at large Z_e (about $> 5 \text{ dBZ}$) and therefore generally larger SR, this spread is less visible with lower SR occurring also when particles are close to unrimed. In addition, we tested the performance for a bias in Z_e . If Z_e would be biased by $+1 \text{ dB}$ e.g., due to an imperfect

370 calibration, NRMSE were increased by 13 and 16 percentage points on average for $IWC > 0.1 \text{ gm}^{-3}$ and $SR > 1.0 \text{ mm hr}^{-1}$, respectively. A bias of -1 dB is negligible.

$SR_{\text{regression}}$ is also validated against gauge measurements SR_{gauge} , which act as a completely independent reference. The validation is performed for SAIL data (Fig. 11) and a subset of HYY data (Dec 2023 to Feb 2024, Fig. 12), due to limited data availability. Gauge snowfall measurements can be subject to various sources of errors and gauge derived SR can vary

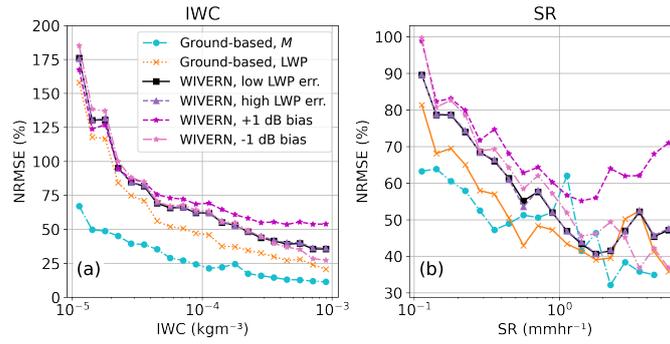


Figure 10. Normalized root mean square error (NRMSE) in percentage as function of ground-based and space-borne (WIVERN) estimates of (a) IWC and (b) SR, respectively. NRMSE for positive and negative bias in Z_e of 1 dB are shown in magenta and pink, respectively. Note the different y-axis scales.

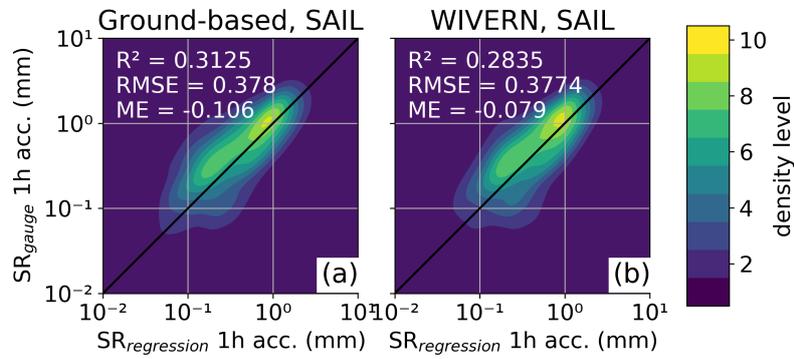


Figure 11. 2d density plot of hourly accumulated SR in mm (liquid water equivalent) derived with empirical function from equivalent radar reflectivity Z_e , air temperature T , and liquid water path LWP ($SR_{\text{regression}}$) applied to (a) ground-based radar and (b) the approximated WIVERN measurements vs. gauge measurements (SR_{gauge}) for the SAIL site. Data point density is plotted in ten levels from lowest (blue) to highest (yellow).

375 significantly between identical instruments (e.g., Yang and Simonenko, 2014) even though the one in HYY is ~~a~~ operated as a Double Fence Intercomparison Reference (DFIR, Rasmussen et al., 2012) and the one at SAIL was located in a Low Porosity Double Fence (LPDF, Kochendorfer et al., 2023). A 1:1 fit is therefore not expected. However, hourly accumulated $SR_{\text{regression}}$ show no systematic biases compared to SR_{gauge} .

5 Conclusions

380 In this study, we present novel ice water content - equivalent radar reflectivity (IWC- Z_e) and snowfall rate - equivalent radar reflectivity (SR- Z_e) relations for 40° slanted and vertically pointing W-band radar. We investigate the dependence of IWC- Z_e

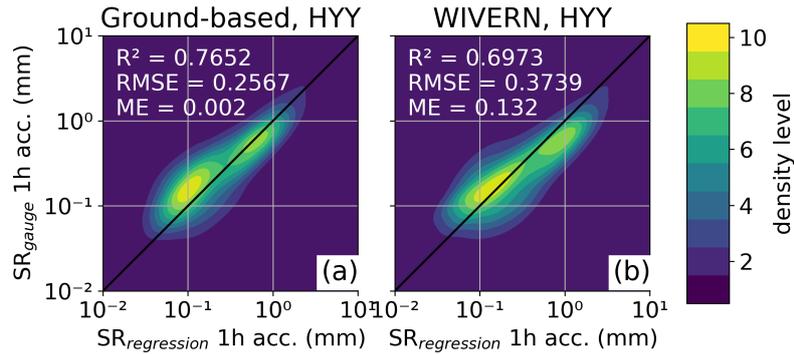


Figure 12. As in Fig. 11 but for Hyytiälä, Finland for the time period of Dec 2023 to Feb 2024.

and $SR-Z_e$ on riming, which we quantify with the normalized rime mass M (Seifert et al., 2019; Maherndl et al., 2024a), and use M in our relations to reduce the spread in the $IWC-Z_e$ and $SR-Z_e$ spaces. In addition, we present relations using liquid water path (LWP) instead of M , which can act as a proxy for the occurrence of riming. LWP is typically easier to measure
 385 than M so that the relations with LWP can be applied to ground-based or space-borne radar-radiometer instruments. The applicability of the method to observations of the proposed Earth Explorer 11 candidate mission WIVERN (Illingworth et al., 2018; Battaglia et al., 2022) is investigated.

We used joint in situ snowfall (VISSS) and remote sensing (W-band radar and radiometer) data from ground-based sites in mid- and high-latitudes to build a dataset of reference IWC and SR. Reference IWC and SR from the SAIL site (Colorado,
 390 USA) are used to derive the $IWC-Z_e$ and $SR-Z_e$ relations, while reference IWC and SR from additional sites in Hyytiälä (Finland), Ny-Ålesund (Svalbard), and Eriswil (Switzerland) are used for validation. In addition, gauge measurements from SAIL and Hyytiälä are used as an independent reference for validation.

Our main findings are summarized in the following:

1. We found that slanted W-band Z_e observations at 40° are 2.29 ± 0.39 dB (mean \pm standard deviation) lower than vertically pointing Z_e for constant IWC (Fig. 3). This offset is nearly constant over the full IWC range and likely due to snow particles being aligned predominately horizontally. As a result, this offset can be applied to correct 40° Z_e to 90° Z_e and vice versa.
 2. For a constant given Z_e , the IWC is generally lower as the ice and snow particles are ice particle populations have a lower IWC the more heavily rimed they are due to the enhanced scattering of rimed particles (Fig. 4). This also holds for SR. However, at larger Z_e (about >5 dBZ), the dependence on riming is less pronounced and lower SR also occur for unrimed particles at constant Z_e . This is likely due to rimed particles typically having larger fall speeds, thus increased SR, and to more variability in particle fall speed during high SR events in general.
- 400

3. We demonstrated the application of our IWC- Z_e and SR- Z_e relations to ground-based sites (Fig. 6 and Fig. 7). When estimates of M are available, IWC and SR can be derived accurately with Eq. 6 and Eq. 7 ($R^2=0.96$ and $R^2=0.70$ for IWC and SR, respectively). Normalized root mean square error (NRMSE) are below 50% and 25% for $IWC > 0.01 \text{ gm}^{-3}$ and $IWC > 0.1 \text{ gm}^{-3}$, respectively. For SR, the NRMSE is below 70% over the SR range. At sites without in situ data, which is currently needed to derive M , LWP can act as a proxy for the occurrence of riming (Eq. 8 and Eq. 9) resulting in $R^2=0.81$ and $R^2=0.60$ for IWC and SR, respectively. NRMSE are below 150% and 75% for $IWC > 0.01 \text{ gm}^{-3}$ and $IWC > 0.1 \text{ gm}^{-3}$, respectively, and below 70% for $SR > 0.2 \text{ mmhr}^{-1}$.
4. We also showed the application of the LWP-dependent formulas to space-borne instruments using the example of the planned WIVERN mission (Fig. 8 and Fig. 9). We approximated future WIVERN measurement by averaging the ground-based data to the coarser WIVERN resolution and applying error estimates consistent to the expected performance of WIVERN. NRMSE of the IWC and SR estimates are less than 10 percentage points higher than for ground-based applications even when assuming a high estimate for the LWP error (Fig. 10).
5. Comparing our SR estimates to gauge data for SAIL and Hyytiälä shows no stark bias towards over- or underestimation (Fig. 11 and Fig. 12). This strengthens the validity of our relations for different sites.

It must be noted that there are several assumptions that go into deriving the reference IWC and SR data. IWC and SR are based on VISSS observations and assumptions about the mass-size relation of snow particles. The assumed mass-size parameters were selected for M derived for each time step assuming a mixture of particle shapes. The M retrieval assumes that VISSS observations at the ground are representative of the matched radar volume close to ground. The retrieval method uses forward simulations with PAMTRA and scattering and physical properties of rimed ice particles are based on simulated rimed aggregates. It is assumed that the simulated rimed aggregates are representative of snow and ice particles in nature. Further observational studies focusing on particle mass and scattering behavior are needed to investigate these assumptions.

Our empirical functions were derived and validated based on few sites in mid- and high latitudes in the Northern hemisphere. More sites with combined in situ and W-band radar measurements would be necessary to investigate if the empirical relations can be applied globally.

In conclusion, the proposed IWC and SR relations provide a novel way to reduce uncertainties of IWC and SR estimates for W-band radar by accounting for particle riming. Advantages to current literature relations are the flexibility in terms of viewing angle (40° slanted and 90° vertical) and the inclusion of LWP, allowing the application to ground-based and space-borne radar-radiometer combinations like EarthCARE or the proposed WIVERN mission. The Doppler capabilities of EarthCARE might even allow to quantify riming from the hydrometeor fall velocities via the approach from Mosimann (1995) or via optimal estimation techniques (Mroz et al., 2023; Mason et al., 2023). Then, the IWC and SR relations including M can be used, which have lower uncertainties than the ones based on LWP.

Data availability. SAIL data were obtained from the Atmospheric Radiation Measurement (ARM) user facility, a U.S. Department of Energy (DOE) Office of Science user facility managed by the Biological and Environmental Research Program.: LIMRAD94 (<https://doi.org/10.5439/2229846>, last access: 28 Nov 2024), VISSS (<https://doi.org/10.5439/2278627>, last access: 5 Dec 2024), the meteorological in situ data of AMF2 (<https://doi.org/10.5439/1786358>, last access: 28 Nov 2024), and the microwave radiometer retrieval products (<https://doi.org/10.5439/1027369>, last access: 5 Dec 2024). Cloudnet data from Hyytiälä, Ny-Alesund, and the PolarCAP campaign are available for download from <https://cloudnet.fmi.fi> (last access: 28 Nov 2024). VISSS1 and VISSS2 data from Hyytiälä and Ny-Alesund are published on PANGAEA (HYY: <https://doi.org/10.1594/PANGAEA.959046>, last access: 5 Dec 2024; NYA: <https://doi.org/10.1594/PANGAEA.958537> and <https://doi.org/10.1594/PANGAEA.965766>, last access: 5 Dec 2024). VISSS3 data from Hyytiälä and VISSS1 data from PolarCAP are available upon request.

Appendix A: Riming dependent SSRGA coefficients for 40° slanted radar

We performed the same analysis as in Maherndl et al. (2023) to parameterize the Self-Similar Rayleigh-Gans Approximation (SSRGA, Hogan and Westbrook, 2014; Hogan et al., 2017) parameters α_e , κ , γ , β , and ζ_1 but for 50° tilted instead of horizontally aligned particles to account the 40° observations during SAIL in our scattering calculations. For further detail in regards to SSRGA and the riming-dependent parametrization, we refer to Maherndl et al. (2023).

Eq. A1 gives the form of the function to derive each SSRGA parameter.

$$\text{SSRGA parameter} = p_1 M^{2p_0} + p_2 M^{p_0} + p_3, \quad (\text{A1})$$

where p_i are fit coefficients.

We obtain the following parameterizations of the SSRGA parameter depending on M for 40° slanted radar:

$$\alpha_e = 0.0168 M^{1.007} + 0.1609 M^{0.5035} + 0.7234, \quad (\text{A2})$$

$$\kappa = 0.117 M^{1.007} - 0.0022 M^{0.5035} + 0.0429, \quad (\text{A3})$$

455

$$\gamma = -0.8126 M^{1.007} + 1.6618 M^{0.5035} + 2.4369, \quad (\text{A4})$$

$$\beta = -2.648 M^{1.007} + 0.6949 M^{0.5035} + 2.8542, \quad (\text{A5})$$

$$\zeta_1 = 0.1125 M^{1.007} - 0.1316 M^{0.5035} + 0.1158. \quad (\text{A6})$$

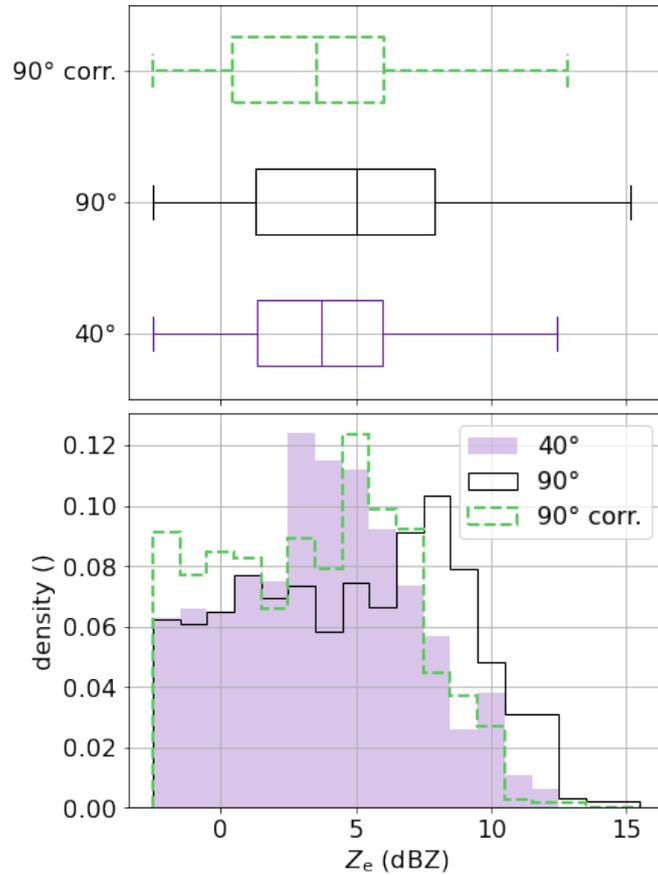


Figure B1. Boxplots (top) and distributions (bottom) of W-band Z_e during scans in Feb 2023 at SAIL at 40° (purple), 90° (black), and 90° corrected to 40° using the correction from Sect. 3.3 (green, dashed).

Appendix B: Slanted vs. vertical Z during SAIL

Fig. B1 shows distributions of Z_e close to ground during scans in February for 40° slanted and vertical observations. The correction derived in Sect. 3.3 shifts the 90° distribution closer to the 40° distribution, especially for the higher reflectivity right edge. Median and quantile values of the 40° and the corrected 90° data show close agreement strengthening the validity of our
 465 correction.

Author contributions. NM developed the described methods, analyzed and plotted the data, and wrote the manuscript. AK collected and processed the LIMRAD94 data from SAIL and PolarCAP. MM and AB acquired funding and guided the research project. All authors reviewed and edited the manuscript.

Competing interests. At least one of the (co-)authors is a member of the editorial board of Atmospheric Measurement Techniques.

470 *Acknowledgements.* This work was supported by the European Space Agency under the activity WInd VELOCITY Radar Nephoscope (WIVERN)
Phase A Science and Requirements Consolidation Study (ESA Contract Number 4000144120/24/NL/IB/ab) and by three projects funded by
the Deutsche Forschungsgemeinschaft (DFG, German Research Foundation): 408008112 ("Characterization of orography-influenced rim-
475 ing and secondary ice production and their effects on precipitation rates using radar polarimetry and Doppler spectra" (CORSIPP) within
the Priority Program SPP 2115 "Polarimetric Radar Observations meet Atmospheric Modelling (PROM) – Fusion of Radar Polarimetry
and Numerical Atmospheric Modelling Towards an Improved Understanding of Cloud and Precipitation Processes"), 268020496 (TRR 172
480 "Arctic Amplification: Climate Relevant Atmospheric and Surface Processes, and Feedback Mechanisms" (AC)³), and 516261703 ("Evalu-
ating Microphysical Pathways Of midlatitude Snow formation (EMPOS)"). We acknowledge ACTRIS and Finnish Meteorological Institute
for providing the data set which is available for download from <https://cloudnet.fmi.fi>. This research was supported by the Atmospheric
Radiation Measurement (ARM) user facility, a U.S. Department of Energy (DOE) Office of Science user facility managed by the Biological
and Environmental Research Program. We thank Mario Montopoli from CNR Rome for his constructive feedback, which helped to improve
this study.

References

- Battaglia, A. and Panegrossi, G.: What Can We Learn from the CloudSat Radiometric Mode Observations of Snowfall over the Ice-Free Ocean?, *Remote Sensing*, 12, 3285, <https://doi.org/10.3390/rs12203285>, 2020.
- 485 Battaglia, A., Martire, P., Caubet, E., Phalippou, L., Stesina, F., Kollias, P., and Illingworth, A.: End to end simulator for the WIVERN W-band Doppler conically scanning spaceborne radar, *Atm. Meas. Tech.*, 2021, 1–31, <https://doi.org/10.5194/amt-2021-342>, 2022.
- Battaglia, A., Rizik, A., Tridon, F., and Isakeneta, I.: I and Qs simulation and processing envisaged for space-borne polarisation Diversity Doppler Radars, *IEEE Trans. Geosci. Remote Sens.*, accepted for publication, 2024.
- Billault-Roux, A.-C. and Berne, A.: Integrated Water Vapor and Liquid Water Path Retrieval Using a Single-Channel Radiometer, *Atmospheric Measurement Techniques*, 14, 2749–2769, <https://doi.org/10.5194/amt-14-2749-2021>, 2021.
- 490 Bukovčić, P., Ryzhkov, A., and Zrnić, D.: Polarimetric Relations for Snow Estimation—Radar Verification, *Journal of Applied Meteorology and Climatology*, 59, 991–1009, <https://doi.org/10.1175/JAMC-D-19-0140.1>, 2020.
- Coppola, M., Battaglia, A., Tridon, F., and Kollias, P.: How close to the surface could a spaceborne conically scanning W-band Doppler radar see?, *IEEE Trans. Geosci. Remote Sens.*, under submission, 2024.
- 495 Coppola, M., Battaglia, A., Tridon, F., and Kollias, P.: Improved hydrometeor detection near the Earth’s surface by a conically scanning spaceborne W-band radar, *EGUsphere*, 2025, 1–24, <https://doi.org/10.5194/egusphere-2025-416>, 2025.
- Delanoë, J. and Hogan, R. J.: Combined CloudSat-CALIPSO-MODIS retrievals of the properties of ice clouds, *J. Geophys. Res. Atm.*, 115, <https://doi.org/10.1029/2009JD012346>, 2010.
- Ebell, K. and Ritter, C.: Custom collection of microwave radiometer, and radar data from Ny-Ålesund between 1 Jan 2023 and 31 Mar 2024, <https://doi.org/10.60656/c86dcce9d89b4532>, 2024.
- 500 Ebell, K., Nomokonova, T., Maturilli, M., and Ritter, C.: Radiative Effect of Clouds at Ny-Ålesund, Svalbard, as Inferred from Ground-Based Remote Sensing Observations, *J. Appl. Meteorol. Climatol.*, 59, 3–22, <https://doi.org/10.1175/JAMC-D-19-0080.1>, 2020.
- Feldman, D. R., Aiken, A. C., Boos, W. R., Carroll, R. W. H., Chandrasekar, V., Collis, S., Creamean, J. M., de Boer, G., Deems, J., DeMott, P. J., Fan, J., Flores, A. N., Gochis, D., Grover, M., Hill, T. C. J., Hodshire, A., Hulm, E., Hume, C. C., Jackson, R., Junyent, 505 F., Kennedy, A., Kumjian, M., Levin, E. J. T., Lundquist, J. D., O’Brien, J., Raleigh, M. S., Reithel, J., Rhoades, A., Rittger, K., Rudisill, W., Sherman, Z., Siirila-Woodburn, E., Skiles, S. M., Smith, J. N., Sullivan, R. C., Theisen, A., Tuftedal, M., Varble, A. C., Wiedlea, A., Wielandt, S., Williams, K., and Xu, Z.: The Surface Atmosphere Integrated Field Laboratory (SAIL) Campaign, *Bulletin of the American Meteorological Society*, 104, E2192–E2222, <https://doi.org/10.1175/BAMS-D-22-0049.1>, 2023.
- Førland, E. J., Benestad, R., Hanssen-Bauer, I., Haugen, J. E., and Skaugen, T. E.: Temperature and Precipitation Development at Svalbard 510 1900–2100, *Advances in Meteorology*, 2011, 893–790, <https://doi.org/10.1155/2011/893790>, 2011.
- Fuller, S., Marlow, S. A., Haimov, S., Burkhart, M., Shaffer, K., Morgan, A., and Snider, J. R.: W-Band S–Z Relationships for Rimed Snow Particles: Observational Evidence from Combined Airborne and Ground-Based Observations, *Atmospheric Measurement Techniques*, 16, 6123–6142, <https://doi.org/10.5194/amt-16-6123-2023>, 2023.
- Henneberger, J., Ramelli, F., Spirig, R., Omanovic, N., Miller, A. J., Fuchs, C., Zhang, H., Bühl, J., Hervo, M., Kanji, Z. A., Ohneiser, K., 515 Radenz, M., Rösch, M., Seifert, P., and Lohmann, U.: Seeding of Supercooled Low Stratus Clouds with a UAV to Study Microphysical Ice Processes: An Introduction to the CLOUDLAB Project, *Bulletin of the American Meteorological Society*, 104, E1962–E1979, <https://doi.org/10.1175/BAMS-D-22-0178.1>, 2023.

- Heymsfield, A. J., Matrosov, S. Y., and Wood, N. B.: Toward Improving Ice Water Content and Snow-Rate Retrievals from Radars. Part I: X and W Bands, Emphasizing CloudSat, *Journal of Applied Meteorology and Climatology*, 55, 2063–2090, <https://doi.org/10.1175/JAMC-D-15-0290.1>, 2016.
- 520 Hiley, M. J., Kulie, M. S., and Bennartz, R.: Uncertainty Analysis for CloudSat Snowfall Retrievals, *J. Appl. Meteorol. Climatol.*, 50, 399–418, <https://doi.org/10.1175/2010JAMC2505.1>, 2011.
- Hogan, R. J. and Westbrook, C. D.: Equation for the Microwave Backscatter Cross Section of Aggregate Snowflakes Using the Self-Similar Rayleigh–Gans Approximation, *Journal of the Atmospheric Sciences*, 71, 3292–3301, <https://doi.org/10.1175/JAS-D-13-0347.1>, 2014.
- 525 Hogan, R. J., Mittermaier, M. P., and Illingworth, A. J.: The Retrieval of Ice Water Content from Radar Reflectivity Factor and Temperature and Its Use in Evaluating a Mesoscale Model, *Journal of Applied Meteorology and Climatology*, 45, 301–317, <https://doi.org/10.1175/JAM2340.1>, 2006.
- Hogan, R. J., Honeyager, R., Tyynelä, J., and Kneifel, S.: Calculating the Millimetre-Wave Scattering Phase Function of Snowflakes Using the Self-Similar Rayleigh–Gans Approximation, *Quarterly Journal of the Royal Meteorological Society*, 143, 834–844, <https://doi.org/10.1002/qj.2968>, 2017.
- 530 Illingworth, A. J., Barker, H. W., Beljaars, A., Ceccaldi, M., Chepfer, H., Clerbaux, N., Cole, J., Delanoë, J., Domenech, C., Donovan, D. P., Fukuda, S., Hiraoka, M., Hogan, R. J., Huenerbein, A., Kollias, P., Kubota, T., Nakajima, T., Nakajima, T. Y., Nishizawa, T., Ohno, Y., Okamoto, H., Oki, R., Sato, K., Satoh, M., Shephard, M. W., Velázquez-Blázquez, A., Wandinger, U., Wehr, T., and van Zadelhoff, G.-J.: The EarthCARE Satellite: The Next Step Forward in Global Measurements of Clouds, Aerosols, Precipitation, and Radiation, *Bulletin of the American Meteorological Society*, 96, 1311–1332, <https://doi.org/10.1175/BAMS-D-12-00227.1>, 2015.
- 535 Illingworth, A. J., Battaglia, A., Bradford, J., Forsythe, M., Joe, P., Kollias, P., Lean, K., Lori, M., Mahfouf, J.-F., Melo, S., Midhassel, R., Munro, Y., Nicol, J., Potthast, R., Rennie, M., Stein, T. H. M., Tanelli, S., Tridon, F., Walden, C. J., and Wolde, M.: WIVERN: A New Satellite Concept to Provide Global In-Cloud Winds, Precipitation, and Cloud Properties, *Bulletin of the American Meteorological Society*, 99, 1669–1687, <https://doi.org/10.1175/BAMS-D-16-0047.1>, 2018.
- 540 Kalesse-Los, H., Maahn, M., Ettrichrätz, V., and Kötsche, A.: Characterization of Orography-Influenced Riming and Secondary Ice Production and Their Effects on Precipitation Rates Using Radar Polarimetry and Doppler Spectra (CORSIPP-SAIL), Tech. Rep. DOE/SC-ARM-23-046, Oak Ridge National Laboratory (ORNL), Oak Ridge, TN (United States). Atmospheric Radiation Measurement (ARM) Data Center; Pacific Northwest National Laboratory (PNNL), Richland, WA (United States), <https://doi.org/10.2172/2242406>, 2023.
- Kneifel, S. and Moisseev, D.: Long-Term Statistics of Riming in Nonconvective Clouds Derived from Ground-Based Doppler Cloud Radar Observations, *Journal of the Atmospheric Sciences*, 77, 3495–3508, <https://doi.org/10.1175/JAS-D-20-0007.1>, 2020.
- 545 Kochendorfer, J., Meyers, T. P., Hall, M. E., Landolt, S. D., Lentz, J., and Diamond, H. J.: A New Reference-Quality Precipitation Gauge Wind Shield, *Atmos. Meas. Tech.*, 16, 5647–5657, <https://doi.org/10.5194/amt-16-5647-2023>, 2023.
- Kollias, P., Puidgomènech Treserras, B., Battaglia, A., Borque, P. C., and Tatarevic, A.: Processing reflectivity and Doppler velocity from EarthCARE’s cloud-profiling radar: the C-FMR, C-CD and C-APC products, *Atm. Meas. Tech.*, 16, 1901–1914, <https://doi.org/10.5194/amt-16-1901-2023>, 2023.
- 550 Küchler, N., Kneifel, S., Löhnert, U., Kollias, P., Czekala, H., and Rose, T.: A W-Band Radar–Radiometer System for Accurate and Continuous Monitoring of Clouds and Precipitation, *Journal of Atmospheric and Oceanic Technology*, 34, 2375–2392, <https://doi.org/10.1175/JTECH-D-17-0019.1>, 2017.
- Kulie, M. S. and Bennartz, R.: Utilizing Spaceborne Radars to Retrieve Dry Snowfall, *Journal of Applied Meteorology and Climatology*, 48, 2564–2580, <https://doi.org/10.1175/2009JAMC2193.1>, 2009.
- 555

- Kötsche, A., Myagkov, A., Maahn, M., Ettrichraetz, V., Vogl, T., Ryzhkov, A., Bukovcic, P., Ori, D., and Kalesse-Los, H.: Investigating KDP signatures inside and below the dendritic growth layer with W-band doppler radar and in situ snowfall camera, Submitted to ACP, 2025.
- List, R. and Schemenauer, R. S.: Free-Fall Behavior of Planar Snow Crystals, Conical Graupel and Small Hail, *Journal of the Atmospheric Sciences*, 28, 110–115, [https://doi.org/10.1175/1520-0469\(1971\)028<0110:FFBOPS>2.0.CO;2](https://doi.org/10.1175/1520-0469(1971)028<0110:FFBOPS>2.0.CO;2), 1971.
- 560 Liu, G.: Deriving Snow Cloud Characteristics from CloudSat Observations, *Journal of Geophysical Research: Atmospheres*, 113, <https://doi.org/10.1029/2007JD009766>, 2008.
- Maahn, M., Burgard, C., Crewell, S., Gorodetskaya, I. V., Kneifel, S., Lhermitte, S., Van Tricht, K., and van Lipzig, N. P. M.: How Does the Spaceborne Radar Blind Zone Affect Derived Surface Snowfall Statistics in Polar Regions?, *Journal of Geophysical Research: Atmospheres*, 119, 13,604–13,620, <https://doi.org/10.1002/2014JD022079>, 2014.
- 565 Maahn, M., Turner, D. D., Löhnert, U., Posselt, D. J., Ebell, K., Mace, G. G., and Comstock, J. M.: Optimal Estimation Retrievals and Their Uncertainties: What Every Atmospheric Scientist Should Know, *Bulletin of the American Meteorological Society*, 101, E1512–E1523, <https://doi.org/10.1175/BAMS-D-19-0027.1>, 2020.
- Maahn, M., Moisseev, D., Steinke, I., Maherndl, N., and Shupe, M. D.: Introducing the Video In Situ Snowfall Sensor (VISS), *Atmospheric Measurement Techniques*, 17, 899–919, <https://doi.org/10.5194/amt-17-899-2024>, 2024.
- 570 Maherndl, N., Maahn, M., Tridon, F., Leinonen, J., Ori, D., and Kneifel, S.: A Riming-Dependent Parameterization of Scattering by Snowflakes Using the Self-Similar Rayleigh–Gans Approximation, *Quarterly Journal of the Royal Meteorological Society*, 149, 3562–3581, <https://doi.org/10.1002/qj.4573>, 2023.
- Maherndl, N., Moser, M., Lucke, J., Mech, M., Risse, N., Schirmacher, I., and Maahn, M.: Quantifying riming from airborne data during the HALO-(AC)³ campaign, *Atmospheric Measurement Techniques*, 17, 1475–1495, <https://doi.org/10.5194/amt-17-1475-2024>, 2024a.
- 575 Maherndl, N., Moser, M., Schirmacher, I., Bansemmer, A., Lucke, J., Voigt, C., and Maahn, M.: How does riming influence the observed spatial variability of ice water in mixed-phase clouds?, *EGUsphere*, 2024, 1–38, <https://doi.org/10.5194/egusphere-2024-1214>, 2024b.
- Mason, S. L., Chiu, C. J., Hogan, R. J., Moisseev, D., and Kneifel, S.: Retrievals of Riming and Snow Density From Vertically Pointing Doppler Radars, *J. Geophys. Res. Atm.*, 123, 13,807–13,834, <https://doi.org/https://doi.org/10.1029/2018JD028603>, 2018a.
- Mason, S. L., Chiu, C. J., Hogan, R. J., Moisseev, D., and Kneifel, S.: Retrievals of Riming and Snow Density From Vertically Pointing
580 Doppler Radars, *Journal of Geophysical Research: Atmospheres*, 123, 13,807–13,834, <https://doi.org/10.1029/2018JD028603>, 2018b.
- Mason, S. L., Hogan, R. J., Bozzo, A., and Pounder, N. L.: A unified synergistic retrieval of clouds, aerosols, and precipitation from Earth-CARE: the ACM-CAP product, *Atm. Meas. Tech.*, 16, 3459–3486, <https://doi.org/10.5194/amt-16-3459-2023>, 2023.
- Matrosov, S. Y.: Modeling Backscatter Properties of Snowfall at Millimeter Wavelengths, *Journal of the Atmospheric Sciences*, 64, 1727–1736, <https://doi.org/10.1175/JAS3904.1>, 2007.
- 585 Mech, M., Maahn, M., Kneifel, S., Ori, D., Orlandi, E., Kollias, P., Schemann, V., and Crewell, S.: PAMTRA 1.0: The Passive and Active Microwave Radiative TRANSfer Tool for Simulating Radiometer and Radar Measurements of the Cloudy Atmosphere, *Geoscientific Model Development*, 13, 4229–4251, <https://doi.org/10.5194/gmd-13-4229-2020>, 2020.
- Milani, L., Kulie, M. S., Casella, D., Dietrich, S., L’Ecuyer, T. S., Panegrossi, G., Porcù, F., Sanò, P., and Wood, N. B.: CloudSat snowfall estimates over Antarctica and the Southern Ocean: An assessment of independent retrieval methodologies and multi-year snowfall analysis,
590 *Atmos. Res.*, 213, 121–135, <https://doi.org/https://doi.org/10.1016/j.atmosres.2018.05.015>, 2018.
- Moisseev, D. and Petäjä, T.: Custom collection of microwave radiometer, radar, and weather station data from Hyytiälä between 1 Jan 2022 and 30 Apr 2024, <https://doi.org/10.60656/a7b4af702fc04dd6>, 2024.

- Moisseev, D., von Lerber, A., and Tiira, J.: Quantifying the Effect of Riming on Snowfall Using Ground-Based Observations, *Journal of Geophysical Research: Atmospheres*, 122, 4019–4037, <https://doi.org/10.1002/2016JD026272>, 2017.
- 595 Mosimann, L.: An Improved Method for Determining the Degree of Snow Crystal Riming by Vertical Doppler Radar, *Atmospheric Research*, 37, 305–323, [https://doi.org/10.1016/0169-8095\(94\)00050-N](https://doi.org/10.1016/0169-8095(94)00050-N), 1995.
- Mroz, K., Treserras, B. P., Battaglia, A., Kollias, P., Tatarevic, A., and Tridon, F.: Cloud and precipitation microphysical retrievals from the EarthCARE Cloud Profiling Radar: the C-CLD product, *Atm. Meas. Tech.*, 16, 2865–2888, <https://doi.org/10.5194/amt-16-2865-2023>, 2023.
- 600 Mülmstädt, J., Sourdeval, O., Delanoë, J., and Quaas, J.: Frequency of Occurrence of Rain from Liquid-, Mixed-, and Ice-Phase Clouds Derived from A-Train Satellite Retrievals, *Geophysical Research Letters*, 42, 6502–6509, <https://doi.org/10.1002/2015GL064604>, 2015.
- Protat, A., Delanoë, J., Strapp, J. W., Fontaine, E., Leroy, D., Schwarzenboeck, A., Lilie, L., Davison, C., Dezitter, F., Grandin, A., and Weber, M.: The Measured Relationship between Ice Water Content and Cloud Radar Reflectivity in Tropical Convective Clouds, *Journal of Applied Meteorology and Climatology*, 55, 1707–1729, <https://doi.org/10.1175/JAMC-D-15-0248.1>, 2016.
- 605 Rasmussen, R., Baker, B., Kochendorfer, J., Meyers, T., Landolt, S., Fischer, A. P., Black, J., Thériault, J. M., Kucera, P., Gochis, D., Smith, C., Nitu, R., Hall, M., Ikeda, K., and Gutmann, E.: How Well Are We Measuring Snow: The NOAA/FAA/NCAR Winter Precipitation Test Bed, *Bulletin of the American Meteorological Society*, 93, 811 – 829, <https://doi.org/10.1175/BAMS-D-11-00052.1>, 2012.
- Rodgers, C. D.: *Inverse Methods for Atmospheric Sounding: Theory and Practice*, World Scientific, <https://doi.org/10.1142/3171>, 2000.
- Rose, T., Crewell, S., Löhnert, U., and Simmer, C.: A Network Suitable Microwave Radiometer for Operational Monitoring of the Cloudy
610 Atmosphere, *Atmospheric Research*, 75, 183–200, <https://doi.org/10.1016/j.atmosres.2004.12.005>, 2005.
- Ruiz-Donoso, E., Ehrlich, A., Schäfer, M., Jäkel, E., Schemann, V., Crewell, S., Mech, M., Kulla, B. S., Kliesch, L.-L., Neuber, R., and Wendisch, M.: Small-Scale Structure of Thermodynamic Phase in Arctic Mixed-Phase Clouds Observed by Airborne Remote Sensing during a Cold Air Outbreak and a Warm Air Advection Event, *Atmospheric Chemistry and Physics*, 20, 5487–5511, <https://doi.org/10.5194/acp-20-5487-2020>, 2020.
- 615 Saltikoff, E., Lopez, P., Taskinen, A., and Pulkkinen, S.: Comparison of quantitative snowfall estimates from weather radar, rain gauges and a numerical weather prediction model, *Boreal Env. Res.*, 20, 667–678, 2015.
- Scarsi, F. E., Battaglia, A., Maahn, M., and Lhermitte, S.: How to Reduce Sampling Errors in Spaceborne Cloud Radar-Based Snowfall Estimates, *EGU sphere*, pp. 1–23, <https://doi.org/10.5194/egusphere-2024-1917>, 2024a.
- Scarsi, F. E., Battaglia, A., Tridon, F., Martire, P., Dhillon, R., and Illingworth, A.: Mispointing Characterization and Doppler
620 Velocity Correction for the Conically Scanning WIVERN Doppler Radar, *Atmospheric Measurement Techniques*, 17, 499–514, <https://doi.org/10.5194/amt-17-499-2024>, 2024b.
- Schirmacher, I., Kollias, P., Lamer, K., Mech, M., Pfitzenmaier, L., Wendisch, M., and Crewell, S.: Assessing Arctic Low-Level Clouds and Precipitation from above – a Radar Perspective, *Atmospheric Measurement Techniques*, 16, 4081–4100, <https://doi.org/10.5194/amt-16-4081-2023>, 2023.
- 625 Seifert, A., Leinonen, J., Siewert, C., and Kneifel, S.: The Geometry of Rimed Aggregate Snowflakes: A Modeling Study, *Journal of Advances in Modeling Earth Systems*, 11, 712–731, <https://doi.org/10.1029/2018MS001519>, 2019.
- Seifert, P.: Custom collection of microwave radiometer data from Eriswil between 1 and 31 Jan 2024, <https://doi.org/10.60656/1395b12207d14848>, 2024.
- Stout, J. R., Westbrook, C. D., Stein, T. H. M., and McCorquodale, M. W.: Stable and Unstable Fall Motions of Plate-like Ice Crystal
630 Analogues, *Atmospheric Chemistry and Physics*, 24, 11 133–11 155, <https://doi.org/10.5194/acp-24-11133-2024>, 2024.

- Tanelli, S., Durden, S. L., Im, E., Pak, K. S., Reinke, D. G., Partain, P., Haynes, J. M., and Marchand, R. T.: CloudSat's Cloud Profiling Radar After Two Years in Orbit: Performance, Calibration, and Processing, *IEEE Transactions on Geoscience and Remote Sensing*, 46, 3560–3573, <https://doi.org/10.1109/TGRS.2008.2002030>, 2008.
- 635 Tridon, F., Battaglia, A., Rizik, A., Scarsi, F. E., and Illingworth, A.: Filling the Gap of Wind Observations Inside Tropical Cyclones, *Earth and Space Science*, 10, e2023EA003099, <https://doi.org/10.1029/2023EA003099>, e2023EA003099 2023EA003099, 2023.
- Vogl, T., Maahn, M., Kneifel, S., Schimmel, W., Moisseev, D., and Kalesse-Los, H.: Using Artificial Neural Networks to Predict Riming from Doppler Cloud Radar Observations, *Atmospheric Measurement Techniques*, 15, 365–381, <https://doi.org/10.5194/amt-15-365-2022>, 2022.
- 640 von Lerber, A., Moisseev, D., Bliven, L. F., Petersen, W., Harri, A.-M., and Chandrasekar, V.: Microphysical Properties of Snow and Their Link to Ze–S Relations during BAECC 2014, *Journal of Applied Meteorology and Climatology*, 56, 1561–1582, <https://doi.org/10.1175/JAMC-D-16-0379.1>, 2017.
- Wang, P. K.: Observational Studies of Ice Hydrometeors and Their Fall Behavior, in: *Motions of Ice Hydrometeors in the Atmosphere : Numerical Studies and Implications*, edited by Wang, P. K., pp. 15–22, Springer, Singapore, ISBN 978-981-334-431-0, https://doi.org/10.1007/978-981-33-4431-0_2, 2021.
- 645 Wood, N. B. and L'Ecuyer, T. S.: What Millimeter-Wavelength Radar Reflectivity Reveals about Snowfall: An Information-Centric Analysis, *Atmospheric Measurement Techniques*, 14, 869–888, <https://doi.org/10.5194/amt-14-869-2021>, 2021.
- Yang, D. and Simonenko, A.: Comparison of Winter Precipitation Measurements by Six Tretyakov Gauges at the Valdai Experimental Site, *Atmosphere-Ocean*, 52, 39–53, <https://doi.org/10.1080/07055900.2013.865156>, 2014.
- 650 Zikmunda, J. and Vali, G.: Fall Patterns and Fall Velocities of Rimed Ice Crystals, *Journal of the Atmospheric Sciences*, 29, 1334–1347, [https://doi.org/10.1175/1520-0469\(1972\)029<1334:FPAFVO>2.0.CO;2](https://doi.org/10.1175/1520-0469(1972)029<1334:FPAFVO>2.0.CO;2), 1972.