

New insights on the fault structure of a [Bedretto](#) geothermal testbed and the associated seismicity based on active seismic [crosshole tomography](#)

Miriam Larissa Schwarz¹, Hansruedi Maurer², Anne Obermann^{1,2}, Paul Antony Selvadurai¹, Alexis Shakas², Stefan Wiemer¹, and Domenico Giardini²

¹Swiss Seismological Service, ETH Zürich, Sonneggstrasse 5, CH-8092 Zürich

²Institute of Geophysics, ETH Zürich, Sonneggstrasse 5, CH-8092 Zürich

Correspondence: Miriam Larissa Schwarz (miriam.schwarz@sed.ethz.ch)

Abstract. ~~To [Fat ray travel time tomography](#) was used to~~ obtain reliable high-resolution subsurface images in the geothermal testbed of the Bedretto Underground Laboratory for Geosciences and Geoenergies (BedrettoLab); ~~we applied fat ray travel time tomography with the aim of better understanding.~~ [The aim of the research was to better understand](#) the relationship between structural features and the seismicity induced by hydraulic stimulation tests. ~~For the computation a 3D velocity model,~~
5 ~~we utilized eight boreholes, which provided us with~~ [Eight boreholes were used to provide](#) a large data set comprising ~~42'843~~ [41'881](#) manually picked first breaks. Our results demonstrate that the fat ray approach offers improved image quality compared to traditional ray-based methods. The 3D model was further validated using ground-truth information from wireline logs and geological observations. We successfully imaged a major fault zone (MFZ) that exhibits a complex structure including considerable heterogeneity. Relocation of passive seismic events generated during hydraulic stimulations indicates that the 3D
10 velocity model has only a minor influence on hypocentral parameters. However, comparing a selection of well-constrained seismic events with the velocity structures revealed a remarkable spatial correlation. Most events occurred in regions of intermediate and slightly decreased seismic velocities, thereby avoiding both high- and very low-velocity zones. Based on small-scale laboratory studies, we speculate that these observations can be explained by the presence of stress gradients in the intermediate-velocity zones.

15 1 Introduction

Energy production from sustainable resources is a key challenge of this century. Geothermal energy is recognized as a viable option. In particular, so-called “enhanced geothermal systems” (EGS) may have the potential to produce ~~electrical energy at affordable costs~~ [affordable electrical energy](#) (e.g. Olasolo et al. (2016); Hirschberg et al. (2015)). Key challenges include establishing sustainable flow rates, while controlling the associated induced seismicity ~~Zang et al. (2024)~~ [\(Zang et al., 2024\)](#).
20 Examples of EGS projects that had to be stopped due to high seismicity include ~~, for example,~~ Basel (Edwards et al., 2015) and Pohang (Ellsworth et al., 2019). These problems are closely linked with the often poorly known fracture network of the reservoir. Therefore, several initiatives have been established to better characterize relevant host rock structures with near-field

observations and well-monitored stimulation experiments (Amann et al., 2018; Obermann et al., 2024; Kneafsey et al., 2025). Seismic studies can offer powerful tools for imaging key structures, such as permeable fracture zones, which are the main targets of EGS investigations. They can be applied during an initial characterization phase or during the stimulation phase. Generally, ~~it can be distinguished by passive and these studies are either passive or~~ active seismic techniques. Passive techniques do not require actively fired seismic sources. Instead, ~~either~~ information contained in ~~the~~ ambient noise is exploited (e.g., ~~Obermann and Hillers (2019)) or recordings from~~ (e.g., Obermann and Hillers, 2019) or recordings of the induced seismicity are analyzed. For example, Charléty et al. (2006) conducted a 4D tomographic study using induced seismicity at the Soultz-sous-Forêts Hot Dry Rock site in France; that is, temporal 3D seismic velocity changes were computed.

Active seismic methods can ~~generally be subdivided in~~ be subdivided into reflection and refraction imaging and transmission tomography. Reflection and refraction imaging can be carried out either from the surface, or surface-to-borehole configurations - also referred as vertical seismic profiling (VSP) ~~techniques~~. In geothermal applications, VSP is particularly popular. For example, Nakata et al. (2023) used VSP data for reflection imaging of faults and fractures at the geothermal test site FORGE, Utah, U.S.A.. It is also possible to combine induced seismicity methods with reflection imaging. Block et al. (1994) applied a joint hypocenter-velocity inversion using induced seismicity from Hot ~~dry-rock~~ Dry Rock (HDR) experiments at Los Alamos National Laboratory, New Mexico to gain a 3D velocity model. Nakagome et al. (1998) used a seismic reflection survey together with vertical seismic profiling (VSP) to image the fractured reservoir in the Kakkonda geothermal field (Japan). Place et al. (2011) employed induced seismicity and VSP data to map fractures in Soultz-Sous-Fôrets (France). Transmission tomography primarily makes use of direct, diving or refracted waves traveling from sources to ~~the~~ receivers. It can be either applied from the surface (e.g., Zelt and Barton (1998); Lanz et al. (1998); Heincke et al. (2006)), or between boreholes (e.g., Pratt and Worthington (1988); Maurer and Green (1997)). Here, the travel times of the first arriving waves are exploited to establish 2D or 3D distributions of the seismic velocities. Alternatively, the first break amplitudes can be used to compute attenuation models (e.g., Holliger et al. (2001)). All these studies provided useful information for a better understanding of the subsurface structures.

Since seismic waves travel in a heterogeneous medium along complicated wave paths, 2D tomographic investigations suffer from inherent limitations, resulting from the assumption that the wave paths lie exclusively within the tomographic (2D) plane. Therefore, 3D investigations should be carried out ~~when~~ complex subsurface structures are expected. This can be achieved quite easily with surface-based investigations, because the sources and receivers can be well distributed over the earth's surface, ~~which results in a~~ resulting in good seismic ray coverage of the structures of interest, given that acquisition offset is large enough. In the case of crosshole investigations, this is often a problem ~~because~~ there are rarely enough boreholes available ~~that to~~ allow a good ray coverage of the subsurface region of interest. Therefore, 3D crosshole tomography experiments are very rare, which is unfortunate ~~because~~ they can potentially offer very relevant and unique subsurface information. The problem of poor ray coverage can be, at least partially, alleviated with the concept of fat rays, where it is assumed that seismic waves are not traveling along infinitesimally thin rays, but within "fat rays", whose thickness is governed by the dominant frequencies of the seismic waves (e.g. Woodward, 1992). ~~Initial concepts were~~ The initial concepts provided by Woodward (1992) ~~and have~~ allowed fat ray approaches ~~were to be~~ implemented for local earthquake tomography (Husen and Kissling, 2001) and active

seismic experiments (Jordi et al., 2016).

We have applied these concepts ~~in the framework of~~ for the host rock characterization ~~in at~~ the Bedretto Lab (Ma et al., 2022; Plenkens et al., 2022). As discussed in more detail in Section 2, ~~this the BedrettoLab~~ is a unique research environment ~~including that includes~~ a geothermal testbed, which mimics a realistic reservoir structure in crystalline rocks. For example, it includes important structures, such as a major fault zone (MFZ). In total, nine boreholes were drilled within the geothermal testbed, out of which eight were available for active seismic measurements. This offered exciting opportunities for testing the benefits and limitations of 3D travel time tomography. As described in this contribution, several active seismic crosshole measurements were carried out, and they were analyzed ~~with a~~ using the fast ray tomography approach. The primary aim of our study is to image important geological structures ~~;~~ and to better understand the relationship between these structural features and the seismicity, induced by various hydraulic stimulation experiments, within the geothermal testbed.

We start with a description of the Bedretto Lab, the embedded geothermal testbed, and ~~we~~ briefly summarize key results from previous investigations in the BedrettoLab. ~~Then, we~~ We then present our data set, followed by a short description of the methodology employed to establish the 3D velocity models. After the presentation of the tomographic results, we perform a joint interpretation with geological and geophysical add-on data sets that were also acquired at our test site. In particular, we discuss the spatial correlation between passive seismic events and the velocity structures found.


2 Site description

The Bedretto Underground Laboratory for Geosciences and Geoenergies (BULGG or BedrettoLab), operated by ETH Zurich, is located in the central Swiss Alps (Ticino) in a 5.2 ~~kilometres~~ kilometers long side tunnel of the Furka railway tunnel (Figure 1a). The BedrettoLab is a unique research facility that provides optimal conditions for conducting experimental research ~~on understanding to understand~~ the responses of ~~the deep underground~~ deep underground structures during hydraulic stimulations. With dimensions at the hectometer scale (hundreds of meters extension), the BedrettoLab closes the gap between the decameter laboratory scale (tens of meters extension, e.g., Grimsel test site (~~Gischig et al., 2020~~); Gischig et al. 2020) and the reservoir scale (hundreds of meters to kilometers, ~~(Amann et al., 2018)~~; Amann et al. 2018).


The BedrettoLab host rock is composed ~~of mainly~~ mainly of granites, which are referred to as the Rotondo Granite. Its intrusion into the Gotthard Massif took place during the late Variscan orogeny (~~Sergeev et al. (1995)~~); Sergeev et al., 1995). In general, the Rotondo Granite is homogeneous, that is, it generally exhibits isotropic structures ~~;~~ but at of the physical properties, but in some places, weak signs of metamorphism are observed ~~;~~ (Labhart T, 2005; Lützenkirchen and Loew, 2011). This may have slightly altered the isotropic structures (see also Figure 1b). ~~Indeed,~~ Behnen et al. (2024) identified weak signs of anisotropy near the geothermal testbed, but for the sake of simplicity, we assume an isotropic velocity structure for this study.

According to the World Stress Map (Heidbach et al., 2018), the main horizontal compressive stresses are oriented in NW-SE direction, but Bröker et al. (2024a) showed that within the BedrettoLab, the orientation of the stress field can exhibit significant variations. Due to the overburden, the principal stress axis can be assumed to be vertical, and a previous study ~~of by~~ Meier (2017) revealed that topographic effects can be neglected in the area of the BedrettoLab.

(a) Geological map + BedrettoLab

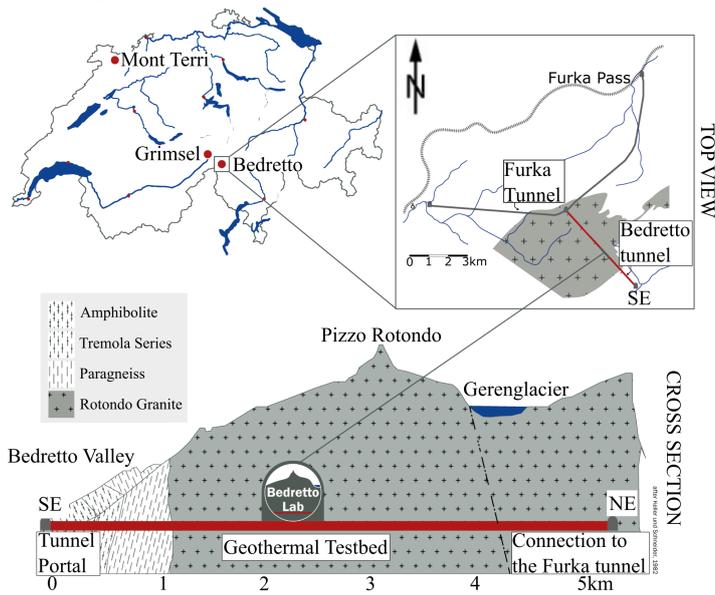

(b) Schematics of the fault zone structure in MB1

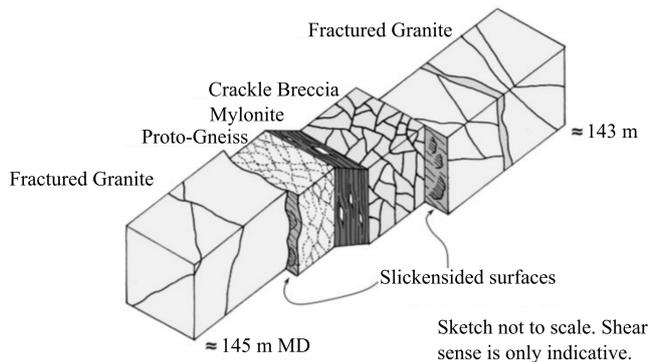

(c) Boreholes in the main axis system and fault zone

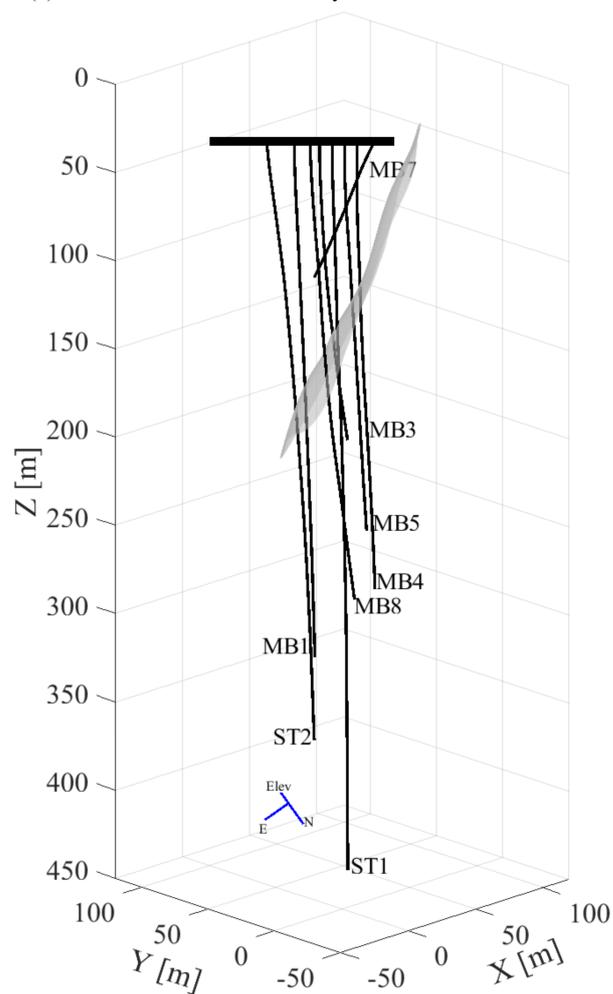


Figure 1. (a) Location and geological map of the BedrettoLab (see also Ceccato et al. (2024) and Rast et al. (2022) (see Rast et al., 2022; Ceccato et al., 2024)). (b) Schematics of the Major Fault Zone (MFZ), as observed in borehole MB1. The MFZ is found between at depth of 143 and 145 m depth in this borehole. Fractured Granites surround Porto-Gneiss, Mylonite and Crackle Breccia (figure Figure adjusted from Ma et al. (2022)). (c) Boreholes drilled into the Geothermal Testbed, including six monitoring boreholes (MB1, MB3-MB5, MB7, MB8), one stimulation (ST1) and one extraction (ST2) borehole. Here, the boreholes are shown in the tomography coordinate system, which was used in this paper. The blue arrows show the orientation of the original Bedretto coordinate system with Easting, Northing and Elevation, as used in panel a). Additionally, panel c) depicts the 3D structure of the MFZ (gray surface) as derived by Escallon et al. (2024).

The geothermal testbed is located between tunnel meters 2000 m to 2100 m, measured from the tunnel portal (see Figure 1a)). It has an overburden of about 1030 m, and includes several boreholes, ranging from 250 m to 400 m in length. The six monitoring boreholes (MB1, MB3-MB5, MB7, MB8) are equipped with a state-of-the-art monitoring system. This includes seismic sensors (geophones, accelerometers and acoustic emission sensors) as well as active piezoelectric seismic sources. In addition, 95 a stimulation (ST1) and an extraction (ST2) borehole were drilled into the testbed (see Figure 1c). ST1 was equipped with a multi-packer system, ~~with which it was subdivided~~ subdividing it into 14 intervals (Bröker et al., 2024a). ST2 was kept open for ~~the use of~~ various measurements, for example, active seismic measurements. For more details on the multi-disciplinary monitoring system, we refer to the overview paper of Plenkers et al. (2022).

Faults and fractures within the geothermal testbed have been mapped ~~mainly as~~ and are mainly subvertically dipping, pre-100 dominantly striking NE-SW to ENE-WSW (Labhart T, 2005; Lützenkirchen and Loew, 2011) and frequently steeply dipping, striking N-S and E-W along the tunnel (Jordan, 2019). Ma et al. (2022) and Bröker et al. (2024b) ~~show~~ give detailed maps of fractures along the tunnel, which are based on tunnel wall mapping and borehole logging. The fractures can be divided into four ~~different~~ sets: striking N-S, NE-SW/tunnel perpendicular, E-W, and NW-SE/tunnel parallel.

A major fault zone (MFZ) within the geothermal testbed is of particular interest ~~for~~ to this paper. It was discovered by pre-105 vious studies using all available boreholes. ~~This~~; these studies included core analyses as well as acoustic and optic televiewer (ATV/OTV) observations (Ma et al., 2022). A schematic of the MFZ, as observed in borehole MB1 ~~,~~ is shown in Figure 1b. ~~It includes Proto-Gneiss, Mylonite and includes Proto-Gneiss, Mylonite,~~ and Crackle Breccia that surround fractured granites Granites. More details on this structures can be found in Ma et al. (2022), but for the purpose of this paper ~~is primarily it~~ is important to note that the complexity of the MFZ ~~will represent~~ represents a challenge for the tomographic imaging. Besides 110 the a priori information ~~,~~ offered by the core and televiewer analyses, we also have access to a 3D image of the MFZ. ~~It was obtained with,~~ obtained from a borehole radar reflection study (Escallon et al., 2024), and the 3D surface of the MFZ is shown in gray in Figure 1c.

Since we will later relate our tomographic inversions with the seismicity ~~,~~ generated by hydraulic stimulations, it is important to note that the BedrettoLab lies in an area of generally low seismicity (~~e.g., Diehl et al. (2025), Gischig et al. (2020).~~ All 115 ~~the~~ (e.g., Diehl et al., 2025; Gischig et al., 2020). All seismic events, discussed later in this study, are caused by stimulations within the geothermal testbed, and they are not superimposed ~~by a~~ with seismic background activity. Furthermore, it is also important to note that the stress conditions in the BedrettoLab mimic stress conditions of a real geothermal reservoir, but the temperatures are much lower (approx. 18 degrees Celsius, ~~Ma et al. (2022)~~ Ma et al. 2022).

3 Data

120 ~~Experimental setup and data examples. a) shows the shot (stars) and receiver (triangles) positions for the waveforms shown in b), c) and d). The gray surface indicates the MFZ as derived by Escallon et al. (2024). b) displays the waveforms recorded by an AE sensors in borehole MB8 (blue triangle) from shots in borehole ST2 (blue stars). c) shows a corresponding receiver gather recorded on a hydrophone in MB5 (brown triangle) and shots in borehole MB8 (brown stars). d) shows a shot gather~~

Table 1. Acquisition parameters of the active seismic survey


borehole source	borehole receiver	shot spacing	receiver spacing	sensor	date	number of traces	number of picks
ST1	ST2	2 m	1m/2m	hydrophones	Oct. 2020	15307 - 12696	7413
MB4	MB1	2 m	1 m	hydrophones	Oct. 2020	5376	3716 - 3664
MB3	MB4	2 m	1 m	hydrophones	Oct. 2020	3648	1780 - 1632
MB3	MB1	2 m	1 m	hydrophones	Oct. 2020	1824	1337 - 1186
MB1	MB4	2 m	1 m	hydrophones	Oct. 2020	2976	1620
MB8	MB7	5 m/2 m	1 m/2 m	hydrophones	June 2021	4840	2476 - 2474
MB8	MB5	5 m/2 m	1 m/2 m	hydrophones	June 2021	13698	7143 - 6820
MB5	MB7	5 m/2 m	1 m/2 m	hydrophones	June 2021	6644	4610 - 4604
MB5	MB8	5 m/2 m	1 m/2 m	hydrophones	June 2021	14562	9437 - 9157
ST2	MB1	1 m	fixed depth	AE sensors	Nov. 2021	800	179
ST2	MB3	1 m	fixed depth	AE sensors	Nov. 2021	1400	781
ST2	MB4	1 m	fixed depth	AE sensors	Nov. 2021	1200	667
ST2	MB5	1 m	fixed depth	AE sensors	Nov. 2021	800	539
ST2	MB7	1 m	fixed depth	AE sensors	Nov. 2021	200	158
ST2	MB8	1 m	fixed depth	AE sensors	Nov. 2021	1600	987
total number of source points:	649 - 804						
total number of receiver points:	962 - 1237						
total number of traces:	74875 - 72667						
total number of picks:	42843 (57.24 1881 (57.6 %)						
source type:	P-wave sparker						
sampling frequency							
hydrophones:	48 kHz						
AE sensors:	200 kHz						

125 ~~from a source in MB8 (green star) with hydrophones in MB5 (green triangles). First arrivals for P-wave are indicated with yellow arrows, and examples for reflections and tube wave are indicated with blue arrows. The predicted S-wave arrivals are indicated with purple arrows.~~


130 ~~a) Example traces of a hydrophone (top) and an AE sensor (bottom) that were recorded at similar source-receiver offsets. The gray boxes indicates the time window that was used to calculate the sum spectra shown in b). For visualisation purposes, we normalized the data to the maximum amplitude. b) shows the sum spectra of all traces with a P pick (see main text for further explanations on the computation of the sum spectra).~~

Although the geological and geophysical studies discussed in Section 2 provided key information for the characterization of the ~~Geothermal Testbed~~geothermal testbed, it was ~~judged to be necessary to obtain~~considered necessary to acquire additional


(a) shot and receiver positions

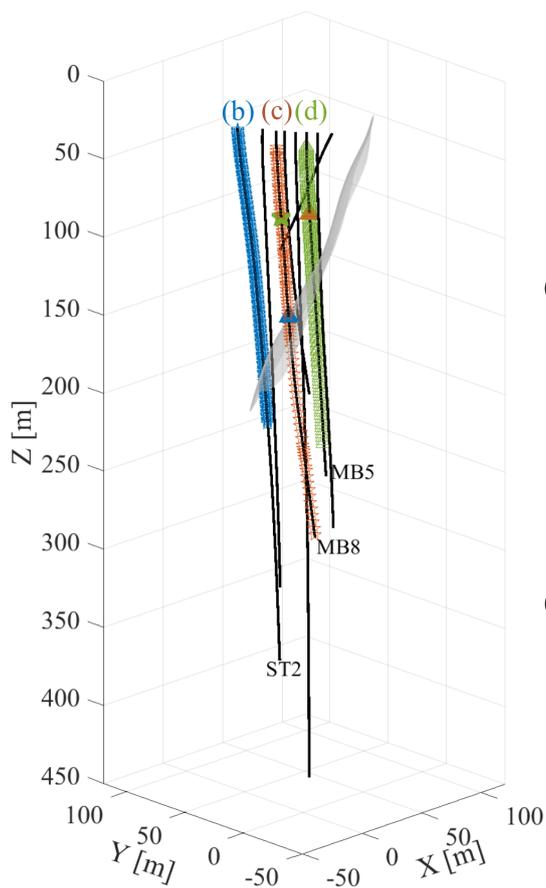

(b) AE sensor. Rec pos: 228 (MB8) | Shot pos: 1 to 200 (ST2)

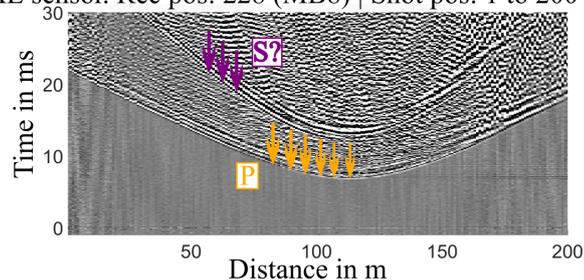

(c) Hydrophones. Rec pos: 113 (MB5) | Shot pos: 1 to 180 (MB8)

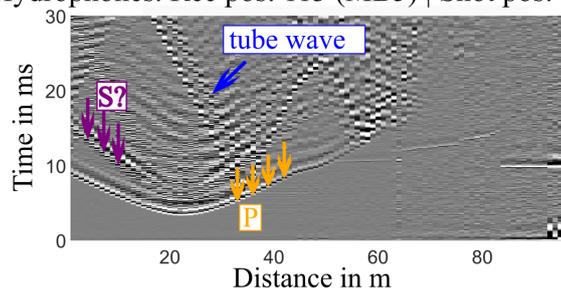

(d) Hydrophones. Shot pos: 38 (MB8) | Rec pos: 70 to 355 (MB5)

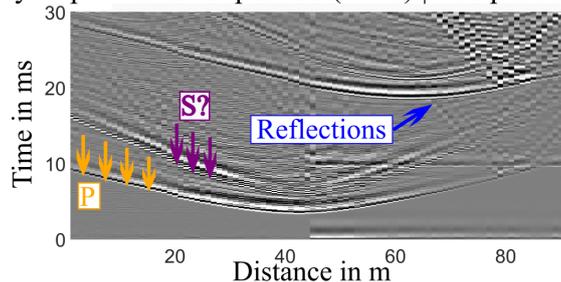


Figure 2. Experimental setup and data examples. a) shows the shot (stars) and receiver (triangles) positions for the waveforms shown in b), c) and d). The gray surface indicates the MFZ as derived by Escallon et al. (2024). b) displays the waveforms recorded by one AE sensor in borehole MB8 (blue triangle) from shots in borehole ST2 (blue stars). c) shows a corresponding receiver gather recorded on a hydrophone in MB5 (brown triangle) and shots in borehole MB8 (brown stars). d) shows a shot gather from a source in MB8 (green star) with hydrophones in MB5 (green triangles). First arrivals for P-wave are indicated with yellow arrows, and examples for reflections and tube wave are indicated with blue arrows. The predicted S-wave arrivals are indicated with purple arrows.

volumetric information. This ~~can be was~~ obtained from active seismic crosshole measurements. The full active seismic data set employed in this study is composed of several independent surveys that were taken at different times from October 2020 to November 2021, depending on when the boreholes were drilled and ~~being thus~~ available. A detailed overview is given in Table 1. The borehole configuration is shown in Figures 1b and 1c. The spacing of the source varied between 1 m, 2 m, and 5 m for the different surveys and along the borehole depths.

We employed a seismic P-wave sparker source with a dominant frequency band of about 1 to 10 kHz (<https://geotomographie.de>). The first three data sets were recorded on two hydrophone chains with 1 m and 2 m spacing, respectively (Table 1). The surveys were designed such that the receiver/shot spacing is denser around the MFZ and sparser at ~~larger distances away from it. These distances further away. These initial~~ surveys were conducted before the instrumentation and cementation of the boreholes. The last survey was carried out in November 2021, after ~~the instrumentation, instrumentation~~ but prior to ~~the~~ stimulation experiments. Permanently installed acoustic emission (AE) sensors were used as receivers, which had to be synchronized with the sparker setup. For each source point and all surveys, the sparker source was fired three times, ~~and;~~ the traces were then stacked to enhance the signal-to-noise (SNR) ratio. Overall, we were able to compile a relatively large data set including ~~42'843-41'881~~ manual P-picks (Table 1) with an average picking uncertainty of about 0.15 ms. ~~This value was estimated on the basis of~~ Based on visual inspections during the manual picking process. Source-receiver offsets varied between 10 m and 186.5 m. For the manual picking, we employed a Matlab-based in-house software.

~~In Figure 2, we show~~ Figure 2 shows three examples of shot and receiver gathers: Figure 2a) ~~shows~~ gives the setting with the source and receiver configurations as well as the MFZ; Figure 2b) displays a receiver gather recorded on the AE sensors (sensor in MB8, sources in ST2); ~~;~~ Figure 2c) shows a receiver gather recorded on a hydrophone (sensor in MB5 and receiver in MB8) and Figure 2d) shows a source gather recorded on hydrophones (source position in ~~MB5-MB8~~ and receivers in ~~MB8-MB5~~). The first arrivals of the P-waves, indicated by the yellow arrows, are clearly visible. The P-wave sparker, as the name suggests, is designed to generate primarily seismic ~~P-waves. S-waves~~ P waves. S waves that are visible in the data are therefore most likely converted P-to-S phases, with the conversion ~~likely probably~~ taking place at the source borehole wall. The ~~S-waves~~ S waves are marked in Figures 2b, c, and d, ~~(indicated with~~ (purple arrows). They are generally difficult to pick because they often overlap with scattered parts of the ~~P-waves~~ P waves or with reflected waves. Therefore, we restrict ourselves to the first arriving P waves.

Figure 3a shows example traces from a hydrophone and an AE sensor with a similar source-receiver offset. Both traces show a high signal-to-noise ratio. To further appraise the properties of the seismic waveforms, we computed sum spectra for the hydrophone and AE sensor data. For that purpose, all traces ~~with a P pick where we could pick the first break of the P wave~~ were considered. A time window of 6 ms around the first break was ~~considered used~~ to calculate the amplitude spectra (gray boxes in Figure 3a). The amplitude spectra of the individual traces were then summed ~~up~~ to obtain the sum spectra.

165

The frequency content of both sensor types is comparable, with the energy of the first-arriving waves varying between 1 kHz and 7.5 kHz. It should be noted that the sharp decrease below 1 kHz is caused by ~~the~~ analog filters of the acquisition systems.

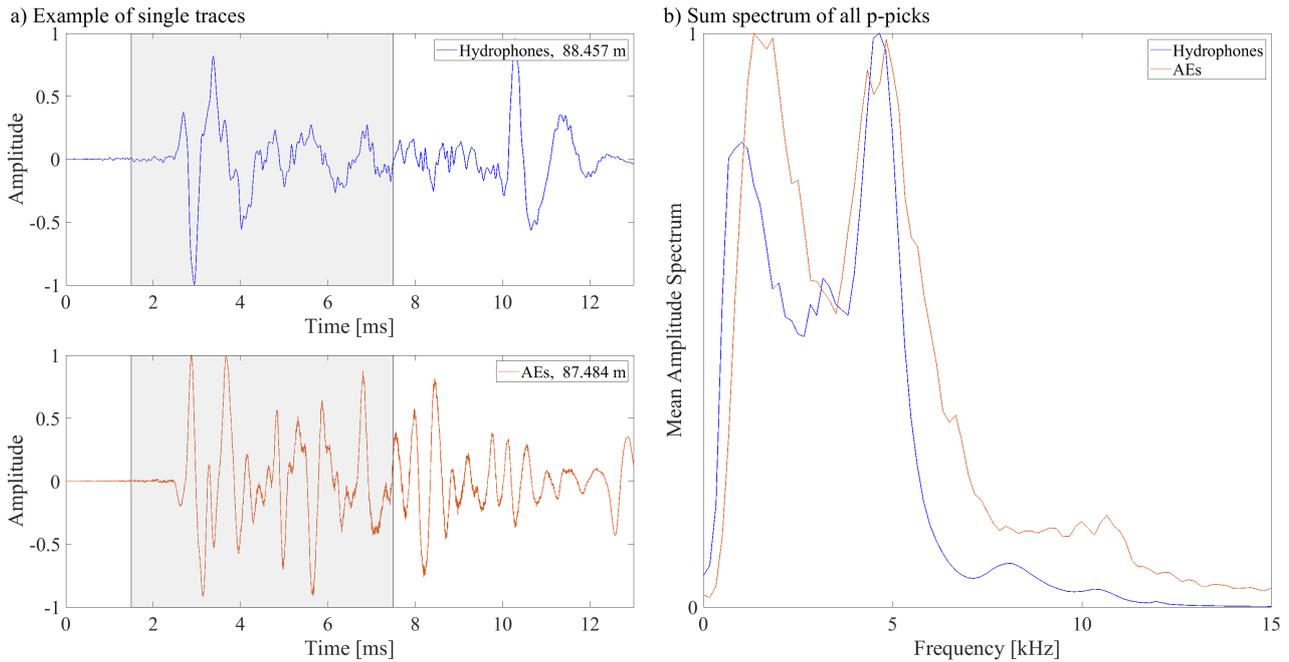


Figure 3. a) Example traces of a hydrophone (top) and an AE sensor (bottom) that were recorded at similar source-receiver offsets. The gray boxes indicates the time window that was used to calculate the sum spectra shown in b). For visualization purposes, we normalized the data to the maximum amplitude. b) shows the sum spectra of all traces with a P pick (see main text for further explanations on the computation of the sum spectra).

Furthermore, it is noteworthy that there is a significant decrease of spectral amplitudes around 3 kHz for both sensor types. One may argue that this feature in the sum spectra is caused by the sensor properties or by the acquisition system. However, ~~the hydrophone and AE sensor data were not only captured by different sensors, but they were also acquired with different acquisition systems. Therefore, it must be concluded~~ this feature is visible independently of the recording system (sensor and acquisition system). Since the type of the source does not change, we conclude that the shape of the sum spectra ~~must~~ might be caused by the properties of the host rock, for example, by the intrinsic attenuation, or the properties of the seismic source. ~~Further analyses~~ More analyzes, which are beyond the scope of this paper, will be required, to further analyze the frequency spectra.

4 Travel time tomography

4.1 Method

Seismic travel time tomography is a well-established procedure method for delineating subsurface structures at various scales
180 ~~(e.g., Nolet (1987))~~(e.g., Nolet, 1987). It requires (i) an initial model, (ii) a forward solver to predict the travel times for a given
model, (iii) an inverse solver to estimate the seismic velocities (~~resp. respectively~~ the seismic slownesses, the inverse of veloc-
ity) from the observed data, and (iv) a regularization scheme to account for the underdetermined components of the inverse
problem ~~(e.g. Menke (1984))~~(e.g., Menke, 1984). For our computations, we employed ~~an~~ in-house tomography software that
~~included~~ includes the algorithm by Podvin and Lecomte (1991) as a forward solver, which solves the Eikonal equation on
185 a regular grid with a finite-difference approach. The seismic rays are then computed with a backtracing algorithm following
~~(Li et al., 2018)~~Li et al. (2018). The accuracy of the forward solver is governed primarily by the discretization of the finite-
difference grid (e.g., Podvin and Lecomte, 1991).

To solve the inverse problem, the volume of interest needs to ~~also be discretized in~~ be discretized into 3D blocks of ade-
190 quate sizes. In contrast to the forward solver grid, which is governed by the accuracy of the Eikonal solver, the inverse grid
is governed by the spatial resolution power offered by the source-receiver distribution. Therefore, the forward and inversion
grids do not necessarily have to be identical. The ray segment lengths for each inversion cell and source-receiver pair are deter-
mined and fed into the $n \times m$ Jacobian matrix \mathbf{J} , where n is the number of data points and m is the number of inversion cells.
Since such tomographic problems always include an underdetermined component, regularization of the inverse problem is
195 required. For that purpose, we have added damping and smoothing constraints (see ~~Maurer et al. (1998) and Lanz et al. (1998)~~
Maurer et al. 1998 and Lanz et al. 1998 for further details). The inverse problem can then be written as

$$\begin{pmatrix} \mathbf{J} \\ \mathbf{D} \end{pmatrix} \mathbf{s} = \begin{pmatrix} \mathbf{t} \\ \mathbf{h} \end{pmatrix}, \quad (1)$$

where \mathbf{J} is the Jacobian matrix, \mathbf{t} the observed travel times, \mathbf{D} and \mathbf{h} are the regularization constraints, and \mathbf{s} ~~the unknown~~
~~slownesses~~ is the unknown slowness. As described, for example, in Maurer et al. (1998), matrix \mathbf{D} is composed of an upper
200 part, including ~~a~~ an $m \times m$ diagonal matrix, which is required for the damping constraints, and a lower part, containing an
 $m \times m$ matrix, representing the smoothing operator. Likewise, the vector of \mathbf{h} contains an upper part with the initial ~~resp.~~
~~previous slownesses~~ slowness (first iteration) or the slowness of the previous iteration, and a lower part including zeros. The
resulting system of equations in ~~4~~ (1) is typically very sparse and can thus be solved conveniently with the LSQR algorithm
proposed by Paige and Saunders (1982). With the updated velocity model, the predicted travel times and the ray geometry need
205 to be recomputed to update \mathbf{J} . This procedure is then repeated until convergence is achieved.

Since infinitely thin rays, computed with the Eikonal equation, are not a good physical representation of finite-frequency
seismic waves, and they ~~often cover not~~ may not cover all inversion cells, the concept of fat rays was introduced by Woodward

(1992). The underlying idea of this concept is to extend the thin rays to a width that corresponds to the dominant wavelengths
 210 of the data observed. When the travel time fields from the solution of the finite-difference Eikonal solver are available, the
 region of the fat rays can be calculated swiftly with the formula of Červený and Soares (1992) that ~~describe~~ describes the first
 Fresnel volume, which is equivalent to the fat ray

$$|t_{sx} + t_{rx} - t_{sr}| \leq T. \quad (2)$$

t_{sx} and t_{rx} are source or receiver travel times to an arbitrary point x within the forward modeling domain, t_{sr} is the predicted
 215 travel time with the actual model s and T is the dominant period of the seismic waves. When the inequality in Equation 2 is
 satisfied, the point x lies within the fat ray volume. To compute the fat ray volumes, it is necessary to not only solve the forward
 problem for each source position, but also for each receiver position, which can increase the computational costs significantly.
 For computing the fat ray Jacobian matrix, it is necessary to compute a function f_x for every source-receiver pair ~~a function f_x~~ ,
 defined as

$$220 \quad f_x = \begin{cases} T - t_{sx} - t_{rx} + t_{sr}, & \text{if } |t_{sx} + t_{rx} - t_{sr}| \leq T \\ 0, & \text{otherwise} \end{cases} \quad (3)$$

at every grid point of the forward model. Then, the f_x values, contained in a particular inversion grid cell, are summed up and
 inserted into the corresponding element of \mathbf{J} . Finally, each row of \mathbf{J} needs to be scaled, such that $\mathbf{J}s = \mathbf{t}_{sr}$ is enforced.

225 ~~It is noteworthy that a~~ A beneficial feature of the fat ray approach ~~makes the tomography is that the tomographic results~~
~~are~~ less dependent on the parameterization of the inversion model. When a relatively fine inversion block discretization is
 chosen ~~for the inversion model, it becomes likely that numerous blocks are not~~, numerous blocks may not be hit by thin rays.
 In contrast, fat rays always cover the same volumes, irrespective of the size of the inversion blocks.

5 Application to field data set

230 4.1 Setup of the inversion

~~Development of the RMS discrepancy between observed and predicted travel times for different configurations: the thin ray~~
~~based tomography with two different cell sizes of the inverse solver (1 m and 2 m) and the fat ray tomography with different~~
~~frequencies, 2 kHz, 4.5 kHz and 6 kHz. Fat ray inversions employed the same grid for the forward solution and inversion 1×1~~
 ~~$\times 1 \text{ m}^3$. The same applies to the thin ray 1-1 inversion. For the thin ray 1-2 inversion, 8 forward cells were merged to larger~~
 235 ~~eubic inversion cells.~~ For the travel time tomography we used the data presented in Section 3. A homogeneous velocity model
 of 5300 m/s was used as starting model, estimated from the travel time curves of our data. Since the geological observations
 along the main tunnel and on the borehole cores did not indicate a pronounced layering, we ~~judged~~ considered that a homo-
 geneous initial model ~~to be~~ was adequate. The coordinate system was rotated into the main axis system (or principle principal

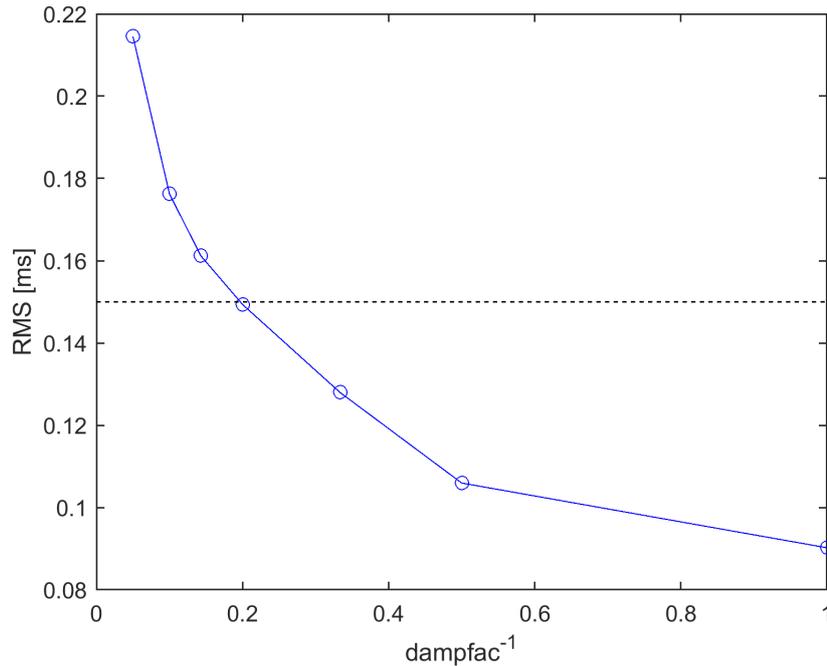


Figure 4. Trade-off curve for determining the regularisation parameters. The horizontal axis denotes the inverse of the damping factors tested during the trade-off analysis. The horizontal dashed line indicates the estimated picking accuracy.

axis system) of the borehole trajectories to reduce the number of numerical cells. This resulted in a model of dimension with
 240 dimensions of $72 \times 62 \times 406 \text{ m}^3$. We compared different block sizes for the thin ray-based approach, referred to as "thin ray". The inversion block size was either 2 m or 1 m, but the forward solver block size was always kept at 1 m. As described in Section 4.1, we have applied damping and smoothing constraints for the regularization of the inverse problem. The individual contributions of damping and smoothing were determined by trial-and-error trade-off curve analysis. The results are shown in Figure 4. The intersection of the trade-off curve with estimated picking accuracy (dashed black line in
 245 Figure 4), indicates the preferred damping value. A damping/smoothing ratio of 0.5 proved was found to be adequate for our setup. We repeated the trade-off analysis for other damping/smoothing ratios, and they led to similar results as shown in Figure 4. Generally, the choice of the regularization parameters proved to be not too critical. Inversions within a range of damping factors around the chosen value led to very similar results, thereby proving the robustness of our inversion setup.

250 The convergence behavior of the different inversion runs is shown in Figure 5 in the form of Root-Mean-Square discrepancies between the observed and predicted travel times (RMS curves). For the fat ray tomography, we always used the smaller inversion cell size of 1 m and compared different frequencies: 2 kHz, 4.5 kHz and 6 kHz that are within the frequency spectra of the P-wave P wave (see Figure 3). With appropriate regularization for the different inversions, all inversion runs converged

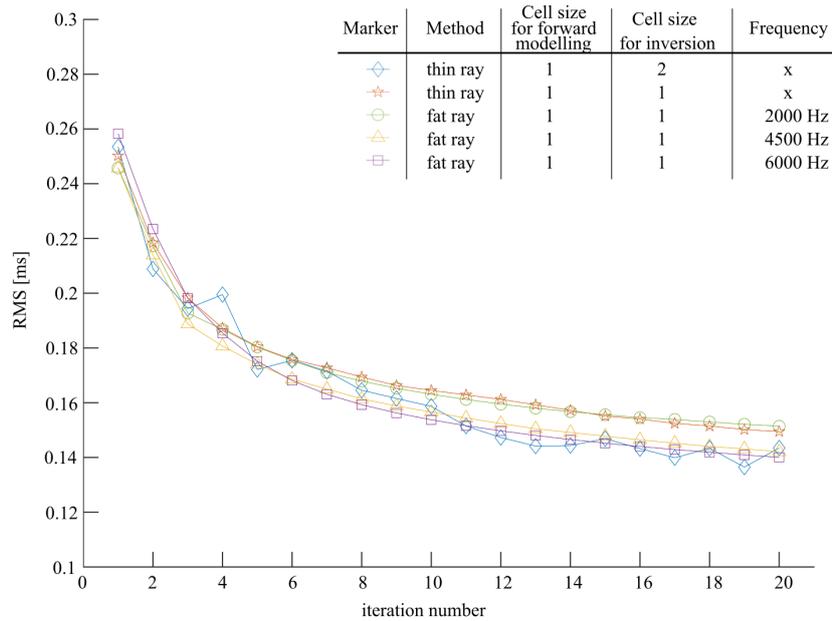


Figure 5. Development of the RMS discrepancy between observed and predicted travel times for different configurations: the thin ray based tomography with two different cell sizes of the inverse solver (1 m and 2 m) and the fat ray-tomography with different frequencies, 2 kHz, 4.5 kHz and 6 kHz. Fat ray inversions employed the same grid for the forward solution and inversion, $1 \times 1 \times 1 \text{ m}^3$. The same applies to the thin ray 1-1 inversion. For the thin ray 1-2 inversion, 8 forward cells were merged to larger cubic inversion cells.

reasonably well, that is, the RMS curves ~~are were~~ flattening out, and ~~they~~ all show a similar convergence behavior. However, for the thin ray inversion with a 1 m cell size and for the fat ray inversion with 4.5 kHz and 6 kHz, more regularization was required to account for the larger underdetermined component of the inversion problem (the magnitudes of \mathbf{D} and \mathbf{h} in Equation 1 were increased by 50%). Generally, the RMS reduced from 0.25 ms to approximately 0.15 ms within 20 iterations, which is consistent with our picking accuracy. Since ~~we did not observe significant differences~~ no significant differences were observed in the convergence behavior of the different settings τ , and the resulting tomography models were similar, we ~~have chosen~~ selected 2 kHz for our fat ray tomography to obtain the best spatial coverage with the lowest reasonable frequency.

4.2 Comparison of Thin ray and Fat ray tomography

To show the benefit of the fat ray approach, we compare the 2 kHz fat ray results with the thin ray results. For the comparison, we ~~do not only consider~~ consider not only the velocity structures τ , but also the column sums of the Jacobian matrix, subsequently referred to as "coverage", as described, for example, ~~described~~ in Jordi et al. (2016). The summation of the j th column of the Jacobian matrix gives an estimate of the overall sensitivity related to the j th inversion cell. The "coverage" measure is similar to the ray-coverage that is often used in thin ray tomography. To emphasize that we calculate the fat ray coverage from

the column sums of the Jacobian matrix, we consistently use the term “coverage” throughout the paper.

In Figure 6, we compare the velocity tomograms for the thin ray (6a) and the 2 kHz fat ray (6b) at a horizontal slice at $z = 150$ m. ~~Additionally, the corresponding coverage plots are shown in Figures 6c) and 6d).~~ Higher velocities are displayed in blue, lower velocities in red, and the mean velocity (≈ 5340 m/s) is represented in gray. Areas with insufficient or no coverage are shown in white. The green line indicates the MFZ at this depth. Both tomograms show similar features, but the structures in the fat ray tomogram (Figure 6b) are much clearer. Note, for example, the low-velocity anomalies around MB8, and between ST1 and ST2. Furthermore, the area ~~covered~~ with fat rays ~~is~~ considerably larger, and it does not include any gaps. Considering the fact that fat rays are a better physical representation of the actual ~~finite-frequency~~ finite-frequency wavepaths, one can conclude that the tomogram in Figure 6b) is not only clearer ~~is~~ but also likely more reliable. The corresponding coverage plots are shown in Figures 6c) and 6d).

5 Application to field data set

5.1 Qualitative description of the 3D velocity model

In ~~the sequel of the this~~ paper, we consider only the velocity model obtained with fat ray tomography using a center frequency of ~~2 kHz-~~ kHz. The velocity models obtained with 4.5 kHz and 6 kHz do not show significantly better results; for example, the RMS curves are quite similar (Figure 5). Therefore, we chose the lowest reasonable frequency to obtain the best coverage. The P-wave velocities in this tomographic model vary between 4685 m/s and 6212 m/s, and the mean velocity is ~~at about~~ approximately 5340 m/s. Figure 7a) shows the tomographic velocities ~~in (a)~~, and the corresponding coverage ~~in (is shown in~~ Figure 7b) at different depths (z-axis). The intersections with the boreholes are shown as black dots in (a), and blue dots in (b), ~~respectively~~. The intersection of the slice with the MFZ is marked with a green line.

At $z = 100$ m, we generally observe the highest velocities of all slices. This area is distinguished by largely intact granites (Bröker et al., 2024a). At $z = 150$ m, we observe a low-velocity feature in the region, where the MFZ intersects the slice. At $z = 200$ m and $z = 250$ m, ~~there are we observe~~ several low- and high-velocity zones ~~with moderate amplitudes~~. The coverage plots in Figure 7b) indicate that all ~~the features described these features~~ are potentially well constrained by the data (see ~~also~~ checkerboard tests in Appendix A).

A vertical slice through the model is provided in Figure 8. Since the MFZ (see Figure 1c) is a feature of major interest, we provide a vertical section perpendicular to the strike of this fault zone through the central part of the 3D model. The vertical section confirms that there are predominantly low velocities between $z = 100$ m ~~to and~~ $z = 150$ m, ~~and while~~ generally higher velocities are observed at greater depths (see, for example, the region marked ~~with an by~~ black arrow in Figure 8a). Below $z = 250$ m, the coverage and thus the reliability of the velocity model is limited.

The horizontal and vertical slices in Figures 7 and 8 provide some insights into the structure of the 3D velocity model. How-

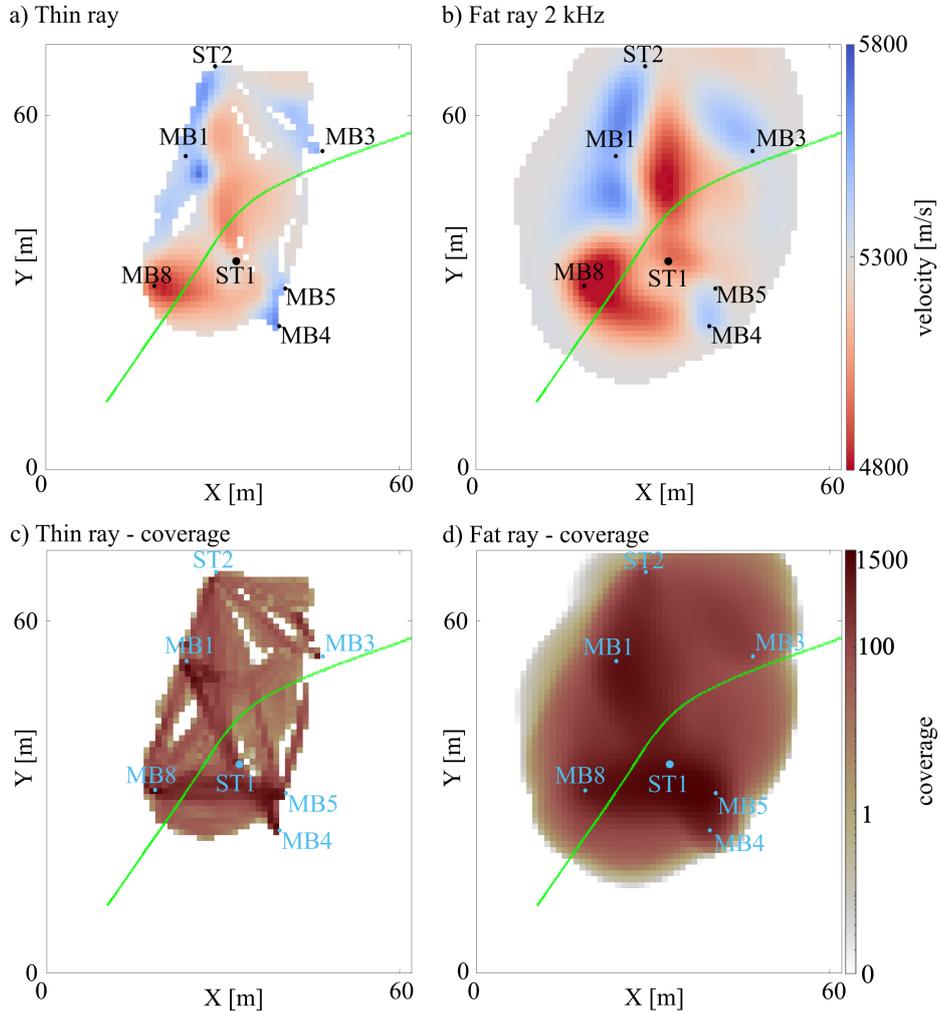


Figure 6. Comparison of thin and fat ray tomography using an x-y slice at $z = 150$ m: (a) tomogram of the thin ray approach, (b) tomogram of the 2 kHz fat ray approach. The intersections of the boreholes with the slice are also marked. (c) and (d) show the coverage, defined using the column sums of the Jacobian matrix. We applied the colors such that white shows no coverage, and gray to yellow extremely low; higher coverage values are represented using a red colormap ranging from light to dark red.

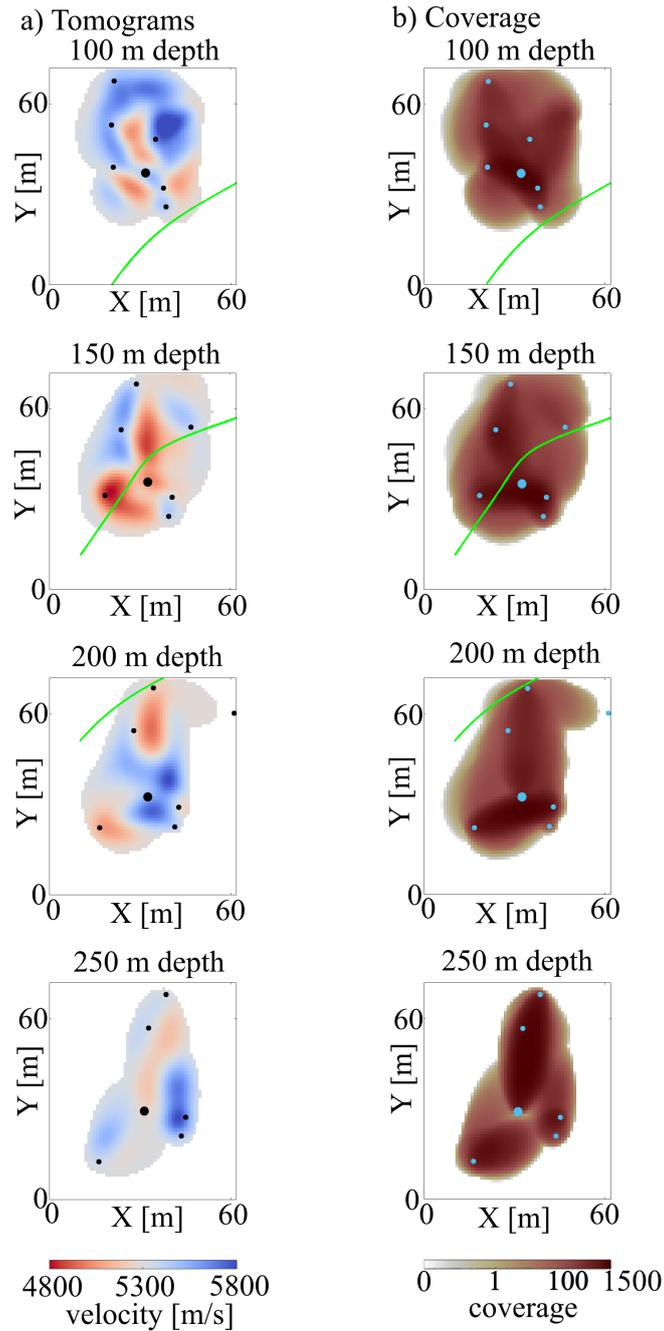


Figure 7. (a) Velocity tomograms at different depths and (b) the corresponding spatial coverage. Unresolved areas are left white. The dots indicate the intersections of the boreholes with the slice; the larger dot indicates borehole ST1. The green line indicates the intersection with the MFZ. As in the previous plot, white shows no coverage, and gray to yellow extremely low, higher coverage values are represented using a red colormap ranging from light to dark red.

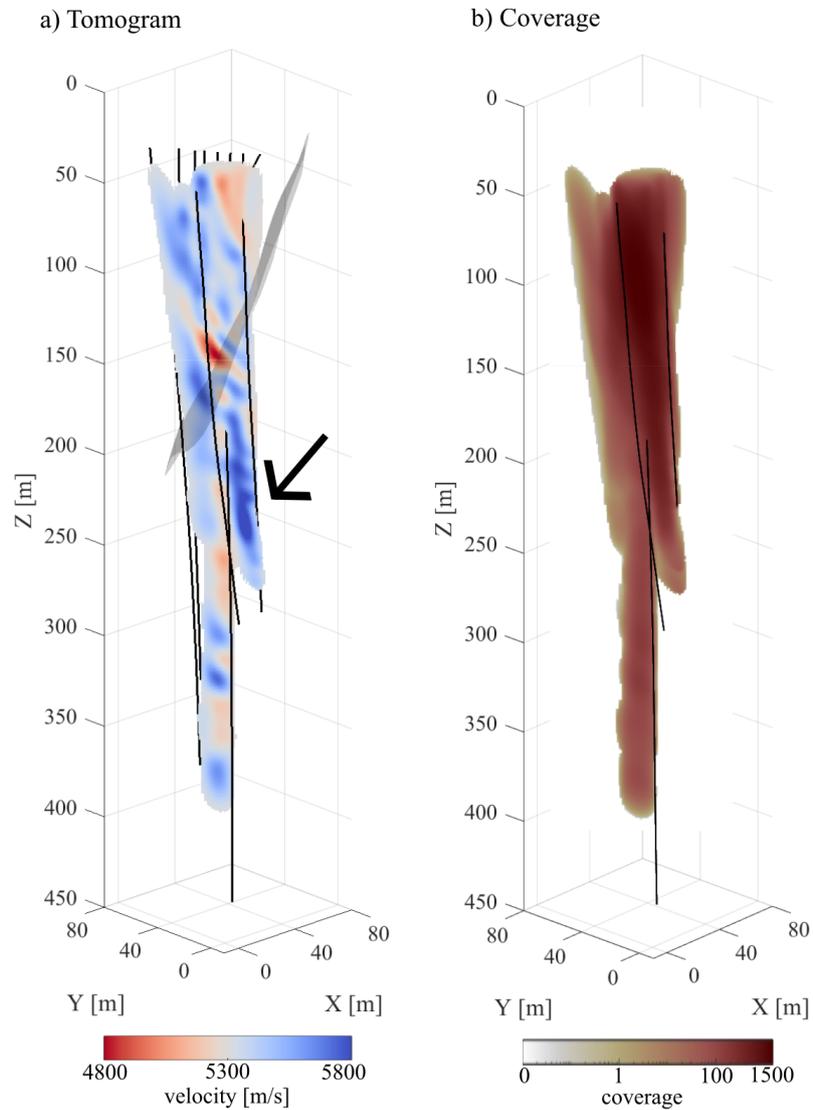


Figure 8. (a) Vertical slice perpendicular to the MFZ, which is shown as gray surface. The zone with particularly high velocity is marked by a black arrow. (b) shows the same slice as (a) but is the coverage of the model. As in to the previous plots, we use the following colormap for the coverage: white shows no coverage, and gray to yellow extremely low coverage. Higher coverage values are represented using a red colormap ranging from light to dark red.

300 ever, such single slices can be difficult to interpret. Therefore, we ~~have~~ created a series of videos, ~~with which it is making it~~ possible to scan in various directions through the model cube. ~~They~~ These videos are provided in the digital appendix, and ~~it is highly recommended to~~ we highly recommend that the reader make use of them to better understand the structures contained in the 3D model.

305 The horizontal and vertical slices in Figures 7 and 8 indicate that there are hints of the MFZ (e.g., the low-velocities near the MFZ intersection at $z = 150$ m in Figure 7), but there ~~is~~ are no consistent manifestations of it in the 3D velocity. This can either be indicative ~~for~~ of a high degree of complexity of the MFZ, but it could also be due to insufficient spatial resolution of the tomograms. To address the latter, we ~~have~~ performed a series of checkerboard tests that are documented in Appendix A. In brief, the tests demonstrated that the spatial resolution lies between 5 m and 10 m, with decreased resolution towards the
310 borders of the regions with ~~significant~~ insignificant coverage.

~~Comparison of thin and fat ray tomography using a x-y slice at $z = 150$ m: a) tomogram of the thin ray approach, (b) tomogram of the 2 kHz fat ray approach. The intersections of the boreholes with the slice are also shown. (c) and (d) show the coverage, defined via the column sums of the Jacobian matrix: a) Velocity tomograms at different depths and b) the corresponding spatial coverage. Unresolved areas are left white. The dots indicate the intersections of the boreholes with the slice, the larger dot indicates the borehole ST1. The green line indicates the intersection with the MFZ.~~

315 ~~a) Vertical slice perpendicular to the MFZ, which is shown as gray surface. Zone with particularly high velocities is marked with an arrow b) shows the same slice but for the coverage of the model.~~

5.2 Travel time residuals

To ~~check,~~ quantify how well the 3D tomographic velocity model ~~is capable to explain~~ explains the observed travel times, we
320 superimpose the observed and predicted travel times in Figure 9a) as a function of source-receiver offset. For a better visualization, the travel times t_{eff} are shown in reduced form, that is, $t_{red} = t_{eff} - \Delta/v_{red}$, where Δ is the source-receiver offset and v_{red} is the reduction velocity, which we have chosen to be 5340 m/s . Consequently, travel times with a ray velocity of v_{red} plot along a horizontal line at $t_{red} = 0$. Additionally, we show the differences between the observed and predicted data (residuals) as a function of source-receiver offset (Figure 9b) and in form of a histogram (Figure 9c).

325 From the residual plots in Figure 9b), two main conclusions can be drawn. First, there ~~seem~~ seems to be no significant ~~offset dependent~~ offset-dependent variations of the residuals (such variations could be indicative ~~for~~ of systematic errors in the tomograms). ~~Secondly~~ Second, about 70% of the residuals are below the average picking accuracy of 0.15 ms (marked with solid black lines in Figures 9b) and 9c). Therefore, the standard deviation of the residual distribution is close to the average picking
330 accuracy, ~~thereby~~ indicating that the observed data are neither over- nor under-fitted by the 3D tomographic velocity model.

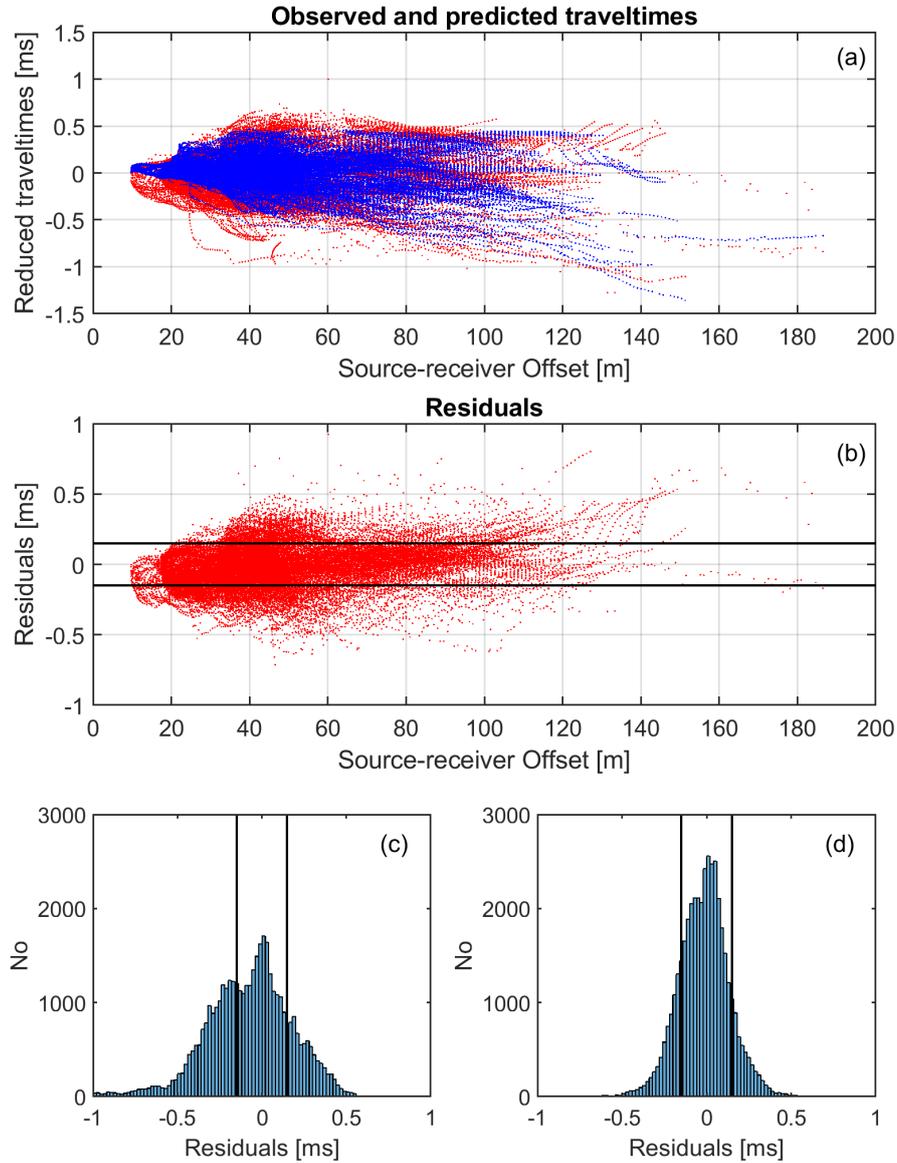


Figure 9. (a) Observed (red) and predicted (blue) travel times as a function of source-receiver offset. Reduced traveltimes are defined as $t_{red} = t - sro/5340$, where t_{red} and t denote the reduced and actual traveltimes, and sro is the source-receiver offset. (b) Corresponding residuals plotted as a function of source-receiver offset. (c) Residuals shown in form of a histogram. The manually determined picking accuracy is indicated with solid black lines in (b) and (c).

5.3 Validation of the velocity model with independent data sets

Laboratory measurements at fluid-saturated undisturbed core samples ~~indicated~~ indicate velocity values up to $V_p=5434$ m/s. From these results, the P-wave velocities at in-situ conditions with $P_{eff}=15$ MPa ~~were~~ are estimated to be 6123 m/s (David et al., 2020). This is broadly consistent with the maximum values ~~observed in~~ of the tomograms (6212 m/s).

335 Another option ~~to validate~~ for validating the velocities obtained by the tomographic inversions is offered by sonic logs, acquired in borehole ST1. A comparison is shown in Figure 10. To compare both data sets, the sonic logs were downsampled to the sampling rate of the tomographic velocity model. The tomographic velocities are shown in black and those ~~from~~ of the sonic logs are shown in orange. Adjacent to the velocity profiles, we ~~have~~ also extracted the coverage ~~values along~~ (defined via the column sums of the Jacobian matrix) along the coordinates of ST1, shown as blue line. They show that the depth range
340 of trustworthy tomographic velocities lies between 50 m and 230 m (denoted by horizontal dashed lines in Figure 10). As a consequence, the tomographic velocities above and below the ~~depth range resolved~~ resolved depth range are close to the initial velocities of 5300 m/s.

In the resolved depth range, the sonic logs show slightly higher velocities compared with the tomographic results. This is
345 expected because the sonic logs employ higher frequencies. Therefore, the comparison with the sonic logs is rather restricted to relative velocity changes. Both curves show a significant low-velocity anomaly at about 150 m depth. To verify this low-velocity zone as a feature of the MFZ, we compare it with the ATV (Acoustic Televiwer Log) measurements (Figure 10, right panel) at this depth. We show the ATV travel times, adapted from Bröker et al. (2024a). The ATV measurements reveal a broad fracture zone shown by an increase in ATV travel time up to $180 \mu\text{s}$. Furthermore, Bröker et al. (2024a) provide more evidence
350 ~~on~~ for the existence of a significant fracture zone. Spinner, electrical conductivity, and temperature logs exhibit very significant anomalies in this depth range. Furthermore, optical televiwer measurements indicate smaller breakouts.

The velocities of the 3D ~~seismic tomography~~ model, extracted along ~~borehole the~~ ST1 ~~generally show a borehole,~~ generally indicate good agreement with the borehole logs. So the question arises, ~~if~~ will the tomographic velocity model ~~would~~ allow delineations and characterizations further away from the boreholes, where no ground truth information is available. ~~?~~ For that
355 purpose, we ~~consider again~~ again consider the horizontal and vertical slices through the 3D velocity model (Figures 7 and 8 ~~and,~~ along with the movies provided in the digital appendix). If the MFZ ~~would~~ appears to be a clearly confined zone, one would expect a correspondingly well-confined low-velocity zone in the velocity model. Instead, we ~~observe generally~~ generally observe decreased velocities along the MFZ intersections, ~~but~~ however, there is also a substantial amount of heterogeneity. At the hor-
360 izontal slice ~~at~~ $z = 150$ m (Figure 7), the MFZ ~~is crosseutting~~ crosscuts the slice in its central part, where the spatial resolution is best, but at $z = 100$ m and $z = 200$ m, the intersection is at the border of the resolution limit (Figure 7b). As demonstrated in Appendix A, the resolving power of our data set is limited towards the edges of the regions with coverage. Therefore, it remains unclear ~~if~~ whether the heterogeneities are the result of the complexity of the MFZ ~~or~~ if they are caused by the limited spatial resolution. Most likely, both effects contribute to the ~~velocity structures observed~~ observed velocity structures.

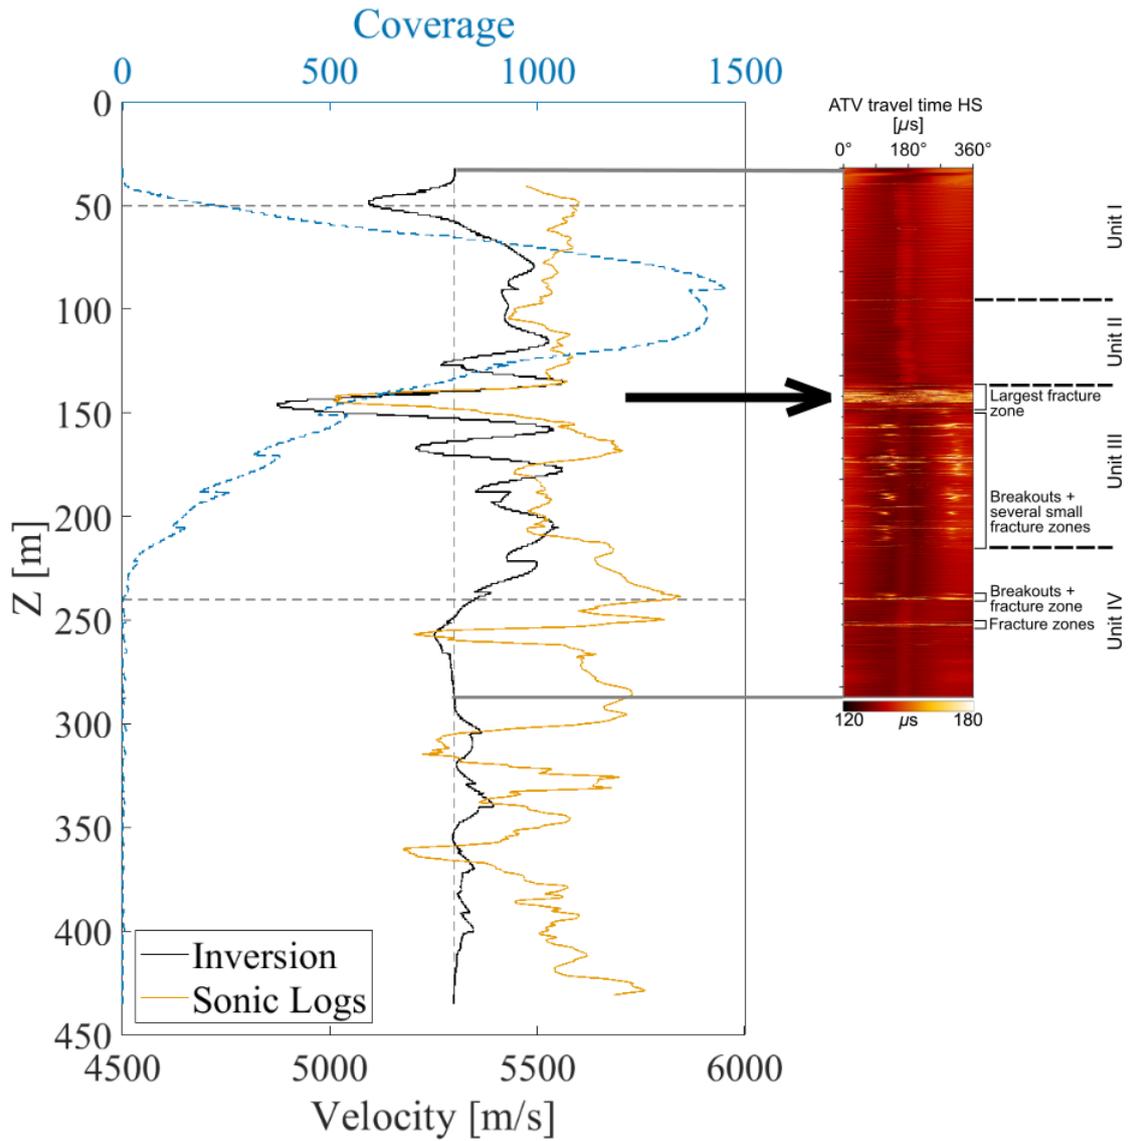


Figure 10. Comparison of the inversion results with additional data acquired along the central borehole ST1 (Figure 1c). Tomographic velocities, extracted along ST1 (black) are compared with sonic log data (orange). The horizontal gray dashed lines indicate the zone of significant coverage shown with a dashed blue line (between $z = 50$ m and $z = 250$ m). In this range, we compare the results with ATV logs from Bröker et al. (2024a).

365 5.4 Appraisal of rock quality

The velocity variations found in the tomographic volume are relatively small, and 99% of the velocities lie in the range $4900 < v_p < 5800$ m/s. This is consistent with the findings from borehole logs (Shakas, 2019) that the host rock is moderately disturbed. The velocity variations can be further quantified using the seismic rock quality designation factor (SRQD) introduced by Deere and Miller (1966):

$$370 \quad SRQD = \left(\frac{v_p}{v_p^{lab}} \right)^2 \times 100. \quad (4)$$

v_p^{lab} is the velocity of the intact rock measured in the laboratory, which is 6123 m/s for the BedrettoLab (David et al., 2020). According to Deere and Deere (1988), the SRQD is a good approximation to the rock quality designation factor (RQD). The SRQD values within our tomographic model lie between 64 and 90, which translates ~~to~~ into a rock quality from "fair" to "good/excellent" (Deere and Deere, 1988). This is consistent with geological observations in the geothermal testbed. Based
375 on tunnel observations and borehole logs, Ma et al. (2022) ~~concluded~~ conclude that the general amount of fracturing in the geothermal testbed is low to moderate.

5.5 Limitations of the tomographic velocity model

For an appropriate interpretation of the structures found in the ~~tomographic~~ 3D tomographic model, it is necessary to consider its inherent ~~limitation. First of all~~ limitations. First, the spatial resolution ~~needs to~~ should be considered. ~~It~~ This is influenced by
380 the ~~ray~~ coverage within the model and the seismic wavelengths. As shown in Figures 7 and 8, the coverage of the fat rays is generally high and homogeneous. Williamson and Worthington (1993) demonstrated that the spatial resolution scales approximately with the width of the Fresnel zone. ~~For~~ Using an average velocity of the tomographic model, a frequency of 2 kHz and an average source-receiver distance of about 50 m, the width of the Fresnel zone is approximately 10 m, which corresponds quite well with the ~~minium~~ minimum feature size in the fat ray tomograms. Furthermore, this is remarkably consistent with the
385 results of the checkerboard tests documented in Appendix A.

~~Further~~ Additional factors that may limit the reliability of the tomograms include the presence of seismic anisotropy and ~~the~~ accuracy of the borehole traces. As indicated earlier, minor anisotropy effects may exist, but we have chosen to employ an isotropic model. Ignoring significant anisotropy effects during an isotropic inversion would ~~result in~~ produce layered structures
390 with alternating high and low velocities, thereby mimicking anisotropy. We did not ~~spot~~ observe a pronounced layering in our tomograms.

Another potential source of systematic errors includes inaccuracies of the borehole trajectories, which tend to increase towards the ~~bottoms~~ bottom of the boreholes. Maurer and Green (1997) ~~has shown~~ showed that such deviations from the true
395 trajectories would result in substantial anomalies near the borehole bottoms, where the formal resolution is ~~worst and anomalies~~ ~~caused~~ lowest and anomalies can be easily developed by systematic errors, ~~can develop most easily~~. Such effects are not ob-

served in our tomograms.

400 Although we can exclude major artifacts from systematic errors introduced by anisotropy and borehole trajectory inaccuracies, it cannot be excluded that they may have introduced minor distortions. Therefore, only gross features in the tomograms should be interpreted.

5.6 Comparison of seismic velocities with induced seismicity

In 2022 - 2023, hydraulic stimulation experiments were conducted in the geothermal testbed by injecting water into selected packer intervals of borehole ST1 (see also Section 2). An overview of these experiments is ~~given in~~ provided by Obermann et al. (2024), with a seismic analysis using DugSeis (~~Roskopf et al., 2024; ?~~)(Roskopf et al., 2024, 2025). We focus here on the seismicity from Phase I, ~~in~~ during which eight intervals at depths of ~~120 < z < 300 m~~ 120 < z < 300 m were stimulated using consistent injection protocols (Bröker et al., 2024a; Doonechaly et al., 2025). We examine the relationship between seismicity and our 3D tomographic velocity model, and assess the effect of velocity heterogeneity on location accuracy.

410 For the analysis, we selected well-constrained events from the catalog of ~~Obermann et al. (2024)~~ Obermann et al. (2024), restricted to those within the tomographic model. Events ~~required were~~ required to have at least six P-wave picks (no S-wave picks were available) and were relocated using a grid-search algorithm (Moser et al., 1992) with travel times computed via the Eikonal solver (Podvin and Lecomte, 1991) on a 0.5 m grid. Outliers in the pick database were removed using a 0.75 ms threshold, after which the selection criteria were re-applied and events re-relocated. We further excluded events with poor location geometry using the D-criterion (~~Kijko, 1977; Menke, 1984~~), ~~adopting~~ (Kijko, 1977), which is proportional to the determinant of the Hessian matrix of the linearized location problem (see Kijko (1977) for more detailed explanations). Based on visual inspections, we have chosen a threshold of 1×10^{-7} ~~based on visual inspection~~. This procedure yielded 4283 events ~~from originally out of the original~~ 6413 events for further analysis.

420 All considered events have moment magnitudes $M_w < -3$ and can therefore be attributed to the fluid injections within the geothermal testbed, ~~excluding and not to the~~ regional seismicity. Crosshole measurements were performed prior to injection and thus represent pre-stimulation conditions. ~~Since repeated~~ Repeated active measurements during stimulation indicated P-wave velocity changes well below 1%, ~~this has negligible impact~~.

425 5.6.1 Influence of the velocity model on hypocentral parameters

Figures 11 and 12 compare event locations obtained with the 3D tomographic model and a homogeneous velocity model with ~~the an~~ average velocity of 5340 m/s, both using the same grid search algorithm. Differences are generally small (mean: 2.2 m, median: 1.4 m), with slightly larger deviations at depth $z > 210$ m. No systematic shift is observed between the event locations using the two velocity models. We therefore conclude, in line with observations from ~~?~~ Roskopf et al. (2025), that velocity

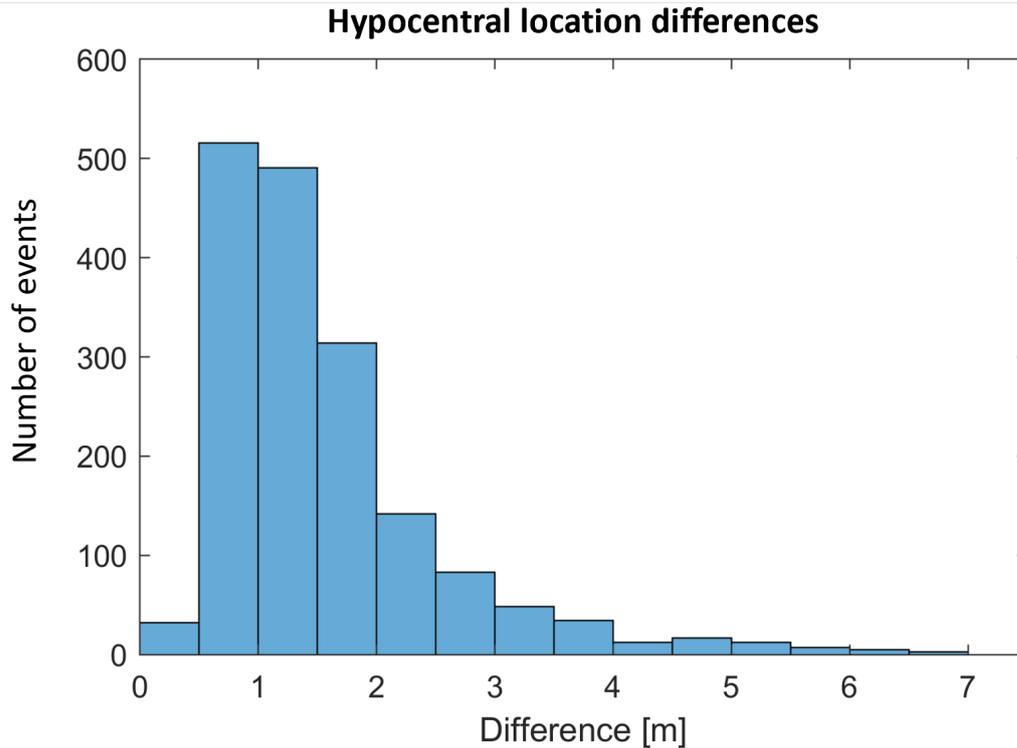


Figure 11. Histogram of the absolute location differences using either a homogeneous or the 3D tomographic model.

430 variations in the 3D model have only a minor effect on event locations.

5.6.2 Spatial correlation of seismic velocities and the induced seismicity

To study the spatial correlation between seismicity and velocity structures, we employed the following methodology: First, we subdivided the velocity model into low-, intermediate, and high-velocity regions. Low and high velocities
 435 are defined as values with more than one standard deviation (≈ 150 m/s) below or above the mean velocity (≈ 5340 m/s). Then, seismic events were superimposed on horizontal and vertical slices of the velocity model, within $\pm 2.5 \pm 2.5$ m of each slice (Figures 13 and 14; full slice series in the digital appendix).

Several interesting observations can be made in from the superimposed images in Figures 13 and 14. In horizontal slices
 440 at injection depths, the seismicity clusters around the injection borehole ST1, with little correlation to the MFZ (green lines in Figure 13). Most events occur in slightly reduced or intermediate-velocity zones and only very rarely in high- or very low-velocity regions. At $z = 237$ m, a distinct cluster lies about 20 m from ST1, almost entirely in the intermediate velocity range. Vertical slices show similar patterns (Figure 14): events are concentrated in slightly reduced or intermediate

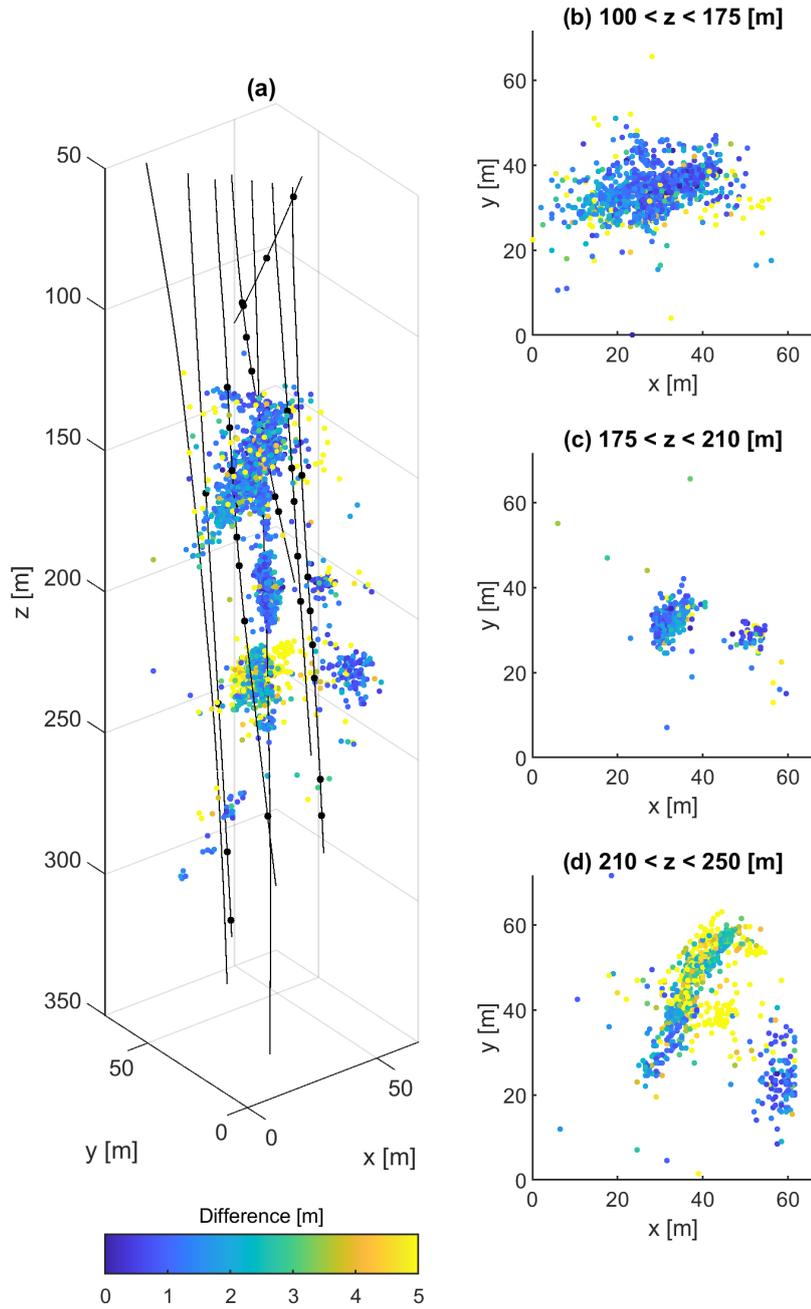


Figure 12. Spatial distribution of location differences shown in Figure 11. Panels (b) to (d) include top view representations of selected depth intervals.

~~velocity-intermediate-velocity~~ zones, often along boundaries towards higher-velocity regions.

445

A possible interpretation of these patterns is that high velocities correspond to intact host rock that remained unfractured under injection pressures (< 18 MPa), whereas very low velocities indicate heavily fractured zones incapable of storing sufficient stress. Seismicity thus preferentially occurs in ~~intermediate-intermediate-velocity~~ zones, where fractures exist but rock strength still allows stress accumulation and failure.

450

From a mechanical perspective, seismic velocities reflect stiffness. Microcracking and pore fluids lower velocities and stiffness (e.g., Mavko et al., 2009; Paterson and Wong, 2005), consistent with fault-zone observations (e.g., Faulkner et al., 2010) and laboratory rock-failure experiments (e.g., Stanchits et al., 2011). Velocity contrasts likely create strain gradients and stress ~~concentration-concentrations~~ at boundaries between intact and damaged rock—a mechanism invoked for acoustic emissions
455 in granite (Salazar Vásquez et al., 2024) and rock bursts in mines (Barton, 2006).

A complementary mechanism is fluid migration: ~~lower/intermediate-velocity-lower- and intermediate-velocity~~ regions are more permeable due to connected microcracks. ~~Fluid-preferentially-infiltrates~~ Fluids preferentially infiltrate these zones, where small pressure perturbations can induce failure if structures are near critical stress (Townend and Zoback, 2000).

460

We finally checked ~~,if whether~~ similar correlations between seismicity and ~~intermediate-velocity-intermediate-velocity~~ zones have been observed at other ~~places-loations~~ and across scales. As already mentioned, they were observed in centimeter-scale laboratory tests ~~Salazar Vásquez et al. (2024)~~ (Salazar Vásquez et al., 2024), and similar observations were made at kilometer-scale geothermal fields (e.g. Hengill, Iceland (Obermann et al., 2022)).

465

Therefore, we conclude that the spatial correlation ~~of seismicity and intermediate-velocity-between seismicity and intermediate-velocity~~ zones at the BedrettoLab geothermal testbed is consistent with other observations across scales. The most plausible explanations involve stress gradients at velocity contrasts and enhanced permeability in fractured zones. Further work is needed to quantify these mechanisms and link observations with geomechanical processes more directly.

6 Conclusion

470

The experimental setup of the geothermal testbed in the BedrettoLab offered unique opportunities for 3D tomographic studies. The literature on such investigations ~~on that at this~~ scale is very sparse—; in fact, we could not find a comparable study in the literature. Our ~~finding-could thus be a~~ findings could thus serve as motivation for other experiments in similar environments.

475

We showed that, in comparison with traditional thin ray methods, fat ray tomography ~~does-not~~ only better ~~mimic-represents~~ the physics of band-limited seismic data ~~,but it also results in an-but also provides~~ improved coverage. Furthermore, fat ray tomography is less dependent on the model parametrization of the inversion grid ~~(compared with thin rays), because than~~

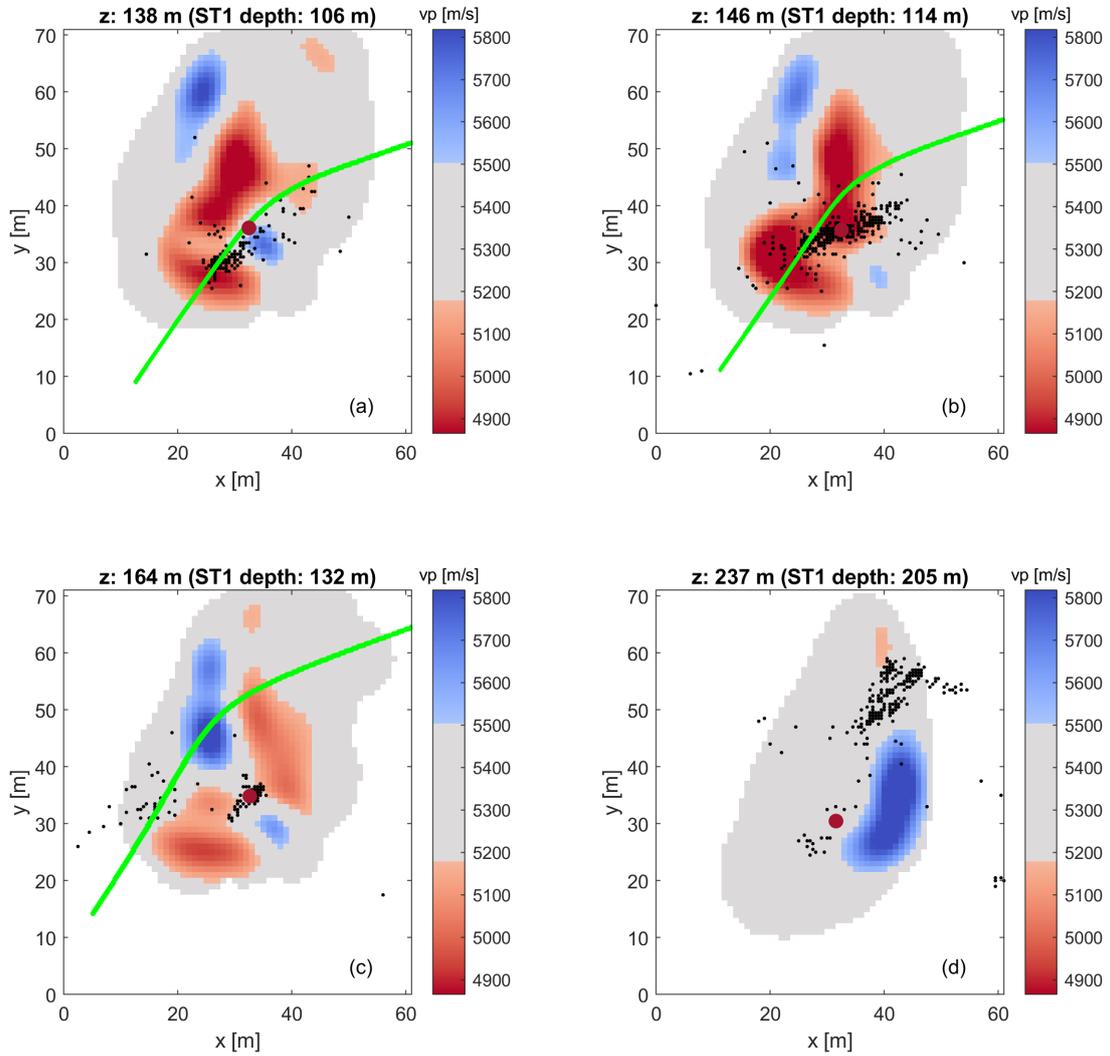


Figure 13. Horizontal slices through the 3D tomographic model. Low and high velocities are shown in red and blue, respectively, and intermediate velocity areas are shown as gray. The seismicity located ± 2.5 m distance from the slices is superimposed and indicated by black dots. The intersection of the MFZ is shown in light indicated by the green line.

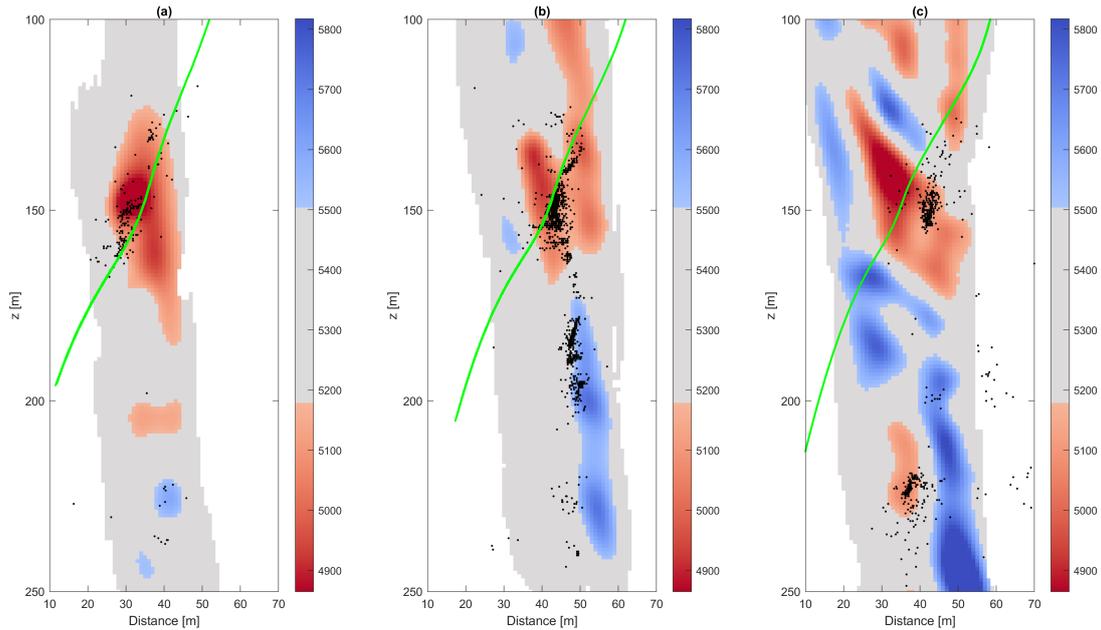


Figure 14. Vertical slices ~~perpendicular~~ perpendicular to the MFZ through the tomographic model. The slices are located near the trace of the injection borehole ST1 (roughly ± 10 m away from each other). Low and high velocities are shown in red and blue, respectively, and intermediate velocity areas are shown as gray. The seismicity located ± 2.5 m distance from the slices is superimposed by using black dots. The intersection of the MFZ is ~~shown in light~~ indicated by the green line.

thin-ray methods, as the sensitivity kernels (i.e., the fat ray volumes) are unaffected by the discretization of the inversion model.

~~There are two main findings~~ Two main findings emerge from the analysis of the 3D velocity model ~~derived with our obtained~~ in this tomography study. First, we ~~could were able to~~ characterize a major fault zone. Its signature in the tomographic image is not a narrow and well confined zone of decreased velocities, as one would expect. Instead, it is distinguished by a relatively large volume of generally decreased velocities with considerable heterogeneities. Checkerboard resolution tests indicated that some of ~~the features may be due to~~ these features may result from the limited spatial resolution of our experimental setup, particularly near the boundaries of the region covered by the fat rays.

485

~~Secondly, we found~~ Second, we observed a spatial correlation between passive seismic events $\bar{\gamma}$ -generated by hydraulic stimulations $\bar{\gamma}$ -and the velocity structures in our tomographic model. The induced seismic events occur predominantly between ~~high and very low velocity~~ high- and very-low-velocity zones. Based on similar results from a small-scale laboratory study, we attribute this observation to the existence of stress gradients in the ~~regions~~ areas of intermediate velocities.

490 *Data availability.* The input data for the inversion is published by Maurer and Schwarz (2025); <https://doi.org/10.3929/ethz-b-000725491>.
Seismicity catalogs of the VALTER project have been published by Roskopf et al. (2025)

Video supplement. Video supplements for the 3D velocity model were published in Maurer and Schwarz (2025) <https://doi.org/10.3929/ethz-b-000725491>

Appendix A: ~~Appendix A:~~ Checkerboard Tests

495 The spatial resolution of the tomographic inversions is a key ~~information factor~~ for interpreting the 3D tomograms. There are several options that can be considered for appraising the spatial resolution. For seismic tomography, so-called checkerboard tests ~~established themselves to be~~ have established themselves as a useful tool ~~e~~ (e.g., Zelt and Barton, 1998). Although such tests have well-known limitations (e.g., Leveque et al., 1993; Rawlinson and Spakman, 2016), they can provide a first-order estimate of the spatial resolution.

500

~~For checking~~ To check the resolution power of our data set~~set~~, we generated synthetic data with block sizes of ~~$5 \times 5 \times 5 \text{ m}^3$, $10 \times 10 \times 10 \text{ m}^3$ and $15 \times 15 \times 15 \text{ m}^3$~~ $5 \times 5 \times 5 \text{ m}^3$, $10 \times 10 \times 10 \text{ m}^3$ and $15 \times 15 \times 15 \text{ m}^3$. ~~The velocity contrasts were chosen to be $\pm 300 \text{ m/s}$, which reflects the velocity variations found in our tomographic model.~~ The same source-receiver configurations ~~;~~ as employed for the inversion of the observed data sets ~~;~~ were considered, and the same processing workflows were applied. Similar regularization constraints, as employed for the inversions of the field data, were applied. The results are shown in Figures A1 to A3. ~~They~~ These figures show selected slices through the 3D models. It is evident that block sizes of 15 m and 10 metres m can be generally well resolved, but structures of the size of 5 meters m remain unresolved in most areas. It is also observed that the spatial resolution decreases, as expected, towards the boundaries of the regions covered by rays. This is particularly apparent in the horizontal slices in Figure A3.

510 We also repeated the checkerboard tests with the thin ray approach. Similar results as for the fat rays were achieved (not shown).

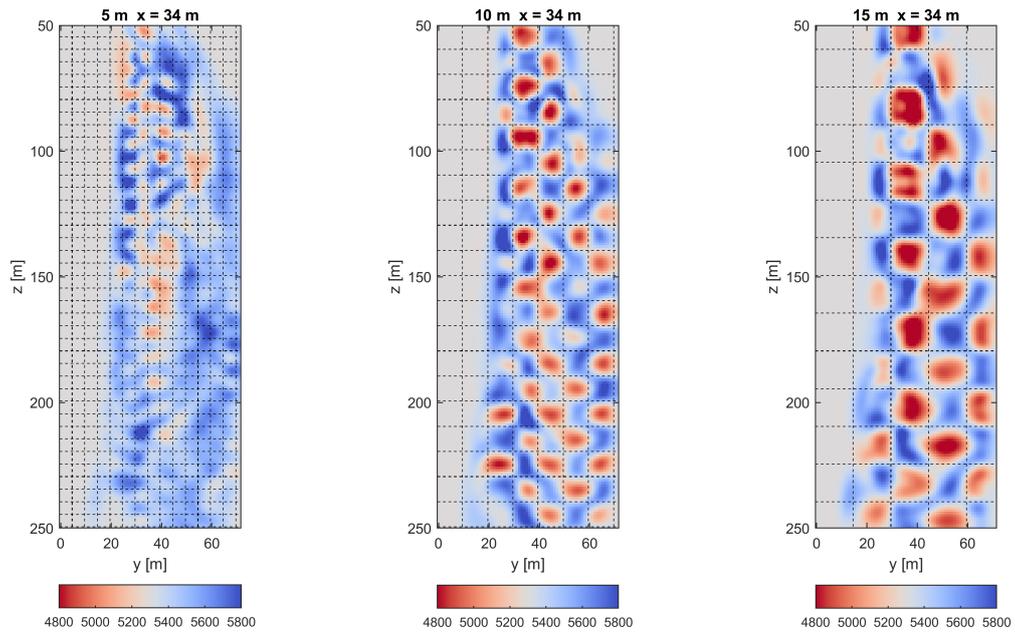


Figure A1. Vertical cross section along a y-z slice at $x = 34$ m. The dashed lines ~~lines~~ indicate the locations and size of the checkerboard blocks. Block sizes are 5 (left), 10 (middle) and 15 (right) metresmeters.

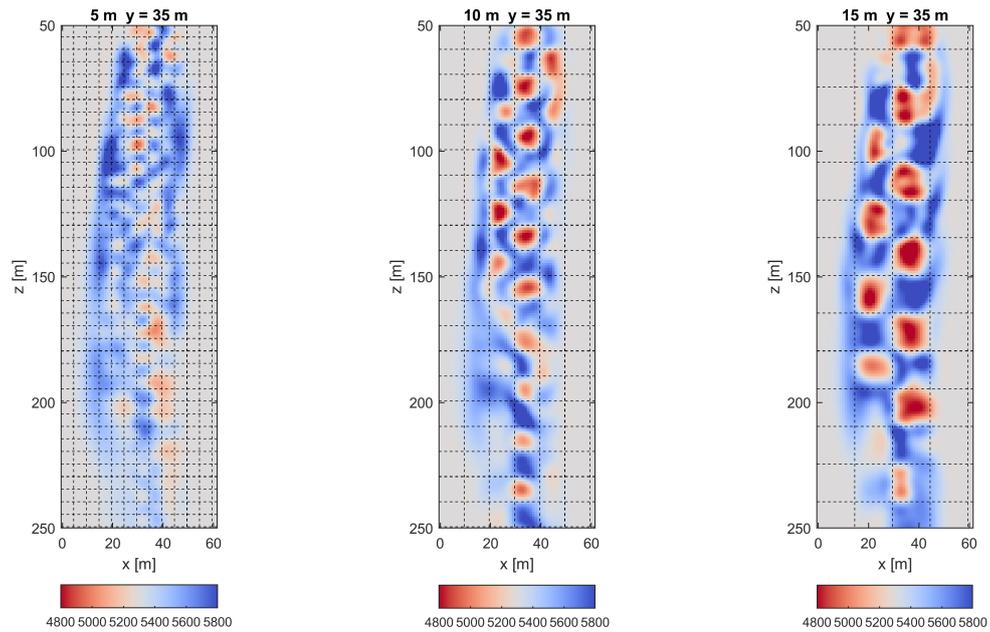


Figure A2. Vertical cross section along a x - z slice at $y = 35$ m. The dashed lines indicate the locations and size of the checkerboard blocks. Block sizes are 5 (left), 10 (middle) and 15 (right) meters.

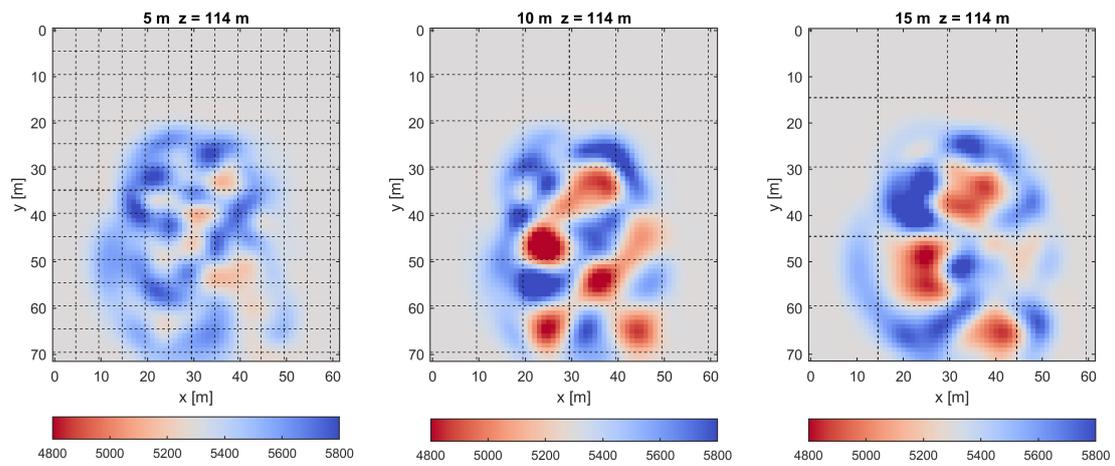


Figure A3. Horizontal cross section along a slice at $z = 114$ m. The dashed lines ~~lines~~ indicate the locations and size of the checkerboard blocks. Block sizes are 5 (left), 10 (middle) and 15 (right) metresmeters.

Author contributions. MLS performed the data analysis, the Inversion and wrote the paper. HM supervised MLS, performed the earthquake relocation and wrote/edited the paper. AO and AS organized the data acquisition, performed preliminary tests and edited the paper. PAS edited the paper. HM, SW and DG supervised the project.

515 *Competing interests.* The authors declare that they have no conflict of interest.

~~In the "Bedretto Underground Laboratory for Geosciences and Geoenergies", ETH Zurich studies in close collaboration with national and international partners techniques and procedures for a safe, efficient, and sustainable use of geothermal heat and questions related to earthquake physics. The BedrettoLab is financed by the Werner Siemens Foundation, ETH Zürich and the Swiss National Science Foundation. Miriam Schwarz is founded by the SNF Multi PhD (200021_192151) project.~~
520 ~~The research in this publication has received additional funding by the project VALTER (Validierung von Technologien zur Reservoir Entwicklung) (SI/501496-01). The BedrettoLab would like to thank Matterhorn Gotthard Bahn for providing access to the tunnel. We would like to thank Kai Bröker for his feedback on section 2, particularly regarding fracture mapping in the BedrettoLab. We thank the BedrettoLab Operation Team, led by Marian Hertrich, for their excellent support, which was essential for this project. This paper is BULGG publication BPN_029~~

525 *Acknowledgements.* In the "Bedretto Underground Laboratory for Geosciences and Geoenergies", ETH Zurich studies, in close collaboration with national and international partners, techniques and procedures for the safe, efficient, and sustainable use of geothermal heat and questions related to earthquake physics. The BedrettoLab is financed by the Werner Siemens Foundation, ETH Zürich and the Swiss National Science Foundation. Miriam Schwarz is founded by the SNF Multi PhD (200021_192151) project. The research in this publication has received additional funding by the project VALTER (Validierung von Technologien zur Reservoir Entwicklung) (SI/501496-01). The BedrettoLab
530 would like to thank Matterhorn Gotthard Bahn for providing access to the tunnel. We would like to thank Kai Bröker for his feedback on section 2, particularly regarding fracture mapping in the BedrettoLab. We thank the BedrettoLab Operation Team, led by Marian Hertrich, for their excellent support, which was essential for this project. This paper is BULGG publication BPN_029

References

- Amann, F., Gischig, V., Evans, K., Doetsch, J., Jalali, R., Valley, B., Krietsch, H., Dutler, N., Villiger, L., Brixel, B., Klepikova, M., Kittilä, A., Madonna, C., Wiemer, S., Saar, M. O., Loew, S., Driesner, T., Maurer, H., and Giardini, D.: The seismo-hydronechanical behavior during deep geothermal reservoir stimulations: open questions tackled in a decameter-scale in situ stimulation experiment, *Solid Earth*, 9, 115–137, <https://doi.org/10.5194/se-9-115-2018>, 2018.
- Barton, N.: *Rock Quality, Seismic Velocity, Attenuation and Anisotropy*, CRC Press, ISBN 9781134160136, <https://doi.org/10.1201/9780203964453>, 2006.
- Behnen, K., Hertrich, M., Maurer, H., Shakas, A., Bröker, K., Epiney, C., Blanch Jover, M., and Giardini, D.: Investigation of Seismic Anisotropy in the Undisturbed Rotondo Granite, *EGU sphere*, 2024, 1–20, <https://doi.org/10.5194/egusphere-2024-1919>, 2024.
- Block, L. V., Cheng, C. H., Fehler, M. C., and Phillips, W. S.: Seismic imaging using microearthquakes induced by hydraulic fracturing, *Geophysics*, 59, 102–112, <https://doi.org/10.1190/geo1992-0156>, 1994.
- Bröker, K., Ma, X., Gholizadeh Doonechaly, N., Roskopf, M., Obermann, A., Rinaldi, A. P., Hertrich, M., Serbeto, F., Maurer, H., Wiemer, S., and Giardini, D.: Hydromechanical characterization of a fractured crystalline rock volume during multi-stage hydraulic stimulations at the BedrettoLab, *Geothermics*, 124, <https://doi.org/10.1016/j.geothermics.2024.103126>, 2024a.
- Bröker, K., Ma, X., Zhang, S., Doonechaly, N. G., Hertrich, M., Klee, G., Greenwood, A., Caspari, E., and Giardini, D.: Constraining the stress field and its variability at the BedrettoLab: Elaborated hydraulic fracture trace analysis, *International Journal of Rock Mechanics and Mining Sciences*, 178, 105 739, <https://doi.org/https://doi.org/10.1016/j.ijrmms.2024.105739>, 2024b.
- Ceccato, A., Behr, W. M., Zappone, A. S., Tavazzani, L., and Giuliani, A.: Structural Evolution, Exhumation Rates, and Rheology of the European Crust During Alpine Collision: Constraints From the Rotondo Granite—Gotthard Nappe, *Tectonics*, 43, <https://doi.org/10.1029/2023TC008219>, 2024.
- Červený, V. and Soares, J. E. P.: Fresnel volume ray tracing, *Geophysics*, 57, 902–915, <https://doi.org/10.1190/1.1443303>, 1992.
- Charlét, J., Cuenot, N., Dorbath, C., and Dorbath, L.: Tomographic study of the seismic velocity at the Soultz-sous-Forêts EGS/HDR site, *Geothermics*, 35, 532–543, <https://doi.org/10.1016/j.geothermics.2006.10.002>, 2006.
- David, C., Nejati, M., and Geremia, D.: On petrophysical and geomechanical properties of Bedretto Granite, ETH Zurich, <https://doi.org/https://doi.org/10.3929/ethz-b-000428267>, 2020.
- Deere, D. U. and Deere, D. W.: *The Rock Quality Designation (RQD) in Practice, Rock Classification Systems for Engineering Purposes*, ASTM STP 984, pp. 91–101, 1988.
- Deere, D. U. and Miller, R. P.: Engineering classification and index properties for intact rock, <https://api.semanticscholar.org/CorpusID:129485360>, 1966.
- Diehl, T., Cauzzi, C., Clinton, J., Kraft, T., Kästli, P., Massin, F., Lanza, F., Simon, V., Grigoli, F., Hobiger, M., Roth, P., Haslinger, F., Fäh, D., and Wiemer, S.: Earthquakes in Switzerland and surrounding regions during 2019 and 2020, *Swiss Journal of Geosciences*, 118, <https://doi.org/10.1186/s00015-025-00489-4>, 2025.
- Doonechaly, N. G., Bröker, K., Hertrich, M., Roskopf, M., Obermann, A., Durand, V., Serbeto, F., Shakas, A., Ma, X., Rinaldi, A. P., Repollés, V. C., Villiger, L., Meier, M.-A., Gischig, V., Plenkers, K., Maurer, H., Wiemer, S., and Giardini, D.: Insights from Subsurface Monitoring for Engineering of the Stimulation Pattern in Fractured Reservoirs, *Rock Mechanics and Rock Engineering*, 58, 8973–9000, <https://doi.org/https://doi.org/10.1007/s00603-025-04525-5>, 2025.

- Edwards, B., Kraft, T., Cauzzi, C., Kästli, P., and Wiemer, S.: Seismic monitoring and analysis of deep geothermal projects in st Gallen and
570 Basel, Switzerland, *Geophysical Journal International*, 201, 1022–1039, <https://doi.org/10.1093/gji/ggv059>, 2015.
- Ellsworth, W. L., Giardini, D., Townend, J., Ge, S., and Shimamoto, T.: Triggering of the Pohang, Korea, Earthquake (Mw 5.5) by Enhanced
Geothermal System Stimulation, 90, 1844–1858, <https://doi.org/10.1785/0220190102>, 2019.
- Escallon, D., Shakas, A., and Maurer, H.: Modelling and inferring fracture curvature from borehole GPR data: A case study from the Bedretto
Laboratory, Switzerland, *Near Surface Geophysics*, 22, 235–254, <https://doi.org/10.1002/nsg.12286>, 2024.
- 575 Faulkner, D., Jackson, C., Lunn, R., Schlische, R., Shipton, Z., Wibberley, C., and Withjack, M.: A review of recent develop-
ments concerning the structure, mechanics and fluid flow properties of fault zones, *Journal of Structural Geology*, 32, 1557–1575,
<https://doi.org/https://doi.org/10.1016/j.jsg.2010.06.009>, fault Zones, 2010.
- Gischig, V. S., Giardini, D., Amann, F., Hertrich, M., Krietsch, H., Loew, S., Maurer, H., Villiger, L., Wiemer, S., Bethmann, F., Brixel,
B., Doetsch, J., Doonechaly, N. G., Driesner, T., Dutler, N., Evans, K. F., Jalali, M., Jordan, D., Kittilä, A., Ma, X., Meier, P., Nejati,
580 M., Obermann, A., Plenkers, K., Saar, M. O., Shakas, A., and Valley, B.: Hydraulic stimulation and fluid circulation experiments in
underground laboratories: Stepping up the scale towards engineered geothermal systems, *Geomechanics for Energy and the Environment*,
24, <https://doi.org/10.1016/j.gete.2019.100175>, 2020.
- Heidbach, O., Rajabi, M., Cui, X., Fuchs, K., Müller, B., Reinecker, J., Reiter, K., Tingay, M., Wenzel, F., Xie, F., Ziegler, M. O., Zoback,
M.-L., and Zoback, M.: The World Stress Map database release 2016: Crustal stress pattern across scales, *Tectonophysics*, 744, 484–498,
585 <https://doi.org/https://doi.org/10.1016/j.tecto.2018.07.007>, 2018.
- Heincke, B., Maurer, H., Green, A. G., Willenberg, H., Spillmann, T., and Burlini, L.: Characterizing an unstable mountain slope using
shallow 2D and 3D seismic tomography, *Geophysics*, 71, <https://doi.org/10.1190/1.2338823>, 2006.
- Hirschberg, S., Wiemer, S., and Burgherr, P. e.: Energy from the earth Deep geothermal as a resource for the future?, TA-SWISS, 2015,
<https://doi.org/10.3929/ethz-a-010277690>, 2015.
- 590 Holliger, K., Musil, M., and Maurer, H. R.: Ray-based amplitude tomography for crosshole georadar data: a numerical assessment, *Tech.*
rep., www.elsevier.com/locate/jappgeo, 2001.
- Husen, S. and Kissling, E.: Local earthquake tomography between rays and waves: fat ray tomography, *Tech. rep.*, ISBN 00319201/01, 2001.
- Jordan, D.: Geological Characterization of the Bedretto Underground Laboratory for Geoenergies, ETH Zurich Research Collection,
<https://doi.org/10.3929/ethz-b-000379305>, 2019.
- 595 Jordi, C., Schmelzbach, C., and Greenhalgh, S.: Frequency-dependent travelttime tomography using fat rays: application to near-surface
seismic imaging, *Journal of Applied Geophysics*, 131, 202–213, <https://doi.org/10.1016/j.jappgeo.2016.06.002>, 2016.
- Kijko, A.: An Algorithm for the Optimum Distribution of a Regional Seismic Network-I, *Pageoph*, 115, 999–1009, 1977.
- Kneafsey, T., Dobson, P., Blankenship, D., Schwering, P., White, M., Morris, J. P., Huang, L., Johnson, T., Burghardt, J., Mattson, E.,
Neupane, G., Strickland, C., Knox, H., Vermuel, V., Ajo-Franklin, J., Fu, P., Roggenthen, W., Doe, T., Schoenball, M., Hopp, C., Tribaldos,
600 V. R., Ingraham, M., Guglielmi, Y., Ulrich, C., Wood, T., Frash, L., Pyatina, T., Vandine, G., Smith, M., Horne, R., McClure, M., Singh, A.,
Weers, J., and Robertson, M.: The EGS Collab project: Outcomes and lessons learned from hydraulic fracture stimulations in crystalline
rock at 1.25 and 1.5 km depth, *Geothermics*, 126, <https://doi.org/10.1016/j.geothermics.2024.103178>, 2025.
- Labhart T: Erläuterungen Zum Geologischen Atlas Des Schweiz 1:25000, Val Bedretto, 2005.
- Lanz, E., Maurer, H., and Green, A. G.: Refraction tomography over a buried waste disposal site, *Geophysics*, 63, 1414–1433,
605 <https://doi.org/10.1190/1.1444443>, 1998.

- Leveque, J.-J., Rivera, L., and Wittlinger, G.: On the use of the checker-board test to assess the resolution of tomographic inversions, <https://academic.oup.com/gji/article/115/1/313/604170>, 1993.
- Li, B., Ding, L., Hu, D., and Zheng, S.: Backtracking Algorithm-based Disassembly Sequence Planning, in: *Procedia CIRP*, vol. 69, pp. 932–937, Elsevier B.V., ISSN 22128271, <https://doi.org/10.1016/j.procir.2017.12.007>, 2018.
- 610 Lützenkirchen, V. and Loew, S.: Late Alpine brittle faulting in the Rotondo granite (Switzerland): Deformation mechanisms and fault evolution, *Swiss Journal of Geosciences*, 104, 31–54, <https://doi.org/10.1007/s00015-010-0050-0>, 2011.
- Ma, X., Hertrich, M., Amann, F., Bröker, K., Doonechaly, N. G., Gischig, V., Hochreutener, R., Kästli, P., Krietsch, H., Marti, M., Nägeli, B., Nejati, M., Obermann, A., Plenkers, K., Rinaldi, A. P., Shakas, A., Villiger, L., Wenning, Q., Zappone, A., Bethmann, F., Castilla, R., Seberto, F., Meier, P., Driesner, T., Loew, S., Maurer, H., Saar, M. O., Wiemer, S., and Giardini, D.: Multi-disciplinary characterizations
615 of the BedrettoLab-A new underground geoscience research facility, *Solid Earth*, 13, 301–322, <https://doi.org/10.5194/se-13-301-2022>, 2022.
- Maurer, H. and Green, A. G.: Potential coordinate mislocations in crosshole tomography: Results from the Grimsel test site, Switzerland, *Tech. Rep. 6*, <http://pubs.geoscienceworld.org/geophysics/article-pdf/62/6/1696/3172949/1696.pdf>, 1997.
- Maurer, H. and Schwarz, M. L.: Data collection to: New insights on the fault structure of a geothermal testbed and the associated seismicity
620 based on active seismic tomography, *ETH Zurich Research Collection*, <https://doi.org/10.3929/ETHZ-B-000725491>, 2025.
- Maurer, H., Holliger, K., and Boerner, D. E.: Stochastic regularization: Smoothness or similarity?, *Geophysical Research Letters*, 25, 2889–2892, <https://doi.org/10.1029/98GL02183>, 1998.
- Mavko, G., Mukerji, T., and Dvorkin, J.: *The Rock Physics Handbook*, Cambridge University Press, 2nd edition edn., ISBN 9780521861366, <https://doi.org/10.1017/CBO9780511626753>, 2009.
- 625 Meier, M.: Geological characterisation of an underground research facility in the Bedretto tunnel, *ETH Zurich Research Collection*, <https://doi.org/10.3929/ethz-b-000334001>, 2017.
- Menke, W.: *Geophysical Data Analysis: Discrete Inverse Theory*, Elsevier, ISBN 9780124909205, <https://doi.org/10.1016/B978-0-12-490920-5.X5001-7>, 1984.
- Moser, T. J., Van Eck, T., and Nolet, G.: Hypocenter determination in strongly heterogeneous Earth models using the shortest path method,
630 *Journal of Geophysical Research*, 97, 6563–6572, <https://doi.org/10.1029/91JB03176>, 1992.
- Nakagome, O., Uchida, T., and Horikoshi, T.: Seismic reflection and VSP in the kakkonda geothermal field, japan: fractured reservoir characterization, *Geothermics*, 27, 535–552, [https://doi.org/10.1016/S0375-6505\(98\)00032-7](https://doi.org/10.1016/S0375-6505(98)00032-7), 1998.
- Nakata, N., Vasco, D. W., Shi, P., Bai, T., Lanza, F., Dyer, B., Chen, C., Park, S.-E., and Qiu, H.: Elastic Characterization at Utah FORGE: P-wave Tomography and VSP Subsurface Imaging, *Proceedings of the 48th Workshop on Geothermal Reservoir Engineering SGP-TR-224*,
635 *Stanford University, Stanford, California*, 2023.
- Nolet, G.: *Seismic Tomography*, Springer Netherlands, Dordrecht, ISBN 978-90-277-2583-7, <https://doi.org/10.1007/978-94-009-3899-1>, 1987.
- Obermann, A. and Hillers, G.: Seismic time-lapse interferometry across scales, in: *Advances in Geophysics*, vol. 60, pp. 65–143, Academic Press Inc., ISBN 9780128175484, <https://doi.org/10.1016/bs.agph.2019.06.001>, 2019.
- 640 Obermann, A., Wu, S. M., Ágústsdóttir, T., Duran, A., Diehl, T., Sánchez-Pastor, P., Kristjansdóttir, S., Hjörleifsdóttir, V., Wiemer, S., and Hersir, G. P.: Seismicity and 3-D body-wave velocity models across the Hengill geothermal area, SW Iceland, *Frontiers in Earth Science*, 10, <https://doi.org/10.3389/feart.2022.969836>, 2022.

- Obermann, A., Roskopf, M., Plenkers, K., Broeker, K., Rinaldi, A., Doonechaly, N., Gischig, V., Zappone, A., Amann, F., Cocco, M., Hertrich, M., Jalali, M., Junker, J., Kästli, P., Ma, X., Maurer, H., Meier, M.-A., Schwarz, M., Selvadurai, P., and Giardini, D.: Seismic response of hectometer-scale fracture systems to hydraulic stimulation in the Bedretto Underground laboratory, Switzerland, *Journal of Geophysical Research: Solid Earth*, <https://doi.org/10.1029/2024JB029836>, 2024.
- 645 Olasolo, P., Juárez, M., Morales, M., D´Amico, S., and Liarte, I.: Enhanced geothermal systems (EGS): A review, *Renewable and Sustainable Energy Reviews*, 56, 133–144, <https://doi.org/https://doi.org/10.1016/j.rser.2015.11.031>, 2016.
- Paige, C. C. and Saunders, M. A.: LSQR: An Algorithm for Sparse Linear Equations and Sparse Least Squares, *AMC Transaction on*
- 650 *Mathematical Software*, 8, 43–71, 1982.
- Paterson, M. S. and Wong, T.-f.: *Experimental Rock Deformation – The Brittle Field*, Springer-Verlag Berlin Heidelberg 2005, second edition edn., ISBN 978-3-540-24023-5, 2005.
- Place, J., Sausse, J., Marthelot, J. M., Diraison, M., Géraud, Y., and Naville, C.: 3-D mapping of permeable structures affecting a deep granite basement using isotropic 3C VSP data, *Geophysical Journal International*, 186, 245–263, [https://doi.org/10.1111/j.1365-](https://doi.org/10.1111/j.1365-246X.2011.05012.x)
- 655 *246X.2011.05012.x*, 2011.
- Plenkers, K., Manthei, G., and Kwiatak, G.: *Underground In-situ Acoustic Emission in Study of Rock Stability and Earthquake Physics*, in: *Springer Tracts in Civil Engineering*, pp. 403–476, Springer Science and Business Media Deutschland GmbH, [https://doi.org/10.1007/978-](https://doi.org/10.1007/978-3-030-67936-1_16)
- 3-030-67936-1_16, 2022.
- Podvin, P. and Lecomte, I.: Finite difference computation of traveltimes in very contrasted velocity models: a massively parallel approach and its associated tools, *Geophysical Journal International*, 105, 271–284, <https://doi.org/10.1111/j.1365-246X.1991.tb03461.x>, 1991.
- 660 Pratt, R. G. and Worthington, M. H.: The application of diffraction tomography to cross-hole seismic data, *Geophysics*, 53, 1284–1294, <https://doi.org/10.1190/1.1442406>, 1988.
- Rast, M., Galli, A., Ruh, J. B., Guillong, M., and Madonna, C.: Geology along the Bedretto tunnel: kinematic and geochronological constraints on the evolution of the Gotthard Massif (Central Alps), *Swiss Journal of Geosciences*, 115, [https://doi.org/10.1186/s00015-022-](https://doi.org/10.1186/s00015-022-00409-w)
- 665 *00409-w*, 2022.
- Rawlinson, N. and Spakman, W.: On the use of sensitivity tests in seismic tomography, *Geophysical Journal International*, 205, 1221–1243, <https://doi.org/10.1093/gji/ggw084>, 2016.
- Roskopf, M., Durand, V., Villiger, L., Doetsch, J., Obermann, A., and Krischer, L.: DUGseis: A Python package for real-time and post-processing of picoseismicity, *Journal of Open Source Software*, 9, 6768, <https://doi.org/10.21105/joss.06768>, 2024.
- 670 Roskopf, M., Durand, V., Plenkers, K., Villiger, L., Giardini, D., and Obermann, A.: Accuracy of Picoseismic Catalogs in Hectometer-Scale In Situ Experiments, *Seismological Research Letters*, 96, 3814–3836, <https://doi.org/10.1785/0220240399>, 2025.
- Salazar Vásquez, A. F., Selvadurai, P. A., Bianchi, P., Madonna, C., Germanovich, L. N., Puzrin, A. M., Wiemer, S., Giardini, D., and Rabaiotti, C.: Aseismic strain localization prior to failure and associated seismicity in crystalline rock, *Scientific Reports*, 14, <https://doi.org/10.1038/s41598-024-75942-9>, 2024.
- 675 Sergeev, S. A., Meier, M., and Steiger, R. H.: Improving the resolution of single-grain U/Pb dating by use of zircon extracted from feldspar: Application to the Variscan magmatic cycle in the central Alps, *Earth and Planetary Science Letters*, 134, 37–51, [https://doi.org/https://doi.org/10.1016/0012-821X\(95\)00105-L](https://doi.org/https://doi.org/10.1016/0012-821X(95)00105-L), 1995.
- Shakas, A.: *Borehole Logging Data from Characterization Boreholes in Bedretto Underground Lab for Geoenergies*, ETH Research Collection, <https://doi.org/https://doi.org/10.3929/ethz-b-000443521>, 2019.

- 680 Stanchits, S., Mayr, S., Shapiro, S., and Dresen, G.: Fracturing of porous rock induced by fluid injection, *Tectonophysics*, 503, 129–145, <https://doi.org/10.1016/j.tecto.2010.09.022>, 2011.
- Townend, J. and Zoback, M. D.: How faulting keeps the crust strong, *Geology*, 28, 399–402, [https://doi.org/https://doi.org/10.1130/0091-7613\(2000\)28<399:HFKTCS>2.0.CO;2](https://doi.org/https://doi.org/10.1130/0091-7613(2000)28<399:HFKTCS>2.0.CO;2), 2000.
- Williamson, P. R. and Worthington, M. H.: Resolution limits in ray tomography due to wave behavior: numerical experiments, *Geophysics*, 685 58, 727–735, <https://doi.org/10.1190/1.1443457>, 1993.
- Woodward, M. J.: Wave-equation tomography, *Geophysics*, 57, 15–26, <https://doi.org/10.1190/1.1443179>, 1992.
- Zang, A., Niemz, P., Specht, S. V., Zimmermann, G., Milkereit, C., Plenkers, K., and Klee, G.: Comprehensive data set of in situ hydraulic stimulation experiments for geothermal purposes at the Äspö Hard Rock Laboratory (Sweden), *Earth System Science Data*, 16, 295–310, <https://doi.org/10.5194/essd-16-295-2024>, 2024.
- 690 Zelt, C. A. and Barton, P. J.: Three-dimensional seismic refraction tomography: A comparison of two methods applied to data from the Faeroe Basin, *Journal of Geophysical Research: Solid Earth*, 103, 7187–7210, <https://doi.org/https://doi.org/10.1029/97JB03536>, 1998.