

# Safeguarding Cultural Heritage: Integrating laser scanning, InSAR, vibration monitoring and ve Analysis of rockfall/granular flow runout modelling at the and granulatar at the Mortuary Temple of Hatshepsut, Egypt.

5 Benjamin Jacobs<sup>1</sup>, Mohamed Ismael<sup>2,3</sup>, Mostafa Ezzy<sup>2,3</sup>, Markus Keuschnig<sup>4</sup>, Alexander Mendler<sup>5</sup>, Johanna Kieser<sup>1</sup>, Michael Krautblatter<sup>1</sup>, Christian U. Grosse<sup>5</sup>, Hany Helal<sup>2,3</sup>.

<sup>1</sup>Chair of Landslide Research, TUM School of Engineering and Design, Technical University of Munich, Munich, Germany

<sup>2</sup>Department of Mining, Petroleum, and Metallurgical Engineering, Faculty of Engineering, Cairo University, Giza, Egypt

<sup>3</sup>UNESCO Chair on Science and Technology for Cultural Heritage, Faculty of Engineering, Cairo University, Giza, Egypt

10 <sup>4</sup>GEORESEARCH Research Institute, Wals, Austria

<sup>5</sup>Chair of Non-destructive Testing, TUM School of Engineering and Design, Technical University of Munich, Munich, Germany

Correspondence to: Benjamin Jacobs (benjamin.jacobs@tum.de)

**Abstract.** The predictive capacity for rockfall has significantly increased in the last decades but—the complementary

15 combinations of observation methods accounting for the wide range of processes preparing and triggering rockfall are still challenging especially at sensitive sites like World Heritage monuments. In this study, we combine Terrestrial Laser Scanning (TLS), Interferometric Synthetic Aperture Radar (InSAR), ambient vibration analyses, and rockfall runout modelling at the The 3500 years old Mortuary Temple of Hatshepsut, with its unique architecture is a key Egypt World Cultural Heritage Site and among the best-preserved temples in Ancient Deir El Bahari (Luxor Theben, Egypt). The temple is exposed to a -100

20 m vertical, layered, Eocene Thebes Limestone vertical Miocene layered Thebian limestone cliff. Here, a major historic rock slope failure buried the neighbouring temple of Thutmose III and behind the temple frequent fragmental rockfalls occurs reurdeposits indicate recurrent activiThe neighbouring temple of Thutmose III in a similar geological setting was buried by a major historic rock slope failure originating from the 100 m vertical limestone cliff behind the Deir El Bahari temple complex.

25 The project “High-Energy Rockfall ImpacT Anticipation in a German Egyptian cooperation (HERITAGE)” aims to to use gravitational mass movement hazard analyses, Terrestrial Laser combine TLS and InSAR to constrain pre-failure deformation, and potential detachment scenarios Scanning (TLS) and Interferometric Synthetic Aperture Radar (InSAR) for deformation and topographic change analysis, ambient vibration analyses, and rockfall runout modelling for singular blocks and granular flows from rock tower collapses towards and integrative analysis. On basis of TLS and InSAR, we could measure volumes of small failures between 2022-23 and map potential detachment zones of interest for larger failures. Only the combination of

30 InSAR and TLS can unequivocally delineate rockfall active areas without the ambiguity of single techniques. Based on this we modelled the runout of small single block failures of the observed size spectra (0.01-25 m<sup>3</sup>) and constrained frictional parameters for large (i. e. >10<sup>3</sup> m<sup>3</sup>) granular flows from collapsing towers using historic larger failures. The applicability of

ambient vibration to detect preparing destabilisation of rock towers prior to deformation by frequency shifts is successfully tested. This study shows the potential of combining ~~of potential failures to systematically assess rockfall hazards. The non-invasive nature of our methods is crucial for~~ rockfall observation and modelling techniques for various magnitudes towards an integrative observation approach for safeguarding cultural heritage, as it allows for monitoring without physical contact with the site, preserving both the integrity and the safety of historically significant areas. This study is one of the first to transfer and integrate well-established monitoring techniques from mountainous areas ~~such as~~ Egyptian World Heritage Sites. HERITAGE is a cooperation between the Technical University of Munich (TUM) and Cairo University (CU) focusing on the analysis and assessment of the rock slope stability behind the archaeological heritage in Deir El Bahari. Here we show the remarkable potential of transferring established methods from mountainous regions to a world famous cultural heritage site. We demonstrate the capabilities of our integrated approach in a challenging hyper-arid climatic, geomorphological and archaeologically sensitive environment, and produce the first event and impact analysis of gravitational mass movements at the Temple of Hatshepsut, providing vital data ~~towards for~~ future risk assessments.

45

## 1. Introduction

Gravitational mass movements pose a threat to cultural heritage sites situated in steep terrain, but their long-term impact on ancient structures has received limited attention. The Mortuary Temple of Hatshepsut in Deir el-Bahari (Luxor, Egypt) is one of the most prominent archaeological monuments in the region and directly exposed to a ca. 100 m high, jointed limestone cliff. Historic records and archaeological evidence suggest that major slope failures have already impacted the site in the past. However, the current activity state of the rock wall and its hazard potential remain poorly constrained as previous research is limited to the neighbouring Valley of the Kings (Alcaíno-Olivares et al., 2019; Marija et al., 2022), is restrained to the geological past (Dupuis et al., 2011) or focusses more on general risk potential rather than active hazard process monitoring (Abdallah and Helal, 1990; Chudzik et al., 2022; Marija et al., 2022; Ezzy et al., 2025).

55 Over the past two decades, significant progress has been made in non-invasive geotechnical monitoring techniques that allow for detailed observation of unstable slopes without disturbing sensitive environments. This consideration is especially critical at sensitive World Heritage Sites, where conventional intrusive methods, such as anchors or crack meters, cannot be applied without risk of damaging the site. First, Terrestrial Laser Scanning (TLS) has emerged as a reliable method for high-resolution topographic change detection, especially in inaccessible or protected terrain (Abellán et al., 2014; Hartmeyer et al., 2020a; Shen et al., 2023). It enables precise quantification of surface deformation and erosion rates over time and has been successfully applied in Alpine environments to monitor rockfall activity and retreat rates (Strunden et al., 2015; Mohadjer et al., 2020; Draebing et al., 2022). TLS has also proven suitable for assessing rock tower stability in steep terrain (Santos Delgado et al., 2009; Matasci et al., 2018), a feature characteristic of the cliffs at Deir el-Bahari. Second, Interferometric Synthetic Aperture Radar (InSAR), particularly with data from Sentinel-1 satellites, complements TLS by providing displacement time series over

65 large areas with millimeter-scale precision (Intrieri et al., 2018; Carlà et al., 2019). Persistent Scatterer InSAR (PS-InSAR)  
techniques are especially valuable in hyper-arid regions where low vegetation and stable reflectors improve coherence and  
reliability. Applications of InSAR at heritage sites – such as in Petra (Margottini et al., 2017), Pisa (Solari et al., 2016) or  
Civita di Bagnoregio (Bianchini et al., 2025) – have demonstrated its potential for detecting slow ground deformations  
threatening historical structures. However, only a few studies have tested InSAR monitoring in desert settings with strong  
70 topographic gradients and complex micro-reliefs typical of archaeological sites. Third, ambient vibration monitoring has  
gained traction as a tool for detecting internal structural changes in potentially unstable rock formations before surface  
deformations become visible (Weber et al., 2018; Moore et al., 2019; Bessette-Kirton et al., 2022; Leinauer et al., 2024).  
Frequency and damping shifts can indicate progressive weakening, and recent developments in portable instrumentation make  
it feasible to deploy such systems at remote or sensitive sites. Nonetheless, real-world applications at archaeological locations  
75 are rare, and the influence of strong diurnal temperature cycles typical of desert climates on measurement quality remains  
insufficiently studied.

All three methods provide critical data on the cliff's current state of stability and constrain areas of interest (AOI) for further  
hazard analyses. Here, numerical runout modelling tools such as RAMMS::ROCKFALL and RAMMS::DEBRISFLOW are  
widely used in mountainous regions for hazard assessment and mitigation planning (e. g., Caviezel et al., 2019; Wendeler et  
80 al., 2017; Bolliger et al., 2024; Schraml et al., 2015). These models allow for the simulation of different failure types, including  
block falls and granular flows, and can incorporate digital terrain models derived from TLS or UAV surveys. Although  
RAMMS was initially designed for Alpine environments, its use in hyper-arid desert contexts with anthropogenic terrain  
alterations remains underexplored. This is particularly relevant when assessing risk to archaeological sites where terrain  
morphology (e. g., “silent witnesses” of historic slope failures) has been altered by excavation or conservation activities.

85 To date, only isolated studies have attempted to integrate these complementary methods into a unified monitoring strategy  
tailored to cultural heritage sites. Especially in hyper-arid desert environments like Deir el-Bahari, there is a need for a  
benchmark study that demonstrates the feasibility, limitations, and synergies of TLS, InSAR, vibration monitoring, and runout  
modelling. This paper responds to that gap.

In this study, we aim to (i) detect recent rockfall activity and pre-failure deformation using multi-temporal TLS and Sentinel-  
90 1 PS-InSAR, (ii) parameterize and simulate realistic runout scenarios for both individual block falls and larger granular flows  
based on historic events, and (iii) assess the applicability of ambient vibration monitoring for early warning at a World Heritage  
Site in a hyper-arid environment. By integrating these non-invasive methods, we (iv) aim to identify zones of elevated hazard  
potential and contribute to a transferable safeguarding strategy for sensitive archaeological sites.

95 ~~Gravitational mass movements can pose a significant threat to infrastructure and people worldwide. While their role on~~  
~~infrastructure in mountain regions worldwide has been emphasized in many publications, their long term impact on cultural~~  
~~heritage has been poorly addressed so far. Here we report the impact of rockfalls and rock slope failure over 3 millennia at the~~  
~~Mortuary Temple of Hatshepsut, a top level cultural heritage site, nestled at the base of the Theban Hills in Deir El Bahari,~~  
~~Luxor. The Temple of Hatshepsut, an engineering marvel from the fifteenth century BC dedicated to the worship of Amon and~~

Hathor, exhibits a unique architectural integration with Gebel Gurnah's rock mass, featuring ca. 100 m high, (sub-)vertical cliffs with prominent rock tower structures (Figure 1). Due to its priceless historic value the Temple of Hatshepsut is part of the UNESCO World Heritage Site of Ancient Thebes with its Necropolis (UNESCO World Heritage, 2025). Geological and geomorphological studies indicate historic gravitational collapses in the Deir El Bahari valley, with archaeological evidence of a significant rockfall in 1100–1080 B.C., attributed to an earthquake, which destroyed the temple of Thutmose III (Karakhanyan et al., 2010). Modern instances, such as the 1985 rockfall event near Temple of Hatshepsut (Abdallah and Helal, 1990), underscore the ongoing risk.

The Deir El Bahari cliffs demand a nuanced understanding to safeguard the temple and its visitors. Despite the historical importance of the site, research on the stability of the surrounding the Temple of Hatshepsut is limited to the neighbouring Valley of Kings (Alcaíno-Olivares et al., 2019; Marija et al., 2022), are restrained to the geological past (Dupuis et al., 2011) and focus more on general risk potential rather than active hazard process monitoring (Chudzik et al., 2022; Marija et al., 2022; Abdallah and Helal, 1990).

While remote techniques have boosted in the last decade in Alpine Environments, their applicability to delimit and anticipate rock instability in world heritage sites with different climatological and seismic conditions, and rock sequences with a significantly lower mechanical strength in comparison to Alpine rock walls, has not been tested. In a benchmark field study, we tested near vertical slopes with a combination of multi temporal terrestrial laser scanning (TLS) and satellite based interferometric synthetic aperture radar (InSAR), both non invasive measurement methods well suited for protected sites, to characterise rock wall geometry, potential volumes and deformations. Based on this and historical information, we used numerical runout modelling including historical scenarios. Ambient vibration measurements were applied to investigate their potential to detect internal weakening and deformations prior to the accuracy level of optical and radar measurements.

TLS offers rapid and accurate remote data acquisition for large and inaccessible areas, crucial for characterizing rock slopes and conducting 3D change detection (Abellán et al., 2014). The capabilities of TLS in terms of gravitational hazard monitoring and rockfall quantification have been extensively demonstrated in the past (Santos Delgado et al., 2009; Matasci et al., 2018; Hartmeyer et al., 2020a; Draebing et al., 2022; Strunden et al., 2015) therefore its application at this potential risk site is adequate.

InSAR has proven to be a powerful tool in geotechnical and geological studies, particularly for monitoring land deformation and assessing slope stability in challenging environments (Intrieri et al., 2018; Carlà et al., 2019). Its application extends to various cultural heritage sites, where traditional methods may be restricted due to the need to preserve sensitive structures. For instance, InSAR has been effectively used to detect subsidence and ground movement around ancient structures, such as the Leaning Tower of Pisa (Solari et al., 2016; Falco et al., 2022) and archaeological sites in Petra, Jordan (Margottini et al., 2017) highlighting its utility in identifying early warning signs of potential hazards. The non invasive nature of InSAR makes it especially valuable for safeguarding cultural heritage, as it allows for continuous, large scale monitoring without physical contact with the site, preserving both the integrity and the safety of historically significant areas.

By integrating InSAR data with TLS-based rockfall assessments, the study aims to correlate areas of high displacement rates with actual rockfall occurrences. This comparison enhances the understanding of slope deformation dynamics, supports comprehensive hazard assessments for the area and presents the basis for rockfall modelling at certain areas of interest.

135 We applied RAMMS::ROCKFALL to evaluate hazard potential of small scale cliff failures and calibrated friction parameters for RAMMS::DEBRISFLOW using historic, larger rock slope failures (e.g., the historic destruction of Thutmose III temple) that transitioned into granular flows as a reference.

Ambient vibration analyses have proven to be great assets for evaluating the development of preparing rock slope instabilities in alpine settings before eventual failure (Weber et al., 2018; Leinauer et al., 2024). For this reason, we integrated this 140 promising technique in our approach and tested its applicability and data quality at this well frequented heritage site.

This study is one of the first to transfer well established methods from other mountainous regions into an integrated, non-invasive safeguarding approach for highly prestigious cultural heritage. Similar to the work in e.g., Petra, Jordan (Cesaro et al., 2017; Margottini et al., 2017), we do not aim to push for technological advances rather than presenting a proof of concept of our approach in a challenging climatic, geomorphological and archaeologically sensitive environment. This 145 multidisciplinary approach, integrating geological, archaeological and engineering perspectives, contributes to a comprehensive understanding of rockfall dynamics in the Theban Hills.

This paper tries to answer three questions: (i) How effectively can established non-destructive / non-invasive monitoring techniques be integrated and transferred to priceless world heritage sites in challenging desert environments? (ii) To what extent can initial deformations in relatively young and not strongly cemented rocks be observed by LiDAR and InSAR? (iii) 150 Can we derive potential runout scenarios and calibrate them with historical events, especially for fragmentation?

## 2. Study site

### 2.1. Temples of Deir El-Bahari

The Dier El-Bahari Valley is situated in the West Bank 5 km from the Nile River in the Theban Mountains opposite Luxor city. Apart from Deir El-Bahari the area features some of the most renowned cultural heritage sites of Egypt, such as the Valley 155 of the Kings, Sheikh 'Abd El-Qurna or Dra Abu El-Naga. The complex of tombs and mortuary temples known as the Temples of Deir El-Bahari are dedicated to the many New Kingdom pharaohs over time. The Mortuary Temple of Hatshepsut, built in the 15th century BCE during the New Kingdom, is the main temple in this complex. It is a unique and well-preserved structure that stands out for its architectural innovation and design. Designed by architect Senenmut, it features terraced levels, colonnades, and statues, dedicated to the sun god Amun-Ra, honouring Queen Hatshepsut's divine birth and pharaonic achievements (Ćwiek, 2014).

Adjacent to Hatshepsut's temple, the Middle Kingdom's Temple of Mentuhotep II adds to the site's historical significance. The Temple of Thutmose III, wedged between the Temples of Hatshepsut and Mentuhotep II and carved partly into the rock, represents the New Kingdom era (Ćwiek, 2014).

Deir El-Bahari's cliffs boast tombs and chapels dedicated to various individuals, providing insight into the societal structure of ancient Egypt. This site is a testament to the cultural and artistic achievements of this civilization, encapsulating its historical depth and architectural prowess.

165

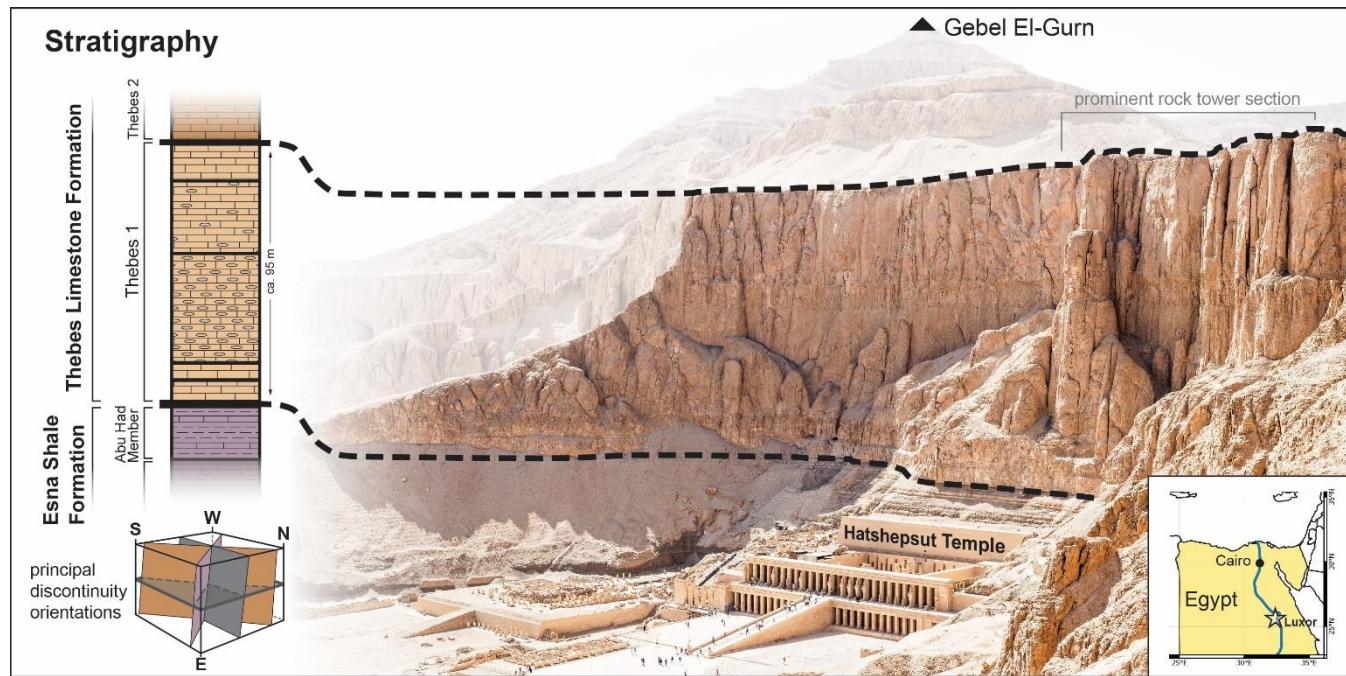


Figure 1: Topographic and geological setting of the Mortuary Temple of Hatshepsut within Deir el-Bahari (view towards west). In terms of geo-mechanics, the relatively many brittle Thebes Limestone on thinly-layered Esna Shales geological setup (Dupuis et al., 2011) can be reduced to represent a typical brittle on ductile “hard on soft brittle on weak” structure.

170

## 2.2. Geology

The terrain morphology of the study area resembles a Roman theatre-type shape, opening to the SE featuring a width of ca. 200 m and relief of ca. 140 m (Figure 1). Fluvial erosion and gravitational rock mass wasting processes, such as rockfalls or slides, were the main causes of the Valley's development in terms of morphology (Abdallah and Helal, 1990). Sub-Almost horizontally bedded rock members of Thebes Limestone Formation and Esna Shale Formation compose the cliffs of Deir El-Bahari (Said, 2017). The Esna shale Formation is a heterogeneous succession of shales that is usually subdivided into four members (Abu Had, El-Mahmiya, Dababiya Quarry and El Hanadi member) with a total thickness of > 60 m (Aubry et al., 2016). The top Abu Had Member, which is composed of an alternation of marl and limestone beds with a few clayey intervals, is increasingly carbonate-rich and has a sharp stratigraphic contact with the hanging overlying Thebes Limestone Formation at the base of the cliff at Deir El-Bahari (Aubry et al., 2009). The Thebes Limestone Formation is described in detail by (King et al., 2017), who subdivides the Formation into five depositional sequences (Thebes 1-5) forming five typical cliffs in Thebes mountains (Figure 1), greyed out towards Gebel El-Gurn). Thebes 1, the lowermost unit with a thickness of ca. 90 m, forms the main rock face of the cliff at Deir El-Bahari, and is composed of thinly laminated pinkish marl, nodular

micritic limestone and thinly bedded argillaceous limestones (Figure 1Figure 1). ~~A~~ Further stratigraphic subdivision is possible but not relevant for this study. Structurally, the lower Thebes Formation is a relatively soft and noticeably fractured limestone (Klemm and Klemm, 1993). In terms of geo-mechanics, the relatively many-layered geological setup (Dupuis et al., 2011) can be reduced to a typical ~~brittle on ductile~~ "hard on soft" ~~brittle on weak~~ structure (Erismann and Abele, 2001), *i. e. a mechanically unstable configuration in which a competent, brittle rock mass overlies a weaker, ductile substrate, promoting differential deformation and shear localization that predispose the slope to failure.*

Understanding and assessing the stability of the cliff above Deir El-Bahari requires an understanding of the ~~structural~~ geological ~~structural~~ framework as a crucial first step. Pawlikowski and Wasilewski (2004) ~~mention two~~ ~~state that main structural features that affect the region are~~ faults and fissures ~~are the two main structural features that affect the region~~. Reactivation of most of these faults and fissures is attributed ~~to~~ the Red Sea and Nile Valley tectonics during the Oligocene and Miocene. These tectonic activities have resulted in the normal (tensional) faults in Deir El-Bahri area, and the system of vertical fissures relates to them. The Thebes Limestone Formation is further dissected into several distinct rock towers (Figure 1Figure 1) by vertical joints with dip angles ranging from 85° to 90°, striking N-S, E-W, NE-SW, and NW-SE (Hesthammer and Fossen, 1999; Pawlikowski and Wasilewski, 2004; Beshr et al., 2021). ~~A recent study by Ezzy et al. (2025) validates these joint trends by extracting discontinuities from our TLS data and provides further structural context. The geological setting constrains two general failure types that have either occurred in the past or postulated in the literature: (i) Single, locally constrained rockfalls ranging from ca. 0.01 to 25 m<sup>3</sup> and (ii) the failure and collapse of larger magnitudes, such as one of the distinct rock towers (Figure 1). Evidence of small rockfalls (< 0.15 m<sup>3</sup>) is shown in our multi-temporal TLS data and larger single events are documented by Abdallah and Helal (1990). The potential failure of a rock tower has been already postulated in the literature (Chudzik et al., 2022) and is obvious in historic photographs (Naville, 1894, 1907, 1913). Due to the in situ fragmentation of the heavily jointed rock mass and internal shear stress during the failure process, we expect the failing material to transition into a granular flow type behaviour, sometimes referred to as dry flow (Hung et al., 2014).~~

### 205 2.3. Historic evidence of landslide activity

The geological and geomorphological characteristics of the cliffs of Deir El-Bahari valley indicate a long history of gravitational mass movement. According to the archaeological evidence, the temple of Thutmose III, neighbouring the Temple of Hatshepsut in Deir El-Bahari, was destroyed and ~~superimposed~~ ~~covered~~ by a major rock wall collapse (Lipinska, 1977; Arnold, 1996) which can be attributed to an earthquake around 1100–1080 B.C. (Karakhanyan et al., 2010).

210 Badawy et al. (2006) stated that six major earthquakes occurred in Middle Egypt during historical times, nearly destroying the Ramses III temple in Luxor on the west bank of the River Nile. ~~–~~ Abdallah and Helal (1990) (Abdallah and Helal, 1990) documented two rockfall events close to the Temple of Hatshepsut, one of which (ca. 20 m<sup>3</sup>) reached the upper court of the Temple of Hatshepsut in 1985. They emphasized the potential for rockfall events from the cliff and demonstrated the rock wall's susceptibility for failure at Deir El-Bahari.

215 Historical imagery from archaeological digs dating from the late 1890s over the 1930s to the 1970s show several  
geomorphological features, that could be attributed to gravitational mass movements (Naville, 1894; Winlock, 1942; Lipinska,  
1977). However, major terrain alterations during these excavation campaigns induce extensive bias regarding  
geomorphological analyses. This is especially the case for the temple of Thutmose III which was only discovered in the 1960s  
and used as a sediment dump during other digs (Lipińska, 2007). We therefore only relied on the earliest image by Naville  
220 (1894) of the site from 1892 before the excavation (Figure 5) (Naville, 1894) to identify evidence of two probable historic  
gravitational mass movements (Sect. 3.3.2).

## 2.4. Definition of potential failure mechanisms

Judging from our review of literature, historic imagery and expert knowledge, we hypothesize two general potential failure types: (i) Single, locally constrained rockfalls ranging from ca. 0.01 to 25 m<sup>3</sup> and (ii) the failure and collapse of larger magnitudes, such as one of the distinct rock towers (Figure 1). Evidence of small rockfalls (< 0.15 m<sup>3</sup>) is shown in our multi-temporal TLS data and larger single events are documented by Abdallah and Helal (1990). The potential failure of a rock tower has been already postulated in the literature (Chudzik et al., 2022) and is obvious in historic photographs (Naville, 1894, 1907, 1913). Due to the in situ fragmentation of the heavily jointed rock mass and internal shear stress during the failure process, we expect the failing material to transition into a granular flow type behaviour, sometimes referred to as dry flow (Hungr et al., 230 2014).

## 3. Methods

### 3.1. Terrestrial Laser Scanning

TLS operates by measuring the time of flight or phase shift of the reflected laser signal, emitted from a ground-based instrument, to generate high-resolution, three-dimensional point clouds of surface geometry. In geosciences, TLS is widely applied for precise topographic mapping, monitoring geomorphic changes, and quantifying processes such as erosion, landslides, and rockfall dynamics (Jaboyedoff et al., 2012; Abellán et al., 2014; Shen et al., 2023). Various previous studies have shown the capabilities of TLS for rockfall monitoring (Abellán et al., 2010; Li et al., 2019; Kromer et al., 2017a; Hartmeyer et al., 2020b), kinematic landslide analyses (Santos Delgado et al., 2009; Kenner et al., 2022) and risk mitigation strategies (Gigli et al., 2014; Matasci et al., 2018) in particular. Recent developments also showcase its potential for early warning systems (Kromer et al., 2017b; Winiwarter et al., 2023).

We deployed a Riegl VZ-400 terrestrial laser scanner to obtain multi-temporal high resolution topographic data and to perform a rock surface change detection. In late February 2022 TLS data was gathered at six locations around the Temple of Hatshepsut. In early March 2023, we repeated the scans at the previous positions and added ten additional scan positions to increase data coverage on top of the Deir El-Bahari cliff (Figure 2). We used RiScan Pro for all raw data processing (filters, registration (Multi Station Adjustment SA), geo-referencing). The data sets of both scan epochs were each merged, homogenized and

trimmed to single 3D point clouds of Hatshepsut's Temple and the cliff behind. To generate a detailed digital surface model (DSM), the point cloud of 03/2023 was manually edited in the open-source software CloudCompare to exclude tourists and optimize geomorphometric accuracy in the inner temple area (occluded flooring, roof structures and pillars) before the final 2.5 D rasterization. We applied linear interpolation for small, inevitable data gaps. We used the standard Multiscale Model to 250 Model Cloud Comparison (M3C2) algorithm by Lague et al. (2013) to perform a ~~straightforward~~ topographic change detection, which we limited to the rock face, scree slopes and ~~retention-retaining~~ wall behind the temples of Deir El-Bahari. M3C2 is a well-established method for straightforward 3D change detection. It compares raw 3D point clouds and avoids gridding artifacts, interpolation errors and loss of detail in rough or vertical terrain. For the visualization of our ~~data~~data, we worked with Cloud Compare and QGIS.

255 **3.2. Interferometric Synthetic Aperture Radar**

In landslide research, satellite-based InSAR is used to measure minute ground-surface displacements over time by detecting phase differences between repeated radar images, enabling early detection and monitoring of slope deformation at millimetre-scale precision (Ferretti et al., 2001; Colesanti and Wasowski, 2006; Spreafico et al., 2015; Dehls et al., 2025).

260 To analyse ground deformation in the vicinity of the Temple of Hatshepsut, a combined SBAS (Small Baseline Subset) and PSInSAR (Persistent Scatterer Interferometry) time series processing was carried out. The analysis was performed using the Python-based open-source software InSAR.dev (formerly PyGMTSAR Professional) (Pechnikov, 2024) within a cloud-based Google Colab environment. A total of 93 Sentinel-1 IW SLC scenes in VV polarization from the ascending orbit (January 2021 – February 2024) were processed. The acquisition on 6 April 2022 was used as the reference scene.

265 All scenes were automatically pre-processed using precise orbit data and the global Copernicus DEM (30 m). After co-registration and reframing to the area of interest, geocoding was performed. To enhance data quality, the pixel stability function (PSFunction) was computed to suppress incoherent areas. Interferograms were generated using conservative thresholds (baseline < 150 m, temporal separation < 50 days) to minimize atmospheric effects and geometric decorrelation. Phase unwrapping was performed using SNAPHU (Chen and Zebker, 2002), followed by correction of trend and turbulence components through multiple regression models.

270 The resulting SBAS time series were converted into Line-of-Sight (LOS) deformation and decomposed using Seasonal-Trend decomposition using LOESS (Cleveland, 1990). Subsequently, a high-resolution PSInSAR analysis was performed, in which the trend- and turbulence-corrected SBAS components were integrated into the PS phase. Only coherent pixels with an interferogram correlation greater than 0.5 were retained to exclude noisy time series and minimize atmospheric disturbances.

275 This study employs Interferometric Synthetic Aperture Radar (InSAR) data from Sentinel 1 satellites to monitor ground displacements at the Mortuary Temple of Hatshepsut. The Area of Interest (AOI) was covered exclusively by the only available ascending (ASC) geometry, which aligns well with the site's topography, reducing layover and foreshortening effects, and is well suited for observing mass movement processes on the east exposed slopes.

The InSAR analysis was based on a time series of Sentinel-1 ASC data collected between January 5, 2021, and February 19, 2024. A total of 93 radar datasets were processed using the Persistent Scatterer InSAR (PS InSAR) algorithm implemented in PYGMENTSAR (Pechnikov, 2024). This approach identifies stable radar targets, known as persistent scatterers, to detect displacements along the Line of Sight (LOS) with high precision.

The primary objective of the InSAR analysis is to identify areas with higher yearly displacement rates and compare them with areas of documented rockfall activity assessed using TLS. We analysed the spatial distribution of yearly displacement rates to highlight recent changes in ground stability, making it easier to identify active zones. This approach provides more timely insights for assessing rockfall risks compared to cumulative displacement maps, which only show total movement without reflecting current activity levels.

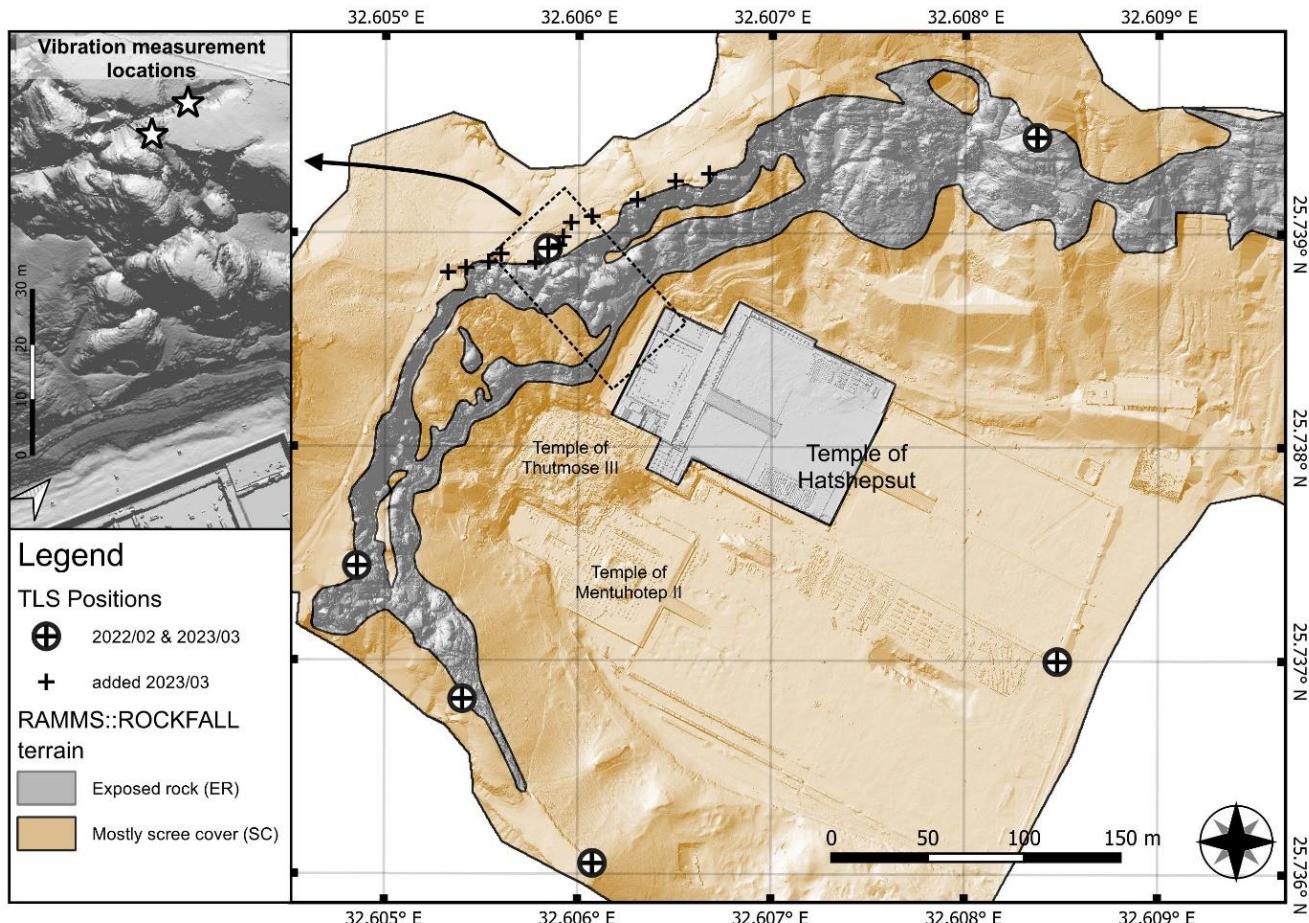


Figure 2: Locations Map of the Deir EL-Bahari with the Hatshepsut mortuary temple including of repeated TLS Scan Positions, vibration measurements, and spatial extent of terrain for RAMMS::ROCKFALL simulations.

### 3.3. Runout Modelling

In this study we used the RAMMS-Software suite (RApid Mass Movement) to simulate runout scenarios for the two main failure mechanisms ~~hypothesized for the rock wall at the Deir EL-Bahari cliff~~ (Sect. 2.2.4) to produce a first ~~evidence-based~~ benchmark towards a comprehensive risk analysis. We used RAMMS::ROCKFALL for the simulation of single, locally constrained rockfalls ranging from ca. 0.01 to 25 m<sup>3</sup> and RAMMS::DEBRISFLOW for granular flow parameterization of two probable historic, larger collapsed rock towers. As our monitoring data does not show any imminent larger rock wall failure, the granular flow simulation retained in a parameterization stage, focused on historic events. We used the RAMMS-software suite as it allows a comprehensive and intuitive modelling approach and straightforward parameterization.

#### 3.3.1. Rockfall simulation

RAMMS::ROCKFALL is a numerical simulation tool that models rockfall trajectories, velocities, and impact forces using non-smooth rigid body mechanics coupled with hard contact laws. It integrates digital elevation models and material properties to assess hazard zones, optimize mitigation strategies, and support risk analysis in complex terrain (Caviezel et al., 2019). ~~The rockfall module of RAMMS has been developed and widely tested in alpine, mid-latitude environments~~ (Caviezel et al., 2021; Wendeler et al., 2017; Sala et al., 2019; Sellmeier and Thuro, 2017; Noël et al., 2023). ~~Recently its application has been further adopted, also for more arid sites, such as southern Italy~~ (Massaro et al., 2024) ~~or Turkey~~ (Utlu et al., 2023). ~~Marija et al. (2022) were the first to apply rockfall simulation software (Conefall and Rockyfor3D) to Egyptian heritage sites in the Valley of the Kings.~~ Ezzy et al. (2025) present a first attempt to simulate single rockfalls at the Temple of Hatshepsut. However, theoretical release areas were solely constrained by the geotechnical setting, which, given the intense jointing and structural preconditioning of the entire rock mass, could be interpreted as somewhat arbitrary. This work proposes an advancement of the simulation setup by (i) looking at areas showing actual activity and (i) reducing complexity of parameters, providing a straightforward tool for conservative rockfall runout estimations.

We set up RAMMS::ROCKFALL models for three potential release areas, that we identified from the TLS and InSAR integration (Figure 3), which we labelled A\_01, base of the Thebes Formation behind the Temple of Hatshepsut, A\_02, rock tower above the Temple of Hatshepsut, and A\_03, rock face at western Deir El-Bahari. For each release area we created four rockfall scenarios referring to the released block sizes of 0.01, 0.1, 1 and 25 m<sup>3</sup>. ~~Here, 0.01 m<sup>3</sup> corresponds to the five distinct rockfalls in our 1 one-year TLS data, and 25 m<sup>3</sup> to the largest single rockfall reported for the last century~~ (Abdallah and Helal, 1990) ~~as well as larger distinct blocks in the cliff (S1, S2)~~. We attributed these magnitudes to theoretical return periods (frequency) of 5, 1, 0.05 and 0.01 a<sup>-1</sup>, respectively. This magnitude frequency relation corresponds roughly to a power law ( $F(V) = 1.2V^{-0.82}$ ), which fits well in the range of other rockfall studies (Graber and Santi, 2022).

Key parameters for rockfall dynamics are rock shape, size and the terrain parameters (Caviezel et al., 2019; Caviezel et al., 2021). To obtain applicable rock shapes we gauged (i) the general shape of the occurred rockfalls in the TLS change detection

and (ii) multiple larger blocks in or at the base of the cliff using our 3D point cloud (S1, S2). This resulted in rock aspect ratios of ca. 1 / 0.6 / 0.5 which refers to a “long” rock shape with rounded edges in RAMMS’ Rock Builder. We estimated terrain parameters according to RAMMS AG (2024b) and chose “hard” for the scree slopes and “extra hard” for all solid rock surfaces (cliff and temple floor, Figure 2). As suggested, we increased the ground dampening of the scree slopes slightly for the largest rock volumes (RAMMS AG, 2024b). With these rather high terrain categories we aim to produce a conservative ~~first~~ estimate of potential runout lengths, [as higher damping can potentially result in critically underestimated runout lengths](#). We used a 0.5 m grid resolution, and 20 random start orientations at every sixth grid point for all simulations. Please refer to S3 for a full list of parameters.

### 330 3.3.2. Granular flow simulation

As stated in [1.1](#)[2](#)[4](#), we expect a potentially failing and collapsing rock tower to transition into a granular flow type behaviour. To determine suitable parameters for potential granular flow events at the Temple of Hatshepsut, we calibrated two RAMMS::DEBRISFLOW scenarios. The model is based on the shallow water equations with a two-parameter rheology that accounts for both frictional and viscous flow properties (dry-Coulomb type friction  $\mu$  and viscous-turbulent friction  $\xi$ ). [These friction parameter are the key control of model outcomes and therefor require proper calibration](#) (Christen et al., 2012; Bartelt et al., 2015). [Then, the model](#) ~~is~~ allows users to predict flow paths, velocities, impact forces, and deposition patterns using high-resolution digital elevation models (DEMs) (RAMMS AG, 2024a). [The RAMMS::DEBRISFLOW is widely applied in hazard assessment, risk management, and mitigation planning for debris flow-prone areas](#) (Graf et al., 2019; Kumar et al., 2024). [For example, Bertoldi et al. \(2012\)](#) [Schraml et al. \(2015\)](#) [Frank et al. \(2017\)](#), [or Zimmermann et al. \(2020\)](#) [simulated runout patterns for debris flow hazard mapping and provide valuable reconstruction approach for alpine debris flows](#). Other studies [have applied RAMMS::DEBRISFLOW to enhance our process understanding, e. g., constrain parameter spaces and the effect of grain size and flow composition](#) (Bolliger et al., 2024), [or study controls of debris flow erosion](#) (Dietrich and Krautblatter, 2019). [Apart from its dedicated field \(i. e. debris flows\), RAMMS has also been used to simulate and evaluate runout dynamics of rock\(-ice\) avalanches](#) (Allen et al., 2009; Pedrini et al., 2022) [or rock avalanches on glaciers](#) (Engen et al., 2024). [Comparing those studies regarding the range of applied friction parameters, we found a stark increase in Coulomb type friction  \$\mu\$  with decreasing water content in the moving mass \(mean ca. 0.01-0.15 for debris flows up to 0.35 in rock\(-ice\) avalanches\)](#). We therefore expect high  $\mu$ -values for the dry granular flows resulting from collapsed and channelized rock tower debris at Deir El-Bahari. [Applications of RAMMS::DEBRISFLOW in completely dry environments are very rare or even carried out on different planets, such as Mars](#) (Haas et al., 2019).

350 The oldest available photograph of the Temple of Hatshepsut from 1892 (Naville, 1894), shows two likely granular flow deposits of collapsed rock towers: Event A (ca. 5000 m<sup>3</sup> or 100 m<sup>2</sup>\*50 m height) behind the temple of Thutmose III and event B (ca. 2600 m<sup>3</sup> or 52 m<sup>2</sup>\*50 m) north of the Temple of Hatshepsut ([Figure 5a](#)). [To better constrain the volume of the failures we set out to reconstruct the deposition geometry with terrestrial and aerial photogrammetry and monoplotting. However, due to the intense and repeatedly anthropogenic terrain alterations and limited number of usable historic photographs, this approach](#)

355 lead to little to no success. We therefore estimated release volumes from historic imagery, the 3D point cloud and simple geometric and morphometric assumptions of geomorphological features (S4) and archaeological reports of cliff cleaning missions (Zachert, 2014a, 2014b, 2014c). As these missions removed most of the scree on the slope area of event A, we assume to have obtained pre-failure slope coverage in our laser scans. To achieve the same for event B, the recent talus cone north of the Temple of Hatshepsut was removed and interpolated in the DSM. Start locations for events A and B were determined by  
360 a GIS-based flow path analysis and geomorphological study of the rock wall. For simplicity, we assume that for both model scenarios all material identified as possible historic rock slope failure was released at once using a five second hydrograph and an initial velocity of 15 m/s in the down slope direction. The initial velocity was estimated with a mean maximal vertical velocity of the collapsing mass of 20 m/s and coefficient of restitution considerations presented by Jackson et al. (2010). We  
365 iteratively We calibrated the granular flow models for events A and B by varying both friction parameters between  $0.4 < \mu < 0.8$  and  $1500 < \xi < 5000 \text{ m/s}^2$  and visually comparing the model results to the respective post-failure geomorphology (height and run-out pattern of deposits). Please refer to S5 and S9 for a full list of parameters.

### 3.4. Vibration measurements

Ambient vibration monitoring in geosciences, especially for landslide precursor analysis, is used to detect subtle changes in a slope's natural resonance frequencies and damping characteristics, which can reveal evolving internal damage, crack formation, or progressive destabilization before visible movement occurs (Weber et al., 2018; Moore et al., 2019; Bessette-Kirton et al., 2022; Leinauer et al., 2024).

In the scope of preliminary field tests, seismic measurements are recorded to determine which vibrational quantities are suitable precursors for sudden or gradual material changes in the rock needles behind the Temple of Hatshepsut. The considered methods include horizontal-to-vertical spectral ratios (HVSR), standard spectral ratios based on ambient noise (SSR), and the stochastic subspace identification (SSI). One sensor is placed at the top of the rock needleneedle, and another is located in the gap between the rock needle and the plateau (Figure 2Fig. 2).

The horizontal to vertical spectral ratio (HVSR) is a common tool to analyse the amplification of ground motions on site based on a single tri-axial sensor (Nakamura, 1989). Resonance frequencies can be extracted from HVSR curves as the x-value of predominant peaks (Figure 6). The standard spectral ratio (SSR) is another concept to describe the site amplification. It is defined as the earthquake spectrum of a reference site in comparison to the examined site. Therefore, SSR requires at least two uni-axial sensors, where one of them must be located on bedrock. A SSR beyond one describes the site amplification, and the peaks represent resonance frequencies. The stochastic subspace identification (SSI) is an appropriate method to determine modal parameters of a structure (van Overschee and Moor, 1995). SSI can be performed based on a single measurement channel. The method yields the natural frequency  $f_i$  and damping ratio  $\zeta_i$  of each mode of vibration  $i$ . The algorithm requires the number of modes  $m$  to be set as a user input. Since this value is unknown a priori, the computation is repeated for a user-defined range of modes, and the model order of each solution is plotted against the frequencies in so-called stabilization diagrams (section 4.5), see (Figure 6). Every method has a unique selling point. The SSI method is the only method that yields

(undamped) natural frequencies  $f_i$  and damping ratios in percent critical damping  $\zeta_i$ . It is also the only method that does not depend on the user-defined frequency resolution. Although not shown here, SSI can also be used to estimate mode shapes. 390 Modes shapes characterize the deflection pattern and the directivity of each mode of vibration, giving deeper insights into the most likely stress accumulations and failure scenarios. HVSR and SSR, on the other hand, give information on the spectral site amplification of ground motions. A detailed technical description of the data analysis is provided by Mendler et al. (2024). All three methods yield resonance frequencies of the soil underground and this paper sets out to test and compare their effectiveness and robustness for exposed rock needles, such as the one behind the Hatshepsut temple. We used a Trillium 395 Compact 120 s seismometer on March 6<sup>th</sup>, 2023 (09:37 to 23:43) with a sampling rate of 200 Hz.

## 4. Results

### 4.1. Terrestrial Laser Scanning

The finished point clouds of our TLS campaigns show an almost full coverage of the Deir El-Bahari area, including temples, the cliff and the geometry of the most prominent rock pillars behind the Temple of Hatshepsut, including fissures running 400 behind them. Both point cloud models have X, Y, and Z dimension of ca. 1000\*650\*200 m, contain ca. 85 Mio. points with a point-to-point distance of 0.05 m. The registration error for the first epoch (02/2022) was just over 0.01 m (standard deviation of residuals) whereas it was ca. 0.03 m for the second epoch (03/2023). The data of the latter was rasterized to DSMs with raster sizes of 0.1, 0.5 and 1 m for the purpose of runout modelling and data visualization.

Figure 3Figure 3a shows the results of the surface change detection. For better visual accessibility, we subsampled the change 405 detection to a point spacing of 0.25 m and 100 significantly changed points (from M3C2 analysis) in a radius of 1 m. The original change detection is shown in Figure 3Figure 3a (right side). Generally, the data does not reveal extensive rock face deformation above the level of detection (LoD) of 0.03 m. Hence, no larger imminent mass movements were detected. At the base of the Thebes Formation five distinct small rockfalls source areas with magnitudes from 0.05 to 0.15 m<sup>3</sup> occurred behind the Temple of Hatshepsut between the scan epochs, where one event most likely occurred as three smaller rockfalls. The 410 deposits of these rockfalls are also detectable and are situated either outside the temple area or behind the retaining wall protecting the temple (Figure 3Figure 3a, right side). For an area of ca. 6,5 ha of exposed rock wall (S6), we calculated a total volume of five total distinct rockfalls volume of 0.5989 m<sup>3</sup>  $\pm$  0.05 m<sup>3</sup> (S1), which translates to a rock wall retreat rate of ca. -0.009  $\pm$  0.001 mm/a. Minor sediment redistribution, recognizable by typical erosion and deposition patterns, is mostly restricted to the scree slopes, small gullies, and an area around a rock tower and its base north of the Temple of Hatshepsut. 415 The data also show enhanced terrain alteration at an ongoing archaeological dig site behind the temples of Thutmose III and Mentuhotep II, neighbouring the Temple of Hatshepsut. These data are not shown in this study, but their location is disclosed in Figure 3Figure 3b.

## 4.2. Interferometric Synthetic Aperture Radar

All available satellite tracks from the Sentinel-1 (SNT) mission were processed to generate a comprehensive InSAR dataset.

420 The temporal distribution of the acquisitions is shown in Table 1 and S7. Over the full observation period, more than 19,000 measurement points were identified in one km<sup>2</sup>, with an average standard deviation of 2.7 mm/a for the estimated displacement velocities (Table 1).

425

**Table 1: Used InSAR datasets, number of measurement points (MP), MP density and standard deviation of the analysed InSAR data sets.**

| Satellite | Geometry | Satellite track | Look dir. $\varphi$ [° N] | Incidence angle $\beta$ [°] | # Images | Acquisition period    | MP [#] | Ø St. Dev. [mm/a] |
|-----------|----------|-----------------|---------------------------|-----------------------------|----------|-----------------------|--------|-------------------|
| SNT       | ASC      | T58             | 80                        | 40                          | 88       | 05.01.2022-19.02.2024 | 19,419 | 2,7               |

The processed InSAR data reveal deformation velocities of up to 30 mm/a in the immediate vicinity of the temple complexes

430 (Figure 3.b). Due to the C-band wavelength of Sentinel-1 and the applied processing method, each measurement point integrates surface motion over an area of approximately 60 m<sup>2</sup> (pixel resolution: 4 × 15 m). By integrating three years of satellite data and applying time series curve fitting, line-of-sight (LOS) velocities were derived for each persistent scatterer.

Based on the statistical characteristics of the dataset, velocities exceeding  $\pm 5$  mm/a, [approximately corresponding to double the standard deviation](#), are considered significant (see Table 1). To contextualize the spatial patterns, the study area was

435 subdivided into exposed rock (i.e., the cliff) and adjacent scree deposits. The analysis yields four key observations:

(i) Widespread stability – The majority of the terrain, including most parts of the rock face surrounding the temples, does not exhibit significant displacement.

(ii) Localized rock face activity – Significant velocities within the cliff area are restricted to small zones, specifically, at the base of the cliff, a rock tower north of the Temple of Hatshepsut, and a slope area west of the

Temple of Mentuhotep II (S8). (iii) Data gaps – Central parts of the site show sparse or missing data, mainly due to radar

440 shadowing from steep terrain or phase decorrelation, potentially linked to archaeological excavations.

(iv) Activity in scree deposits – The most pronounced and spatially extensive deformation is observed in the scree southeast of the Temple of


Mentuhotep II, suggesting increased susceptibility to surface movement in these unconsolidated materials.

## 4.3. Identification of areas of interest

The combination of TLS and InSAR analyses allow for joint interpretation and the definition of [areas of interest \(AOI\)](#). In the

445 area behind the Temple of Hatshepsut both the TLS and InSAR measurements result in similar patterns: several small rockfalls,

scree redistribution and areas with statistically significant InSAR velocities are evident at the base of the cliff. Furthermore, there are patches of negative surface changes just above the LoD (0.03 m) around and below a distinct rock tower north of the temple, and statistically significant ground movement towards the radar sensor are in the same spot. These two regions of potential rockfall activity are defined as release areas A 01 (base of the cliff) and A 02 (rock tower) for the rockfall runout activity. We further suggest that, based on our results, the area behind the Temple of Hatshepsut has an increased monitoring demand ([Figure 3](#)[Figure 3c](#)). The same is true for a patch of rock wall in the western part of Deir El-Bahari, defined as rockfall release area A 03 ([Figure 3](#)[Figure 3c](#), left; Figure ). Here, the InSAR results show statistically significant ground movement that is below the TLS threshold.

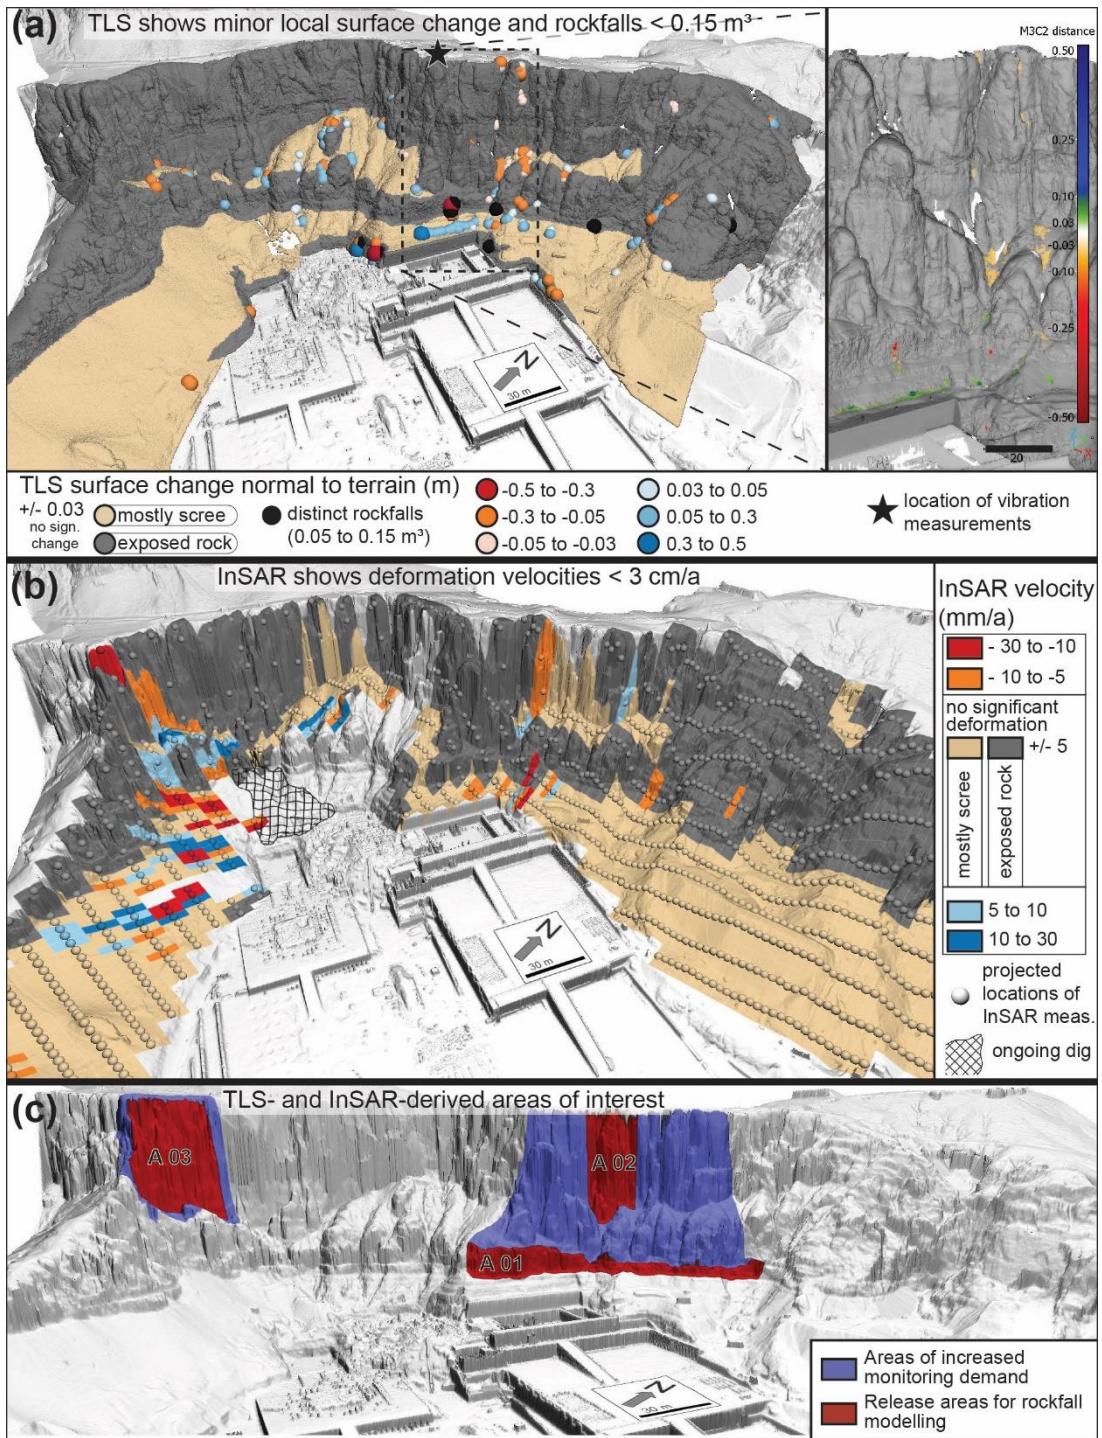


455 Figure 3: a) TLS change detection 2022/02 – 2023/03 of the Deir EL-Bahari. Significantly changed areas – appear in the detailed view of changes in point cloud in the top right panel. Changes due to digging excavations and anthropogenic terrain alterations were manually removed. Bb) InSAR velocity, trends over three years period, filtered by ground cover surface

material, i.e. scree and bare rock (mostly scree covered / exposed rock surface). c) TLS- and InSAR-derived areas of interest for rockfall models.

460 **4.4. Runout Modelling**

**4.4.1. Rockfall simulation**

Figure [Figure 4](#) shows the results of the rockfall runout modelling. We chose to depict the total reach probability of released rocks per scenario to highlight (i) maximum runout lengths and (ii) probable travel paths at each AOI. A total of 93,600 simulations were performed to produce statistically sound results. The Figure illustrates that rocks from release scenarios A 465 01 and A 02 have a certain probability (3.8-18.1 %) of reaching the accessible area of the Temple of Hatshepsut while rocks from scenario A 03 do not reach it in the model. The rocks from A 03, however, do reach the ancient temples of Mentuhotep II and Thutmose III, which are not accessible to the public. Rocks from scenario A 01 (base layer of Thebe~~sn~~ Formation) generally have a lower probability of reaching the temple than scenario A 02 (rock tower above the Temple of Hatshepsut) and are mostly deposited on the ~~retention~~ retaining wall behind the Temple. The number of rocks deposited in the Temple of 470 Hatshepsut visitor area increases with the size of the released blocks, as larger blocks tend to travel farther. The number of rocks deposited in the Temple of Hatshepsut visitor perimeter is proportional to the magnitude of the released rocks, i.e. larger rocks have a longer runout. However, the difference between the smallest (0.01 m<sup>3</sup>) and largest rocks (25 m<sup>3</sup>) is rather low, with total reach probabilities ranging from 3.8 to 13.6 % for scenario A 01 and from 12.3 to 16.1 % for scenario A 02.

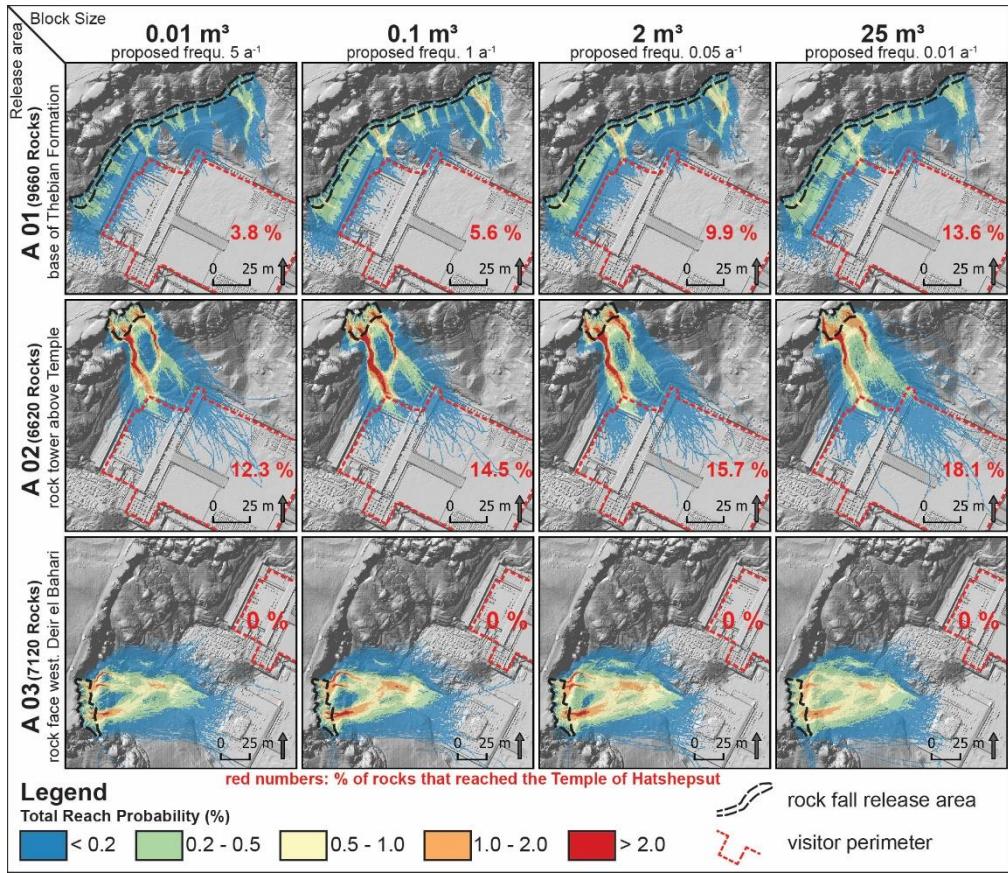


475 **Figure 4: Results of the rock fall simulations for scenarios A 01 (base of Theben Formation), A 02 (rock tower above the Temple of Hatshepsut), A 03 (rock face west of the temples) for, and different rock block size assumptions.**

#### 4.4.2. Granular flow simulation

Figure 5Figure 1a shows the two historic slope failure deposits we identified for our subsequent model parameterization. Both deposits exhibit (i) typical cone shape geometry, (ii) an intermixture of large rock fragments that indicate remnants of the 480 collapsed rock tower, and (iii) at event A a comparatively thick scree cover with boulders on the slope above the furthest deposits.

Figure 5Figure 5b and c show the results the simulation results (deposition height) for the overall best fitting internal friction parameters of  $\mu = 0.65$  und  $\xi = 800 \text{ m/s}^2$  (all calibration scenarios in S9). The height and spatial distribution of the simulated 485 deposits show a good fit to the geomorphological condition prior to the excavations at the Temple of Hatshepsut. Simulations of event A show (i) major deposits in the Thutmose III temple perimeter, that would have caused considerable damage to the former structure, and (ii) relatively extensive deposits on the slope. Event B shows a wide, cone-shaped deposit in the simulation and some spill in today's reconstructed temple complex. Of course, the event would have happened long before reconstruction, therefore, unequivocal validation of the runout remains a challenge.

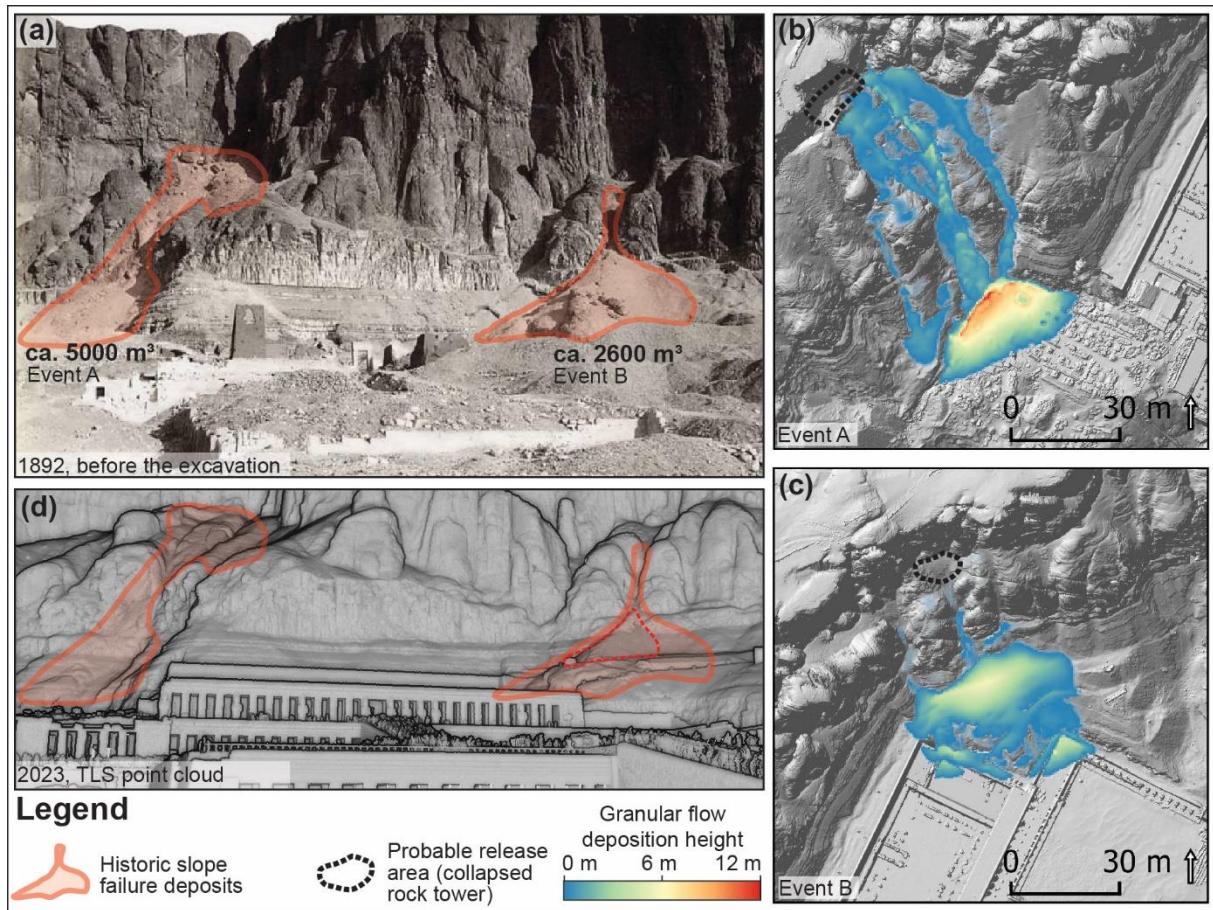


490 Figure 5: a) Earliest historic photograph of the Temple of Hatshepsut before [the first](#) major excavation (Naville, 1894) shows two distinct deposits that [are most likely linked to indicate](#) previous rock slope failure. b), c) Results of the dry flow simulations for historic rock tower collapses and subsequent granular flow. [Dd\) current](#) [Current](#) 3D TLS point cloud, [displaying](#) the recent talus cone, marked by the red dashed line. [This](#) was removed from the model before the simulations [to indicate pre-failure conditions](#).

#### 4.5. Vibration measurements

495 The results of the vibration monitoring are summarized in Figure 6 [Fehler! Verweisquelle konnte nicht gefunden werden](#), which displays representative HVSR, SSR spectra and a SSI stabilizing diagram, and the permanent tracking of the extracted frequencies. The uncertainty in the measurements is quantified through the 65% confidence intervals for HVSR and SSR curves (light red), and error bars equivalent to the 65 % confidence interval for the SSI.

500 The extracted frequencies are similar for all methods, with values of about 13, 34, 56, and 67 Hz. The SSI method appears to be most suited for long-term monitoring, as it is the only method that can continuously identify all four modes of vibration, even the weakly excited mode around 34 Hz which does not lead to a peak in the power spectral density (Figure 6 bottom). The most dominant mode around 56 Hz is reliably identified by all three methods. Where HVSR fails to reliably identify the other modes, SSR appears more suitable for the estimation of high-frequency modes, such as the one around 67 Hz.

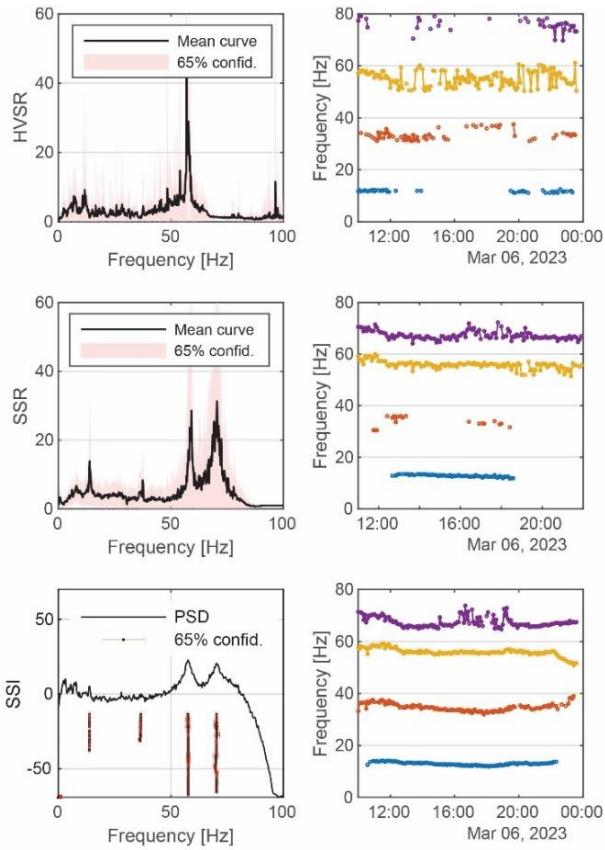

505 **Figure 6: Extracted ambient seismic vibration frequencies of the rock towers above the temple of Hatshepsut based on HVSR,  
 510 SSR, and SSI techniques.**

515 Every method has a unique selling point. The SSI method is the only method that yields (undamped) natural frequencies  $f_n$  and damping ratios in percent critical damping  $\zeta_{\%}$ . It is also the only method that does not depend on the user-defined frequency resolution. Although not shown here, SSI can also be used to estimate mode shapes. Modes shapes characterize the deflection pattern and the directivity of each mode of vibration, giving deeper insights into the most likely stress accumulations and failure scenarios. HVSR and SSR, on the other hand, give information on the spectral site amplification of ground motions. Sudden changes in frequencies or damping ratios can be indicators of material changes in the rock; however, vibrational modes also oscillate due to environmental effects, such as material temperature and moisture content. In this preliminary study, the compounding effects are not measured, but [Figure 7](#) shows the SSI-based natural frequency and damping ratios, together with the ambient temperature and wind speed measured at a nearby weather station in Luxor. The damping ratio shows the most distinct changes ranging from 1% to 4.2%. On close inspection, the correlation between the variables becomes obvious: increasing ambient temperatures lead to decreasing frequencies and higher damping ratios. The correlation becomes

more obvious when a time lag of a few hours is considered, as vibration behaviour depends on the material temperature and

520 not the ambient temperature. Further technical insights and results are addressed in Mendler et al. (2024).

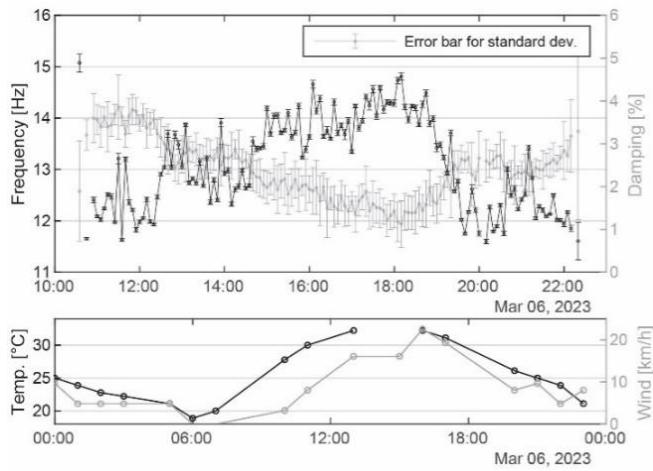


Figure 7: Environmental factors that influence *natural* frequencies and damping ratios [of the rock towers above the temple of Hatshepsut](#).

## 5. Discussion

### 525 5.1. Terrestrial Laser Scanning

The TLS surveys produced vital data for DSM generation – the [basing](#) for all runout simulations and topographic analyses – and surface change detection. The level of detection (LoD) of 3 cm is in the range or below comparable topographies (Santos Delgado et al., 2009; Abellán et al., 2010; Jacobs and Krautblatter, 2017; Mohadjer et al., 2020). The LoD is the instrumental error, controlled by the error propagation from raw data quality and registration process. [This includes the scanner's target accuracy \(5 mm @ 100 m range\), precision \(3 mm @ 100 m range\), laser beam divergence \(0.35 mrad\) and atmospheric correction](#) (RIEGL, 2014).

530 In our analysis the LoD is produced as significant change calculated by the M3C2 algorithm (Lague et al., 2013), and also corresponds to the 95<sup>th</sup> percentile of model distances (similar to Abellán et al. (2011)). [Our data show that environmental conditions at Egyptian heritage sites can have a major impact on data quality and thus on the LoD](#) [Our data show that environmental condition at Egyptian heritage sites have major impact on data quality and thus LoD](#).

535 Relative humidity is generally very low which positively affects accuracy (alignment std. dev. 0.01 m for 02/2022 data), but desert dust and drastic diurnal atmospheric temperature variations can have the opposite effect (Witte and Schmidt, 2006). This became an issue for the second TLS campaign (03/2023), where extensive filtering in some point clouds was needed to reduce residual distances to 0.03 m.

Despite the high degree of rock mass fragmentation, compared to other TLS-based rockfall studies, the calculated retreat rate, 540 and hence the rockfall activity, is very low (Abellán et al., 2010; Jacobs and Krautblatter, 2017; Strunden et al., 2015; Draebing et al., 2024). We attribute this to a lack of climatic controls (e.g., rain, moisture, freezing) that are limited to thermal erosion

(Collins and Stock, 2016) and seismic acceleration. However, we stress that in a rare case of significant precipitation event a stark increase in rockfall activity is highly probable (Krautblatter and Moser, 2009). This is particularly important as regional precipitation patterns in Egypt are expected to change due to global climate change (Gado et al., 2022).

545 All few detected distinct rockfalls are restricted to the very base of the cliff, which we attribute to increased topographic stress. Over long time scales this erosion pattern can lead to oversteepening, reducing the cliff's toe support (Rosser et al., 2013) and promoting larger instabilities. The size and shape, as well as scarp geometry, of the released primary rockfalls indicate a strong link to the dominating joint orientation in the cliff and support the rock shape used in our rockfall simulation. Similar to other studies (e. g., Ruiz-Carulla et al., 2020; Gili et al., 2022) we observed intense fragmentation of the released material, even from  
550 very low drop heights (Figure 3a) resulting from heavy internal fracturing of the rock mass. As we only observed distinct rockfalls from the lowest subunit of the heterogeneously layered Thebes 1 formation, we cannot reliably extrapolate this degree of fragmentation to rockfall from all potential release zones or AOIs respectively. Nonetheless, fragmentation is a key control of rockfall runout dynamics, as kinetic energy is dissipated in the process (Wyllie, 2017). Scree redistribution pattern in the TLS change detection on the talus slopes (Figure 3Figure 3a) are either linked to small trails or small gullies in the rock mass  
555 where minor disturbances (workers or very small rockfalls) can result in small granular flows in the scree deposited at its angle of repose.

This study shows that TLS in the context of safeguarding cultural heritage in hyper-arid regions is very well suited for high-resolution surface change / rockfall detection. Rapid change of local atmospheric conditions (e.g., temperature, dust) may reduce data quality on a short-term basis. Other studies have shown that TLS is well-suited for detecting larger slope  
560 instabilities even before eventual failure (Santos Delgado et al., 2009; Jacobs et al., 2024; Kenner et al., 2022). A drawback of the current integration TLS in our approach is temporal resolution, as critical pre-failure deformation or acceleration in the cliff is possibly lost between measuring epochs. Depending on future safety demand, we aim to extent the multi-temporal TLS data set to (i) increase our understanding of rockfall dynamics at the Temple of Hatshepsut, (ii) potentially detect larger instabilities prior to failure or (iii) integrate a TLS system in a 4D early warning system (e. g., Gaisecker and Czerwonka-  
565 Schröder, 2023; Winiwarter et al., 2023).

## 5.2. Interferometric Synthetic Aperture Radar

The combination of SBAS and PSInSAR methods proved to be an effective approach for high-resolution deformation analysis around the Temple of Hatshepsut. While SBAS enables a robust detection of areal deformation (Berardino et al., 2002). PSInSAR provides highly precise point-based information in urban and rocky zones (Ferretti et al., 2001). Integrating the SBAS-based trend and turbulence corrections into the PS time series significantly improved phase stability and reduced potential bias effects.

The analysis indicates that most of the study area remained stable over the three-year observation period. Localized deformation occurs primarily at the base of the cliff, around a rock tower north of the temple, and along slopes west of the

575 Temple of Mentuhotep II. These zones correspond to potential instabilities previously identified through TLS and field observations, confirming the high consistency between the methods.

The accuracy of interferometric SAR analyses is mainly influenced by orbit errors, inconsistencies in the digital elevation model (DEM), phase unwrapping errors, decorrelation effects, and atmospheric signal delays (Hanssen, 2003; Ferretti et al., 2011). No explicit atmospheric correction (e.g., using GACOS) was applied; instead, atmospheric disturbances were minimized by selecting interferograms with short spatial and temporal baselines and by restricting the analysis to coherent pixels (correlation > 0.5).

580 The mean standard deviation of annual deformation rates across the study area is 2.7 mm/a, which lies at the lower end of values reported for comparable Sentinel-1 applications at World Heritage Sites (Margottini et al., 2017; Falco et al., 2022; Bianchini et al., 2025). These results demonstrate the high internal precision of the applied SBAS/PS-InSAR workflow and confirm its suitability for hyper-arid and topographically complex environments.

585 Potential error sources mainly result from incomplete phase unwrapping in steep terrain and small-scale atmospheric gradients. Nevertheless, the high coherence in rocky and anthropogenically influenced zones confirms that InSAR time series analysis provides a reliable tool for preventive monitoring of sensitive archaeological structures. Future work should include descending orbit data and external atmospheric models to better separate vertical and horizontal displacement components and quantify tropospheric effects. The combination with TLS or vibration monitoring could further improve temporal resolution and enable 590 continuous early-warning monitoring.

The InSAR based analysis of ground deformation around the temple complexes of Deir El Bahari reveals a spatially heterogeneous pattern of ground movement, with most of the study area showing stable conditions over the three year observation period. Crucially, the exposed rock face, including the immediate surroundings of the temples, appears largely stable, supporting the assumption of relative geological inactivity in these zones. This finding is particularly relevant given the 595 cultural and historical value of the area, providing a quantitative baseline for conservation and risk management.

A key strength of this study is the exceptionally high quality of the InSAR data. This is largely attributable to the favourable environmental conditions of the study site: the arid desert environment offers minimal vegetation cover, low surface moisture, and relatively stable atmospheric conditions. These factors significantly reduce decorrelation and atmospheric noise – two of the main challenges in InSAR processing – resulting in dense and reliable measurement coverage across the terrain.

600 Localized zones of significant displacement were identified at the base of the cliff, around a rock tower north of the Temple of Hatshepsut, and above the Temple of Mentuhotep II. These zones may reflect small scale rock mass instabilities that require further investigation. The scree southeast of the Temple of Mentuhotep shows notable movement, likely linked to gravitational reworking or human activity. Data gaps in central areas are primarily attributed to radar shadowing due to steep terrain or phase decorrelation, potentially caused by archaeological activities. Despite these limitations, the overall measurement density 605 and precision offer a robust foundation for long term monitoring.

~~In sum, this study underscores the value of multi-year Sentinel-1 InSAR monitoring in hyper-arid, topographically complex environments. It not only enables detailed mapping of ground stability but also supports the identification of localized hazards – an essential step in the sustainable management of vulnerable heritage sites.~~

### 5.3. Runout Modelling

#### 610 5.3.1. Rockfall simulations

The results of the rockfall runout simulations are mostly dependent on rock shape, size and the terrain parameters (Caviezel et al., 2019; Caviezel et al., 2021; RAMMS AG, 2024b). We chose a “long” rock shape with an aspect ratio of ca.  $1*0.6*0.5$ , as this proved to be the best fit for the site (see Sect. 3.3.1) and are congruent with structural analyses by Ezzy et al. (2025). Principally, other rock shapes cannot be ruled out entirely and should be addressed in future in depth analyses. The terrain parameters in our model are relatively simple and hard, compared to other studies from mountainous areas (Noël et al., 2023; Massaro et al., 2024). This reflects the total lack of vegetation or softer organic soils cover at the study site, but Furthermore, harder terrain types serve as a conservative estimate and are consistent with RAMMS AG (2024b) as examples references from entire unvegetated environments are scarce. As block shape is generally constrained by the rock mass structure and seasonal changes in terrain parameters are highly improbable (e. g., moisture, vegetation, soil cover) the model is only sensitive to rockfall magnitudes. At the same time, calibrating terrain parameters with rockfall remnants on site is heavily biased as the entire plain of Deir El-Bahari has been dug out and meticulously cleaned from debris in at least four different archaeological campaigns (Naville, 1894; Winlock, 1942; Lipinska, 1977; Zachert, 2014a). Therefore, existing rockfall deposits outside the temple perimeter may represent statistical outliers or even anthropogenic deposits or redepositions rather than reliable calibration events. Therefore, a classic sensitivity analysis is not effective.

625 The results show less influence of rockfall magnitudes on runout length than anticipated. This is, however, consistent with Caviezel et al. (2021) and can, in this case, also be attributed to the large vertical component of the trajectory and the high DSM surface roughness in the archaeological sites (especially Scenario A 03, temple of Mentuhotep), as RAMMS::ROCKFALL does not allow plastic deformation of the surface model – in this case archaeological structures. The results of our TLS-based rockfall detection show that all detected rockfalls intensely fragment upon their deposition, resulting in energy dissipation (see 5.1). As our simulations cannot account for fragmentation during the rockfall trajectory, we probably overestimate total reach probabilities to some extent underlining the conservative nature of our rockfall simulations (Corominas et al., 2019). This becomes especially obvious in the case of the effect of the retaining wall behind the Temple of Hatshepsut. Originally built in 1968 to stabilize the soft Esna Shale formation immediately above the festival courtyard and the entrance to the Amun shrine (Lipinska, 1977), the retaining wall serves as a natural rockfall collector for smaller and intensely fragmented rockfalls. However, rockfalls with higher kinetic energy and lower amount of fragmentation have a higher probability of reaching the temple visitor perimeter. Here it is important to note that reach probabilities do not include incident

probabilities which are key for future work towards risk assessment. In summary, our rockfall runout simulation offers a first, straightforward and conservative approach towards rockfall hazard assessment at the Temple of Hatshepsut.

### 5.3.2. Granular flow simulations

640 As rockfalls in the geological context of Deir El-Bahari exhibit a large susceptibility to fragmentation (5.1), the granular flow simulations produced valuable insights into potential runout scenarios, especially for larger magnitudes. RAMMS::DEBRISFLOW was originally developed for the simulation of debris flows and its application in completely dry environments may seem counterintuitive. However, in the case of this study it turned out to be a simple and geomorphologically accurate sound simulation tool for dry flows (granular flow), too. The model calibration (see S9) produced comparatively high 645 values for the dry-Coulomb type friction  $\mu$ , compared to simulated and calibrated debris flows (Bolliger et al., 2024) and rock avalanches (Engen et al., 2024). According to RAMMS AG (2024a) the Coulomb friction corresponds to the tangent of the internal shear angle of the material ( $\phi$ ). The calibrated  $\mu = 0.65 (\pm 0.05)$  corresponds to  $\phi = 33^\circ (\pm 2^\circ)$ . This matches the natural slope angle  $\beta$  of the surrounding talus slopes that were deposited at their angle of repose by gravitational mass movements, and supports our findings, as without external forces no initial movement parallel to the slope is possible if 650  $\arctan(\mu) > \beta$  (Salm, 1993). Since as in the case of dry granular flows there is no lubrication effect of water (RAMMS AG, 2024a) and slope failure magnitudes are not large enough to drastically change the transport dynamics (Erismann and Abele, 2001), we consider our results appropriate for the described failure process. The runout and height of the deposits are therefore mainly controlled by  $\mu$ , whereas viscous-turbulent friction  $\xi$  controls velocity and the amount of material, deposited around 655 the release area or in the channel on the slope. In fact, S9, showing the range of appropriate  $\mu$ - $\xi$  pairs, suggest a low sensitivity of flow reach to changes in  $\xi$ , in dry granular flows.

Since information on release volumes is limited to single historic photographs, anthropogenic terrain alterations are massive, and our remote sensing data do not suggest distinct imminent unstable volumes, the simulated granular flow magnitudes are rough geometric estimates and assume spontaneous rather than successive failure. They translate to rock towers with a height of ca. 40-50 m and a footprint of 65-100 m<sup>2</sup>, which is very similar to other rock towers structures at the Deir El-Bahari cliff.

660 Therefore, our simulation provides key parameters for the simulation of potential larger -future events. In case of successive failure of such rock towers, we expect shorter runout distances. This underlines our rather conservative simulation scenarios at the current stage of the study.

### 5.4. Vibration measurements

This paper demonstrated the advantages of the SSI method for vibration monitoring. It is the only method that estimated all 665 modes of vibration with high accuracy and a short measurement duration (of 5 min). Unusual weather events may lead to erosion and cracks within the material, reduced compound stiffness, and hence, irregular changes in the frequency and damping values. Therefore, vibration-based features can be suitable precursors for rockfalls and could be employed to inform authorities and give them the opportunity to initiate on-site investigations, or to rerun the TLS and InSAR analyses on demand.

The study highlights that environmental changes affect the vibrational behaviour of the examined rock tower. Damping ratios  
670 appeared to be particularly susceptible to changes in environmental factors, and consequently, material changes (Figure  
7Figure 7). To be able to distinguish normal changes from structural damage, the seismic station must be equipped with sensors  
that measure environmental variables that influence the vibration behaviour of the rock tower. Moreover, measurement data  
from an entire seasonable cycle (one year), or better two, needs to be measured to train smart algorithms to detect anomalies  
and quantify long-term shifts.

675 **5.5. Discussion of safeguarding and hazard anticipation strategy**

The multi-method assessment at Deir El-Bahari demonstrates that integrating TLS, InSAR, vibration monitoring, and runout  
modelling provides a more comprehensive and reliable understanding of cliff stability ~~than any~~ combining the complementary  
information of several individual techniques ~~alone~~. While TLS and InSAR independently reveal largely stable conditions –  
showing that most surface change is confined to scree slopes altered by archaeological activity – the combined interpretation  
680 of both datasets allows us to distinguish surface noise from meaningful deformation patterns. Importantly, the independent  
detection of two localized active zones by both TLS and InSAR, and a third zone detected by InSAR alone, highlights their  
complementary capabilities across different spatial and temporal scales. TLS provides high-resolution geometric changes at  
the vertical cliff face and in structurally complex zones, whereas InSAR provides long-term deformation trends across the  
entire study area with millimetric precision, however, low spatial resolution. One of the main strengths of this study  
685 Noteworthy is the exceptionally high quality of the remote sensing data, which can be largely attributed to the favourable environmental  
conditions at the study site. The integration of ambient vibration monitoring has the potential of further closing the scale gap  
between these methods by offering a continuous, real-time detection capability for abrupt mechanical changes that may occur  
between TLS epochs or satellite acquisitions. Together, these methods form a coherent, multi-scale monitoring system in  
which each approach validates, refines, or supplements the others.

690 This integrated perspective is equally important for hazard anticipation. The three AOIs identified through the combined  
remote-sensing analysis provide the spatial framework for rockfall and granular flow simulations. Here, the modelling results  
gain meaning only through their connection to the observational data: TLS-detected fragmentation patterns explain why  
conservative assumptions in runout simulations tend to overestimate reach, while InSAR-derived stability outside the three  
zones helps constrain the spatial extent of plausible failure scenarios. Likewise, vibration monitoring offers an early-warning  
695 potential for these very zones by revealing precursor frequency changes before geometric displacements become detectable.  
Thus, the modelling and monitoring components are not isolated steps but mutually reinforcing elements within an integrated  
safeguarding strategy.

700 Although the runout and granular flow models represent conservative first-order estimates due to limited calibration  
information, their integration with TLS-derived rockfall characteristics and InSAR-based deformation trends already provides  
a robust decision-support basis. The granular flow calibration, despite its reliance on rough volume estimates, offers  
usable robust friction parameters for future scenario testing, while the rockfall simulations help delineate areas where protective

measures or access management could be most effective. By combining high-resolution surface models, 3D change detection, InSAR-based deformation trends, dynamic behavioural indicators, and physically based modelling, this study demonstrates that a non-invasive multi-method approach produces a more reliable and nuanced hazard anticipation framework for the cultural heritage of Deir El-Bahari than any single dataset could achieve.

The combined analysis of the TLS and InSAR data congruently reveals largely stable conditions at the cliffs of Deir El Bahari. Most detected surface change is confined to the scree slopes of archaeological activity. This finding holds particular significance due to the area's cultural and historical importance, offering a quantitative basis for conservation efforts and a benchmark for future risk management. One of the main strengths of this study is the exceptionally high quality of the remote sensing data, which can be largely attributed to the favourable environmental conditions at the study site. Two localised zones of significant activity were independently detected by TLS and InSAR, one by InSAR only, underlining their complementary capabilities. This is even more notable when looking at spatio-temporal scales of our monitoring approach. InSAR can cover vast amounts of area with very high accuracy (mm), but low spatial resolution. TLS offers the highest spatial resolution, good accuracy (3 cm LoD), but less coverage when the short measuring intervals are demanded. The measuring interval and processing time can be prospectively optimized by using automated approaches (Williams et al., 2018; Winiwarter et al., 2023). By successfully showcasing the applicability and potential of continuous ambient vibration measurements at the site, we offer a way to close the scale gap between InSAR and TLS. Abrupt rock mechanical changes in local, potentially instable zones could be detected instantaneously by a change in frequency spectra, even if they are below TLS LoD or between InSAR satellite passes.

The integrated rock face deformation data yields three local zones of potentially active gravitational mass movements: the cliff base behind the Temple of Hatshepsut, a rock tower north of the Temple of Hatshepsut and a patch of rock face behind the Temple of Mentuhotep II in the west of Deir El Bahari. Straightforward rockfall simulations for four orders of magnitude revealed runout trajectories and reach probabilities. At this point, these models present only a conservative first estimate but nonetheless prove their value in a comprehensive safeguarding strategy. Since our rockfall models do not account for fragmentation which is (i) evident for small magnitude rockfalls in the TLS data and (ii) most probable for larger failures, we calibrated a granular flow simulation for two historic events at Deir El Bahari. This calibration is based on rough volume estimations and fairly simple mechanics, however, (i) it provides easy access validated friction parameters if needed for future event scenarios and (ii) at this point we do not have more reliable calibration information.

## 6. Conclusion

The Temple of Hatshepsut, an engineering marvel key World Heritage Site from the fifteenth century BCE and part of the UNESCO World Heritage Site of Ancient Thebes, exhibits a unique architectural integration with in the context of the Gebel Gurnah's Deir El-Bahari 100 m high subvertical rock mass cliff, featuring ca. 100 m high, vertical cliffs with prominent rock tower structures. Due to its geomorphological setting, exposing the temple complex and its visitors are exposed to potential

gravitational mass movements. Therefore, a comprehensive and reliable natural hazard safeguarding strategy is required. For  
735 the first time, we successfully ~~applied and~~ combined three non-destructive measuring methods (TLS, InSAR, ambient vibrations) at an Egyptian World Heritage ~~S~~ite to provide a proof of concept of an integrated methodological approach and its capabilities towards a hazard anticipation and mitigation strategy. We show that

- The combination of TLS and InSAR at heritage sites in desert environments provides ~~unequivocal topographic rock surface~~ change analysis with good spatial resolution and ~~very high accuracy~~ ~~higher than anticipated~~~~beyond previously described accuracy in other settings~~.
- Accurate and unequivocal rock surface detection is only achievable by the combination of both methods.
- Three local zones of significant deformation ~~and~~ surface change could be derived from the remote sensing data.
- Ambient vibration measurements have great potential ~~at the site to close the~~~~to bridge the~~ time gap between the initiation of potentially preparing rock wall instability and active process monitoring ~~especially in rock towers with sensitive ambient signals~~.
- ~~Non destructive and non invasive methods are very capable and the right way to go at sensitive and prestigious cultural heritage sites.~~
- Straightforward rockfall and granular flow runout simulations provide valuable insights towards gravitational mass movement hazard assessment.

750

- ~~In summary, this~~ This study shows the remarkable potential of transferring established methods from mountainous regions to cultural heritage sites.
- We presented an integrated approach in a challenging climatic, geomorphological and archaeologically sensitive environment, and produced the first evidence-based event and impact analysis of gravitational mass movements at  
755 the Temple of Hatshepsut, providing vital data towards future risk assessment.

## 7. Data availability

The data is available upon reasonable request and authorization of the Egyptian Ministry of Antiquities.

## 8. Author contribution

HH and CG initiated the study and collaboration. BJ, MKe, MKr and MI designed the outline of the study in close cooperation  
760 with HH and CG. BJ, MI, ME, MKe, MKr, CG and HH conducted the field work in a joint effort. BJ analysed the TLS data, simulated runouts, and prepared and compiled the manuscript & figures with contributions from MI, ME and HH (Geological Engineering and Rock mechanics), MKe (InSAR), AM (ambient vibration), JK (granular flow modelling) and revision and final approval from all authors.

## 9. Competing interests

765 One author is a member of the editorial board of the Copernicus journal *Earth Surface Dynamics*.

## 10. Acknowledgements

We thank the Supreme Council of Antiquities in general and the Antiquities Area 465 manager and ~~employees~~employees at El-Deir El-Bahari region for their local support. We are very grateful for support from Dr. Alexander Schütze (LMU Institute for Egyptology and Coptology) providing access to literature and photographs. We thank Dr. Christian Haberland (GFZ Potsdam) 770 for providing instruments for ambient vibration measurements. The team is grateful to the ScanPyramids mission for their consistent support.

## 11. Financial support

The study was funded by the TUM Global Incentive Fund 2022: HERITAGE - High-energy rockfall impact anticipation in a German-Egypt cooperation.

## 775 12. References

### 12.

Abdallah, T. and Helal, H.: Risk evaluation of rock mass sliding in El Deir El Bahary valley, Luxor, Egypt, *Bulletin of the International Association of Engineering Geology Bulletin de l'Association Internationale de Géologie de l'Ingénieur*, 42, 3–9, <https://doi.org/10.1007/BF02592614>, 1990.

780 Abellán, A., Vilaplana, J. M., Calvet, J., García-Sellés, D., and Asensio, E.: Rockfall monitoring by Terrestrial Laser Scanning – case study of the basaltic rock face at Castellfollit de la Roca (Catalonia, Spain), *Nat. Hazards Earth Syst. Sci.*, 11, 829–841, <https://doi.org/10.5194/nhess-11-829-2011>, 2011.

Abellán, A., Oppikofer, T., Jaboyedoff, M., Rosser, N. J., Lim, M., and Lato, M. J.: Terrestrial laser scanning of rock-slope instabilities, *Earth surface processes and landforms*, 39, 80–97, <https://doi.org/10.1002/esp.3493>, 2014.

785 Abellán, A., Calvet, J., Vilaplana, J. M., and Blanchard, J.: Detection and spatial prediction of rockfalls by means of terrestrial laser scanner monitoring, *Geomorphology*, 119, 162–171, <https://doi.org/10.1016/j.geomorph.2010.03.016>, 2010.

Alcaino Olivares, R., Perras, M. A., Ziegler, M., and Maisen, J.: Cliff Stability at Tomb KV42 in the Valley of the Kings, Egypt: A First Approach to Numerical Modelling and Site Investigation, 53rd U.S. Rock Mechanics/Geomechanics Symposium, 2019.

790 Arnold, D.: *Die Tempel Ägyptens: Götterwohnungen, Baudenkmäler, Kultstätten, Bechtermünz*, Augsburg, 1996.

Aubry, M. P., Dupuis, C., Berggren, W. A., Ghaly, H., Ward, D., King, C., Knox, R. W. O., Ouda, K., and Youssef, M.: The role of geoarchaeology in the preservation and management of the Theban Necropolis, West Bank, Egypt, *Proceedings of the Yorkshire Geological Society*, 61, 134–147, <https://doi.org/10.1144/pygs2016-366>, 2016.

795 Aubry, M. P., Berggren, W. A., Dupuis, C., Ghaly, H., Ward, D., King, C., Knox, R. W. O., Ouda, K., Youssef, M., and Galal, W. F.: Pharaonic necrostratigraphy: a review of geological and archaeological studies in the Theban Necropolis, Luxor, West Bank, Egypt, *Terra Nova*, 21, 237–256, <https://doi.org/10.1111/j.1365-3121.2009.00872.x>, 2009.

Badawy, A., Abdel Monem, S. M., Sakr, K., and Ali, S.: Seismicity and kinematic evolution of middle Egypt, *Journal of Geodynamics*, 42, 28–37, <https://doi.org/10.1016/j.jog.2006.04.003>, 2006.

800 Beshr, A. M., Kamel Mohamed, A., ElGalladi, A., Gaber, A., and El Baz, F.: Structural characteristics of the Qena Bend of the Egyptian Nile River, using remote sensing and geophysics, *The Egyptian Journal of Remote Sensing and Space Science*, 24, 999–1011, <https://doi.org/10.1016/j.ejrs.2021.11.005>, 2021.

Carlà, T., Intrieri, E., Raspini, F., Bardi, F., Farina, P., Ferretti, A., Colombo, D., Novali, F., and Casagli, N.: Perspectives on the prediction of catastrophic slope failures from satellite InSAR, *Scientific reports*, 9, 14137, <https://doi.org/10.1038/s41598-019-50792-y>, 2019.

805 Caviezel, A., Lu, G., Demmel, S. E., Ringenbach, A., Bühler, Y., Christen, M., and Bartelt, P.: RAMMS:ROCKFALL – A Modern 3 Dimensional Simulation Tool Calibrated on Real World Data, *53rd U.S. Rock Mechanics/Geomechanics Symposium*, 2019.

Caviezel, A., Ringenbach, A., Demmel, S. E., Dinneen, C. E., Krebs, N., Bühler, Y., Christen, M., Meyrat, G., Stoffel, A., 810 Hafner, E., Eberhard, L. A., Rickenbach, D. von, Simmler, K., Mayer, P., Niklaus, P. S., Birehler, T., Aebi, T., Cavigelli, L., Schaffner, M., Rickli, S., Schnetzler, C., Magno, M., Benini, L., and Bartelt, P.: The relevance of rock shape over mass implications for rockfall hazard assessments, *Nature communications*, 12, 5546, <https://doi.org/10.1038/s41467-021-25794-y>, 2021.

Cesaro, G., Delmonaco, G., Khrisat, B., and Salis, S.: Geological Conservation Through Risk Mitigation and Public Awareness at the Siq of Petra, Jordan, in: *Advancing Culture of Living with Landslides*, edited by: Sassa, K., Mikos, M., and Yin, Y., Springer International Publishing, Cham, 511–517, [https://doi.org/10.1007/978-3-319-59469-9\\_45](https://doi.org/10.1007/978-3-319-59469-9_45), 2017.

815 Chudzik, P., El Younsy, A. R. M., Galal, W. F., and Salman, A. M.: Geological appraisal of the Theban cliff overhanging the Hatshepsut temple at Deir el Bahari, *Polish Archaeology in the Mediterranean*, 30, 275–295, 2022.

Collins, B. D. and Stock, G. M.: Rockfall triggering by cyclic thermal stressing of exfoliation fractures, *Nature Geosci*, 9, 820 395–400, <https://doi.org/10.1038/ngeo2686>, 2016.

Ćwiek, A.: Old and Middle Kingdom tradition in the Temple of Hatshepsut at Deir el Bahari, *Études et Travaux (Institut des Cultures Méditerranéennes et Orientales de l'Académie Polonaise des Sciences)*, 61–93, 2014.

Draebing, D., Mayer, T., McColl, S., Schlecker, M., and Jacobs, B.: Relief and elevation set limits on mountain size, <https://doi.org/10.21203/rs.3.rs-5156557/v1>, available at: <https://www.researchsquare.com/article/rs-5156557/v1>, 2024.

825 Draebing, D., Mayer, T., Jacobs, B., and McColl, S. T.: Alpine rockwall erosion patterns follow elevation-dependent climate  
trajectories, *Commun Earth Environ*, 3, 1–12, <https://doi.org/10.1038/s43247-022-00348-2>, available at:  
<https://www.nature.com/articles/s43247-022-00348-2>, 2022.

830 Dupuis, C., Aubry, M. P., King, C., Knox, R. W., Berggren, W. A., Youssef, M., Galal, W. F., and Roche, M.: Genesis and  
geometry of tilted blocks in the Theban Hills, near Luxor (Upper Egypt), *Journal of African Earth Sciences*, 61, 245–267,  
830

Erismann, T. H. and Abele, G.: *Dynamics of rockslides and rockfalls: With 10 tables*, Springer, Berlin, Heidelberg, 316 pp.,  
2001.

835 Falco, A. de, Resta, C., and Squeglia, N.: Satellite and on site monitoring of subsidence for heritage preservation: A critical  
comparison from Piazza del Duomo in Pisa, Italy, in: *Geotechnical Engineering for the Preservation of Monuments and*  
835 *Historic Sites III*, edited by: Lancellotta, R., Viggiani, C., Flora, A., Silva, F. de, and Mele, L., CRC Press, London, 548–  
559, <https://doi.org/10.1201/9781003308867-39>, 2022.

Gado, T. A., El Haggry, R. M., and Rashwan, I. M. H.: Projection of rainfall variability in Egypt by regional climate model  
simulations, *Journal of Water and Climate Change*, 13, 2872–2894, <https://doi.org/10.2166/wcc.2022.003>, 2022.

840 Gaisecker, T. and Czerwonka Schröder, D.: RIEGL V Line Scanners for Permanent Monitoring Applications and integration  
capabilities into customers risk management, [White Paper], 2023.

Graber, A. and Santi, P.: Power law models for rockfall frequency-magnitude distributions: review and identification of  
factors that influence the scaling exponent, *Geomorphology*, 418, 108463,  
<https://doi.org/10.1016/j.geomorph.2022.108463>, 2022.

845 Hartmeyer, I., Keuschnig, M., Delleske, R., Krautblatter, M., Lang, A., Schrott, L., Prasicek, G., and Otto, J. C.: A 6 year  
lidar survey reveals enhanced rockwall retreat and modified rockfall magnitudes/frequencies in deglaciating cirques,  
*Earth Surf. Dynam.*, 8, 753–768, <https://doi.org/10.5194/esurf-8-753-2020>, available at:  
<https://esurf.copernicus.org/articles/8/753/2020/esurf-8-753-2020.html>, 2020.

Hesthammer, J. and Fossen, H.: Evolution and geometries of gravitational collapse structures with examples from the  
Statfjord Field, northern North Sea, *Marine and Petroleum Geology*, 16, 259–281, 1999.

850 Hungr, O., Leroueil, S., and Picarelli, L.: The Varnes classification of landslide types, an update, *Landslides*, 11, 167–194,  
<https://doi.org/10.1007/s10346-013-0436-y>, available at: <https://link.springer.com/article/10.1007/s10346-013-0436-y>,  
2014.

Intrieri, E., Raspini, F., Fumagalli, A., Lu, P., Del Conte, S., Farina, P., Allievi, J., Ferretti, A., and Casagli, N.: The Maoxian  
landslide as seen from space: detecting precursors of failure with Sentinel-1 data, *Landslides*, 15, 123–133,  
855 <https://doi.org/10.1007/s10346-017-0915-7>, 2018.

Jackson, R. L., Green, I., and Marghitu, D. B.: Predicting the coefficient of restitution of impacting elastic perfectly plastic  
spheres, *Nonlinear Dyn.*, 60, 217–229, <https://doi.org/10.1007/s11071-009-9591-z>, 2010.

860 Jacobs, B. and Krautblatter, M.: LiDAR-basierte Quantifizierung von strukturellen Einflüssen auf Steinschlagaktivität in alpinen Kalksteinwänden., in: Fachsektionstage Geotechnik – Interdisziplinäres Forum: 6. 8. September 2017, Congress Centrum Würzburg Tagungsband, 2017.

865 Jacobs, B., Stammberger, V., and Krautblatter, M.: Geomorphic Hazard Mitigation in touristically developed Alpine Gorges: a Benchmark Study in the Höllental Gorge, Bavaria., in: INTERPRAEVENT 2024 Conference Proceedings, 2024.

870 Karakhanyan, A., Avagyan, A., and Sourouzian, H.: Archaeoseismological studies at the temple of Amenhotep III, Luxor, Egypt, Ancient Earthquakes, 471, 199, 2010.

875 Kenner, R., Gischig, V., Gejeie, Z., Quéau, Y., Kienholz, C., Figi, D., Thöny, R., and Bonanomi, Y.: The potential of point clouds for the analysis of rock kinematics in large slope instabilities: examples from the Swiss Alps: Brinzauls, Pizzo Cengalo and Spitze Stei, Landslides, 19, 1357–1377, <https://doi.org/10.1007/s10346-022-01852-4>, 2022.

880 King, C., Dupuis, C., Aubry, M. P., Berggren, W. A., Knox, R. O., Galal, W. F., and Baele, J. M.: Anatomy of a mountain: The Thebes Limestone Formation (Lower Eocene) at Gebel Gurnah, Luxor, Nile Valley, Upper Egypt, Journal of African Earth Sciences, 136, 61–108, <https://doi.org/10.1016/j.jafrearsci.2017.05.008>, 2017.

885 Klemm, R. and Klemm, D. D.: Steine und Steinbrüche im Alten Ägypten, Springer Berlin Heidelberg, Berlin, Heidelberg, 1993.

890 Krautblatter, M. and Moser, M.: A nonlinear model coupling rockfall and rainfall intensity based on a four year measurement in a high Alpine rock wall (Reintal, German Alps), Nat. Hazards Earth Syst. Sci., 9, 1425–1432, <https://doi.org/10.5194/nhess-9-1425-2009>, available at: <https://nhess.copernicus.org/articles/9/1425/2009/>, 2009.

Lague, D., Brodru, N., and Leroux, J.: Accurate 3D comparison of complex topography with terrestrial laser scanner: Application to the Rangitikei canyon (N Z), ISPRS Journal of Photogrammetry and Remote Sensing, 82, 10–26, <https://doi.org/10.1016/j.isprsjprs.2013.04.009>, 2013.

895 Leinauer, J., Dietze, M., Knapp, S., Scandroglio, R., Jokel, M., and Krautblatter, M.: How water, temperature, and seismicity control the preconditioning of massive rock slope failure (Hochvogel), Earth Surf. Dynam., 12, 1027–1048, <https://doi.org/10.5194/esurf-12-1027-2024>, 2024.

Lipinska, J.: Deir El Bahari II: The Temple of Thuthmosis III: the Architecture, 1977.

Lipińska, J.: ‘Deir el Bahari Temple of Thutmose III’, Seventy Years of Polish Archaeology in Egypt, 105–114, 2007.

Margottini, C., Bobrowsky, P., Gigli, G., Ruther, H., Spizzichino, D., and Vleko, J.: Rupesrian World Heritage Sites: Instability Investigation and Sustainable Mitigation, in: Advanceing Culture of Living with Landslides, edited by: Sassa, K., Mikoš, M., and Yin, Y., Springer International Publishing, Cham, 23–50, [https://doi.org/10.1007/978-3-319-59469-9\\_2](https://doi.org/10.1007/978-3-319-59469-9_2), 2017.

900 Marija, L., Martin, Z., Jordan, A., and Matthew, P.: Rockfall susceptibility and runout in the Valley of the Kings, Natural Hazards, 110, 451–485, <https://doi.org/10.1007/s11069-021-04954-9>, 2022.

Massaro, L., Forte, G., Falco, M. de, Rauseo, F., and Santo, A.: Rockfall source identification and trajectory analysis from UAV-based data in volcano-tectonic areas: a case study from Ischia Island, Southern Italy, Bulletin of the International

Association of Engineering Geology Bulletin de l'Association Internationale de Géologie de l'Ingénieur, 83, <https://doi.org/10.1007/s10064-024-03569-1>, 2024.

Matascei, B., Stock, G. M., Jaboyedoff, M., Carrea, D., Collins, B. D., Guérin, A., Matascei, G., and Ravanel, L.: Assessing 895 rockfall susceptibility in steep and overhanging slopes using three-dimensional analysis of failure mechanisms, Landslides, 15, 859–878, <https://doi.org/10.1007/s10346-017-0911-y>, available at: <https://link.springer.com/article/10.1007/s10346-017-0911-y>, 2018.

Mendler, A., Rada Erazo, J. D., Ismael, M., Ezzy, M., Jacobs, B., Haberland, C., Krautblatter, M., Helal, H., and Grosse, C. 900 U.: Vibration Monitoring of the Rock Formation Above the Hatshepsut Temple, eJNDT, 29, <https://doi.org/10.5828/29649>, 2024.

Mohadjer, S., Ehlers, T. A., Nettesheim, M., Ott, M. B., Glotzbach, C., and Drews, R.: Temporal variations in rockfall and 905 rock wall retreat rates in a deglaciated valley over the past 11 k.y., Geology, 48, 594–598, <https://doi.org/10.1130/G47092.1>, 2020.

Nakamura, Y.: A method for dynamic characteristics estimation of subsurface using microtremor on the ground surface, OR 905 or RTR1, 30, 1989.

Naville, E.: The Temple of Deir El Bahari: Part III, Offices of the Egypt exploration fund, 1913.

Naville, E.: The Temple of Deir El Bahari: Part I, Offices of the Egypt exploration fund, 1907.

Naville, E.: The Temple of Deir El Bahari: Its Plan, its Founders, and its first Explorers, Offices of the Egypt exploration 910 fund, 1894.

Noël, F., Nordang, S. F., Jaboyedoff, M., Digout, M., Guerin, A., Locat, J., and Matascei, B.: Comparing Flow R, Rockyfor3D and RAMMS to Rockfalls from the Mel de la Niva Mountain: A Benchmarking Exercise, Geosciences, 13, 200, <https://doi.org/10.3390/geosciences13070200>, 2023.

Pawlowski, M. and Wasilewski, M.: Some remarks on jointing in the Theban limestones in the region of Deir el Bahari, 915 Egypt, Geologia/Akademia Górniczo-Hutnicza im. Stanisława Staszica w Krakowie, 30, 47–56, 2004.

Pechnikov, A.: PyGMTSAR (Python InSAR), <https://doi.org/10.5281/zenodo.7725131>, available at: <https://insar.dev>, 2024.

RAMMS AG: RAMMS:DEBRISFLOW User Manual: User Manual v1.8 Debrisflow, [https://ramms.ch/wp-content/uploads/RAMMS\\_DBF\\_Manual.pdf](https://ramms.ch/wp-content/uploads/RAMMS_DBF_Manual.pdf), last access: 28 March 2025, 2024a.

RAMMS AG: RAMMS:ROCKFALL User Manual: User Manual v1.8 Rockfall, [https://ramms.ch/wp-content/uploads/RAMMS\\_ROCK2\\_Manual.pdf](https://ramms.ch/wp-content/uploads/RAMMS_ROCK2_Manual.pdf), last access: 28 March 2025, 2024b.

Rosser, N. J., Brain, M. J., Petley, D. N., Lim, M., and Norman, E. C.: Coastline retreat via progressive failure of rocky 920 coastal cliffs, Geology, 41, 939–942, <https://doi.org/10.1130/G34371.1>, 2013.

Said, R.: The Geology of Egypt, Routledge, 2017.

Santos Delgado, G., J. Martínez Rubio, Serafín Monterrubio Pérez, and María del Carmen Yenes Varela: Control de 925 Movimientos con Técnica de Láser Escáner 3D en Laderas Inestables de la Cuenca del Duero. El Caso de Aguilarejos

925 (Valladolid), VII Simposio Nacional sobre Taludes y Laderas Inestables: Barcelona, 27-30 de octubre de 2009, 243-255, available at: <https://dialnet.unirioja.es/servlet/articulo?codigo=8801358>, 2009.

930 Solari, L., Ciampalini, A., Raspini, F., Bianchini, S., and Moretti, S.: PSInSAR Analysis in the Pisa Urban Area (Italy): A Case Study of Subsidence Related to Stratigraphical Factors and Urbanization, *Remote Sensing*, 8, 120, <https://doi.org/10.3390/rs8020120>, 2016.

935 Strunden, J., Ehlers, T. A., Brehm, D., and Nettesheim, M.: Spatial and temporal variations in rockfall determined from TLS measurements in a deglaciated valley, Switzerland, *JGR Earth Surface*, 120, 1251-1273, <https://doi.org/10.1002/2014JF003274>, 2015.

940 UNESCO World Heritage: Ancient Thebes with its Necropolis, <https://whc.unesco.org/en/list/87/>, last access: 28 March 2025, 2025.

945 van Overschee, P. and Moor, B. de: A unifying theorem for three subspace system identification algorithms, *Automatica*, 31, 1853-1864, [https://doi.org/10.1016/0005-1098\(95\)00072-0](https://doi.org/10.1016/0005-1098(95)00072-0), available at: <https://www.sciencedirect.com/science/article/pii/0005109895000720>, 1995.

Weber, S., Fäh, D., Beutel, J., Faillettaz, J., Gruber, S., and Vieli, A.: Ambient seismic vibrations in steep bedrock permafrost used to infer variations of ice fill in fractures, *Earth and Planetary Science Letters*, 501, 119-127, <https://doi.org/10.1016/j.epsl.2018.08.042>, 2018.

Williams, J. G., Rosser, N. J., Hardy, R. J., Brain, M. J., and Afana, A. A.: Optimising 4-D surface change detection: an approach for capturing rockfall magnitude-frequency, *Earth Surf. Dynam.*, 6, 101-119, <https://doi.org/10.5194/esurf-6-101-2018>, available at: <https://esurf.copernicus.org/articles/6/101/2018/>, 2018.

950 Winiwarter, L., Anders, K., Czerwonka Schröder, D., and Höfle, B.: Full four dimensional change analysis of topographic point cloud time series using Kalman filtering, *Earth Surf. Dynam.*, 11, 593-613, <https://doi.org/10.5194/esurf-11-593-2023>, 2023.

Winlock, H. E.: *Excavations At Deir El Bahari (1911-1931)*, The MacMillan Company, New York, 1942.

955 Witte, B. and Schmidt, H.: *Vermessungskunde und Grundlagen der Statistik für das Bauwesen*, 6., überarb. Aufl., Wichmann, Heidelberg, 678 pp., 2006.

Zachert, K.: Preliminary report on the activities of the Polish Cliff Mission working at Deir El Bahari between 28th January and 12th March 2014, available at: [https://www.academia.edu/8581023/Preliminary\\_report\\_on\\_the\\_activities\\_of\\_the\\_Polish\\_Cliff\\_Mission\\_working\\_at\\_Deir\\_El\\_Bahari\\_between\\_28th\\_January\\_and\\_12th\\_March\\_2014\\_2014a](https://www.academia.edu/8581023/Preliminary_report_on_the_activities_of_the_Polish_Cliff_Mission_working_at_Deir_El_Bahari_between_28th_January_and_12th_March_2014_2014a).

Zachert, K.: Preliminary report on the results of the works done by the Polish Cliff Mission at Deir el Bahari in the season: October-December 2014, available at: [https://www.academia.edu/12746709/Preliminary\\_report\\_on\\_the\\_results\\_of\\_the\\_works\\_done\\_by\\_the\\_Polish\\_Cliff\\_Mission\\_at\\_Deir\\_el\\_Bahari\\_in\\_the\\_season\\_October-December\\_2014\\_2014b](https://www.academia.edu/12746709/Preliminary_report_on_the_results_of_the_works_done_by_the_Polish_Cliff_Mission_at_Deir_el_Bahari_in_the_season_October-December_2014_2014b).

December 2015, available at:

960 [https://www.academia.edu/20032515/Preliminary\\_report\\_on\\_the\\_works\\_of\\_the\\_Polish\\_Cliff\\_Mission\\_at\\_Deir\\_el\\_Bahari\\_in\\_the\\_season\\_22\\_September\\_10\\_Deecember\\_2015\\_2014e](https://www.academia.edu/20032515/Preliminary_report_on_the_works_of_the_Polish_Cliff_Mission_at_Deir_el_Bahari_in_the_season_22_September_10_Deecember_2015_2014e).

## References

Abdallah, T. and Helal, H.: Risk evaluation of rock mass sliding in El-Deir El-Bahary valley, Luxor, Egypt, Bulletin of the International Association of Engineering Geology-Bulletin de l'Association Internationale de Géologie de l'Ingénieur, 965 42, 3–9, <https://doi.org/10.1007/BF02592614>, 1990.

Abellán, A., Vilaplana, J. M., Calvet, J., García-Sellés, D., and Asensio, E.: Rockfall monitoring by Terrestrial Laser Scanning – case study of the basaltic rock face at Castellfollit de la Roca (Catalonia, Spain), Nat. Hazards Earth Syst. Sci., 11, 829–841, <https://doi.org/10.5194/nhess-11-829-2011>, 2011.

970 Abellán, A., Oppikofer, T., Jaboyedoff, M., Rosser, N. J., Lim, M., and Lato, M. J.: Terrestrial laser scanning of rock slope instabilities, Earth surface processes and landforms, 39, 80–97, <https://doi.org/10.1002/esp.3493>, 2014.

Abellán, A., Calvet, J., Vilaplana, J. M., and Blanchard, J.: Detection and spatial prediction of rockfalls by means of 975 terrestrial laser scanner monitoring, Geomorphology, 119, 162–171, <https://doi.org/10.1016/j.geomorph.2010.03.016>, 2010.

Alcaíno-Olivares, R., Perras, M. A., Ziegler, M., and Maissen, J.: Cliff Stability at Tomb KV42 in the Valley of the Kings, 975 Egypt: A First Approach to Numerical Modelling and Site Investigation, 53rd U.S. Rock Mechanics/Geomechanics Symposium, 2019.

Allen, S. K., Schneider, D., and Owens, I. F.: First approaches towards modelling glacial hazards in the Mount Cook region of New Zealand's Southern Alps, Nat. Hazards Earth Syst. Sci., 9, 481–499, <https://doi.org/10.5194/nhess-9-481-2009>, 2009.

980 Arnold, D.: Die Tempel Ägyptens: Götterwohnungen, Baudenkmäler, Kultstätten, Bechtermünz, Augsburg, 1996.

Aubry, M.-P., Dupuis, C., Berggren, W. A., Ghaly, H., Ward, D., King, C., Knox, R. W. O., Ouda, K., and Youssef, M.: The role of geoarchaeology in the preservation and management of the Theban Necropolis, West Bank, Egypt, Proceedings of the Yorkshire Geological Society, 61, 134–147, <https://doi.org/10.1144/pygs2016-366>, 2016.

985 Aubry, M.-P., Berggren, W. A., Dupuis, C., Ghaly, H., Ward, D., King, C., Knox, R. W. O., Ouda, K., Youssef, M., and Galal, W. F.: Pharaonic necrostratigraphy: a review of geological and archaeological studies in the Theban Necropolis, Luxor, West Bank, Egypt, Terra Nova, 21, 237–256, <https://doi.org/10.1111/j.1365-3121.2009.00872.x>, 2009.

Badawy, A., Abdel-Monem, S. M., Sakr, K., and Ali, S.: Seismicity and kinematic evolution of middle Egypt, Journal of Geodynamics, 42, 28–37, <https://doi.org/10.1016/j.jog.2006.04.003>, 2006.

990 Bartelt, P., Valero, C. V., Feistl, T., Christen, M., Bühler, Y., and Buser, O.: Modelling cohesion in snow avalanche flow, J. Glaciol., 61, 837–850, <https://doi.org/10.3189/2015JoG14J126>, 2015.

Berardino, P., Fornaro, G., Lanari, R., and Sansosti, E.: A new algorithm for surface deformation monitoring based on small baseline differential SAR interferograms, IEEE Trans. Geosci. Remote Sensing, 40, 2375–2383, <https://doi.org/10.1109/TGRS.2002.803792>, 2002.

995 Bertoldi, G., D'Agostino, V., McArdell, B. W., and others: An integrated method for debris flow hazard mapping using 2D runout models, in: Conference proceedings, 12th Congress INTERPRAEVENT, 2012.

Beshr, A. M., Kamel Mohamed, A., ElGalladi, A., Gaber, A., and El-Baz, F.: Structural characteristics of the Qena Bend of the Egyptian Nile River, using remote-sensing and geophysics, The Egyptian Journal of Remote Sensing and Space Science, 24, 999–1011, <https://doi.org/10.1016/j.ejrs.2021.11.005>, 2021.

1000 Bessette-Kirton, E. K., Moore, J. R., Geimer, P. R., Finnegan, R., Häusler, M., and Dzubay, A.: Structural Characterization of a Toppling Rock Slab From Array-Based Ambient Vibration Measurements and Numerical Modal Analysis, JGR Earth Surface, 127, <https://doi.org/10.1029/2022JF006679>, 2022.

1005 Bianchini, S., Palamidessi, A., Centauro, I., Tofani, V., Spizzichino, D., and Tapete, D.: Satellite radar interferometry for the assessment of ground instability at a cultural heritage site: the case study of Civita di Bagnoregio, Italy, Satellite radar interferometry for the assessment of ground instability at a cultural heritage site: the case study of Civita di Bagnoregio, Italy, 1302, 67–78, <https://doi.org/10.19199/0557-1405.rig.25.008>, 2025.

Bolliger, D., Schlunegger, F., and McArdell, B. W.: Comparison of debris flow observations, including fine-sediment grain size and composition and runout model results, at Illgraben, Swiss Alps, *Nat. Hazards Earth Syst. Sci.*, 24, 1035–1049, <https://doi.org/10.5194/nhess-24-1035-2024>, 2024.

1010 Carlà, T., Intrieri, E., Raspini, F., Bardi, F., Farina, P., Ferretti, A., Colombo, D., Novali, F., and Casagli, N.: Perspectives on the prediction of catastrophic slope failures from satellite InSAR, *Scientific reports*, 9, 14137, <https://doi.org/10.1038/s41598-019-50792-y>, 2019.

1015 Caviezel, A., Lu, G., Demmel, S. E., Ringenbach, A., Bühler, Y., Christen, M., and Bartelt, P.: RAMMS:ROCKFALL - A Modern 3-Dimensional Simulation Tool Calibrated on Real World Data, 53rd U.S. Rock Mechanics/Geomechanics Symposium, 2019.

Caviezel, A., Ringenbach, A., Demmel, S. E., Dinneen, C. E., Krebs, N., Bühler, Y., Christen, M., Meyrat, G., Stoffel, A., Hafner, E., Eberhard, L. A., Rickenbach, D. von, Simmler, K., Mayer, P., Niklaus, P. S., Birchler, T., Aebi, T., Cavigelli, L., Schaffner, M., Rickli, S., Schnetzler, C., Magno, M., Benini, L., and Bartelt, P.: The relevance of rock shape over mass-implications for rockfall hazard assessments, *Nature communications*, 12, 5546, <https://doi.org/10.1038/s41467-021-25794-y>, 2021.

1020 Chen, C. W. and Zebker, H. A.: Phase unwrapping for large SAR interferograms: statistical segmentation and generalized network models, *IEEE Trans. Geosci. Remote Sensing*, 40, 1709–1719, <https://doi.org/10.1109/TGRS.2002.802453>, 2002.

1025 Christen, M., Bühler, Y., Bartelt, P., Leine, R., Glover, J., Schweizer, A., Graf, C., McArdell, B. W., Gerber, W., Deubelbeiss, Y., and others: Integral hazard management using a unified software environment, in: 12th Congress Interpraevent, 77–86, 2012.

Chudzik, P., El Younsy, A.-R. M., Galal, W. F., and Salman, A. M.: Geological appraisal of the Theban cliff overhanging the Hatshepsut temple at Deir el-Bahari, *Polish Archaeology in the Mediterranean*, 30, 275–295, 2022.

Cleveland, R. B.: STL: A seasonal-trend decomposition procedure based on loess, *J Off Stat*, 6, 3–73, 1990.

1030 Colesanti, C. and Wasowski, J.: Investigating landslides with space-borne Synthetic Aperture Radar (SAR) interferometry, *Engineering Geology*, 88, 173–199, <https://doi.org/10.1016/j.enggeo.2006.09.013>, 2006.

Collins, B. D. and Stock, G. M.: Rockfall triggering by cyclic thermal stressing of exfoliation fractures, *Nature Geosci*, 9, 395–400, <https://doi.org/10.1038/ngeo2686>, 2016.

1035 Corominas, J., Matas, G., and Ruiz-Carulla, R.: Quantitative analysis of risk from fragmental rockfalls, *Landslides*, 16, 5–21, <https://doi.org/10.1007/s10346-018-1087-9>, available at: <https://link.springer.com/article/10.1007/s10346-018-1087-9>, 2019.

Ćwiek, A.: Old and Middle Kingdom tradition in the Temple of Hatshepsut at Deir el-Bahari, *Études et Travaux (Institut des Cultures Méditerranéennes et Orientales de l'Académie Polonaise des Sciences)*, 61–93, 2014.

Dehls, J. F., Bredal, M., Penna, I., Larsen, Y., Aslan, G., Bendle, J., Böhme, M., Hermanns, R., Haugsnes, V. S., and Noel, F.: InSAR Norway: Advancing Geohazard Understanding through Wide-Area Analysis, 2025.

1040 Dietrich, A. and Krautblatter, M.: Deciphering controls for debris-flow erosion derived from a LiDAR-recorded extreme event and a calibrated numerical model (Roßbichelbach, Germany), *Earth surface processes and landforms*, 44, 1346–1361, <https://doi.org/10.1002/esp.4578>, 2019.

Draebing, D., Mayer, T., McColl, S., Schlecker, M., and Jacobs, B.: Relief and elevation set limits on mountain size, <https://doi.org/10.21203/rs.3.rs-5156557/v1>, available at: <https://www.researchsquare.com/article/rs-5156557/v1>, 2024.

1045 Draebing, D., Mayer, T., Jacobs, B., and McColl, S. T.: Alpine rockwall erosion patterns follow elevation-dependent climate trajectories, *Commun Earth Environ*, 3, 1–12, <https://doi.org/10.1038/s43247-022-00348-2>, available at: <https://www.nature.com/articles/s43247-022-00348-2>, 2022.

Dupuis, C., Aubry, M.-P., King, C., Knox, R. W., Berggren, W. A., Youssef, M., Galal, W. F., and Roche, M.: Genesis and geometry of tilted blocks in the Theban Hills, near Luxor (Upper Egypt), *Journal of African Earth Sciences*, 61, 245–267, <https://doi.org/10.1016/j.jafrearsci.2011.06.001>, 2011.

1050 Engen, S. H., Gjerde, M., Scheiber, T., Seier, G., Elvehøy, H., Abermann, J., Nesje, A., Winkler, S., Haualand, K. F., Rüther, D. C., Maschler, A., Robson, B. A., and Yde, J. C.: Investigation of the 2010 rock avalanche onto the regenerated glacier Brenndalsbreen, Norway, *Landslides*, 21, 2051–2072, <https://doi.org/10.1007/s10346-024-02275-z>, 2024.

1055 Erismann, T. H. and Abele, G.: *Dynamics of rockslides and rockfalls: With 10 tables*, Springer, Berlin, Heidelberg, 316 pp., 2001.

Ezzy, M., Jacobs, B., Krautblatter, M., Grosse, C. U., Helal, H., and Ismael, M.: Assessment of the rock fall geo-hazards of the sub-vertical rock cliffs behind the Mortuary Temple of Hatshepsut (MTH), Luxor, Egypt, *Engineering Geology*, 358, 108429, <https://doi.org/10.1016/j.enggeo.2025.108429>, 2025.

1060 Falco, A. de, Resta, C., and Squeglia, N.: Satellite and on-site monitoring of subsidence for heritage preservation: A critical comparison from Piazza del Duomo in Pisa, Italy, in: *Geotechnical Engineering for the Preservation of Monuments and Historic Sites III*, edited by: Lancellotta, R., Viggiani, C., Flora, A., Silva, F. de, and Mele, L., CRC Press, London, 548–559, <https://doi.org/10.1201/9781003308867-39>, 2022.

Ferretti, A., Prati, C., and Rocca, F.: Permanent scatterers in SAR interferometry, *IEEE Trans. Geosci. Remote Sensing*, 39, 8–20, <https://doi.org/10.1109/36.898661>, 2001.

1065 Ferretti, A., Fumagalli, A., Novali, F., Prati, C., Rocca, F., and Rucci, A.: A New Algorithm for Processing Interferometric Data-Stacks: SqueeSAR, *IEEE Trans. Geosci. Remote Sensing*, 49, 3460–3470, <https://doi.org/10.1109/TGRS.2011.2124465>, 2011.

Frank, F., McArdell, B. W., Oggier, N., Baer, P., Christen, M., and Vieli, A.: Debris-flow modeling at Meretschibach and Bondasca catchments, Switzerland: sensitivity testing of field-data-based entrainment model, *Nat. Hazards Earth Syst. Sci.*, 17, 801–815, <https://doi.org/10.5194/nhess-17-801-2017>, 2017.

1070 Gado, T. A., El-Hagrsy, R. M., and Rashwan, I. M. H.: Projection of rainfall variability in Egypt by regional climate model simulations, *Journal of Water and Climate Change*, 13, 2872–2894, <https://doi.org/10.2166/wcc.2022.003>, 2022.

Gaisecker, T. and Czerwonka-Schröder, D.: RIEGL V-Line Scanners for Permanent Monitoring Applications and integration capabilities into customers risk management, [White Paper], 2023.

1075 Gigli, G., Morelli, S., Fornera, S., and Casagli, N.: Terrestrial laser scanner and geomechanical surveys for the rapid evaluation of rock fall susceptibility scenarios, *Landslides*, 11, 1–14, <https://doi.org/10.1007/s10346-012-0374-0>, 2014.

Gili, J. A., Ruiz-Carulla, R., Matas, G., Moya, J., Prades, A., Corominas, J., Lantada, N., Núñez-Andrés, M. A., Buill, F., Puig, C., Martínez-Bofill, J., Saló, L., and Mavrouli, O.: Rockfalls: analysis of the block fragmentation through field experiments, *Landslides*, 19, 1009–1029, <https://doi.org/10.1007/s10346-021-01837-9>, 2022.

1080 Graber, A. and Santi, P.: Power law models for rockfall frequency-magnitude distributions: review and identification of factors that influence the scaling exponent, *Geomorphology*, 418, 108463, <https://doi.org/10.1016/j.geomorph.2022.108463>, 2022.

Graf, C., Christen, M., McArdell, B. W., and Bartelt, P.: Overview of a decade of applied debris-flow runout modeling in Switzerland, An: challenges and recommendations, 2019.

1085 Haas, T. de, McArdell, B. W., Conway, S. J., McElwaine, J. N., Kleinhans, M. G., Salese, F., and Grindrod, P. M.: Initiation and Flow Conditions of Contemporary Flows in Martian Gullies, *Journal of geophysical research. Planets*, 124, 2246–2271, <https://doi.org/10.1029/2018JE005899>, 2019.

Hanssen, R. F.: Subsidence monitoring using contiguous and PS-InSAR: Quality assessment based on precision and reliability, *Proc. 11th FIG Sym. Def. Measur.*, Santorini, Grecia, 2003.

1090 Hartmeyer, I., Keuschnig, M., Delleske, R., Krautblatter, M., Lang, A., Schrott, L., Prasicek, G., and Otto, J.-C.: A 6-year lidar survey reveals enhanced rockwall retreat and modified rockfall magnitudes/frequencies in deglaciating cirques, *Earth Surf. Dynam.*, 8, 753–768, <https://doi.org/10.5194/esurf-8-753-2020>, available at: <https://esurf.copernicus.org/articles/8/753/2020/esurf-8-753-2020.html>, 2020a.

1095 Hartmeyer, I., Delleske, R., Keuschnig, M., Krautblatter, M., Lang, A., Schrott, L., and Otto, J.-C.: Current glacier recession causes significant rockfall increase: the immediate paraglacial response of deglaciating cirque walls, *Earth Surf. Dynam.*, 8, 729–751, <https://doi.org/10.5194/esurf-8-729-2020>, 2020b.

Hesthammer, J. and Fossen, H.: Evolution and geometries of gravitational collapse structures with examples from the Statfjord Field, northern North Sea, *Marine and Petroleum Geology*, 16, 259–281, 1999.

1100 Hungr, O., Leroueil, S., and Picarelli, L.: The Varnes classification of landslide types, an update, *Landslides*, 11, 167–194, <https://doi.org/10.1007/s10346-013-0436-y>, available at: <https://link.springer.com/article/10.1007/s10346-013-0436-y>, 2014.

Intrieri, E., Raspini, F., Fumagalli, A., Lu, P., Del Conte, S., Farina, P., Allievi, J., Ferretti, A., and Casagli, N.: The Maoxian landslide as seen from space: detecting precursors of failure with Sentinel-1 data, *Landslides*, 15, 123–133, <https://doi.org/10.1007/s10346-017-0915-7>, 2018.

1105 Jaboyedoff, M., Oppikofer, T., Abellán, A., Derron, M.-H., Loyer, A., Metzger, R., and Pedrazzini, A.: Use of LIDAR in landslide investigations: a review, *Natural Hazards*, 61, 5–28, <https://doi.org/10.1007/s11069-010-9634-2>, 2012.

Jackson, R. L., Green, I., and Marghithu, D. B.: Predicting the coefficient of restitution of impacting elastic-perfectly plastic spheres, *Nonlinear Dyn*, 60, 217–229, <https://doi.org/10.1007/s11071-009-9591-z>, 2010.

1110 Jacobs, B. and Krautblatter, M.: LiDAR-basierte Quantifizierung von strukturellen Einflüssen auf Steinschlagaktivität in alpinen Kalksteinwänden., in: *Fachsektionstage Geotechnik - Interdisziplinäres Forum: 6.-8. September 2017, Congress Centrum Würzburg Tagungsband*, 2017.

Jacobs, B., Stammberger, V., and Krautblatter, M.: Geomorphic Hazard Mitigation in touristically developed Alpine Gorges: a Benchmark Study in the Höllental Gorge, Bavaria., in: *INTERPRAEVENT 2024 Conference Proceedings*, 2024.

Karakhanyan, A., Avagyan, A., and Sourouzian, H.: Archaeoseismological studies at the temple of Amenhotep III, Luxor, Egypt, *Ancient Earthquakes*, 471, 199, 2010.

1115 Kenner, R., Gischig, V., Gojcic, Z., Quéau, Y., Kienholz, C., Fagi, D., Thöny, R., and Bonanomi, Y.: The potential of point clouds for the analysis of rock kinematics in large slope instabilities: examples from the Swiss Alps: Brinzauls, Pizzo Cengalo and Spizte Stei, *Landslides*, 19, 1357–1377, <https://doi.org/10.1007/s10346-022-01852-4>, 2022.

King, C., Dupuis, C., Aubry, M.-P., Berggren, W. A., Knox, R. O., Galal, W. F., and Baele, J.-M.: Anatomy of a mountain: The Thebes Limestone Formation (Lower Eocene) at Gebel Gurnah, Luxor, Nile Valley, Upper Egypt, *Journal of African Earth Sciences*, 136, 61–108, <https://doi.org/10.1016/j.jafrearsci.2017.05.008>, 2017.

1120 Klemm, R. and Klemm, D. D.: Steine und Steinbrüche im Alten Ägypten, Springer Berlin Heidelberg, Berlin, Heidelberg, 1993.

Krautblatter, M. and Moser, M.: A nonlinear model coupling rockfall and rainfall intensity based on a four year measurement in a high Alpine rock wall (Reintal, German Alps), *Nat. Hazards Earth Syst. Sci.*, 9, 1425–1432, <https://doi.org/10.5194/nhess-9-1425-2009>, available at: <https://nhess.copernicus.org/articles/9/1425/2009/>, 2009.

1125 Kromer, R., Lato, M., Hutchinson, D. J., Gauthier, D., and Edwards, T.: Managing rockfall risk through baseline monitoring of precursors using a terrestrial laser scanner, *Can. Geotech. J.*, 54, 953–967, <https://doi.org/10.1139/cgj-2016-0178>, 2017a.

Kromer, R. A., Abellán, A., Hutchinson, D. J., Lato, M., Chanut, M.-A., Dubois, L., and Jaboyedoff, M.: Automated terrestrial laser scanning with near-real-time change detection – monitoring of the Séchilienne landslide, *Earth Surf. Dynam.*, 5, 293–310, <https://doi.org/10.5194/esurf-5-293-2017>, 2017b.

1130 Kumar, S., Sharma, A., and Singh, K.: A Comprehensive Review on Debris Flow Landslide Assessment Using Rapid Mass Movement Simulation (RAMMS), *Geotech Geol Eng*, 42, 5447–5475, <https://doi.org/10.1007/s10706-024-02887-1>, 2024.

Lague, D., Brodus, N., and Leroux, J.: Accurate 3D comparison of complex topography with terrestrial laser scanner: Application to the Rangitikei canyon (N-Z), *ISPRS Journal of Photogrammetry and Remote Sensing*, 82, 10–26, <https://doi.org/10.1016/j.isprsjprs.2013.04.009>, 2013.

1140 Leinauer, J., Dietze, M., Knapp, S., Scandroglia, R., Jokel, M., and Krautblatter, M.: How water, temperature, and seismicity control the preconditioning of massive rock slope failure (Hochvogel), *Earth Surf. Dynam.*, 12, 1027–1048, <https://doi.org/10.5194/esurf-12-1027-2024>, 2024.

Li, H., Li, X., Li, W., Zhang, S., and Zhou, J.: Quantitative assessment for the rockfall hazard in a post-earthquake high rock slope using terrestrial laser scanning, *Engineering Geology*, 248, 1–13, <https://doi.org/10.1016/j.enggeo.2018.11.003>, 2019.

1145 Lipinska, J.: Deir El-Bahari II: The Temple of Thuthmosis III: the Architecture, 1977.

Lipińska, J.: 'Deir el-Bahari-Temple of Thutmosis III', *Seventy Years of Polish Archaeology in Egypt*, 105–114, 2007.

Margottini, C., Bobrowsky, P., Gigli, G., Ruther, H., Spizzichino, D., and Vlcko, J.: *Rupestrian World Heritage Sites: Instability Investigation and Sustainable Mitigation*, in: *Advancing Culture of Living with Landslides*, edited by: Sassa, K., Mikoš, M., and Yin, Y., Springer International Publishing, Cham, 23–50, [https://doi.org/10.1007/978-3-319-59469-9\\_2](https://doi.org/10.1007/978-3-319-59469-9_2), 2017.

1150 Marija, L., Martin, Z., Jordan, A., and Matthew, P.: Rockfall susceptibility and runout in the Valley of the Kings, *Natural Hazards*, 110, 451–485, <https://doi.org/10.1007/s11069-021-04954-9>, 2022.

Massaro, L., Forte, G., Falco, M. de, Rauseo, F., and Santo, A.: Rockfall source identification and trajectory analysis from UAV-based data in volcano-tectonic areas: a case study from Ischia Island, Southern Italy, *Bulletin of the International Association of Engineering Geology-Bulletin de l'Association Internationale de Géologie de l'Ingénieur*, 83, <https://doi.org/10.1007/s10064-024-03569-1>, 2024.

1155 Matasci, B., Stock, G. M., Jaboyedoff, M., Carrea, D., Collins, B. D., Guérin, A., Matasci, G., and Ravanel, L.: Assessing rockfall susceptibility in steep and overhanging slopes using three-dimensional analysis of failure mechanisms, *Landslides*, 15, 859–878, <https://doi.org/10.1007/s10346-017-0911-y>, available at: <https://link.springer.com/article/10.1007/s10346-017-0911-y>, 2018.

1160 Mendler, A., Rada Erazo, J. D., Ismael, M., Ezzy, M., Jacobs, B., Haberland, C., Krautblatter, M., Helal, H., and Grosse, C. U.: *Vibration Monitoring of the Rock Formation Above the Hatshepsut Temple*, *eJNDT*, 29, <https://doi.org/10.58286/29649>, 2024.

1165 Mohadjer, S., Ehlers, T. A., Nettesheim, M., Ott, M. B., Glotzbach, C., and Drews, R.: Temporal variations in rockfall and rock-wall retreat rates in a deglaciated valley over the past 11 k.y, *Geology*, 48, 594–598, <https://doi.org/10.1130/G47092.1>, 2020.

Moore, J. R., Geimer, P. R., Finnegan, R., and Michel, C.: Dynamic Analysis of a Large Freestanding Rock Tower (Castleton Tower, Utah), *Bulletin of the Seismological Society of America*, 109, 2125–2131, <https://doi.org/10.1785/0120190118>, 2019.

1170 Nakamura, Y.: A method for dynamic characteristics estimation of subsurface using microtremor on the ground surface, *OR or RTR1*, 30, 1989.

Naville, E.: The Temple of Deir El Bahari: Part III, Offices of the Egypt exploration fund, 1913.

Naville, E.: The Temple of Deir El Bahari: Part I, Offices of the Egypt exploration fund, 1907.

1175 Naville, E.: The Temple of Deir El Bahari: Its Plan, its Founders, and its first Explorers, Offices of the Egypt exploration fund, 1894.

Noël, F., Nordang, S. F., Jaboyedoff, M., Digout, M., Guerin, A., Locat, J., and Matasci, B.: Comparing Flow-R, Rockyfor3D and RAMMS to Rockfalls from the Mel de la Niva Mountain: A Benchmarking Exercise, *Geosciences*, 13, 200, <https://doi.org/10.3390/geosciences13070200>, 2023.

1180 Pawlikowski, M. and Wasilewski, M.: Some remarks on jointing in the Theban limestones in the region of Deir el-Bahari, Egypt, *Geologia/Akademia Górniczo-Hutnicza im. Stanisława Staszica w Krakowie*, 30, 47–56, 2004.

Pechnikov, A.: PyGMTSAR (Python InSAR), <https://doi.org/10.5281/zenodo.7725131>, available at: <https://insar.dev>, 2024.

Pedrini, A. de, Ambrosi, C., and Scapozza, C.: The 1513 Monte Crenone rock avalanche: numerical model and geomorphological analysis, *Geogr. Helv.*, 77, 21–37, <https://doi.org/10.5194/gh-77-21-2022>, 2022.

1185 RAMMS AG: RAMMS:DEBRISFLOW User Manual: User Manual v1.8 Debrisflow, [https://ramms.ch/wp-content/uploads/RAMMS\\_DBF\\_Manual.pdf](https://ramms.ch/wp-content/uploads/RAMMS_DBF_Manual.pdf), last access: 28 March 2025, 2024a.

RAMMS AG: RAMMS:ROCKFALL User Manual: User Manual v1.8 Rockfall, [https://ramms.ch/wp-content/uploads/RAMMS\\_ROCK2\\_Manual.pdf](https://ramms.ch/wp-content/uploads/RAMMS_ROCK2_Manual.pdf), last access: 28 March 2025, 2024b.

RIEGL, L. M. S.: Data Sheet, RIEGL VZ-400, 2014-09-19, <https://www.rieglusa.com/wp-content/uploads/vz-400-datasheet-new.pdf>, last access: 10 November 2025, 2014.

1190 Rosser, N. J., Brain, M. J., Petley, D. N., Lim, M., and Norman, E. C.: Coastline retreat via progressive failure of rocky coastal cliffs, *Geology*, 41, 939–942, <https://doi.org/10.1130/G34371.1>, 2013.

Ruiz-Carulla, R., Corominas, J., Gili, J. A., Matas, G., Lantada, N., Moya, J., Prades, A., Núñez-Andrés, M. A., Buill, F., and Puig, C.: Analysis of Fragmentation of Rock Blocks from Real-Scale Tests, *Geosciences*, 10, 308, <https://doi.org/10.3390/geosciences10080308>, 2020.

1195 Said, R.: *The Geology of Egypt*, Routledge, 2017.

Sala, Z., Hutchinson, D. J., and Harrap, R.: Simulation of fragmental rockfalls detected using terrestrial laser scans from rock slopes in south-central British Columbia, Canada, *Nat. Hazards Earth Syst. Sci.*, 19, 2385–2404, <https://doi.org/10.5194/nhess-19-2385-2019>, 2019.

Salm, B.: Flow, flow transition and runout distances of flowing avalanches, *Ann. Glaciol.*, 18, 221–226, <https://doi.org/10.3189/S0260305500011551>, 1993.

1200 Santos Delgado, G., J. Martínez Rubio, Serafin Monterrubio Pérez, and María del Carmen Yenes Varela: Control de Movimientos con Técnica de Láser Escáner 3D en Laderas Inestables de la Cuenca del Duero. El Caso de Aguilarejos (Valladolid), VII Simposio Nacional sobre Taludes y Laderas Inestables: Barcelona, 27-30 de octubre de 2009, 243–255, available at: <https://dialnet.unirioja.es/servlet/articulo?codigo=8801358>, 2009.

1205 Schraml, K., Thomschitz, B., Mc Ardell, B. W., Graf, C., and Kaitna, R.: Modeling debris-flow runout patterns on two alpine fans with different dynamic simulation models, *Nat. Hazards Earth Syst. Sci.*, 15, 1483–1492, <https://doi.org/10.5194/nhess-15-1483-2015>, 2015.

Sellmeier, B. and Thuro, K.: Comparison of two 3D rockfall codes on behalf of a case study in the Bavarian Alps, *Geomechanics and Tunnelling*, 10, 15–23, <https://doi.org/10.1002/geot.201600071>, 2017.

1210 Shen, N., Wang, B., Ma, H., Zhao, X., Zhou, Y., Zhang, Z., and Xu, J.: A review of terrestrial laser scanning (TLS)-based technologies for deformation monitoring in engineering, *Measurement*, 223, 113684, <https://doi.org/10.1016/j.measurement.2023.113684>, 2023.

Solari, L., Ciampalini, A., Raspini, F., Bianchini, S., and Moretti, S.: PSInSAR Analysis in the Pisa Urban Area (Italy): A Case Study of Subsidence Related to Stratigraphical Factors and Urbanization, *Remote Sensing*, 8, 120, <https://doi.org/10.3390/rs8020120>, 2016.

1215 Spreafico, M. C., Perotti, L., Federico Cervi, Marco Bacenetti, Gabriele Bitelli, Valentina Alena Girelli, Emanuele Mandanici, Maria Alessandra Tini, and Lisa Borgatti: Terrestrial Remote Sensing techniques to complement conventional geomechanical surveys for the assessment of landslide hazard: The San Leo case study (Italy), *European Journal of Remote Sensing*, 48, 639–660, 2015.

1220 Strunden, J., Ehlers, T. A., Brehm, D., and Nettesheim, M.: Spatial and temporal variations in rockfall determined from TLS measurements in a deglaciated valley, Switzerland, *JGR Earth Surface*, 120, 1251–1273, <https://doi.org/10.1002/2014JF003274>, 2015.

Utlu, M., Öztürk, M. Z., Şimşek, M., and Akgümüş, M. F.: Evaluation of rockfall hazard based on UAV technology and 3D Rockfall Simulations, *International Journal of Environment and Geoinformatics*, 10, 1–16, <https://doi.org/10.30897/ijgeo.1323768>, 2023.

1225 van Overschee, P. and Moor, B. de: A unifying theorem for three subspace system identification algorithms, *Automatica*, 31, 1853–1864, [https://doi.org/10.1016/0005-1098\(95\)00072-0](https://doi.org/10.1016/0005-1098(95)00072-0), available at: <https://www.sciencedirect.com/science/article/pii/0005109895000720>, 1995.

Weber, S., Fäh, D., Beutel, J., Faillettaz, J., Gruber, S., and Vieli, A.: Ambient seismic vibrations in steep bedrock permafrost used to infer variations of ice-fill in fractures, *Earth and Planetary Science Letters*, 501, 119–127, <https://doi.org/10.1016/j.epsl.2018.08.042>, 2018.

Wendeler, C., Bühler, Y., Bartelt, P., and Glover, J.: Application of three-dimensional rockfall modelling to rock face engineering, *Geomechanics and Tunnelling*, 10, 74–80, <https://doi.org/10.1002/geot.201600073>, 2017.

Williams, J. G., Rosser, N. J., Hardy, R. J., Brain, M. J., and Afana, A. A.: Optimising 4-D surface change detection: an approach for capturing rockfall magnitude–frequency, *Earth Surf. Dynam.*, 6, 101–119, <https://doi.org/10.5194/esurf-6-101-2018>, available at: <https://esurf.copernicus.org/articles/6/101/2018/>, 2018.

Winiwarter, L., Anders, K., Czerwonka-Schröder, D., and Höfle, B.: Full four-dimensional change analysis of topographic point cloud time series using Kalman filtering, *Earth Surf. Dynam.*, 11, 593–613, <https://doi.org/10.5194/esurf-11-593-2023>, 2023.

1240 Winlock, H. E.: *Excavations At Deir El Bahari* ): 1911–1931, The MacMillan Company, New York, 1942.

Witte, B. and Schmidt, H.: *Vermessungskunde und Grundlagen der Statistik für das Bauwesen*, 6., überarb. Aufl., Wichmann, Heidelberg, 678 pp., 2006.

Wyllie, D. C.: *Rock fall engineering*, First issued in paperback, CRC Press Taylor & Francis Group, Boca Raton, London, New York, 243 pp., 2017.

1245 Zachert, K.: Preliminary report on the activities of the Polish Cliff Mission working at Deir El-Bahari between 28th January and 12th March 2014, available at:  
[https://www.academia.edu/8581023/Preliminary\\_report\\_on\\_the\\_activities\\_of\\_the\\_Polish\\_Cliff\\_Mission\\_working\\_at\\_Deir\\_El\\_Bahari\\_between\\_28th\\_January\\_and\\_12th\\_March\\_2014](https://www.academia.edu/8581023/Preliminary_report_on_the_activities_of_the_Polish_Cliff_Mission_working_at_Deir_El_Bahari_between_28th_January_and_12th_March_2014), 2014a.

Zachert, K.: Preliminary report on the results of the works done by the Polish Cliff Mission at Deir el-Bahari in the season:  
1250 October–December 2014, available at:  
[https://www.academia.edu/12746709/Preliminary\\_report\\_on\\_the\\_results\\_of\\_the\\_works\\_done\\_by\\_the\\_Polish\\_Cliff\\_Mission\\_at\\_Deir\\_el\\_Bahari\\_in\\_the\\_season\\_October\\_December\\_2014](https://www.academia.edu/12746709/Preliminary_report_on_the_results_of_the_works_done_by_the_Polish_Cliff_Mission_at_Deir_el_Bahari_in_the_season_October_December_2014), 2014b.

Zachert, K.: Preliminary report on the works of the Polish Cliff Mission at Deir el-Bahari in the season: 22 September – 10 December 2015, available at:  
1255 [https://www.academia.edu/20032515/Preliminary\\_report\\_on\\_the\\_works\\_of\\_the\\_Polish\\_Cliff\\_Mission\\_at\\_Deir\\_el\\_Bahari\\_in\\_the\\_season\\_22\\_September\\_10\\_December\\_2015](https://www.academia.edu/20032515/Preliminary_report_on_the_works_of_the_Polish_Cliff_Mission_at_Deir_el_Bahari_in_the_season_22_September_10_December_2015), 2014c.

Zimmermann, F., McArdell, B. W., Rickli, C., and Scheidl, C.: 2D Runout Modelling of Hillslope Debris Flows, Based on Well-Documented Events in Switzerland, *Geosciences*, 10, 70, <https://doi.org/10.3390/geosciences10020070>, 2020.