

# Inventory mapping of forest-covered landslides using Geographic Object-Based Image Analysis (GEOBIA), Jena region, Germany

Ikram Zangana<sup>1</sup>, Rainer Bell<sup>1</sup>, Lucian Drăguț<sup>2</sup>, Flavius Sîrbu<sup>3</sup> and Lothar Schrott<sup>1</sup>

5 <sup>1</sup>Department of Geography, University of Bonn, Bonn, Germany

<sup>2</sup>Department of Geography, West University of Timișoara, Timișoara, Romania

<sup>3</sup>Institute for advanced environmental research, West University of Timișoara, Timișoara, Romania

*Correspondence to:* Ikram Zangana (ikram.zangana@uni-bonn.de)

10 **Abstract.** Landslide inventories are crucial for the assessment of landslide susceptibility and hazard. An analysis of old landslides can reveal periods of intensified landslide activity, but the features of these landslides may have diminished over time, particularly in the context of human impact. However, landslide features are often preserved well under forest cover and are thus valuable for compiling or updating landslide inventories. However, the mapping of these features remains challenging. Light detection and ranging (lidar) analysis and its derivatives are essential in landslide research, particularly in landslide 15 identification and mapping. Unlike the expert-based analysis of lidar derivatives, the use of object-based approaches to map landslides from lidar data (semi)automatically requires further studies. This study adopts geographic-object-based image analysis based solely on lidar derivatives for the inventory mapping of forest-covered old landslides within a middle-mountain region in Jena, Germany, and surrounding areas. A manually prepared expert-based inventory map was used for model training and validation. Lidar derivative data were processed using (a) a default moving-window size ( $3 \times 3$ ; model I) and (b) an optimal 20 window size (model II). Multi-resolution segmentation and support vector machine classification with distinct rule sets were implemented for each model, followed by refinement and accuracy assessment against the inventory map for model performance evaluation. The proposed approach achieved a 70% detection of existing landslides compared with the inventory. Model II outperforms model I in accuracy, as indicated by its superior performance in scarp area detection (15% improvement) and significantly lower false positives (30% reduction). However, although this method excellently identifies and maps forest-25 covered old landslides, its applicability is currently limited to large and medium landslides (area  $> 0.5$  ha). Overall, our findings suggest that landslides worldwide with clear geomorphological signatures in lidar data can be identified using this approach.

## 1 Introduction

Landslides are significant in landform evolution, and numerous regions worldwide have considerable landslide hazard. In certain areas, landslides frequently cause greater mortality and economic loss than other natural hazards, such as earthquakes, 30 volcanic eruptions and floods (Guzzetti et al., 1999; Aksoy and Ercanoglu, 2012; Guzzetti et al., 2021). Landslide hazard is

the probability of a landslide of a specific magnitude occurring in a particular area within a defined time frame (Guzzetti et al., 1999). Landslide hazard assessment necessitates the creation of detailed landslide maps, with landslide inventory maps specifically recording the geographic distribution of documented landslides based on their detection and delineation (Guzzetti et al., 1999). Such inventories are traditionally developed through analyses of aerial photographs, supplemented by fieldwork 35 and collection of historical data (Guzzetti et al., 1999, 2012; Santangelo et al., 2010). Albeit a standard geomorphological practice, the field mapping of landslides, particularly older ones, is hindered by factors such as landslide size, limitations in field perspectives, forest cover or erosion and anthropogenic modifications. Compared with traditional field techniques, remote methods using aerial photographs and high-resolution digital elevation models (DEMs) provide more comprehensive and accurate data, increasing mapping precision (Santangelo et al., 2010; Guzzetti et al., 2012; Bell et al., 2012; Crawford, 2014; 40 Schmaltz et al., 2016; Petschko, Bell, and Glade, 2016; Bernat Gazibara et al., 2019).

In recent decades, geographic-object-based image analysis (GEOBIA) has emerged as a powerful method for semi- or fully automated landform mapping (e.g. Drăguț and Blaschke, 2006; Blaschke, 2010a; Schneeweigt et al., 2010; Seijmonsbergen et al., 2011; Anders et al., 2011, 2013; Drăguț and Eisank, 2012; Zylshal et al., 2013; Eisank et al., 2014; Robb et al., 2015; Pedersen, 2016; Guilbert and Moulin, 2017; Hossain and Chen, 2019). The integration of GEOBIA into 45 semi-automatic landslide mapping is a significant development in this field. Lahousse et al. (2011) developed a multiscale GEOBIA technique for landslide mapping, but it is limited to specific areas and landslide types. Aksoy and Ercanoglu (2012) proposed a semi-automatic inventory mapping method that uses fuzzy logic based on thematic data and spectral information. Feizizadeh and Blaschke (2013) developed a rule-based classification approach utilising satellite data. Hölbling et al. (2016) identified spatiotemporal landslide hotspots by analysing historical and recent aerial photographs. Hölbling et al. (2017) 50 compared GEOBIA and manual mapping approaches and concluded that GEOBIA-based semi-automatic mapping encounters difficulties in areas where landslides are covered by vegetation. Karantanellis et al. (2020, 2021) stated that landslide modelling based on unmanned aerial vehicles (UAVs) enables detailed, automated landslide characterisation, with high adaptability to specific sites. They also found that UAVs enable time- and cost-efficient data collection, whereas machine learning algorithms 55 are effective for local-scale sub-zone landslide mapping when integrated into GEOBIA. Dias et al. (2023) showed that applying GEOBIA-based methods to high-resolution satellite imagery can successfully identify shallow landslides and debris flows with over 70% accuracy. Karantanellis and Hölbling (2025) further emphasised the utility of high-resolution digital data, in combination with GEOBIA-based methods, for improving landslide mapping and assessment accuracy.

Limited studies have explored the use of GEOBIA for landslide mapping in forested regions, particularly in the underexamined context of old landslide inventories. Plank and Martinis (2016) used an object-based and change detection 60 approach with DEM and synthetic-aperture radar (SAR) imagery to map landslides in vegetated areas by integrating pre-event optical and post-event very-high-resolution polarimetric SAR data. However, their study focused only on fresh landslides, not old landslides under forest cover. Comprehensive inventory mapping is required to address this limitation. Eeckhaut et al. (2006, 2012) studied landslides occurring beneath forest cover, achieving a detection rate of approximately 70% using lidar data alone. Their investigation encompassed multiple levels, but the moving-window size of land surface variables (LSVs) for



65 landslide components (e.g. landslide scarp and body) were not adequately addressed; both components were treated using the same window size. Knevels et al. (2019) used open-source software to map forest landslides using GEOBIA. Using high-resolution lidar data, they attained a 69% detection rate relative to manual mapping. Despite using default window sizes, the authors acknowledged the potential of identifying the optimal window size for different landslide portions, possibly enhancing model performance. In summary, previous researchers used default window sizes to calculate LSVs, underscoring the need to  
70 explore optimal moving-window approaches to enhance landslide mapping.

Determining the optimal window sizes for different LSVs relative to specific landforms is critical in semi-automatic landform detection using digital data; a detailed review of scale-related issues is available in Drăguț and Eisank (2011). Seijmonsbergen et al. (2011) demonstrated that using multiple window sizes for LSVs can enhance semi-automatic landform detection. They found that different landscape features are best detected using different window sizes, but they manually  
75 selected these sizes to compare with expert-based mapped features. Pawluszek et al. (2018) investigated the impact of scaling window sizes on the automatic detection of landslides using digital terrain model (DTM) data. After DTM rescaling, the landslide modelling accuracy improved relative to that of the original (non-rescaled) DTM. Sîrbu et al. (2019) developed an automated approach to selecting the optimal window size of each LSV relative to landslide scarps, significantly improving detection accuracy in two study sites in comparison with that under the default selection of window sizes. However, landslide  
80 bodies were not examined in this study. No standard or operational method has been developed to achieve this goal despite the considerable progress in automated landslide mapping.

This study investigates the potential of using GEOBIA and high-resolution DTM data for the semi-automatic mapping of forest-covered old landslides (mainly focus on the deep-seated ‘rotational’ landslides) in middle-mountain regions in Jena, Germany. Specifically, the effectiveness of using lidar data and their derivatives for the semi-automated inventory mapping of  
85 forest-covered landslides is assessed, particularly the role of optimised window sizes. The central research question is as follows: How can DTM derivatives and optimised window sizes enhance the reliability of GEOBIA-based semi-automatic landslide mapping in forested environments? Thus, the influence of optimal window sizes for LSVs on the accuracy of semi-automatic landslide mapping is first determined. This is then compared with results achieved using default window sizes. By addressing these aspects, this study seeks to advance the understanding of, and improve practices in, landslide mapping within  
90 forested environments.

## 2 Study area

The study area is in the eastern part of Thuringia, near the city of Jena, Germany (Figure 1). It is approximately 150 km<sup>2</sup> in size and encompasses two elevation zones. The first zone is a low-elevation area that includes most of the Saale River valley and parts of the Roda River catchment. The other is an elevated zone consisting of a plateau, low mountains and adjacent  
95 slopes at elevations reaching 400 m asl (Zangana et al., 2023). Moreover, the study area is situated within the Thuringian Basin and has two predominant geological formations. The Muschelkalk Formation (limestone) predominates in the higher-altitude

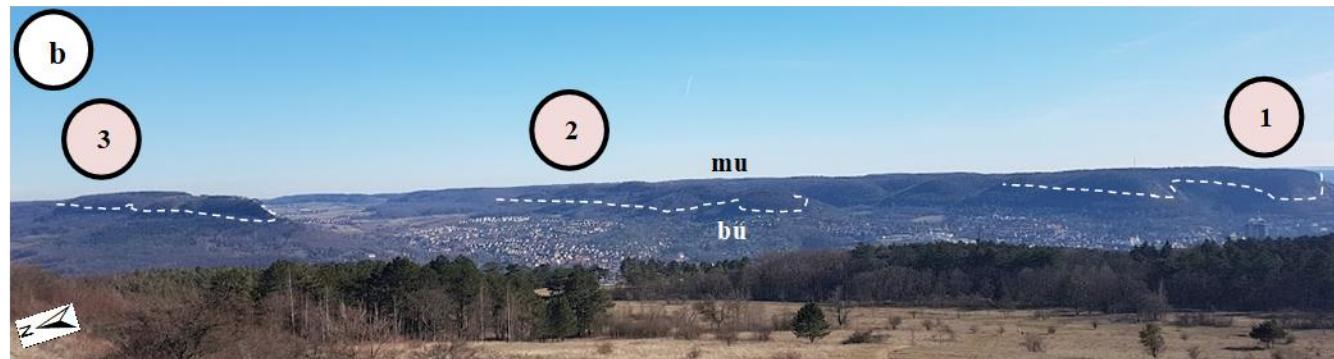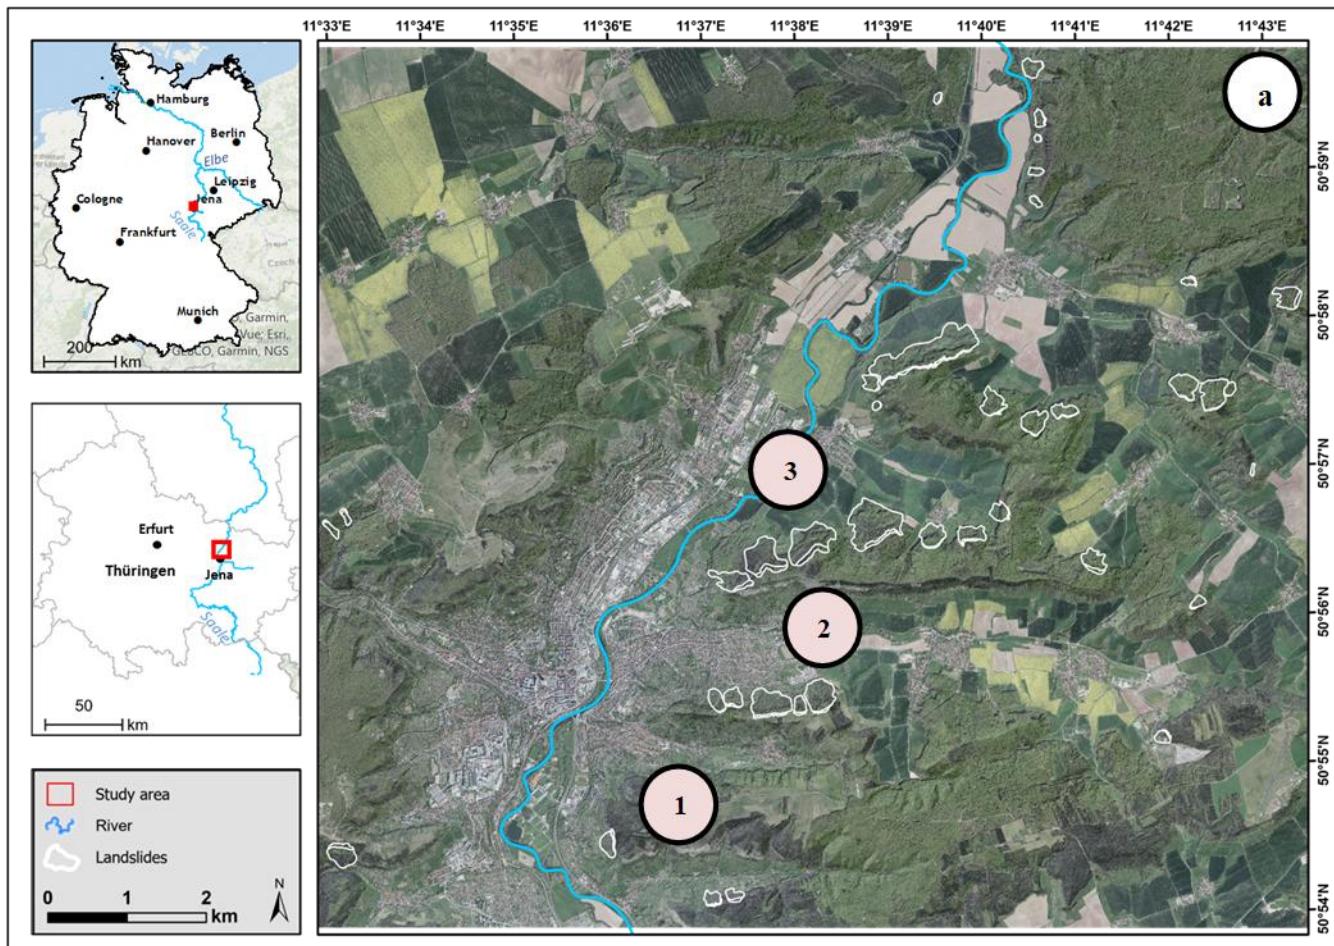

**Figure 1.** Study area. (a) Map: An orthophoto of the study area is overlaid on a hillshade DTM, with the landslide inventories delineated by white polygons. (b) Photo (taken by Ikram Zangana on February 24, 2019): The photo faces the southeast direction, showing the hillslopes of Kerenberge, Hausberg and Jenzig, along with a forested area and part of Jena City. Key locations are marked (1, 2 and 3), and the white dashed lines indicate the lithological boundaries, with Muschelkalk (mu) limestone above and Buntsandstein (bu) sandstone below. The orthophoto and the hillshade-DTM in (a) were obtained from TLUBN (2019) and other datasets are sourced from ESRI (2025).

regions, whereas the Buntsandstein Formation (red sandstone) dominates in the lower-altitude areas (Föhlisch, 2002; Seidel, 1992).

105 The preconditioning factors influencing landslide occurrence in the study area are geological and structural characteristics, particularly the stratigraphic contact between limestone and underlying sandstone. This lithological configuration, when combined with the steep slope geometry of the cuesta escarpments, plays a pivotal role in the slope instability. Such structural settings are known to favour rotational landslides, particularly in cuesta landscapes, where differential weathering and erosion of layered sedimentary rocks promote mass movement. According to Achilles et al. (2016),  
110 the landslides may have been triggered during the Holocene, likely beginning at the end of the Weichselian glaciation, due to increased precipitation, glacial meltwater infiltration, and associated hydrological changes. While the exact age of these landslides remains uncertain, especially when relying solely on LiDAR-derived DTMs, the widespread presence of dense forest cover over many large landslide bodies suggests limited recent activity and supports the possibility of an older origin (Zangana et al., 2024). Most of the mapped landslides occur on hillslopes in the eastern part of the Saale River basin,  
115 predominantly facing north and northwest. However, to the best of our knowledge, there are no recent studies or official records documenting damage or economic losses correlated with older deep-seated landslides in the region.

The annual mean temperature is 9°C–11°C, the summer mean is approximately 16°C–18°C and the winter mean is 0°C–2°C. The mean annual rainfall is 600–800 mm (TMUEN, 2017). Land use is dominated by residences, industries and infrastructure in the valley floors and some gentle slopes. Forests cover steep slopes and high plateaus. Farmlands are primarily  
120 located along the floodplains of the Saale River and its tributaries, whereas grasslands and pastures are more sparsely distributed, mainly in the northern portion of the study area (landnutzung). The soil types in this area include rendzinas (Leptosols), which are on the Muschelkalk Formation, predominantly within the plateau area, and pararendzinas (Pelosols), which are in the Buntsandstein area and on the slopes. However, the Holocene floodplain and flat areas of the region are covered by gley–Vega soil types (Gleysols). Cambisols are found in areas dominated by sandstone, sandstone/siltstone and  
125 claystone sequences of the lower and middle Buntsandstein, while podzols (Podzols) are present in some southern parts of the study area (Rau et al., 2000; Zangana et al., 2023b).

### 3 Methodology

#### 3.1 Data

Landslide mapping is based on lidar–DTM data with a 1 m × 1 m resolution provided by the Thuringian State Office for Soil  
130 Management and Geoinformation (TLUBN, 2019; Zangana et al., 2023a). Different LSVs, namely, slope, topographic openness (TO), curvature (plan and profile), terrain roughness index (TRI) and topographic position index (TPI), were generated using an original DTM. A landslide inventory map (reference map) was created using manual on-screen mapping in ArcMap 10.7. Traditional and multi-directional hillshade were used as the primary visual base, following the method described by Schulz (2004). Hillshades and slope maps were visually evaluated for landslide features such as scarps and bodies

135 by systematically panning through the imagery at scales ranging from 1:1,000 to 1:200 and mapped accordingly at this scale to ensure the correct delineation of landslide boundaries. However, additional LSVs (e.g. curvature, TO, TPI, and TRI) were employed as supplementary layers to facilitate interpretation and boundary delineation, particularly in regions where hillshade and slope alone were inadequate for fully resolving the geomorphic manifestation of landslides. Furthermore, as in the method applied by Zangana et al. (2023b), we incorporated a LSVs-composite map visualisation that improved the detection of 140 morphological features of landslides. Scarps and bodies were mapped separately wherever they could be clearly distinguished. In a few instances, scarp features could not be identified with confidence from the available data. Approximately 10% of the mapped landslides were validated in the field. The inventory primarily includes deep-seated (rotational) landslides (34 landslides), along with a few shallow landslides (6 landslides).


### **3.2 GEOBIA-based landslide inventory mapping**

145 We used the software eCognition 10.3 and developed a structured workflow to design a rule set for semi-automatic landslide mapping. This workflow enabled landslide identification using two distinct models. Model I (MI) used the default window size to calculate the LSVs as a pre-processing step for segmentation and classification, whereas model II (MII) used the optimal window size. The final results were exported as shapefiles to ArcGIS 10.7. The overall methodological framework, consisting of three main stages, is illustrated in Figure 2.

#### **150 3.2.1 STAGE I: Data preparation**

This stage was divided into two main steps. Step 1: A landslide inventory map was manually prepared using DTM hillshade data and a visual analysis of all relevant LSVs. This inventory map served as a reference for model development and as a baseline with which the final GEOBIA results were compared for accuracy assessment (AA). Step 2: ArcGIS 10.7 and R 4.3.2 were used to generate LSVs using different window sizes. For MI, the default window sizes in ArcGIS were applied based on 155 standard raster calculation methods and commonly published values. For MII, we adopted an advanced approach involving the automatic detection of optimal window sizes for each LSV for alignment between landslide-prone and non-landslide areas (Sîrbu et al., 2019).

For model training samples were collected from landslide scarps (MI: 6.09 ha; MII: 1.32), landslide bodies (MI: 36.20 ha; MII: 27.2 ha) non-scarp areas (MI: 9.42 ha; MII: 4.07 ha), non-body areas (MI: 53.95 ha; MII: 41.21 ha). These values 160 represent the total sampled area used for each model (MI and MII). Classification was then performed using unsupervised methods and support vector machines (SVMs; for further details, see Tzotsos and Argialas, 2008; Hong et al., 2017). An algorithm was trained using these samples and then used to classify the data accordingly. For optimal results, this stage was repeated multiple times while adjusting the training samples iteratively to enhance accuracy in comparison with the inventory map.

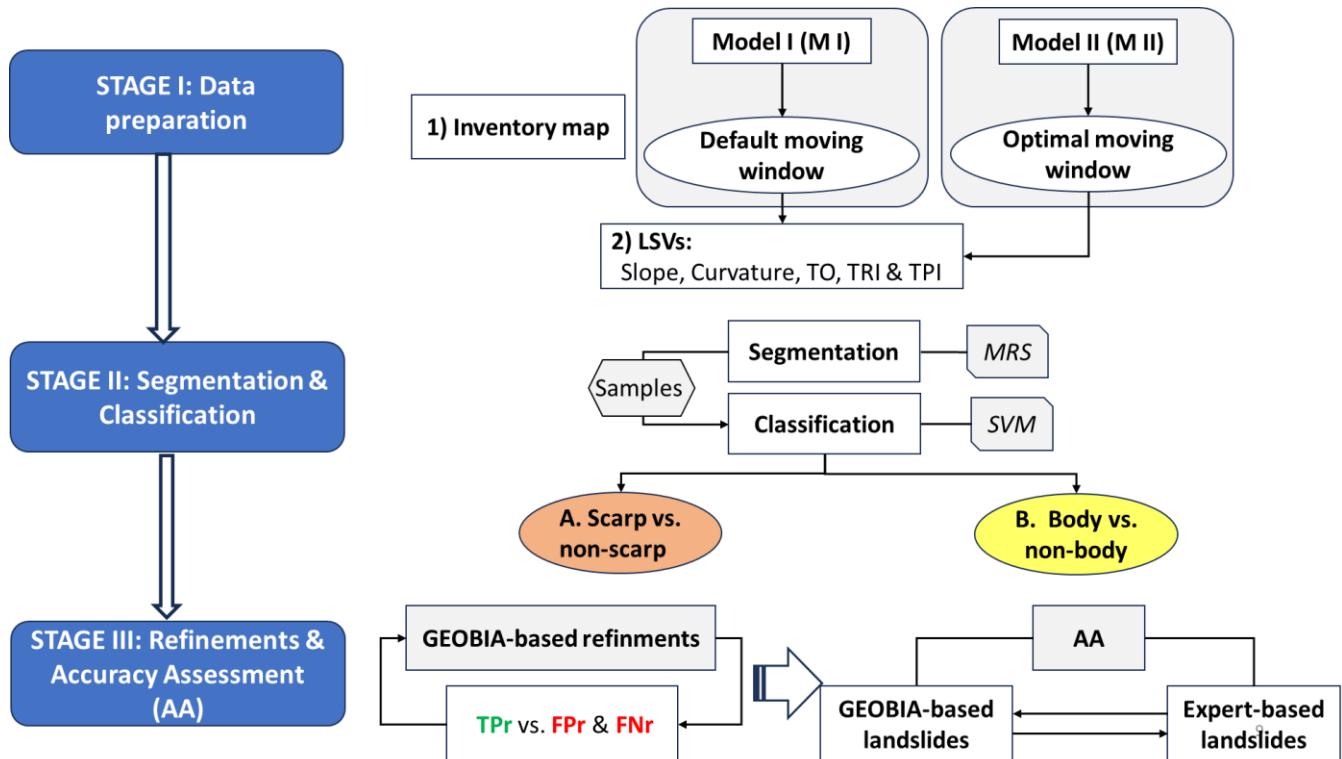

165

**Figure 2.** Flowchart of method used for mapping of landslide scarps and bodies. First, data are prepared using default and optimal window sizes. Then, segmentation and classification are conducted via MRS and SVM. Finally, refinement and accuracy assessment (AA) are performed by comparing the reference map with the GEOBIA results.

170 **3.2.2 STAGE II: Segmentation and classification**

Segmentation and classification were performed using eCognition at two hierarchical levels. Segmentation was conducted using multi-resolution segmentation (MRS; Baatz and Schäpe, 2000) after trial-and-error across different scales (Drăguț et al., 2010; Li et al., 2015) for distinct landslide components (landslide scarps and bodies). Specifically, landslide scarps and bodies were segmented and identified using separate projects and rule sets. MRS with scale parameters of 50 and 20 for landslide 175 scarps using shape of 0.1 and compactness of 0.5 and MRS with scale parameters of 70 and 30 for landslide bodies using shape of 0.1 and compactness of 0.5 achieved the best fit and were thus applied to MI and MII, respectively.

**3.2.3 STAGE III: Refinement and accuracy assessment (AA)**

This stage consisted of two main steps: GEOBIA-based refinement and accuracy assessment (AA). The first, a GEOBIA-based refinement aimed to enhance the initial SVM classification from Stage II by incorporating additional object-based rules. Based 180 on the outcomes of Stage II, an additional stage (Stage III) was developed using expert knowledge and implemented as a rule

set within the eCognition framework. This GEOBIA-based refinement leverages expert-driven interpretation in combination with object-level spatial and contextual information to enhance classification accuracy. Previous studies have demonstrated the value of combining machine learning with rule-based approaches for improving thematic mapping quality (Johnson and Xie, 2011; Eisank et al., 2014; Zylshal et al., 2016; Robson et al., 2020).

185 The refinement process focused on iteratively improving the true positive rate (TPr) while reducing both the false positive rate (FPr) and false negative rate (FNr). This was achieved by assessing a comprehensive set of object-based features derived from morphometric (e.g., slope, curvature, TPI, ...etc.), geometric (e.g., area, shape index, length-to-width ratio), and contextual attributes (e.g., distance to landslide-related objects, and the relative border to neighbor metric). The latter measures the proportion of an object's boundary shared with a predefined class, helping to identify embedded or adjacent features for 190 reclassification. For example, a relative border value of 1 indicates complete enclosure by a reference class, while lower values suggest partial adjacency (for a further and comprehensive overview of the ruleset developed, see Tables A1-B2 in the Appendices).

195 Refinements were conducted using eCognition's interactive visualization tools, enabling semi-automated object filtering and targeted adjustments based on spatial inconsistencies. Objects were assessed through iterative cycles of visual inspection, attribute filtering, and validation against the reference inventory using both number- and area-based accuracy metrics. Key decisions included merging or expanding TP-classified regions and reclassifying ambiguous objects based on rules such as (1) adjacency to existing TP objects, (2) sharing >80% boundary with TPs, and (3) being fully surrounded by TP zones. Importantly, no expansion was allowed into areas clearly identified as non-landslide terrain. This process was repeated until no further improvements were observed. The landslide scarps and bodies were analysed separately, so different criteria 200 and parameters were applied to each of them during the development of the rule set in eCognition. In other words, the landslide scarp area was treated separately from the landslide body area.

205 The second step, called AA, involved comparing the final result of GEOBIA-based refinement (stage III, part 1) with expert-based landslide data (i.e. the inventory map). This comparison helped assess the efficacy of each model (MI and MII) against the reference map. For a comprehensive investigation, AA was conducted separately for landslide scarps and bodies. As seen in Section 3.3, number-based AA, area-based AA and calculation of additional metrics were adopted (Cai et al., 2018; Simoes et al., 2023).

### **3.3 Accuracy assessment**

210 Various metrics were used to evaluate the congruence between the GEOBIA mapping outcomes and the reference map quantitatively. These comparisons were conducted independently per model and per landslide component: landslides scarps and bodies.

### 3.3.1 Thematic accuracy assessment

We assessed the results through number-based and area-based accuracy assessment. First, following Cai et al. (2018), we developed an R script to assess the accuracy of the model results numerically. If the GEOBIA-detected polygon's overlapping area exceeded 50% of the area of the reference landslide polygon, then it was considered a correctly identified landslide  
215 (Eeckhaut et al., 2012; Knevels et al., 2019). The TP, FP and FN numbers and percentages were calculated according to MI and MII. Then, in addition to number-based AA, area-based AA (hectares [ha]) was adopted to obtain more detailed information about the absolute areas correctly detected as landslides (i.e. TP), undetected landslide areas (i.e. FN) and areas incorrectly mapped as landslides (i.e. FP). To achieve this, we overlaid the inventory map polygons (reference map) on the GEOBIA-based polygons, which included these three components, to calculate the percentage of each category and determine  
220 whether the use of the optimal moving-window size in MII improved the semi-automatic GEOBIA-based mapping results (Figure 6). The script for this analysis was developed and implemented in R using the GEOBIA results according to previously reported key concepts and algorithms (for further details, see Eisank et al., 2014; Cai et al., 2018).

### 3.3.2 Segmentation metrics


An R script developed using the *segmetric* package to calculate the segmentation accuracy of the objects of interest through  
225 various metrics (Simoes et al., 2023). As outlined in Table 6, we analysed key metrics relevant to landslide studies: area fit index (AFI), over-segmentation (OS), under-segmentation (US), F-measure, recall and precision. These metrics were based on area proportions, with values between 0 and 1 except for AFI. A value closer to zero indicated a better spatial match between the test and reference datasets (Dias et al., 2023).

## 4 Results

230 This chapter presents the main results of this study, specifically the optimisation results of window sizes for LSVs in MII, the results of GEOBIA-based landslide detection and the model performance evaluation results from different AA approaches.

### 4.1 Optimisation of window sizes for LSVs in MII

Figure 3 shows the variation in the optimal window size for each LSV across multiple runs, highlighting noticeable differences between landslide scarps and bodies. Some LSVs (e.g. TO, plan curvature and profile curvature) have consistent window sizes,  
235 whereas others (e.g. slope and TRI) show greater variability. Table 1 shows the final window sizes used in the analysis for both landslide components in MII, along with the default values used in MI for comparison. The optimal window sizes differ not only between LSVs but also between scarps and bodies within the same LSV. Hence, separate rule sets were developed in eCognition for each landslide component. Segmentation, classification, refinement and AA were then performed independently for the scarps and bodies.

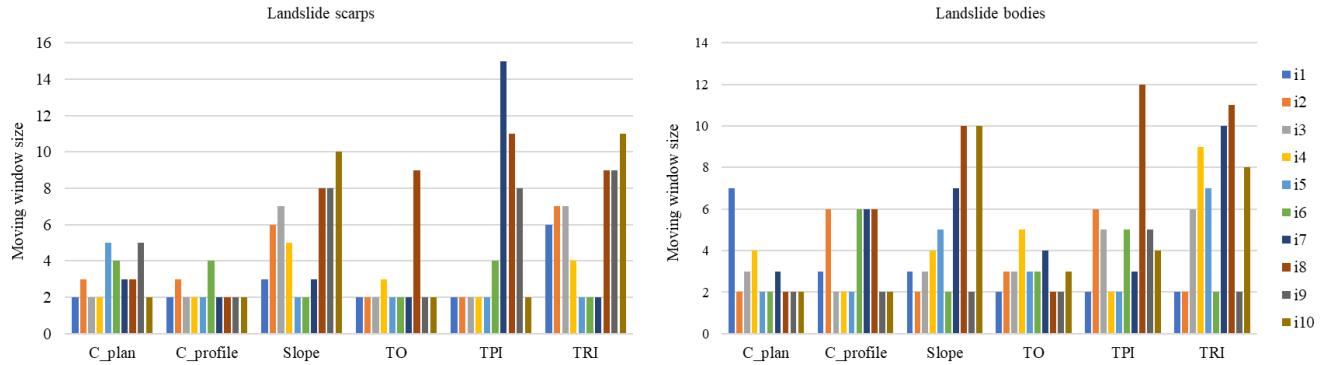

240 **Figure 3.** Optimal window sizes for each LSV in predicting landslide scarps and bodies. Note: i1, i2, ..., i10: number of iterations; C: curvature; TO: topographic openness; TRI: terrain roughness index; TPI: terrain position index.

**Table 1.** LSVs and corresponding window sizes per model.


Models/LSVs		Slope	C_plan	C_profile	TO	TRI	TPI
I *	Scarp & Body	3x3	3x3	-	3x3 & 25x25	3x3	33x33
	Scarp	11x11	7x7	5x5	5x5	7x7	11x11
II **	Body	11x11	5x5	7x7	7x7	9x9	13x13

245 \* Default window size, \*\* optimal window size

#### 4.2 GEOBIA-based landslide modelling results

The GEOBIA-based landslide modelling results, specifically those of landslide scarps and bodies for both models (MI and MII), were compared with the inventory map to assess their spatial correspondence (Figures 4 and 5). Figure 4(a) shows the MI results (default window sizes). The brown and yellow polygons represent the model-detected landslide scarps and bodies, and the blue and pink polygons indicate the landslide scarps and bodies in the reference map for comparison. Figure 5(a) shows the same area but illustrates the MII results. In both figures, the polygons within the black-dashed-line regions are further discussed in Section 5. A visual inspection of these maps shows that MI covers a larger portion of the landslide body areas compared with MII, but MII performs better in detecting scarp zones. However, on-screen analysis shows that MII is more precise than MI for each landslide component, as indicated by the brown and yellow polygons (GEOBIA-based results) and

the blue-(scars) and pink (bodies) polygons (reference map). This is particularly evident when considering the accuracy of landslide size and FPr. These results are assessed more thoroughly in Figure 6 and Section 4.3.

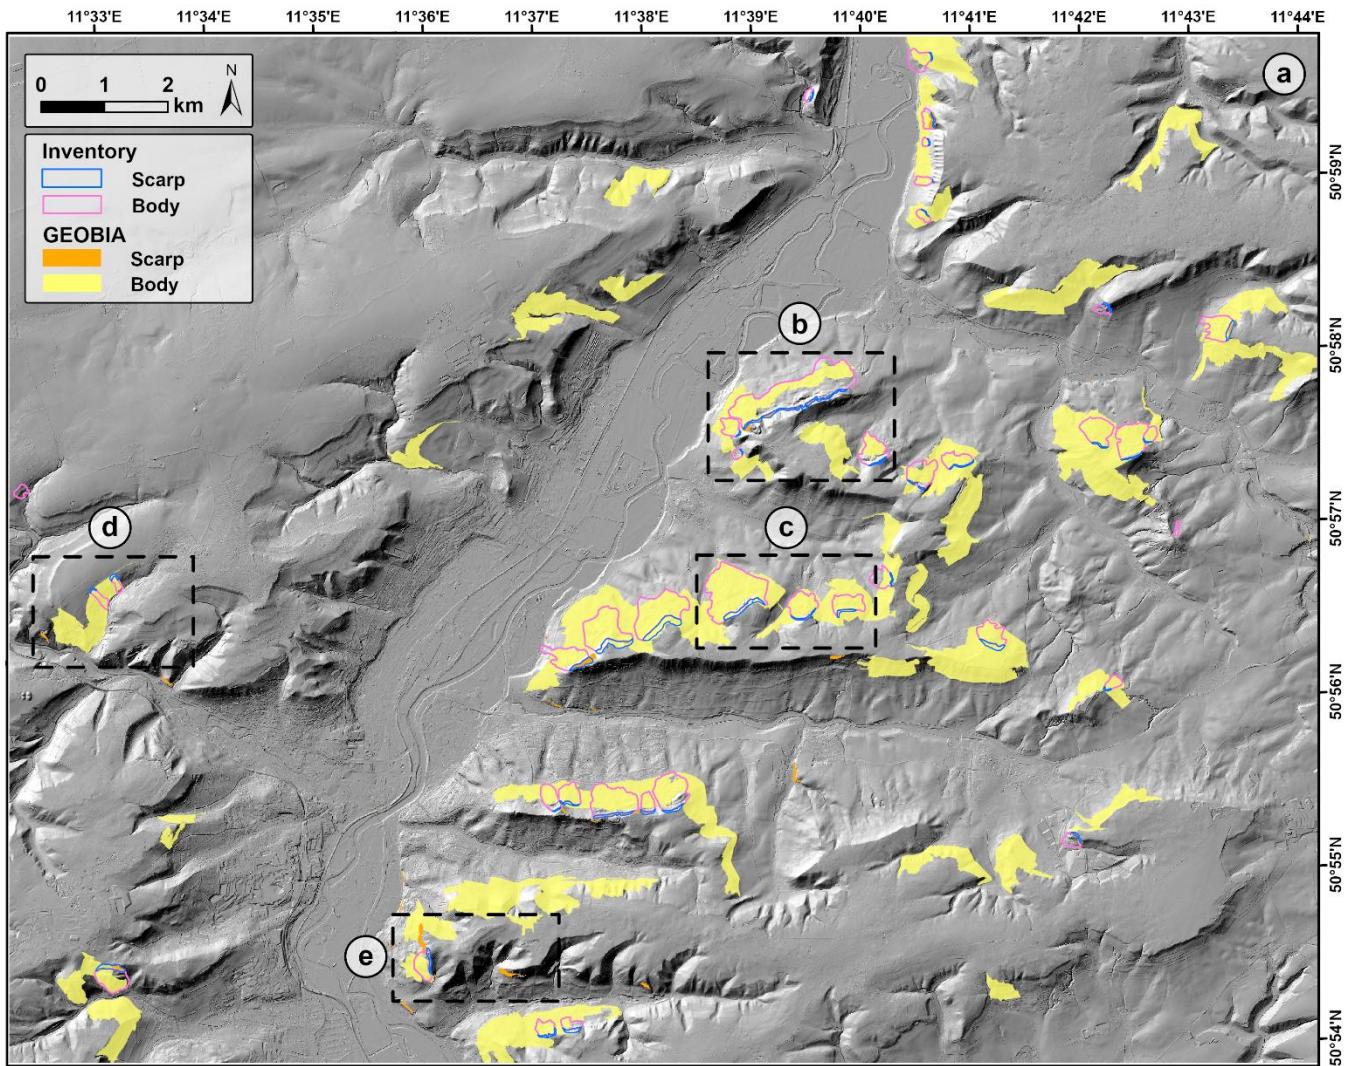

**Figure 4.** Final map of semi-automatic landslide detection using MI, displayed over hillshade DTM (TLUBN, 2019) throughout study area.


260 Detected landslides are shown as coloured polygons (brown: scarp; yellow: body), while the inventory map is also displayed for comparison. The insets outlined by black dotted lines are magnified and analysed in Figure 8.

The morphological characteristics of the landslides (scars and bodies) in the Jena region highlight notable distinctions between these components, as summarized in Tables 2 and 3. The results show that scars have slope mean values of  $48^\circ$  and  $40.5^\circ$  in MI and MII, respectively, whereas bodies maintain a consistent slope mean value of approximately  $20^\circ$  across both models. This suggests that scarp areas are more sensitive to the optimized approach applied in MII, while body

265

areas remain relatively unchanged. Scarps exhibit positive values for plan curvature (C\_plan), while bodies show lower values. Similarly, for profile curvature (C\_profile), scarps display positive values, whereas bodies exhibit negative values, further emphasizing their distinct morphological characteristics. The TRI mean values further differentiate scarps and bodies, with scarps showing significantly higher values (3.73 and 5.09 for MI and MII, respectively) compared to bodies (0.95 and 1.93 for MI and MII, respectively). Additionally, TPI values for scarp areas are higher in MII than in MI, while for body areas, the TPI values are notably lower in MII compared to MI.

270

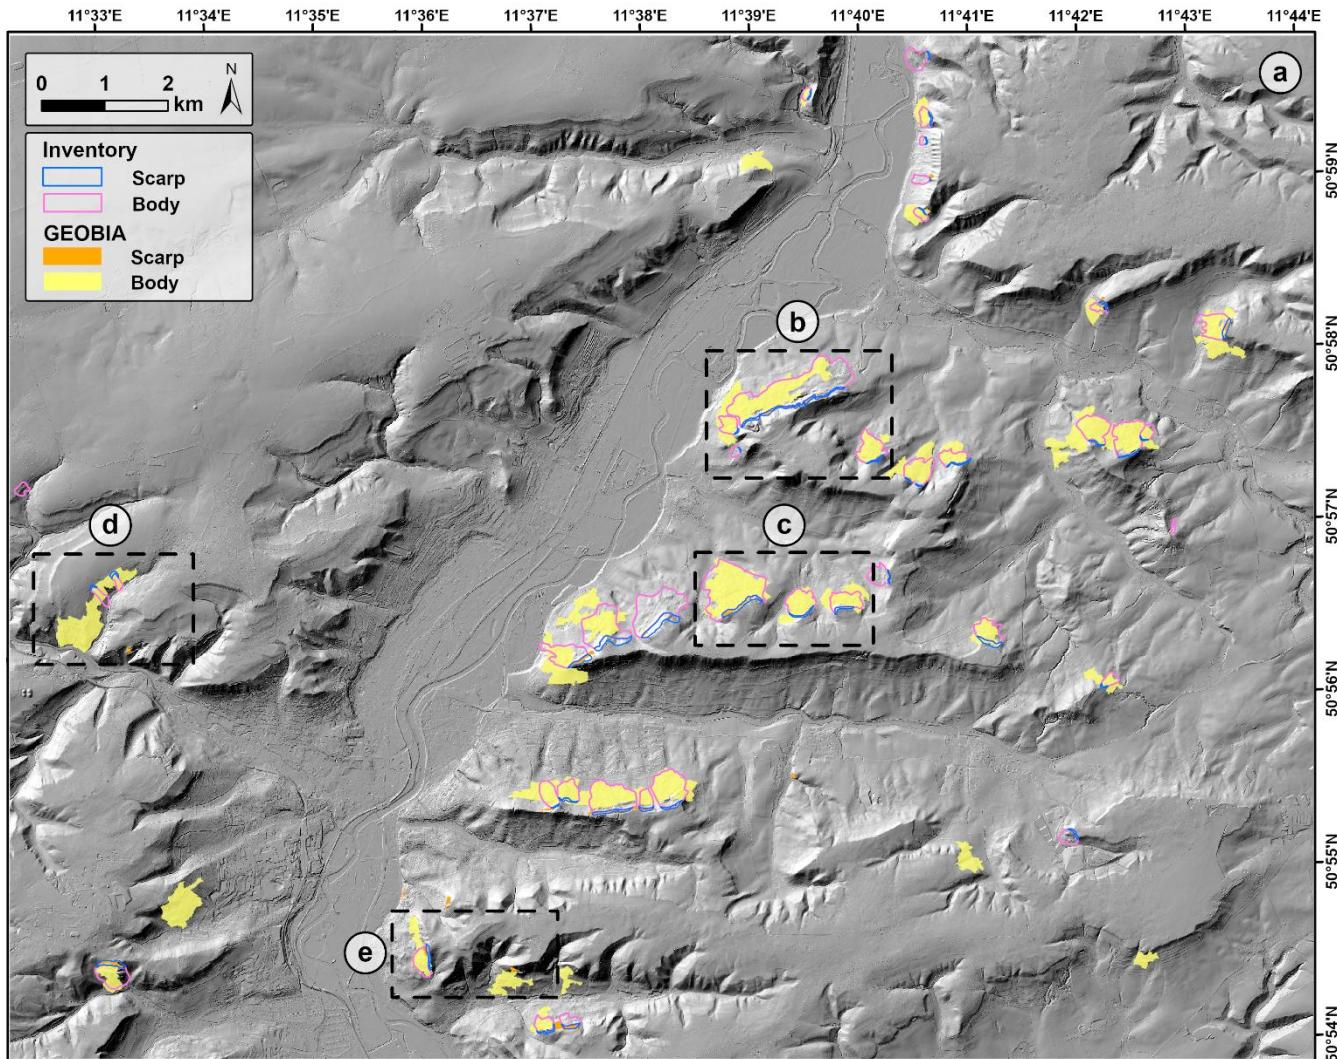

**Figure 5.** Final map of semi-automatic landslide detection using MII, displayed over hillshade DTM (TLUBN, 2019) throughout study area. Detected landslides are shown as coloured polygons (brown: scarps; yellow: bodies), while the inventory map is also displayed for comparison. The insets outlined by black dotted lines are magnified and analysed in Figure 8.

275

Table 2. The morphological characteristics of landslides (scarp and bodies) in Jena region as detected by GEOBIA, Model I.

LSVs/value	Scarp			Body		
	min	max	mean	min	max	mean
Slope (°)	34.9	61.5	48.2	14.88	25.69	20.28
C_plan	-1.04	12.19	5.57	-0.032	0.128	0.048
TO3x3	-0.003	0.029	0.013	-0.00085	0.00051	-0.00017
TO25x25	-0.001	0.099	0.049	-0.00201	0.00373	0.00086
TRI	1.82	5.64	3.73	0.68	1.22	0.95
TPI	0.1	2.8	1.4	-0.07	0.05	-0.01

Table 3. The morphological characteristics of landslides (scarp and bodies) in Jena region as detected by GEOBIA, Model II

LSVs/value	Scarp			Body		
	min	max	mean	min	max	mean
Slope (°)	33.4	47.7	40.5	15.9	27.9	21.9
C_plan	0.0001	0.0205	0.0107	-0.0044	0.0014	-0.0015
C_profile	-0.0028	0.0040	0.0006	-0.0014	-0.0001	-0.0012
TO	-0.0014	0.0086	0.0036	-0.00186	0.00003	-0.00091
TRI	3.77	6.42	5.09	1.32	2.54	1.93
TPI	1.59	13.24	7.41	-3.83	0.11	-1.86

## 280 4.3 Accuracy assessment results

## 4.3.1 Thematic accuracy assessment

The thematic accuracy assessment is conducted using two complementary approaches: object-based (number-based) and area-based accuracy metrics. First, the number-based AA results (Table 4) show a significant improvement in the scarp zones for MII, with a higher TPr and significant reductions in both FPs and FNs. In the landslide body areas, the FPs were 285 also significantly reduced, indicating an overall improvement in classification accuracy under the optimised window size.

Next, the area-based AA results are summarised in Table 5, with MII showing significant improvements over MI. As for scarp detection, MII increases the TP area from 6.3 ha to 9.1 ha and reduces the FNs accordingly, demonstrating better detection performance than MI. Although the FPs remain relatively high, they moderately decrease under MII. As for landslide body detection, MII significantly reduces the FPs from over 760 ha in MI to approximately 155 ha, indicating a significant improvement in mapping accuracy. However, a trade-off is observed, with the FNs increasing slightly. These trends are also noticeable in Figures 6 and 7, which shows a significantly lower FP in MII (red polygons in Figure 7) than in MI (Figure 6).

290


**Table 4.** Number-based comparison of True Positives (TPs), False Positives (FPs) and False Negatives (FNs) in landslides detection per model.

Landslide	Model	TP	(%)	FP	(%)	FN	(%)
<b>Scars</b>	I	21	55.2	24	53.3	17	44.8
	II	25	65.8	5	16.6	13	34.2
<b>Bodies</b>	I	17	42.5	21	52.5	23	57.5
	II	21	52.5	8	20.0	19	47.5
<b>Inventory 38 (scars) / 40 (bodies)</b>							

295

**Table 5.** Comparison of True Positives (TPs), False Positives (FPs) and False Negatives (FNs) in landslides detection per model (area in hectares).

Landslide	Model	TP	%	FP	%	FN	%
<b>Scars</b>	I	191.2	78.7	769.2	80.0	51.8	21.3
	II	161.9	66.6	155.8	49.0	81.0	33.3
<b>Bodies</b>	I	6.3	30.6	9.3	59.6	14.3	69.3
	II	9.1	43.8	8.0	47.0	11.6	56.2
<b>Inventory 20.7 (scars)/ 243 (bodies)</b>							

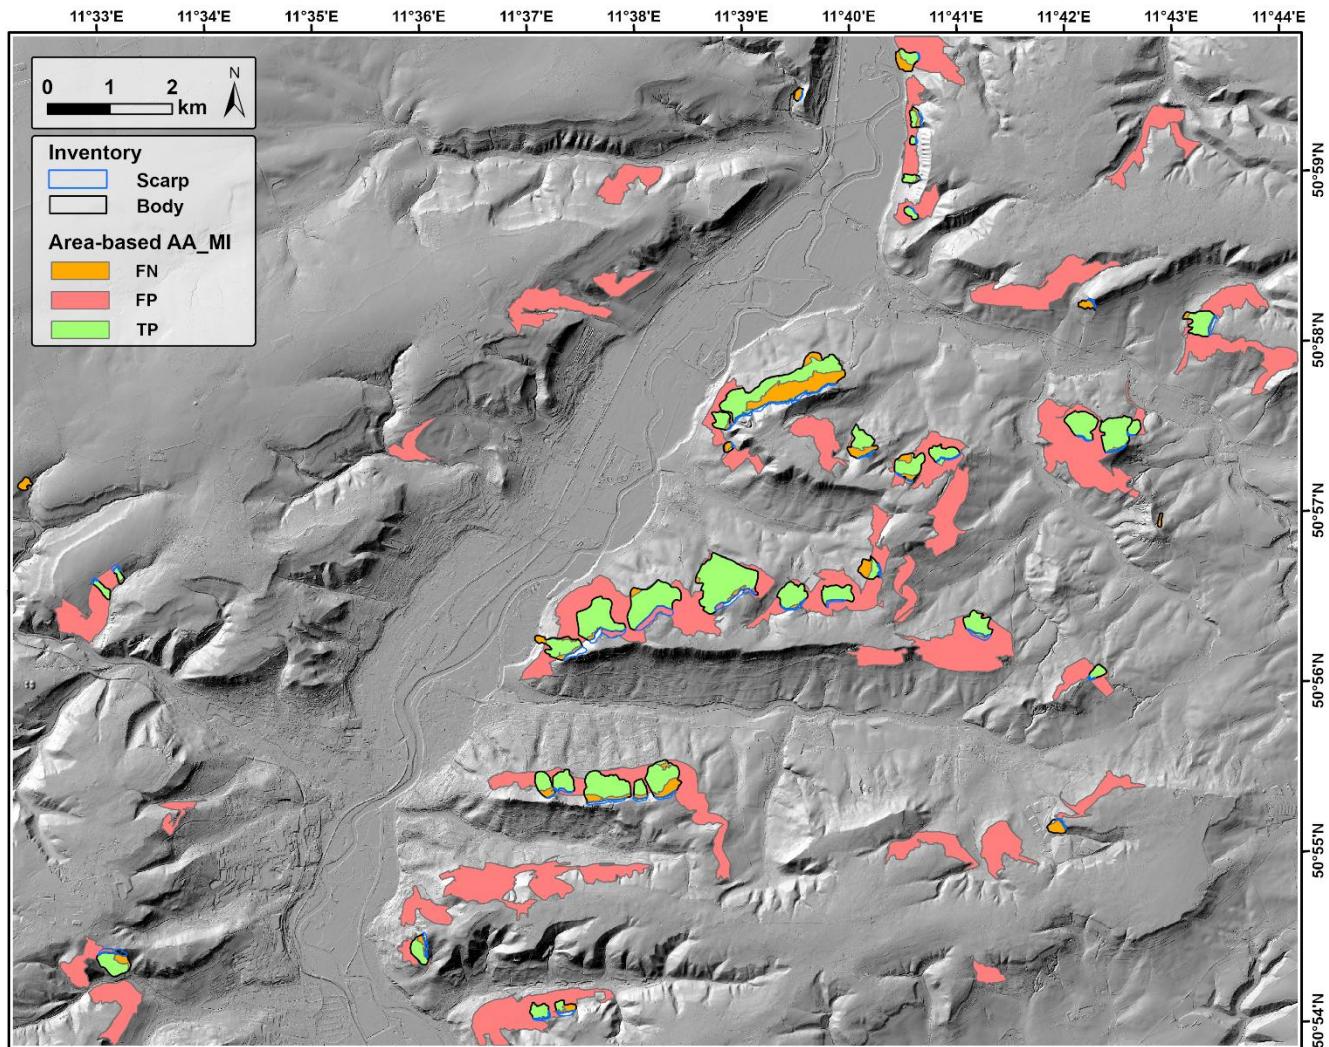


300 **Figure 6.** Area-based accuracy assessment of landslide body mapping using GEOBIA in Model I (True Positives (TP), False Positives (FP), and False Negatives (FN)), displayed over hillshade DTM (TLUBN, 2019).

#### 4.3.2 Segmentation metrics

The US values for both models are below 0.50 in landslide scarp detection. Specifically, the US value drops from 0.84 in MI

305 to 0.60 in MII, demonstrating that the use of the optimal window size in MII significantly improves the results (Table 6). Likewise, the OS value for scarps decreases from 0.53 in MI to 0.33 in MII. Additionally, the precision value improves in MII, confirming the effectiveness of the optimised approach.

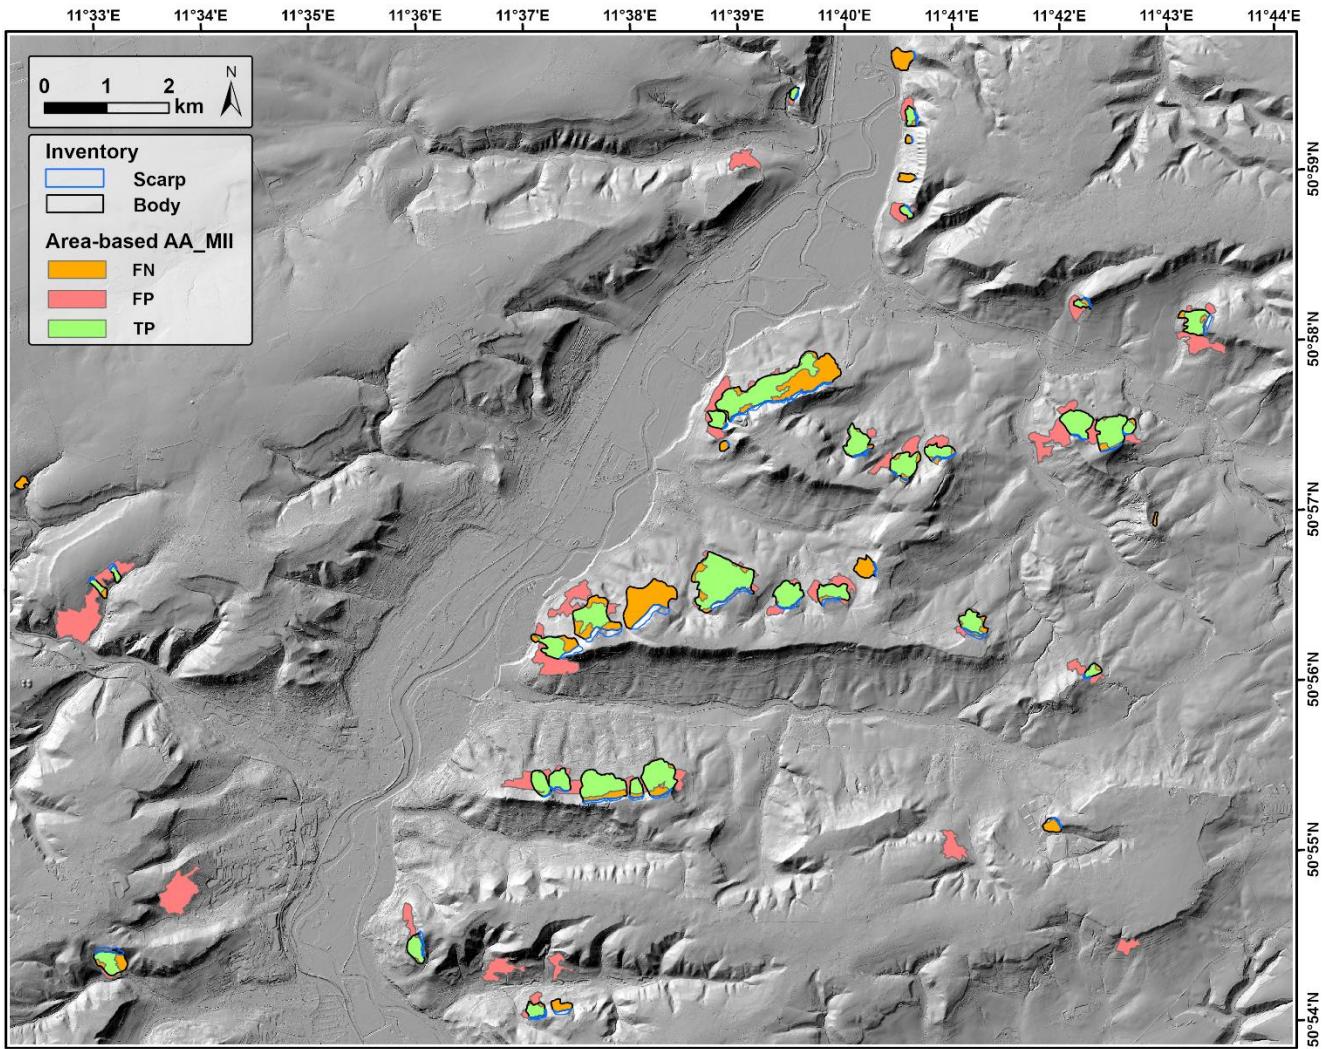

**Figure 7.** Area-based accuracy assessment of landslide body mapping using GEOBIA in Model II (True Positives (TP), False Positives (FP), and False Negatives (FN)), displayed over hillshade DTM (TLUBN, 2019).

## 5 Discussion

This study highlights the efficacy of integrating GEOBIA with high-resolution DTM data for the inventory mapping of forest-covered old landslides in middle-mountain regions. The implementation of the optimal window size (MII) substantially enhances landslide detection accuracy while significantly reducing both the number and total area of FPs relative to the use of the default window size (MI). These results align with those of Sîrbu et al. (2019), who demonstrated window size variability across different LSVs for landslide scarps. Our study broadens this understanding by analysing both scarp and landslide body areas, revealing that window sizes differ not only across LSVs but also between landslide scarp and body areas within the

same LSVs (Figure 3, Table 1). Consequently, landslide scarps and bodies should be detected separately within the model for an accurate analysis of each landslide component.

In our study area, large forest-covered landslides ( $>0.5$  ha) are more successfully detected than smaller landslides, as they mostly show a strong geomorphological signature (Figure 8(b)). This is similar to previous findings (Knevels et al., 2019; Dias et al., 2023). However, MII has a lower proportion of misclassified areas within the same inset (Section 4.3.1, Figure 7), highlighting its ability to delineate landslide features accurately throughout the study area. Additionally, some automatically delineated landslide polygons extend beyond the boundaries of the inventoried actual landslide areas (Figures 4 and 5). These deviations can be attributed to limitations in the segmentation and classification algorithms, which may produce irregular or overly coarse objects, or potential misclassifications or errors in object merging due to the use of a low threshold for object characteristics during refinement and the final layout.

We should acknowledge that in one instance (see Figure 8(b)), a large mapped landslide may in fact consist of multiple individual events. Due to uncertainty regarding the precise boundaries between these possible landslides, we decided to map the area as a single, large landslide in the inventory map. However, this issue is partially addressed through the area-based accuracy assessment presented in Section 4.3.1, which minimizes the impact of such limitations on model validation. Future studies could improve the accuracy further by labelling such ambiguous cases as "uncertain" or separating them from clearly defined landslides in the inventory. This would help to better assess model performance and transferability.

Other misclassifications occur in areas where the geomorphological signature or roughness resembles the characteristics of landslide body or scarp candidates defined by the developed rule set. Both models incorrectly detect a scarp in the same inset/window in Figure 8(d) but in different locations. The parameters in these areas are similar to those of actual landslide scarps, so distinguishing them solely based on DTM data is difficult. The misclassified area is actually rock outcrops, which are common in this region due to its local-scale variations in lithology, where different layers and materials respond differently to weathering and erosion (see the geological map of the region in Zangana et al., 2023). Most landslide scarp FPs in our study can be attributed to this issue. In addition, both models misclassify landslide scarps as landslide bodies for two landslides from the inventory map in the same location in Figure 8(d). Thus, the scarp and landslide body areas in these cases are highly similar, possibly due to landslide type/age and human activity, so the rule set cannot easily differentiate them from the rest of the study area. However, the landslides are successfully mapped, highlighting the need for detecting different landslides separately. This shortcoming of our approach is similar to those reported in previous studies on forest-covered landslides (Li et al., 2015; Pawłuszek et al., 2019), demonstrating the challenges of performing inventory mapping without FPs using DTM data alone (Eeckhaut et al., 2012; Bell et al., 2012; Goetz et al., 2014; Knevels et al., 2019).

Furthermore, both models identify the same location in Figure 8(e) as a landslide candidate (as a landslide scarp or a landslide body). The right-hand part of Figure 8(e) in MII shows a landslide that is excluded from the initial inventory due to its dissimilarity with the other landslides and its small size. In MII, the body area of this landslide is incorrectly mapped over cropland, grassland and built-up areas. On the left-hand side of the same window (Figure 8(e), MI), the landslide body is wider


**Table 6.** Metrics used per landslide component per model.

<b>Metric</b>	<b>Scarp</b>		<b>Body</b>	
	<b>M I</b>	<b>M II</b>	<b>M I</b>	<b>M II</b>
<b>AFI</b>	-0.37	-1.25	-10.21	-3.89
<b>OS</b>	0.53	0.33	0.18	0.18
<b>F_measure</b>	0.42	0.50	0.28	0.57
<b>US</b>	0.30	0.43	0.84	0.60
<b>recall</b>	0.36	0.48	0.80	0.77
<b>precision</b>	0.50	0.52	0.17	0.45

than the inventory map area that may correspond to the inventory map but is excluded from the initial inventory due to the insufficiency of the available information for it to be classified as a large landslide. In the MI image in Figure 8(d), the FP area extends over a wide region, particularly into forested areas and erosional rims, demonstrating that this model has lower landslide detection precision than MII. Therefore, landslide size should be addressed in future studies. Detecting landslides of different types and sizes at various levels can enhance detection rates and further reduce the FPr.

An analysis of the AA results reveals that MII outperforms MI in detecting landslide components (bodies and scarps) in terms of correctly identified areas and FP reduction. For instance, MII reduces the FPr by approximately 30% and 20% for landslide scarps and landslide bodies, respectively (Table 4). MII slightly underestimates the landslide body areas; the TPr for landslide body detection decreases, offset by an increase in the TPr for scarp areas. Although MI yields a higher TPr for landslide body areas, its FPr is approximately 30% higher than that of MII, highlighting the importance of considering the FPr alongside the TPr and FNr for a comprehensive evaluation of model performance. MII has considerable potential, effectively reducing the FPr while maintaining a strong TPr. However, further research is needed to enhance the applicability of this approach across various environments and datasets.

Our TPr is comparable to that of Eeckhaut et al. (2012), who investigated the semi-automatic detection of landslides using lidar data and identified 71% of landslides using object-based detection. In comparison, MII achieves TPr values of 65.8% and 72.5% for landslide scarps and landslide bodies, respectively. However, our approach demonstrates significantly better accuracy through minimising of FPs. Eeckhaut et al. (2012) identified 18 FP landslides in an area affected by 38 deep-seated landslides (47%), and Martha et al. (2010) reported 73 FP landslides for 55 expert-identified landslides (132%). As shown in Tables 2 and 3, our study identifies only 5 FP landslide scarps (20% relative to the TPs) and 7 FP landslide bodies (24% relative to the TPs). Therefore, MII detects landslides more efficiently than MI and the abovementioned approaches. However, some studies (Martha et al., 2010; Eeckhaut et al., 2012; Knevels et al., 2019) do not provide the number or total

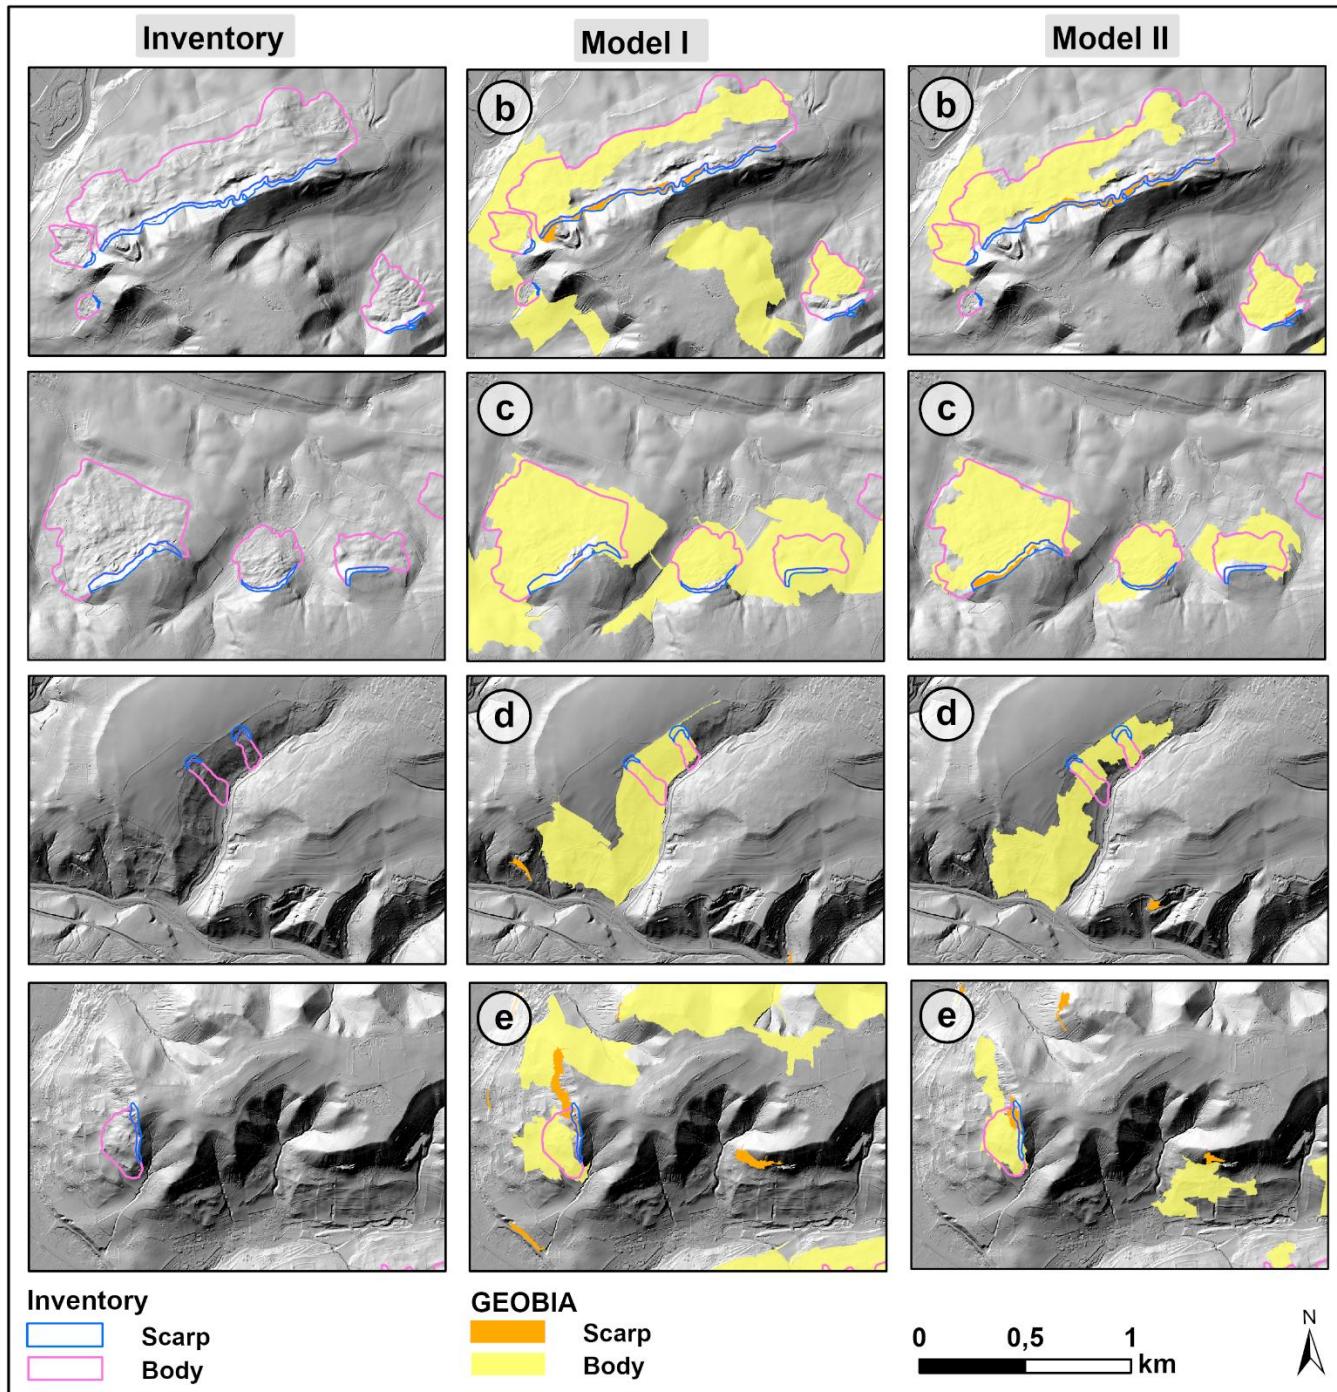

**Figure 8.** Detailed results of Model I (MI) and Model II (MII) for selected areas. The left column shows the landslide inventory overlaid on the hillshade DTM (TLUBN, 2019). The middle and right columns display MI and MII results, respectively, corresponding to the inset areas b–e shown in Figures 4 and 5. These zoomed-in views highlight differences in model performance within representative subregions.

area of FPs or only present them numerically, hindering a comprehensive comparison of methods. Conversely, our evaluation

380 is more detailed, enabling a systematic assessment of model precision in identifying a specific number of TPs while minimising FPs.

Misclassification also occurs in areas with degraded geomorphological signatures (Figure 8(d, e)). Landslide scarps are often misidentified in regions with features resembling those of scarp candidates. These errors may be attributed to human-made structures, such as roads, pits, ridges and rock toes. Similar false detections are observed in areas with partially eroded 385 or weathered limestone formations, particularly in areas where they overlay sandstone. This misclassification pattern aligns with commonly reported results (Eeckhaut et al., 2012; Hölbling et al., 2017; Knevels et al., 2019; Dias et al., 2023).

Selecting the appropriate window sizes for the LSVs is challenging (Figure 3, Table 1). The results show considerable variability across the 10 runs, with the optimal window sizes often being larger for scarp zones than for body areas. For example, the TPI and TRI significantly deviate between the optimal and default window sizes, highlighting the need to fine-tune 390 window sizes based on the specific geomorphometric characteristics of each landslide feature. By contrast, the default window sizes used in MI often result in under- or over-segmentation, especially in scarp zones, compromising detection accuracy. These results highlight the complexity of adjusting window sizes for accurate scarp and body detection and emphasise the advantages of the tailored approach of MII in overcoming these limitations.

Compared with MI, MII is more effective in detecting individual landslides as distinct polygons and separating them 395 from neighbouring landslides. Additionally, MII significantly reduces the FP number and area, as shown in the model comparison in Figure 7. This highlights the robustness of the optimal window size approach of MII, which is more effective for landslide detection than default or manually selected window sizes, which have been commonly used in many studies for decades. Overall, this approach is a valuable advancement in improving semi-automatic landslide inventory mapping, 400 particularly in forested areas, where the limited availability of optical data often hampers complete inventory mapping (Eeckhaut et al., 2012; Li et al., 2015; Knevels et al., 2019). Although Stage III was first developed in the Jena region, the framework and rulesets can be applied to other areas where landslides are well expressed in hillshade and distinct from their surroundings. This condition is often met for forest-covered landslides of varying ages, and may also apply to younger landslides, with no or limited human impact. While some refinement parameters may need local adjustment, the method is not restricted to a specific landslide type or setting, and its broader applicability should be further evaluated in future studies

## 405 6 Conclusion

A GEOBIA-based approach is developed and used for the semi-automatic mapping of landslide inventories in the forested areas of the middle-mountain regions of Jena, Germany. The proposed method effectively maps forest-covered landslides, with a particular focus on medium and large landslides (greater than 0.5 ha), but does not detect smaller landslides. MII, which 410 uses the optimal window size, maps landslide scarps with higher accuracy than MI, which relies on default window sizes. MII shows a significant (15%) improvement in scarp detection during number-based AA while reducing the FPr by 30%. However,

this FPr reduction entails a trade-off, as the FNr increases by approximately 15%. Nonetheless, MII remains highly effective for semi-automatic landslide mapping in forest-covered areas.

High-resolution DTM derivatives serve as the base data for landslide mapping using GEOBIA, which incorporates an optimal window size to detect forest-covered old landslides in middle-mountain regions. Our analysis shows that this  
415 approach may significantly improve the accuracy of landslide mapping in areas with sparse or no vegetation and in regions where landslides are newly formed or have recently altered the terrain. This is due to the superior ability of DTM data to show recent landslide features compared with historical ones.

This study emphasises the importance of calculating window sizes separately for different landslide components, as landslide scarps and bodies require distinct window sizes for accurate detection. This factor should be considered thoroughly  
420 before any calculation or modelling process involving landforms of interest. As landform detection depends on the defined window size, our automated objective approach is highly suited for future research and semi-automatic landform modelling. However, further evaluation is required to ascertain the transferability of this method to other regions; nonetheless, this method should be globally applicable to the detection of landslides with well-defined geomorphological features using high-resolution DTM data. As the pioneering use of GEOBIA for landslide inventory mapping in the Jena area, this study serves as a foundation  
425 for future research on landslides in this region. Furthermore, it can be used as a base map for hazard and risk assessments, especially as climate change may reactivate old landslides, as has occurred in many areas across Germany and around the world.

430

435

440

## Appendices

## 450 A) Ruleset Model I

**Table A1: Landslide Scars Refinement Steps**

<i>Refinement Step</i>	<i>Actions</i>	<i>Conditions / Criteria</i>	<i>Additional Notes</i>
<i>Refinement 1</i>	Remove objects	IF SLOPE < 33 AND TRI < 2 Remove IF TRI < 1.7	Then → Merge objects
	Expand objects	IF non-Scarp (Rel. Border to Scarp Candidate > 0.1 AND TRI > 2.5 AND SLOPE > 45) Remove IF AREA < 1500 pixels AND Length/Width > 5	Then → Merge objects
<i>Refinement 2</i>	Remove objects	IF TPI < -0.01 AND (SLOPE < 33 AND TRI < 2) Remove IF (TRI < 1 AND TPI < 1) Remove IF Length/Width > 3 AND TRI < 1.8 Remove IF Rectangular fit < 0.1 AND Roundness > 2	Then → Merge objects
	Remove objects	IF (AREA > 20,000 pixels AND TPI < 0.1) OR AREA < 100 pixels	AND IF TPI < 0.02 OR Length/Width > 10 OR C_plan < 0
<i>Refinement 3</i>	Remove objects	IF SLOPE < 34 OR C_plan < -3 Remove IF TOP > 0.03 OR TOP < -0.004 Remove IF TPI < 0.1	Then → Merge objects

**Table A2: Landslide Bodies Refinement Steps**

<i>Refinement Step</i>	<i>Actions</i>	<i>Conditions / Criteria</i>	<i>Additional Notes</i>
<i>Refinement 1</i>	Expand objects	IF unclassIFied (SLOPE > 12 AND Rel. Border to Body Candidate > 0.5) IF non-Body (Rel. Border to Body Candidate > 0.5 AND Rel. Border to non-Body ≤ 0.2) IF non-Body (Rel. Border to Body Candidate > 0.6)	Then → Merge objects

	IF non-Body (SLOPE > 10, C_plan < 0.1 AND Rel. Border to Body Candidate $\geq 0.1$ ) Remove IF AREA < 5000 pixels	
Expand objects	IF non-Body (Rel. Border to Body Candidate $\geq 0.1$ AND C_plan < 0.2 AND SLOPE > 12) IF non-Body (Rel. Border to Body Candidate $\geq 0.4$ , C_plan < 0.3 AND SLOPE > 15) IF non-Body (Rel. Border to Body Candidate $\geq 0.7$ AND C_plan < 0.3 AND SLOPE > 10)	
Remove objects	IF Length/Width $\geq 6.1$ OR (Length/Width $\geq 5$ AND SLOPE < 15) Remove IF AREA < 15,000 pixels	Then $\rightarrow$ Merge objects
<b>Refinement 2</b>		
Remove objects	IF SLOPE < 14 AND TRI < 0.6	
Expand objects	IF unclassIFied (Rel. Border to Body Candidate $\geq 0.5$ AND SLOPE $\geq 12$ ) IF non-Body (SLOPE > 10, C_plan < 0.1 AND Rel. Border to Body Candidate $\geq 0.1$ ) Remove IF non-Body (Rel. Border to Body Candidate > 0.5 AND Rel. Border to non-Body $\leq 0.2$ ) Remove IF (TRI < 0.7 AND TPI < -0.05) OR AREA < 15,000 pixels	Then $\rightarrow$ Merge objects
Expand objects	IF unclassIFied (Rel. Border to Body Candidate = 1) $\rightarrow$ Expand IF (TRI > 0.6 AND C_plan > 0.3) Remove IF AREA < 46,000 pixels	Then $\rightarrow$ Merge objects
Expand objects	IF unclassIFied (Rel. Border to Body Candidate > 0.5, C_plan > 0.1 AND TRI > 0.45)	OR IF Rel. Border to Body Candidate > 0.5 $\rightarrow$ Merge objects
Remove objects	IF (AREA < 150,000 pixels AND C_plan < 0) OR SLOPE < 5	
<b>Refinement 3</b>		
Remove objects	IF SLOPE < 14 IF TPI < -0.1 IF C_plan < -0.04 OR C_plan > 0.2	Then $\rightarrow$ Merge objects

**Table B1: Model II Landslide Scarps Refinement Steps**

<i>Step</i>	<i>Action</i>	<i>Conditions / Criteria</i>	<i>Notes</i>
<i>Initial Pre-processing</i>	Segmentation	MRS 20 (Shape: 0.1, Compactness: 0.5)	
	Initial classification	Remove plateau AND floodplain AREAs by identifying "Initial Scarp AREA" to retain Landslide polygons AND buffers	
<i>Potential Scarp Identification</i>	Remove segments	IF mean SLOPE $\geq 0.3$ , TPI $\geq 0.65$ , TRI $\geq 0.8$	Define as Potential Scarp
	Expand AREA	IF mean SLOPE $> 0.7$ AND Rel. Border to Potential Scarp $\geq 0.45$ Or mean SLOPE $\geq 25$ , TPI $\geq 1.5$ , mean TRI $\geq 2.5$	
	Classification	SVM (Scarp vs Non-Scarp)	
<i>Refinement 1</i>	Expand Scarps	IF Rel. Border to Scarp $> 0.85$ AND mean SLOPE $\geq 0.4$ Or Rel. Border to Scarp $> 0.3$ , mean TPI $\geq 12$ , mean SLOPE $> 0.6$	
	Remove Scarps	IF $-29 < \text{mean C\_profile} > 6.3$ AND $-5.2 < \text{mean C\_plan} > 37$ IF $-0.04 < \text{TOP} > 0.14$ IF mean SLOPE $> 0.45$ AND mean TPI $< 0.14$ or mean TRI $< 1.14$	
	Further Expand Scarps	IF mean SLOPE $> 0.65$ , mean TRI $> 2.2$ , mean TPI $> 7$ , AND Rel. Border to Scarps $> 0.2$ For unclassified/non-Scarp: mean SLOPE $> 0.4$ AND Rel. Border to Scarps $> 0.9$	
	Remove Scarps	IF Rel. Border to Scarps $< 0.4$ AND AREA $> 2000$ pixels	
	Merge segments	Merge all segments	
<i>Refinement 2</i>	Remove Scarps	IF AREA $< 1000$ pixels AND mean SLOPE $< 0.74$	
	Expand Scarps	IF mean SLOPE $> 0.45$ , Rel. Border to Scarps $> 0.25$ , Rel. Border to non-Scarps $< 0.01$ Or mean SLOPE $> 0.7$ , Rel. Border to Scarps $> 0.3$ , mean TRI $< 2.15$ Or mean SLOPE $> 0.65$ , Rel. Border to Scarps $> 0.1$ , mean TRI $< 2.1$ , Rel. Border to non-Scarps $< 0.5$ , AREA $< 6800$ pixels	
	Merge non-Scarps	IF mean SLOPE $> 0.48$ , TRI $> 1$ , mean TPI $> 7$	
	Further Expand Scarps	IF mean SLOPE $> 0.5$ , Rel. Border to Scarps $> 0.3$ , Rel. Border to non-Scarps $> 0.43$ , TRI $< 1.7$	
	Remove Scarps	IF Rel. Border to non-Scarps $> 0.85$ , AREA $< 3000$ , mean SLOPE $< 0.7$ AND IF mean TPI $< 2.45$ , mean SLOPE $< 0.65$ , AREA $< 1600$ Or mean SLOPE $< 0.75$ , AREA $< 8000$ , mean TPI $> 10$ Or mean SLOPE $< 0.7$ , AREA $< 10,000$ , mean TOP $< 0.028$	
<i>Landslide Bodies</i>			

**Table B2: Model II Landslide Bodies Refinement Steps**

<i>Step</i>	<i>Action</i>	<i>Conditions / Criteria</i>	<i>Notes</i>
-------------	---------------	------------------------------	--------------

<b>Initial Pre-processing</b>	Segmentation	MRS 30 (Shape: 0.1, Compactness: 0.5)
	Potential Body Segments	Remove IF mean SLOPE $\geq 0.2$ , TPI $< 7$ , TRI $\geq 0.5$
	ClassIFication	SVM (Bodies vs Non-Bodies)
<b>Refinement 1</b>	Expand Bodies	IF Rel. Border to Body $\geq 0.8$ AND mean SLOPE $> 0.25$ , or Rel. Border $\geq 0.9$
	Merge Body segments	Merge all Body segments
	Expand further	IF Rel. Border to Body $\geq 0.7$ , Rel. Border to non-Body $< 0.3$ , mean SLOPE $\geq 0.25$ Or Rel. Border to Body $\geq 0.8$ , Rel. Border to non-Body $< 0.3$ , mean TRI $\geq 0.35$ Or Rel. Border to Body $\geq 0.4$ , Rel. Border to unclassIFied $< 0.01$ Or Rel. Border to Body $\geq 0.55$ , Rel. Border to non-body $< 0.2$ , mean TRI $> 0.6$ Or Rel. Border to Body $\geq 0.6$ AND mean TRI $> 0.4$ Or Rel. Border to Body $\geq 0.15$ , mean TRI $> 1$ , mean SLOPE $> 0.4$
<b>Refinement 2</b>	Merge Body segments	Merge all Body segments
	Expand Bodies	IF Rel. Border to Body $\geq 0.3$ , mean SLOPE $> 0.2$ , mean TRI $> 0.6$
	Remove Bodies	IF $-0.022 < \text{mean TOP} \geq 0.003$ Or AREA $< 10,000$ pixels AND mean SLOPE $> 0.25$ Or AREA $< 25,000$ pixels AND mean SLOPE $< 0.25$ Or AREA $> 400,000$ pixels Or mean C_plan $< 0.0$ AND/or mean C_profile $< 0.0$ AND AREA $> 50,000$ or mean TPI $> 1.3$
	Expand from unclassIFied/non-Body	IF Rel. Border to Body $> 0.99$
<b>Refinement 3</b>	Remove Body segments	IF Rel. Border to non-Body $> 0.99$ , or Rel. Border $> 0.9$ AND mean SLOPE $< 0.29$
	Remove Bodies	IF mean SLOPE $< 0.4$ AND AREA $< 15,000$ pixels Or mean SLOPE $< 0.3$ , AREA $< 50,000$ , mean TPI $> 0.8$ Or mean SLOPE $< 0.42$ AND mean TPI $< -1.9$ Or AREA $< 40,000$ AND mean TPI $> 1.4$ Or mean C_profile $< 0.0$ AND mean TPI $> 1$ , or mean SLOPE $< 0.25$ Or 15,000 $< \text{AREA} < 65,000$ AND Length/Width $> 1.99$ Or 15,000 $< \text{AREA} < 100,000$ AND 3.2 $> \text{Length/Width} > 1.99$
	Expand Body AREA	Or 25,000 $< \text{AREA} < 100,000$ , or C_plan $< -0.02$ , or C_plan $> 0.19$ AND mean TPI $< 1$ Or St. Deviation of C_profile $< 1.6$ From unclassIFied segments IF Rel. Border to Body $> 0.6$ , mean SLOPE $> 0.4$ , mean TRI $> 1$ Or Rel. Border to Body $> 0.42$ AND Rel. Border to unclassIFied = 0 Or from non-body AREAs IF Rel. Border to Body $> 0.7$
	Remove Bodies	IF AREA $> 183,000$ pixels AND mean TRI $> 0.81$

Code availability. The code used in this research is available from the first author upon reasonable request. The first version related to optimal moving-window sizes was previously published by Sirbu et al. (2019).

465

Data availability. The resulting data used in this research can be obtained from the first author upon reasonable request but can be accessed through the references in the methodology section.

Author contributions. IZ: conceptualisation, data curation, formal analysis, visualisation, writing (original draft, review and editing).

RB: conceptualisation, visualisation, writing (review and editing). LD: conceptualisation, data and software implementation, writing

470 (review and editing). FS: developed and calibrated the original R script to obtain the optimal moving-window sizes, writing (review and editing). LS: conceptualisation, writing (review and editing), supervision. All authors have read and agreed to the published version of the paper.

Competing interests. The contact author has declared that none of the authors has any competing interests.

475 Disclaimer. Publisher's note: Copernicus Publications remains neutral with regard to jurisdictional claims made in the text, published maps, institutional affiliations, or any other geographical representation in this paper. While Copernicus Publications makes every effort to include appropriate place names, the final responsibility lies with the authors.

Acknowledgements. Preliminary results of this work have been presented to the EGU2024 Conference. We would like to thank Melanie

480 Stammler and Simon Terweh for their valuable discussions.

Financial support. This work was supported by the Open Access Publication Fund of the University of Bonn.

## References

485 Achilles, F., Danigel, M., Frey, V. S., Voigt, T., and Büchel, G.: Massenbewegungen am Übergang des Oberen Buntsandstein in den Unteren Muschelkalk im Jenaer Gembdental, Beitr. Geol. Thüringen, NF.23, 103–114, 2016.

Aksoy, B. and Ercanoglu, M.: Landslide identification and classification by object-based image analysis and fuzzy logic: An example from the Azdavay region (Kastamonu, Turkey), Comput. Geosci., 38, 87–98, <https://doi.org/10.1016/j.cageo.2011.05.010>, 2012.

490 Anders, N. S., Seijmonsbergen, A. C., and Bouting, W.: Segmentation optimization and stratified object-based analysis for semi-automated geomorphological mapping, Remote Sens. Environ., 115, 2976–2985, <https://doi.org/10.1016/j.rse.2011.05.007>, 2011.

5 Anders, N. S., Seijmonsbergen, A. C., and Bouts, W.: Geomorphological change detection using object-based feature extraction from multioral lidar data, IEEE Geosci. Remote Sens. Lett., 10, 1587–1591, <https://doi.org/10.1109/LGRS.2013.2262317>, 2013.

495 495 Baatz, M. and Schäpe, A.: Multiresolution segmentation—an optimization approach for high quality multiscale image segmentation, in: *Angewandte Geographische Informationsverarbeitung*, 12–23, 2000.

Bell, R., Petschko, H., Röhrs, M., and Dix, A.: Assessment of landslide age, landslide persistence and human impact using airborne laser scanning digital terrain models, *Geogr. Ann. Ser. A Phys. Geogr.*, 94, 135–156, <https://doi.org/10.1111/j.1468-0459.2012.00454.x>, 2012.

500 500 Bernat Gazibara, S., Krkač, M., and Mihalić Arbanas, S.: Landslide inventory mapping using LiDAR data in the City of Zagreb (Croatia), *J. Maps*, 15, 773–779, <https://doi.org/10.1080/17445647.2019.1671906>, 2019.

Blaschke, T.: Object based image analysis for remote sensing, <https://doi.org/10.1016/j.isprsjprs.2009.06.004>, 2010.

Cai, L., Shi, W., Miao, Z., and Hao, M.: Accuracy Assessment Measures for Object Extraction from Remote Sensing Images, *Remote Sens.*, 10, 13, <https://doi.org/10.3390/rs10020303>, 2018.

505 505 Dias, H. C., Hölbling, D., and Grohmann, C.: Rainfall-Induced Shallow Landslide Recognition and Transferability Using Object-Based Image Analysis in Brazil, *Remote Sens.*, 1–16, 2023.

Drăguț, L. and Eisank, C.: Object representations at multiple scales from digital elevation models, *Geomorphology*, 129, 183–189, <https://doi.org/10.1016/j.geomorph.2011.03.003>, 2011.

510 510 Drăguț, L. and Eisank, C.: Automated object-based classification of topography from SRTM data, *Geomorphology*, 141–142, 21–33, <https://doi.org/10.1016/j.geomorph.2011.12.001>, 2012.

Drăguț, L., Tiede, D., and Levick, S. R.: ESP : a tool to estimate scale parameter for multiresolution image segmentation of remotely sensed data, *Int. J. Geogr. Inf. Sci.*, 24, 859–871, <https://doi.org/10.1080/13658810903174803>, 2010.

515 515 Eeckhaut, M. Van Den, Poesen, J., Verstraeten, G., Vanacker, V., Nyssen, J., Moeyersons, J., Beek, L. P. H. van, and Vandekerckhove, L.: Use of LIDAR-derived images for mapping old landslides under forest, *Earth Surf. Process. Landforms*, 32, 754–769, <https://doi.org/10.1002/esp>, 2006.

Van Den Eeckhaut, M., Kerle, N., Poesen, J., and Hervás, J.: Object-oriented identification of forested landslides with derivatives of single pulse LiDAR data, *Geomorphology*, 173–174, 30–42, <https://doi.org/10.1016/j.geomorph.2012.05.024>, 2012.

520 Esri: World Ocean Reference [basemap], scale not given, World Ocean Reference, 2017, <https://www.arcgis.com/home/item.html?id=94329802cbfa44a18f423e6f1a0b875c> (last access: 15 May 2025).

Eisank, C., Smith, M., and Hillier, J.: Assessment of multiresolution segmentation for delimiting drumlins in digital elevation models, *Geomorphology*, 214, 452–464, <https://doi.org/10.1016/j.geomorph.2014.02.028>, 2014.

Feizizadeh, B. and Blaschke, T.: A Semi Automated Object Based Image Analysis Approach for Landslide Delineation, 2013.

525 Föhlisch, K.: Synsedimentäre Deformationen im Unteren Muschelkalk des Germanischen Beckens Dissertation zur Erlangung des akademischen Grades doctor rerum naturalium, Friedrich-Schiller-Universität Jena, 183 pp., 2002.

Goetz, J. N., Bell, R., and Brenning, A.: Could surface roughness be a poor proxy for landslide age? Results from the Swabian Alb, Germany, *Earth Surf. Process. Landforms*, 39, 1697–1704, <https://doi.org/10.1002/esp.3630>, 2014.

Guzzetti, F., Carrara, A., Cardinali, M., and Reichenbach, P.: Landslide hazard evaluation: a review of current techniques and their application in a multi-scale study, Central Italy, *Geomorphology*, 31, 181–216, 1999.

530 Guzzetti, F., Cesare, A., Cardinali, M., Fiorucci, F., Santangelo, M., and Chang, K.: Landslide inventory maps : New tools for an old problem, *Earth Sci. Rev.*, 112, 42–66, <https://doi.org/10.1016/j.earscirev.2012.02.001>, 2012.

Guzzetti, F., Reichenbach, P., Sassa, K., Bobrowsky, P. T., Takara, K., and Zonation, R.: Understanding and Reducing Landslide Disaster Risk, Springer, 494 pp., <https://doi.org/10.1007/978-3-030-60227-7>, 2021.

535 Hölbling, D., Betts, H., Spiekermann, R., and Phillips, C.: Identifying Spatio-Temporal Landslide Hotspots on North Island , New Zealand , by Analyzing Historical and Recent Aerial Photography, *Geosciences*, 6, 1–15, <https://doi.org/10.3390/geosciences6040048>, 2016.

Hölbling, D., Eisank, C., Albrecht, F., Vecchiotti, F., Friedl, B., Weinke, E., and Kociu, A.: Comparing Manual and Semi-Automated Landslide Mapping Based on Optical Satellite Images from Different Sensors, *Geosciences*, 7, 1–20, <https://doi.org/10.3390/geosciences7020037>, 2017.

540 Hong, H., Pradhan, B., Bui, D. T., Xu, C., Youssef, A. M., and Chen, W.: Comparison of four kernel functions used in support vector machines for landslide susceptibility mapping: a case study at Sichuan area (China), *Geomatics, Nat. Hazards Risk*, 8, 544–569, <https://doi.org/10.1080/19475705.2016.1250112>, 2017.

545 Hossain, M. D. and Chen, D.: Segmentation for Object-Based Image Analysis (OBIA): A review of algorithms and challenges from remote sensing perspective, *ISPRS J. Photogramm. Remote Sens.*, 150, 115–134, <https://doi.org/10.1016/j.isprsjprs.2019.02.009>, 2019.

Johnson, B. and Xie, Z.: Unsupervised image segmentation evaluation and refinement using a multi-scale approach, *ISPRS J. Photogramm. Remote Sens.*, 66, 473–483, <https://doi.org/10.1016/j.isprsjprs.2011.02.006>, 2011.

Karantanellis, E. and Hölbling, D.: Machine learning and object-based image analysis for landside mapping using UAV-derived data, in: *Earth Observation Applications to Landslide Mapping, Monitoring and Modeling*, edited by: Ionut Sandric, Viorel Ilinca, Z. C., Elsevier, 241–255, [https://doi.org/https://doi.org/10.1016/B978-0-12-823868-4.00012-X](https://doi.org/10.1016/B978-0-12-823868-4.00012-X), 2025.

Karantanellis, E., Marinos, V., Vassilakis, E., and Christaras, B.: Object-based analysis using unmanned aerial vehicles (UAVs) for site-specific landslide assessment, *Remote Sens.*, 12, 23, <https://doi.org/10.3390/rs12111711>, 2020.

Karantanellis, E., Marinos, V., Vassilakis, E., and Hölbling, D.: Evaluation of machine learning algorithms for object-based mapping of landslide zones using UAV data, *Geosci.*, 11, 1–19, <https://doi.org/10.3390/geosciences11080305>, 2021.

555 Knevels, R., Petschko, H., Leopold, P., and Brenning, A.: Geographic object-based image analysis for automated landslide detection using open source GIS software, *ISPRS Int. J. Geo-Information*, 8, <https://doi.org/10.3390/ijgi8120551>, 2019.

Lahousse, T., Chang, K. T., and Lin, Y. H.: Landslide mapping with multi-scale object-based image analysis-a case study in the Baichi watershed, Taiwan, *Nat. Hazards Earth Syst. Sci.*, 11, 2715–2726, <https://doi.org/10.5194/nhess-11-2715-2011>, 2011.

560 Li, X., Cheng, X., Chen, W., Chen, G., and Liu, S.: Identification of forested landslides using lidar data, object-based image analysis, and machine learning algorithms, *Remote Sens.*, 7, 9705–9726, <https://doi.org/10.3390/rs70809705>, 2015.

Martha, T. R., Kerle, N., Van Westen, C. J., Jetten, V., and Kumar, K. V.: Segment optimization and data-driven thresholding for knowledge-based landslide detection by object-based image analysis, *IEEE Trans. Geosci. Remote Sens.*, 49, 4928–4943, <https://doi.org/10.1109/TGRS.2011.2151866>, 2011.

565 Pawluszek, K., Borkowski, A., and Tarolli, P.: Sensitivity analysis of automatic landslide mapping: numerical experiments towards the best solution, *Landslides*, 15, 1851–1865, <https://doi.org/10.1007/s10346-018-0986-0>, 2018.

Pawluszek, K., Marczak, S., Borkowski, A., and Tarolli, P.: Multi-aspect analysis of object-oriented landslide detection based on an extended set of LiDAR-derived terrain features, *ISPRS Int. J. Geo-Information*, 8, <https://doi.org/10.3390/ijgi8080321>, 2019.

570 Plank, S. and Martinis, S.: Landslide Mapping in Vegetated Areas Using Change Detection Based on Optical and Polarimetric SAR Data, *Remote Sens.*, 8, 1–20, <https://doi.org/10.3390/rs8040307>, 2016.

Rau, D., Schramm, H., and Wunderlich, J.: *Geowissenschaftliche Mitteilungen von Thüringen (Die Leitbodenformen*

Thüringens), Weimar, 101 pp., 2000.

575 Robson, B. A., Bolch, T., MacDonell, S., Hölbling, D., Rastner, P., and Schaffer, N.: Automated detection of rock glaciers using deep learning and object-based image analysis, *Remote Sens. Environ.*, 250, <https://doi.org/10.1016/j.rse.2020.112033>, 2020.

Santangelo, M., Cardinali, M., Rossi, M., Mondini, A. C., and Guzzetti, F.: Remote landslide mapping using a laser rangefinder binocular and GPS, *Nat. Hazards Earth Syst. Sci.*, 10, 2539–2546, <https://doi.org/10.5194/nhess-10-2539-2010>, 2010.

580 Schmaltz, E., Steger, S., Bell, R., Glade, T., van Beek, R., Bogaard, T., Wang, D., Hollaus, M., and Pfeifer, N.: Evaluation of Shallow Landslides in the Northern Walgau (Austria) Using Morphometric Analysis Techniques, *Procedia Earth Planet. Sci.*, 16, 177–184, <https://doi.org/10.1016/j.proeps.2016.10.019>, 2016.

Schulz, W. H.: Landslides mapped using LIDAR imagery, U.S. Geol. Surv. Open-File Rep., Seattle, W, 1396, 2004.

Seidel, G.: Sammlung geologischer Führer-Thüringer Becken, 85th ed., (Bornträger), Berlin-Stuttgart, 204 pp., 1992.

585 Seijmonsbergen, A. C., Hengl, T., and Anders, N. S.: Semi-Automated Identification and Extraction of Geomorphological Features Using Digital Elevation Data, Elsevier B.V., 297–335 pp., <https://doi.org/10.1016/B978-0-444-53446-0.00010-0>, 2011.

Simoes, R., Sanchez, A., Picoli, M. C. A., and Meyfroidt, P.: The segmetric Package : Metrics for Assessing Segmentation Accuracy for Geospatial Data, *R J.*, 15, 159–172, <https://doi.org/10.32614/RJ-2023-030>, 2023.

590 Sirbu, F., Drăguț, L., Oguchi, T., Hayakawa, Y., and Micu, M.: Scaling land-surface variables for landslide detection, *Prog. Earth Planet. Sci.*, 6, 1–13, 2019.

Tapas R. Martha, Norman Kerle, Victor Jetten, Cees J. van Westen, K. V. K.: Characterising spectral , spatial and morphometric properties of landslides for semi-automatic detection using object- oriented ..., *Geomorphology*, 116, 24–36, <https://doi.org/10.1016/j.geomorph.2009.10.004>, 2010.

595 Digitale Geologische Karte von Thüringen für den Maßstab 1: 25.000 (GK25digTh): <http://antares.thueringen.de/cadenza/pages/map/default/index.xhtml;jsessionid=5DF262BE272F1E39739A87B3A8F4F458>.

landnutzung: [https://antares.thueringen.de/cadenza/pages/map/default/index.xhtml;jsessionid=C40D8C95596E44DA65325F3E8DA7F2AC?mapId=da191d35-5f45-4c97-8247-202c2371293f&repositoryItemGlobalId=Anwendungen.basiskarte\\_topo.mml&mapSrs=EPSG%3A25832&mapExtent=680094.62471](https://antares.thueringen.de/cadenza/pages/map/default/index.xhtml;jsessionid=C40D8C95596E44DA65325F3E8DA7F2AC?mapId=da191d35-5f45-4c97-8247-202c2371293f&repositoryItemGlobalId=Anwendungen.basiskarte_topo.mml&mapSrs=EPSG%3A25832&mapExtent=680094.62471).

600 Tzotsos, A. and Argialas, D.: Support vector machine classification for object-based image analysis, *Lect. Notes Geoinf. Cartogr.*, 663–677, [https://doi.org/10.1007/978-3-540-77058-9\\_36](https://doi.org/10.1007/978-3-540-77058-9_36), 2008.

Zangana, I., Otto, J.-C., Mäusbacher, R., and Schrott, L.: Dataset: Detailed geomorphological mapping based on geographic information systems and remote sensing data of Jena and surrounds, Germany, RADAR, <https://doi.org/10.22000/798>, 2023a.

605 Zangana, I., Otto, J., Mäusbacher, R., and Schrott, L.: Efficient geomorphological mapping based on geographic information systems and remote sensing data: an example from Jena, Germany, *J. Maps*, 19, 1–13, <https://doi.org/10.1080/17445647.2023.2172468>, 2023b.

Zangana, I., Bell, R., Drăguț, L., and Schrott, L.: Geographic Object-Based Image Analysis ( GEOBIA ) for inventory mapping of forest-covered landslides: a case study a case study in Jena, Germany, EGU, Vienna, Austria, 10760 pp., <https://doi.org/10.5194/egusphere-egu24-10760>, 2024.

610 Zylshal, Danoedoro, P., and Haryono, E.: An object based image analysis approach to semi-automated karst morphology extraction, *34th Asian Conf. Remote Sens. 2013, ACRS 2013*, 1, 927–934, <https://doi.org/10.13140/RG.2.1.2243.1609>, 2013.

Zylshal, Sulma, S., Yulianto, F., Nugroho, J. T., and Sofan, P.: A support vector machine object based image analysis approach on urban green space extraction using Pleiades-1A imagery, *Model. Earth Syst. Environ.*, 2, 1–12, <https://doi.org/10.1007/s40808-016-0108-8>, 2016.

615