

A simplified model to investigate the hydrological regimes of temporary wetlands: the case study of Doñana marshland (Spain)

Claudia Panciera¹, Alessandro Pagano², Vito Iacobellis², Manuel Bea Martinez³, Ivan Portoghese¹,

¹Water Research Institute, National Research Council (IRSA-CNR), Bari, 70132, Italy

²DICATECh, Politecnico di Bari, Bari, 70126, Italy

³Asociación Ecoadapta, Madrid, 28012, Spain

Correspondence to: Ivan Portoghese (ivan.portoghese@cnr.it)

Abstract. Natural and pristine ecosystems, such as wetlands, are being either directly or indirectly threatened by a multiplicity of drivers, which include anthropogenic activities and the impacts they have on the use of natural resources. Strategies oriented to a sustainable management of natural resources (in particular, water) are therefore urgently needed, considering also the increasing effects of climate change. Despite their ecological importance, wetlands remain underrepresented in hydrological modelling studies, especially regarding their specific water needs under changing environmental conditions and different scenarios. This study aims to estimate the water requirements of a temporary wetland through a simple hydrological balance model, ultimately facilitating the identification of strategies for its long-term sustainable management. The pilot case study is the Doñana National Park, SW Spain, one of the case studies of the European project LENSES (PRIMA Call 2020). The model ('WetMAT') is calibrated and validated using historical time series of key hydrological variables (Maximum Flooded Area and Hydroperiod) taken from the literature, to describe the hydrological processes in the wetland. The model is then used for a scenario analysis focused on the assessment of climate change impacts on the state of the wetland and for assessing the ecological water demand of the wetland in a dynamic way, helping to quantify the water needs of such a fragile ecosystem. The results highlight the urgency and importance of developing tools that can help integrating environmental needs into water resources planning and management.

1 Introduction

In the current era human activities increasingly seek and depend on natural resources, often exploiting them beyond their regenerative capacity (Corlett, 2015). These resources have supported major societal transformations, including urban expansion and rapid population growth, but are now strictly limited and several approaches are being considered to support their integrated and sustainable management (Wu et al., 2023). The uncertainty related to climate change adds complexity and poses increasing risks to the availability and use of resources (Iglesias et al., 2006; Garrote, 2017). Within this context, natural areas and their ecosystems pay the consequences of such changes without being able to adapt (Schlaepfer and

ha formattato: Inglese (Regno Unito)

ha formattato: Inglese (Regno Unito)

ha formattato: Italiano (Italia)

ha formattato: Italiano (Italia)

ha formattato: Inglese (Regno Unito)

30 Lawler, 2023). Understanding how to cope with these changes by finding adaptation strategies is therefore increasingly needed (Falkenmark et al., 2019).

Wetlands (which are broadly defined by the Ramsar Convention of 1971 as transitional zones between aquatic and terrestrial ecosystems) are critical environments. They include a wide range of environments, both permanent and temporary, natural or artificial systems, which range from marshes to peatlands (Finlayson et al., 1995). Permanent wetlands have water throughout the year, supporting a stable aquatic ecosystem, while temporary wetlands are subject to seasonal or intermittent flooding, and water is present only during specific periods, often leading to unique ecological dynamics (Boix et al., 2020). The relevance of wetlands relates to the multiplicity of ecosystem services (ESs) they provide, such as climate regulation, flood protection, carbon sequestration, support for biodiversity, as well as socio-economic and cultural benefits that contribute to human well-being (Bhowmik, 2022). Besides providing a multiplicity of ESs, wetlands are also excellent markers for recording the effects of climate change (Vanderhoof et al., 2018) as very often the adaptation strategies of these ecosystems are slower than the changes they are impacted by (Schröter et al., 2019). There is evidence of the climate and anthropogenic impacts at every latitude (Khelifa et al., 2022) and, in particular for temporary wetlands, of an increasing tendency to disappear or deteriorate (Havril et al., 2018). Wetland hydrology relies on a variety of approaches (Lee et al., 2020). Surface and groundwater hydrological modelling techniques are commonly employed, often limited by the frequent absence of sufficient gauging stations within wetlands, which restricts the accuracy of conventional hydrological models (Chomba et al., 2021). Remote sensing techniques (such as drones and satellite imagery) have also become increasingly widespread (Adam et al., 2010), as they enable the acquisition of large-scale, real-time data, effectively overcoming the limits associated with the extensive and variable nature of wetland ecosystems (Wu, 2017; Zhao et al., 2025). However, there are limitations, such as the high costs of high-resolution data acquisition, difficulties in data interpretation due to vegetation or environmental conditions and the scarcity of ground validation data in remote areas (Abdelmajeed et al., 2024). Independent on the approach adopted, the ecological processes related to water are often overlooked, which results in an insufficient evaluation of ESs (Xu et al., 2018), and ultimately in an incomplete understanding of wetland dynamics (Xu et al., 2020). Another gap lies in the limited representation of the temporal dynamics of these environments, (Zhang et al., 2016), which is particularly evident when assessing climate change impacts (Liu and Kumar, 2016).

55 To address these gaps, it is essential to use integrated and dynamic tools for wetland analysis (Manzoni et al., 2020) that can help include multiple dimensions and dynamics (Ding et al., 2024), while making explicit the active role of ecosystems, that should not be merely considered a passive backdrop (Hülsmann et al., 2019). Identifying environmental water requirements is inherently complex, as these needs are not explicitly stated or easily quantifiable (Cosgrove and Loucks, 2015), and an additional effort is required in temporary wetlands, whose hydrological processes are particularly complex (Angeler, 2021).

60 This study details a simple hydrological balance model, WetMAT (Wetland Management Tool), which has been developed to simulate the flooding and drainage dynamics of temporary wetlands. It has been developed and tested in the Doñana National Park (Spain), but its simple conceptual structure is intended to facilitate its application to other wetland systems, where different variables (salinity, water levels, extension of flooded areas) can be used for calibration and validation


~~processes according to the specific characteristics and data availability of each case study, but can be replicated elsewhere.~~

- 65 Differently from available models, which would require a lot of input data (e.g., soil characteristic, soil-water interactions, topography, vegetation), WetMAT proposes a simplified approach based on lumped modelling. The structural and computational simplicity, combined with its daily temporal resolution and strong correlation with meteorological data, allows for accounting for climate change and implementing scenario analyses for evaluating mitigation strategies: the Inundation Persistence Index (IPI) is introduced for this purpose, defined here as a synthetic and physically interpretable metric of marshland inundation dynamics. By integrating information on spatial magnitude of inundations and their temporal persistence, IPI can support inter-annual comparisons and provides a concise basis for scenario-based evaluations. More specifically, in the present work, we aim to address the following research questions: i) Can a simplified hydrological model effectively reproduce the flooding and drainage dynamics of a temporary wetland? ii) Can WetMAT support hydro-ecological assessment? iii) Can it produce actionable information to support decision-makers?
- 70
- 75 The paper is structured as follows. The Section 2 provides a detailed description of the case study and its main challenges. It also includes an in-depth presentation of the WetMAT model, focusing on its operating processes and the key governing equations. Section 3 summarizes the main Results, with a focus on the sensitivity analysis, and on the calibration and validation processes. Climate change scenarios are also detailed. Section 4 provides a thorough discussion on the results obtained, highlighting limitations, strengths and replicability of the proposed model. Finally, future developments of
- 80 WetMAT are presented in the Section 5.

2 Material and Methods

2.1 The case study

- The Doñana region (37°N, 6°W) is an area overlooking the Atlantic Ocean bordered by the Guadalquivir River estuary to the East and the Tinto River estuary to the West (see Figure 1). Located in the SW of Spain, Doñana hosts the largest wetland in the Country and one of the largest in Europe, with significant ecological importance, particularly as a migratory stop for birds, hosting 75% of European bird species (Fernandez-Delgado, 1997). From the demographic point of view, the Doñana region collect about 200.000 inhabitants, and the main economic activities of the area concern tourism and agriculture, particularly berries (Palomo et al., 2011).
- 85

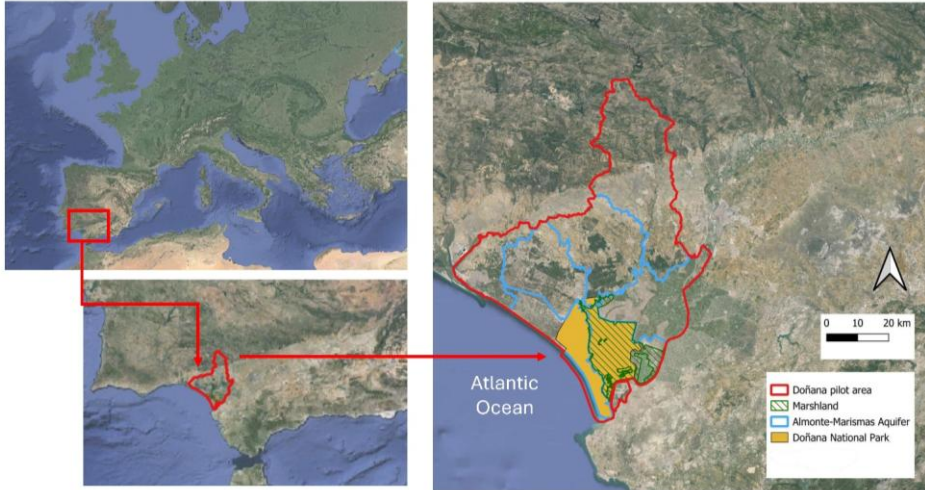

90

Figure 1: Overview of the study area and its major aquifers (elaboration from © Google Earth 2024).

Doñana has a sub-humid Mediterranean climate, with an average annual rainfall around 540 mm although precipitation varies significantly due to Atlantic influence (Serrano, 2016). Climatic projections show also a potential gradual increase in temperatures over time.

95 The natural context of Doñana includes marshes, sand dunes with temporary ponds, coastal systems and estuary (Zorrilla-Miras et al., 2014). The marshland, which is the focus of the present work, consists of a flat area with slight depressions ("lucios") and rises ("vetas"), which are not flooded during peak flooding events, and received originally flow from several streams such as the Guadimar, El Partido and La Rocina (Serrano et al., 2006). At the beginning of 20th century, the natural marshland covered an area of 1,500 km², but it has been reduced by about 80% over time, now spanning around 300 km²

100

largely due to agricultural development occurred over the course of the last century (Leiva-Piedra et al, 2024). The underground hydrology is also complex, characterized by a confined aquifer beneath the marshland and an unconfined, rainfall-fed aquifer in the coastal zone (Suso and Llamas, 1993). These aquifers, according to different monitoring systems, are in poor quantitative and/or qualitative status (CHG,2022).

However, Doñana's marshland is isolated from direct groundwater exchange by a clay layer (Naranjo-Fernández et al, 2018).

105

Several forms of protection have been implemented in the Doñana area since 1969, with the establishment of Doñana National Park. It was recognized as International Biosphere Reserve in 1980, officially recognized by the Ramsar Convention for wetlands in 1982 and a World Heritage Site in 1995 by UNESCO. However, in 1990, Doñana also returned to the Montreux Record of Ramsar Sites Under Treat, mainly considering the pressures from agricultural expansion,

groundwater overexploitation and tourism (Serrano and Serrano, 1996; Sousa et al., 2009) (Martín-López et al., 2011). In particular, the establishment of the Lower Guadalquivir Irrigation Area (in the mid-20th century), encouraged by the Spanish government, led to the regulation of the Guadamar River, effectively isolating the marshland's primary water supply through the 'Entremuros' project. Additionally, in 1998 the accidental collapse of the Aznalcollar dam forced local authorities to further isolate the wetland from the Guadamar River to preserve it from the large volumes of toxic sludge. Nowadays, despite attempts to restore the natural waterways, the marshland is no longer fed by the river Guadamar or its tributaries. (Baena Escudero and Guerrero Amador, 2006). Significant groundwater withdrawals continue to cause substantial declines in the water table, resulting in a reduction of the spring flow at the marshland's edges (ecotones) (Díaz-Paniagua and Aragónés, 2015). For all these reasons the Doñana area represents a complex environment, with severe anthropic pressures on the natural environment, and a multiplicity of stakeholders involved in (and impacted by) its management.

120 2.2 The WetMAT model

2.2.1 Model description

The WetMAT (Wetland MAnagement Tool) model is a mathematical model for a dynamic analysis of wetlands, focused on the estimation of environmental water needs based on its main hydrological processes. The WetMAT model is particularly oriented to the analysis of temporary wetlands, which have a lower hydroperiod compared to permanent aquatic systems (Calhoun et al., 2017). The hydroperiod, a variable related to inundation timing, duration and frequency, plays a crucial role in shaping the ecological structure and function of wetlands by influencing the distribution of plant and animal species (Mitsch and Gosselink, 2007). From the conceptual point of view, wetland flooding directly relates to the annual course of the precipitation. So, there is typically a wet season, generally starting in October and ending in late Spring for the Northern Hemisphere, and a dry season, generally from April to September, when the evapotranspiration process is predominant over precipitation (Fernandez-Carrillo et al., 2019). At the beginning of the wet season, rainfall contributes to the imbibition of the soil. Once the soil is saturated, ponding originates within the most depressed areas of wetland. During the Winter season, with the increase of frequency and intensity of rainfall, the most significant flooding occurs. As the soil is saturated and the most depressed areas filled, wetland starts to flood almost uniformly. During the Spring season, when rainfall events start reducing and temperatures rise, flooded areas reduce, and the small soil depressions start to drain out. During Summer the contribution of precipitation is completely missing while evapotranspiration reaches its annual peak: the drying process of the marshland continues involving also the soil. The whole process is cyclical, although it varies from year to year depending on the variability of rainfall.

Going further into details, the WetMAT model structure relies on nine parameters, which must be defined by the analyst or taken from the case study in order to represent the system, and on a simplified system sketch. Some parameters depend on pedology and land cover of the area, i.e. the soil water content at wilting point and field capacity (θ_{WP} , θ_{FC}), the lateral

drainage factor (Df), the subsoil hydraulic conductivity (K) and the root zone depth (Dr). Other parameters of the model refer to system hydrogeomorphology i.e., the slope of channels banks, the marshland area (Am), the maximum channel water depth (Hp), the number of channels (n). Once these parameters are set, other variables are calculated. These include the linear channel maximum width, the marshland maximum soil water storage, the single channel length, the total channel length, the channel maximum water storage and the drainage density. Table 1 summarises the characteristics of the parameters and quantities described. In the "Type" column it is indicated with "H" the reference to hydraulic characteristics, and with "G" if it refers to hydrogeomorphologic ones.


Table 1: Parameters and derived quantities used by WetMAT model.


PARAMETER	DESCRIPTION	UNIT OF MEASURE	TYPE
ϑ_{WP}	Soil water content at wilting point	mm m ⁻¹	H
ϑ_{FC}	Soil water content at field capacity	mm m ⁻¹	H
Df	Lateral drainage factor	m s ⁻¹	H
Slope of channels banks		deg	G
K	Subsoil hydraulic conductivity	m s ⁻¹	H
Dr	Root zone depth	m	H
Am	Marshland area	km ²	G
Hp	Maximum channel water depth	m	G
n	Number of channels	-	G
DERIVED QUANTITIES			
Linear channel maximum width		m	G
Marshland max soil water storage		m ³	G
Single channel length		m	G
Total channel length		m	G
Channel max water storage		m ³	G
Drainage density		km km ⁻²	G
Channel volume/ Soil water storage		%	H-G

The wetland flooding and drainage process during the seasons described above is reproduced by the WetMAT model at daily scale through three different but interconnected balance processes, as shown in the flowchart of Figure 2. First, a *Soil Water Balance* is performed: when the soil is saturated, a "drainable water flux" is generated, which is the input of a *Channel Water Balance*. When the channels are saturated as well, the excess water volume, namely a "channel overflow flux", originates the marshland flooding. The *Marshland Water Balance* lastly describes the wetland flooding phenomenon and allows the

computation of key variables such as the flooded area. A further process, acting on all three balances, is also represented, namely that of Actual Evapotranspiration. Additional phenomena such as lateral drainage through channels and vertical losses contribute to the marshland emptying process.

160

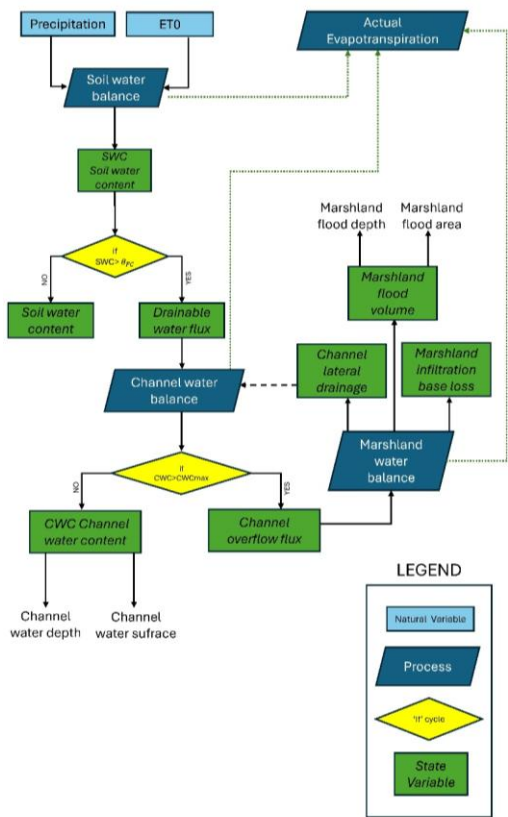

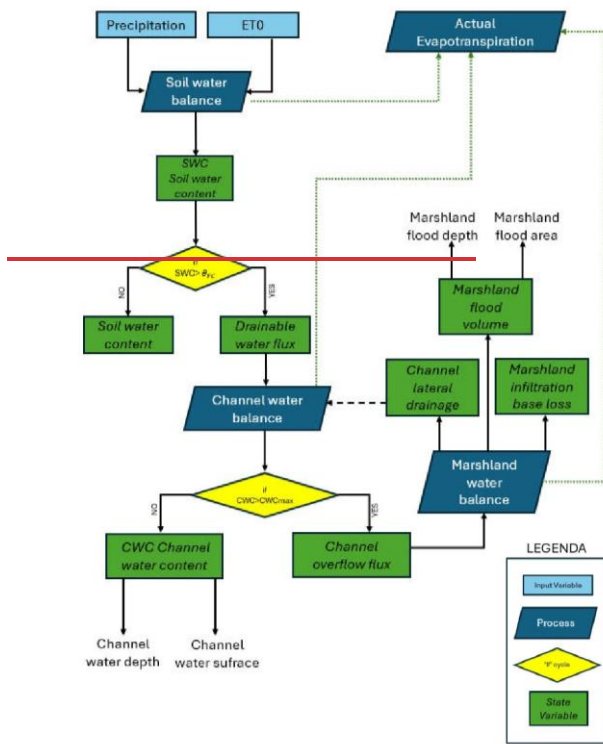

165 **Figure 2: WetMAT model flowchart.**

The following Eq. (1) is the total daily budget equation on which the WetMAT model is based. It describes the overall wetland balance in the most general form.

$$\frac{dV_w}{dt} = P + I_w + G_w - O_w - D_w - ET_w, \quad (1)$$

170 In Eq. (1), $\frac{dV_w}{dt}$ [$\text{m}^3\text{day}^{-1}$] is the volume of water that floods the marshland during each timestep. P [$\text{m}^3\text{day}^{-1}$] is the daily inflow from precipitation, I_w [$\text{m}^3\text{day}^{-1}$] is the wetland inflow from rivers and G_w [$\text{m}^3\text{day}^{-1}$] is the wetland inflow from groundwater. O_w represent the outflows from the wetland, i.e. a river discharge or a direct sea discharge. ET_w represents the daily evapotranspiration: this term aggregates evapotranspiration from vegetated surfaces, affecting the entire marshland area, and open-water evaporation from the intermittently inundated portions of the wetland, whose surface varies in time

with the flooded extent.- Lastly, the term D_w [$\text{m}^3\text{day}^{-1}$] represents the lateral drainage of the channels, which depends on the drainage density and on the main geomorphologic characteristics of the channel. The equations of the three different balances are proposed in the following to facilitate the analysis of the individual processes in detail. The *Soil Water Balance* is mainly based on the calculation of the soil water content SWC according to the Eq. (2):

$$SWC = \max(\vartheta_{WP}; \vartheta_{t-1} + P_{t-1} - ET_{t-1}), \quad (2)$$

where P is the precipitation in the previous temporal step, the actual evapotranspiration ET of the previous temporal step is calculated as a function of the potential evapotranspiration ET_0 using the Hargreaves-Samani formula (Hargreaves and Samani, 1985) and the hydraulic soil parameters according to the following Eq. (3):

$$ET = ET_0 \left(\frac{\vartheta - \vartheta_{WP}}{\vartheta_{FC} - \vartheta_{WP}} \right), \quad (3)$$

where ϑ is the actual water content in the soil [mm m^{-1}], ϑ_{WP} is the wilting point capacity's soil water content and ϑ_{FC} is the field capacity's soil water content [mm m^{-1}]. In case $SWC > \vartheta_{FC}$ the soil produces a surplus, called Drainable Water Flux, which feeds the second balance of the model i.e. the *Channel Water Balance*. The *Channel Water Balance* is described by Eq. (4):

$$CWC = \max(0; CWC_{t-1} + \min(DWF; CWC_{max} - CWC_{t-1}) - ET * Ap_{t-1} + P * Ap_{t-1}), \quad (4)$$

where CWC [m^3], i.e. the Channel Water Content, is compared to its maximum value CWC_{max} [m^3], depending on the geometric characteristics of the system. DWF [$\text{m}^3\text{day}^{-1}$] is the Drainable Water Flux, i.e. the surplus of water which cannot be absorbed by the soil in the *Soil Water Balance*. Ap is the Channel Water Surface in the previous time step. Unlike *Soil Water Balance* where soil characteristics are predominant, the *Channel Water Balance* mainly depend on system geomorphology. The water content in the channels of the previous temporal step and the available Drainable Water Flux are considered. In addition, Eq. (4) considers the balance of direct evapotranspiration (ET) and precipitation (P) on the channel. The *Marshland Water Balance* is mainly expressed through the variable Marshland Flood Volume (MFV) [m^3], represented by the following Eq. (5). Again, the *Marshland Water Balance* is triggered by an "overflow flux" from channel overflow, responding to the condition " $CWC > CWC_{max}$ ".

$$MFV = \max(0; MFV_{t-1} + COF + MFA_{t-1} * P - MFA_{t-1} * ET - CLD - MIL), \quad (5)$$

In Eq. (5) above, COF [$\text{m}^3\text{day}^{-1}$] is the "Channel Overflow Flux", the amount of water flowing from channels once they have reached the CWC_{max} . MFA stands for "Marshland Flooded Area" and it is expressed as a simple power-law function of MFD, following the depth-area relationships commonly adopted for shallow wetlands and low-relief basins (e.g. Hayashi and van der Kamp, 2000), and the exponent in Eq. (6) (empirical) was fixed at 0.2 for parsimony: calculated considering the area of the marshland A_m and the Marshland Flood Depth MFD [m], as in Eq. (6) (empirical):


$$MFA = A_m * MFD^{0.2}, \quad (6)$$

205 The Channel Lateral Discharge (*CLD*) [$\text{m}^3\text{day}^{-1}$] and the Marshland Infiltration Loss (*MIL*) [$\text{m}^3\text{day}^{-1}$] represent the losses in the marshland. Specifically, *CLD* refers to the lateral drainage of the channels, taking into account their hydrogeomorphological characteristics. *MIL* addresses the vertical losses from the floods, assuming a clayey soil and a very low drainage rate.

Based on the set of Equations above, the model aims to reproduce in a simplified yet consistent way the marshland flooding process. The variable *MFA* [km^2] calculated on a daily basis, provides spatial information such as the maximum annual flooded area recorded for each hydrological year. Through the analysis of *MFA* is also possible to calculate how many days per year flooding of the marshland is observed (hydroperiod), so obtaining temporal information about the flooding and draining processes in the system. In particular, the mean hydroperiod is calculated in WetMAT by counting, yearly, the number of days in which the marshland is flooded and the average value for the flooded area.

2.2.2 WetMAT implementation in the Doñana marshland

215 The following Figure 3 shows the WetMAT scheme for the Doñana case study as described above.

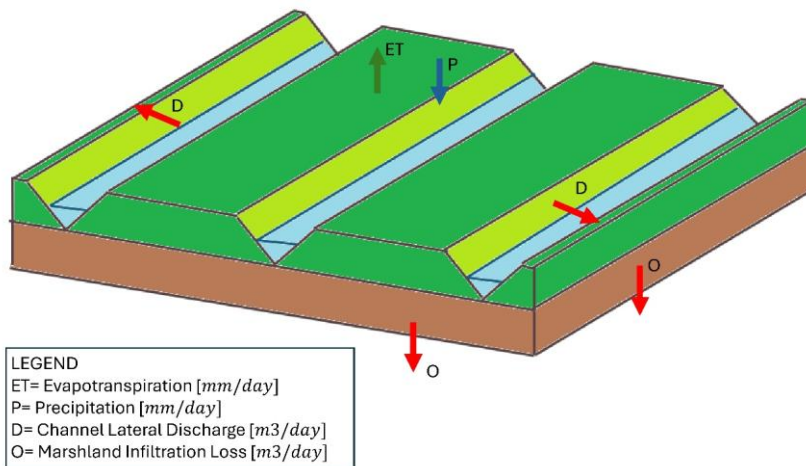

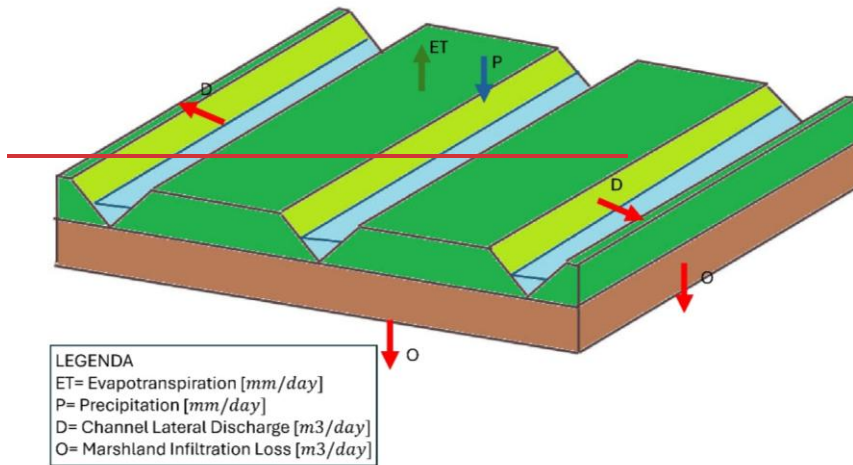


Figure 3: WetMAT model scheme for the Doñana case study, with evapotranspiration (ET) and precipitation (P) as main fluxes, small losses due to infiltration (O) and the Channel Lateral Discharge (D) affecting the marshland flooding process.

The WetMAT is used in the Doñana marshland case study based on the following assumptions.

The Doñana wetland is a flat area with small depressions, which is described in the WetMAT model as a square area and a series of identical, equidistant, triangular channels. ~~In Eq. (1) both J_w in Eq. (1) can be disregarded in this case study because hydraulic works carried out during the 20th century to channel the courses of Guadiamar and Guadalquivir rivers have substantially altered the wetland's hydrology so it can be considered hydraulically disconnected from its main original sources of surface-water supply (Morris et al., 2013). The term G_w in Eq. (1) is likewise negligible, leading to a further simplification of the model: over the last thirty years, piezometric levels in the aquifer have declined by up to 20 m in some points, probably due to numerous irrigation withdrawals (Green et al., 2024), resulting in the total or partial drying up of the minor watercourses that flowed into the marshland and, above all, in the reversal of the vertical hydraulic gradient in the natural discharge areas on either side of the area, i.e. ecotones, for the case study since the wetland, as a result of modifications of the hydraulic system, can be actually considered disconnected from inflow and direct recharge systems from groundwater.~~ For the purpose of the present case study, a vertical leakage rate is only provided, which depends on the current flooded area and the estimated hydraulic conductivity of the subsoil. As it is mainly constituted by clay, its contribution is negligible compared to ET_w , the daily evapotranspiration, which constitutes the main dynamic loss component of the balance and varies over time depending on the extent of the flooded area of the marshland. The WetMAT simple balance for the Doñana case study is hence expressed by Eq. (7):

ha formattato: Apice

$$\frac{dV_w}{dt} = P - O_w - D_w - ET_w, \quad (7)$$

2.2.3 Model parameters

Regarding Doñana marshland, Table 2 shows the ranges of values recommended in the literature and selected for each parameter.

According to the geology of the marshland, with a superficial layer of clays and a deeper layer of alluvial sands and gravels (García Novo & Marín Cabrera, 2006), it was possible to research soil moisture thresholds in the literature (Allen et al., 1998, Chapter 8, Example 36) and through the use of software for identifying soil water characteristics given their composition. According to these sources for the ϑ_{WP} a range of ~~400-150-300-350~~ mm m⁻¹ was considered while ϑ_{FC} lies likely in a range between 300 and 500 mm m⁻¹. For The-the lateral drainage factor (Df) the range of values -would be reasonable to have values- between 10⁻⁶ and 10⁻³ m s⁻¹ has been chosen, according to the average properties of a-the marshland's system, already used in other mathematical models (Serrano Hidalgo, 2023). For the marshland subsoil hydraulic conductivity (K), depending on the type of soil (Shackelford, 2013) a spectrum of values ranging between ~~0,22 * 10⁻¹⁰⁹~~ m s⁻¹ and ~~0,22 * 10⁻⁷⁶~~ m s⁻¹ has been set. Considering the presence of a clay soil and the vegetation that composes the marshland, the range of values chosen for the root length parameter (Dr) is 0.5–1.5 m, consistent with standard values for herbaceous and wetland vegetation (Feddes et al., 2001) and coherent with the shallow groundwater conditions and seasonal regime of Doñana (Serrano et al., 2006). the root length is not very deep and therefore the root zone depth (Dr) is estimated to be from 0,5 to 1,5 m. Other parameters, depending exclusively on the geometry of the model, were chosen as follows for modelling simplicity: H_p varies between 1 and 3 m while the number of linear channels in the system was varied from 2 to 11. The marshland area A_m , assumed square for simplicity, was not varied as it is known from technical reports (Sánchez Navarro et al., 2009), literature sources (Paredes Losada, 2020; Martínez-Cortina et al., 2010; Aldaya et al., 2010) and available data (such as soil use maps). Similarly, the slope of channels banks is assumed to be 45° for modeling simplicity. Table 2 provides full details on the parameters, and includes the “default values”, i.e. reference values for conducting the sensitivity analysis.

Table 2: Parameters' ranges and default values for Doñana case study.

PARAMETER	UNIT OF MEASURE	ESTIMATED RANGE	DEFAULT VALUE
ϑ_{WP}	mm m ⁻¹	400-150 - 300 <u>350</u>	200
ϑ_{FC}	mm m ⁻¹	300 - 500	330 <u>400</u>
Df	m s ⁻¹	10 ⁻⁶ - 10 ⁻³	10 ⁻⁵
Slope of channels banks	deg	45	45
K	m s ⁻¹	0,2 * 10⁻¹⁰⁹ - 0,2 * 10⁻⁷⁶	0,2 * 10⁻⁹⁸

<i>Dr</i>	m	0,5 – 1,5	1
<i>Am</i>	km ²	311	311
<i>Hp</i>	m	1 – 3,5	3
<i>n</i>	-	2 - 11	5











3 Results

This section presents a sensitivity analysis of the model parameters, together with a description of the calibration and validation procedures. The main outputs of WetMAT are then reported, followed by a preliminary application to climate change scenarios.

3.1 Sensitivity analysis

This paragraph explores the sensitivity of each parameter in relation to the various dynamics simulated by the model. Through sensitivity analysis, we assess to what extent each parameter influences the different processes and identify which parameters have the most significant impact on each dynamic.

This sensitivity analysis is fundamental as it supports the calibration of parameters, detailed afterwards. It allows breaking down the model into components that can be analysed individually, to increase awareness of model limits and sources of uncertainty. We refer, in the following, to three key output variables, namely: the maximum annual flooded area (*max MFA*) (km²) of the marshland, the mean hydroperiod (days * year⁻¹) of the marshland and the average annual flooded surface of channels *Ap* (m²) variable, this one, which draws attention to the *Channel Water Balance*. A univariate sensitivity analysis was performed, varying each parameter within its range using regular intervals. The other parameters were set to their default value (see Table 2). The marshland model has been run using precipitation (mm) and temperature (°C) daily data in the period from 1979 to 2018, recorded in the “Palacio de Doñana” meteorological station by EBD-CSIC. From these data the daily *ET* (mm) has been obtained using Hargreaves-Samani approach (Hargreaves & Samani, 1985). Sensitivity analysis was conducted on all parameters and Figure (4) represents the sensitivity of the selected output variables to parameters where the sensitivity is greatest, referring to the 25th, 50th and 75th percentile of the analysed sample.



Formattato: Allineato al centro

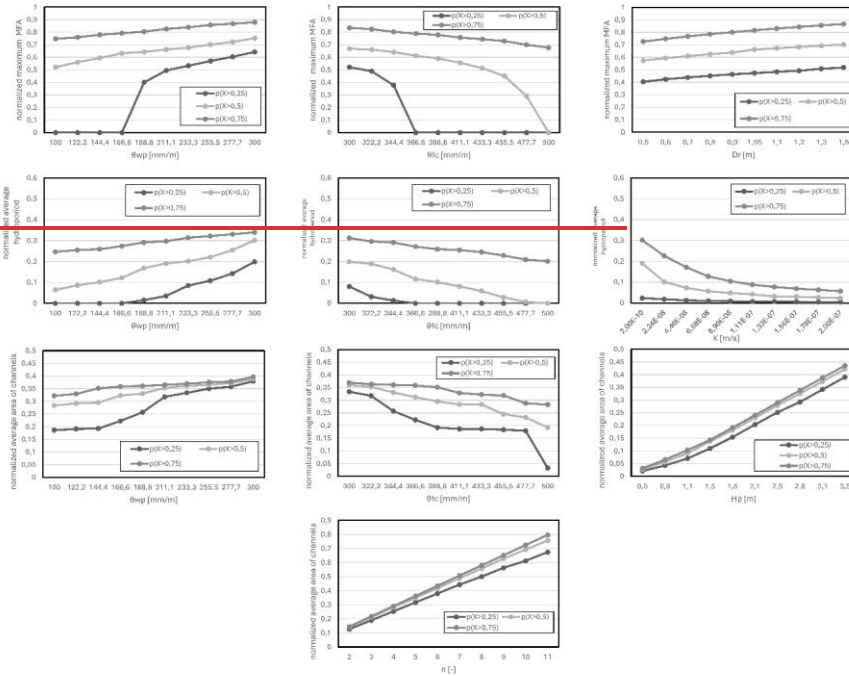


Figure 4: Sensitivity analysis for most sensible model parameters in the evaluation of annual maximum MFA, average hydroperiod and annual average area of channels.

More specifically, Figure (4) shows the impact of parameters on the maximum MFA, normalized by the total marshland area, on the average hydroperiod normalized by the number of days per year, on the average area of channels normalized by its maximum value found in simulations performed (1200000 m²).

Regarding the maximum MFA, parameters related to soil moisture thresholds (θ_{WP} , θ_{FC}) certainly have an interesting trend particularly for low values. The ($X>0.25$) percentile shows a significant "threshold" trend in both cases (for values placed in the middle of the chosen range) and in the case of θ_{FC} this behaviour is also consolidated for the median. The θ_{WP} parameter is directly proportional to the increase of the flooded area while for high values of θ_{FC} the flooded area decreases, as the soil is supposed to absorb great amounts of water. Moreover, the relevant difference between three percentiles can be, in this case, attributed to the climatic variability of the area in terms of precipitation and evapotranspiration. The model is quite insensitive to the variation of Df , Hp and n , which are the main hydrogeomorphologic parameters of the model. This is not

surprising, as the annual maximum flooding occurs when the channels are already full and the area above is uniformly flooded. A limited sensitivity to K and Dr is in this case also observed: as expected, when the hydraulic conductivity increases, the maximum flooded area decreases. Regarding the hydroperiod output, a different perspective is observed, as it focuses on environmental needs over time rather than in space, indicating how many days per year the marshland is flooded. The model shows again a relevant sensitivity to soil moisture parameters (ϑ_{WP} , ϑ_{FC}). Compared to MFA , a lower dispersion of data can be noticed, and the changes in system behaviour are less abrupt. Furthermore, the relationship between parameters and the average hydroperiod does not have a clear transition based on a threshold. The model sensitivity to Hp , n and Dr is almost negligible, thus highlighting a limited relevance of hydrogeomorphologic characteristics. A considerable dispersion of data for a variable number of channels is evident: this occurs because the change of geometry contributes to create a different system in every simulation, thus with a different response to daily climatic outputs. Interestingly, Df and K have a limited impact on the dispersion of values, but a high sensitivity (in particular for K) for low values within the selected range. Regarding the channels area, also in this case, the moisture related parameters (ϑ_{WP} , ϑ_{FC}) are highly relevant, yet with a minor data dispersion compared to MFA and hydroperiod. It's also important to note that both ϑ_{WP} and ϑ_{FC} exhibit a significant variability in relation to the changes in their values, compared to the other parameters analysed for the same process. The variable is completely insensitive to Df , K and Dr . Conversely, Hp and n play a central role in the process of flooding and emptying of channels. The drainage velocity (lateral and vertical) does not play a central role, but hydrogeomorphological parameters have great sensitivity in this process: the normalized flooded area of the channels varies from 0 to 0.4 for the parameter Hp , and from 0.15 to 0.8 for the parameter n ; the data dispersion is minimal, and this indicates that the whole sample shows no exceptions. There is direct proportionality between variables and outputs. The summary of the results of the sensitivity analysis is qualitatively proposed in Table 3. Basically, the selected outputs show a high sensitivity to parameters concerning the soil moisture, so a careful calibration is needed. The divergent trends observed for these parameters are consistent with fundamental soil physics (Seneviratne et al., 2010). Specifically, an increase in field capacity (ϑ_{FC}) enhances the soil's water retention capacity, thereby reducing flooding through increased storage within the control volume. Conversely, a higher wilting point (ϑ_{WP}) leads to a contraction of the available water for vegetation, inducing a premature cessation of evapotranspirative fluxes. This condition maintains a higher residual water content within the soil profile, facilitating rapid saturation during subsequent meteorological events and consequently increasing the MFA. Conversely the lateral drainage factor shows a very limited impact. Concerning the other parameters, each output shows a different sensitivity. Interestingly, n and Hp (hydrogeomorphologic parameters) for the first two outputs have no sensitivity, but the output of the average channel area is strongly dependent on them. Noteworthy is also the case of the depth of the root zone, which affects only the maximum flooded area even if it is located below the system so it might expect influence on the other processes.

Table 3: Qualitative results of sensitivity analysis for all processes simulated with the model.

ha formattato: Inglese (Regno Unito)

ha formattato: Inglese (Regno Unito)

ha formattato: Inglese (Regno Unito)

ha formattato: Inglese (Regno Unito)

ha formattato: Inglese (Regno Unito)

ha formattato: Inglese (Regno Unito)

PARAMETER	ANNUAL MAX MFA	MEAN HYDROPERIOD	AVERAGE CHANNEL AREA
θ_{WP}	High sensitivity	High sensitivity	High sensitivity
θ_{FC}	High sensitivity	High sensitivity	High sensitivity
Df	Low sensitivity	Low-Medium sensitivity	No sensitivity
K	Low-Medium sensitivity	High sensitivity	No sensitivity
H_p	No sensitivity	No sensitivity	High-sensitivity
n	No sensitivity	No-Low sensitivity	High-sensitivity
Dr	High-Medium sensitivity	No sensitivity	No sensitivity

3.2 WetMAT calibration and validation

The present section deals with model calibration and validation, which has been performed comparing model outputs (annual maximum flooded area *MFA* and average hydroperiod of the marshland) with observed data. Regarding the *MFA*, reference Reference was made to observed data from the 1980-81 hydrological year to 2017-18 (Green et al., 2024). The observed data for the hydroperiod were instead extrapolated from a study based on satellite images processing in the period 1980-2014 (Díaz-Delgado et al., 2016). Regarding the latter, it is worth to highlight a difference in how the variable "hydroperiod" is calculated: while in the observed series it is calculated based on the pixels assumed flooded in the processed satellite images and counting the number of days per year during which the pixels are flooded, from which a mean value for the entire area is then deduced, WetMAT model does not provide a spatial representation of the wetland, which is therefore considered as a single pond and the hydroperiod variable consists of an estimation of the days when the model has a non-zero flooded area value. Figure (5) summarizes the main steps in the calibration and validation processes of the WetMAT model, described in further details afterwards.

345

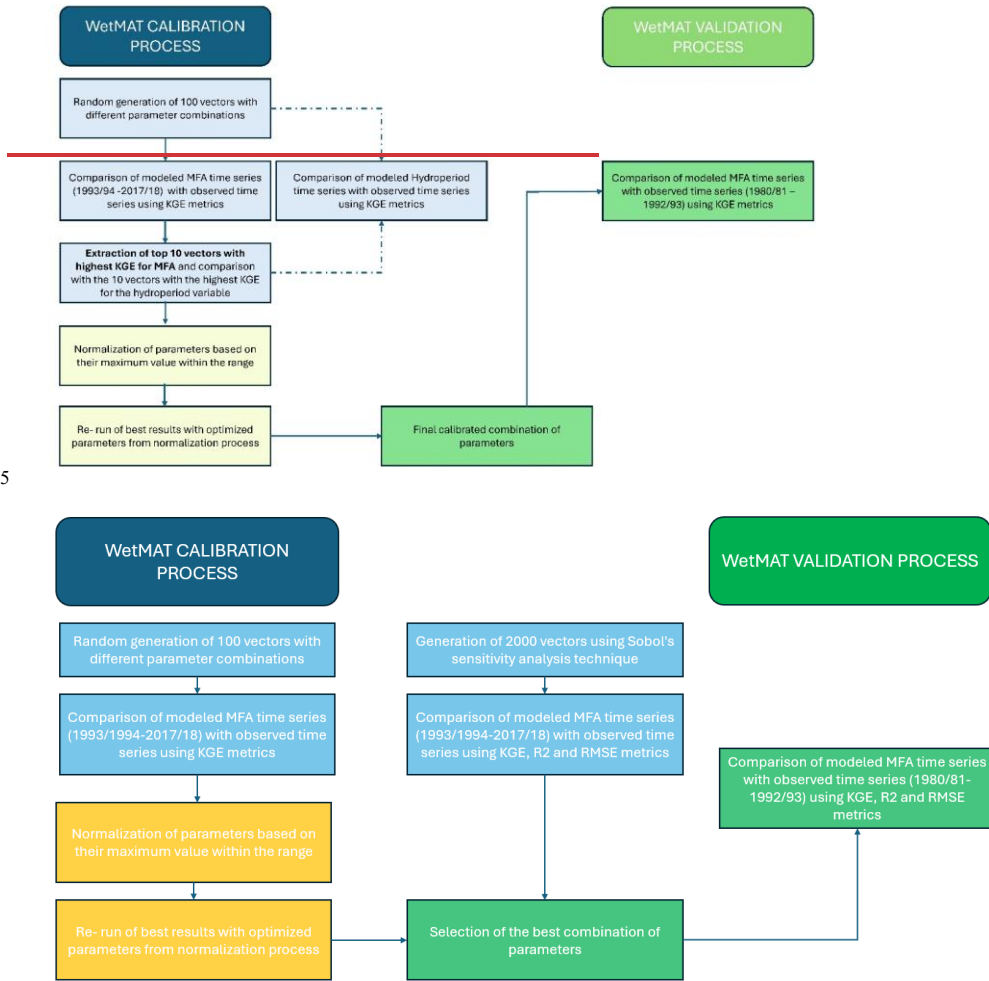


Figure 5: Main steps involved in the calibration and validation processes of the WetMAT model.

The calibration process started with the random generation and combination of input parameters (except the marshland area and the slope of the channels that were kept constant) in 100 simulations. The calibration process followed two parallel

350 pathways, which were combined only when selecting the best parameter set to be adopted for the validation stage. On the one hand, calibration relied on the generation of 100 random simulations (Monte Carlo) where all parameters varied within their range except those related to marshland area and slope of channels that were kept constant. On the other hand, a Sobol' sequence approach (Sobol',1967) was employed as a quasi-Monte Carlo technique to generate 2000 parameter sets, providing a more space-filling sampling of the parameter domain than purely random draws. The outputs from all simulations were compared against observations using three complementary metrics, so as to account for both performance and error aspects (Althoff and Neiva Rodrigues, 2021). Specifically, R^2 and Kling-Gupta Efficiency (KGE) metrics were adopted as performance metrics, whereas Root Mean Square Error (RMSE) was used as an error metric. The R^2 metric, although simpler and more intuitive, primarily reflects the model's ability to reproduce the observed variability and is mainly informative with respect to timing; however, it is not sensitive to systematic bias and therefore provides limited insight into volumetric errors, which nonetheless remain relevant. Complementarily, the composite KGE metric is widely regarded as a reference standard in hydrological modelling and has also been considered preferable to other compound measures such as NSE (Thiemig et al., 2013). KGE (Gupta et al., 2009) enables the simultaneous assessment, through separable components, of correlation, bias, and variability. RMSE quantifies the typical magnitude of the simulation error in the same units as flooded area, facilitating a direct physical interpretation. It complements KGE and R^2 by emphasizing large deviations and by providing an absolute measure of accuracy. Results were then compared with observation using the KGE metric (Gupta et al., 2009; Liu, 2020), which is widely used in hydrological modelling. The historical time series used for the calibration phase spans from the 1993-94 hydrological year to the 2017-18 hydrological year for the MFA variable. The hydroperiod time series, used solely as support for the validation process, covers the hydrological years from 1980-81 to 2013-14. The KGE values for the MFA vary significantly between 0.13 and 0.82. The KGE values for the hydroperiod are instead below 0.54 but results are consistent with those of the maximum annual flooded area, as 70% of the ten simulations with highest KGE values for the MFA coincide (although not in the same order) with the ten simulations having the highest KGE values for the hydroperiod. These results are valuable, particularly considering the limited availability of historical time series for comparison, as the only datasets available for the maximum MFA and hydroperiod variables are those used in this study, with no other relevant literature providing comparable datasets. An additional analysis on random generated vectors was then performed to further support model calibration: the ten high-ranked simulations in terms of KGE for the maximum flooded area were analysed, normalizing the parameters with respect to the maximum value in the range. All most of the parameters chosen within these simulations were in the middle of their range except; however, the values of θ_{wp} and K that fell respectively in the upper and lower bounds of their ranges. The ten best random simulations have been therefore re-run, replacing the θ_{wp} and K values with its extreme values. This choice is consistent with the predominantly clayey soil texture; therefore, adopting a very low hydraulic conductivity is appropriate. Exploring even lower values is unlikely to be informative, because the literature-informed lower bound already renders the corresponding loss term effectively negligible in the water balance. As a result, higher values of KGE (0.85) were obtained for the maximum flooded areas. The final calibrated parameter set, selected by jointly considering the three performance/error metrics for the top-ranked parameter

ha formattato: Tipo di carattere: Non Grassetto

vectors generated through the two parallel calibration approaches, is reported in Table 4 and was subsequently used for WetMAT simulations. Figure (6a) shows the comparison between observed and simulated values of maximum MFA. The set of calibrated parameters is reported in Table 4 and used for WetMAT simulations. Figure (6 a) shows the comparison between the observed and calculated values of the maximum MFA.

The validation phase of the WetMAT model involved comparing historical time series of the maximum MFA variable, specifically the series generated by the WetMAT model with that from (Green et al.,2024), covering the period from the 1980-81 hydrological year to the 1992-93 hydrological year. Although the available time series is too short for a fully robust long-term assessment, length of the time series is not fully satisfactory, a commendable KGE value of 0.73 was achieved. Figure (6 b) shows results of the validation process.

The resulting performance was interpreted against threshold values commonly adopted in general hydrological model evaluation, for which these metrics were originally developed. Accordingly, model performance can be classified as “good” for KGE, both during calibration and in the subsequent validation, consistent with the criteria reported in Thiemiig et al. (2014). Similarly, the model shows good R^2 performance in both calibration and validation, as established in the literature (Moriassi et al., 2015).


ha formattato: Inglese (Regno Unito)

ha formattato: Inglese (Regno Unito)

Table 4: Calibrated vector for WetMAT model.

ϑ_{WP}	ϑ_{FC}	Df	K	Dr	Hp	n
300	426	$8,14 \cdot 10^{-4}$	$2 \cdot 10^{-10}$	1,41	1,25	5

Formattato: Allineato al centro

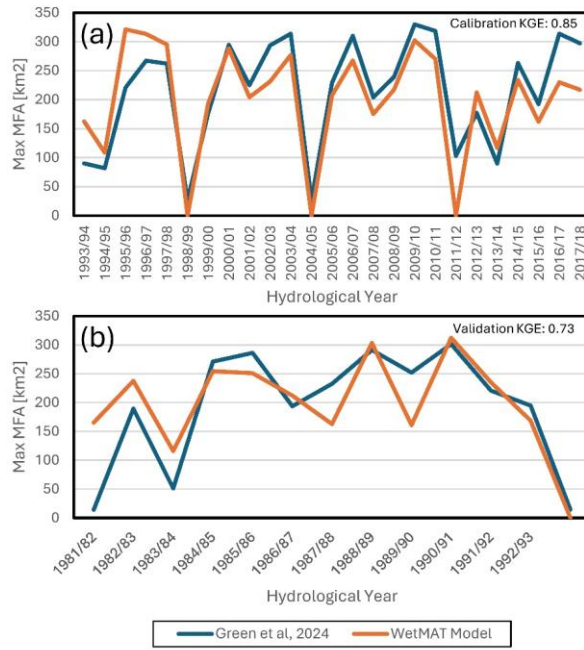

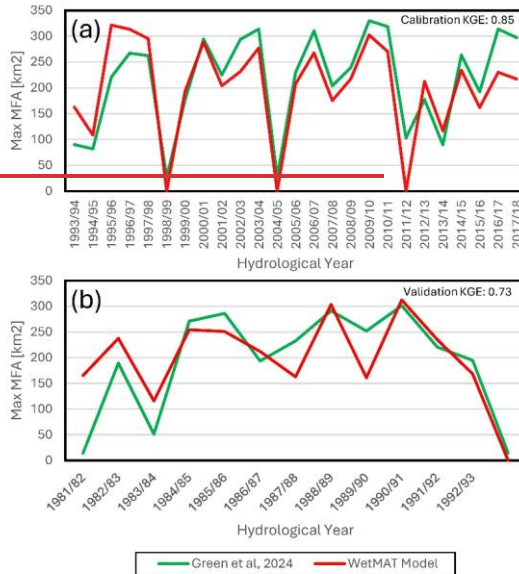


Figure 6: Panel (a) shows the WetMAT model calibration according to the “maximum MFA” variable. Panel (b) shows the WetMAT validation according to the “maximum MFA” variable.

3.3 WetMAT outputs

The main output of the WetMAT model is the *MFA* calculated on a daily scale, that allows also the generation of the hydroperiod of the marshland. [Data relating to the hydroperiod are available in the literature \(Diaz-Delgado et al., 2016\) but are calculated differently, following a pixel-based approach unlike how they are calculated in this study, considering the marshland as a single pond, according to a lumped approach whereby the hydroperiod in this case is given by the number of days in which an MFA value different from zero is observed.](#) Some examples are shown in Fig. (7) where the recorded rainfall is represented as well. More specifically, Fig. (7a) shows the hydrological year 2005-06, that can be considered a dry year, as the precipitation value (468.3 mm) is close to 25th percentile of the analysed series (440.25 mm). Figure (7b) instead refers to the hydrological year 2006-07, i.e. a wet year, as the precipitation value (716.9 mm) is the closest to the 75th

percentile in the analysed series (1992-93, 2017-18). Figure 7(c) then represents the output of the model over an average hydrological year (2014-15), characterized by a total annual rainfall of 531.85 mm. The flooding period obtained through WetMAT generally begins in Autumn and ends in late Spring and, despite a high variability, it is consistent with literature evidence (Bustamante et al., 2009; Serrano et al., 2006).

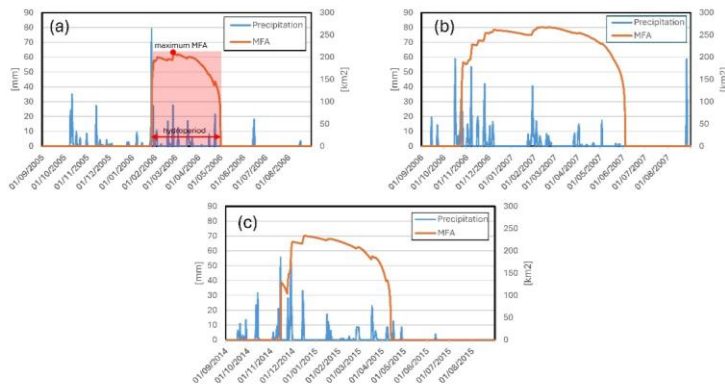


Figure 7: Panel (a) shows the daily plot of flooded areas in hydrologic year 2005-2006 taken as representative of dry year. Panel (b) shows the daily plot of flooded areas in hydrologic year 2006-2007 taken as representative of wet year. Panel (c) represents flooded areas in hydrologic year 2014-2015, taken as representative of an average hydrologic year. All panels show daily precipitation during the hydrologic year.

As previously discussed, the *MFA* variable generated from WetMAT facilitates both spatial and temporal analysis of flooding dynamics in the marshland. While the hydroperiod and maximum annual *MFA* are somehow correlated, there is no evidence of mutual dependency, and therefore is essential to consider both variables when assessing marshland state. The importance of incorporating both temporal and spatial characteristics in hydro-ecological studies has been widely acknowledged (Peng et al., 2022; Coleman et al., 2015), particularly in the context of temporary wetlands (Rawat et al., 2025), where ecosystem functioning depends on the joint role of flooded extent and duration. To provide a single, decision-oriented indicator that can synthesize these two dimensions, the Inundation Persistence Index (IPI) is introduced, assumed as key metric of this study. For each hydrological year, IPI is defined as the product of maximum *MFA* and the hydroperiod, (expressed as $[\text{km}^2/\text{days}]$). By construction IPI can reach high values only when inundation is both extensive and long-lasting, whereas it approaches zero when flooding is limited in the spatial or temporal aspect. In this study, therefore, a composite variable, hereafter referred to as the Inundation Persistence Index (IPI), is introduced, effectively integrating the concepts of maximum *MFA* and hydroperiod. IPI is designed to quantitatively highlight both aspects that, from the hydrological point of view, reflect the state of a temporary wetland throughout the year. While the present formulation is

ha formattato: Apice

aimed at inter-annual comparisons within the study site, useful specifically for scenario-based assessments, a natural extension of IPI would be a dimensionless, normalized version to facilitate comparisons across different Mediterranean wetlands. This composite variable is given by the yearly product between MFA and hydroperiod and can be also easily graphically represented (see Fig. (7a) for reference). The analysis of the time series of the IPI variable with annual rainfall (proposed in Fig. 8) shows that IPI is equal to or very close to zero in all years with cumulate precipitation below the threshold of 400 mm yr⁻¹ (identified empirically as the transition range separating years with negligible inundation from years with persistent inundation) /yr. Figure 8 shows also that, once if the annual precipitation goes above the exceeds 400 mm yr⁻¹, -IPI increases with precipitation, indicating a precipitation-controlled regime, there is a good correlation between the two variables.

ha formattato: Apice

ha formattato: Apice

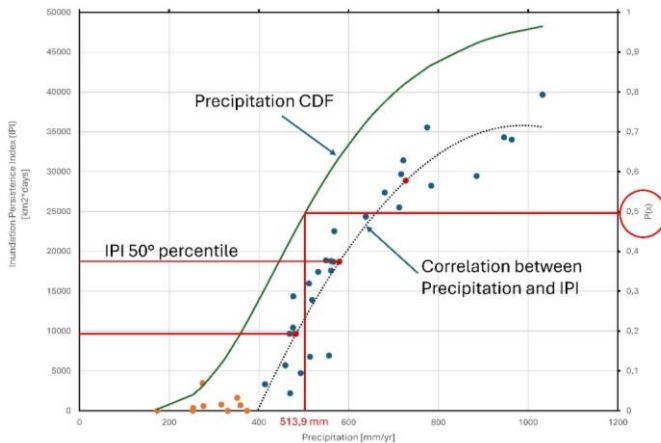


Figure 8: Precipitation log-normal CDF and correlation between Precipitation and Inundation Persistence Index (IPI).

Figure 8 proposes a direct comparison between the precipitation CDF curve and the curve relating the IPI to the precipitation time series. Importantly, "typical" inundation conditions should be interpreted conditionally on inundation occurrence, rather than by directly mapping central tendency metrics of the full precipitation record to inundation metrics. Interestingly, there is no direct correlation between the 50th percentile of both series. This means implies that even in an average year (in terms of rainfall), represented by a rainfall of 513,9 mm year⁻¹, does not necessarily correspond to typical inundation conditions, and marshland flooding does may not necessarily occur. When the ecosystem requires extra water supplies, especially during drought years as indicated by the IPI, this would imply

management interventions that are beyond the scope of the present work, as WetMAT results are intended to provide hydrological inputs for the design of more complex management scenarios requiring separate, detailed assumptions and analyses. In practice, such interventions could include limiting agricultural groundwater withdrawals and reallocating part of the saved volume to controlled wetland inundation, and/or supplying water from external sources (inter-basin transfers or releases from adjacent artificial reservoirs). When the ecosystem requires extra water supplies, especially during drought years as indicated by the IPI, solutions can be implemented as the reallocation of groundwater resources, not considered in the actual vertical balance of the model.

To quantify the amount of water needed by the marshland to reach its average flooding conditions, the correlation between precipitation and IPI and then between the IPI and the cumulate water inputs generated by precipitation on the marshland, namely the Cumulate Inflow (Mm^3), are determined. This is shown in Fig. (9) using both a second-degree equation ($R^2=0.89$) and a third-degree equation ($R^2=0.95$). Those equations could be used to estimate, on a yearly basis, how much water is needed beyond precipitation for marshland flooding.

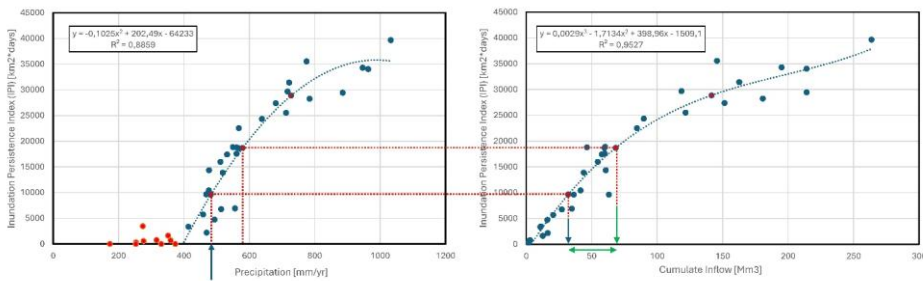


Figure 9: Determination of annual water inputs to the marshland.


3.4 Preliminary WetMAT applications under climate change scenarios

WetMAT can be easily used to model several scenarios, including those related to climate change. Two “representative concentration pathways” (RCP), namely RCP 4.5 and RCP 8.5 (van Vuuren et al., 2011), are analyzed. The climate projections used as forcing in this section were obtained from PRIMA LENSES project datasets and here adopted as external inputs for the model. Daily precipitation and 2-m air temperature data were taken from the Copernicus Climate Change Service (C3S) and, specifically, from the CORDEX regional climate projections database (C3S, 2019), which provides

485 dynamically downscaled simulations from Global Climate Models (GCMs) to Regional Climate Models (RCMs) under the
EURO-CORDEX framework. Within the LENSES project, an ensemble approach was adopted in which multiple RCMs
driven by different CMIP5 GCMs (Coupled Model Intercomparison Project Phase 5) were used to represent climate-model
uncertainty. For the Doñana domain (with coordinates 37.8–36.8°N and 6.9–6.0°W used), the dataset has daily temporal
resolution and 5-km spatial resolution for both precipitation and mean temperature. Importantly, for these two variables a
490 bias-adjusted EURO-CORDEX dataset was adopted: the daily precipitation and temperature ensemble was bias-adjusted
using EFAS-Meteo as reference and a bias-adjustment method developed by the Swedish Meteorological and Hydrological
Institute (SMHI). Precipitation and mean daily temperature are directly available, while evapotranspiration
Evapotranspiration data (ETP) is are calculated starting from temperature data using the Hargreaves-Samani formula.

Figures (10a), (10b) and (10c) present the results related to climate change scenarios for the three climatic variables used in
the WetMAT model: Precipitation, Mean Daily Temperature, ETP. Reference is made to four data series, namely: i)
495 ‘Baseline (observed)’ with observed data for the period 1980-2017, ii) ‘Baseline (simulated)’ scenario (1971-2000); iii)
RCP4.5 scenario simulated over the period 2011-2100; iv) RCP 8.5 scenario simulated over the period 2011-2100.

As observed when comparing the performance of the boxplots for the three variables, precipitation exhibits greater
variability ~~in the data~~ (Kim & Onof, 2020). This variability notably influences the future scenarios, which show a higher
degree of uncertainty compared to the observed ones. In contrast, the other two variables analysed show less variability in
500 the projections, and therefore less uncertainty. However, there is still a significant increase in the average values, with a rise
of 2.2°C in the average temperature. ETP, being temperature-dependent, follows the same trend as temperature.

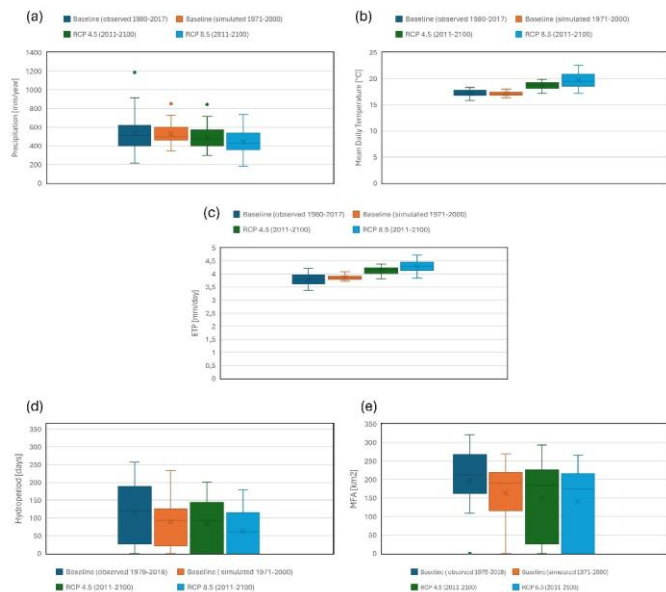

505

Figure 10: Boxplot representing the evolution of Precipitation variable (a), Mean Daily Temperature variable (b), ETP variable (c). Panel (d) represents the evolution of Hydroperiod variable in climate change scenarios and panel (e) represents the evolution of maximum Marshland Flooded Area (MFA) variable in climate change scenarios.

The results of the WetMAT model referred to the two main processes of the marshland, namely the MFA and the hydroperiod are presented in Fig. (10d) and (10e). Reference is made to the same scenarios described above. In WetMAT, these descriptors of flooding conditions are controlled by the balance between precipitation inputs and atmospheric demand. Accordingly, the projected increase in temperature and the associated increase in ETP reduce the effective water availability and provide a mechanistic explanation for the simulated decrease in both hydroperiod and MFA, with stronger impacts under RCP 8.5. Conversely, the high variability of precipitation mainly contributes to the uncertainty of the projections rather than providing a single dominant directional driver.

515

Figure 10 shows that the variability of variables (in particular MFA) greatly increases in climate change scenario. Results show a potential worsening of marshland's conditions with a general decrease of the extension of flooded areas and a decrease of the hydroperiod.

4 Discussions

520 This section details to what extent the present study answered the research questions formulated in the Introduction and highlights limitations and potential replicability of the WetMAT tool.

First, despite the complexity of the temporary Doñana wetland and the simplifications introduced in WetMAT, the tool can satisfactorily reproduce the flooding and drainage dynamics of the wetland, achieving a good match with the observed data in terms of MFA. Details on model calibration and validation are presented in section 3.2.

525 Second, concerning the role of WetMAT for supporting hydro-ecological assessment, the comparative analysis of Fig. (7), highlights differences between the different hydrological years in terms of MFA and hydroperiod. It is important to emphasize that in the analysed period, the wettest and driest years occurred in consecutive years. This is a clear example of the considerable interannual climate variability in the area, and subsequent complexity in system state assessment. Furthermore, as Figure (7a) clearly shows, it should be noted that despite the rainy season may start long before the
530 beginning of marshland flooding, the flooding takes place only after particularly intense rainfall (approximately exceeding 50mm). Figure 10 show an analysis performed focusing on climate change scenarios, which indicate a potential deterioration in the wetland condition over time.

The second research question is closely linked to the third, that focuses on the use of WetMAT to support decision-makers. In this regard, the use of a new parameter, i.e. the Inundation Persistence Index IPI that resumes the hydrological response of
535 the wetland to climate, proves to be valuable. This index integrates information provided by the MFA and the hydroperiod and allows determining the environmental water requirements of the wetland for each hydrological year and assessing how much water must be added from external sources to maintain the wetland in a state of average flooding. Indeed, as observed in Fig. (8), an average annual rainfall leads to a flooding consistency effect that slightly exceeds the 25th percentile of the IPI series, a straightforward calculation of environmental water requirement is essential for decision-makers. Going further into
540 details, the analysis proposed expresses a statistical view of the yearly water supply needed by the wetland to achieve an average flooding condition, based on the entire historical dataset, that is 25.2 Mm³. To get a tangible quantitative comparison, this volume is approximately to 25% of the current annual groundwater withdrawals for agricultural purposes (100 Mm³) although this estimate is subject to significant uncertainty due to unrecorded illegal usages (Green et al., 2024; Acreman & Salathe, 2022; UNESCO, 2020). In summary, the use of WetMAT could be useful for planning mitigation and
545 restoration measures aimed at ensuring sustainable future scenarios, need which is widely acknowledged (CHG, 2022; Guardiola Albert & Jackson, 2011).

The main limitation of the WetMAT model relates to the challenges in finding all the necessary data for implementation, which contribute to highlight the relevance of the careful review of the "grey literature" performed in the Doñana case study. As reported in Green et al., 2024 the streamflow gauges of surface watercourses do not have complete time series. Similarly,
550 although gates exist for the surface drainage of the marshland, they are not gauged and therefore it is impossible to derive information related to its discharges. As for the ecotones and the levels of groundwater, there are reports of their dramatic

drops and decreases but there is no reliable information about their possible contributions to the wetland. However, the rationale behind WetMAT is to keep the model as simple as possible, although this may introduce simplifications such as the use of precipitation as the only input for the wetland, or a limited treatment of outflows.

555 ~~Another limitation relates to the calibration and validation phases, as the available historical time series provide limited data. Due to the different method of calculation, the hydroperiod variable could only support calibration based on the MFA. Furthermore, the available data on the maximum MFA, derived from the literature, lacks indications on when it occurs during the year. Regarding the use of IPI, one of the main findings of this work, a potential development of this proposed key metric concerns its transferability across sites. The current IPI is intentionally parsimonious and physically interpretable, but its magnitude may still reflect site-specific attributes (e.g., the maximum floodable area). For comparative studies across~~
560 ~~different Mediterranean wetlands, a promising avenue is to formulate a dimensionless, normalized IPI, so that values are not dominated by differences in absolute scale. This could be achieved, for instance, by normalizing maximum inundation extent by a site-specific reference and expressing hydroperiod as a fraction of days within the hydrological year, yielding an index bounded in [0, 1] and directly comparable across systems. The hydroperiod variable is used for the implementation of IPI, as~~
565 ~~it is recognised that this is a factor that describes the hydrological response of the marshland. However, as already specified, one limitation of the study is the difficulty of comparing the hydroperiod observed in the literature with that described in this study, due to conceptual differences in the calculation of this variable. Furthermore, the available data on the maximum MFA, derived from the literature, lacks indications on when it occurs during the year.~~ Despite these limitations, it is important to highlight the applicability and replicability of WetMAT across various temporary and non-temporary wetland
570 contexts, as these wetlands are already commonly classified in a way that allows for their modelling to be as similar and efficient as possible once a system is implemented (Chekol, 2020). The model simplicity, with a limited number of parameters and a straightforward description of processes, makes it suitable for diverse settings.

5 Conclusions

575 The present work describes an innovative hydrological balance model (WetMAT), that can be used to describe the dynamic evolution of a temporal marshland through his outputs (MFA, hydroperiod). The model is based on a straightforward mathematical modelling, on a daily basis, of the main hydrological processes that contribute to the generation of flooding, starting from simple and relatively easy to find climate data as daily precipitation and daily average temperature. WetMAT has been developed and tested in the Doñana wetland case study but can be easily adapted to be replicated elsewhere, thanks
580 to the low number of parameters required to use the model, its computational simplicity, and, most importantly, given the need to identify water requirements in such at-risk environments where estimation and planning of environmental needs are necessary.

ha formattato: Tipo di carattere: Non Grassetto

ha formattato: Tipo di carattere: Non Grassetto

ha formattato: Tipo di carattere: Non Grassetto

Future steps in the progression of this work involve the use of agent-based modelling to evaluate and quantify the effectiveness of WetMAT outputs within an integrated decision-making context. Additionally, the model will be applied to other case studies, similar in climatic conditions but differing in terms of scale or the types of components involved, in order to assess the true scalability and replicability of WetMAT.

A process to identify the environmental demand is necessary and essential in any context water conflicts persist among different users and the vision of Nexus is pursued: the simple modelling of WetMAT has shown that this is possible.

590 **Author contributions**

CP contributed to conceptualization, data curation, formal analysis, methodology; AP and VI contributed to conceptualization, methodology, validation; MBM contributed to data curation, formal analysis and validation; IP contributed to conceptualization, methodology, supervision, project administration, validation. CP prepared the manuscript, with contributions from all authors.

595 **Acknowledgements**

The Authors would like to thank the project team for many inspiring discussions. A great thank goes also to the stakeholders involved in project activities, who provided their knowledge and expertise on the area.

Financial support

The author(s) declare that financial support was received for this research. This paper was realized in the framework of the PRIMA programme supported by the European Union. GA no [2041] [LENSES—Learning and action alliances for Nexus environments in an uncertain future] [Call 2020 Section 1 Nexus IA].

Data availability

Data and code will be available on request by corresponding authors.

605 **Competing interests**

None.

References

Abdelmajeed, A.Y.A. and Juszcak, R.: Challenges and Limitations of Remote Sensing Applications in Northern Peatlands: Present and Future Prospects, *Remote Sens.*, 16, 591, <https://doi.org/10.3390/rs16030591>, 2024.

610

Acreman, M. and Salathe, T.: A complex story of groundwater abstraction and ecological threats to the Doñana National Park World Heritage Site, *Nat Ecol Evol*, 6, 1401-1402, <https://doi.org/10.1038/s41559-022-01836-6>, 2022.

615

Adam, E., Mutanga, O. and Rugege, D.: Multispectral and hyperspectral remote sensing for identification and mapping of wetland vegetation: a review, *Wetlands Ecol Manage* 18, 281-296, <https://doi.org/10.1007/s11273-009-9169-z>, 2010.

Aldaya, M. M., Garcia Novo, F. and Ramon Llamas, M.: Incorporating the water footprint and environmental water requirements into policy: reflections from the Doñana Region (Spain), *Re-thinking Water and Food Security: Fourth Botin Foundation Water Workshop (1st ed.)*, 11, 201-210, <https://doi.org/10.1201/b10541>, 2010.

620

[Allen, R.G., Pereira, L.S., Raes, D. and Smigh, M.: Crop evapotranspiration: Guidelines for computing crop water requirements, FAO Irrigation and Drainage Paper No.56. Food and Agriculture Organization of the United Nations, Rome, Italy, 1998.](#)

625

[Althoff, D. and Neiva Rodrigues, L.: Goodness-of-fit criteria for hydrological models: Model calibration and performance assessment, *J. Hydrol.*, 600, <https://doi.org/10.1016/j.jhydrol.2021.126674>, 2021.](#)

Angeler, D. G.: Conceptualizing resilience in temporary wetlands, *Inland Waters*, 11, 467–475, <https://doi.org/10.1080/20442041.2021.1893099>, 2021.

630

Baena Escudero, R. and Guerrero Amador I.: Fluvial geomorphology and restoration: low reach of the Guadiamar River, National Park of Doñana, Spain, *Publ. Inst. Geogr. Univ. Tartu.*, 101, 39-44, 2006.

635

Bhowmik, S.: Ecological and Economic Importance of Wetlands and Their Vulnerability, *Research Anthology on Ecosystem Conservation and Preserving Biodiversity, Engineering Science Reference/ IGI Global*, 11–27, <https://doi.org/10.4018/978-1-6684-5678-1.ch002>, 2022.

ha formattato: Inglese (Regno Unito)

ha formattato: Inglese (Regno Unito)

Boix, D., Calhoun, A.J.K., Mushet, D.M., Bell, K.P., Fitzsimons, J.A. and Isselin-Nondedeu, F.: Conservation of Temporary Wetlands. Encyclopedia of the World's Biomes, Elsevier, 279-294, <https://doi.org/10.1016/B978-0-12-409548-9.12003-2>,
640 2020.

Bustamante, J., Pacios, F., Díaz-Delgado, R. and Aragonés, D.: Predictive models of turbidity and water depth in the Doñana marshes using Landsat TM and ETM+ images, J. Environ. Manage. 90, 2219–2225, <https://doi.org/10.1016/j.jenvman.2007.08.021>, 2009.

ha formattato: Inglese (Regno Unito)

645 Calhoun, A. J., Mushet, D. M., Bell, K. P., Fitzsimons, J. A. and Isselin-Nondedeu, F.: Temporary wetlands: challenges and solutions to conserving a “disappearing” ecosystem, Biol. Conserv., 211, B, 3-11, <https://doi.org/10.1016/j.biocon.2016.11.024>, 2017.

650 Chekol, D.: Wetland Water Balance Modelling Guidance Document. Toronto and Region Conservation Authority, 2020.

Chomba, I.C., Banda K.E., Winsemius, H.C., Chomba, M.J., Mataa, M., Ngwenya, V., Sichingabula, H.M., Nyambe, I. and Ellender, B.: A Review of Coupled Hydrologic-Hydraulic Models for Floodplain Assessments in Africa: Opportunities and Challenges for Floodplain Wetland Management, Hydrology, 8, 44, <https://doi.org/10.3390/hydrology8010044>, 2021.

655

Coleman, A.M., Diefenderfer, H.L., Ward, D.L. and Borde, A.B.: A spatially based area-time inundation index model developed to assess habitat opportunity in tidal-fluvial wetlands and restoration sites, Ecol. Eng., 82, 624-642, <https://doi.org/10.1016/j.ecoleng.2015.05.006>, 2015.

660 Corlett, R. T.: The Anthropocene concept in ecology and conservation, Trends in Ecology and Evolution 30, 36–41, Elsevier Ltd., <https://doi.org/10.1016/j.tree.2014.10.007>, 2015.

Cosgrove, W. J. and Loucks, D. P.: Water management: Current and future challenges and research directions, Water Resour. Res. 51, 4823–4839, <https://doi.org/10.1002/2014WR016869>, 2015.

665

Díaz-Delgado, R., Aragonés, D., Afán, I. and Bustamante, J.: Long-term monitoring of the flooding regime and hydroperiod of Doñana marshes with Landsat time series (1974-2014). Remote Sens., 8, <https://doi.org/10.3390/rs8090775>, 2016.

Codice campo modificato

670 Díaz-Paniagua, C. and Aragonés, D.: Permanent and temporary ponds in Doñana National Park (SW Spain) are threatened by desiccation, Limnetica, 34, 407–424, 2015.

Ding, T., Chen, J., Fang, L. and Ji, J.: Identifying and optimizing ecological security patterns from the perspective of the water-energy-food nexus. *J. Hydrol.*, 632, 130912, <https://doi.org/10.1016/j.jhydrol.2024.130912>, 2024.

675 Falkenmark, M., Wang-Erlandsson, L. and Rockström, J.: Understanding of water resilience in the Anthropocene. *J. Hydrol.* 10, 2. <https://doi.org/10.1016/j.hydroa.2018.100009>, 2019.

[Feddes, R.A., Hoff, H., Bruen, M., Dawson, T., De Rosnay, P., Dirmeyer, P., Jackson, R.B., Kabat, P., Kleidon, A., Lilly, A. and Pitman, A.J.: Modeling root water uptake in hydrological and climate models. *Bull. Am. Meteorol. Society*, 82 , 2797-2809, 2001.](#)

680

Fernandez-Carrillo, A., Sanchez-Rodriguez, E. and Rodriguez-Galiano, V. F.: Characterising marshland temporal dynamics using remote sensing: The case of Bolboschoenetum maritimi in Doñana national park, *Appl- Geogr.*, 112, <https://doi.org/10.1016/j.apgeog.2019.102094>, 2019.

685

Fernandez-Delgado, C.: Conservation management of a European natural area: Doñana National Park, Spain. <https://www.researchgate.net/publication/281318030>, 1997.

Finlayson, C. M., Van Der Valk, A. G. and Hall, B. : Wetland classification and inventory: A summary. *Vegetatio* 118, 185–192. <https://doi.org/10.1007/BF00045199>, 1995.

690

García Novo, F. and Marín Cabrera, C.: Doñana. Water and Biosphere. Report from Doñana 2005 Project. Spanish Ministry of the Environment. UNESCO, MaB, Junta de Andalucía, 2006.

695 Garrote, L.: Managing Water Resources to Adapt to Climate Change: Facing Uncertainty and Scarcity in a Changing Context. *Water Resour. Manage.*, 31, 2951-2963, <https://doi.org/10.1007/s11269-017-1714-6>, 2017.

Gebreyohannes, T., De Smedt, F., Walraevens, K., Gebresilassie, S., Hussien, A., Hagos, M., Amare, K., Deckers, J. and Gebrehiwot, K.: Application of a spatially distributed water balance model for assessing surface water and groundwater resources in the Geba basin, Tigray, Ethiopia, *J. Hydrol.*, 499, 110–123, <https://doi.org/10.1016/j.jhydrol.2013.06.026>, 2013.

700

Gil Gil, T. and Schmidt G.: Science to save Doñana. Evidence of its ecological degradation in 2024, WWF Spain, https://wwf.es/assets.panda.org/downloads/wwf_science-to-save-donana.pdf, 2024.

ha formattato: Italiano (Italia)

Codice campo modificato

705 Giordano, R., Osann, A., Enao, E., Llanos Lopez, M., Gonzalez, J., Nikolaos, P., Nikolaidis, P., Lilli, M., Coletta, V. R., and Pagano, A. : Causal Loop Diagrams for bridging the gap between Nexus thinking and Nexus doing: evidence from two case studies. *J. Hydrol.*, 650, 132571, <https://doi.org/10.1016/j.jhydrol.2024.132571>, 2024.

Green, A. J., Guardiola-Albert, C., Bravo-Utrera, M. Á., Bustamante, J., Camacho, A., Camacho, C., Contreras-Arribas, E.,
710 Espinar, J. L., Gil-Gil, T., Gomez-Mestre, I., Heredia-Díaz, J., Kohfahl, C., Negro, J. J., Olias, M., Revilla, E., Rodríguez-González, P. M., Rodríguez-Rodríguez, M., Ruíz-Bermudo, F., Santamaría, L., Schmidt, G., Serrano-Reina, J.A. and Díaz-Delgado, R.: Groundwater Abstraction has Caused Extensive Ecological Damage to the Doñana World Heritage Site, Spain, *Wetlands*, 44, <https://doi.org/10.1007/s13157-023-01769-1>, 2024.

715 Guardiola Albert, C. and Jackson, C.R.: Potential impacts of climate change on groundwater supplies to the Doñana wetland, Spain. *Wetlands*, 31, 907–920, <https://doi.org/10.1007/s13157-011-0205-4>, 2011.

Gupta, H. V., Kling, H., Yilmaz, K. K. and Martinez, G. F.: Decomposition of the mean squared error and NSE performance criteria: implications for improving hydrological modelling, *J. Hydrol.* 377, 80-91,
720 <https://doi.org/10.1016/j.jhydrol.2009.08.003>, 2009.

Hargreaves G.H. and Samani Z. A.: Reference Crop Evapotranspiration from Temperature, *Appl. Eng. Agric.*, 1, 96–99, <https://doi.org/10.13031/2013.26773>, 1985.

725 Havril, T., Tóth, A., Molson, J.W., Galsa, A. and Mádl-Szonyi, J.: Impacts of predicted climate change on groundwater flow systems: Can wetlands disappear due to recharge reduction?, *J. Hydrol.*, 563, 1169-1180, <https://doi.org/10.1016/j.jhydrol.2017.09.020>, 2018.

[Hayashi, M., van der Kamp, G.: Simple equations to represent the volume-area-depth relations of shallow wetlands in small topographic depressions. *J. Hydrol.*, 237, 74-85, 2000.](#)
730

He, K., Zhang, Y., Wenhong, L., Sun, G. and McNulty, S.: Detecting Coastal Wetland Degradation by Combining Remote Sensing and Hydrologic Modeling, *Forests*, 13,411, <https://doi.org/10.3390/f13030411>, 2022.

735 Hülsmann, S., Susnik, J., Rinke, K., Langan, S., van Wijk, D., Janssen, A.B.G. and Mooij, W.M. : Integrated modelling and management of water resources: the ecosystem perspective on the nexus approach. *Current Opinion in Environmental Sustainability*, 40, 14-20, <https://doi.org/10.1016/j.cosust.2019.07.003>, 2019.

Codice campo modificato

ha formattato: Inglese (Regno Unito)

- 740 Iglesias, A., Garrote, L., Flores, F. and Moneo, M.: Challenges to Manage the Risk of Water Scarcity and Climate Change in the Mediterranean, *Water Resour. Manage.*, 21, 775-788. <https://doi.org/10.1007/s11269-006-9111-6>, 2006.
- Jackson, B., Mcintyre, N., Pechlivanidis, I. G., Jackson, B. M., Mcintyre, N. R. and Wheeler, H. S.: Catchment scale hydrological modelling: A review of model types, calibration approaches and uncertainty analysis methods in the context of recent developments in technology and applications, *Global NEST J.* 13, 745 <https://www.researchgate.net/publication/266341273>, 2011.
- Khelifa, R., Mahdjoub, H. and Samways, M.J. : Combined climatic and anthropogenic stress threaten resilience of important wetland sites in an arid region, *Sci. Total Environ.*, 806, 150806, <https://doi.org/10.1016/j.scitotenv.2021.150806>, 2022.
- 750 Kim, D. and Onof, C.: A stochastic rainfall model that can reproduce important rainfall properties across the timescale from several minutes to a decade, *J. Hydrol.*, 589, <https://doi.org/10.1016/j.jhydrol.2020.125150>, 2020.
- Lee, O., Kim, H. S. and Kim, S.: Hydrological simple water balance modeling for increasing geographically isolated doline wetland functions and its application to climate change, *Ecol. Eng.*, 149, <https://doi.org/10.1016/j.ecoleng.2020.105812>, 755 2020.
- Leiva-Piedra, J.L., Ramírez-Juidias E. and Amaro-Mellado J.L.: Use of Geomatic Techniques to Determine the Influence of Climate Change on the Evolution of Doñana Salt Marshes' Flooded Area between 2009 and 2020, *Appl. Sci.*, 14, 6919, <https://doi.org/10.3390/app14166919>, 2024.
- 760 Liu, Y. and Kumar M.: Role of meteorological controls on interannual variations in wet-period characteristics of wetlands. *Water Resour. Res.*, 52 , 5056-5074, <https://doi.org/10.1002/2015WR01849>, 2016.
- Liu, D.: A rational performance criterion for hydrological model, *J. Hydrol.*, 590, 765 <https://doi.org/10.1016/j.jhydrol.2020.125488>, 2020.
- Manzoni, S., Maneas, G., Scaini, A., Psiloglou, B.E., Destouni, G. and Lyon, S.W.: Understanding coastal wetland conditions and futures by closing their hydrologic balance: the case of the Gialova lagoon, Greece, *Hydrol. Earth Syst. Sci.*, 24, 3557-3571, <https://doi.org/10.5194/hess-24-3557-2020>, 2020.
- 770

Martín-López, B., García-Llorente, M., Palomo, I. and Montes, C.: The conservation against development paradigm in protected areas: Valuation of ecosystem services in the Doñana social-ecological system (southwestern Spain), *Ecol. Econ.*, 70, 1481–1491, <https://doi.org/10.1016/j.ecolecon.2011.03.009>, 2011.

775 Mitsch, W.J. and Gosselink, J.G., *Wetlands*, 4th edition, Wiley. DOI: 10.1002/9781118343607, 2007.

[Moriasi, D. N., Gitau, M. W., Pai, N. and Daggupati, P.: Hydrologic and water quality models: Performance measures and evaluation criteria, *Trans. ASABE*, 58, 1763–1785, <https://doi.org/10.13031/trans.58.10715>, 2015.](#)

780 [Morris, E.P., Flecha, S., Figuerola, J., Coştas, E., Navarro, G., Ruiz, J., Rodriguez, P. and Huertas, E.: Contribution of Doñana Wetlands to Carbon Sequestration. *PLOS ONE* 8, e71456, <https://doi.org/10.1371/journal.pone.0071456>, 2013.](#)

785 Naranjo-Fernández N., Guardiola-Albert C. and Montero-González E.: Applying 3D Geostatistical Simulation to Improve the Groundwater Management Modelling of Sedimentary Aquifers: The Case of Doñana (Southwest Spain). *Water*, 11, 39, doi:10.3390/w11010039, 2018.

Palomo, I., B. Martín-López, C. López-Santiago, and C. Montes: Participatory scenario planning for protected areas management under the ecosystem services framework: the Doñana social-ecological system in Southwestern Spain, *Ecol. Soc.* 16, 23, <http://www.ecologyandsociety.org/vol16/iss1/art23/>, 2011.

790 Paredes Losada, I.: Presiones antrópicas y eutrofización en la marisma de Doñana y sus cuencas vertientes, Doctoral Thesis, Universidad de Sevilla, Sevilla. <https://hdl.handle.net/11441/97501>, 2020.

795 Peng, H., Xia, H., Shi, H., Chen, H., Chu, N., Liang, J. and Gao, Z.: Monitoring spatial and temporal dynamics of wetland vegetation and their response to hydrological conditions in a large seasonal lake with time series Landsat data, *Ecol. Indic.*, 142, 109283, <https://doi.org/10.1016/j.ecolind.2022.109283>, 2022.

800 Rawat, M., Pandey, A., Gupta, P.K., Yadav, B. and Patel, J.G.: A novel framework for wetland health assessment using hydro-ecological indicators and landscape metrics, *Model. Earth Syst. Environ.*, 11, 167, <https://doi.org/10.1007/s40808-025-02371-6>, 2025.

Sánchez Navarro, R.: Caudales ecológicos de la marisma del Parque Nacional de Doñana y su área de influencia. WWF España, www.wwf.es, 2009.

ha formattato: Inglese (Regno Unito)

ha formattato: Tipo di carattere: Non Corsivo

ha formattato: Tipo di carattere: Non Grassetto

ha formattato: Inglese (Regno Unito)

ha formattato: Inglese (Regno Unito)

ha formattato: Italiano (Italia)

ha formattato: Italiano (Italia)

Codice campo modificato

ha formattato: Italiano (Italia)

805 Schlaepfer, M. A. and Lawler, J. J.: Conserving biodiversity in the face of rapid climate change requires a shift in priorities, Wiley Interdiscip. Rev. Clim. Change, 14, <https://doi.org/10.1002/wcc.798>, 2023.

Schröter, M., Bonn, A., Klotz, S., Seppelt, R., and Baessler, C.: Atlas of Ecosystem Services, Springer, <https://doi.org/10.1007/978-3-319-96229-0>, 2019.

810

Seneviratne, S.I., Corti, T., Davin, E.L., Hirschi, M., Jaeger, E.B., Lehner, I., Orlowsky, B. and Teuling, A.J.: Investigating soil moisture-climate interactions in a changing climate: A review. Earth-Sci. Rev., 99, 125-161. <https://doi.org/10.1016/j.earscirev.2010.02.004>, 2010.

815 Serrano, L.: Balancing water uses at the Donana national park, Spain, The Wetland Book 1-8, Springer Netherlands, https://doi.org/10.1007/978-94-007-6172-8_232-4, 2016.

Serrano, L., Reina, M., Martín, G., Reyes, I., Arechederra, A., León, D. and Toja, J.: The aquatic systems of Doñana (SW Spain), Watersheds and frontiers, Limnetica, 25, 11-32. <https://doi.org/10.23818/limn.25.02>, 2006.

820

Serrano, L. and Serrano, L.: Influence of groundwater exploitation for urban water supply on temporary ponds from the Doñana National Park (SW Spain), J. Environ. Manage., 46, 229-238, <https://doi.org/10.1006/jema.1996.0018>, 1996.

825 Serrano Hidalgo, C.: Avances del modelo matemático de flujo del acuífero Almonte-Marismas: modelo de transporte, intrusión y zoom en zonas de interés ecológico. Doctoral thesis, Universidad Politécnica de Madrid, Madrid, Spain, https://oa.upm.es/76746/1/CARMEN_SERRANO_HIDALGO.pdf, 2023.

Shackelford, C.D.: Geoenvironmental Engineering. Reference Module in Earth Systems and Environmental Sciences. Elsevier, <https://doi.org/10.1016/B978-0-12-409548-9.05424-5>, 2013.

830

Sobol', I.M.: On the distribution of points in a cube and the approximate evaluation of integrals. USSR Computational Mathematics and Mathematical Physics, 7, 86-112. [https://doi.org/10.1016/0041-5553\(67\)90144-9](https://doi.org/10.1016/0041-5553(67)90144-9), 1967.

835 Sousa, A., García-Murillo, P., Morales, J. and García-Barrón.: Anthropogenic and natural effects on the coastal lagoons in the southwest of Spain (Doñana National Park), ICES J. Mar. Sci., 66, 1508-1514, <https://academic.oup.com/icesjms/article/66/7/1508/658285>, 2009.

ha formattato: Tipo di carattere: Non Corsivo

Codice campo modificato

ha formattato: Inglese (Regno Unito)

ha formattato: Inglese (Regno Unito)

ha formattato: Inglese (Regno Unito)

ha formattato: Inglese (Regno Unito)

Codice campo modificato

ha formattato: Inglese (Regno Unito)

ha formattato: Collegamento ipertestuale, Inglese (Regno Unito)

Codice campo modificato

Suso, J., and Llamas, M. R.: Influence of groundwater development on the Doñana National Park ecosystems (Spain), *J. Hydrol.*, 14, 239-269, [https://doi.org/10.1016/0022-1694\(93\)90052-B](https://doi.org/10.1016/0022-1694(93)90052-B), 1993.

ha formattato: Inglese (Regno Unito)

ha formattato: Inglese (Regno Unito)

Thiemig, V., Bisselink, B., Pappenberger, F. and Thielen, J.: A pan-African Flood Forecasting System, *Hydrol. Earth Syst. Sci. Discuss.*, 11, 5559-5597, doi:10.5194/hessd-11-5559-2014, 2014.

Thiemig, V., Rojas, R., Zambrano-Bigiarini, M. and De Roo, A.: Hydrological evaluation of satellite-based rainfall estimates over the Volta and Baro-Akobo Basin. *J. Hydrol.*, 499, 324-338, <https://doi.org/10.1016/j.jhydrol.2013.07.012>, 2013.

ha formattato: Inglese (Regno Unito)

ha formattato: Inglese (Regno Unito)

UNESCO/ IUCN/ Ramsar: Report on the joint UNESCO/IUCN/Ramsar Reactive Monitoring mission to Doñana National Park, Spain, <http://whc.unesco.org/en/conventiontext/>, 2020.

Vanderhoof, M.K., Lane, C.R., McManus, M.G., Alexander, L.C. and Christensen, J.R.: Wetlands inform how climate extremes influence surface water expansion and contraction, *Hydrol. Earth Syst. Sci.*, 22, 1851-1873, <https://doi.org/10.5194/hess-22-1851-2018>, 2018.

van Vuuren, D. P., Edmonds, J., Kainuma, M., Riahi, K., Thomson, A., Hibbard, K., Hurtt, G. C., Kram, T., Krey, V., Lamarque, J. F., Masui, T., Meinshausen, M., Nakicenovic, N., Smith, S. J., and Rose, S. K.: The representative concentration pathways: An overview, *Clim. Change*, 109, 5–31, <https://doi.org/10.1007/s10584-011-0148-z>, 2011.

Wu, C., Liu, W. and Deng, H.: Urbanization and the Emerging Water Crisis: Identifying Water Scarcity and Environmental Risk with Multiple Applications in Urban Agglomerations in Western China. *Sustainability*, 15,1297, <https://doi.org/10.3390/su151712977>, 2023.

ha formattato: Nessuna sottolineatura

Wu, Q.: GIS and Remote Sensing Applications in Wetland Mapping and Monitoring, *Comprehensive Geographic Information Systems*, Elsevier, 2,140-157, DOI: 10.20944/preprints201709.0058.v1, 2017.

Xu, X., Chen, M., Yang, G., Jiang, B. and Zhang, J.: Wetland ecosystem services research: A critical review, *Glob. Ecol. Conserv.*, 22, <https://doi.org/10.1016/j.gecco.2020.e01027>, 2020.

ha formattato: Tipo di carattere: Non Corsivo

Xu, X., Jiang, B., Tan, Y., Costanza, R. and Yang, G.: Lake-wetland ecosystem services modeling and valuation: Progress, gaps and future directions, *Ecosyst. Serv.*, 33, 19-28, <https://doi.org/10.1016/j.ecoser.2018.08.001>, 2018.

Zhang, Z., Zimmermann, N.E., Kaplan, J.O. and Poulter, B.: Modeling spatiotemporal dynamics of global wetlands: comprehensive evaluation of a new sub-grid TOPMODEL parametrization and uncertainties. *Biogeosciences*, 13, 1387-1408, <https://doi.org/10.5194/bg-13-1387-2016>, 2016.

875 Zhao, M., Zhang, G., Han, X., Xu, F. and Tang, C.: Spatial and Temporal Changes of Wetlands on the Tibetan Plateau Between 1990 and 2020. *IEEE J. Sel. Top. Appl. Earth Obs. Remote Sens.* 18, 769-784, DOI:10.1109/JSTARS.2024.3495709, 2025.

Zorrilla-Miras, P., Palomo, I., Gómez-Baggethun, E., Martín-López, B., Lomas, P. L. and Montes, C.: Effects of land-use change on wetland ecosystem services: A case study in the Doñana marshes (SW Spain), *Landsc. Urban Plan.*, 122, 160-174, <https://doi.org/10.1016/j.landurbplan.2013.09.013>, 2014.

885

890

895

900

905

910

915

920

925