

1 **Transport behavior displayed by water isotopes and**  
2 **potential implications for assessment of catchment**  
3 **properties**

4

5 Dan Elhanati<sup>1</sup>, Erwin Zehe<sup>2</sup>, Ishai Dror<sup>1</sup>, and Brian Berkowitz<sup>1</sup>

6

7 <sup>1</sup> Department of Earth and Planetary Sciences, Weizmann Institute of Science, Rehovot,  
8 Israel

9 <sup>2</sup> Institute of Water Resources and River Basin Management, Karlsruhe Institute of  
10 Technology (KIT), Karlsruhe, Germany

11

12

13 **Correspondence:** Brian Berkowitz ([brian.berkowitz@weizmann.ac.il](mailto:brian.berkowitz@weizmann.ac.il))

14

15   **Abstract.**

16   Measurements of water isotopes are used routinely to estimate water transit time  
17   distributions and aquifer storage thickness in catchments. Water isotopes (e.g.,  $\text{D}_2\text{O}/\text{H}_2^{18}\text{O}$ )  
18   are generally considered to behave identically to water molecules ( $\text{H}_2\text{O}$ ); they are thus often  
19   considered fully representative of water movement and preferred over inert chemical  
20   tracers for catchment assessment purposes. However, laboratory-scale measurements  
21   presented here show that water isotopes exhibit transport behavior that is essentially  
22   identical to that of inert chemical tracers. The resulting measurements are then interpreted  
23   quantitatively, focusing on a comparative assessment of apparent mean water and mean  
24   tracer velocities, and the applicability of Fickian and non-Fickian (anomalous) transport  
25   models. For both water isotopes and inert chemical tracers, the measured mean tracer  
26   velocity is not necessarily equal to the apparent mean water velocity. It is thus critical to  
27   recognize this inequality when estimating catchment properties. For example, accounting  
28   for anomalous transport of water isotopes can significantly reduce overall estimates of  
29   aquifer storage thickness over an entire watershed.

## 1 Introduction

River catchments and streamflow play a pivotal role in water resources management (Sivapalan, 2018). A catchment represents a three-dimensional hydrological unit delineated by a watershed boundary, where precipitation is partly stored in the subsurface and partly released as evapotranspiration or runoff components, ultimately feeding streamflow. While the catchment water balance controls generation of streamflow amounts, catchments can be also regarded in analogy to chemical reactors (Grathwohl et al., 2013). Streamflow chemistry and contaminant fate are thus essentially controlled by the interplay of transport velocities and, in the case of reactive species, reaction rates of chemicals traveling through the catchment (Grathwohl et al., 2013; Berkowitz et al., 2016; Sternagel et al., 2021).

Natural catchments comprise inherent structural complexities above and below the land surface, which lead to heterogeneous spatial and temporal distributions of flow velocities. Accurately describing travel times in catchments is thus by no means straightforward (McDonnell et al., 2010). Travel (or transit) time distribution (TTDs) of *water*, defined as the durations water molecules require to traverse the catchment from rainfall to stream, are often regarded as a key metric for inferring streamflow chemistry (McGlynn et al., 2003; Weiler et al., 2003; Hrachowitz et al., 2013; Rodriguez et al., 2021; Benettin et al., 2022). A water TTD, and in particular the mean of the water TTD (from which one can infer the mean water velocity), is often used, for example, to estimate water storage and aquifer thickness in a catchment. However, it is difficult to uniquely define or determine a water TTD: clearly, one cannot directly measure the velocity of water molecules in an advective field.

More broadly, TTDs, *sensu lato* – e.g., TTDs of water, chemicals, and momentum – may represent different transport processes, which differ strongly with respect to the underlying mechanism and can also be time-dependent and substance-specific (Rinaldo et al., 2011). A common approach for inferring *water* TTDs of a catchment involves applying measurements of a tracer pulse transported by the water as input for a transport model. The normalized breakthrough curve of a unit mass input of the tracer thus corresponds to the tracer TTD, reflecting the distribution of fluid velocities and subscale diffusive mixing of tracer molecules between the flow lines (Simmons, 1982; Jury and Sposito, 1986). In this

context, models that describe various catchment transport processes are used to estimate water TTDs from tracer breakthrough curves (McGuire and McDonnell, 2006; Bowers et al., 2020; Sternagel et al., 2022; Wienhoefer et al., 2009; McDonnell et al., 2010; Lischeid et al., 2000).

~~While m~~Measurements of any inert chemical tracer transported by the flow of water in a catchment are often assumed to be suitable for inferring water TTDs. Ion tracers such as bromide have been used widely to study anion transport in natural catchments, as they are relatively inexpensive and easy to measure (Levy and Chambers, 1987; Bowman, 1984). Their use has since been expanded to investigate broader aspects of catchment hydrology, including groundwater recharge and evapotranspiration (Chen et al., 2021), and catchment baseflow (Rai and Iqbal, 2015).

However, many studies focus on use of ratios of isotopic tracers of the water molecule itself (i.e., the isotopologues  $\text{H}_2^{18}\text{O}$ ,  $^2\text{H}_2\text{O}$ ,  $^3\text{H}_2\text{O}$ ), because these molecules are considered to behave identically to  $\text{H}_2\text{O}$  and they often enter the catchment naturally through rainfall (McDonnell and Beven, 2014; Rodriguez et al., 2021; Sternagel et al., 2022; Weiler et al., 2003; Aquilina et al., 2006; Koeniger et al., 2010). Moreover, in many catchments subject to chemical transport with relatively high Peclet numbers, conservative chemical tracers exhibit long-tailed breakthrough curves, a non-Fickian behavior that cannot be explained by the traditional advection-dispersion equation (ADE). This behavior, also referred to as anomalous transport, arises from the heterogeneous nature of the porous media through which the tracer plume travels (Berkowitz et al., 2006a). ~~They~~ Water isotopes are therefore regarded as an optimal tracer of water, compared to other chemical tracers, as they are assumed to essentially represent water flow and not chemical transport (McGuire and McDonnell, 2006).

The above brief survey highlights the wide range of interpretations and methods related to TTD assessment, particularly to estimates of *water* TTDs. Motivated by the literature discussed above, the study here focuses on a frequently invoked, key assumption, namely that isotopic tracers of the water molecule itself behave identically to  $\text{H}_2\text{O}$  (with only slightly different diffusion coefficients because of slightly different molecular weights) and can therefore be used to infer the true mean water velocity and residence time in a porous domain.

For this purpose, water isotope tracer transport in a critical subset of a full catchment – namely, the fully water-saturated domain – is examined. Breakthrough curves of a water isotope and an inert chemical tracer are measured in macroscopically 1D porous medium columns, [which are known to exhibit a non-Fickian transport behavior](#); the resulting curves are compared and subsequently interpreted quantitatively. A fundamental question is thus studied: What are the implications of using water isotopes as tracers, as compared to inert chemical tracers, in terms of defining a water TTD and its mean, [and related catchment properties](#)?

## 2 Methods

A laboratory-scale experimental setup was constructed to compare the transport behavior of inert chemicals to the transport behavior of water isotopes. This setup aimed to examine flow and transport in a controlled saturated porous medium, allowing the measurement and comparison of the tracer (Br) and a water isotope tracer (water containing a higher D<sub>2</sub>O/H<sub>2</sub>O ratio than commonly found in nature) in a flow regime which exhibits anomalous transport.

In a previous study, Elhanati et al. (Elhanati et al., 2023) examined the transport behavior of an inert chemical tracer (Gd) in porous medium columns, under time-dependent velocity conditions in a macroscopically 1D flow regime. The same experimental setup was adapted for this study as it consistently showed anomalous transport for different flow rates and porous medium arrangements. The setup consisted of three vertical columns measuring 100 cm in length with an internal radius of 1.4 cm, packed with a fully water-saturated porous medium composed of clean quartz sand grains, and with water and tracer injected from below. First, three effectively (macroscopically) homogeneous porous medium columns (Columns I-III) were packed uniformly with sand having an average grain size of 1.105 mm (mesh size 12/20), and porosity of 0.38. Subsequently, the three columns were cleaned, and each was packed with an alternating pattern of three different sand sizes (Columns IV-VI) to produce a heterogeneous porous medium (Elhanati et al., 2023). Elhanati et al. (2023) reported that both packing configurations (i.e., homogeneous and heterogeneous) displayed long tailing in the Gd breakthrough curves and other behavior indicative of anomalous transport.

Three solutes were used for this study: (1) NaBr salt, an inert tracer used as a benchmark, with an initial concentration of 10 ppm Br; (2) D<sub>2</sub>O, with an initial concentration of 10,000 ppm D; (3) A combination of both solutes (NaBr and D<sub>2</sub>O). Repeating the experiments with a combined solute of D<sub>2</sub>O enriched water and Br allowed comparison of the resulting breakthrough curves. Although an interaction of the two tracers was not expected, the experiment was repeated with only the D<sub>2</sub>O for validation. Each experiment was conducted simultaneously in the three columns, starting with a short solute injection before switching to double-distilled water flow for the rest of the experiment. Samples were collected at the column outlets using a fraction collector.

First, experiments were conducted in a homogeneous medium using coarse-grained sand for the three solutes mentioned above (experiment sets A1: NaBr+D<sub>2</sub>O, A2: D<sub>2</sub>O, and A3: NaBr, respectively; with a volumetric flow rate of  $Q = 1.0 \text{ mL/min}$ ). Next, the homogeneous experiments were repeated with the combined NaBr and D<sub>2</sub>O solute with a higher flow velocity, namely double volumetric discharge (experiment set A1<sub>fast</sub>: NaBr+D<sub>2</sub>O;  $Q = 2.0 \text{ mL/min}$ ), to test for consistency in different flow conditions. Subsequently, two sets of experiments in a heterogeneous medium for the slow (experiment set B1: NaBr+D<sub>2</sub>O) and fast (experiment set B1<sub>fast</sub>: NaBr+D<sub>2</sub>O) flow conditions were performed. See Table 1 for a summary of the experiments. To add perspective, a representative Peclet number (Pe) for the experimental set-up can be estimated. Here,  $Pe = L\bar{v}_w/D$ , where  $L$  is a characteristic length, chosen here as the average grain size diameter ( $L = 0.11 \text{ cm}$ ),  $\bar{v}_w$  is the mean local flow velocity, and  $D$  is a mass diffusion coefficient ( $D = 2 \times 10^{-5} \text{ cm}^2/\text{s}$ , representative of typical inert anionic tracers like bromide). For the uniformly packed sand columns with  $Q = 1.0 \text{ mL/min}$ ,  $\bar{v}_w = 7.1 \times 10^{-3} \text{ cm/s}$  (see calculation in Sect. 3.2), so that  $Pe \approx 39$ .

**Table 1.** Set-up and conditions of column experiments.

| Experiment | Packing                                       | Flow Rate, $Q$ | Solute                |
|------------|-----------------------------------------------|----------------|-----------------------|
| A1         | Uniformly packed sand<br>(Columns I, II, III) | 1.0 mL/min     | NaBr+D <sub>2</sub> O |
| A2         | uniformly packed sand<br>(Columns I, II, III) | 1.0 mL/min     | D <sub>2</sub> O      |

|                    |                                                                             |            |                       |
|--------------------|-----------------------------------------------------------------------------|------------|-----------------------|
| A3                 | Uniformly packed sand<br>(Columns I, II, III)                               | 1.0 mL/min | NaBr                  |
| A1 <sub>fast</sub> | Uniformly packed sand<br>(Columns I, II, III)                               | 2.0 mL/min | NaBr+D <sub>2</sub> O |
| B1                 | Alternating pattern of three<br>different sand sizes<br>(Columns IV, V, VI) | 1.0 mL/min | NaBr+D <sub>2</sub> O |
| B1 <sub>fast</sub> | Alternating pattern of three<br>different sand sizes<br>(Columns IV, V, VI) | 2.0 mL/min | NaBr+D <sub>2</sub> O |

149

150 Water samples were measured by Inductively Coupled Plasma-Mass Spectrometry  
151 (ICP-MS; Agilent). The ICP-MS ionizes the samples and detects the presence of specific  
152 atomic masses, which allows the determination of the concentration of the Br and D at the  
153 column outlet throughout the experiment. While isotopes of light elements are not readily  
154 measurable by ICP-MS due to low ionization efficiency and spectral interference, it is  
155 possible to measure deuterium-containing polyatomic species (e.g., ArD<sup>+</sup>) as an accurate  
156 proxy for D analysis (Galbács et al., 2020). In excess of H<sub>2</sub>O, D<sub>2</sub>O rapidly converts to HDO  
157 in equilibrium ( $D_2O + H_2O \rightleftharpoons 2HDO$ ), which is linearly correlated to the measurable ArD<sup>+</sup>  
158 ion in the plasma. While the measured Br background concentration is below the  
159 instrument detection limit, the double distilled water applied in the experiment comprises  
160 a naturally occurring D<sub>2</sub>O/H<sub>2</sub>O ratio. The background concentration was subtracted from  
161 the results presented to show the breakthrough of the Br and D<sub>2</sub>O solutes over their  
162 naturally occurring background concentration.

163

## 164 **3 Results and discussion**


### 165 **3.1 Comparison of Br and D<sub>2</sub>O breakthrough curves**

166 The slow-flow homogeneous porous medium experiments show similar behavior for the  
167 enriched-deuterium water and the bromide tracer (Fig. 1a). Both signals show a similar  
168 breakthrough curve, as demonstrated by the onset and length of the breakthrough measured  
169 at the outlet. This finding is consistent for the bromide and D<sub>2</sub>O when injected as a single


chemical species or when combined in a single experiment. This coupling establishes the similar behavior of the two chemical species, independent of a dynamic resulting from the simultaneous injection. This finding is apparent for all three columns, which show the same behavior in different packing arrangements. Column III, in particular, displayed longer tails of the breakthrough curves, consistently for both the Br and the D<sub>2</sub>O. This can be seen, in particular, in the semi-log scale which allows a focus on the long-tailed behavior. The faster flow experiments also showed consistency of this finding across the three columns (Fig. 1b). The heterogeneous porous medium experiments show longer tails compared to the homogeneous porous medium experiments, for both the slow flow and high flow experiments. For both flow scenarios, the bromide tracer and D<sub>2</sub>O water displayed similar breakthrough curves for each column (Figs. 1c and 1d). The various replicate experiments shown in Fig. 1 illustrate natural variability, which is exhibited particularly in the behavior of the long-time tails for each specific column and flow rate.

The results of both the heterogeneous and homogeneous column experiments, and for different flow rates, show that water isotopes behave similarly to inert chemical tracers. This finding is discussed in detail in Sect. 3.2 and Sect. 3.3. In both the homogeneous and heterogeneous columns, a similar discharge was experimentally maintained, resulting in similar mean water travel times. However, it can be seen that due to the differences in medium composition, the heterogeneous columns displayed longer tails in the measured breakthrough. The longer tails seen in the heterogeneous medium compared to the homogeneous medium, are found for both the Br tracer and the deuterium-enriched water, indicating that both solutes indeed represent a transport process.





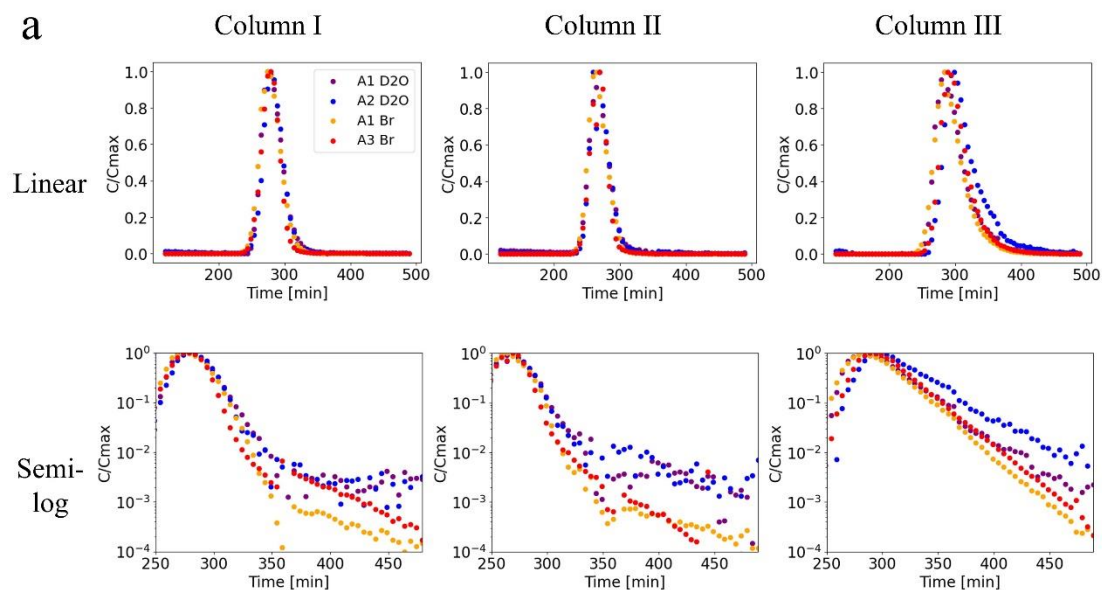

193

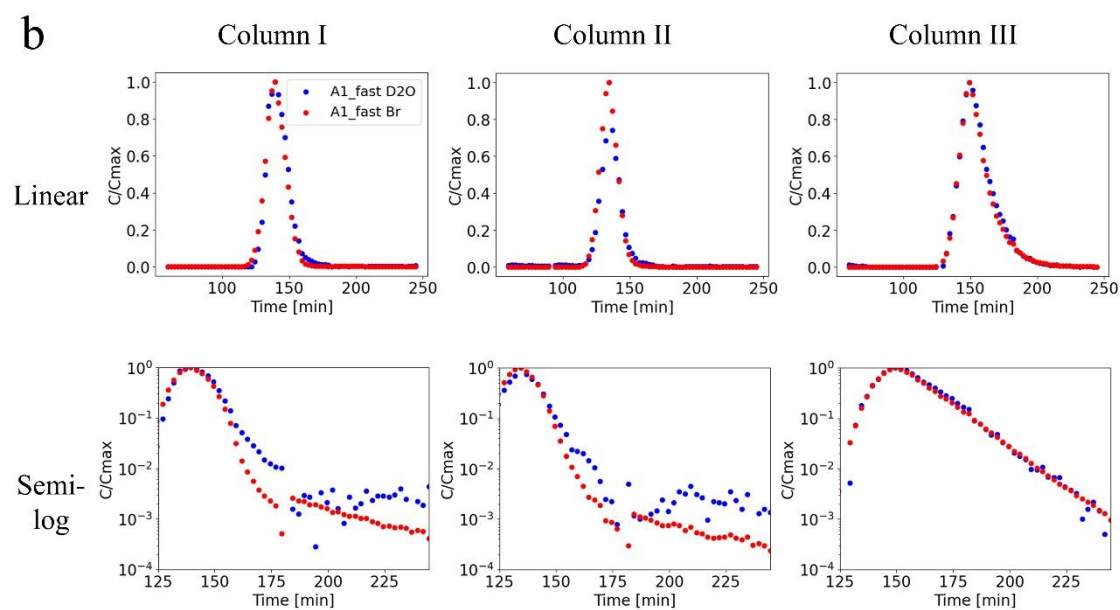

194

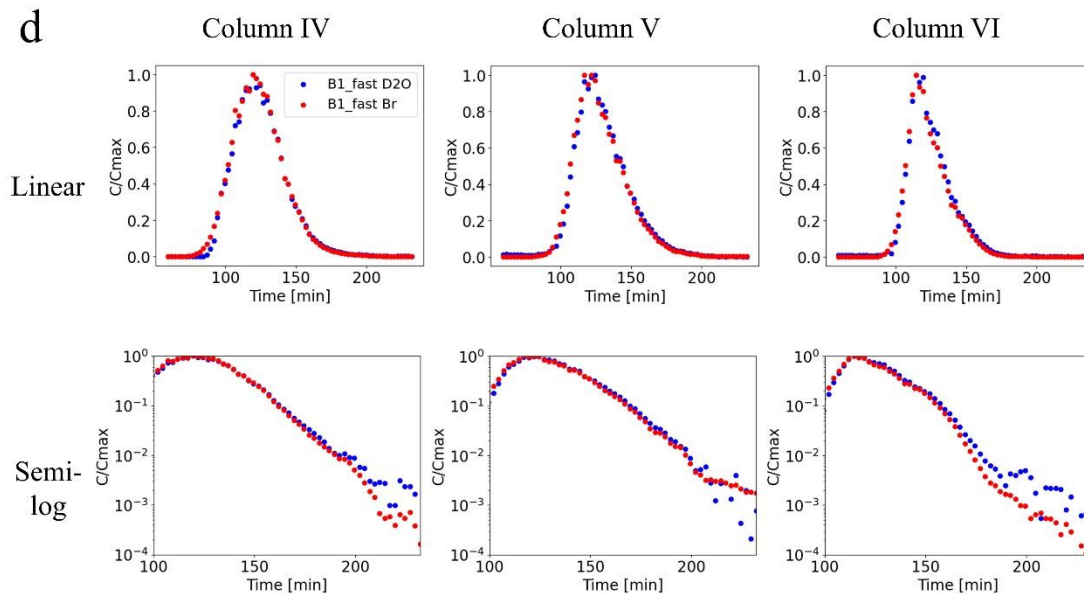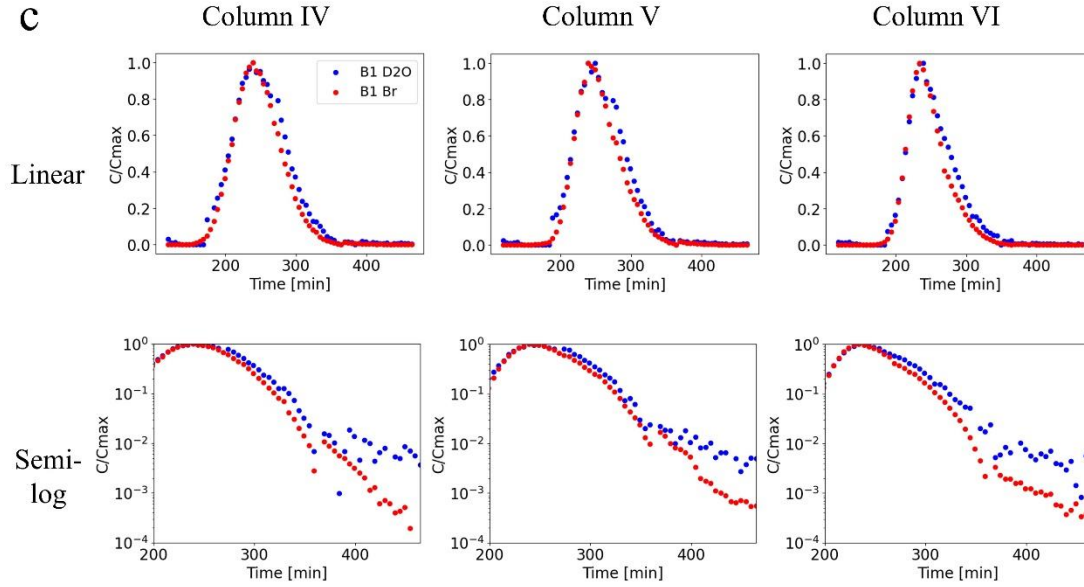

**Figure 1.** Breakthrough curves (A1, B1: D<sub>2</sub>O+Br; A2: D<sub>2</sub>O; A3: Br) for the three homogeneous and the three heterogeneous porous medium columns in linear scale (top row) and semi-log scale (bottom row). **(a)** homogeneous slow-flow experiments (A1: NaBr+D<sub>2</sub>O, A2: D<sub>2</sub>O, A3: NaBr); **(b)** homogeneous fast-flow experiments (A1<sub>fast</sub>: NaBr+D<sub>2</sub>O); **(c)** heterogeneous slow-flow experiments (B1: NaBr+D<sub>2</sub>O); **(d)** heterogeneous fast-flow experiments (B1<sub>fast</sub>: NaBr+D<sub>2</sub>O). D<sub>2</sub>O concentrations at the tailing end of the breakthrough are generally slightly higher than Br concentrations, because the naturally occurring D<sub>2</sub>O/H<sub>2</sub>O ratio fluctuates around the measured background value. Note the different time scales between experiments.


## 3.2 Water and tracer transport in a fully water-saturated porous media: a Gedanken experiment

While one cannot directly measure the velocity of water molecules, an *apparent mean water velocity*,  $\bar{v}_w$ , which represents an average macroscopic [value-water velocity](#) over the entire medium, is commonly determined by use of Darcy's law. In a macroscopically 1D column, for example,  $\bar{v}_w$  can be determined by the simple relation  $\bar{v}_w = Q/nA$ , where  $Q$  is fixed volumetric discharge,  $n$  is an effective porosity (e.g., determined by comparing weights of a sand or rock core sample under dry and then water-saturated conditions), and  $A$  is the cross-sectional area of flow. [It is emphasized that Darcy's law does not actually identify and measure the velocities of all water molecules \(e.g., including those that may be trapped in an immobile zone for extremely long or essentially infinite times\); rather, Darcy's law offers a means to determine an "effective", continuum-scale, mean velocity of "water". Recognition of this difference between the definitions of the "mean water velocity" \(given by Darcy's law\) and the mean velocity of water isotopes or chemical tracers is a core feature of the analysis presented here.](#)

A critical question then arises: is the [average-mean](#) velocity of an inert chemical tracer,  $\bar{v}_T$ , identical to that of the apparent [average-mean](#) water velocity,  $\bar{v}_w$ ? In principle, the answer is, in general, no (i.e.,  $\bar{v}_w \neq \bar{v}_T$ ), unless the domain is perfectly homogeneous over the length [and/or](#) time scales of measurement (e.g., Cortis et al., 2004).

A Gedanken experiment is useful to visualize this important difference. In a fully water-saturated porous column containing pore-scale heterogeneities, or very small-scale, lower permeability inclusions embedded in the column, the flow and transport are macroscopically 1D (Fig. 2). The behavior of the water and the migration of an inert tracer, such as  $\text{Br}^-$ , can be determined theoretically. By estimating the porosity and cross-sectional area of flow through the column, and for a fixed  $Q$ ,  $\bar{v}_w$  can be calculated using Darcy's law, and the [apparent](#) mean travel time of water through the column can be estimated by dividing the column length by  $\bar{v}_w$ . Measuring the  $\text{Br}^-$  ions, however, will expectedly yield a different result: if a pulse of  $X$   $\text{Br}^-$  ions is injected into the column,  $Y$   $\text{Br}^-$  ions may reach the inclusions and remain there for a very long time. Estimation of the mean velocity,  $\bar{v}_T$ , of

the  $\text{Br}^-$  ions at the column outlet would thus result in lower velocity compared to the apparent mean water velocity, due to the slow-moving ions (i.e., a long-tail in the tracer breakthrough measurement).

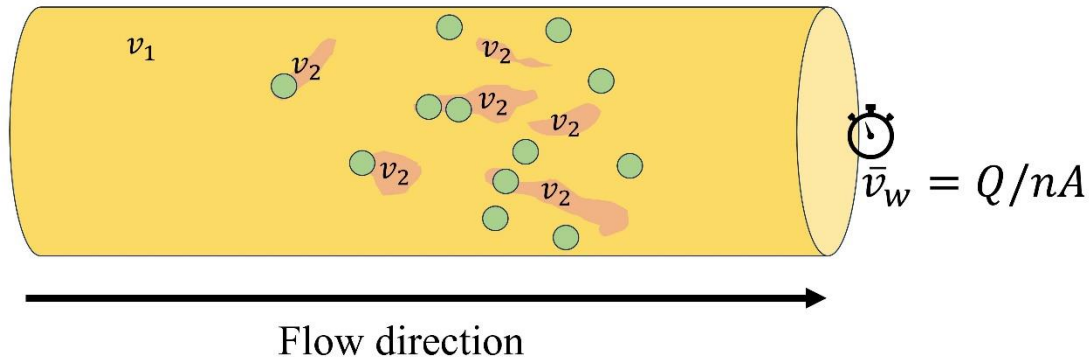

**Figure 2.** Conceptual macroscopically 1D flow through a 1D porous medium column with a mean velocity ( $\bar{v}_1$ ) containing (very small-scale or pore-scale) lower velocity inclusions ( $\bar{v}_2$ ). The  $\text{Br}^-$  ions injected as a pulse into the column are marked with green circles. Calculation of the apparent mean water velocity ( $\bar{v}_w$ ) at the column outlet will yield a higher velocity than the actual velocity of the transported  $\text{Br}^-$  ions due to the lower velocities experienced by some  $\text{Br}^-$  ions in the inclusions.

This Gedanken experiment leads to the expected conclusion that the mean velocity of the chemical tracer does not necessarily represent the apparent mean water velocity, due to even small-scale mobile and immobile zones in the medium. However, it is also clear that the origin of the measured behavior of the inert tracer is the direct result of the measurement process. One can replace the  $\text{Br}^-$  ions in the above example with water isotopes and reach the same result: some of the tagged water molecules will reach the inclusions and the estimated mean tracer velocity  $\bar{v}_T$  will be slower than the apparent mean water velocity  $\bar{v}_w$ . The act of tagging water effectively changes a water molecule to act as a “non-water” tracer, in the context of breakthrough measurements; in other words, the measured velocity represents the mean velocity of a tracer (be it a water isotope or an inert chemical), rather than the apparent mean velocity of the water.

### 3.3 Quantification of transport behavior

It is important to recognize the inherent difference between  $\bar{v}_w$  and  $\bar{v}_T$  when quantifying tracer transport in a fully water-saturated porous medium, in a macroscopically one-dimensional domain, the apparent mean water velocity  $\bar{v}_w$  does not represent the actual travel times of all water molecules through the medium, but rather an average macroscopic value of water velocity over the entire medium. On the other hand, an inert tracer transported by the water is subjected to advection and hydrodynamic dispersion, as well as to subscale diffusive mixing. As the chemical tracer is transported through the medium, it displays a distribution of velocities which represents a fingerprint of the heterogeneous flow paths. Therefore, the transport of a tracer inherently reflects a distribution of velocities for which  $\bar{v}_T$  represents the mean. It should be emphasized that the distinction between  $\bar{v}_w$  and  $\bar{v}_T$  holds regardless of the choice of model applied to interpret breakthrough curves. For example, the derivation of the classical ADE (and variants thereof) in particular, is predicated on  $\bar{v}_w$ . In contrast, the continuous time random walk (CTRW) formulation discussed below is essentially founded on  $\bar{v}_T$ .

With this understanding, how does one interpret and quantify experimental results such as those discussed in Sect. 3.1? In an effectively (macroscopically, continuum-level) homogeneous porous medium, the tracer particles can in essence display Fickian dispersion and  $\bar{v}_w = \bar{v}_T$  (Berkowitz et al., 2006a). In this situation, the classical 1D form of the ~~advection-dispersion equation (ADE)~~ for steady-state flow can be applied to quantify the transport dynamics,  $\partial C / \partial t = -v \partial C / \partial x + D^* \partial^2 C / \partial x^2$ , where the velocity  $v$  is by definition based on  $\bar{v}_w$  and  $D^*$  is a dispersion coefficient. However, in many cases, the velocity distribution often gives rise to non-Fickian (or anomalous) transport, which can be manifested by, e.g., the occurrence of long tails in measured breakthrough curves (Cortis et al., 2004), which cannot be captured by the traditional implementation of Fick's law in the ADE that assumes a symmetrical temporal breakthrough curve. Thus, the effect of anomalous transport may be significant for mean TTD estimation, which might differ substantially from the apparent mean water velocity; this is discussed in Sect. 3.4.

Here, the ~~continuous time random walk framework (CTRW)~~ was used to interpret measured breakthrough curves (Berkowitz et al., 2006b) such as shown in Fig. 1. The

CTRW represents a continuum-scale, ensemble average behavior relevant to the interpretation of these macroscopically 1D column experiments; it is especially suitable for this task because it inherently employs  $\bar{v}_T$  in its formulation. Solutions based on CTRW have been shown to yield a good description of non-Fickian transport scenarios (Nissan and Berkowitz, 2019; Dentz et al., 2008, 2023; Goeppert et al., 2020; Edery et al., 2015).


In a CTRW particle tracking (PT) formulation, applied here, probability density functions stochastically define particle transitions in space and time (Elhanati et al., 2023; Nissan et al., 2017). A truncated power law distribution is assigned for the temporal probability density function, defined with the exponent  $\beta$ , which is a measure of the non-Fickian nature of the transport (Nissan et al., 2017). A power law exponent of  $\beta > 2$  implies Fickian, or essentially Fickian, behavior for which an ADE solution is generally applicable (Berkowitz et al., 2006b), and can be modeled within the CTRW framework as a special case;  $\beta < 2$  is a descriptor of non-Fickian transport. The first spatial moment of the chemical species plume in the flow direction,  $v_\psi$ , is defined as the mean particle velocity and is therefore applied herein as the mean tracer velocity,  $\bar{v}_T$ . It is noted that the breakthrough curves from the experiments presented here were expected to display anomalous transport based on experiments and analysis reported previously by Elhanati et al. (2023). Anomalous transport even in macroscopically homogeneous porous media arises because of subtle, residual pore-scale disorder effects, with diffusion into pore-scale stagnant regions that can lead to a wide (power law) distribution of travel times (Cortis et al., 2004; Berkowitz et al., 2006a).

Two key characters are assessed in this context, focusing on a representative breakthrough curve: the mean velocity of the D<sub>2</sub>O tracer and the nature of the long tails in the breakthrough curves. As an example, the slow flow homogeneous porous medium D<sub>2</sub>O (A1) dataset was interpreted using the CTRW-PT formulation discussed above. An approximate fit to the data yielded a power law exponent of  $\beta \approx 1.84$  (Fig. 3), which is indicative of anomalous transport.

Moreover, the CTRW-PT simulation yielded a mean tracer velocity of  $\bar{v}_T = 5.8 \times 10^{-3}$  cm/s. In sharp contrast, for this experiment, the apparent mean water velocity can be directly determined as  $\bar{v}_w = 7.1 \times 10^{-3}$  cm/s for the experiment parameters ( $Q = 1.0$  mL/min,  $n = 0.38$ , and  $A = 6.16$  cm<sup>2</sup>). Clearly,  $\bar{v}_w \neq \bar{v}_T$ . Figure 3 also shows two representative fits


of the data using a 1D solution of the classical ADE. Here, using the value of  $\bar{v}_w = 7.1 \times 10^{-3}$  cm/s, which according to the theory underlying the Fickian-based ADE is the relevant velocity, the solution is seen to strongly over-estimate the advance of the peak, and to be unable to capture the long-time tailing. Furthermore, even if the mean velocity in the ADE is – incorrectly in this case – chosen to match the peak travel time of the data (simple inspection of the breakthrough curve indicates a peak travel time of about 274 min), the ADE solution is unable to capture the early arrivals and the long-time tailing (Fig. 3). In this case, the mean velocity is approximately  $6.0 \times 10^{-3}$  cm/s, and the dispersion coefficient was chosen to yield a breakthrough width similar to that using  $\bar{v}_w$ .

Finally, as an additional consideration, note that with a column length of 100 cm, the peak travel time of 274 min can be translated to an overall assumed "mean" velocity of about  $6.1 \times 10^{-3}$  cm/s, which is close to the estimate of  $\bar{v}_T = 5.8 \times 10^{-3}$  cm/s from the CTRW-PT simulation, and clearly distinct from the apparent mean water velocity  $\bar{v}_w = 7.1 \times 10^{-3}$  cm/s. Moreover, from the same breakthrough curve, the velocity corresponding to the time required for 50% of the tracer to be eluted from the column is essentially identical to  $\bar{v}_T$ .

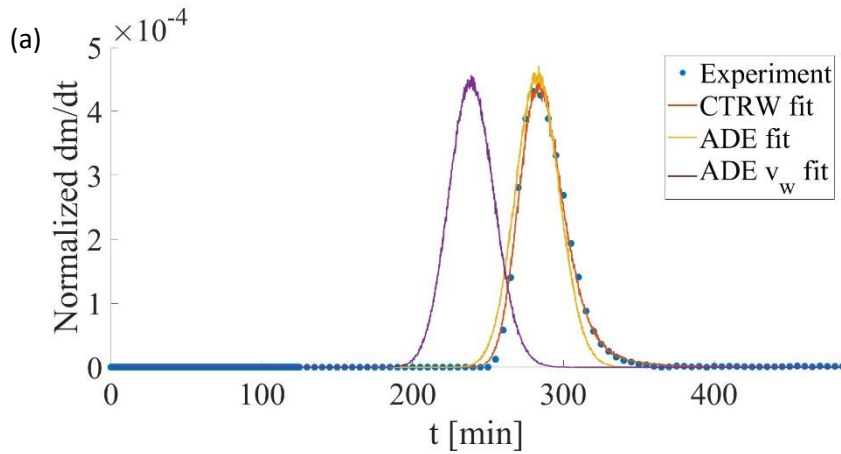

(b)



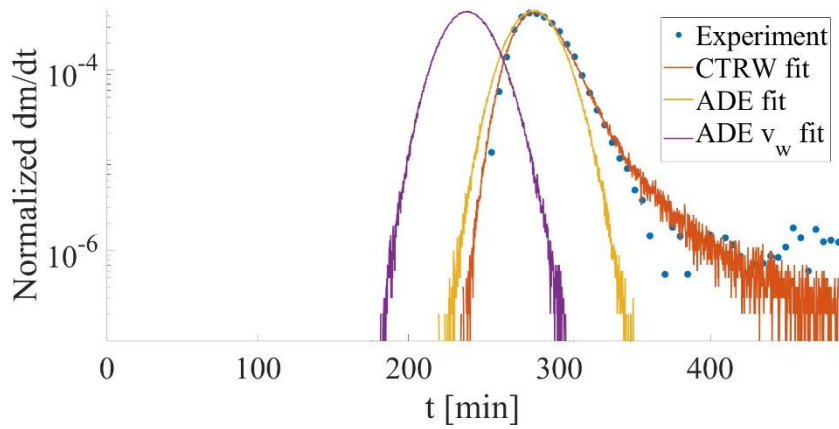

**Figure 3.** Comparison of experiment and CTRW simulation breakthrough curves for the  $D_2O$  slow flow homogeneous porous medium column (linear scale **(a)**). The long tails indicative of anomalous transport can be seen in the semi-log scale **(b)**, and in the modeled power law exponent ( $\beta=1.84$ ). CTRW solution:  $\bar{v}_T = 5.8 \times 10^{-3}$  cm/s (with a generalized dispersion coefficient of  $0.14 \times 10^{-3}$  cm<sup>2</sup>/s). Two solutions of the ADE are also shown, one using the value of  $\bar{v}_w = 7.1 \times 10^{-3}$  cm/s (“ADE  $v_w$  fit”; with a dispersion coefficient of  $D^* = 1.4 \times 10^{-3}$  cm<sup>2</sup>/s), and a fit to the peak of the data, yielding a velocity of  $6.0 \times 10^{-3}$  cm/s (“ADE fit”; with  $D^* = 0.8 \times 10^{-3}$  cm<sup>2</sup>/s).

### 3.4 Implications of using isotopic waters for inferring catchment properties

The above analysis – for a macroscopically 1-D column – can be used to provide a first assessment of the impact of using differing estimates of a mean velocity on catchment travel time estimates. It should be recognized at the outset that while catchments are inherently complex, highly heterogeneous 3D systems, involving surface water, soil layer, and aquifer components, catchment assessments are often based on largely 1D spatial conceptualizations that, accounting for a bulk water and tracer input (recharge) region and an ultimate discharge measured at a conveniently monitored outlet point (spring or stream) (Stewart et al., 2010; Koeniger et al., 2010; Benettin et al., 2022; Rodriguez et al., 2021). An alternative approach employs storage selection theory, which involves collapsing the system to zero spatial dimensions and defining functions that interpret age-ranked release of water from storage and exit from the catchment, or in other words, defining functions that quantify the probability of water of a certain age being discharged at a given time.



In the column experiments discussed in Sect. 3.1, it was shown that water isotopes migrate like inert tracers. Furthermore, it was shown in Sect. 3.3 that the tracer transport displays non-Fickian behavior, with  $\bar{v}_w \neq \bar{v}_T$  and longer-than-Fickian breakthrough tailing, both of which affect the assessment of travel and residence times. In catchment assessment, it is assumed that an often ambiguously defined mean travel time of water exists and that it can be represented by considering a hydraulic retention time, which is defined as a storage volume divided by a volumetric flow rate. Here, it is seen that the hydraulic retention times are distinct from average residence times: one cannot observe the migration of individual water molecules, but only the migration of tracers – whether inert chemicals or water isotopes – in water. This implies that trapping of water isotopes in low conductive regions will induce strong differences between estimated hydraulic retention times and average isotope travel times.

Returning to the specific example calculation discussed in Sect. 3.3, mean travel times over a 1 cm length are therefore  $\sim 140$  s and  $\sim 172$  s, for the apparent mean water velocity ( $\bar{v}_w = 7.1 \times 10^{-3}$  cm/s) and the mean tracer velocity ( $\bar{v}_T = 5.8 \times 10^{-3}$  cm/s), respectively. The mean particle transit time is longer than the water travel time due to the dispersion-induced anomalous transport by a ratio of  $\sim 1.2$ , for these specific experiments.

Returning now to the background discussed in the Introduction, a key parameter of interest in catchments is the assessment of the aquifer (fully water-saturated region) storage thickness over an entire watershed; see, e.g., Stewart et al. (2010) for extensive discussion of aquifer storage considerations. In this context, Stewart et al. (2010) provide an extensive summary of published studies that report mean water isotope travel times in macroscale catchments. The authors note that the various catchments appear sufficiently large to yield relatively similar average behaviors. Moreover, the assessments all suggest the existence of substantial storage volumes for recharge water into the aquifer zone.

These mean travel times estimates, which actually represent tracer transport and thus  $\bar{v}_T$ , are all based on analysis of  $^3\text{H}$  and assumed in these publications to represent the apparent water velocity,  $\bar{v}_w$ . [It is recognized, parenthetically, that different isotopes are likely to yield somewhat different average travel times, as may different inert chemical tracers with different masses and rates of diffusion, but this factor is not relevant for the key points and the short-term column experiments reported here.] If the tracer transport

were Fickian, then this estimate would indeed represent  $\bar{v}_T$ . However, real aquifers generally display non-Fickian behavior (e.g., Goeppert et al., 2020; Dentz et al., 2023), and in the example calculation given in Sect. 3.3, the true value of  $\bar{v}_w$  is a factor of  $\sim 1.2$  faster than  $\bar{v}_T$ . Stewart et al. (2010) conclude their analysis with an example calculation of a catchment aquifer storage thickness, based on their summary of many catchments. They posit a catchment with annual precipitation of 1000 mm, evapotranspiration of 600 mm (and thus annual recharge of 400 mm/year), and 50% aquifer flow in a formation with an overall porosity of 20%. For an estimated (apparent) mean (water) travel time of 10 years, a 10 m aquifer thickness is needed over the entire watershed to account for the long travel times in the data. However, given that water isotopes do not directly represent the water mean travel times and yield longer travel times, the actual aquifer thickness may be lower. The ratio of 1.2 between apparent mean water and mean tracer travel times calculated above applies only to the specific columns studied here. However, applying the calculated ratio for the scenario presented, to give a coarse estimate, would yield a significantly smaller aquifer thickness of  $\sim 8$  m. While the ratio of water and tracer mean travel times should be estimated for any given scenario separately, the example above demonstrates the importance of this estimation in inferring aquifer characteristics.

## 4 Conclusions

The experimental findings demonstrate the similarity between the measured transport behavior of water isotopes and an inert chemical tracer in fully water-saturated porous media. This similarity is evident across different flow velocities and porous medium compositions. Notably, water isotopes exhibit the same transport behavior as tracers; the very act of *tagging* water molecules, implicit in the measurement of any water isotope, yields a measurement of their migration as a chemical tracer, which is not identical to the bulk water flow. Moreover, the experiments here demonstrate that even in relatively homogeneous sand columns, both water isotopes and inert chemical tracers exhibit non-Fickian (anomalous) transport, and the mean tracer velocity is not necessarily equal to the apparent mean water velocity.

Consequently, studies that rely on water isotopes to estimate ~~catchment properties like~~ water TTDs ~~and aquifer storage thickness~~ must recognize this subtle but critical inequality

between apparent mean water and mean tracer velocities, and not use them interchangeably to represent the actual travel times of tracers and water isotopes. Our findings also indicate that selecting the correct velocity for aquifer thickness calculations can yield significantly smaller thickness estimates—an effect that could have even greater implications when applied at the global scale, beyond the illustrative example shown here.

*Data availability.* The data on which this article is based are available online on Zenodo: <https://zenodo.org/doi/10.5281/zenodo.12187848> (Elhanati et al., 2024).

*Competing interests.* At least one of the (co-)authors is a member of the editorial board of Hydrology and Earth System Sciences. The peer-review process was guided by an independent editor, and the authors also have no other competing interests to declare.

*Author contributions.* DE, EZ, ID, and BB formulated the ideas that resulted in the project, defined the goals and aims of the study, and contributed to the various study components. DE and BB developed the experimental methodology, ID and DE developed the isotope analytical measurement protocol, and DE implemented the methodology and carried out the data analysis. DE and BB drafted the initial manuscript. All authors took part in reviewing and editing the final manuscript.

*Acknowledgments.* B.B. thanks the Minerva Foundation for support. D.E. gratefully acknowledges the support of the Weizmann Institute for Environmental Sustainability. B.B. holds the Sam Zuckerberg Professorial Chair in Hydrology.

*Financial support.* B.B. and E.Z. gratefully acknowledge support through the ViTamins project, funded by the Volkswagen Foundation (Grant No. AZ 9B192).

## References

- Aquilina, L., Ladouche, B., and Dörfli, N.: Water storage and transfer in the epikarst of karstic systems during high flow periods, *Journal of Hydrology*, 327, 472–485, <https://doi.org/10.1016/j.jhydrol.2005.11.054>, 2006.
- Benettin, P., Rodriguez, N. B., Sprenger, M., Kim, M., Klaus, J., Harman, C. J., van der Velde, Y., Hrachowitz, M., Botter, G., McGuire, K. J., Kirchner, J. W., Rinaldo, A., and McDonnell, J. J.: Transit Time Estimation in Catchments: Recent Developments and Future Directions, *Water Resources Research*, 58, 1–36, <https://doi.org/10.1029/2022WR033096>, 2022.
- Berkowitz, B., Cortis, A., Dentz, M., and Scher, H.: Modeling non-Fickian transport in geological formations as a continuous time random walk, *Reviews of Geophysics*, 44, 1–49, <https://doi.org/10.1029/2005RG000178>, 2006a.
- Berkowitz, B., Cortis, A., Dentz, M., and Scher, H.: Modeling non-Fickian transport in geological formations as a continuous time random walk, *Reviews of Geophysics*, 44, 1–49, <https://doi.org/10.1029/2005RG000178>, 2006b.
- Berkowitz, B., Dror, I., Hansen, S. K., and Scher, H.: Measurements and models of reactive transport in geological media, *Reviews of Geophysics*, 54, 930–986, <https://doi.org/10.1002/2016RG000524>, 2016.
- Bowers, W. H., Mercer, J. J., Pleasants, M. S., and Williams, D. G.: A combination of soil water extraction methods quantifies the isotopic mixing of waters held at separate tensions in soil, *Hydrology and Earth System Sciences*, 24, 4045–4060, <https://doi.org/10.5194/hess-24-4045-2020>, 2020.
- Bowman, R. S.: Evaluation of Some New Tracers for Soil Water Studies, *Soil Science Society of America Journal*, 48, 987–993, <https://doi.org/10.2136/sssaj1984.03615995004800050007x>, 1984.
- Chen, W., Wang, J., Liu, Y., Jin, M., Liang, X., Wang, Z., and Ferré, T. P. A.: Using bromide data tracer and HYDRUS-1D to estimate groundwater recharge and evapotranspiration under film-mulched drip irrigation in an arid Inland Basin, Northwest China, *Hydrol Process*, 35, <https://doi.org/10.1002/hyp.14290>, 2021.
- Cortis, A., Chen, Y., Scher, H., and Berkowitz, B.: Quantitative characterization of pore-scale disorder effects on transport in “homogeneous” granular media, *Physical Review E - Statistical Physics, Plasmas, Fluids, and Related Interdisciplinary Topics*, 70, 8, <https://doi.org/10.1103/PhysRevE.70.041108>, 2004.
- Dentz, M., Kirchner, J. W., Zehe, E., and Berkowitz, B.: The role of anomalous transport in long-term, stream water chemistry variability, *Geophysical Research Letters*, 50, 1–8, <https://doi.org/10.1029/2023GL104207>, 2023.

494 Dentz, M., Scher, H., Holder, D., and Berkowitz, B.: Transport behavior of coupled  
 495 continuous-time random walks, *Physical Review E - Statistical, Nonlinear, and Soft*  
 496 *Matter Physics*, 78, 1–9, <https://doi.org/10.1103/PhysRevE.78.041110>, 2008.

497 Edery, Y., Dror, I., Scher, H., and Berkowitz, B.: Anomalous reactive transport in porous  
 498 media: Experiments and modeling, *Physical Review E - Statistical, Nonlinear, and Soft*  
 499 *Matter Physics*, 91, 1–13, <https://doi.org/10.1103/PhysRevE.91.052130>, 2015.

500 Elhanati, D., Dror, I., and Berkowitz, B.: Impact of time-dependent velocity fields on the  
 501 continuum-scale transport of conservative chemicals, *Water Resources Research*, 59, 1–  
 502 19, <https://doi.org/10.1029/2023WR035266>, 2023.

503 Elhanati, D., Dror, I., Zehe, E., and Berkowitz, B.: Breakthrough curves of water isotopes  
 504 and inert chemical tracers through porous media columns [Data set], Zenodo,  
 505 <https://doi.org/10.5281/zenodo.12187848>, 2024.

506 Galbács, G., Kéri, A., Kálomista, I., Kovács-Széles, É., and Gornushkin, I. B.: Deuterium  
 507 analysis by inductively coupled plasma mass spectrometry using polyatomic species: An  
 508 experimental study supported by plasma chemistry modeling, *Analytica Chimica Acta*,  
 509 1104, 28–37, <https://doi.org/10.1016/j.aca.2020.01.011>, 2020.

510 Goeppert, N., Goldscheider, N., and Berkowitz, B.: Experimental and modeling evidence  
 511 of kilometer-scale anomalous tracer transport in an alpine karst aquifer, *Water Research*,  
 512 178, 115755, <https://doi.org/10.1016/j.watres.2020.115755>, 2020.

513 Grathwohl, P., Rügner, H., Wöhling, T., Osenbrück, K., Schwientek, M., Gayler, S.,  
 514 Wollschläger, U., Selle, B., Pause, M., Delfs, J. O., Grzeschik, M., Weller, U., Ivanov,  
 515 M., Cirpka, O. A., Maier, U., Kuch, B., Nowak, W., Wulfmeyer, V., Warrach-Sagi, K.,  
 516 Streck, T., Attinger, S., Bilke, L., Dietrich, P., Fleckenstein, J. H., Kalbacher, T., Kolditz,  
 517 O., Rink, K., Samaniego, L., Vogel, H. J., Werban, U., and Teutsch, G.: Catchments as  
 518 reactors: A comprehensive approach for water fluxes and solute turnover, *Environmental*  
 519 *Earth Sciences*, 69, 317–333, <https://doi.org/10.1007/s12665-013-2281-7>, 2013.

520 Hrachowitz, M., Savenije, H., Bogaard, T. A., Tetzlaff, D., and Soulsby, C.: What can  
 521 flux tracking teach us about water age distribution patterns and their temporal dynamics?,  
 522 *Hydrology and Earth System Sciences*, 17, 533–564, <https://doi.org/10.5194/hess-17-533-2013>, 2013.

524 Jury, W. A. and Sposito, G.: A transfer function model of solute transport through soil 1.  
 525 fundamental concepts, *Water Resources Research*, 22, 243–247, 1986.

526 Koeniger, P., Leibundgut, C., Link, T., and Marshall, J. D.: Stable isotopes applied as  
 527 water tracers in column and field studies, *Organic Geochemistry*, 41, 31–40,  
 528 <https://doi.org/10.1016/j.orggeochem.2009.07.006>, 2010.

529 Levy, B. S. and Chambers, R. M.: Bromide as a conservative tracer for soil-water studies,  
 530 *Hydrol Process*, 1, 385–389, <https://doi.org/10.1002/hyp.3360010406>, 1987.

531 Lischeid, G., Lange, H., and Hauhs, M.: Information gain using single tracers under  
 532 steady state and transient flow conditions: the Gårdsjön G1 multiple tracer experiments,  
 533 in: Tracers and modelling in hydrogeology. Proceedings of TraM'2000, the International  
 534 Conference on Tracers and Modelling in Hydrogeology held at Liège, Belgium, May  
 535 2000, 73–77, 2000.

536 McDonnell, J. J. and Beven, K.: Debates - The future of hydrological sciences: A  
 537 (common) path forward? A call to action aimed at understanding velocities, celerities and  
 538 residence time distributions of the headwater hydrograph, *Water Resources Research*, 50,  
 539 5342–5350, <https://doi.org/10.1002/2013WR015141>, 2014.

540 McDonnell, J. J., McGuire, K., Aggarwal, P., Beven, K. J., Biondi, D., Destouni, G.,  
 541 Dunn, S., James, A., Kirchner, J., Kraft, P., Lyon, S., Maloszewski, P., Newman, B.,  
 542 Pfister, L., Rinaldo, A., Rodhe, A., Sayama, T., Seibert, J., Solomon, K., Soulsby, C.,  
 543 Stewart, M., Tetzlaff, D., Tobin, C., Troch, P., Weiler, M., Western, A., Wörman, A., and  
 544 Wrede, S.: How old is streamwater? Open questions in catchment transit time  
 545 conceptualization, modelling and analysis, *Hydrological Processes*, 24, 1745–1754,  
 546 <https://doi.org/10.1002/hyp.7796>, 2010.

547 McGlynn, B., McDonnell, J., Stewart, M., and Seibert, J.: On the relationships between  
 548 catchment scale and streamwater mean residence time, *Hydrological Processes*, 17, 175–  
 549 181, <https://doi.org/10.1002/hyp.5085>, 2003.

550 McGuire, K. J. and McDonnell, J. J.: A review and evaluation of catchment transit time  
 551 modeling, *Journal of Hydrology*, 330, 543–563,  
 552 <https://doi.org/10.1016/j.jhydrol.2006.04.020>, 2006.

553 Nissan, A. and Berkowitz, B.: Reactive transport in heterogeneous porous media under  
 554 different Péclet numbers, *Water Resources Research*, 1–11,  
 555 <https://doi.org/10.1029/2019wr025585>, 2019.

556 Nissan, A., Dror, I., and Berkowitz, B.: Time-dependent velocity-field controls on  
 557 anomalous chemical transport in porous media, *Water Resources Research*, 53, 3760–  
 558 3769, <https://doi.org/10.1111/j.1752-1688.1969.tb04897.x>, 2017.

559 Rai, S. and Iqbal, M. Z.: Using fluorescein and bromide tracers to investigate the role of  
 560 baseflow in a small suburban watershed in Iowa, USA, *Hydrol Process*, 29, 173–186,  
 561 <https://doi.org/10.1002/hyp.10143>, 2015.

562 Rinaldo, A., Beven, K. J., Bertuzzo, E., Nicotina, L., Davies, J., Fiori, A., Russo, D., and  
 563 Botter, G.: Catchment travel time distributions and water flow in soils, *Water Resources*  
 564 *Research*, 47, 1–13, <https://doi.org/10.1029/2011WR010478>, 2011.

565 Rodriguez, N. B., Pfister, L., Zehe, E., and Klaus, J.: A comparison of catchment travel  
 566 times and storage deduced from deuterium and tritium tracers using StorAge Selection  
 567 functions, *Hydrology and Earth System Sciences*, 25, 401–428,  
 568 <https://doi.org/10.5194/hess-25-401-2021>, 2021.

569 Simmons, C. S.: A stochastic-convective transport representation of dispersion in one-  
570 dimensional porous media systems, *Water Resources Research*, 18, 1193–1214,  
571 <https://doi.org/10.1029/WR018i004p01193>, 1982.

572 Sivapalan, M.: From engineering hydrology to earth system science: milestones in the  
573 transformation of hydrologic science, *Hydrology and Earth System Sciences*, 22, 1665–  
574 1693, 2018.

575 Sternagel, A., Loritz, R., Berkowitz, B., and Zehe, E.: Stepping beyond perfectly mixed  
576 conditions in soil hydrological modelling using a Lagrangian approach, *Hydrology and*  
577 *Earth System Sciences*, 26, 1615–1629, <https://doi.org/10.5194/hess-26-1615-2022>, 2022.

578 Sternagel, A., Loritz, R., Klaus, J., Berkowitz, B., and Zehe, E.: Simulation of reactive  
579 solute transport in the critical zone: A Lagrangian model for transient flow and  
580 preferential transport, *Hydrology and Earth System Sciences*, 25, 1483–1508,  
581 <https://doi.org/10.5194/hess-25-1483-2021>, 2021.

582 Stewart, M. K., Morgenstern, U., and McDonnell, J. J.: Truncation of stream residence  
583 time: How the use of stable isotopes has skewed our concept of streamwater age and  
584 origin, *Hydrological Processes*, 24, 1646–1659, <https://doi.org/10.1002/hyp.7576>, 2010.

585 Weiler, M., McGlynn, B. L., McGuire, K. J., and McDonnell, J. J.: How does rainfall  
586 become runoff? A combined tracer and runoff transfer function approach, *Water*  
587 *Resources Research*, 39, 1–13, <https://doi.org/10.1029/2003WR002331>, 2003.

588 Wienhoefer, J., Germer, K., Lindenmaier, F., Farber, A., and Zehe, E.: Applied tracers for  
589 the observation of subsurface stormflow at the hillslope scale, *Hydrology and Earth*  
590 *System Sciences*, 13, 1145–1161, <https://doi.org/10.5194/hess-13-1145-2009>, 2009.

591