

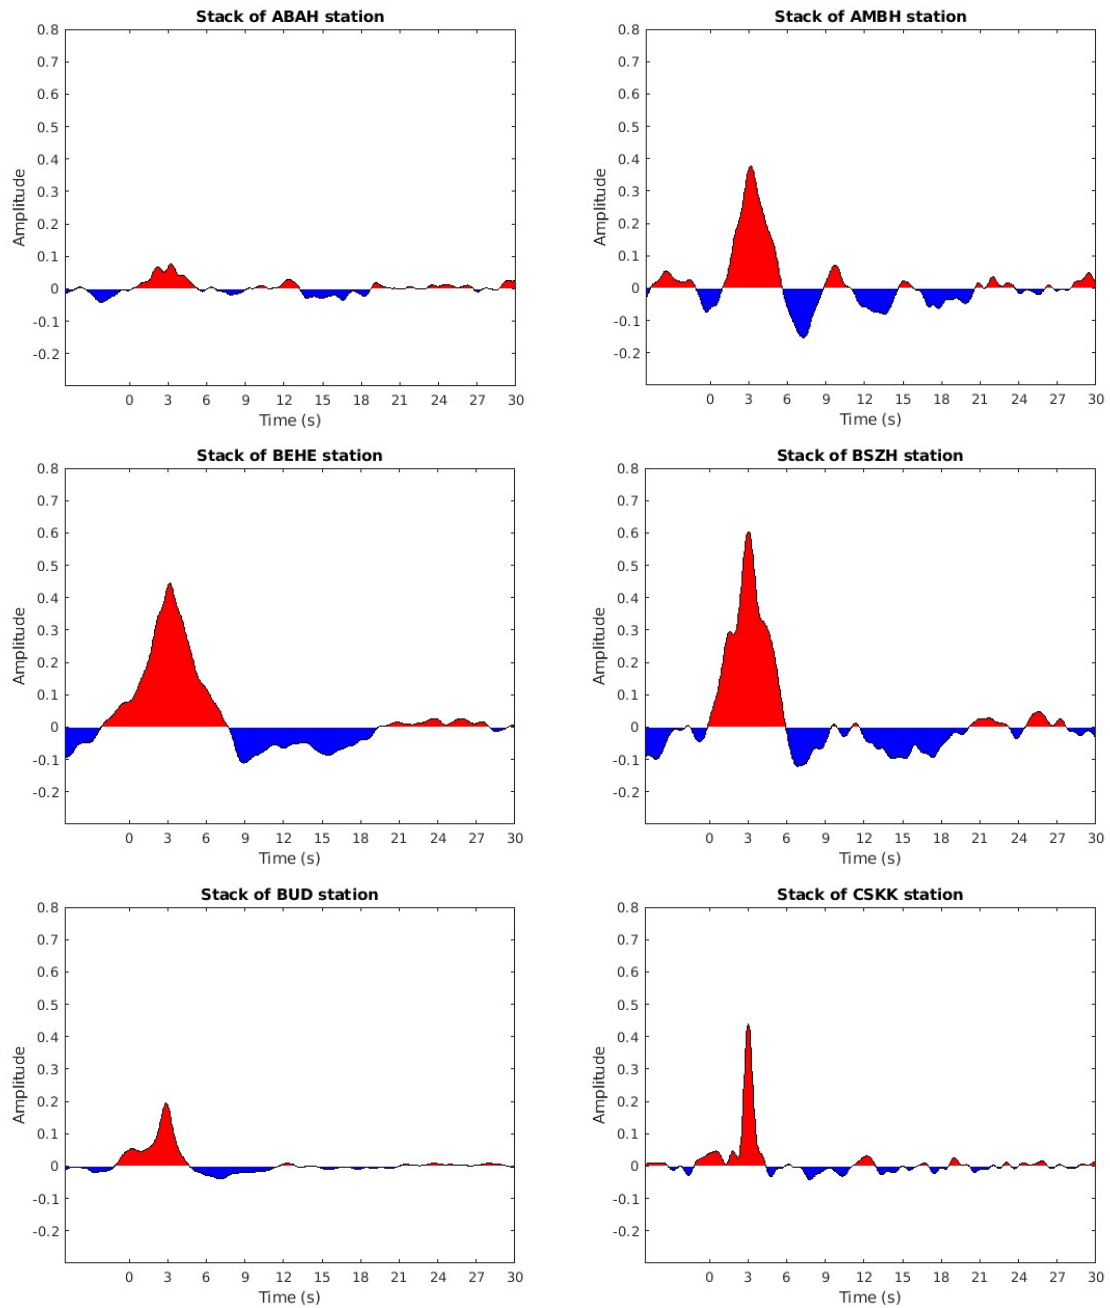
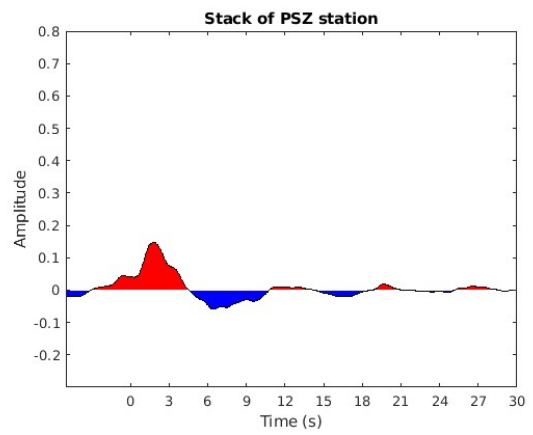
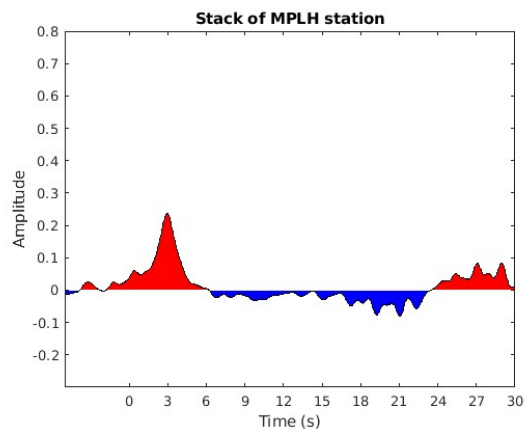
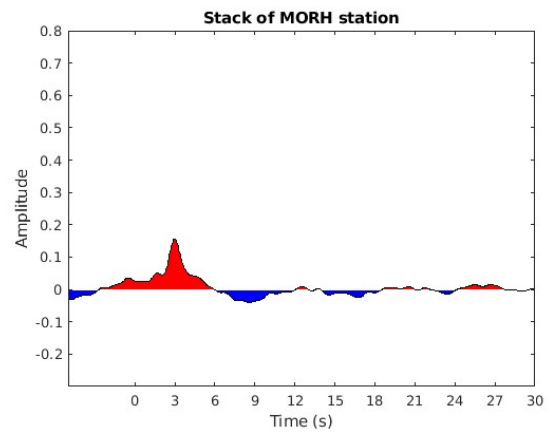
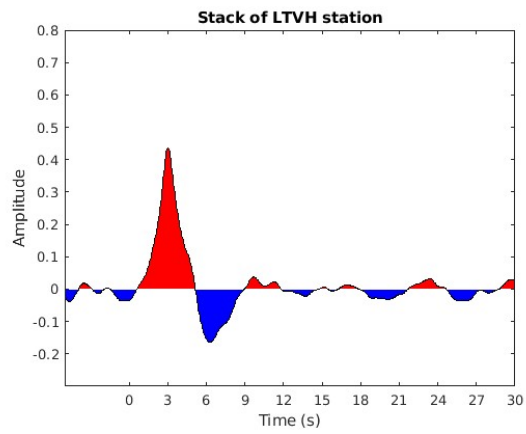





Figure S3.

Stack S-to-P receiver functions at all investigated seismological stations. The y-axis shows the absolute amplitude of the receiver functions and the x-axis represent the time of the calculated receiver functions.

Permanent stations

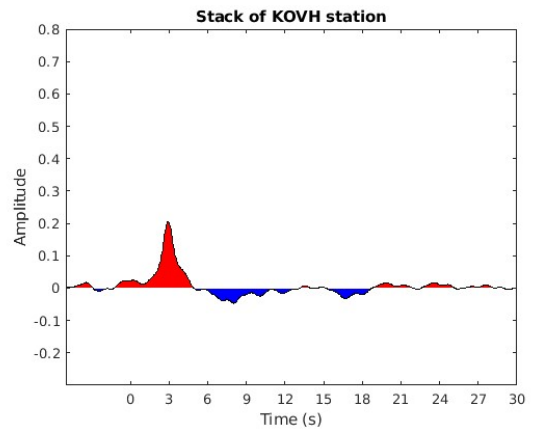

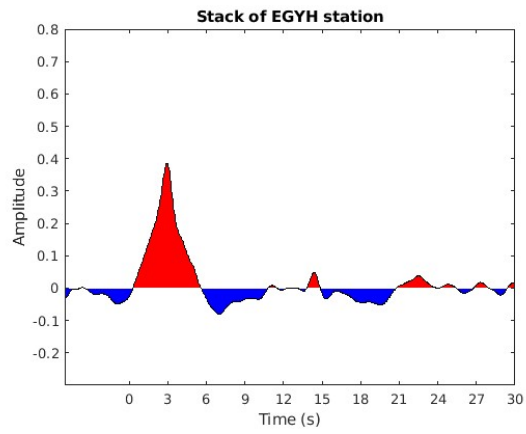

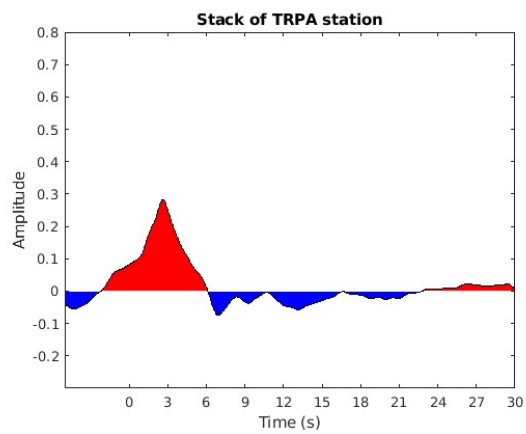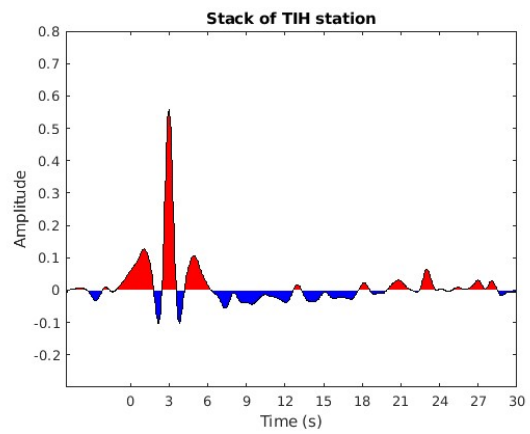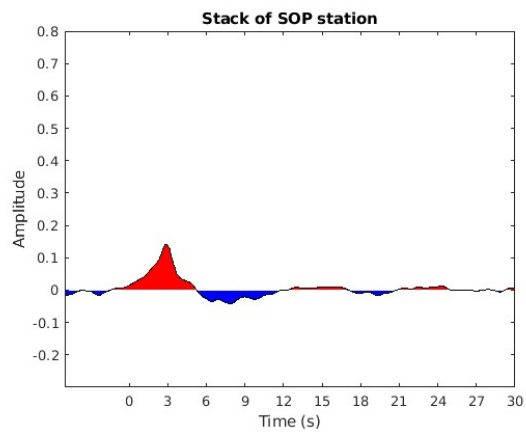

Temporary stations

