

1 Constructing physical-based rainfall landslides prediction model: 2 Insights from rainfall threshold curves database of slope units

3 Kai Wang^{1*}, Linmao Xie¹, Shuailong Xie¹, Shaojie Zhang^{2*}, Yongyang Jiang³, Ji Zhang⁴, Lin Zhu¹, Zhiliu Wang¹,
4 Fuzhou Qi¹

5 *1. School of architecture and civil engineering, Zhongyuan University of Technology, Zhengzhou, 450007, China*

6 *2. Key Laboratory of Mountain Hazards and Earth Surface Process, Institute of Mountain Hazards and
7 Environment, Chinese Academy of Sciences, Chengdu, 610041, China*

8 *3. Zhejiang Zhongnan Construction Group Steel Structure Co., Ltd, Hangzhou, 311400, China*

9 *4. Sichuan Institution of Geological Engineering Investigation Group Co.LTD, Chengdu, 610041, China*

10 **Abstract:** The commonly used rainfall threshold warning method relies heavily on historical
11 rainfall and landslide inventory data, which limits its applicability in regions that lack these data.
12 While physical methods do not rely on landslide inventories to establish warning criteria, the
13 calculation of the safety factor typically requires considerable time. To address these issues, this
14 study integrates physical methods, rainfall threshold warning methods, and slope units to develop
15 a rapid forecasting model for rainfall landslides at a regional scale. A hydrological analysis
16 technique for slope units based on grid cells was developed to calculate the instability probability
17 of slope units. Then, each slope unit was analyzed under 20 levels of antecedent effective
18 precipitation and nearly 200 combinations of rainfall intensity (I) and duration (D) to derive the
19 key fitting parameters α and β of the I-D curves under various rainfall scenarios. The application
20 results from Fengjie County indicate that the model runs in less than 12 min, with missing alarm
21 and false alarm rates of 11.8% and 21.1%, respectively, highlighting its excellent potential for
22 practical application. This study is expected to provide insights for the rapid forecasting of rainfall
23 landslides in the impoverished mountainous regions of developing countries.

24
25
26 **Key words:** Landslide forecasting model, Slope unit, Fitting parameters, Warning database

* Corresponding Authors 1: Kai Wang

E-mail: 6696@zut.edu.cn

* Corresponding Authors 2: Shaojie Zhang

E-mail: sj-zhang@imde.ac.cn

1 **1 Introduction**

2 Rainfall-induced landslides at a regional scale are among the most common types of natural
3 hazards worldwide. Reports indicate that in the United States, rainfall-triggered landslides and
4 secondary hazards result in 25–50 fatalities and economic losses of approximately \$2 billion
5 annually (He et al., 2016). This loss is even more severe in developing countries in the Third
6 World (Wang et al., 2024; Wang et al., 2021; Wang et al., 2023). In recent years, numerous studies
7 have indicated that regional landslide forecasting is highly effective for hazard prevention and
8 mitigation. Researchers have developed various rainfall landslide forecasting models based on
9 statistical and physical methods (Aristizábal et al., 2016; Baum et al., 2008; Bezak et al., 2016;
10 Bogaard et al., 2018; Cuomo et al., 2021; Liang et al., 2021; Medina et al., 2021; Pinho et al.,
11 2022; Tufano et al., 2021; Wang et al., 2013; Zhang et al., 2021; Zhang et al., 2019; Moeineddin et
12 al., 2023; Li et al.,2025).However, there are still several unresolved issues in regional landslide
13 forecasting, making accurate and efficient warnings a significant global challenge.

14 The first major issue is the selection of forecasting methods. The presented statistical
15 approaches generally depend on historical precipitation and landslide inventory data to construct
16 the rainfall threshold curves. Recently, researchers proposed different types of rainfall threshold
17 curves, including Intensity-Duration(I-D), Rainfall event-Duration (E-D), Rainfall event-Intensity,
18 (E-I), Intraday rainfall and antecedent effective rainfall (IR-AER), Intensity-Probability (I-P), and
19 Intensity-Duration-Mean areal rainfall(I-D-MEAR)(Brunetti et al., 2010; Hong et al., 2005; Rosi
20 et al., 2020; Zhuang et al., 2014). The I-D curve is the most extensively used among these types.
21 The I-D curve is typically fitted in either Cartesian coordinates or a double-logarithmic coordinate
22 system, and the equation of the curve is governed by two key fitting parameters, α and β ,
23 expressed as follows:

$$24 \qquad I = \alpha D^\beta \qquad (1)$$

25 where α and β are derived from the statistical analysis of historical rainfall and landslide data.

26 Studies indicate that statistical methods are applicable in regions with abundant historical
27 records of rainfall landslides because these areas can provide sufficient samples for fitting the I-D
28 curve(Bezak et al., 2016; Hong et al., 2017; Kanungo et al., 2014; Kim et al., 2020; Ma et al.,
29 2015; Marra, 2018; Pradhan et al., 2018). However, in the poor mountainous regions of the Third
30 World, many areas that are severely affected by landslides lack professional monitoring devices

1 and rain gauges, potentially limiting the application of statistical approaches(Zhang et al., 2021;
2 Zhang et al., 2019). In contrast, physical methods typically rely on hydrological and mechanical
3 analyses to calculate the safety factors of landslides under different rainfall scenarios, thereby
4 reducing the reliance on historical rainfall and landslide observation data. In regions where
5 landslide inventory data are scarce, physical methods could serve as promising alternatives (Zhang
6 et al., 2021; Zhang et al., 2019). However, physical methods require historical landslide data to
7 validate the accuracy of the forecasting results, and the safety factor calculation process typically
8 requires a considerable amount of time. This computational burden increases substantially when
9 considering the stability analysis of thousands of slopes at the regional scale, making it difficult to
10 ensure the efficiency of real-time warnings (Zhang et al., 2021).

11 The second issue pertains to the selection of prediction unit. Clearly defined prediction units
12 enable residents to identify the specific locations where landslides are likely to occur while also
13 providing guidance for local governments to develop emergency schemes. However, the I-D
14 warning curves derived from statistical methods can only provide general trends of hazards within
15 the region but cannot pinpoint the specific locations of landslide occurrences. Grid cells improve
16 the clarity of the prediction results to some extent, as the specific locations of each grid within the
17 area are well defined (Zhang et al., 2021). Researchers have employed grid cells to establish
18 multiple physical forecasting models such as Shallow Landslide Stability model (Montgomery et
19 al., 1994), Stability Index Mapping (SINMAP) (Tarboton et al., 1970), The Three-dimensional
20 Fully Distributed Hydrological model-Safety factor(GEOTop-FS)(Rigon et al., 2006), Transient
21 Rainfall Infiltration and Grid-Based Regional Slope-Stability Analysis(TRIGRS)(Baum et al.,
22 2008), High Resolution Slope Stability Simulator(HIRESSS) (Rossi et al., 2013), Hillslope-scale
23 Shallow Landslide Induced Debris Flow Risk Evaluation(H-slider)(Liang et al., 2021), Open and
24 Distributed Hydrological Simulation and Landslides (SHIA_Landslide) (Aristizábal et al., 2016),
25 Shallow Landslides Instability Prediction (SLIP)(Montrasio et al., 2016), and Fast Shallow
26 Landslide Assessment Model (FSLAM)(Guo et al., 2022). However, the morphology of grid cells
27 does not accurately characterize the topographical features of natural hillslopes (Domènech et al.,
28 2019; Zhang et al., 2021), resulting in a lack of clear geomorphological significance. In practical
29 applications, a natural slope can be segmented into a series of grid cells, in which each grid is
30 assigned a different alert level. This indicates that a high warning level in a grid cell does not

1 mean that the entire slope will experience a slide.

2 In contrast, slope units can represent the topographical features of landslides more accurately,
3 and their boundaries are easily discernible in field environments. Currently, there are various
4 methods for extracting slope units, including the DEM-based hydrological process analysis
5 method(Turel et al., 2011), r.slopeunits method(Alvioli et al., 2020), curvature watershed
6 methods(Yan et al., 2021), MIA-HSU methods(Wang et al., 2019), and multi-scale image
7 segmentation methods (Huang et al., 2021). In recent years, researchers have developed
8 forecasting models utilizing slope units, validating their promising application potential in
9 predicting rainfall-induced landslides (Wang et al., 2023; Zhang et al., 2021).


10 Addressing the issues outlined in regional landslide forecasting, this study focuses on the
11 integration of slope units, physical methods, and rainfall parameterized warning techniques to
12 develop a rapid forecasting model applicable to large areas on a scale of thousands of square
13 kilometers. Within this model, we no longer pay attention to the positional relationship between
14 the rainfall data of a landslide and the I-D curve, but concentrate on the key fitting parameters α
15 and β of the I-D curve for each slope unit. To facilitate this, we developed a rainfall infiltration
16 simulation technique rooted in grid cells within slope units and subsequently utilized physical
17 methods to analyze the instability probability for slope units under different rainfall scenarios. For
18 each slope unit, we designed rainfall scenarios comprising various antecedent rainfall levels
19 combined with hundreds of rainfall intensity and duration combinations. This allowed us to obtain
20 the key parameters α and β of the I-D curves for different rainfall scenarios, thereby constructing a
21 database of parameters α and β under various antecedent precipitation levels. A case study in
22 Fengjie County, in the Three Gorges Reservoir area, was conducted to validate the reliability of
23 the proposed method. This research is expected to provide valuable insights for regional landslide
24 forecasting in impoverished mountainous areas in the developing world.

25 **2 Methodology**

26 **2.1 The slope unit extraction method MIA-HSU**

27 In this study, we employed the MIA-HSU method to extract slope units(Wang et al., 2021;
28 Wang et al., 2019; Wang et al., 2023). In the MIA-HSU method, each HSU(homogeneous slope
29 unit) is defined as a continuous and homogeneous geomorphological entity. This definition implies
30 that terrain features related to slope and aspect are uniform within each HSU, with boundaries

1 indicating transitions in topographical features. The MIA-HSU method consists of two steps. The
 2 first step involves partitioning the Digital Elevation Model (DEM) into small regions with
 3 homogeneous terrain characteristics. In this step, the MIA-HSU method utilizes terrain curvature
 4 analysis to identify ridge and valley regions (Figure 1a) and then extracts the morphological
 5 skeleton lines of ridge and valley areas to characterize topographic relief. Morphological
 6 algorithms (such as dilation and erosion) were used to extract the morphological skeletons of
 7 ridges, valleys, and flat areas from the DEM (Figure 1b), ultimately connecting these skeletons
 8 into a closed network (Figure 1c). Thus, each small region within the network exhibits uniform
 9 geomorphological characteristics. The second step involves merging small adjacent regions. The
 10 MIA-HSU method employs the principal component analysis (PCA) method to derive fitted
 11 planes from localized terrain regions, followed by the implementation of vector similarity criteria
 12 to merge adjacent small regions, thereby generating HSUs(Figure 1d).

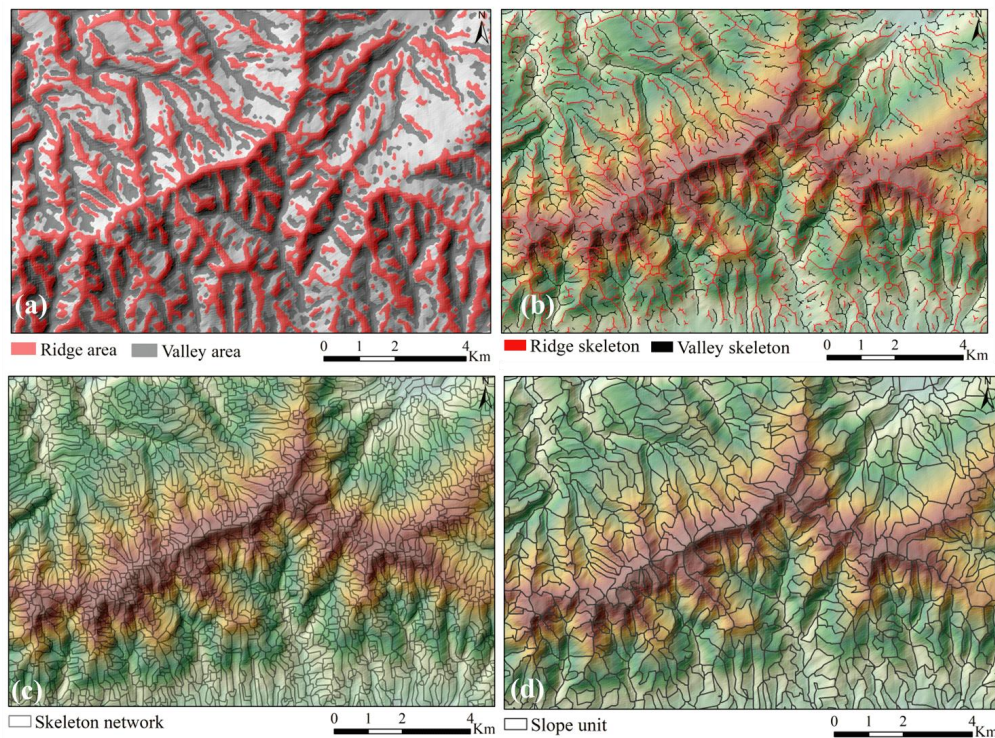


13 Figure 1 HSU extraction process: a. the identification of ridge and valley areas; b. the morphological skeleton line
 14 extraction for ridge and valley areas; c. the morphological skeleton closed network; d. HSU extraction result
 15

16 2.2 The HSU hydrologic simulation technique based on grid cells

17 (1) The identification for row and column information of grid cell within HSUs

18 From a geometric perspective, an HSU can be regarded as a spatial polygon that signifies a
 19 landform entity with homogeneous terrain features in the field environment. At the regional scale,
 20 there is obvious heterogeneity in the topography and boundary characteristics among different

1 HSUs(Wang et al., 2021; Wang et al., 2019; Wang et al., 2023), resulting in the immaturity of
 2 hydrological analysis methods based on slope units. In contrast, hydrological analysis methods
 3 based on grid cells are well-developed. Some researchers have employed grid cells integrated with
 4 an infinite slope model or the limit equilibrium method to conduct regional landslide assessment
 5 or prediction(Gu et al., 2014; Wang et al., 2023; Zhang et al., 2021; Zhuang et al., 2016). In this
 6 study, each HSU was conceptualized as a composition of grid cells with similar microtopographic
 7 features, as illustrated in Figure 2a. For each HSU, we utilized GIS spatial analysis tools to
 8 quantify the number of grid cells contained within it and their corresponding row and column
 9 positional information, thus establishing a comprehensive database that includes the position
 10 information of the grid cells within each HSU.

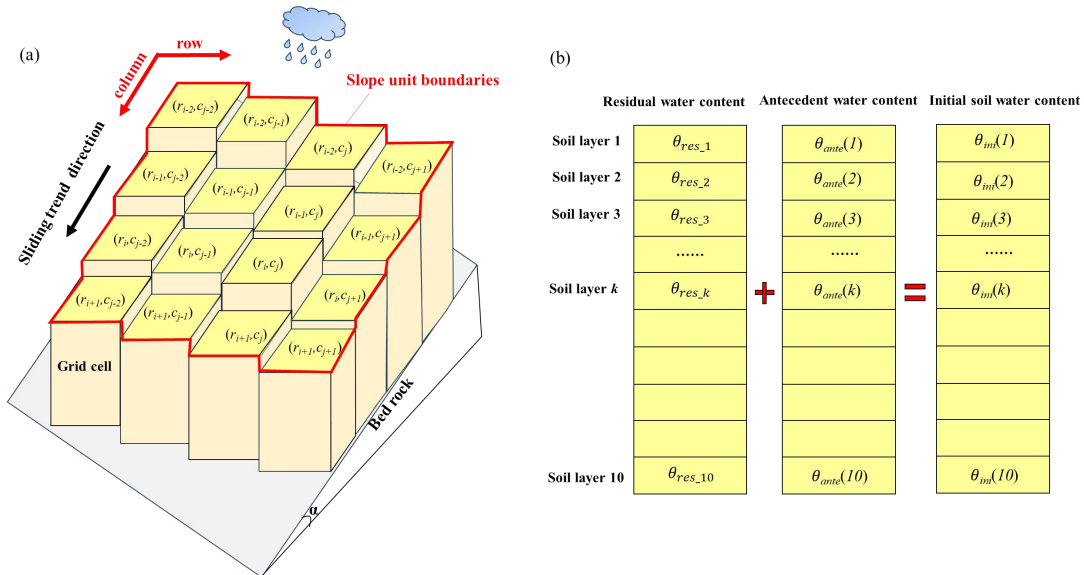

11
 12 Figure 2 The diagram for HSU-grid cell hydrological connection: a. Grid cells contained within HSU (r_i , c_j
 13 represent the row and column of grid cells contained within HSU, respectively)

14 **(2) Initial water content assignment of HSUs**

15 After obtaining the grid cell information contained within each HSU, conducting a rainfall
 16 infiltration analysis for these grid cells represents a complex and important task. One issue that
 17 cannot be overlooked is initial moisture content. For landslides in the Three Gorges Reservoir area
 18 of China, the soil typically experiences a prolonged dry winter before the rainy season (May to
 19 September). Previous research indicates that the residual moisture content of slopes before the
 20 rainy season averages approximately 7% to 8% (Wang et al., 2023). Accordingly, this study
 21 categorizes the initial water content into two components: the residual moisture content (θ_{res}) and
 22 the moisture content increment caused by antecedent precipitation(θ_{ante}). Here, θ_{res} reflects the

1 average moisture level of the soil prior to the rainy season, while θ_{ante} indicate the increase in
 2 moisture content due to antecedent effective precipitation prior to landslide occurrence.

3 In this study, each grid cell is stratified into ten soil layers, each with a thickness of 0.2 m
 4 (Figure 2b). For the Three Gorges Reservoir area, the regional landslides triggered by rainfall
 5 were mainly shallow (with thicknesses of 2-3 m). Therefore, variations in residual moisture
 6 content within the soil depth were disregarded, and the same residual moisture content value was
 7 assigned to each soil layer. Following this, we applied steady-state infiltration theory to simulate
 8 the distribution of moisture content across the soil layers influenced by antecedent precipitation,
 9 thereby allocating the antecedent rainfall to each soil layer. The calculation for θ_{ini} of each soil
 10 layer within the grid cell is as follows:

$$11 \quad \theta_{\text{ini}}(k) = \theta_{\text{ante}}(k) + \theta_{\text{res}} \quad (k=1,2,3\dots n) \quad (2)$$

12 Where n represents the number of soil layers, and here $n = 10$; $\theta_{\text{ini}}(k)$ indicates the initial
 13 moisture content of each soil layer; $\theta_{\text{ante}}(k)$ refers to the moisture change in each soil layer due to
 14 previous precipitation; θ_{res} stands for the residual moisture content in the grid cell.

15 (3) Rainfall infiltration process simulation of grid cell

16 After obtaining the initial moisture content distribution, the 1-dimensional Richards
 17 infiltration equation was used to solve the moisture content distribution in the grid cell during the
 18 rainfall infiltration process.

$$19 \quad \frac{\partial \theta}{\partial t} = \frac{\partial}{\partial z} \left[D(\theta) \cdot \frac{\partial \theta}{\partial z} \right] - \frac{\partial K(\theta)}{\partial z} \quad (3)$$

20 Where $D(\theta)$ represents the value of soil water diffusivity under unsaturated conditions and
 21 has $D(\theta) = K(\theta) / \frac{d\theta}{d\psi_m}$.

22 The finite difference scheme outlined above was formulated for numerical simulation of
 23 hydrological processes. The lower boundary, identified as impermeable, is based on the maximum
 24 soil depth of the grid cell. The upper boundary of each grid cell was designated as an infiltration
 25 boundary. When the rainfall intensity $I(t)$ is less than the infiltration capacity of the topsoil, all
 26 precipitation infiltrates into the soil, and no runoff is generated. In this scenario, the infiltration
 27 boundary of precipitation was governed by the following differential equation:

$$28 \quad -D(\theta) \frac{\partial \theta}{\partial z} + K(\theta) = I(t) \quad (4)$$

29 When the rainfall intensity exceeded the soil infiltration capacity, the excess portion was

1 transformed into overland flow. At this point, the rainfall infiltration boundary was governed by
2 the following equation:

$$3 \quad \theta = \theta_s \quad (5)$$

4 Where θ_s is the saturated water content of the grid cell.

5 (4) Soil water content generation of HSU

6 Following the calculation of the soil moisture for individual grid cells, the soil water
7 distribution of the HSU was computed as follows:

$$8 \quad \theta_{HSU}(k) = \frac{\sum_{k=1}^n \theta(k)}{n} \quad (6)$$

9 where $\theta_{HSU}(k)$ represents the moisture content of the k th layer of the HSU, $\theta(k)$ denotes the
10 moisture content of the k th layer in the grid cell. n is the number of soil layers ($n = 10$).

11 2.3 *HSU_{prob}*: the calculation of instability probability of HSUs

12 (1) Profile extraction

13 After calculating the soil water content within each HSU, analyzing the stability of HSUs
14 during the rainfall infiltration process is another important task. At present, the time required to
15 carry out 3D analysis for each HSU on a large regional scale is too large, so extracting the
16 calculation profile of the HSU becomes a reasonable selection. Currently, there is no uniform
17 method for extracting the calculation profile of HSUs. Some reasonable assumptions are
18 summarized as follows: the position of the profile line should reflect the elevation difference
19 between the front and back edges of the slope, and the centroid point of the HSUs should be on the
20 calculated profile to ensure that the soil weight on both sides of the calculated section is relatively
21 uniform, and the areas of the two sections should be close to each other.

22 Based on these considerations, we developed a fast extraction algorithm HSU-profile (Wang
23 et al., 2021; Wang et al., 2023) for HSU profiles at large regional scales, which can be divided into
24 three steps:

25 First, the highest elevation point H of the HSU polygon is connected to centroid point C to
26 obtain line segment L_1 , which intersects the HSU polygon at point J_1 (Figure 3b). Line segment L_1
27 divides the HSU polygon into two parts, and the areas of the two parts, S_1 and S_2 are calculated
28 to obtain the area ratio $A = S_1 / S_2$.

29 Next, the lowest elevation point L and centroid C are connected to form line segment L_2 , as

1 shown in Figure 3 b. Determine the intersection point J_2 between L_2 and the polygon of the slope
 2 unit is determined. At this point, the HSU was divided into two parts by line segment L_2 , and the
 3 areas of the two parts, S_3 and S_4 , were calculated to obtain the area ratio $B=S_3/S_4$.

4 Finally, $|A|$ and $|B|$ are compared. A smaller absolute value of A indicates that line segment L_1
 5 divides the areas on both sides of the HSU polygon more evenly. In this case, L_1 is selected as the
 6 profile line. Otherwise, the line segment L_2 was chosen as the profile line.

7 (2) Calculation of safety factor F_s calculation


8 For each HSU, the Monte Carlo method was used to generate a large number of potential
 9 polyline-type slip surfaces (Figure 3c), and the random walk method(Greco, 1996; Zhang et
 10 al.,2006) was employed to search for the critical slip surface. The infinite slope model was used to
 11 calculate the safety factor F_s of each potential slip surface as follows:

$$12 \quad F_s = \frac{\tan \varphi}{\tan \alpha} + \frac{c + u_s \tan(\varphi^b)}{\gamma_s D_s \cos \alpha \sin \alpha} \quad (7)$$

13 where c is the effective cohesion of the soil, φ is the effective internal friction angle of the
 14 soil, and r_s is the average unit weight of soil above the slip surface. φ^b is related to the matric
 15 suction; when the matric suction is low, it is close to the internal friction angle(Zhang et al., 2018).
 16 D_s is the thickness of the soil layer above the slip surface. u_s represent the matric suction, which
 17 can be described by the Van Genuchten model(Van Genuchten, 1980):

$$18 \quad S_e = \frac{\theta - \theta_r}{\theta_s - \theta_r} = \left[\frac{1}{1 + (\alpha_w \times u_s)^n} \right]^m \quad (8)$$

19 Where S_e represents the saturation degree, θ denotes the soil water content of the HSU,
 20 θ_s and θ_r are the saturated and residual water content, respectively. The parameters α_w , n and m
 21 characterize the shape of the soil–water characteristic curve, with the relationship $n=1-1/m$.

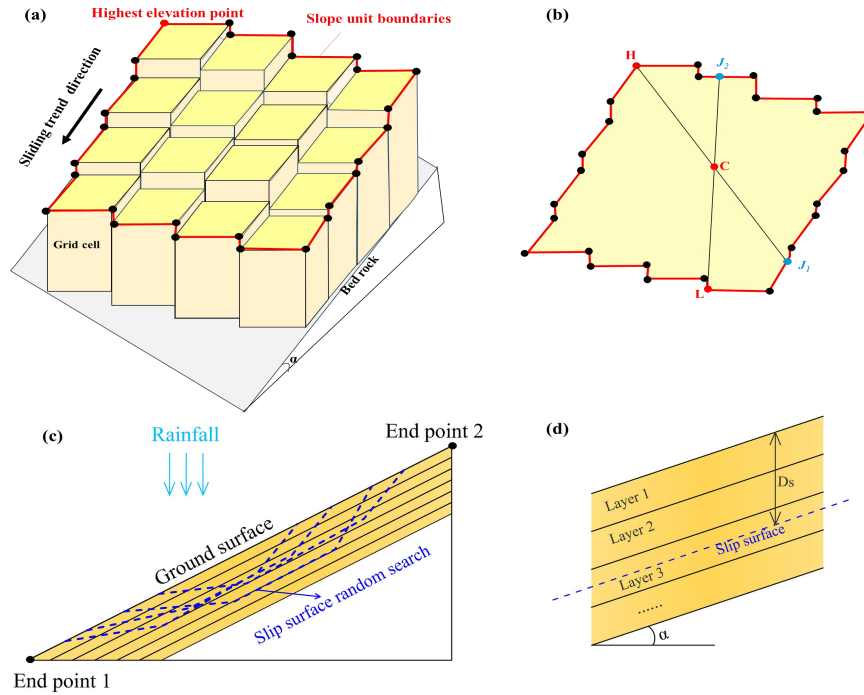

1
2 Figure 3 HSU instability probability calculation diagram a. Extraction of HSU boundary points; b. Profile line
3 extraction of HSU polygon; c. Random search for critical slip surface; d. Enlarged view of the sliding mass for
4 detailed visualization.

5 (3) HSU_{prob} calculation

6 According to the saturated-unsaturated rainfall infiltration theory, the mechanical parameters
7 of the soil (such as cohesion force $c(kPa)$ and internal friction angle $\varphi(^{\circ})$) are significantly affected
8 by soil moisture content fluctuations. The variation in soil mechanical parameters during the
9 process of rainfall infiltration is very complex, and it is generally acknowledged that dry soil prior
10 to rainfall infiltration exhibits higher mechanical strength (characterized by elevated parameter
11 values). As rainwater continues to infiltrate, the soil water content gradually increases, leading to a
12 decreasing trend in mechanical parameters, such as cohesion and internal friction angle.
13 Consequently, the mechanical parameters of the soil within each HSU are not fixed, but spatial
14 uncertainty exists to some extent. In this context, employing probabilistic analysis methods to
15 calculate the instability probability of an HSU is a more reasonable choice. Probability density
16 functions (such as normal or uniform distributions) are commonly used to describe the uncertainty
17 of the geotechnical parameters. The normal distribution is considered suitable for small areas or
18 watersheds where hydrogeological parameters can be collected in detail, whereas a uniform
19 distribution is more applicable for larger areas, where it is difficult to acquire detailed
20 hydromechanical parameters(Wang et al., 2021; Wang et al., 2023).

1 In this study, we utilized a uniform distribution to simulate the uncertainty of the mechanical
 2 parameters within the HSUs. The soil mechanical parameters in the unsaturated state before
 3 rainfall were taken as the upper bound, while those in the fully saturated state were considered the
 4 lower bound, thereby establishing the upper and lower value boundaries for the mechanical
 5 parameters within the HSU, as indicated in Equations (9) and (10):

$$6 \quad c \in [c_{lower}, c_{upper}] \quad (9)$$

$$7 \quad \varphi \in [\varphi_{lower}, \varphi_{upper}] \quad (10)$$

8 where c_{upper} and c_{lower} represent the upper and lower bounds of c (kPa), respectively, φ_{upper} and
 9 φ_{lower} represent the upper and lower bounds of φ (°), respectively. The Monte Carlo method was
 10 employed to randomly select the values within these bounds. The instability probability of the
 11 HSU was calculated using Equation (11).

$$12 \quad HSU_{prob} = \frac{Sum_{Fs < 1}}{m} \quad (11)$$

13 where m represents the number of random selections for the mechanical parameters and m
 14 is set to 500.

15 **2.4 The obtainment of key fitting parameters α and β for I-D curves of HSUs**

16 In this study, an HSU is regarded as unstable when the value of HSU_{prob} exceeds 50%. Then,
 17 the rainfall intensity and duration data with HSU instability under different rainfall scenarios were
 18 recorded to obtain the key fitting parameters α and β for the I-D curves of each HSU, thereby
 19 establishing a database of parameters α and β . The detailed steps are as follows.

20 (1) Setting the antecedent effective rainfall levels $AER_i(i=1,2,3\dots n)$

21 The antecedent effective rainfall(AER) has a significant impact on landslide occurrence.
 22 Previous research indicates that in the Three Gorges Reservoir area, the minimum value of AER
 23 before landslide occurrence is 0 mm, whereas the maximum value of AER can exceed 170
 24 mm(Wang et al., 2021). Therefore, 20 different levels of AER ranging from 0 to 200 mm were
 25 established with intervals of 10 mm.

26 (2) Design of the combination of rainfall intensity (I) and duration(D)

27 For each antecedent rainfall level, we categorized rainfall intensity (I) into eight levels to
 28 represent the variation from light to heavy rainstorms: 2, 5, 10, 20, 30, 40, 50, and 60 mm/h. The
 29 rainfall duration (D) ranged from 1 to 24 h, with intervals of one hour. Consequently, 192

1 combinations of I and D were generated for each AER level.

2 (3) Generation of fitting parameters α , β of the I-D curves

3 For each combination of rainfall intensity and duration data, the method outlined in Section
4 2.2 is used to determine the soil water distribution within each HSU, and the corresponding value
5 of HSU_{prob} was computed using the method described in Section 2.3. If the HSU is unstable, the
6 corresponding intensity and duration data can serve as data points for fitting the I-D curves.
7 Subsequently, a power function was utilized to fit these data points to obtain the key fitting
8 parameters α and β of the I-D curve. As presented above, the fitting parameters α and β for the I-D
9 curve of each HSU can be generated, thereby establishing a database for α and β at different AER
10 levels.

11 **2.5 Warning Mode**

12 In practical applications, the antecedent effective rainfall(AER), rainfall intensity (I), and
13 duration (D) for each HSU can be computed using Quantitative Precipitation Estimation (QPE)
14 and Quantitative Precipitation Forecasting (QPF) products provided by the meteorological
15 department (Wang et al., 2021). Next, we analyzed the relationship between the actual value of
16 AER and the 20 levels of AER documented in the database, thereby determining the level that is
17 closest to the antecedent effective rainfall data of the HSU. The α and β values corresponding to
18 this level were retrieved from the database for the following assessments.

19 (1) If $I \geq \alpha D^\beta$, the data point (I, D) is above the warning curve; thus, the warning should be
20 released.

21 (2) Conversely, if $I < \alpha D^\beta$, it signifies that the data point (I, D) is below the warning curve;
22 therefore, no warning should be issued.

23 The programming languages Fortran 95 and Python 3.1 were employed to compile the
24 algorithms outlined in Sections 2.1-2.5, and the overall flowchart of the warning mode is depicted
25 in Figure 4.

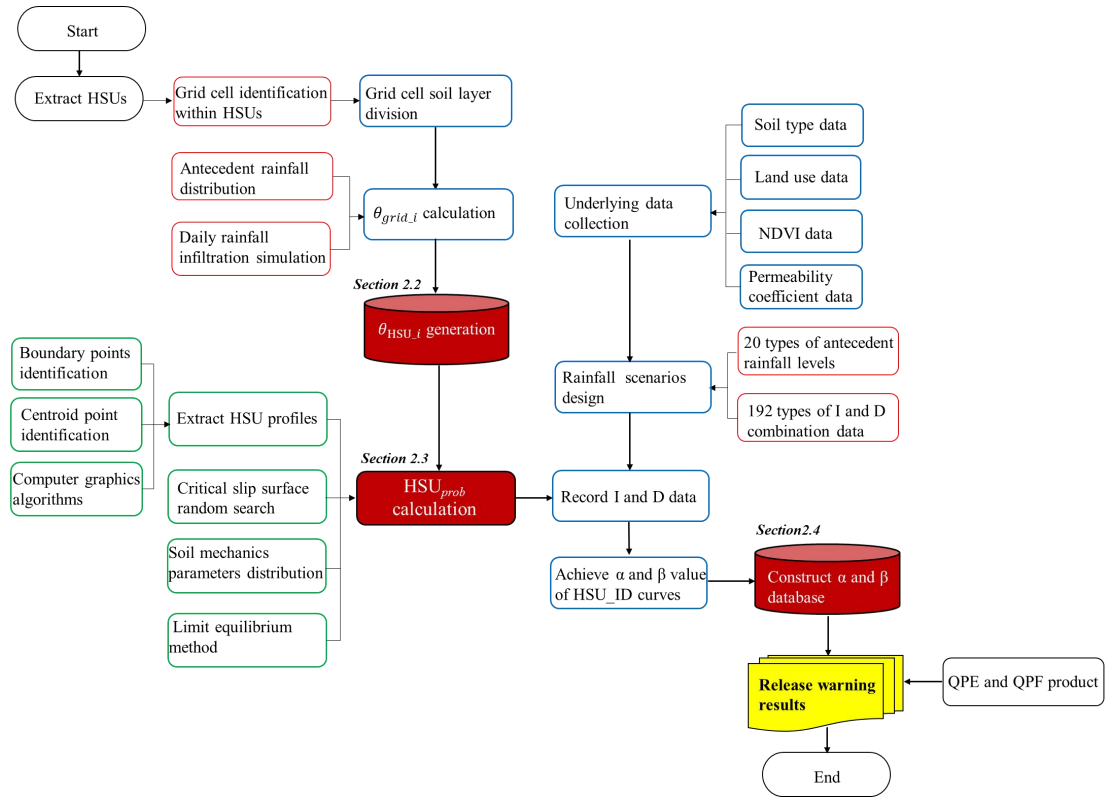



Figure 4 The flow chart of the fast warning mode based on parameter α and β database

3 Study area and data

3.1 Study area and slope unit data

Fengjie County is situated in the eastern region of the Three Gorges Reservoir area, with geographical coordinates ranging from $109^{\circ}1'17''$ " to $109^{\circ}45'58''$ East and $30^{\circ}29'19''$ to $31^{\circ}22'33''$ North, covering a total area of 4087 km². The region has a subtropical humid monsoon climate with an annual average rainfall of 1,500–2,000 mm. The rainy season occurs from May to September, accounting for 70% of the annual precipitation. The terrain is primarily mountainous and the Yangtze River flows across the region from west to east. Geological hazards, such as landslides, debris flows, and collapses, are widely distributed in Fengjie County, with rainfall landslides posing the most significant threat. Based on the 7m DEM of Fengjie (Figure 5a), the MIA-HSU method was employed to extract the slope units, resulting in the identification of 17,547 HSUs (Figures 5 b and c). Histograms of the slope gradient and area distribution of the HSUs are presented in Figure 5d-e. As shown in Figure 5d, the slope gradients of the HSUs follow a normal distribution, with 85.4% of the slopes falling within the range of 10° to 30° . Figure 5e illustrates that the average area of the HSUs is 0.23 km², with 53.9% of the slope units having an area less than 0.25 km². Because the sliding depth of shallow landslides typically ranges from 2 m

1 to 3 m, the majority of HSUs can be classified as small-to medium-scale landslides (with volumes
 2 under 500,000 m³).

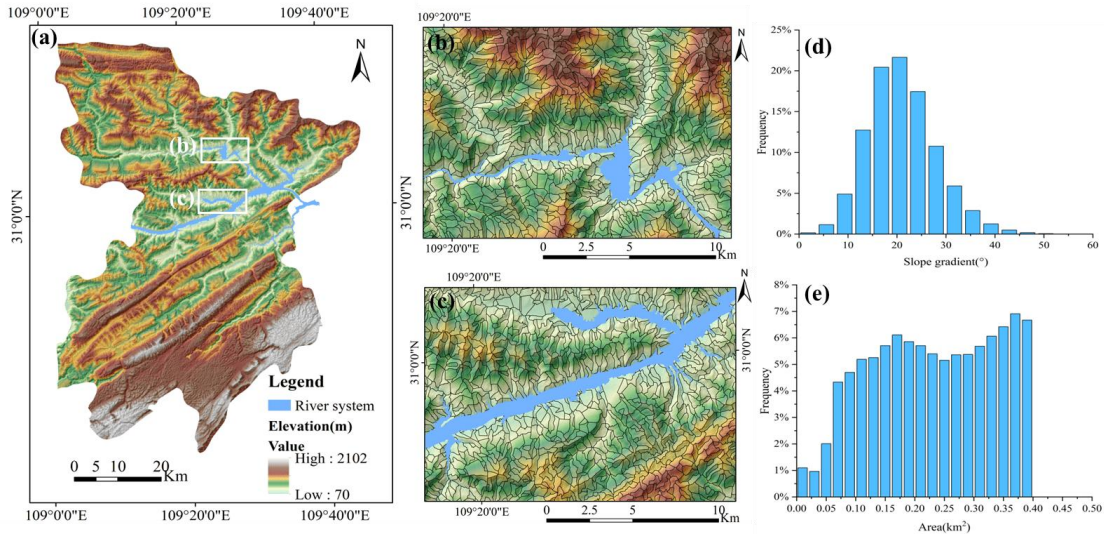


3
 4 Figure 5 Division of HSUs in Fengjie County a. Fengjie DEM; b and c. Extraction results for selected regions:
 5 Enlarged View; d. Histogram of slope distribution of HSUs; e. Histogram of area distribution of HSUs.

6 3.2 Soil mechanical parameter c (kPa) and ϕ ($^{\circ}$) data of HSUs

7 The rainfall-triggered shallow landslides within the study area are mainly composed of
 8 quaternary clay and silt, which are classified as fine-grained soils(Wang et al., 2021; Wang et al.,
 9 2023). Field investigations indicate that the sliding soil is fully or even oversaturated, with some
 10 soil mass transitioning into mudflow during the sliding process. The laboratory moisture content
 11 tests revealed that the soil water content under these conditions approached or exceeded the liquid
 12 limit. To obtain detailed soil mechanical parameters under different moisture states, we conducted
 13 extensive field sampling across Fengjie County, resulting in 312 sampling points, as depicted in
 14 Figure 6f. For each sampling point, direct laboratory shear tests were performed to derive the soil
 15 mechanical parameters c (kPa) and ϕ ($^{\circ}$) at the liquid and plastic limits, respectively. Based on
 16 geological survey data provided by the Fengjie County Land Bureau, the dry density of soil within
 17 a 10-meter thickness ranges from 1.7 to 1.8 g/cm³(Wang et al.,2021). Therefore, the dry density of
 18 each soil samples is randomly selected within this range. In accordance with the ASTM-d6528
 19 (ASTM, 2017) standard, 312 groups of liquid-plastic limit tests and 624 groups of undrained
 20 direct shear tests were performed to obtain the mechanical parameters of each sample at both the
 21 liquid and plastic limit water contents. Subsequently, ArcGIS spatial analysis tools were utilized to
 22 generate distribution maps of c (kPa) and ϕ ($^{\circ}$) under plastic and liquid limit moisture conditions,

1 as shown in Figures 6g-j.

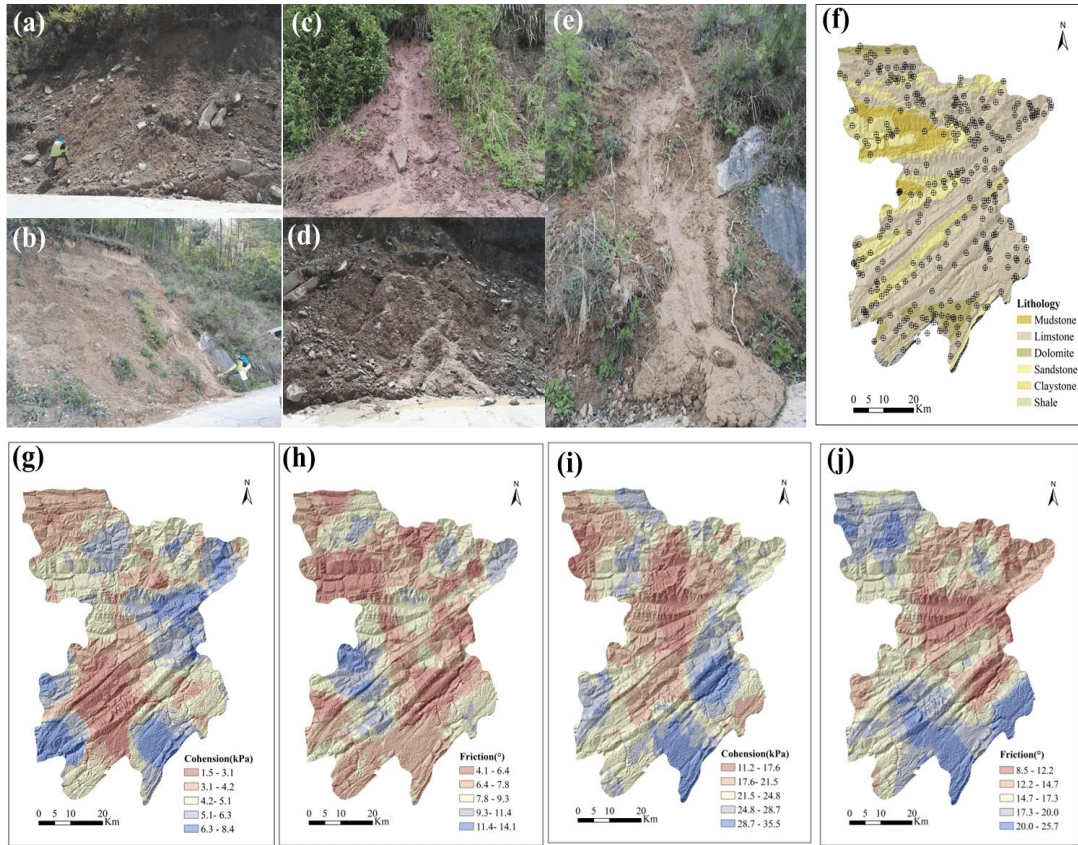

2
3 Figure 6 State of Landslide Soil Before and After Rainfall (a. Soil approaching plastic limit moisture content
4 before rainfall; b. Soil approaching plastic limit moisture content before rainfall; c. Soil in a fluid state after
5 rainfall; d. Soil in a fluid state after rainfall; e. Fully saturated and liquefied soil after rainfall; f. Soil sampling
6 locations; g. c (kPa) at plastic limit moisture content; h. ϕ ($^{\circ}$) at plastic limit moisture content; i. c (kPa) at liquid
7 limit moisture content; j. ϕ ($^{\circ}$) at liquid limit moisture content.)

8 3.3 Rainfall data

9 Rainfall data sources include Quantitative Precipitation Forecasting (QPF) products and
10 Quantitative Precipitation Estimation (QPE) products. The QPF product obtained from the local
11 government of Fengjie County is typically utilized to forecast future rainfall at a regional scale,
12 which can provide rainfall forecast products for the next hour. QPE data are applied to estimate
13 historical regional rainfall at a regional scale and are essential for determining the antecedent
14 effective rainfall (AER), which can be computed as follows:


$$15 \quad AER = \sum_{i=1}^n a^n R_i \quad (12)$$

16 Where AER is the antecedent effective rainfall, a is the attenuation coefficient, which is equal
17 to 0.84, based on the research of the Fengjie count (Wang et al., 2021), n is the number of days

1 before the landslide occurs.


2 **4 Case study: Rainfall-induced landslides of 31 August, 2014**

3 From August 30–31, 2014, Fengjie experienced continuous heavy rainfall, triggering a
4 series of landslide hazards that resulted in over 30 fatalities and an economic loss of 580 million
5 yuan. Based on the daily QPE data for August 15-31, the effective precipitation for the 15 days
6 prior to the landslide hazards is shown in Figure 7. As illustrated in Figure 7, the maximum
7 precipitation during this period was 179.10 mm, which occurred in the northwestern region of the
8 area. The hourly QPF data for August 31 are presented in Figure 8 *a-l*. As illustrated in Figure 8
9 *a-d*, the rainfall was minimal from 00:00 to 08:00, with a maximum cumulative rainfall of 12.2
10 mm 08:00. As shown in Figures 8e-g, rainfall began to increase rapidly at 10:00, reaching a
11 maximum cumulative precipitation of 92.40 mm by 14:00 in the northwestern region of Fengjie
12 County. Figures 8 h-l indicate that from 16:00 to 24:00, the cumulative rainfall remained constant,
13 suggesting that the rainfall process had ceased.

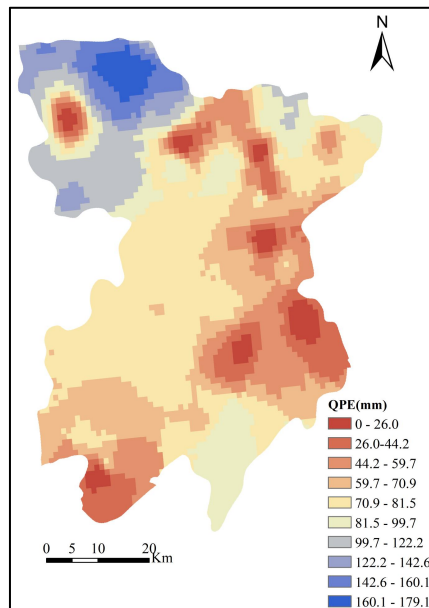

14

15 Figure 7 Precipitation Data Processing (Effective Precipitation from August 15 to August 30, 2014)

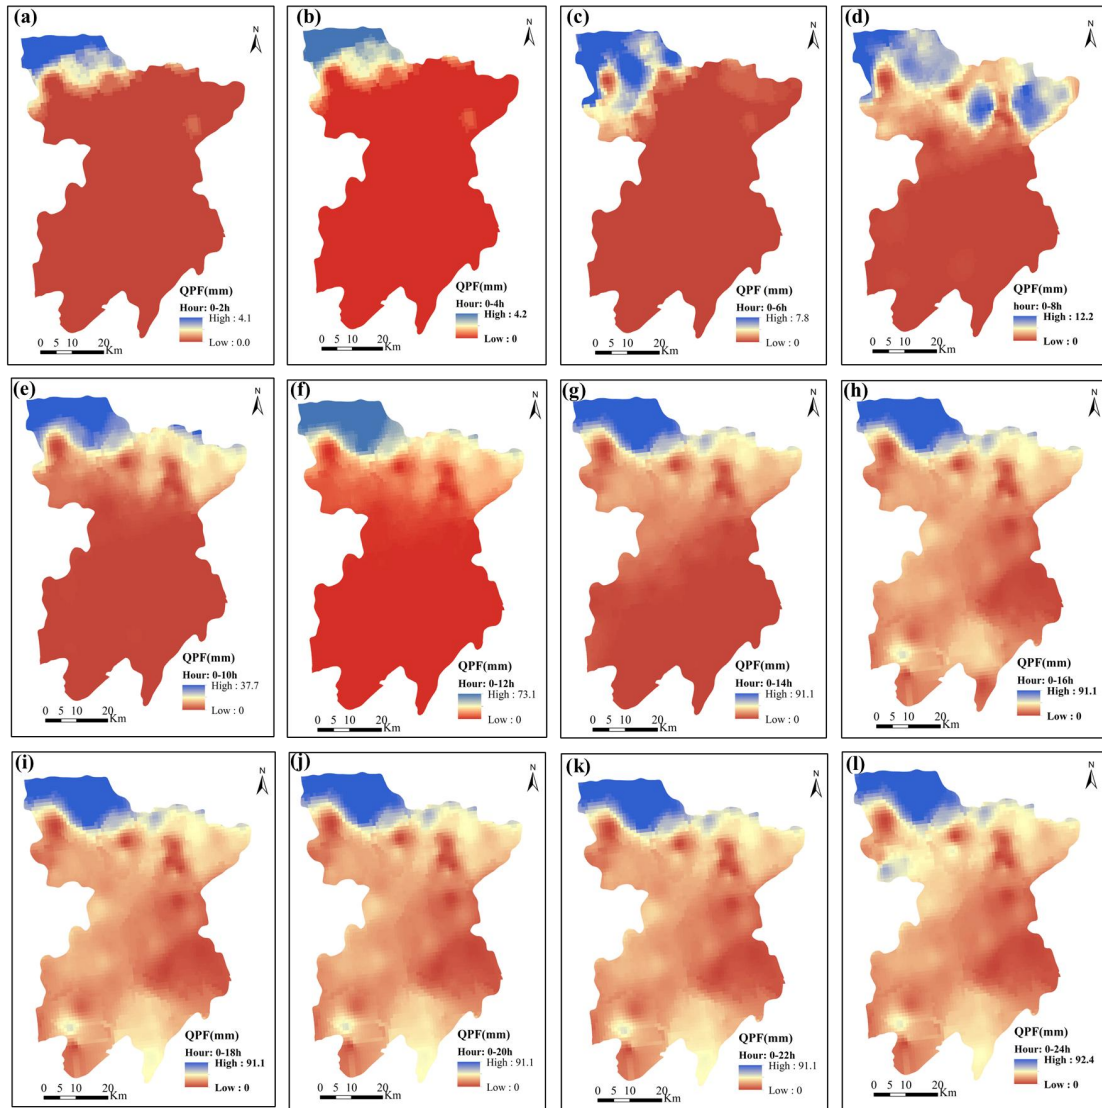


1
 2 Figure 8 Radar forecast precipitation data for 2014/08/31 (a. 2:00; b. 4:00; c. 6:00; d. 8:00; e. 10:00; f. 12:00; g.
 3 14:00; h. 16:00; i. 18:00; j. 20:00; k. 22:00; l. 24:00)

4 The Land and Resources Bureau of Fengjie County provided data on landslide points
 5 triggered by rainfall on August 31. This heavy precipitation triggered 583 landslides, which were
 6 mainly distributed in the northwestern region (as indicated by the red and green solid points in
 7 Figure 9). This study utilized the QPE (Figure 7) and QPF data (Figures 8 a-l) as inputs to forecast
 8 landslide hazards for August 31.

9 The landslide forecast results from 02:00 to 24:00 are shown in Figures 9(a-l). It can be seen
 10 from Figures 8 and 9 that there is a good correlation between the spatial distribution of unstable
 11 HSUs and rainfall characteristics. As presented in Figures 9a-d, at the beginning of the rainfall
 12 process (before 8:00), the majority of the HSUs remained stable owing to the minimal rainfall.
 13 Unstable HSUs began to emerge in the northwestern region starting at 10:00, coinciding with the

1 rapid increase in rainfall. Additionally, as the rainfall progressed, the number of unstable HSUs
 2 increased swiftly and spread towards the central and southern regions (Figures 9f-g). Notably,
 3 many unstable slope units appeared within several hours after heavy rainfall ceased. Figures 9h-l
 4 reveal that from 16:00 to 24:00, although the heavy rainfall essentially ended, the number of
 5 unstable HSUs continued to rise because of the moisture infiltration of the saturated top soil,
 6 reaching a total of 3,987 at 24:00.

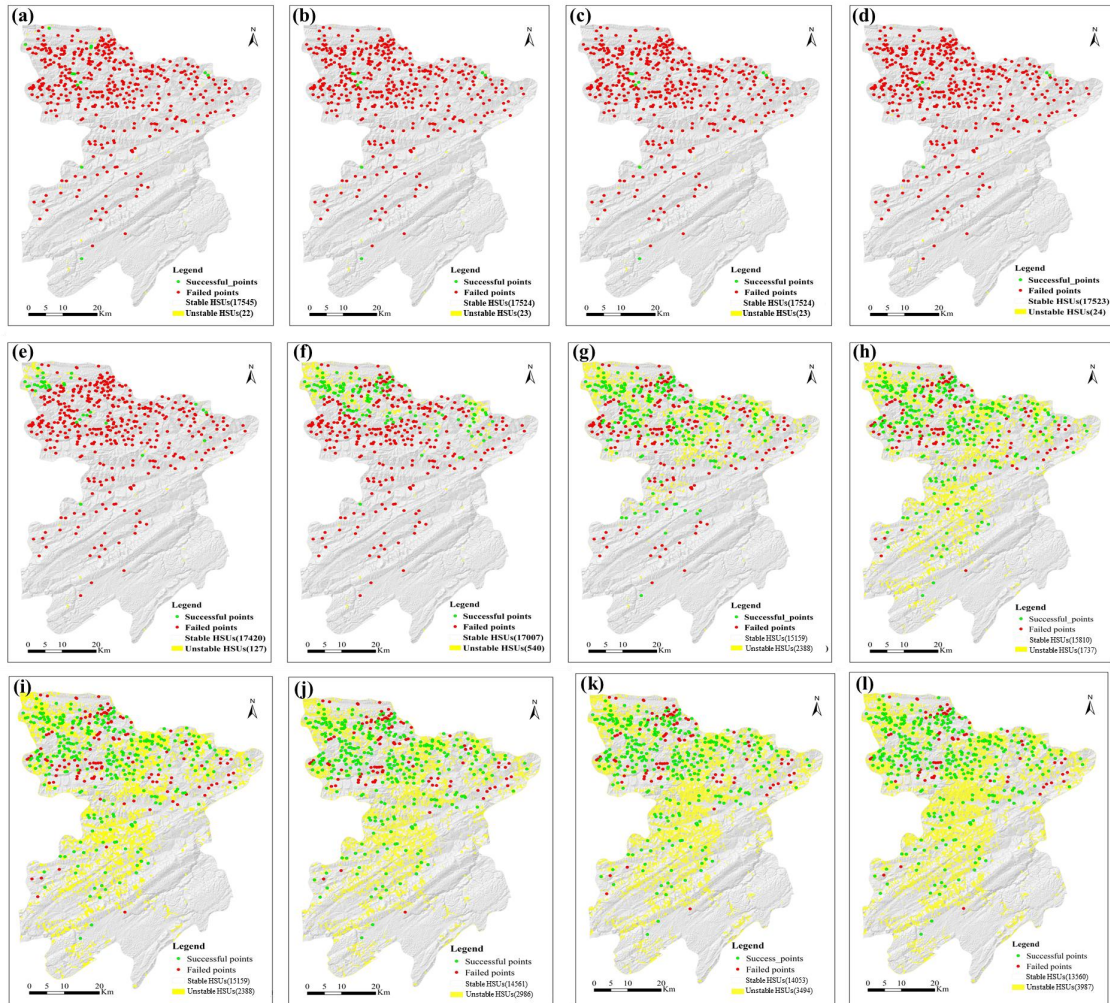

7

8 Figure 9 Prediction results at 02:00 to 24:00 (a. 2:00; b. 4:00; c. 6:00; d. 8:00; e. 10:00; f. 12:00; g. 14:00; h. 16:00;
 9 i. 18:00; j. 20:00; k. 22:00; l. 24:00)

10 This study employs the Receiver Operating Characteristic (ROC) method to analyze the
 11 predictive performance of the HSU(Fawcett, 2006). For physically model-based slope units, the
 12 ROC method describes the following four possible states using a contingency table:

- 13 ① True Positive (TP): HSU contain landslide points and exhibit instability;
 14 ② True Negative (TN): HSU does not contain landslide points and does not exhibit instability;

③ False Positive (FP): HSU does not contain landslide points but exhibits instability;

④ False Negative (FN): HSU contains landslide points but does not exhibit instability.

According to GIS spatial statistics, 583 landslides triggered by rainfall on August 31 were contained within 425 HSUs. In this study, these HSUs are taken as benchmark values for the calculation of TP, TN, FP, and FN, and the missing alarm rate (MAR) and false alarm rate (FPR) can be calculated as follows:

$$\text{MAR} = 100\% \times \text{FN} / 425 \quad (13)$$

$$\text{FPR} = 100\% \times \text{FP} / (\text{FP} + \text{TN}) \quad (14)$$

The detailed forecast results for -02-24h are shown in Table 1. As shown in columns 7-8 of Table 1, with increasing rainfall duration, the Missing Alarm Rate (MAR) gradually decreases, while the False Positive Rate (FPR) gradually increases. Taking the result of 24h as an example, the MAR of 24h is 11.8% and the FPR is 21.1%, indicating that the prediction result can satisfy the requirement of early warning practice.

Table 1 Analysis of Forecast Results for the 831 Case Study

Forecasting hour(h)	Unstable HSUs	TP	TN	FP	FN	MAR (%)	FPR (%)
02	22	7	17097	25	418	98.4	0.1
04	23	3	17102	20	422	99.3	0.1
06	23	3	17102	20	422	99.3	0.1
08	24	2	17100	22	423	99.5	0.1
10	127	27	17022	100	398	93.6	0.6
12	540	116	16698	424	309	72.7	2.5
14	1370	231	15983	1139	194	45.6	6.7
16	1737	289	15674	1448	136	32.0	8.5
18	2388	327	15061	2061	98	23.1	12.0
20	2986	354	14490	2632	71	16.7	15.4
22	3494	364	13992	3130	61	14.4	18.3
24	3987	375	13510	3612	50	11.8	21.1

According to the ROC method, the precision and accuracy of the prediction results were calculated as follows:

$$\text{Precision} = \text{TPR} / (\text{TPR} + \text{FPR}) \quad (15)$$

$$\text{Accuracy} = (\text{TP} + \text{TN}) / (\text{TP} + \text{FN} + \text{TN} + \text{FP}) \quad (16)$$

Table 2 provide the calculation results of precision and accuracy at 24h. As shown, the precision of the forecasting results is 80.7%, with an accuracy value of 79.1%, indicating the proposed warning mode has satisfactory comprehensive forecasting performance.

Table 2 Calculation Results of Precision and Accuracy at the 24th Hour

Forecasting hour(h)	Unstable HSUs	TP	TN	FP	FN	Precision(%)	Accuracy(%)
24	3987	375	13510	3612	50	80.7	79.1

5 Discussion

5.1 The discussion on the computational efficiency

For emergency warnings during the rainy season, the swift release of warning information is crucial for local authorities to develop emergency plans and to evacuate residents from landslide-prone areas. Therefore, local governments not only seek satisfactory accuracy in the warning model but also require minimal time. To evaluate the computational efficiency of the proposed model, a standard laptop was utilized to execute the forecast for landslide hazards on August 31. The device specifications and computation times are presented in Table 3. As shown in Table 3, for the regional scale covering several thousand square kilometers, the prediction model can rapidly complete real-time warnings for the next 24 h within 12 min, indicating that its computational efficiency can satisfy the requirements of emergency warning.

Table 3 Analysis of computational efficiency of the prediction model

Area (m ²)	Number of HSU	CPU	System	Equipment name	Memory	Run time
4080	17547	Intel(R) Core i7	Windows 64-bit operating system	ThinkPad P15 Workstation	16G	<12min

5.2 Further analysis of prediction performance

Using the 24-hour prediction results as an example, we randomly selected seven HSUs with false alarms for further analysis (Table 4). Columns 3–5 of Table 4 present the effective antecedent rainfall AER of these HSUs, the AER levels assigned by the database, and the relative errors, respectively. As shown in Column 5, the relative error ranges from 0.7% to 6.3%, indicating that the 20 levels of the AER designed in the database can accurately reflect the effective antecedent rainfall characteristics of the HSUs. The average rainfall intensity, duration, and cumulative rainfall data at 24:00 are shown in Columns 6–8. As seen in Column 6, the cumulative rainfall for the seven HSUs ranges from 12 mm to 29.8 mm, with average rainfall intensities range from 0.5 mm/h to 1.25 mm/h, which can be classified as light to moderate rain type. The instability probability (HSU_{prob}) of these HSUs was calculated to investigate the causes of false positives. As shown in Column 9, among the seven HSUs with false alarms, five had an instability probability


1 of less than 50%, indicating that these HSUs did not experience instability during the rainfall
 2 process. Therefore, we cautiously conclude that although the prediction model exhibits preferable
 3 operational efficiency, it may increase the false-positive rate to some extent.

4 Table 4 The selected HSUs that report false alarms at 24:00

Number of HSUs	Slope gradient (°)	AER assignment			Daily accumulated rainfall (mm)	Duration (h)	Rainfall intensity I (mm/h)	HSU _{prob}
		Actual AER (mm)	AER levels assigned by the database (mm)	Relative error				
6172	19.4	74.6	70	6.2%	24.2	24	1.0	0.88
8561	26.5	70.9	70	1.3%	12.2	24	0.5	0.19
6066	26.7	83.1	80	3.7%	29.8	24	1.25	0.65
8535	25.9	68.6	70	2.0%	10.9	24	0.45	0.18
13108	40.3	74.1	70	5.5%	15.4	24	0.64	0.29
8297	23.4	70.5	70	0.7%	12.0	24	0.5	0.14
12966	38.3	74.7	70	6.3%	14.6	24	0.61	0.25

5 To investigate the potential for reducing the false-alarm rate, we selected four HSUs from
 6 Table 4 for further analysis. Figures 10 a-d presented the I-D curves and cumulative precipitation
 7 distribution histograms for these HSUs.

8 For each HSU, the QPF data from 00:00 to 24:00 were discretized into 12 sets of rainfall
 9 intensity and duration data points at 2-hour intervals (represented by black and red solid dots). The
 10 black solid dots positioned below the I-D curve indicate that the HSU is stable at that moment,
 11 whereas the red solid dots located above the curve signify false alarms at the current forecasting
 12 hour. As shown in Figures 10a-d, the red false alarm points for the four HSUs are all situated very
 13 close to the I-D curve, nearly tangent to it. This proximity suggests that slight spatial adjustments
 14 to these points could alter the forecast results. Another important issue is that some of the black
 15 solid dots correspond to a cumulative rainfall of 0 mm, indicating that the rainfall process had not
 16 yet begun. Therefore, it is necessary to adjust the spatial positions of data points I and D based on
 17 the actual initiation time of the rainfall process, thereby facilitating an in-depth investigation of the
 18 causes of the false alarms.

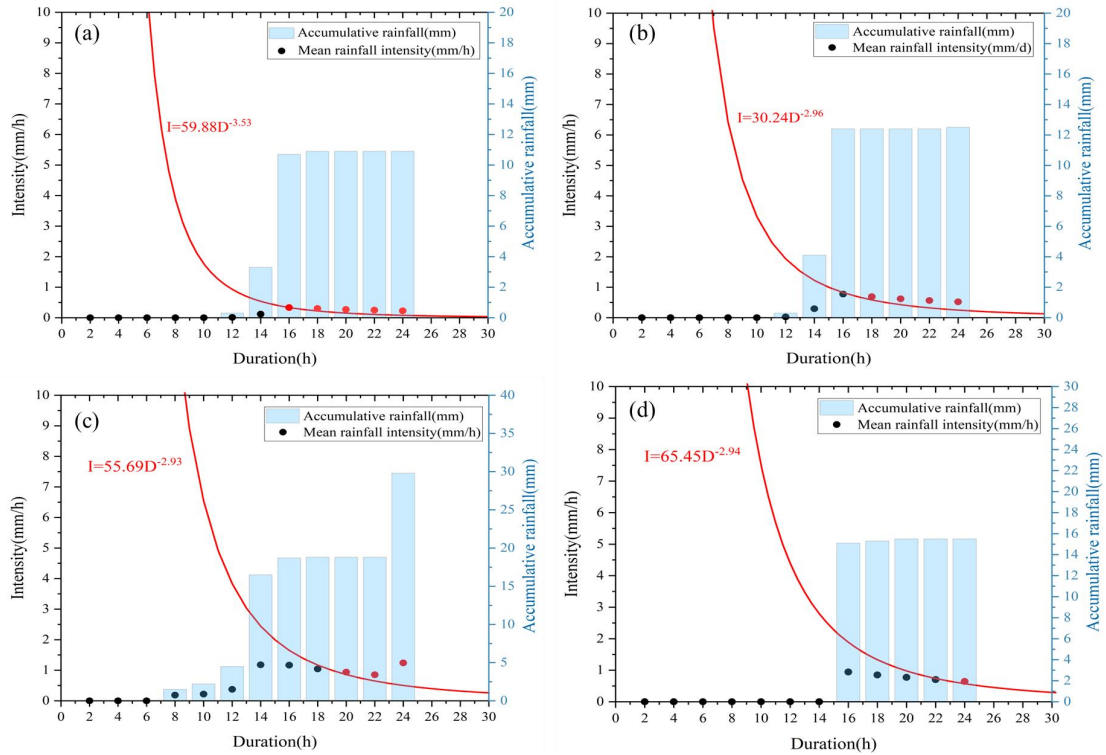

1

2 Figure 10 The I-D Curves of HSUs before the adjustment of rainfall process (a. 8535; b. 8561; c. 6066; d.
3 13108)

4 In this study, an HSU with number 8535 is taken as an example to illustrate the process of
5 adjusting the spatial positions of data points I and D. As shown in Table 5, the rainfall process for
6 this HSU started at 12:00 and ended at 24:00 with a duration of 12 h. The start time of rainfall was
7 used as the starting point to recalculate the rainfall intensity during the rainfall process, as shown
8 in the bold text in Table 5. The adjusted average rainfall intensity was significantly higher than the
9 values prior to adjustment. This means that the adjustment of the rainfall process led to notable
10 changes in the spatial locations of the data points I and D. As shown in Figure 11a, after updating
11 the positions of data points I and D, the HSU does not exhibit any false alarms. Figures 11b-d
12 present the updated forecast results for the other three HSUs after the adjustment. As shown in
13 Figure 11a-d, following the adjustments, three out of these four HSUs were able to release
14 accurate results. Therefore, we advise that practical warning applications should consider the
15 influence of the difference in rainfall processes of HSUs on the prediction results.

16

17

18


1

2

Table 5 Rainfall process adjustment for HSU with number of 8535

Time	2:0 0	4:0 0	6:0 0	8:0 0	10:0 0	12:0 0	14:0 0	16:0 0	18:0 0	20:0 0	22:0 0	24:0 0	
Accumulated rainfall(mm)	0	0	0	0	0	0.3	3.3	10.7	10.9	10.9	10.9	10.9	
Before adjustment	I(mm/h)	0	0	0	0	0	0.2	0.7	0.6	0.5	0.5	0.5	
	D (h)	2	4	6	8	10	12	14	16	18	20	24	
After adjustment	I(mm/h)	/					0	1.6	2.7	1.8	1.3	1.1	0.9
	D (h)	/					0	2	4	6	8	10	12

3

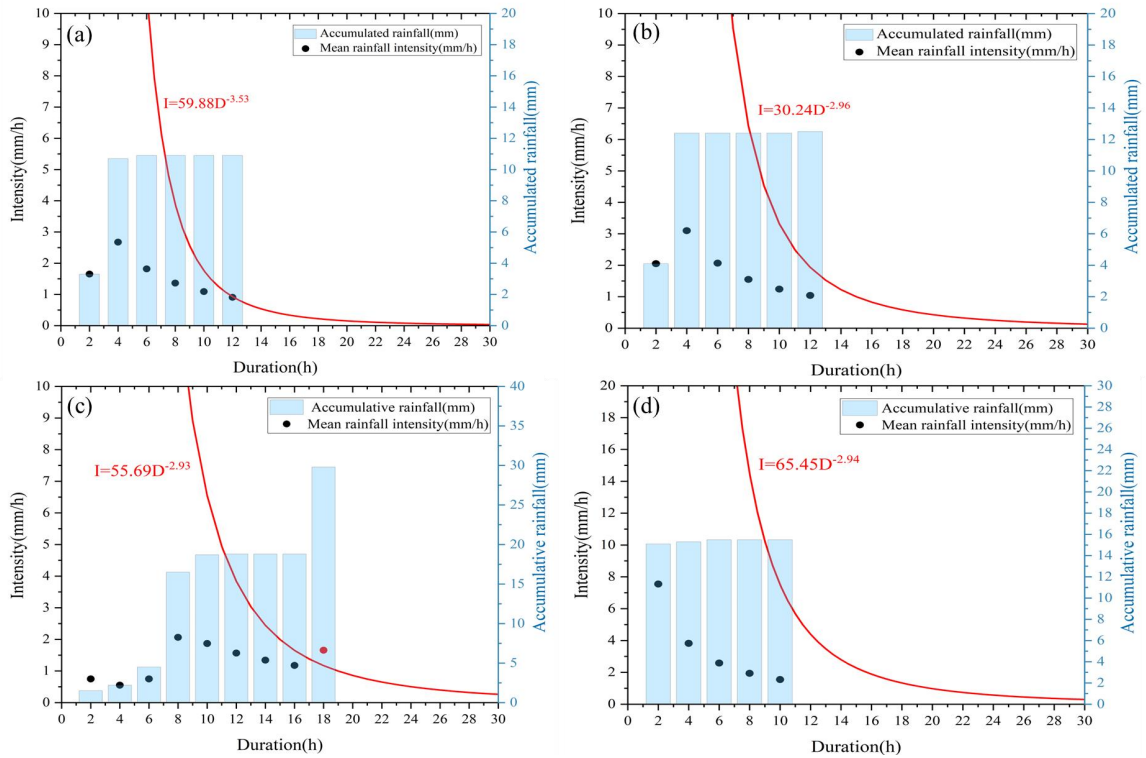

4

5 Figure 11 The I-D Curves of HSUs after the adjustment of rainfall process (a. 8535; b. 8561; c. 6066; d.

6 13108)

7 5.3 Comparison with existing approaches in the Fengjie county

8 Statistical methods have been widely used to establish rainfall thresholds for landslides. Liu

9 (2024) categorized Chongqing into four distinct subregions based on topography, tectonic

10 structures, lithological stratigraphy, and the distribution and characteristics of landslides, and


11 established the rainfall thresholds for landslides in each subregion, as shown in Table 6. Fengjie

1 county belongs to Subregion II, with its rainfall threshold is listed in the second row of Table 6. In
 2 this table, R represents the cumulative daily rainfall, while R_e signifies the antecedent effective
 3 rainfall.

4 Table 6 Equations of the thresholds defined for each subregion (Liu et al., 2024)

Threshold	5%	30%	50%	80%
Subregion I	$R = -1.13R_e + 43$	$R = -1.13R_e + 70$	$R = -1.13R_e + 85$	$R = -1.13R_e + 135$
Subregion II	$R = -0.93R_e + 38$	$R = -0.93R_e + 70$	$R = -0.93R_e + 100$	$R = -0.93R_e + 145$
Subregion III	$R = -0.96R_e + 40$	$R = -0.96R_e + 100$	$R = -0.96R_e + 135$	$R = -0.96R_e + 180$
Subregion IV	$R = -1.15R_e + 41$	$R = -1.15R_e + 76$	$R = -1.15R_e + 98$	$R = -1.15R_e + 140$

5 The prediction results derived from statistical methods are illustrated in Figure 12, with
 6 detailed prediction performance parameters provided in Table 7. As depicted in Figure 12, there
 7 are 5,462 unstable HSUs, primarily located in the northwest and southern mountainous regions.
 8 According to Table 7, 256 landslide events are successfully predicted by Liu's model. However,
 9 the statistical method exhibits a missing alarm rate of 40% and a false alarm rate of 30.4%,
 10 resulting in low overall precision and accuracy. In contrast, the missing and false alarm rate of the
 11 HSU_ID model are 11.8% and 21.1% at the 24th hour (Table 1), thus demonstrating superior
 12 forecasting performance.

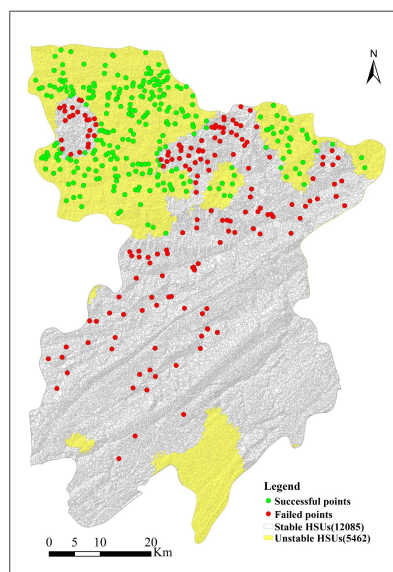

13 Figure 12 Prediction outcomes generated by Liu's model

1

Table 7 Prediction performance parameters of Liu's model

Unstable HSUs	TP	TN	FP	FN	MAR (%)	FPR (%)	Precision(%)	Accuracy(%)
5462	256	11915	5206	170	40.0	30.4	66.4	69.4

2 **5.4 Limitations and future work**

3 The method proposed in this paper reduces dependence on landslide inventory data and
4 avoids the issue of excessive computation time associated with physical models. This offers
5 promising application prospects for emergency early warning in regions of third-world countries
6 where landslide inventory data are scarce. However, it should be noted that the calculation of
7 HSU_{prob} relies on regional-scale mechanical parameters. Therefore, establishing the distribution of
8 mechanical parameters in Southwest China through field sampling, experiments, and spatial
9 analysis is an important task for the future. Another important task lies in optimizing the model
10 algorithm, because the physical mechanisms of rainfall landslides are extremely complex, and the
11 soil-water coupling process under rainfall involves significant nonlinearity (Apip et al., 2010).
12 Some machine learning methods that incorporate physical frameworks are expected to accurately
13 describe this issue (for example the PINN) . Therefore, improving the model algorithm by
14 combining machine learning with physical approaches is another important task for the future.

15 **6 Conclusion**

16 Currently, the operational forecasting of rainfall-induced landslides over regional scales of
17 thousands of square kilometers faces significant challenges. Conventional physical and statistical
18 approaches have shown limitations in terms of achieving satisfactory results. This study utilized
19 HSU as a basis to integrate physical models and rainfall threshold methods for a warning model
20 applicable to large-scale regions. The warning model employs HSU as a prediction unit to
21 improve the clarity of the warning results, physical methods are utilized to develop the warning
22 criteria, thereby reducing the overreliance on historical observational data, and a database of
23 rainfall parameters across different rainfall scenarios is constructed, which enhances the efficiency
24 and applicability of the warning model. The prediction performance was validated through a case
25 study of "8.31" rainfall landslides in Fengjie County. The conclusions are as follows.

26 (1) A rainfall-triggered landslide warning model was established by integrating HSUs,
27 physical approaches, and rainfall parameters. Initially, a grid-based HSU hydrological analysis
28 technique was established to determine the soil moisture content distribution within the HSUs

1 during different rainfall hours. Subsequently, computer graphics algorithms, random search
2 techniques, and infinite slope models were used to develop a regional-scale HSU stability analysis
3 method. Soil mechanics parameters at the limit of water content and probability density functions
4 were used to describe the spatial uncertainty of the soil mechanical parameters within the HSU
5 during rainfall infiltration, allowing for the calculation of the instability probability of the
6 HSU. Different rainfall scenarios were simulated to derive rainfall intensity I and duration D data
7 that can trigger HSU instability, thereby constructing early warning curves for the rainfall
8 thresholds of the HSU.

9 (2) A database for the I-D curve fitting parameters α and β across various AER levels was
10 established. This database includes α and β data for 17,547 HSUs across 20 AER levels,
11 amounting to a total of 350,940 records, thus offering substantial data support for rainfall-induced
12 landslide predictions in Fengjie County. In practical applications, it is sufficient to quickly issue
13 warning information by assessing the relationship between the values of I and αD^β , thereby
14 reducing the time required to calculate the safety factors using conventional physical models. The
15 calculation efficiency test indicates that the warning mode can perform forecasts for thousands of
16 kilometers within a runtime of less than 12 min, thereby meeting the operational needs for
17 real-time warnings over large regional scales.

18 (3) The case study indicates that the distribution trends of unstable HSUs align well with
19 rainfall characteristics. As the rainfall duration increased, the missing alarm rate (MAR) gradually
20 decreased, while the false alarm rate (FAR) continued to increase. Taking the 24-hour forecast
21 results as an example, the missing alarm rate was 11.8%, while the false alarm rate was 21.1%.
22 ROC analysis revealed that the accuracy of the forecast result at this moment was 80.7%, with a
23 precision of 79.1%, reflecting satisfactory overall forecasting performance. Further discussion of
24 the false alarm rate suggests that adjusting the spatial locations of rainfall intensity and duration
25 data points based on the rainfall characteristics of each HSU may be conducive to reducing false
26 alarm rates.

27
28
29
30
31

1 **Acknowledgements**

2 The authors would like to acknowledge the Chongqing Meteorological Bureau, China for
3 providing the QPE and QPF data free of charge. We are also thankful to the Land and Resources
4 Bureau of Fengjie county for their support with the field investigation.

6 **Conflict of Interest Statement**

7 All authors declare that they have no conflicts of interest. We declare that we do not have any
8 commercial or associative interests that represent a conflict of interest in connection with the
9 submitted work.

11 **Author contributions**

12 **KW:** Conceptualization, Writing – original draft, Supervision, Data curation Funding acquisition;
13 **LX:** Supervision, Visualization, Writing – original draft; **SX:** Investigation, Data curation,
14 Validation; **SZ:** Methodology, Resources, Validation; **YJ:** Supervision, Validation, Software; **JZ:**
15 Investigation, Software; **HG:** Investigation, Visualization; **LZ:** Project administration,
16 Visualization; **ZW:** Project administration, Writing – review & editing; **FQ:** Writing – review &
17 editing.

19 **Disclosure statement**

20 No potential conflict of interest was reported by the author(s).

22 **Funding**

23 This work was supported by the [National Natural Science Foundation of China] under Grant
24 [42301083]; and the Training Program for Young Backbone Teachers in Higher Education
25 Institutions of Henan Province[2025GGJS094]; and [General Project of Henan Province
26 Education Science Planning, China] under Grant [2025YB0116].

28 **Data availability statement**

29 The datasets supporting this study are available from the corresponding author upon reasonable
30 request.

33 **Reference**

34 Alvioli, M., Guzzetti, F., Marchesini, I.: Parameter-free delineation of slope units and terrain su-
35 bdivision of Italy, *Geomorphology*, 358, 107124, [https://doi.org/10.1016/j.geomorph.2020.](https://doi.org/10.1016/j.geomorph.2020.107124)
36 107124, 2020.

37 Aristizábal, E., Vélez, J. I., Martínez, H.E., Jaboyedoff, M.: SHIA_Landslide: a distributed conc-
38 ceptual and physically based model to forecast the temporal and spatial occurrence of s-
39 hallow landslides triggered by rainfall in tropical and mountainous basins, *Landslides*,
40 13(3), 497-517, <https://doi.org/10.1007/s10346-015-0580-7>, 2016.

41 ASTM D6528-17.: Standard test method for consolidated undrained direct simple shear testing
42 of fine grain soils, ASTM International: West Conshohocken, PA, USA, <https://www.astm.org/d6528-17.html>, 2017

44 Apip., Takara, K., Yamashiki, Y., Sassa, K., Bagiawan, I.A., Fukuoka, H.: A distributed

1 hydrological-geotechnical model using satellite-derived rainfall estimates for shallow landslide
2 prediction system at a catchment scale, *Landslides*, 7: 237–258,
3 <https://doi.org/10.1007/s10346-010-0214-z>, 2010.

4 Baum, R. L., Savage, W. Z., Godt, J.: TRIGRS—a Fortran program for transient rainfall infiltra-
5 tion and grid-based regional slope-stability analysis, US Geological Survey Open File
6 Report 2008-1159, 2, <https://doi.org/10.3133/ofr20081159>, 2008

7 Bezak, N., Šraj, M., Matjaž, M.: Copula-based IDF curves and empirical rainfall thresholds for
8 flash floods and rainfall-induced landslides, *J. Hydrol.*, 541, 272-284, <https://doi.org/10.1016/j.jhydrol.2016.02.058>, 2016.

9 Bogaard, T., Greco, R.: Invited perspectives: Hydrological perspectives on precipitation intensity
10 -duration thresholds for landslide initiation: proposing hydro-meteorological thresholds,
11 *Nat. Hazards Earth Syst. Sci.*, 18, 31-39, <https://doi.org/10.5194/nhess-18-31-2018>, 2018.

12 Brunetti, M., Peruccacci, S., Rossi, M., S, L., Valigi, D., & Guzzetti, F.: Rainfall thresholds fo
13 r the possible occurrence of landslides in Italy, *Nat. Hazards Earth Syst. Sci.*, 10, <https://doi.org/10.5194/nhess-10-447-2010>, 2010.

14 Cuomo, S., Di Perna, A., Martinelli, M.: Modelling the spatio-temporal evolution of a rainfall-i
15 nduced retrogressive landslide in an unsaturated slope, *Eng. Geol.*, 294, 106371, <https://doi.org/10.1016/j.enggeo.2021.106371>, 2021.

16 Domènech, G., Alvioli, M., Corominas, J.: Preparing first-time slope failures hazard maps: from
17 pixel-based to slope unit-based, *Landslides*, 17, 249-265, <https://doi.org/10.1007/s10346-019-01279-4>, 2019.

18 Fawcett, T.: Introduction to ROC analysis, *Pattern. Recogn. Lett.*, 27, 861-874, <https://doi.org/10.1016/j.patrec.2005.10.010>, 2006.

19 Greco, V.: Efficient Monte Carlo Technique for Locating Critical Slip Surface, *J. Geotech. Eng.*,
20 122, 517-525, [https://doi.org/10.1061/\(ASCE\)0733-9410\(1996\)122:7\(517\)](https://doi.org/10.1061/(ASCE)0733-9410(1996)122:7(517)), 1996.

21 Gu, T., Wang, J., Fu, X., Liu, Y.: GIS and limit equilibrium in the assessment of regional slop
22 e stability and mapping of landslide susceptibility, *B. Eng. Geol. Environ.*, 74, 1-11. <https://doi.org/10.1007/s10064-014-0689-2>, 2014.

23 Guo, Z., Torra, O., Hürliemann, M., Abancó, C., Medina, V.: FSLAM: A QGIS plugin for fast
24 regional susceptibility assessment of rainfall-induced landslides, *Environ. Modell. Softw.*,
25 150, 105354, <https://doi.org/10.1016/j.envsoft.2022.105354>, 2022.

26 He, X., Hong, Y., Vergara, H., Kirstetter, P. E., Gourley, J., Zhang, Y., Qiao, G., and Liu, C.:
27 Development of a Coupled Hydrological-geotechnical Framework for Rainfall-induced L
28 andslides Prediction, *J. Hydrol.*, 543, <https://doi.org/10.1016/j.jhydrol.2016.10.016>, 2016.

29 Hong, M., Kim, J., Jeong, S.: Rainfall intensity-duration thresholds for landslide prediction in
30 South Korea by considering the effects of antecedent rainfall, *Landslides*, 15. <https://doi.org/10.1007/s10346-017-0892-x>, 2017.

31 Hong, Y., Hiura, H., Shino, K., Sassa, K., Suemine, A., Fukuoka, H., Wang, G.: The influence
32 of intense rainfall on the activity of large-scale crystalline schist landslides in Shikok
33 u Island, Japan, *Landslides*, 2, 97-105, <https://doi.org/10.1007/s10346-004-0043-z>, 2005.

34 Huang, F., Tao, S., Chang, Z., Huang, J., Fan, X., Jiang, S.H., Li, W.: Efficient and automatic
35 extraction of slope units based on multi-scale segmentation method for landslide asses
36 sments, *Landslides*, 18, <https://doi.org/10.1007/s10346-021-01756-9>, 2021.

37 Kanungo, D., Sharma, S. 2014.: Rainfall thresholds for prediction of shallow landslides around

1 Chamoli-Joshimath region, Garhwal Himalayas, India, *Landslides*, 11, 629-638. <https://doi.org/10.1007/s10346-013-0438-9>, 2014.

2

3 Kim, S., Chun, K., Kim, M., Catani, F., Choi, B., & Seo, J. I.: Effect of antecedent rainfall c
4 onditions and their variations on shallow landslide-triggering rainfall thresholds in Sout
5 h Korea, *Landslides*, 18. <https://doi.org/10.1007/s10346-020-01505-4>, 2020.

6 Liang, W.L., Uchida, T.: Performance and topographic preferences of dynamic and steady mode
7 ls for shallow landslide prediction in a small catchment, *Landslides*, 19, <https://doi.org/10.1007/s10346-021-01771-w>, 2021.

8

9 Li, D., Wang, Z., Guo, H., Zhang, Y., Cheng, X., Yu, Q.: Deep Learning in Slope Stability A
10 nalysis: Evolution, Challenges, and Future Directions, *Geotech. Geol. Eng.*, 43(8), 1-48,
11 <https://doi.org/10.1007/s10706-025-03424-4>, 2025.

12 Liu SH, Du J, Yin KL, Zhou C, Huang CC, Jiang J, Yu J.: Regional early warning model for
13 rainfall induced landslide based on slope unit in Chongqing, China, *Eng. Geol.*, 333:
14 107464, 2024.

15 Ma, T., Changjiang, L., Lu, Z., Bao, Q.: Rainfall intensity–duration thresholds for the initiation
16 of landslides in Zhejiang Province, China, *Geomorphology*, 245, <https://doi.org/10.1016/j.geomorph.2015.05.016>, 2015.

17

18 Marra, F.: Rainfall thresholds for landslide occurrence: systematic underestimation using coarse
19 temporal resolution data, *Nat. Hazards.*, 95, <https://doi.org/10.1007/s11069-018-3508-4>, 2
20 018.

21 Medina, V., Hürlimann, M., Guo, Z., Lloret, A., Vaunat, J.: Fast physically-based model for rai
22 nfall-induced landslide susceptibility assessment at regional scale, *Catena*, 201, 105213,
23 <https://doi.org/10.1016/j.catena.2021.105213>, 2021.

24 Montgomery, D., Dietrich, W. :A Physically Based Model for the Topographic Control on Shall
25 ow Landsliding, *Water. Resour. Res.*, 30, 1153-1172, <https://doi.org/10.1029/93WR02979>,
26 1994.

27 Montrasio, L., Valentino, R.: Modelling Rainfall-induced Shallow Landslides at Different Scales
28 Using SLIP - Part I, *Procedia Engineering*, 158, 476-481, <https://doi.org/10.1016/j.proeng.2016.08.475>, 2016.

29

30 Moeineddin, A., Seguí, C., Dueber, S., Fuentes, R.: Physics-informed neural networks applied t
31 o catastrophic creeping landslides, *Landslides*, 20(9), 1853-1863, <https://doi.org/10.1007/s10346-023-02072-0>, 2023.

32

33 Pinho, T., & Augusto Filho, O.: Landslide susceptibility mapping using the infinite slope, SHA
34 LSTAB, SINMAP, and TRIGRS models in Serra do Mar, Brazil. *J. MT. SCI-ENGL.*,
35 19, 1018-1036, <https://doi.org/10.1007/s11629-021-7057-z>, 2022.

36 Pradhan, A., Lee, S.R., Kim, Y.T.: A shallow slide prediction model combining rainfall thresh
37 old warnings and shallow slide susceptibility in Busan, Korea, *Landslides*, 16: 6. 47-65
38 9, <https://doi.org/10.1007/s10346-018-1112-z>, 2018.

39 Rigon, R., Bertoldi, G., Over, T.: GEOTop: A Distributed Hydrological Model with Coupled Wa
40 ter and Energy Budgets, *J. Hydrometeorol.*, 7(3):371-388, <https://doi.org/10.1175/JHM497.1>, 2006.

41

42 Rosi, A., Segoni, S., Canavesi, V., Monni, A., Gallucci, A., and Casagli, N.: Definition of 3D
43 rainfall thresholds to increase operative landslide early warning system performances, *L
44 andslides*, 18, <https://doi.org/10.1007/s10346-020-01523-2>, 2020.

1 Rossi, G., Catani, F., Leoni, L., Segoni, S., and Tofani, V.: HIRESSS: a physically based slope
2 stability simulator for HPC applications, *Nat. Hazards Earth Syst. Sci.*, 13(1), 151-166.
3 <https://doi.org/10.5194/nhess-13-151-2013>, 2013.

4 Tarboton, David and Goodwin, C.: The SINMAP approach to terrain stability mapping, *Proceedings of the 8th congress of the international association of engineering geology*, Vancouver, British Columbia, Canada, 21-25, 1998.

7 Tufano, R., Formetta, G., Calcaterra, D., De Vita, P.: Hydrological control of soil thickness spatial variability on the initiation of rainfall-induced shallow landslides using a three-dimensional model, *Landslides*, 18, <https://doi.org/10.1007/s10346-021-01681-x>, 2021.

10 Turel, M., Frost, J.: Delineation of Slope Profiles from Digital Elevation Models for Landslide
11 Hazard Analysis *Geo-Risk 2011: Risk Assessment and Management*, [https://doi.org/10.1061/41183\(418\)87,2011](https://doi.org/10.1061/41183(418)87,2011).

13 Van Genuchten, M.: A Closed-form Equation for Predicting the Hydraulic Conductivity of Unsaturated Soils1. *Soil Science Society of America Journal*, 44, <https://doi.org/10.2136/sssaj1980.03615995004400050002x>, 1980.

16 Wang, K., Xie, S., Zhang, S., Zhu, L., Ma, J., Liu, D., Yang, H.: Creating a big data source
17 of landslide deformation stages: New thoughts on identifying displacement warning thresholds, *J. Asian. Earth. Sci.*, 266, 106120, <https://doi.org/10.1016/j.jseae.2024.106120,2024>.

20 Wang, K., Zhang, S.: Rainfall-induced landslides assessment in the Fengjie County, Three-Gorge reservoir area, China, *Nat. Hazards.*, 108, 1-28. <https://doi.org/10.1007/s11069-021-04691-z>, 2021.

23 Wang, K., Xie, S., Xie, L., Zhang, S., Zhu, L., Qi, F., Luo, H., and Zhao, X.: Research on the
24 Impact of Regional-Scale Soil Mechanics Parameter Disturbances on Rainfall Landslides Warning, *Geosciences*, 15, 449, <https://doi.org/10.3390/geosciences15120449>, 2025.

26 Wang, K., Zhang, S., Xie, W.L., Guan, H.: Prediction of the instability probability for rainfall induced landslides: the effect of morphological differences in geomorphology within mapping units, *J. mt. Sci-Engl.*, 20, 1249-1265. <https://doi.org/10.1007/s11629-022-7789-4,2023>.

30 Wang, X., Zhang, L., Wang, S., Lari, S.: Regional landslide susceptibility zoning with considering the aggregation of landslide points and the weights of factors. *Landslides*, 11. <https://doi.org/10.1007/s10346-013-0392-6>, 2013.

33 Yan, G., Cheng, H., Jiang, Z., Teng, L., Tang, M., Shi, T., Jiang, Y., Yang, G., Zhou, Q.: Recognition of Fluvial Bank Erosion Along the Main Stream of the Yangtze River. *Engineering*, 19, <https://doi.org/10.1016/j.eng.2021.03.027>, 2021.

36 Zhang, L.Y., Zhang, J.M.: Extended algorithm using Monte Carlo techniques for searching general critical slip surface in slope stability analysis, *Chinese Journal of Geotechnical Engineering*, 2006, 28(7): 857-862, <https://www.cgejournal.com/en/article/id/12113>, 2006. (In Chinese)

40 Zhang, S., Ma, Z., Li, Y., Hu, K., Zhang, Q., Li, L.: A grid-based physical model to analyze the stability of slope unit, *Geomorphology*, 391, 107887, <https://doi.org/10.1016/j.geomorph.2021.107887>, 2021.

43 Zhang, S., Xu, C. X., Wei, F., Hu, K., Xu, H., Zhao, L. Q., Zhang, G. P.: A physics-based model to derive rainfall intensity-duration threshold for debris flow, *Geomorphology*, 351,

1 106930, <https://doi.org/10.1016/j.geomorph.2019.106930>, 2019.

2 Zhang, S., Zhao, L., Delgado Tellez, R., Bao, H.: A physics-based probabilistic forecasting mo
3 del for rainfall-induced shallow landslides at regional scale, *Nat. Hazards Earth Syst. S*
4 *ci.*, 18, 969-982, <https://doi.org/10.5194/nhess-18-969-2018>, 2018.

5 Zhuang, J., Iqbal, J., Jianbing, P., Tieming, L.: Probability Prediction Model for Landslide Occur
6 rences in Xi'an, Shaanxi Province, China, *J. Mt Sci-Engl.*, 11, 345-359, [https://doi.org/](https://doi.org/10.1007/s11629-013-2809-z)
7 [10.1007/s11629-013-2809-z](https://doi.org/10.1007/s11629-013-2809-z), 2014.

8 Zhuang, J., Peng, J., Xu, Y., Xu, Q., Zhu, X., Li, W. E. I.: Assessment and mapping of slope
9 stability based on slope units: A case study in Yan'an, China, *J. Earth. Syst. Sci.*, 12
10 5, <https://doi.org/10.1007/s12040-016-0741-7>, 2016.