

# Influence of groundwater recharge projections on climate-driven subsurface warming: insights from numerical modeling

Mikhail Tsy-pin<sup>1,2</sup>, Viet Dung Nguyen<sup>1</sup>, Mauro Cacace<sup>1</sup>, Guido Blöcher<sup>1,2</sup>, Magdalena Scheck-Wenderoth<sup>1,2</sup>, Elco Luijendijk<sup>3</sup>, Charlotte Krawczyk<sup>1,2</sup>

<sup>1</sup> GFZ Helmholtz Centre for Geosciences, Potsdam, 14467, Germany

<sup>2</sup> [Institute of Applied Geosciences](#), Technische Universität Berlin, Berlin, 10623, Germany

<sup>3</sup> University of Bergen, Bergen, 5007, Norway

Correspondence to: Mikhail Tsy-pin ([tsy-pin@gfz.de](mailto:tsy-pin@gfz.de))

**Abstract.** Groundwater warming due to rising surface temperatures has been documented in both urban and natural settings. However, the potential for long-term changes in the magnitude and seasonality of groundwater recharge to modulate this warming trend has not yet been systematically investigated. In this study, we integrate a stochastic weather generator, distributed hydrologic modeling, and regional thermo-hydraulic groundwater modeling into a unified workflow and apply it to the area of Brandenburg (northeastern Germany). We conduct numerical simulations to assess changes in the subsurface thermal field between present day and 2100, evaluating two climate change scenarios, and incorporate a spectrum of ensemble-based and discrete recharge projections. Our results demonstrate that, while surface temperature rise is the primary driver of the projected groundwater warming of up to 2.5 °C, groundwater flow is responsible for its regional variability in magnitude and affected depths. Higher hydraulic gradients on topographic highs and increased thickness of the permeable Quaternary unit may allow the warming signal to propagate below 200 m depth, whereas groundwater discharge in the river valleys tends to limit it to <200 m. By the late century, the difference in groundwater temperatures between recharge-reduction and recharge-increase scenarios can reach 0.4 °C. Under the high-emissions pathway, a 20 % recharge reduction, from a mean of 75 to 60 mm a<sup>-1</sup>, causes a 2–5 m water level decline, reducing the area of unconfined aquifer subjected to seasonal temperature fluctuations. Model experiments show that even a hypothetical increase in winter recharge does not suffice to counteract the groundwater warming induced by rising surface temperatures. Changes in advection rates are not expected to affect the net climate-driven accumulated heat in the subsurface due to counterbalancing of heat gains and losses between recharge and discharge areas. Nevertheless, long-term reconfiguration of the potentiometric surface may further impact both the annual and long-term thermal state of key aquifers targeted for water supply and shallow geothermal energy utilization.

## 1 Introduction

The ongoing climate change modifies components of the Earth's water and energy balance, thereby affecting the hydraulic, thermal, chemical, and biological states of groundwater systems (Taylor et al., 2013; Riedel, 2019). In line with other climate change impact assessment studies (Seneviratne et al., 2010; Gosling et al., 2011), predictive modeling of these groundwater states requires a consistent set of climate scenarios, ideally based on ensembles of general circulation models (GCMs) and CO<sub>2</sub> emission pathways. Among GCM outputs, temperature and precipitation are considered key variables controlling surface-groundwater fluxes, such as infiltration, evapotranspiration, and recharge (Moeck et al., 2016; Rossman et al., 2014).

On global and regional scales, groundwater availability for human consumption and irrigation strongly depends on recharge rates (Cuthbert et al., 2019; Reinecke et al., 2021). A prediction of future groundwater levels (GWLs) using analytical, numerical, and machine learning tools has been widely explored across various timescales, being increasingly adopted by water management authorities for planning purposes (Scibek and Allen, 2006; Dams et al., 2012; Goderniaux et al., 2011; Seidenfaden et al., 2022; Wunsch et al., 2022). A major uncertainty though still exists in future recharge estimates, as there is a lack of consistency across models concerning both the magnitude and sign of recharge trends (Smerdon et al., 2017). This stems largely from uncertainty in intensity and distribution of precipitation rather than potential evapotranspiration (PET) due to the dependence of the former on circulation patterns and higher spatiotemporal variability (Reinecke et al., 2021; Berghuijs et al., 2024). Recharge estimates are therefore sensitive to the choice of GCM, a Shared Socioeconomic Pathway (SSP), the downscaling approach, and hydrologic model parameters (Kurylyk et al., 2015).

More recently, the thermal response of aquifers to climate change came into the spotlight, following reports of groundwater warming in urban centers (Menberg et al., 2013; Tissen et al., 2019) and due to the growing utilization of shallow geothermal energy (Hemmerle et al., 2022). Implications of a sustained increase in groundwater temperatures, induced by climate change and urbanization, include the potential for shallow subsurface heat recycling and impacts on temperature-sensitive aquifer and stream ecosystems and groundwater quality (Kurylyk et al., 2015; Riedel, 2019; Hemmerle and Bayer, 2020; Benz et al., 2024).

Subsurface temperatures are projected to rise due to the concomitant rise in surface temperatures, which are expected to reach 1.5 °C to 5 °C above the pre-industrial levels by the end of the century, depending on the emission scenario (IPCC, 2023). However, the additional effect of changes in groundwater recharge in modifying heat advection by groundwater flows subsurface heat transport rates has received less attention to date (Klepikova, 2024), being mostly described by analytical 1-D models (Taniguchi et al., 1999; Kurylyk et al., 2017) or conceptual 2-D numerical models of conduction-advection (Kurylyk et al., 2014; Irvine et al., 2016; Benz et al., 2024; Zhang et al., 2024).

To our knowledge, there is so far no consensus on whether projected recharge trends can offset, if not counterbalance the conductive rise of groundwater temperatures. A study by Benz et al. (2024) stated that downward propagation of the surface warming signal caused by climate change is primarily driven by thermal diffusion, with changes in advection rates due to groundwater recharge playing a minor role globally. Other authors ~~arrived at contrasting conclusions, arguing~~ that ~~projected~~ changes in precipitation amount and seasonality, and thus recharge temperature and/or groundwater fluxes, could alter the groundwater warming trend from rising surface temperatures (Kurylyk et al., 2013; Burns et al., 2017; Epting et al., 2021).

The modification of the conductive geothermal gradient by advection has been used to quantify vertical groundwater fluxes from temperature profiles (Stallman, 1965; Bredehoeft and Papadopulos, 1965; Anderson, 2005; Bense and Kurylyk, 2017; Bense et al., 2017; Kurylyk et al., 2019). Likewise, an inversion of borehole temperature logs may provide information about past land surface temperatures for paleoclimatic studies, though this normally assumes only conductive heat transport (Shen and Beck, 1992). It remains uncertain whether changes in groundwater recharge of up to  $\pm 100 \text{ mm a}^{-1}$ , projected globally by the end of the century (Reinecke et al., 2021), are sufficient to alter aquifer thermal responses to surface temperature forcing. Stronger but localized evidence of the thermal response to changes in groundwater flux has been found through repeated temperature logging of aquifers subjected to multi-year groundwater abstraction (Bense et al., 2020; Klepikova et al., 2025).

A major challenge in assessing recharge effects lies in the influence of preferential flow in the unsaturated zone and the predominance of the lateral flow in the saturated zone due to topographic gradients.

80 Topography-driven groundwater flow exerts a footprint on the subsurface thermal field, leading to decreased heat flow in recharge areas and increased heat flow in discharge areas, an aspect that has been demonstrated in basin- and lithosphere-scale thermo-hydraulic models (Kooi, 2016; Noack et al., 2013; Tsy-pin et al., 2024; Smith and Chapman, 1983). However, field evidence of regional temperature variability from advective groundwater flow has been limited to favorable settings for deep meteoric water circulation, such as mountainous terrains and rift basins (Deming et al., 1992; Luijendijk, 2012). The extent of groundwater cooling depends on both hydraulic  
85 gradients and rock permeability, though some authors argued that rates of groundwater flow are often too small to perturb the regional thermal field (Bachu, 1988).

The objective of the present study is to investigate the coupled effects of rising surface temperatures and temporal trends of groundwater recharge on the subsurface thermal field from the present day to the end of the century when considering regional controls on heat advection, such as multidimensional groundwater flow and geological  
90 heterogeneities.

To achieve this objective, we employ a non-stationary weather generator to produce an ensemble of downscaled climate projections, corresponding to different GCM-SSP combinations. The weather forcing is used to calculate groundwater recharge fluxes via a hydrological model, that are assigned, along with projected surface temperatures, as time-variable boundary conditions to a regional 3-D groundwater model. We then conduct a  
95 series of transient thermo-hydraulic simulations to assess long-term changes in hydraulic heads, groundwater velocities, and heat in place, and discuss potential implications for groundwater storage and geothermal energy availability.

We apply our modeling approach to the study area of Brandenburg, NE Germany, where a periglacial geology and geomorphology result in complex deep-to-shallow groundwater dynamics, and where ongoing climate change  
100 has already increased stress on water and energy resources (Alencar et al., 2025; Brill et al., 2024). The presented model, while being limited in covered area and timespan, provides an opportunity to assess the role of the individual co-players (temperate climate, recharge uncertainty, permeable shallow section, undulating water table) affecting the groundwater system response under long-term climatic changes.

## 2 Study area


105 ~~The study area, spanning Germany's federal states of Brandenburg and Berlin, exhibits climatic and geological conditions typical of north-central Europe. The study area spans the territory of Germany's Federal State of Brandenburg and the city of Berlin, as representative of a Central European climate and geology~~ (Figure 1a).

The region has a temperate continental climate, with a mean annual air temperature of +9.0 °C, January being the coldest month and July the warmest. Mean precipitation is 550 mm a<sup>-1</sup>, February being the driest and June the  
110 wettest month (GERICS - Climate-Service Center Germany, 2019).

Geologically, the study area delimits the southeastern margin of the intracontinental North German Basin (NGB). The basin fill is composed of Permo-Cenozoic sedimentary and volcanic rocks, with total thickness increasing from <100 m on uplifted basement highs in the south to >8 km in the basin center northwest of the study area (Littke et al., 2008; Krawczyk and Schulze, 2015). The deep lithospheric structure, basement composition, and  
115 sedimentary cover blanketing contribute to an average surface heat flow of 65–75 mW m<sup>-2</sup> (Fuchs et al., 2022).

Local heat flow variations are influenced by Upper Permian Zechstein evaporites, which form diapirs and salt walls, acting as vertical conduits for heat. The Middle Triassic Muschelkalk formation, composed of marine carbonates and mudstones, is often viewed as an aquitard in basin-scale modeling (Frick et al., 2022a). Consequently, our modeling effort focuses on the overlying Upper Triassic to Quaternary portion of the basin, characterized by the presence of permeable and locally interconnected reservoirs, and hence a more active groundwater circulation.

120

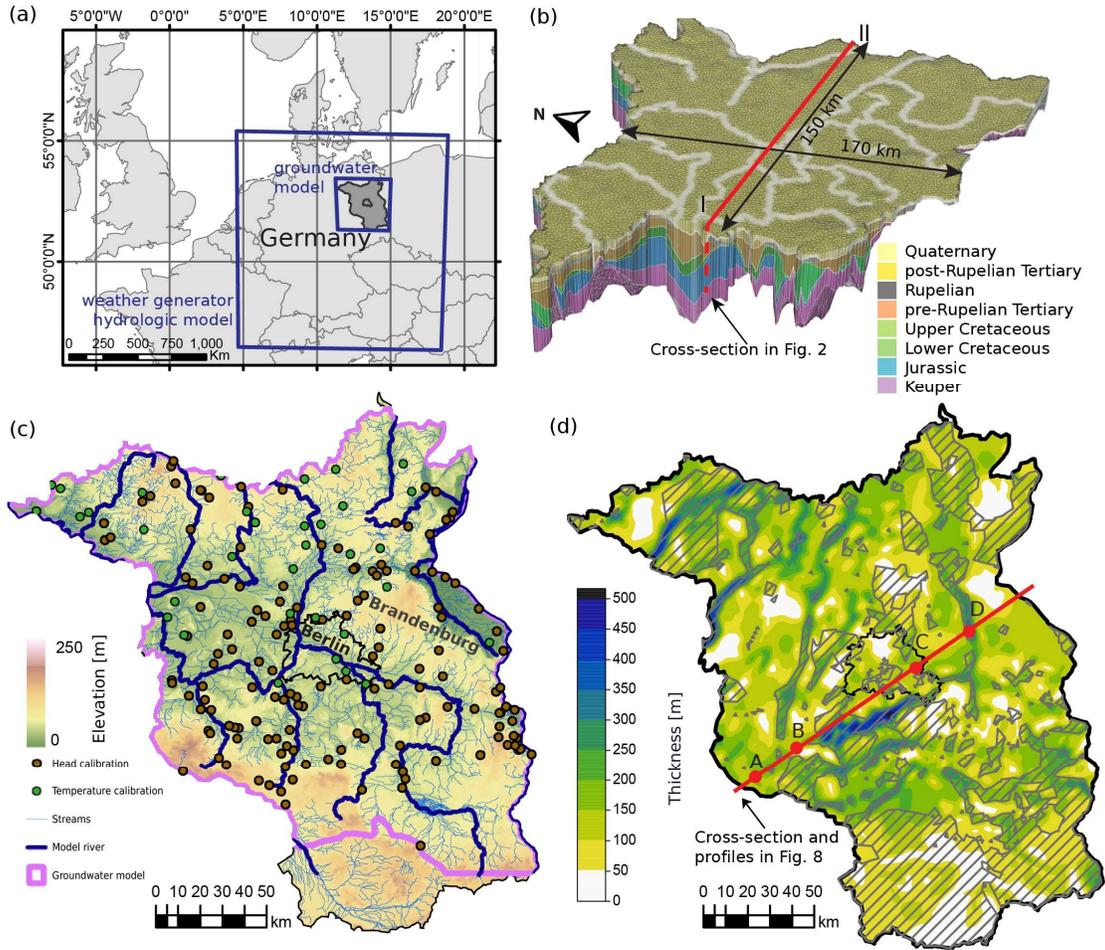

125 **Figure 1: Overview of the study area: (a) geographical location and models' extent; (b) 3-D view of the groundwater model mesh; (c) topography of Berlin-Brandenburg and locations of the groundwater model calibration points; (d) thickness of the Quaternary unit. Dashed polygons indicate absence of the Rupelian aquitard.**

Keuper (uppermost Triassic), Jurassic, and Lower to Upper Cretaceous deposits consist of interbedded mudstones and sandstones, and limestones, with a total thickness of up to 3 km (Stackebrandt and Manhenke, 2010). These saline aquifers are utilized for low-enthalpy geothermal resource extraction and for heat and gas storage (Bruhn, 2023).

130

Tertiary deposits include a mix of shallow marine, nearshore, and continental clastic sediments, including coal deposits. Within the Tertiary section, the Rupelian Clay is a key marine transgressive layer, acting as a basin-wide aquitard separating predominantly freshwater aquifers above from brackish to saline aquifers below (Stackebrandt and Franke, 2015).

135 Quaternary sediments consist of poorly consolidated fluvio-glacial and alluvial deposits: sand, silt, clay, and gravel. The retreat of pressurized subglacial meltwater during the Pleistocene led to the formation of SW-NE-oriented tunnel valleys, incised up to 550 m deep, locally eroding the Rupelian Clay (Lang et al., 2025) (Figure 1d). These valleys are filled with coarse-grained clastic deposits that allow for focused cross-flows between deep and shallow aquifers, locally leading to freshwater salinization. The heterogeneous architecture of Quaternary glacial deposits has produced a complex hydrogeological system, with several hydrodynamically interconnected aquifer complexes. Quaternary aquifer complexes are used for drinking water supply and are increasingly targeted by ground-source heat pumps (GSHP) and low-temperature aquifer thermal energy storage (LT-ATES) systems (Ministerium für Wirtschaft, 2023; Stemmler et al., 2025).

145 The present-day relief, shaped during Pleistocene glaciations, consists of alternating glacial plateaus and ice-marginal valleys, hosting major rivers (Sirocko et al., 2008). Absolute elevations range between 50–200 m a.s.l. on glacial plateaus to 0–30 m a.s.l. in river valleys (Figure 1c). The depth to the water table varies from 0–10 m in floodplains and river valleys to up to 50 m on glacial plateaus. Soils are dominated by sands and loamy sands with low water-holding capacity (Stackebrandt and Franke, 2015).

### 3 Methods

#### 150 3.1 Simulation of downscaled weather time-series

We employed a stochastic weather generator to derive ensemble-based, spatially and temporally consistent downscaled precipitation and temperature inputs for the subsequent hydrologic and groundwater modeling. Weather generators have been widely used to simulate probabilities of extreme hydrologic events such as droughts and heavy precipitation and are also valuable to model the stochastic component of climatic variability in groundwater resource studies (Goderniaux et al., 2011). In our study, we rely on the non-stationary Regional Weather Generator (nsRWG; Nguyen et al. (2024)). This tool simulates daily weather sequences that capture both natural variability and evolving climate conditions, making it well-suited for long-term hydrological assessment studies. nsRWG combines a multivariate auto-regressive spatio-temporal structure for the weather variables of interest with marginal distributions conditioned on large-scale climate drivers. These drivers include circulation patterns (CPs) derived from mean sea level pressure and regional daily mean temperatures, capturing both synoptic-scale variability and thermodynamic trends.

160 The model was configured for a Germany-wide domain realization, covering 540 grid cells, using the gridded observational dataset E-OBS version 25.0e (Cornes et al., 2018). This dataset provides daily precipitation and minimum, maximum, and mean near-surface air temperatures for the period 1950–2021. nsRWG has been rigorously evaluated and has demonstrated good performance in reproducing site-specific and spatial characteristics of precipitation and temperature (Nguyen et al., 2024).

In this study, we use nsRWG to simulate long-term daily weather series for both the historical (1950–2021) and future (2022–2100) periods. Historical simulations are driven by CPs and regional temperatures derived from the ERA5 reanalysis dataset (Hersbach et al., 2020). Future simulations are based on projections of CPs and regional temperatures from seven [representative](#) GCMs of the IPCC Coupled Model Intercomparison [Project](#) Phase 6 (CMIP6): CNRM-CM6-1, INM-CM5-0, GFDL-ESM4, MPI-ESM1-2-HR, MRI-ESM2-0, CESM2, and IPSL-CM6A-LR, [see also Nguyen et al. \(2024\)](#). [The selection of this set of GCMs was justified in Nguyen et al. \(2024\)](#)

175 using a combination of performance- and independence-based criteria. Quantitative performance metrics, originally introduced in the ClimWIP method (Brunner et al., 2020) and implemented in ESMValTool v2.6.0 (Eyring et al., 2016), included each model’s distance to ERA5 over Europe during 1985–2014 for temperature and sea-level pressure climatology, annual variability, and trends. Qualitative considerations of model independence and ensemble spread followed the recommendations of Merrifield et al. (2023).

180 We consider two climate scenarios: SSP245, a moderate-emission pathway where mitigation efforts balance sustainability measures with economic growth, and SSP585, a high-end emission scenario driven by fossil fuel development with minimal mitigation and thus with substantially higher global warming levels (IPCC, 2023). We generate 50 stochastic realizations both for the historical case and for each GCM–SSP combination, resulting in a total of 750 realizations.

### 3.2 Recharge estimation

185 Meteorological forcing generated by nsRWG served as input to the mesoscale Hydrologic Model (mHM) (Samaniego et al., 2010; Samaniego et al., 2019), which is used to simulate groundwater recharge. mHM is a spatially distributed, process-based model that approximates hydrologic fluxes such as soil moisture dynamics, infiltration, surface runoff, evapotranspiration, groundwater recharge, discharge generation, and baseflow.

Conceptually, mHM includes three subsurface storage compartments: a multi-layer soil reservoir, an unsaturated subsurface reservoir, and a groundwater reservoir. Fluxes between these compartments are computed locally at 190 each grid cell, while runoff routing follows the steepest topographic gradient.

mHM applies a Multiscale Parameter Regionalization (MPR) technique (Kumar et al., 2013), which considers morphological variables as predictors to derive spatially coherent parameter fields. This approach enables the model to produce seamless and physically consistent outputs across regions with diverse hydrological behavior.

195 The model was set up over a domain encompassing Germany and upstream contributing areas in neighboring countries (Figure 1a). The setup relies on two primary datasets: (1) meteorological forcing and (2) physiographic input. The model was forced with daily precipitation, near-surface air temperature, and PET. The latter was estimated using the Samani–Hargreaves method based on daily minimum, mean, and maximum temperatures (Hargreaves and Samani, 1985). Physiographic inputs comprised a digital elevation model, along with maps detailing soil properties, land use, land cover, and reservoir lithology. Meteorological forcings were organized at 200 a spatial resolution of 25 km, whereas the physiographic inputs were prepared at a finer resolution of 5 km.

Model calibration was conducted using a regional approach based on MPR and validated against streamflow data from 102 hydrological gauges across Germany (Guse et al., 2024). The model was calibrated with a primary focus on high-flow conditions and therefore shows robust performance for total discharge (Guse et al., 2024; Han et al., 2025) As expected, baseflow performance is lower than that of total discharge; however, Nash–Sutcliffe Efficiency (NSE) values fall within a range of 0.3–0.6, which is considered acceptable for large-scale hydrological applications, suggesting a reasonable representation of recharge–discharge partitioning. Groundwater recharge have been additionally validated against GWL in a transient groundwater model of Brandenburg (Tsy-pin et al., 2025).

210 A high-performance computing system enabled efficient parallel execution of model realizations across 50 compute nodes. Each node provided 40 GB of RAM, and each task used four CPU cores. With this configuration,

a combined chain from nsRWG simulations to mHM impact modelling required approximately 10 days of wall-clock time.

### 3.3 Groundwater flow and heat transport modeling

We conducted coupled groundwater flow and heat transport simulations using FEFLOW 8.0 (Diersch, 2013) and PEST calibration package (Doherty, 2015). Groundwater flow was solved according to the equation:

$$S_s \frac{\partial h}{\partial t} + \nabla \cdot q = R, \quad (1)$$

where  $S_s$  is specific storage [ $\text{m}^{-1}$ ],  $h$  – hydraulic head [m],  $t$  – time [s],  $R$  – volumetric source/sink term [ $\text{ms}^{-1}$ ] (e.g., groundwater recharge), and  $q$  – groundwater flux [ $\text{m s}^{-1}$ ], which, according to Darcy’s law, is defined as:

$$q = -K \nabla h, \quad (2)$$

where  $K$  is the hydraulic conductivity [ $\text{m s}^{-1}$ ].

3-D heat transport equation accounted for changes in thermal storage, advective and conductive heat exchange, and radiogenic heat production:


$$(\rho c)_b \frac{\partial T}{\partial t} - \nabla \cdot (\lambda_b \nabla T - (\rho c)_f q T) - Q_r = 0, \quad (3)$$

where  $\rho$  – density [ $\text{kg m}^{-3}$ ],  $c$  – specific heat capacity [ $\text{J kg}^{-1} \text{K}^{-1}$ ],  $b$  and  $f$  subscripts refer to bulk and fluid properties, respectively,  $T$  – temperature [K],  $\lambda$  – thermal conductivity [ $\text{W m}^{-1} \text{K}^{-1}$ ], and  $Q_r$  – radiogenic heat production [ $\text{W m}^{-3}$ ].

Dispersion effects and free convection were neglected for the heat transport, given the regional scale of the model with a focus on shallow groundwater circulation, and fluid density and viscosity were assumed constant.

The finite-element mesh incorporated structural surfaces from the regional geological model of Brandenburg (Noack et al., 2024). The generated mesh ~~is 170×150 km~~covers an area of 27,600 km<sup>2</sup>-wide and is up to 2.5 km deep, consisting of 8 stratigraphic units, described in Sect. 2 (Figure 1b). Edges of the mesh follow topographic elements (major rivers and divides). The Quaternary unit was subdivided into 10 simulation layers, and post-Rupelian Tertiary and Rupelian units were split into 3 layers each, proportional to each unit’s total vertical thickness. The mesh was further refined along 19 major streams to improve computational stability and accuracy in simulating the shallow subsurface thermal and hydraulic behavior ~~(Fig. 1b)~~. The final mesh consists of 1.15 million triangular prismatic elements and 615,000 nodes.

Thermal and hydraulic properties for stratigraphic units were kept identical across scenarios to isolate climatic controls (Table A1) and were taken from previous studies (Scheck and Bayer, 1999; Noack et al., 2013) except for the Quaternary and post-Rupelian Tertiary post-Rupelian units, whose properties were calibrated, as they are the upper two units directly experiencing the impact of varying boundary conditions, which were subject to calibration.

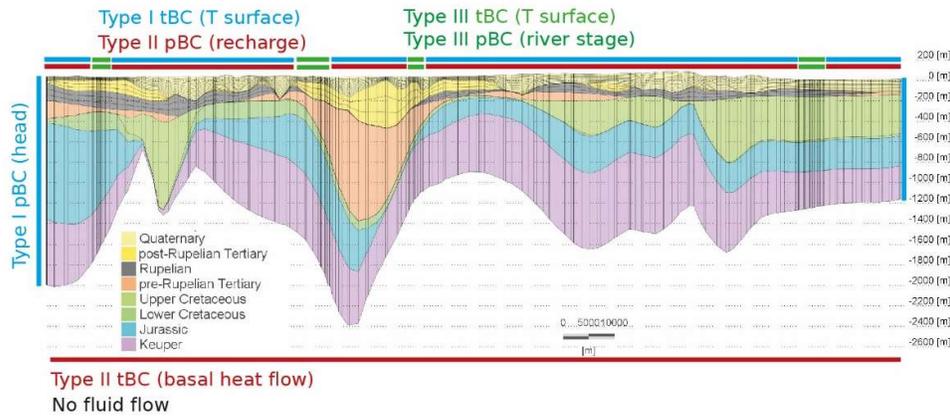

**Figure 2: Layering and the setup of the hydraulic (pBC) and thermal (tBC) boundary conditions of the groundwater model. The location of the cross-section is shown in Figure 1b.**

The base of the model was taken as a no-flow boundary, corresponding to the Middle Triassic Muschelkalk formation. A long the lateral model edges a time- and depth-constant head Type I (Dirichlet) boundary condition (BC) was assigned. The assumption of open model edges reflects the fact that most aquifers extend beyond area of Brandenburg, given that they largely correspond to major rivers, although alternative approaches to BC conceptualization for this domain are possible (Tsy-pin et al., 2024). At the top, a Type II (Neumann) BC was specified, using recharge rates derived from mHM, except for cells corresponding to river elements, where we applied a Type III (Cauchy) BC, with a time-invariant reference elevation across all scenarios (Figure 2). The choice of this BC stems from the fact that most streams in the study area have regulated levels with limited sensitivity to recharge fluctuations.

We assigned a spatially variable basal heat flux as the lower thermal BC, derived from a lithosphere-scale thermal model of Brandenburg, ranging 55–95 mW m<sup>-2</sup> (Noack et al., 2012). Surface temperature was assigned as Type I BC or as Type III BC along the river nodes to allow for variable discharge temperature. To maintain consistency between the hydrologic and groundwater models, we used near-surface air temperature as a proxy for land surface temperature. This approximation is justified for the study area by the short duration of snow cover, the low level of urbanization, and the use of monthly aggregated values. Monthly near-surface air temperature is lower than surface temperature by <0.4 °C in CMIP6 projections and by <1.2 °C in historical data, suggesting that our simulations of subsurface warming could be conservative. An analysis of monthly differences between near-surface air and land surface temperatures across CMIP6 climate models for the study area revealed that in 99 % of cases the discrepancy was <0.4 °C.

The unsaturated zone was approximated via a phreatic surface approach (Desai and Li, 1983; Diersch, 2013). Saturated hydraulic conductivity in partially saturated elements was linearly scaled by saturation, with a minimum residual saturation threshold of 1 %.

As initial conditions to the transient groundwater model, we selected the pressure-temperature (PT) state in 1955, given that the difference in the measured air temperature between the onset of industrialization in the 1880s and 1950s is <0.3 °C in the study area (Deutscher Wetter Dienst - Climate Data Center, 2021). To derive initial heads and temperature conditions for the transient model, we assigned a 5-year mean surface temperature and recharge from the earliest available historical period and ran the model until steady state.

The transient groundwater model was calculated for 1955-2100 with adaptive time steps not exceeding monthly increments. Each model scenario, run on a 16-core processor with 32 GB of RAM, required approximately 3,500 computational time steps, resulting in an average simulation time of about 19 hours.

Post-processing focused on comparing model outputs between two 20-year-long intervals: a control **present period** (2002-2021) and a **late-century period** (2081-2100). The model only considers natural climatic (exogenic) forcing, without including effects of urban climate/infrastructure or groundwater abstraction/irrigation. Therefore, the magnitude of simulated PT effects primarily represents gross regional trends.

~~The relative contributions of advection and diffusion to the heat transport were quantified via the dimensionless Peclet number ( $Pe$ ):~~

$$Pe = \frac{vL}{D}, (4)$$

~~where  $v$  is flow velocity [ $m \cdot s^{-1}$ ],  $L$ —characteristic length [ $m$ ], determined as the size of the element in the flow direction, and  $D$  is thermal diffusivity [ $m^2 \cdot s^{-1}$ ].~~

We computed the incremental accumulated subsurface heat-in-place as:

$$Q_{total} = \sum_{i=1}^N V_i (\phi_i C_w + (1 - \phi_i) C_s) (T_{i,t2} - T_{i,t1}), (45)$$

with  $V_i$  being the volume of the  $i$ -th element [ $m^3$ ],  $\phi_i$  the porosity of the  $i$ -th element,  $C$  the volumetric heat capacity of water (w) and solid (s) [ $J \cdot m^{-3} \cdot K^{-1}$ ],  $T_{i,t2}$  and  $T_{i,t1}$  the mean temperatures in the respective time periods, and  $N$  the total number of finite elements in the model domain.

## 4 Climate sScenario dDefinition

### 4.1 Ensemble scenarios

For the two climate scenarios (SSP245 and SSP585), we constructed ensembles of temperature, precipitation, PET, and groundwater recharge time series. Each ensemble combined seven GCMs with 50 realizations per GCM. For the historical period, the ensemble likewise consisted of 50 realizations. We then considered monthly mean values for each ensemble for the entire Brandenburg area, as the modeled forcing showed only limited spatial variability in their long-term trends (Figure A1 and A2).

The historical increase in mean annual temperature since 1950 (excluding the city of Berlin) is 1.1 °C. For SSP585, surface temperature in Brandenburg is projected to rise by an additional 3 °C on average by 2100 (P90 (ensemble's 90<sup>th</sup> percentile value): 3.5 °C, P10 (10<sup>th</sup> percentile): 2.5 °C), while under SSP245 the projected mean increase is 1.5 °C (P90: 2.0 °C, P10:1.2 °C) (Figure 3a).

Precipitation, despite having high variability driven by the stochastic component, does not exhibit a statistically significant long-term trend in the annual mean. Projections differ between the two scenarios only after 2075, with SSP585 portraying slightly lower annual precipitation.

PET time series closely follow temperature variations and, given relatively steady precipitation, point to a long-term decrease in the climatic water balance and an increase in aridity.

Simulated recharge shows a decline beginning in the late 1970s with a mean trend of -4 mm a<sup>-1</sup> per decade. This lies at the lower end of the trend of -21 to -4 mm a<sup>-1</sup> per decade, estimated for Brandenburg, and is supported by falling GWL in the observation wells, decreasing stream discharge, and groundwater storage reductions based on satellite hydrogravimetry (Francke and Heistermann, 2025; Güntner, 2023). This negative recharge trend has been

310 attributed to climate change and increasing leaf area index (LAI) (Francke and Heistermann, 2025). An analysis  
of groundwater trends in watersheds minimally affected by anthropogenic forces suggests hydraulic heads  
declining at rates of -20 to -80 mm a<sup>-1</sup>, resulting in up to 2.5 m cumulative decline from mid-1970s to the present.  
Simulated future recharge exhibits a continued negative long-term trend under both climate scenarios. Given that  
315 projected precipitation remains relatively stable, the decline is attributed to increasing PET and actual  
evapotranspiration. The total reduction of recharge during the projection period for SSP585 and SSP245 ranges  
from reaches up to -25 to -30 % and from -6 to -12 %, respectively, in agreement with predictions based on an  
empirical relationship linking groundwater recharge with precipitation to PET ratio (Berghuijs et al., 2024).  
Projected baseflow exhibits the same reduction levels with no delay, though with smaller year-to-year variability  
due to the dampening effect.

320

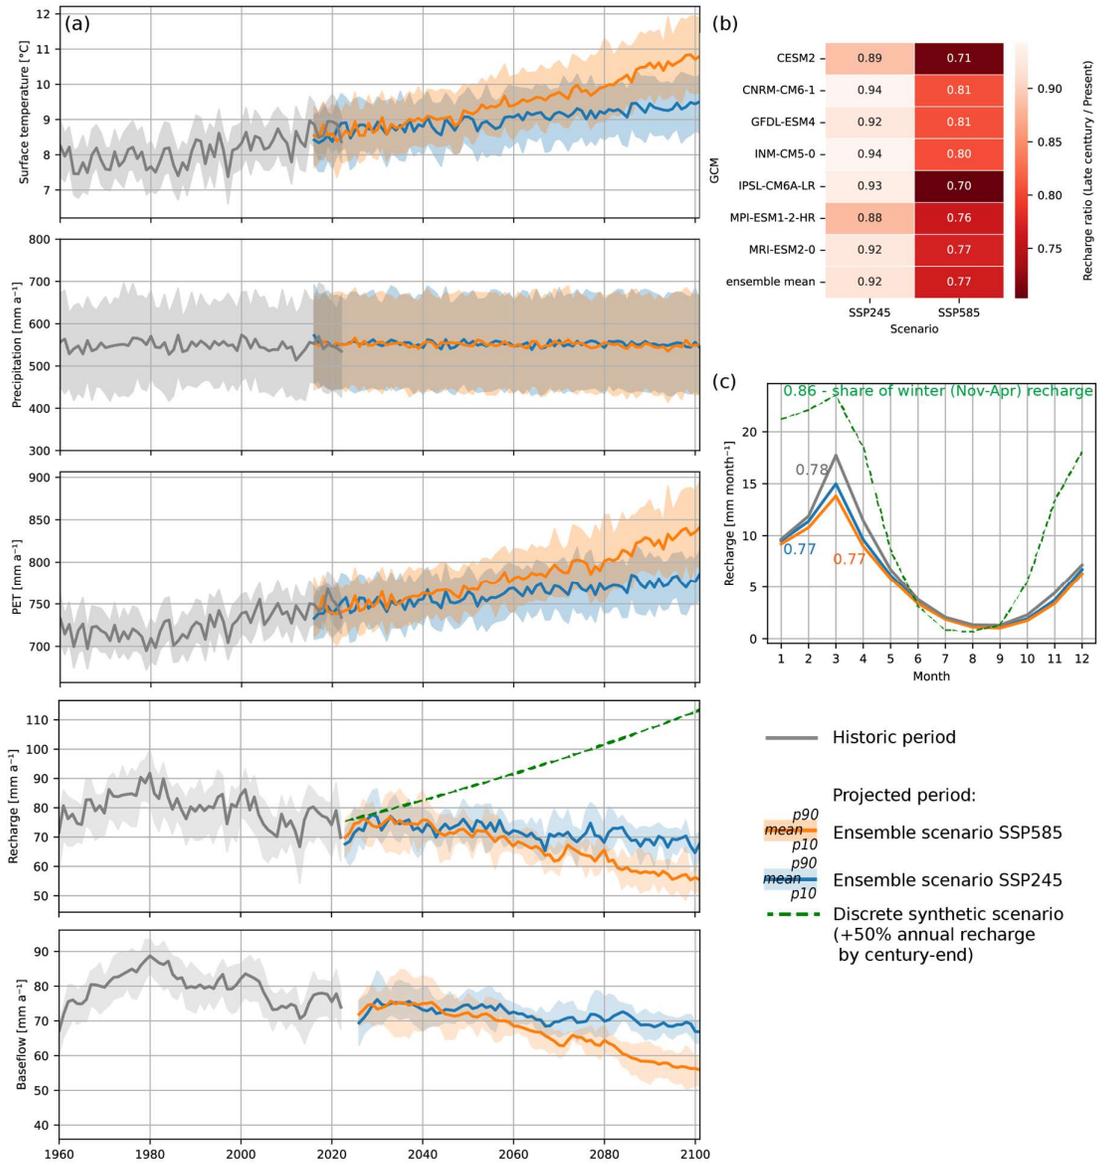


Figure 3: (a) historical and projected annual time series of surface temperature, precipitation, PET, and groundwater recharge, and baseflow. Solid lines represent the ensemble mean (historical: across nsRWG realizations; SSP scenarios:

325 across GCMs and realizations) and shaded areas indicate the P10-P90 range; (b) ratio of late-century to present period mean recharge; (c) monthly recharge means. The green line represents a discrete synthetic scenario (Sect. 4.2).

Recharge projections show consistency across all GCMs (Figure 3b, Figure A2). CESM2 tends to give lower recharge in both climate scenarios, while MPI-ESM1-2-HR and IPSL-CM6A provide the largest change only for SSP245 and SSP585, respectively. CNRM-CM6-1 exhibits the smallest change between the reference and the future periods.

330 Simulated recharge also displays a strong seasonal signal, with >70 % of recharge occurring during the colder months (November to April) for both historical and projected periods (Figure 3c).

We calculated groundwater flow and heat transport using cross-GCM statistical ensembles (mean, P10 and P90 time series of the nsRWG suite) for each SSP, as well as six deterministic nsRWG realizations with the smallest Root Mean Square Error (RMSE) relative to the aggregate scenarios. The ensemble approach captures the long-  
335 term uncertainty range, while the deterministic cases retain temporal variability and extremes, helping to offset potential artifacts from ensemble smoothing.

## 4.2 Synthetic scenarios


The use of the weather generator enabled us to capture recharge variability while conditioning on large-scale circulation patterns (synoptic dynamics) and atmospheric thermodynamic effects. However, as demonstrated in  
340 multi-model hydrological studies (Moeck et al., 2016; Reinecke et al., 2021; Kumar et al., 2025), uncertainties in future recharge estimates arise not only from the choice of GCM, with their diverse precipitation projections, but also from the hydrologic model setup (e.g., vegetation processes considered, PET estimation method) and its dynamic inputs (e.g., LAI and land use change).

While the scope of the current study does not include a multi-model ensemble analysis, we examined available  
345 alternative recharge projections for the region of interest (Kumar et al., 2025; Berghuijs et al., 2024; Hattermann et al., 2008; Marx et al., 2021). Central Europe lies in a transitional climatic zone between the Mediterranean region, where projections show a pronounced decrease in recharge, and Northern Europe/Scandinavia, where most projections indicate an increase. To account for these contrasting regional trends in our groundwater simulations, specifically the implications of increasing recharge despite rising PET, we included a scenario based on a projected  
350 end-century increase of 23 % (overall for Germany) and up to 50 % (locally in Brandenburg) (Marx et al., 2021). Despite concerns over such “optimistic” projections driven by increased winter precipitation (Tillman and Francke, 2025), we found such a “what if” scenario valuable for assessing potential subsurface feedbacks. Taking this projected increase, we generated synthetic monthly recharge time series assuming exponential growth over time and a higher winter share of total recharge (Figure 3). We tested the effect of increasing recharge with  
355 moderate (Scenario **M1**, Table 1) and strong warming (**M2**). In order to isolate the flux effects, we also tested two cases where we maintain surface temperature at their present values and consider a 20 % recharge decline (as in SSP585, **M3**) or a hypothetical increase of 50 % (**M4**).

The resulting layout of scenarios for groundwater simulations allows us to compare the difference between two  
360 climate scenarios and a potential impact of diverging recharge trends on the subsurface flow and temperature distribution (Figure 4).

**Table 1: Summary of the tested groundwater modeling scenarios.**

Scenario	Description	$\Delta T$ (surface) Present (2002-2021) to late-century (2081-2100) periods	$\Delta$ Groundwater recharge	Comment
<i>Ensemble scenarios derived with nsRWG and mHM (Sect. 4.1)</i>				
SSP245	Moderate emission pathway	+1.5 °C	-10 %	Ensemble mean
SSP585	High-end emission pathway	+3 °C	-20 %	
<i>Synthetic and reference scenarios (Sect. 4.2)</i>				
M1	Recharge increase, moderate warming	+1.5 °C	+50 %, higher winter recharge ratio	after Marx et al. (2021)
M2	Recharge increase, strong warming	+3 °C	+50 %, higher winter recharge ratio	
M3	Recharge as SSP585, present-day <u>surface</u> temperature	0 °C	-20 %	Reference cases to isolate the recharge effects
M4	Recharge increase, present-day <u>surface</u> temperature	0 °C	+50 % Winter	

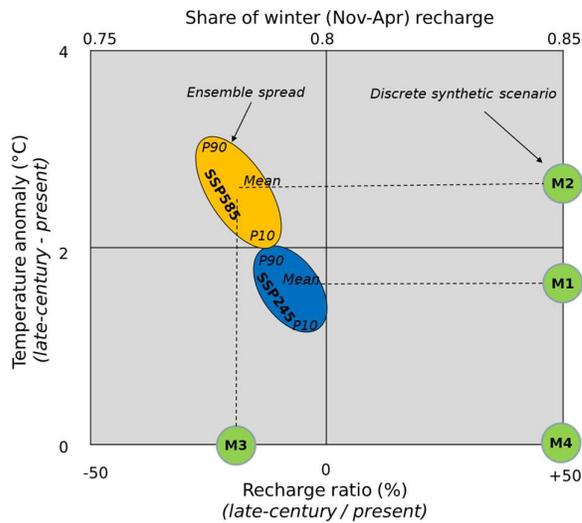

365 **Figure 4: Schematic representation of the groundwater modeling scenarios. See Table 1 for the detailed description.**

## 5 Results

### 5.1 Groundwater model calibration and validation

Steady-state hydraulic heads were calibrated against historical GWL observations from 47 monitoring points in Brandenburg (LfU, 2023). The calibrated parameters included hydraulic conductivity and storativity, with the best-estimate values provided in Table A1. RMSE after calibration was 6.6 m, which we find acceptable for a regional-scale model of this complexity (Figure 5a).

Available groundwater temperature data are sparser (14 locations) with a large gap between shallow groundwater monitoring points and deep petroleum exploration boreholes. The latter consist of bottom-hole temperatures corrected using the Horner plot method and empirically corrected continuous cased-hole temperature logs (Förster, 2001). RMSE for temperature ~~for~~ in the steady-state case was 3.0 °C (Figure 5b), which is comparable to the estimated measurement error.

For both variables, RMSE normalized to range of observations was <10% (Figure 5).

Transient hydraulic heads were validated against historical GWL time series (Figure 6). The model successfully reproduced the magnitude of the historical GWL decline between 1980 and 2021. Proper validation of transient subsurface-groundwater temperatures was not feasible due to the lack of repeated long-term measurements in areas not affected by urban heat island effects and uncertainties in sensor depth relative to the water table.

380

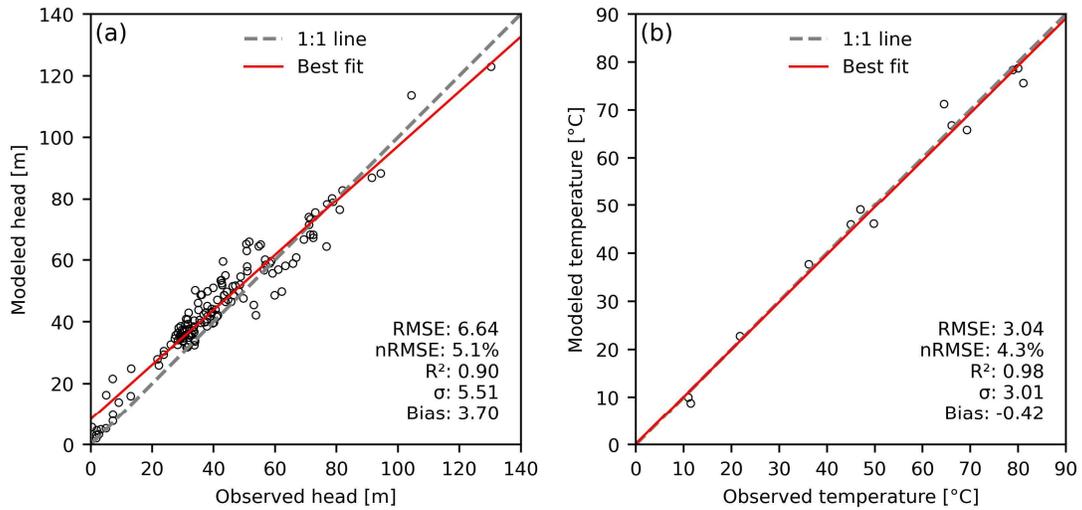


Figure 5: Steady-state groundwater model calibration results: simulated versus observed hydraulic head and temperature at monitoring points (locations shown in Figure 1c). **RMSE – Root Mean Square Error, nRMSE – normalized to value range; R<sup>2</sup> – coefficient of determination; σ – standard deviation.**

385

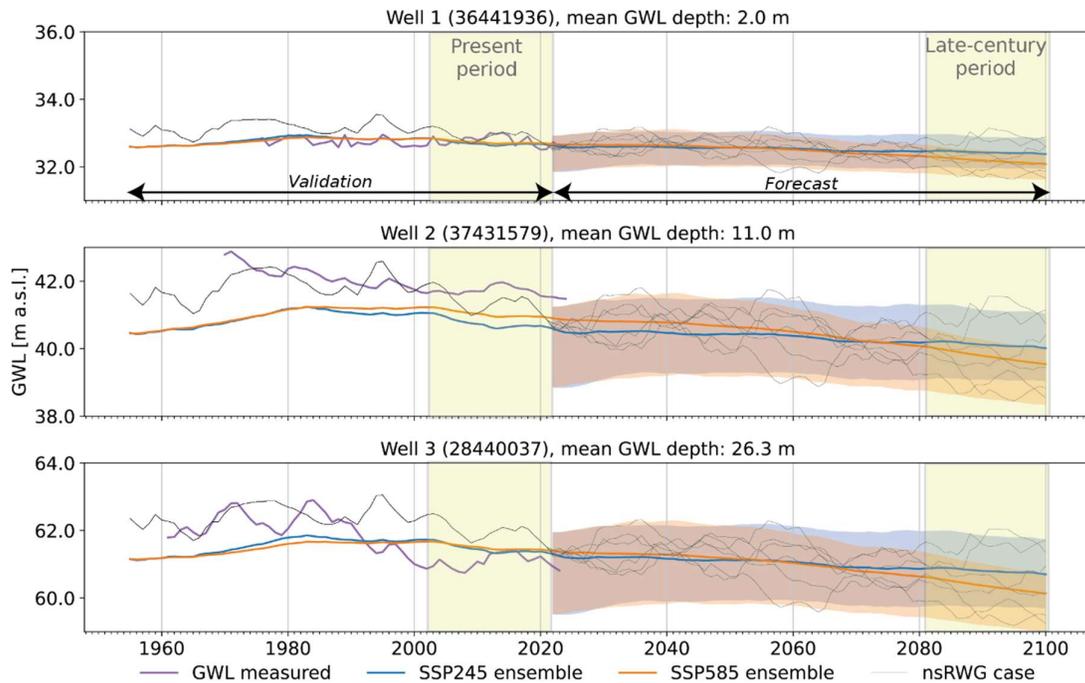



Figure 6: GWL time series for (a) shallow, (b) intermediate, and (c) deep monitoring wells (locations shown in Figure 7a). Colored lines indicate ensemble mean, shaded areas represent P10-P90 range of the ensemble distribution, black lines are examples of individual nsRWG realizations. Numbers in brackets denote well ID from the state groundwater monitoring network (LfU, 2023).

390

## 5.2 Hydraulic heads

The projected evolution of hydraulic heads between the present and late-century periods closely follows trends imposed by changes in groundwater recharge. In both climate scenarios, the largest long-term changes are observed at watershed divides, whereas the lowest changes occur adjacent to river valleys (Figure 7a). Under SSP585, head declines at watershed divides reach up to 4.8 m, compared to 3.6 m under SSP245. Minimal changes in lowlands can be linked to artificially-regulated water levels in rivers, making groundwater less responsive to recharge variability.

For the SSP585 ensemble mean, the heads are projected to decline at approximately the same rate as observed during the historical period, while under SSP245, the rate of decline slows down after 2070 (Figure 6). Simulated heads for discrete nsRWG cases reveal a potential temporary reversal in head trends, with head increases lasting up to 10 years (Figure 6). Such behavior has been frequently observed in the historical data and attributed to impact of intra-annual climatic fluctuations, such as North Atlantic Oscillation to teleconnections with inter-annual climatic oscillations (Liesch and Wunsch, 2019).

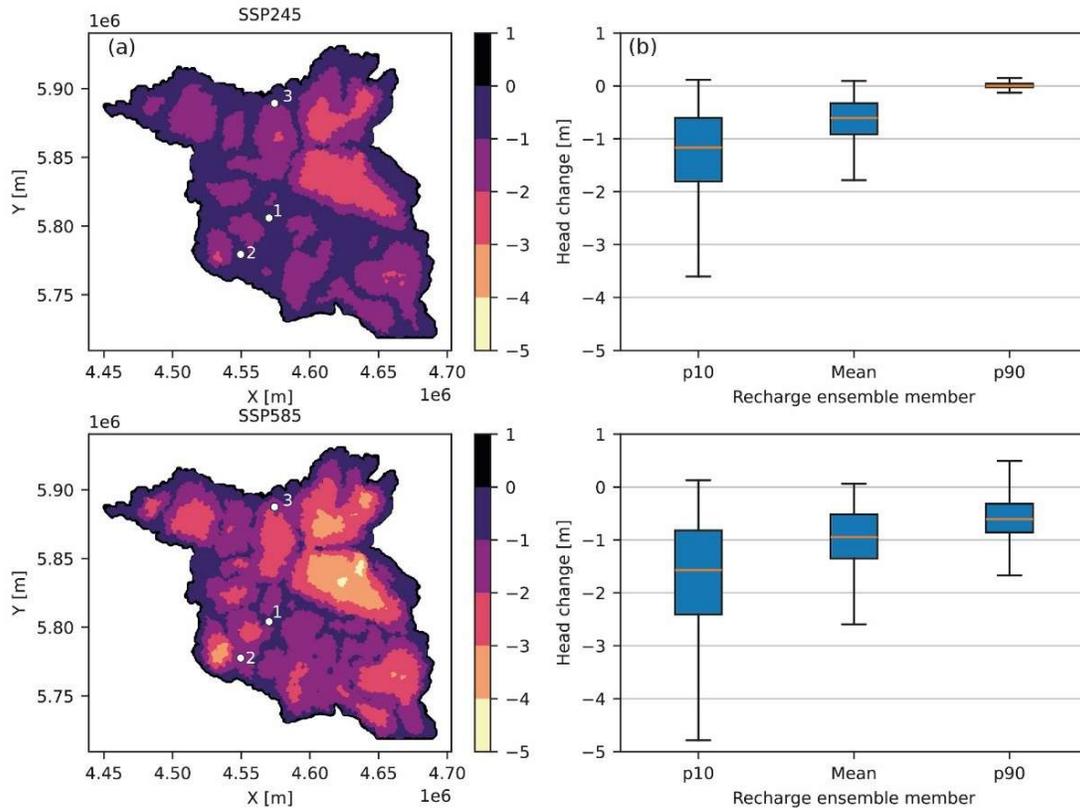

**Figure 7: Projected changes in hydraulic heads between the present and late-century periods: (a) spatial distribution of head changes for the SSP ensemble mean; coordinates are shown in DHDN / 3-degree Gauss-Krüger zone 4 (EPSG:31468); labels refer to wells, shown in Figure 6; (b) comparison of P10, mean, and P90 ranges.**

410 **5.3 Subsurface thermal field**

Vertical temperature profiles at four representative locations, each characterized by different local geology and hydraulic conditions, reveal spatial variability in the geothermal gradient, depth of the seasonal envelope, and the extent of thermal disturbance from the projected global warming (Figure 8).

The first-order difference in modeled geotherms, reaching 11 °C at 1000 m between the selected locations, is driven by the basal heat flux, which varies due to heterogeneities in the underlying geological units, such as depth of the Moho, sediment thickness, and the distribution of salt structures (Noack et al., 2012).

Profiles A, B, and D exhibit relatively low geothermal gradients in the upper 100–200 m, suggesting a strong influence of recharge and downward advection of cold meteoric water. A distinct inflection at 150–200 m coincides with the depth of the Rupelian aquitard. In profile D, penetration of advective cooling and the change in gradient slope are deeper due to local erosion of the Rupelian (Figure 8a).

Profile A, located on a glacial plateau, has a shallow seasonal envelope, entirely above the water table, suggesting no advective transfer of the seasonal thermal signal into the saturated zone. Profile C, extracted from a river valley, shows a higher geothermal gradient and a smaller magnitude of seasonal fluctuations, reflecting discharge conditions with some flow contribution from the deeper aquifers. Profiles A and D, located on a glacial plateau, have a shallow seasonal envelope, entirely above the water table, suggesting damping of the seasonal thermal signal within the unsaturated zone.

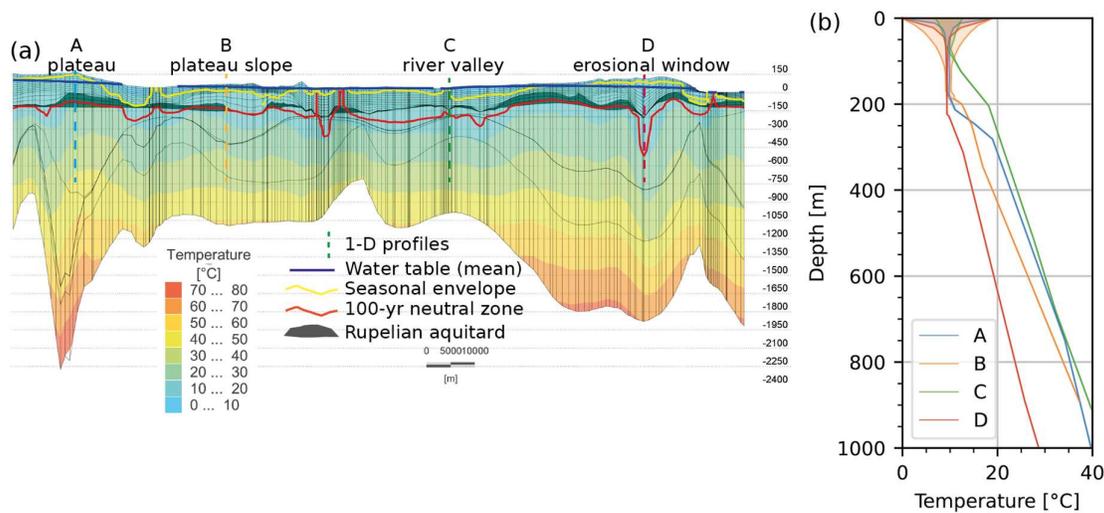


Figure 8: (a) cross-section of the initial subsurface thermal field, showing variability in the maximum depth of thermal disturbance (100-yr neutral zone) and a seasonal envelope; (b) initial temperature profiles (lines) and seasonal envelopes (shaded areas). The location of the cross-section is shown in Figure 1d.

To isolate the contribution from the changing climate, we examined the difference in groundwater temperature and groundwater flux between the present and late-century periods (Figure 9).

Relatively high groundwater flux in the Quaternary unit ranges from  $10^{-8}$  to  $10^{-6}$  m s<sup>-1</sup> indicates a dominance of advective heat transport in the interval of meteoric water circulation. Projected changes in the vertical component of the groundwater flux ( $q_z$ ) in the late-century period relative to the present period are  $\pm 2 \times 10^{-9}$  m s<sup>-1</sup> or 5–40 %. (Figure 9a). In the saturated part of the Quaternary, decreasing recharge (SSP245/585) reduces downward flux at locations A, B, and D and correspondingly lowers upward flux for location C (and vice versa for increasing recharge scenarios, M1/M2).

Climate-induced thermal disturbance penetrates the first few hundred meters, being controlled by the depth of the Rupelian aquitard in locations A and B (Figure 9b). *Pe* number in the Quaternary unit ranges between  $10^1$ – $10^2$ , pointing to advective heat transport in the interval of meteoric water circulation, whereas in the pre-Rupelian section the range is  $10^{-4}$ – $10^{-1}$ , suggesting a conduction-dominated regime (Domenico and Schwartz, 1997). In location C, temperature disturbance does not reach the Rupelian due to the thicker post-Rupelian section. In location D, where the Rupelian is locally eroded, the warming signal penetrates into the pre-Rupelian strata. Projected groundwater warming at the water table reaches 2.5 °C and 1.1 °C under SSP585 and SSP245, respectively, except at location C, where surface warming is hampered by upward flow. In contrast, the isolated effect of recharge is weaker, as seen in profiles A and D, where higher recharge scenario (M2), despite a larger fraction of winter recharge, results in a groundwater temperature difference relative to SSP585 not exceeding 0.4 °C.


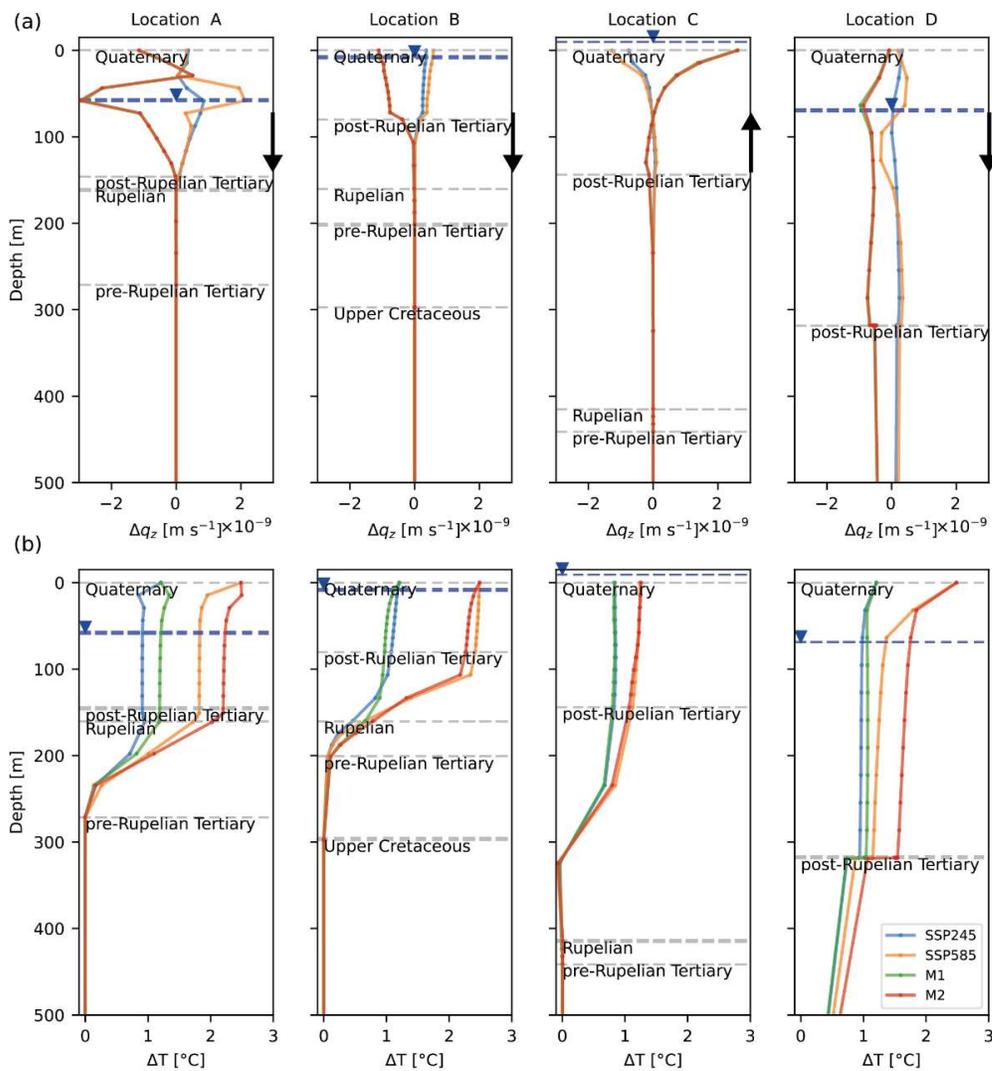


Figure 9: Changes in (a) vertical groundwater flux and (b) temperature vs depth between the present and late-century periods. The scenario pairs SSP245/M1 and SSP585/ M2 assume the same degrees of surface warming but decreasing/increasing groundwater recharge, respectively. The blue line indicates water table depth. The arrow shows the direction of vertical groundwater flow ( $q_z$  vector is always oriented upward).

We derive maps of the stable long-term subsurface-groundwater temperatures by extracting the depth below which the temperature difference between the present and late-century periods is  $<0.2\text{ }^{\circ}\text{C}$  (Figure 10a). This steady temperature level varies spatially, being shallowest ( $<200\text{m}$ ) along river valleys and in areas of thin sedimentary cover along the southern model boundary. The deepest penetration of the warming signal (450–550 m) occurs in the northwestern part of the area within the Quaternary tunnel valleys and in the east, where the Rupelian aquitard is largely absent (Figure 1d). Under SSP585 the depth of the surface warming propagation is on average 50 m deeper than under SSP245 (Figure 10b). Changes in recharge flux alone, in contrast, have a negligible impact on this depth.


The depth of the seasonal envelope is expected to rise under decreased downward flux. Combined with projected water table decline under SSP585, this would expand over time the modeled area where seasonal subsurface temperature fluctuations are fully damped before reaching the water table from 5 % to 9 % (Figure A4).

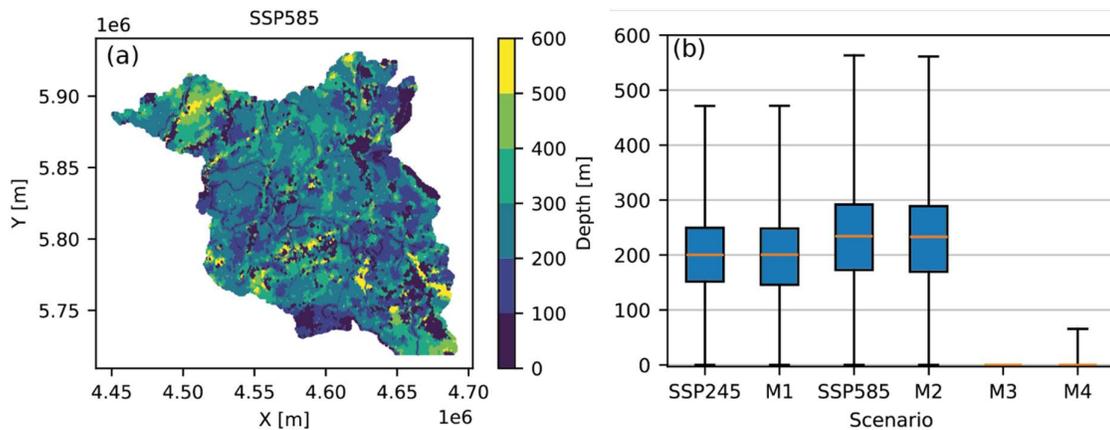

**Figure 10: Depth to long-term steady groundwater temperatures: (a) spatial variability under SSP585; (b) comparison of the depth variability between scenarios. Scenarios M3 and M4 assume changes in recharge and constant surface temperatures.**


#### 5.4 Accumulated heat

Figure 11 illustrates the spatial distribution of the accumulated subsurface heat due to climate change and compares ranges between the simulated scenarios. Surface temperature rise exerts a first-order control on the amount of incremental accumulated thermal energy. Under SSP585, mean accumulated heat is more than twice that of SSP245 ( $736\text{ vs }327\text{ MJ m}^{-2}$ ). The groundwater recharge effect is significantly weaker: a change from declining recharge to increasing annual/winter recharge led to almost no difference in mean accumulated heat for SSP245 warming levels, and resulted in a 5 % increase for SSP585, and a slight reduction when steady surface temperatures are assumed.

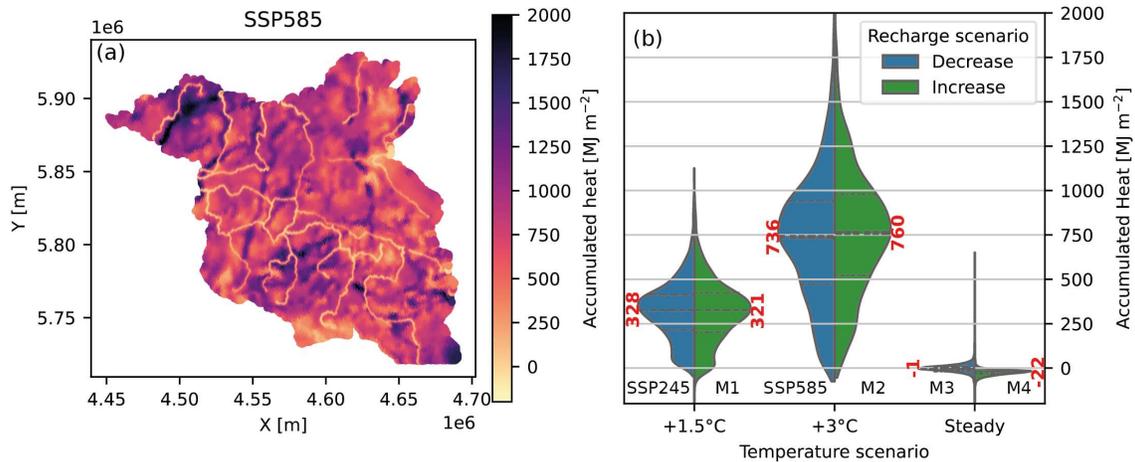

480 **Figure 11: Accumulated heat-in-place: (a) map for scenario SSP585, (b) violin plots (equal-width-normalized) comparing probability distributions of accumulated heat-in-place per m<sup>2</sup> between the scenarios. Red labels indicate P50 values; black labels refer to model scenarios.**

The majority heat is being accumulated in the Quaternary unit, with the contribution from other stratigraphic units decreasing with depth (Figure 12). Within individual units, the spatial distribution of accumulated heat is strongly controlled by the gross thickness variability. In the Quaternary, the largest gains are localized in thick SW-NE-oriented tunnel valleys. In contrast, the subsurface beneath river valleys does not accumulate much heat, because upward flow and groundwater discharge suppress surface heat transfer. In the post-Rupelian Tertiary unit, the most heat in place is accumulated in the northwest of the study area, consistent with the basin-wide stratigraphic thickening trend. In the pre-Rupelian Tertiary and Upper Cretaceous units, climate-driven heat accumulation is scattered, being tied to areas where the overlying Rupelian aquitard has been eroded, and where the thickness is increased, associated with syn-tectonic sedimentation in rim synclines of Zechstein salt diapirs.

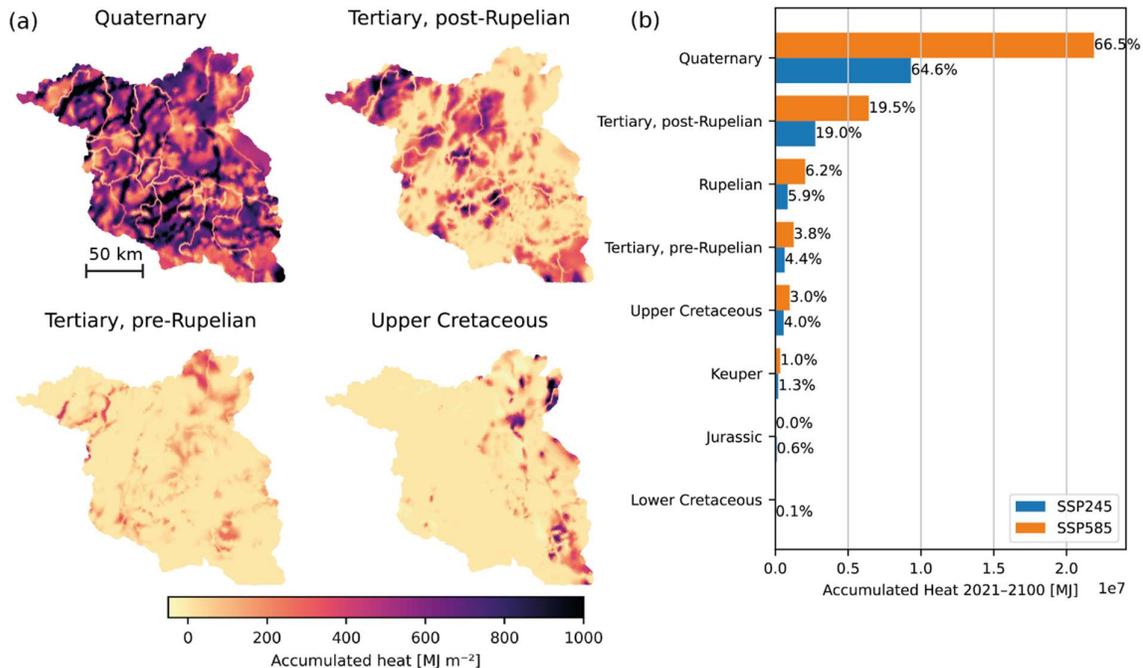

495 **Figure 12: Accumulated heat by geological unit between the present and late-century periods: (a) maps for scenario SSP585, (b) comparison between SSP585 and SSP245 with percent labels indicating unit's contribution to the total accumulated heat.**

## 6 Discussion

### 6.1 Intrinsic controls on groundwater dynamics and thermal field


Spatial analysis of the groundwater modeling results presented in Sect. 5 allows us to distinguish several surface and geological domains that have a distinct control on flow and heat transport in the post-Rupelian section and, accordingly, portray different feedback effects to climate change (Figure 13). We briefly characterize them below for further referencing in the subsequent discussion.

#### **Surface domains (SD):**

- **SD1 – glacial plateaus**, characterized by a deep unsaturated zone (depth to water table > 10 m). Annual fluctuations in surface temperature and precipitation are effectively damped before reaching the phreatic zone. Instead, the aquifers respond primarily to inter-annual and long-term climatic perturbations. After reaching the water table, the climate signal may be transmitted by advection laterally but also vertically down to >200 m. Notably, these fluxes are driven not by higher recharge rates, but by steep topographic gradients: SD1 is characterized by the highest magnitudes of advective overprinting of the conductive thermal field.
- **SD2 – plateau slopes** with a shallow water table (< 10 m). A thin unsaturated zone allows both annual and inter-annual recharge and surface temperature fluctuations to reach the unconfined aquifer. Groundwater flow has a strong lateral component, directing the thermal signal from recharge areas toward discharge areas along the flow paths.
- **SD3 – floodplains and river valleys** with a water table at or near the surface. Groundwater flow has a strong upward component. Surface temperature fluctuations, both annual and long-term, are modulated by discharging groundwater. Discharge temperatures depend on the contribution of deeper groundwater, originating at depths, where temperature remains stable over time (if geology allows for such connection). Upward advection leads to relatively higher geothermal gradients.

#### **Geological domains (GD):**

- **GD1 – less than 100 m-thick Quaternary, underlain by the Rupelian.** In such configuration, the Rupelian Clay acts as both a hydraulic and thermal barrier, isolating pre-Rupelian aquifers from climatic perturbations within the simulated timeframe. Groundwater dynamics is characterized by shallow circulation, with a predominantly lateral flow component towards streams, and a greater sensitivity to recharge variability due to a lower storage.
- **GD2 – 100–500 m-thick Quaternary, underlain by the Rupelian.** As such, permeable Quaternary sediments essentially accumulate all the excess heat from surface warming. The temperature disturbance does not reach the Rupelian aquitard within the modeled period.
- **GD3 – 100–500 m-thick Quaternary, incising into the Rupelian.** In this configuration, the Rupelian is locally eroded, allowing direct hydraulic connection between the Quaternary aquifers and the deeper formations. The crossflow direction depends on the spatial relationship with surface domains. If GD3 is found below SD1, surface warming propagates deep into the Tertiary units due to downward advective flux. When GD3 underlies SD3, conditions favor the influence from deep groundwater, e.g., preferential warm water discharge.

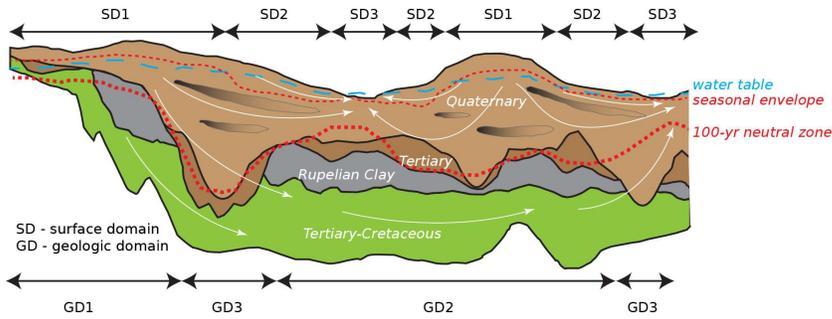

535

**Figure 13: Schematic cross-section, illustrating patterns of groundwater flow and the thermal field for different surface and geological domains (see text for the domains' description).**

## 6.2 Effects of recharge projections on groundwater dynamics

540 Changes in groundwater recharge directly affect the storage of unconfined layers. Projected recharge decreases under SSP245 and SSP585 ensembles mean cause hydraulic head declines of 0.1-1.8 m and 0.5-2.6 m across Brandenburg, respectively (Figure 7b). To a lesser extent, this results in a reduction of groundwater flux due to a preferential decline of heads on glacial plateaus (SD1) and consequently a lower hydraulic gradient. Beyond this hydrodynamic effect, it remains uncertain which surface domains experience greater reduction in net recharge:

545 SD2 and SD3, where groundwater is depleted due to evaporation from the water table and root transpiration (Francke and Heistermann, 2025) or SD1, where an already thick unsaturated zone further accumulates multi-year drought effects (Tsy-pin et al., 2025).

In addition to water table elevation, changes in recharge rates have been shown to affect modeled groundwater travel times, flow rates, and stream discharge (Jing et al., 2020; Dams et al., 2012), although there has been no evidence of modifications to the regional flow regime (i.e., groundwater trajectories and catchment boundaries).

550

Our results also indicate that the tested magnitude of projected recharge changes (-20 to +50 %) only influences basin-scale flow to a limited extent, that is, the groundwater system is resilient and reversible. Initial hydraulic gradients ranged between  $4 \times 10^{-4}$  and  $2 \times 10^{-3}$ , while projected heads under SSP585 reduce them only by 5-10%. Our results also indicate that the tested magnitude of projected recharge changes (-10 to 20 %) only influences groundwater dynamics (e.g., hydraulic gradients and flux) and therefore advection to a limited extent, as compared with stronger impacts due to pumping (Bense et al., 2020; Klepikova et al., 2025).

555

More fundamental changes in basin-scale flow due to climatic variability would require sustained forcing beyond the 2100 horizon and evaluation of thermo-hydraulic-mechanical interactions. More fundamental changes in groundwater dynamics due to climatic variability would require a sustained forcing extended beyond the IPCC's

560

2100 horizon. In the absence of long-term climatic projections, modeling such changes over thousands of years to millennia typically relies on synthetic long-term scenarios, often inferred from paleoclimatic trends. Climatic cycles with wet and dry periods may result in amplitudes of GWL fluctuations up to 80 m (Zhou et al., 2020). Emplacement and subsequent retreat of continental ice sheets forced large pressure redistribution leading to reorganization or even a reversal of basin-scale groundwater flow (Frick et al., 2022a; Lemieux et al., 2008; Boulton et al., 1996).

565

The sustained decline in heads on plateaus relative to floodplains and river valleys, if exceeds 10–20 m, would approach magnitudes of the local terrain rise (for Brandenburg), being able to modify the basin-wide groundwater

dynamics. A reduction of hydraulic gradients leads to a smoother potentiometric surface, which has been shown to suppress local groundwater circulation and enhance regional flow systems (Havril et al., 2018). This is manifested by longer flow paths between areas of recharge and discharge, as the potentiometric surface falls below local drainage levels. To investigate such changes, attention must be given to the assumed density of the river network and river stage levels, since the inclusion of only the highest-order streams tends to enhance the regional flow systems (Haitjema and Mitchell-Bruker, 2005) and influence the resulting advection circulation patterns.

### 6.3 Effects of recharge projections on the subsurface thermal field

As shown in Sect. 5.3, sustained surface warming under the presence of groundwater advection is projected to affect ~~groundwatersubsurface~~ temperatures down to depths of 100–550 m by the end of the century. While the mean depth of penetration depends on the magnitude of ~~imposed~~ surface warming, lateral variations in advection rates can be explained by ~~changes in~~ hydraulic gradients, ~~varied~~ between surface domains and ~~by the~~ hydraulic conductivity distribution, which is controlled by geological domains.

#### Heat advection

The contrasting sensitivity of surface domains to climate change supports the conclusions of Burns et al. (2017) and Taniguchi (2021) that the thermal response of groundwater to surface warming is amplified in topographically elevated recharge areas (SD1) and attenuated in low-lying discharge areas (SD3). Such spatial differentiation in the magnitude of subsurface warming is controlled by the downward and upward components of the regional groundwater flow field, respectively.

~~The different sensitivity of surface domains to climate change supports the conclusions of Burns et al. (2017) and Taniguchi (2021) that this response is amplified in topographically elevated recharge areas (SD1), and subdued in low-lying discharge areas (SD3). This spatial differentiation is driven by the downward and upward components of the regional groundwater flow field, respectively.~~

Under the same degree of surface warming, it is the difference in recharge projections that impacts advection in Cenozoic units (SSP245 vs M1, SSP585 vs M2, M3 vs M4). However, scenarios with higher total recharge and a higher fraction of winter recharge (M1, M2, M4) did not reveal a reversal or a widespread buffering of the groundwater warming.

Present-day seasonality, with most recharge occurring between December and May, results in a mean annual recharge temperature approximately 3 °C lower than the mean surface temperature. However, when the effect of global warming is excluded, the isolated effect of further shifting recharge from warm to cold months leads to only a 0.1-0.2 °C reduction (Figure A3), since current recharge is already winter-dominated (Figure 3c).

A higher total recharge transfers more heat to the subsurface in the recharge zones compared with declining recharge scenarios, which becomes more evident under the stronger warming levels, leading to up to 0.4 °C of additional increase locally. Under steady-state conditions, advection-driven “cooling” may reach tens of degrees (Noack et al., 2013). However, in a transient model, subsurface cooling would require an increased advective flux to reach conduction-dominated reservoirs, transporting colder than in situ fluid, despite the parallel effects of surface warming. This is, however, unlikely because subsurface temperatures are more sensitive to changes in surface temperature than to changes in recharge, as inferred from 1-D analytical solutions of advection-diffusion sensitivity to upper boundary conditions (Kurylyk et al., 2017).

Thus, while advection plays a major role in heat transport in the first hundred meters, local enhancements and buffering of the climatic signal spatially compensate each other, irrespective of the recharge trend. This implies that projected changes in advection rates and seasonality have only minor effects on the basin-wide heat budget and can counteract the regional net heat gain from the surface warming only to a limited extent (Figure 11b).

These findings contrast with the results by Epting et al. (2021), who, in their modeling study of Swiss alluvial aquifers, inferred that under a high-end climate change scenario the cooling effect of increased winter recharge may overcome the warming due to rising surface temperatures. One possible explanation lies in the different hydrogeological conditions between the two study areas: in the study by Epting et al. (2021) groundwater is largely fed from rivers, potentially leading to a more direct response to runoff seasonality. This highlights how such feedback depends on local conditions, such as the type of infiltration (precipitation vs snowmelt and/or effluent conditions), vadose zone thickness and the presence of preferential flow pathways, and the water table type (recharge-controlled vs topography-controlled).

### 620 **Hydraulic conductivity distribution**

The downward component of groundwater flow is sensitive to the hydrostratification, particularly to the presence of units impermeable to flow. These aquitards force a shift in heat transport mechanism from advection to conduction, as inferred from  $Pe$  values, and additionally enhance lateral groundwater flow. In our regional model, the penetration depth of the warming signal largely coincides with the first resolved hydraulic barrier, the Rupelian Clay, at depths of 50–500 m, provided it is sufficiently thick. Potential exceptions occur due to the cross-flow through erosional windows in the Rupelian aquitard, allowing the global warming signal to reach underlying aquifers within the simulated timeframe (Figure 12a).

Local-scale models that additionally consider second-order heterogeneities within the Quaternary unit have demonstrated how intermediate aquitards or transitions between reservoir facies further control shallow-to-deep groundwater interactions (manifested, for example, in saltwater upconing) and lateral flow patterns (Chabab et al., 2022; Stackebrandt and Franke, 2015; Baldwin and Sprenger, 2024). This highlights that the degree of heterogeneity resolved by a model, particularly the depth and continuity of the first hydraulic barrier, is an important factor in the simulated extent of the subsurface response to climatic forcing.

### 635 **Water table elevation**

Given that the amplitude of the annual surface temperature cycle remains steady, the depth of the annual thermal envelope responds to changes in groundwater flux in a similar way to the penetration of the long-term warming discussed above. The regional decline of the water table combined with a reduced vertical flux is expected to increase temperature damping at the water table, almost doubling the extent of the unconfined aquifer not subjected to annual variability under SSP585 (Figure A4). Moreover, a water table decline below a certain level may deactivate the feedback mechanism between groundwater and the land-surface energy fluxes by restraining evapotranspiration from the saturated zone (Maxwell and Kollet, 2008).

Since the impact of evolving surface conditions was simulated in the groundwater model at monthly time steps, this study did not address the influence of the frequency and intensity of extreme precipitation events, which are projected to increase by up to 30 % in the study region (Nguyen et al., 2024; Pfeifer et al., 2021). Whether a reduced diffuse recharge from percolation via the unsaturated zone may enhance the role of heat conduction, yet

intermittent extreme precipitation events could still generate rapid preferential flow. Simulating the impact of preferential flow on the heat transport would require adding new physics or discrete elements to the simulation and much shorter, hourly to daily time steps (Beven and Germann, 2013).

#### 650 **6.4 Implications for geothermal energy utilization**

We have demonstrated that SSP245 and SSP585 scenarios lead to a mean net increase of 330 and 740 MJ m<sup>-2</sup> of stored thermal energy in the aquifers between the present and late-century periods, respectively (Figure 11). The estimated accumulated heat in the upper 100 m amounts to 180–380 MJ m<sup>-2</sup>, which is comparable to the 130–250 MJ m<sup>-2</sup> projected by Benz et al. (2024) for the same region as part of their global assessment. Further refinement  
655 of heat density distribution could be achieved by considering facies heterogeneity and accounting only for net reservoir volume within stratigraphic units (Frick et al., 2022b).

The accumulated thermal energy has the potential to be recycled in shallow geothermal systems, such as GSHP or borehole thermal energy storage (BTES). In the target installation interval between the water table and the depth of 100 m, our model predicts a mean increase of 1.5 °C for SSP585 (0.8 °C for SSP245). The projected  
660 accumulated heat in this interval is worth several months to a year of a single household's space heating consumption in Germany (Odyssee-Mure, 2024).

In urban environments, waste heat may contribute 40–50 % more to the accumulated subsurface heat compared to natural settings (Menberg et al., 2013; Rivera et al., 2017; Bayer et al., 2016). Surface temperature in the Berlin metropolitan area is up to 3 °C higher than in predominantly rural Brandenburg, leading to an incremental heat  
665 accumulation below the city (SenStadt, 2020; Tsy-pin et al., 2024). The assigned surface temperature BC for our study was assumed uniform in space. A potential effect of the additional variability associated with the urban heat island effect and a surface sealing is shown in Appendix B.

Despite projected aquifer net heat gains, climate change and urbanization can degrade the performance of open systems, such as LT-ATES: increased cooling demand in summer would result in a disproportional expansion of  
670 the warm plume, leading to a strong decline in cold well performance, driven by a mismatch between injection and production rates (Godinaud et al., 2025). Aquifers with high ambient groundwater velocities ( $>3 \times 10^{-4}$  m s<sup>-1</sup>) pose a risk for additional thermal energy losses in ATES systems due to groundwater displacement (Bloemendal and Hartog, 2018), while in closed systems, such as GSHP, elevated groundwater fluxes above  $1 \times 10^{-7}$  m s<sup>-1</sup> typically enhance subsurface heat exchange capacity, helping to sustain operating temperatures (Abesser et al.,  
675 2023).

Considering a typical 30-year lifespan of shallow geothermal installations, modeled change in ambient groundwater flux may reach ±10 %, depending on the recharge scenario. This points to the relevance of including at least surface temperature BC and ideally transient recharge or hydraulic head BC when modeling a system's performance during the design phase to account for the additional impact of climate evolution under specific local  
680 settings.

## **7 Conclusions**

We investigated the joint effects of surface warming and evolving recharge patterns on regional groundwater dynamics and subsurface heat transport for an area of ~~275,600~~ 275,600 km<sup>2</sup> in Central Europe. The advantage of testing

685 these effects with regional groundwater models is the ability to simulate complex 3-D flow patterns emerging from the interplay of topographic gradients and a heterogeneous permeability field.

Active shallow groundwater circulation in Quaternary fluvioglacial deposits is responsible for a deeper propagation of the surface warming signal on glacial plateaus, while buffering climatic impacts in floodplains and river valleys. ~~The first regional aquitard imposes the lower limit on downward advective heat transport, except where it is eroded. The first regional aquitard sets the ultimate depth limit of advective overprint, except where it is eroded.~~


690 The magnitude of groundwater temperature increase depends primarily on the global warming levelscenario: the mean sensitivity to surface temperature scenario is approximately 1.4 °C at the water table, while the difference between recharge scenarios contributes up to 0.4 °C between the present (2002-2021) and late-century (2081-2100) periods. A projected late-century decrease in annual recharge of 10–20 % or even a hypothetical increase

695 in the share of colder winter recharge has no capacity to reverse the ongoing groundwater warming trend. A decrease of vertical groundwater flux may locally buffer the progradation of the surface warming, however this will have minimal net effect on the total accumulated subsurface heat due to the long-term counterbalance of advective effects in recharge versus discharge zones. Related to this is a projected decline in hydraulic heads of up to 2–5 m under SSP585, leading to greater damping of the seasonal temperature fluctuations at the water table.


700 While global-scale assessments focus on conductive surface-groundwater heat exchange, local differences in hydraulic gradients can significantly modulate spatial patterns of subsurface warming. Repeated temperature logs are rarely able to test variations between recharge and discharge areas, or they are acquired in urban areas where recharge effects are hindered. Extending monitoring networks to link groundwater warming with landscape hydrology can help to advance field evidence of the coupled effects discussed in this study.

705 Our study suggests that while future recharge rates will undoubtedly have direct implications on groundwater availability, they should also be taken into account when assessing the shallow geothermal potential and temperature-dependent ecosystem under climate change.


#### Appendix A: Additional figures and tables

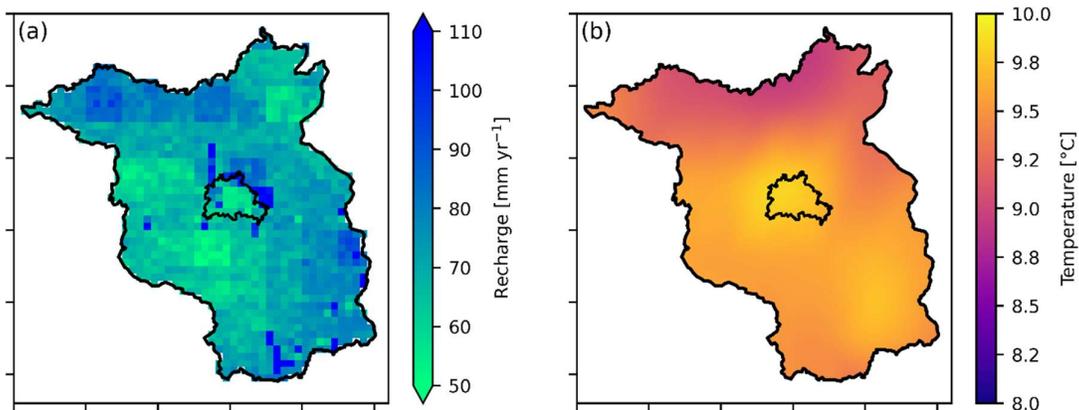


710 **Figure A1: Variability of groundwater recharge and near-surface air temperature across the study area for the present period.**

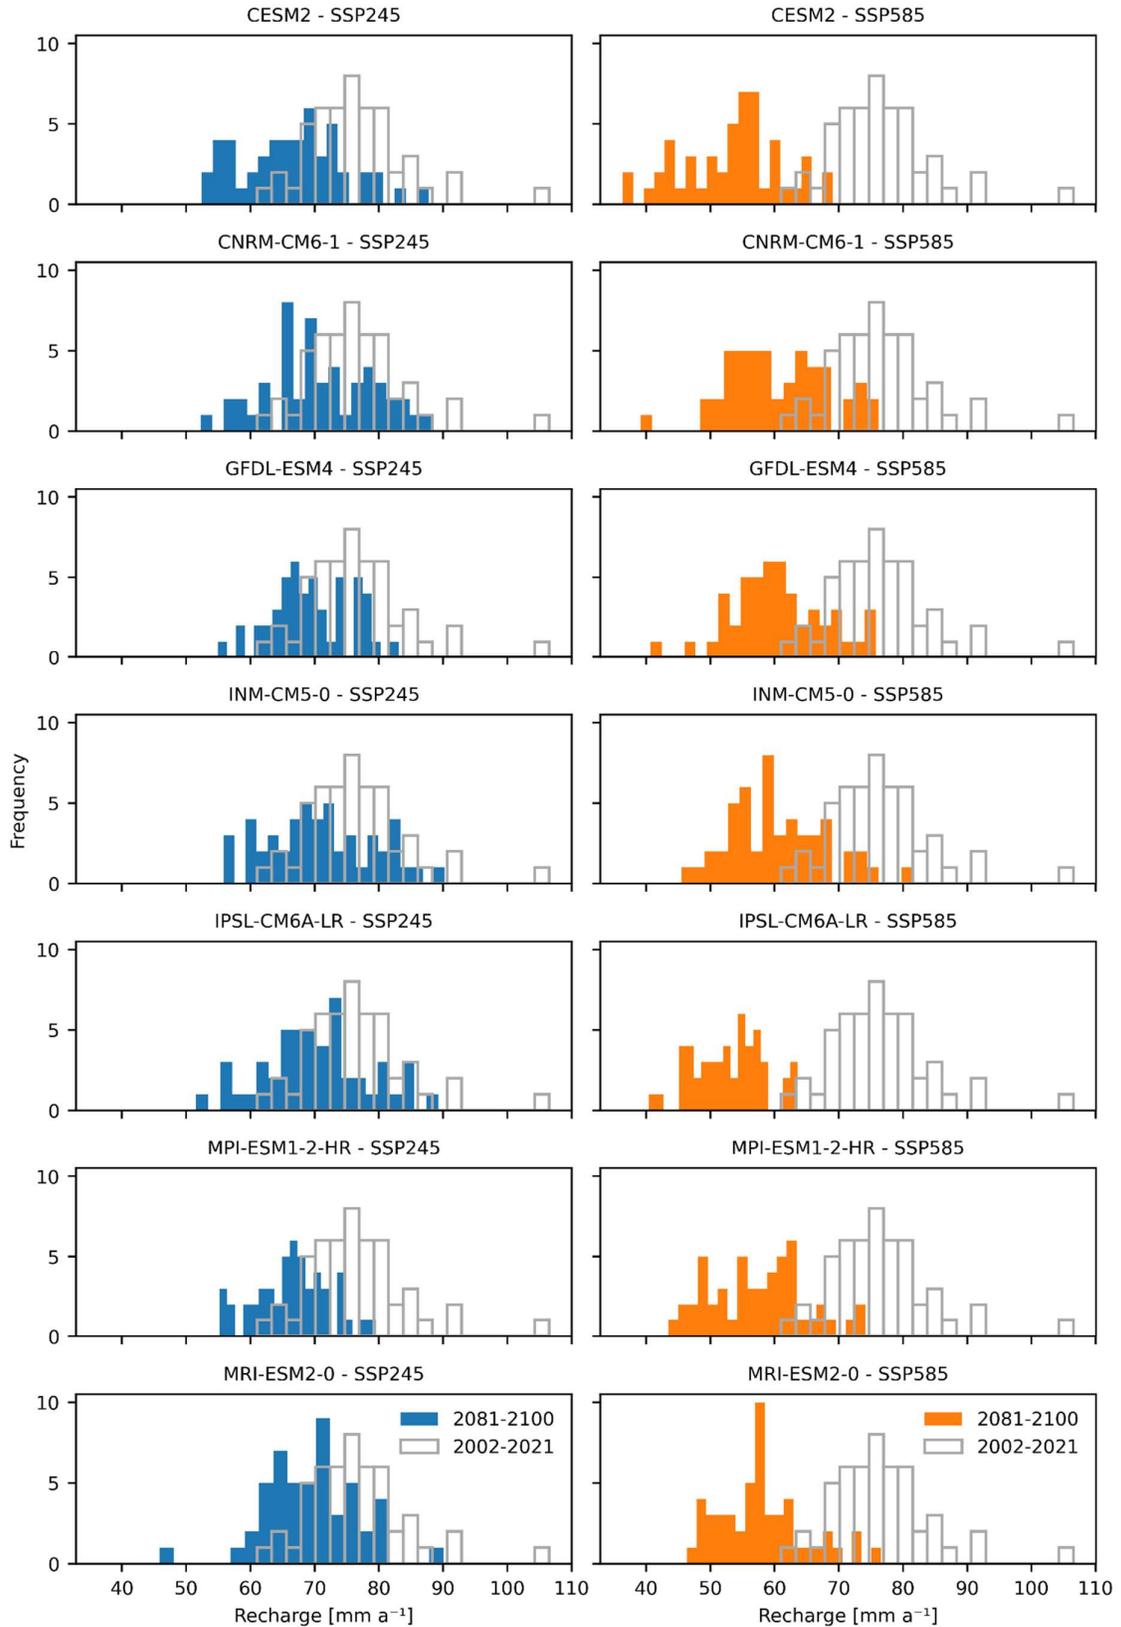

**Figure A2: Histograms of mean annual recharge for Brandenburg, showing the distribution of 50 nsRWG realizations between the present and late-century periods for each GCM. Left: SSP245; right: SSP585.**

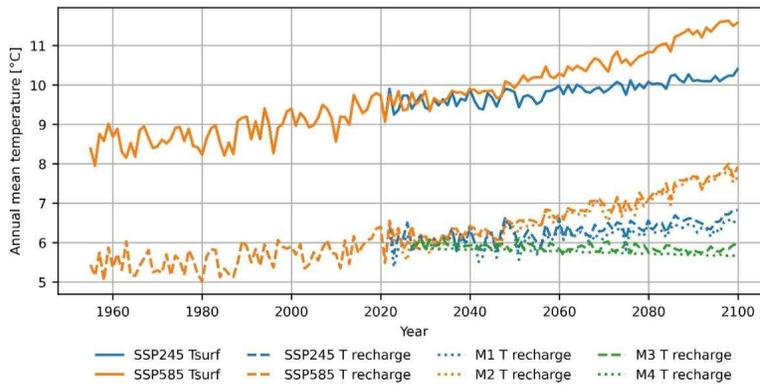

**Figure A3: Comparison between mean surface temperature and recharge temperatures, with the latter derived as a weighted average of monthly surface temperatures by groundwater recharge rate.**

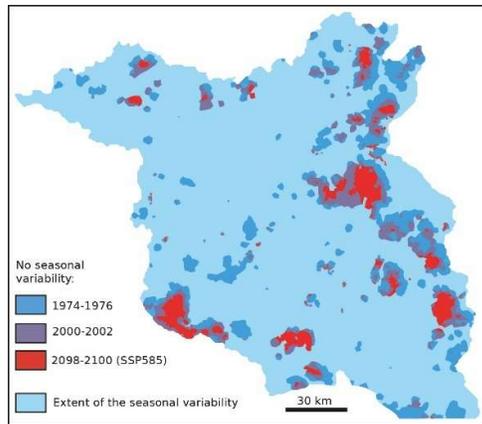

**720 Figure A4: Extent of seasonal temperature damping at the water table during three periods. As a threshold for damping, we used a magnitude of temperature fluctuations <1 °C.**

**725 Table A1: Hydraulic and thermal properties of the groundwater model units: K – hydraulic conductivity,  $\phi$  – porosity,  $S_y$  – specific yield,  $S_s$  – specific storage,  $C$  – volumetric heat capacity,  $\lambda$  – thermal conductivity, and  $Q_r$  – heat production. Properties were kept identical across scenarios to isolate climatic controls and were taken from previous studies (Scheck and Bayer, 1999; Noack et al., 2013) except Quaternary and post-Rupelian Tertiary units, which were subject to calibration.**

Unit	$K_{xy}$ [ $m\ s^{-1}$ ]	$K_z$ [ $m\ s^{-1}$ ]	$\Phi$	$S_y / S_s$ [ $m^{-1}$ ]	$C$ [ $J\ m^{-3}\ K^{-1}$ ]	$\lambda$ [ $W\ m^{-1}\ K^{-1}$ ]	$Q_r$ ( $W\ m^{-3}$ )
Quaternary	$2.1 \times 10^{-4}$	$1.2 \times 10^{-7}$	0.23	$0.1 / 1 \times 10^{-4}$	$1.7 \times 10^{-6}$	1.5	$7.0 \times 10^{-7}$
post-Rupelian Tertiary	$5.8 \times 10^{-7}$	$5.8 \times 10^{-8}$	0.23	$-/1 \times 10^{-4}$	$1.7 \times 10^{-6}$	1.5	$7.0 \times 10^{-7}$
Rupelian	$1.2 \times 10^{-9}$	$1.2 \times 10^{-10}$	0.2	$-/1 \times 10^{-4}$	$1.8 \times 10^{-6}$	1	$4.5 \times 10^{-7}$
pre-Rupelian Tertiary	$1.2 \times 10^{-4}$	$1.2 \times 10^{-8}$	0.1	$-/1 \times 10^{-4}$	$1.7 \times 10^{-6}$	1.9	$3.0 \times 10^{-7}$
Upper Cretaceous	$1.2 \times 10^{-6}$	$1.2 \times 10^{-7}$	0.1	$-/1 \times 10^{-4}$	$2.3 \times 10^{-6}$	1.9	$3.0 \times 10^{-7}$
Lower Cretaceous	$1.2 \times 10^{-6}$	$1.2 \times 10^{-7}$	0.13	$-/1 \times 10^{-4}$	$2.3 \times 10^{-6}$	2	$1.4 \times 10^{-6}$
Jurassic	$1.2 \times 10^{-6}$	$1.2 \times 10^{-7}$	0.13	$-/1 \times 10^{-4}$	$2.2 \times 10^{-6}$	2	$1.4 \times 10^{-6}$
Keuper	$1.2 \times 10^{-7}$	$1.2 \times 10^{-8}$	0.06	$-/1 \times 10^{-4}$	$2.3 \times 10^{-6}$	2.3	$1.4 \times 10^{-6}$
Water					$4.2 \times 10^{-6}$	0.65	0

## Appendix B. Subsurface warming in urban conditions

730 Urban environments exhibit distinct peculiarities in their shallow subsurface PT field due to excess heat from the urban climate and infrastructure, extensive surface sealing, altered soil structure, and controlled water levels. Although the study area is predominantly rural, with agricultural and natural land cover, approximately 4 % is occupied by the city of Berlin with the artificial land cover.

735 Most of the repeated vertical temperature profiles suitable for model validation were obtained within the city limits. The measurements obtained over the past four decades showcase a reversal of the geothermal gradient, associated with the anthropogenic warming (Figure B1). In the study area, an inflection point, where the temperature gradient shifts from negative to positive, commonly occurs at 60–70 m depth. The maximum depth of the recorded subsurface temperature increase occurs at 90–120 m (SenStadt, 2020). The shape of the temperature profiles indicates gradual, conduction-dominated groundwater warming with low advection rates due to low percolation rates and enhanced surface heating.

740 We conducted a sensitivity realization in the groundwater model by locally adjusting BCs and calibrating model properties within the urban domain. The following modifications were assumed for the model inputs:

- Surface temperature forcing adjusted to reach a mean annual temperature of +11.1 °C by 2024, compared to +9.7 °C for the entire study area.
- 745 – Groundwater recharge reduced by a factor of 10 to represent surface sealing and.
- Quaternary permeability in selected layers reduced by a factor of 100 to represent intermediate aquitards.

This model scenario was simulated for the period 1955-2024. Modeled 1-D temperature profiles demonstrate overall good consistency with the measured data in depths of the inflection point and penetration of long-term thermal disturbance (Figure B1). Lower absolute temperatures relative to Distributed Temperature Sensing (DTS) data can be due to local heat sources and DTS interpretation uncertainty.

750 Overall, this sensitivity scenario confirms higher historical rates of warming within the subsurface urban heat island under conditions of impeded recharge and additional heat inputs. Such a trend presents both an opportunity for waste heat recovery and a risk to groundwater quality and replenishment. Further improvement in reproducing the absolute magnitude of subsurface warming would require development of localized models with refined geological structure, parametrization, and a higher mesh resolution.

755

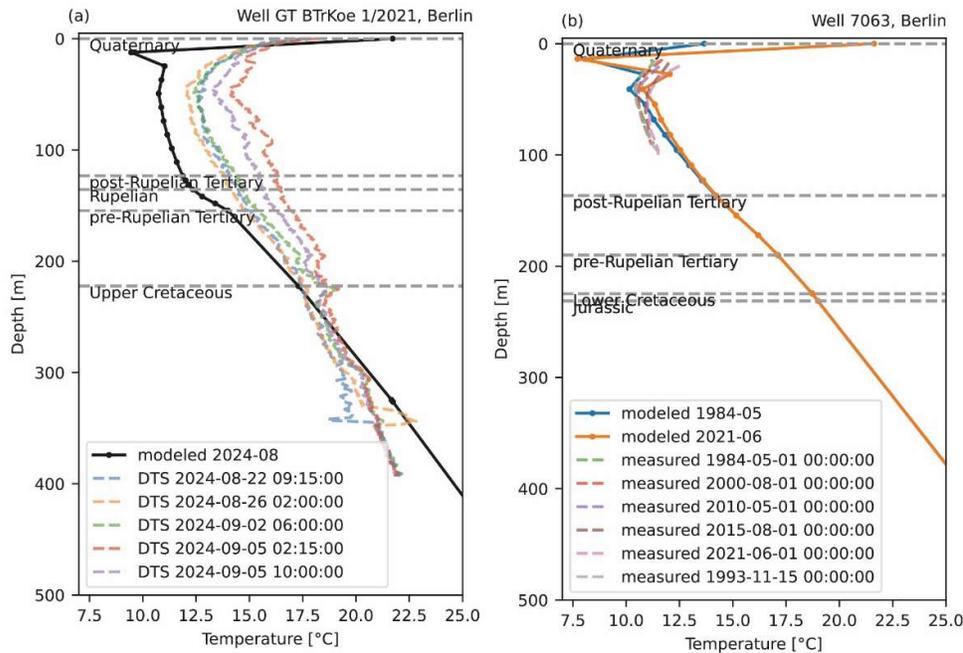


Figure B1: Comparison between the simulated **depth-temperature** profile (solid line) and (a) distributed temperature sensing (DTS) fiber-optic cable measurements in the ATEs research well in Adlershof, Berlin and (b) temperature logging in a monitoring well in Neukölln, Berlin (dashed lines). Temperature difference in repeated DTS profiles result from a cementation job and other technical interferences. Marked geological units are derived from the geological model. Measured data is taken from Pei et al. (2024), Singer (2025), and SenStadt (2020).

### Data availability

The simulated nsRWG weather forcings, **and values of mHM-recharge, and groundwater heads,** and temperatures are available for download via associated data publication (<https://dataservices.gfz-potsdam.de/panmetaworks/review/f623d9bc294e3125862e0b0946043c09f5463eb3210b171324c55de88139cd0f4> ~~or~~ <https://doi.org/10.5880/GFZ.CUEG.2025.001>).

### Author Contribution

MT, VDN, and MC conceptualized the study and developed the methodology, with further contributions from GB and EL. VDN conducted weather generator and hydrologic model simulations. MT carried out groundwater modeling, performed the formal analysis, and prepared the visualization. MSW and CK provided supervision. MT prepared the original draft of the manuscript, with all co-authors contributing to the review and editing.

### Competing interests

The authors declare that they have no conflict of interest.

## 775 Acknowledgements

This work utilized high-performance computing resources made possible by funding from the Ministry of Science, Research and Culture of the State of Brandenburg (MWFK) and are operated by the IT Services and Operations unit of the Helmholtz Centre Potsdam. An academic license for FEFLOW software was kindly provided by DHI A/G. The style and grammar of the manuscript were improved using AI tools (OpenAI, Perplexity AI).

780 The authors would like to thank Andreas Güntner ~~and~~, Mark Grmek, and Alan Yu for their valuable discussions.

## Financial Support

MT received financial support for the research and publication of this article from GFZ Helmholtz Centre for Geosciences. Open Access funding enabled and organized by Project DEAL. VDN was supported by the German Federal Ministry of Education and Research (projects 01LP1903E and 01LP2324E) within the ClimXtreme network (FONA3). ~~Open Access funding enabled and organized by Project DEAL~~.

785

## References

- Abesser, C., Schincariol, R. A., Raymond, J., García-Gil, A., Drysdale, R., Piatek, A., Giordano, N., Jaziri, N., and Molson, J.: Case Studies of Geothermal System Response to Perturbations in Groundwater Flow and Thermal Regimes, *Groundwater*, 61, 255-273, <https://doi.org/10.1111/gwat.13086>, 2023.
- 790 Alencar, P. H. L., Arndt, S., Namba, K., Somogyvári, M., Bart, F., Brill, F., Dueñas, J., Feindt, P., Johnson, D., Mahmoodi, N., Merz, C., Mukherjee, S., Nissen, K., Paton, E. N., Sauter, T., Tetzlaff, D., Tügel, F., Vogelpohl, T., Vulova, S. V., Zamani, B., and Zhang, H. H.: Brief communication: What do we need to know? Ten questions about climate and water challenges in Berlin-Brandenburg, *EGU sphere*, 2025, 1-11, <https://doi.org/10.5194/egusphere-2025-428>, 2025.
- 795 Anderson, M. P.: Heat as a Ground Water Tracer, *Groundwater*, 43, 951-968, <https://doi.org/10.1111/j.1745-6584.2005.00052.x>, 2005.
- Bachu, S.: Analysis of heat transfer processes and geothermal pattern in the Alberta Basin, Canada, *Journal of Geophysical Research: Solid Earth*, 93, 7767-7781, <https://doi.org/10.1029/JB093iB07p07767>, 1988.
- 800 Baldwin, D. and Sprenger, C.: Simplified model of a two-layer aquifer system under stress of geogenic groundwater salinization, Kompetenzzentrum Wasser Berlin gGmbH, <https://www.kompetenz-wasser.de/de/forschung/publikationen/simplified-model-of-a-two-layer-aquifer-system-under-stress-of-geogenic-groundwater-salinization>, 2024.
- Bayer, P., Rivera, J. A., Schweizer, D., Schärli, U., Blum, P., and Rybach, L.: Extracting past atmospheric warming and urban heating effects from borehole temperature profiles, *Geothermics*, 64, 289-299, <https://doi.org/10.1016/j.geothermics.2016.06.011>, 2016.
- 805 Bense, V. F. and Kurylyk, B. L.: Tracking the Subsurface Signal of Decadal Climate Warming to Quantify Vertical Groundwater Flow Rates, *Geophysical Research Letters*, 44, 12,244-212,253, <https://doi.org/10.1002/2017GL076015>, 2017.
- Bense, V. F., Kurylyk, B. L., de Bruin, J. G. H., and Visser, P.: Repeated Subsurface Thermal Profiling to Reveal Temporal Variability in Deep Groundwater Flow Conditions, *Water Resources Research*, 56, e2019WR026913, <https://doi.org/10.1029/2019WR026913>, 2020.
- 810 Bense, V. F., Kurylyk, B. L., van Daal, J., van der Ploeg, M. J., and Carey, S. K.: Interpreting Repeated Temperature-Depth Profiles for Groundwater Flow, *Water Resources Research*, 53, 8639-8647, <https://doi.org/10.1002/2017WR021496>, 2017.
- 815 Benz, S. A., Irvine, D. J., Rau, G. C., Bayer, P., Menberg, K., Blum, P., Jamieson, R. C., Griebler, C., and Kurylyk, B. L.: Global groundwater warming due to climate change, *Nature Geoscience*, 17, 545-551, <https://doi.org/10.1038/s41561-024-01453-x>, 2024.
- Berghuijs, W. R., Collenteur, R. A., Jasechko, S., Jaramillo, F., Luijendijk, E., Moeck, C., van der Velde, Y., and Allen, S. T.: Groundwater recharge is sensitive to changing long-term aridity, *Nature Climate Change*, 14, 357-363, <https://doi.org/10.1038/s41558-024-01953-z>, 2024.
- 820 Beven, K. and Germann, P.: Macropores and water flow in soils revisited, *Water Resources Research*, 49, 3071-3092, <https://doi.org/10.1002/wrcr.20156>, 2013.

- Bloemendal, M. and Hartog, N.: Analysis of the impact of storage conditions on the thermal recovery efficiency of low-temperature ATEs systems, *Geothermics*, 71, 306-319, <https://doi.org/10.1016/j.geothermics.2017.10.009>, 2018.
- 825 Boulton, G. S., Caban, P. E., van Gijssel, K., Leijnse, A., Punkari, M., and van Weert, F. H. A.: The impact of glaciation on the groundwater regime of Northwest Europe, *Global and Planetary Change*, 12, 397-413, [https://doi.org/10.1016/0921-8181\(95\)00030-5](https://doi.org/10.1016/0921-8181(95)00030-5), 1996.
- Bredehoeft, J. D. and Papadopoulos, I. S.: Rates of vertical groundwater movement estimated from the Earth's thermal profile, *Water Resources Research*, 1, 325-328, <https://doi.org/10.1029/WR001i002p00325>, 1965.
- 830 Brill, F., Alencar, P. H. L., Zhang, H., Boeing, F., Hüttel, S., and Lakes, T.: Exploring drought hazard, vulnerability, and related impacts on agriculture in Brandenburg, *Nat. Hazards Earth Syst. Sci.*, 24, 4237-4265, <https://doi.org/10.5194/nhess-24-4237-2024>, 2024.
- Bruhn, D. K., Silke, Regensburg, Simona; Schumann, Felix: Wärmeversorgung in Berlin und Brandenburg durch Geoenergie, Position Paper, [https://www.gfz-potsdam.de/fileadmin/gfz/sec48/pdf/de/Netzwerke/GEB/Positionspapier\\_GEB\\_2.pdf](https://www.gfz-potsdam.de/fileadmin/gfz/sec48/pdf/de/Netzwerke/GEB/Positionspapier_GEB_2.pdf), 2023.
- 835 Brunner, L., Pendergrass, A. G., Lehner, F., Merrifield, A. L., Lorenz, R., and Knutti, R.: Reduced global warming from CMIP6 projections when weighting models by performance and independence, *Earth Syst. Dynam.*, 11, 995-1012, 10.5194/esd-11-995-2020, 2020.
- 840 Burns, E. R., Zhu, Y., Zhan, H., Manga, M., Williams, C. F., Ingebritsen, S. E., and Dunham, J. B.: Thermal effect of climate change on groundwater-fed ecosystems, *Water Resources Research*, 53, 3341-3351, <https://doi.org/10.1002/2016WR020007>, 2017.
- Chabab, E., Kühn, M., and Kempka, T.: Upwelling mechanisms of deep saline waters via Quaternary erosion windows considering varying hydrogeological boundary conditions, *Adv. Geosci.*, 58, 47-54, <https://doi.org/10.5194/adgeo-58-47-2022>, 2022.
- 845 Cornes, R. C., van der Schrier, G., van den Besselaar, E. J. M., and Jones, P. D.: An Ensemble Version of the E-OBS Temperature and Precipitation Data Sets, *Journal of Geophysical Research: Atmospheres*, 123, 9391-9409, <https://doi.org/10.1029/2017JD028200>, 2018.
- Cuthbert, M. O., Taylor, R. G., Favreau, G., Todd, M. C., Shamsudduha, M., Villholth, K. G., MacDonald, A. M., Scanlon, B. R., Kotchoni, D. O. V., Vouillamoz, J.-M., Lawson, F. M. A., Adjomayi, P. A., Kashaigili, J., Seddon, D., Sorensen, J. P. R., Ebrahim, G. Y., Owor, M., Nyenje, P. M., Nazoumou, Y., Goni, I., Ousmane, B. I., Sibanda, T., Ascott, M. J., Macdonald, D. M. J., Agyekum, W., Koussoubé, Y., Wanke, H., Kim, H., Wada, Y., Lo, M.-H., Oki, T., and Kukuric, N.: Observed controls on resilience of groundwater to climate variability in sub-Saharan Africa, *Nature*, 572, 230-234, 10.1038/s41586-019-1441-7, 2019.
- 855 Dams, J., Salvatore, E., Van Daele, T., Ntegeka, V., Willems, P., and Batelaan, O.: Spatio-temporal impact of climate change on the groundwater system, *Hydrology and Earth System Sciences*, 16, 1517-1531, 2012.
- Deming, D., Sass, J. H., Lachenbruch, A. H., and De Rito, R. F.: Heat flow and subsurface temperature as evidence for basin-scale ground-water flow, North Slope of Alaska, *GSA Bulletin*, 104, 528-542, 10.1130/0016-7606(1992)104<0528:Hfsta>2.3.Co;2, 1992.
- 860 Desai, C. S. and Li, G. C.: A residual flow procedure and application for free surface flow in porous media, *Advances in Water Resources*, 6, 27-35, [https://doi.org/10.1016/0309-1708\(83\)90076-3](https://doi.org/10.1016/0309-1708(83)90076-3), 1983.
- DeutscherWetterDienst - Climate Data Center: Grids of monthly averaged daily air temperature (2m) over Germany, version v1.0, [https://opendata.dwd.de/climate\\_environment/CDC/](https://opendata.dwd.de/climate_environment/CDC/), 2021.
- Diersch, H.-J. G.: FEFLOW: finite element modeling of flow, mass and heat transport in porous and fractured media, 1, Springer Science & Business Media, <https://doi.org/10.1007/978-3-642-38739-5>, 2013.
- 865 Doherty, J.: Calibration and uncertainty analysis for complex environmental models, *Watermark Numerical Computing*, 2015.
- Domenico, P. A. and Schwartz, F. W.: *Physical and chemical hydrogeology*, 2, John Wiley & Sons, Inc, 1997.
- Epting, J., Michel, A., Affolter, A., and Huggenberger, P.: Climate change effects on groundwater recharge and temperatures in Swiss alluvial aquifers, *Journal of Hydrology X*, 11, 100071, <https://doi.org/10.1016/j.hydroa.2020.100071>, 2021.
- 870 Eyring, V., Bony, S., Meehl, G. A., Senior, C. A., Stevens, B., Stouffer, R. J., and Taylor, K. E.: Overview of the Coupled Model Intercomparison Project Phase 6 (CMIP6) experimental design and organization, *Geosci. Model Dev.*, 9, 1937-1958, 10.5194/gmd-9-1937-2016, 2016.
- 875 Förster, A.: Analysis of borehole temperature data in the Northeast German Basin: continuous logs versus bottom-hole temperatures, *Petroleum Geoscience*, 7, 241-254, 10.1144/petgeo.7.3.241, 2001.
- Francke, T. and Heistermann, M.: Groundwater recharge in Brandenburg is declining - but why?, *EGU sphere*, 2025, 1-28, 10.5194/egusphere-2025-222, 2025.
- 880 Frick, M., Cacace, M., Klemann, V., Tarasov, L., and Scheck-Wenderoth, M.: Hydrogeologic and Thermal Effects of Glaciations on the Intracontinental Basins in Central and Northern Europe, *Frontiers in Water*, 4, 10.3389/frwa.2022.818469, 2022a.

- Frick, M., Kranz, S., Norden, B., Bruhn, D., and Fuchs, S.: Geothermal Resources and ATES Potential of Mesozoic Reservoirs in the North German Basin, *Energies*, 15, 1980, 2022b.
- 885 Fuchs, S., Förster, A., and Norden, B.: Evaluation of the terrestrial heat flow in Germany: A case study for the reassessment of global continental heat-flow data, *Earth-Science Reviews*, 235, 104231, <https://doi.org/10.1016/j.earscirev.2022.104231>, 2022.
- GERICS - Climate-Service Center Germany: Klima-Ausblick Brandenburg, Hamburg, [https://www.climate-service-center.de/products\\_and\\_publications/fact\\_sheets/climate\\_fact\\_sheets/detail/080919/index.php.de](https://www.climate-service-center.de/products_and_publications/fact_sheets/climate_fact_sheets/detail/080919/index.php.de), 2019.
- 890 Goderniaux, P., Brouyère, S., Blenkinsop, S., Burton, A., Fowler, H. J., Orban, P., and Dassargues, A.: Modeling climate change impacts on groundwater resources using transient stochastic climatic scenarios, *Water Resources Research*, 47, <https://doi.org/10.1029/2010WR010082>, 2011.
- Godinaud, J., Pryet, A., Bayer, P., and Larroque, F.: Impact of land cover and climate change on Aquifer Thermal and Energy Storage (ATES) system performance, *Geothermics*, 127, 103262, <https://doi.org/10.1016/j.geothermics.2025.103262>, 2025.
- 895 Gosling, S. N., Taylor, R. G., Arnell, N. W., and Todd, M. C.: A comparative analysis of projected impacts of climate change on river runoff from global and catchment-scale hydrological models, *Hydrol. Earth Syst. Sci.*, 15, 279-294, 10.5194/hess-15-279-2011, 2011.
- Güntner, A., Sharifi, E., Behzadpour, S., Boergens, E., Dahle, C., Darbeheshti, N., Dobsław, H., Dorigo, W., Dussailant, I., Flechtner, F., Haas, J., Jäggi, A., Kidd, R., Kosmale, M., Kvas, A., Luojus, K., Mayer-Gürr, T., Meyer, U., Pasik, A., Paul, F., Pedinotti, V., Preimesberger, W., Ruz Vargas, C., Vayre, M., Zemp, M.: Global Gravity-based Groundwater Product (G3P). V. 1.11., GFZ Data Services, <https://doi.org/10.5880/G3P.2023.001>, 2023.
- 900 Guse, B., Han, L., Kumar, R., Rakovec, O., Luedtke, S., Herzog, A., Thober, S., Samaniego, L., and Wagener, T.: Spatio-Temporal Consistency and Variability in Parameter Dominance on Simulated Hydrological Fluxes and State Variables, *Water Resources Research*, 60, e2023WR036822, <https://doi.org/10.1029/2023WR036822>, 2024.
- Haitjema, H. M. and Mitchell-Bruker, S.: Are Water Tables a Subdued Replica of the Topography?, *Groundwater*, 43, 781-786, <https://doi.org/10.1111/j.1745-6584.2005.00090.x>, 2005.
- 910 Han, L., Merz, B., Nguyen, V. D., Guse, B., Samaniego, L., Schröter, K., and Vorogushyn, S.: Recombining past event precipitation and antecedent catchment states generates unprecedented floods, *Communications Earth & Environment*, 6, 692, <https://doi.org/10.1038/s43247-025-02691-6>, 2025.
- Hargreaves, G. and Samani, Z.: Reference Crop Evapotranspiration from Temperature, *Applied Engineering in Agriculture*, 1, 96-99, <https://doi.org/10.13031/2013.26773>, 1985.
- 915 Hattermann, F. F., Post, J., Krysanova, V., Conradt, T., and Wechsung, F.: Assessment of water availability in a Central-European River Basin (Elbe) under climate change, *Advances in Climate Change Research*, 4, 42, 2008.
- Havril, T., Tóth, Á., Molson, J. W., Galsa, A., and Mádl-Szőnyi, J.: Impacts of predicted climate change on groundwater flow systems: Can wetlands disappear due to recharge reduction?, *Journal of Hydrology*, 563, 1169-1180, <https://doi.org/10.1016/j.jhydrol.2017.09.020>, 2018.
- 920 Hemmerle, H. and Bayer, P.: Climate Change Yields Groundwater Warming in Bavaria, Germany, *Frontiers in Earth Science*, Volume 8 - 2020, 10.3389/feart.2020.575894, 2020.
- Hemmerle, H., Ferguson, G., Blum, P., and Bayer, P.: The evolution of the geothermal potential of a subsurface urban heat island, *Environmental Research Letters*, 17, 084018, <https://doi.org/10.1088/1748-9326/ac7e60>, 2022.
- 925 Hersbach, H., Bell, B., Berrisford, P., Hirahara, S., Horányi, A., Muñoz-Sabater, J., Nicolas, J., Peubey, C., Radu, R., and Schepers, D.: The ERA5 global reanalysis, *Quarterly journal of the royal meteorological society*, 146, 1999-2049, <https://doi.org/10.1002/qj.3803>, 2020.
- IPCC: Climate Change 2023: Synthesis Report. Contribution of Working Groups I, II and III to the Sixth Assessment Report of the Intergovernmental Panel on Climate Change [Core Writing Team, H. Lee and J. Romero (eds.)], IPCC, Geneva, Switzerland, 184, doi:10.59327/IPCC/AR6-9789291691647, 2023.
- 930 Irvine, D. J., Cartwright, I., Post, V. E. A., Simmons, C. T., and Banks, E. W.: Uncertainties in vertical groundwater fluxes from 1-D steady state heat transport analyses caused by heterogeneity, multidimensional flow, and climate change, *Water Resources Research*, 52, 813-826, <https://doi.org/10.1002/2015WR017702>, 2016.
- Jing, M., Kumar, R., Heße, F., Thober, S., Rakovec, O., Samaniego, L., and Attinger, S.: Assessing the response of groundwater quantity and travel time distribution to 1.5, 2, and 3 °C global warming in a mesoscale central German basin, *Hydrol. Earth Syst. Sci.*, 24, 1511-1526, <https://doi.org/10.5194/hess-24-1511-2020>, 2020.
- 935 Klepikova, M.: Groundwater warming, *Nature Geoscience*, 17, 487-488, 10.1038/s41561-024-01461-x, 2024.
- Klepikova, M., Bense, V., Le Borgne, T., Guihéneuf, N., and Bour, O.: Impact of groundwater extraction on subsurface thermal regimes, *Environmental Research Letters*, 20, 054048, 10.1088/1748-9326/adc8bb, 2025.
- Kooi, H.: Groundwater flow as a cooling agent of the continental lithosphere, *Nature Geoscience*, 9, 227-230, <https://doi.org/2011.10.1038/ngeo2642>, 2016.
- 940 Krawczyk, C. M. and Schulze, A.: Geophysikalische und geochemische Landesuntersuchung-Seismik, in: *Geologie von Brandenburg*, edited by: Franke, W. S. D. P., Schweizerbart, Stuttgart, Germany. , 508-513, 2015.

- Kumar, R., Samaniego, L., Thober, S., Rakovec, O., Marx, A., Wanders, N., Pan, M., Hesse, F., and Attinger, S.: Multi-Model Assessment of Groundwater Recharge Across Europe Under Warming Climate, *Earth's Future*, 13, e2024EF005020, <https://doi.org/10.1029/2024EF005020>, 2025.
- 945 Kurylyk, B. L., Bourque, C. P. A., and MacQuarrie, K. T. B.: Potential surface temperature and shallow groundwater temperature response to climate change: an example from a small forested catchment in east-central New Brunswick (Canada), *Hydrol. Earth Syst. Sci.*, 17, 2701-2716, <https://doi.org/10.5194/hess-17-2701-2013>, 2013.
- 950 Kurylyk, B. L., Irvine, D. J., and Bense, V. F.: Theory, tools, and multidisciplinary applications for tracing groundwater fluxes from temperature profiles, *WIREs Water*, 6, e1329, <https://doi.org/10.1002/wat2.1329>, 2019.
- Kurylyk, B. L., MacQuarrie, K. T. B., and Voss, C. I.: Climate change impacts on the temperature and magnitude of groundwater discharge from shallow, unconfined aquifers, *Water Resources Research*, 50, 3253-3274, <https://doi.org/10.1002/2013WR014588>, 2014.
- 955 Kurylyk, B. L., MacQuarrie, K. T. B., Caissie, D., and McKenzie, J. M.: Shallow groundwater thermal sensitivity to climate change and land cover disturbances: derivation of analytical expressions and implications for stream temperature modeling, *Hydrol. Earth Syst. Sci.*, 19, 2469-2489, <https://doi.org/10.5194/hess-19-2469-2015>, 2015.
- Kurylyk, B. L., Irvine, D. J., Carey, S. K., Briggs, M. A., Werkema, D. D., and Bonham, M.: Heat as a groundwater tracer in shallow and deep heterogeneous media: Analytical solution, spreadsheet tool, and field applications, *Hydrological Processes*, 31, 2648-2661, <https://doi.org/10.1002/hyp.11216>, 2017.
- 960 Lang, J., Bebiolka, A., Noack, V., Schützke, J., Weihmann, S., and Breuer, S.: The impact of the structural framework of the North German Basin on Pleistocene tunnel-valley formation, *Boreas*, n/a, <https://doi.org/10.1111/bor.12694>, 2025.
- Lemieux, J.-M., Sudicky, E. A., Peltier, W. R., and Tarasov, L.: Simulating the impact of glaciations on continental groundwater flow systems: 1. Relevant processes and model formulation, *Journal of Geophysical Research: Earth Surface*, 113, <https://doi.org/10.1029/2007JF000928>, 2008.
- 965 LfU: Landesamt für Umwelt Brandenburg - Auskunftsplattform Wasser (APW), <https://apw.brandenburg.de/>, last access: 01/10/2024.
- Liesch, T. and Wunsch, A.: Aquifer responses to long-term climatic periodicities, *Journal of Hydrology*, 572, 226-242, <https://doi.org/10.1016/j.jhydrol.2019.02.060>, 2019.
- 970 Littke, R., Bayer, U., Gajewski, D., and Nelskamp, S.: Dynamics of complex intracontinental basins: the central European basin system, Springer Science & Business Media, Berlin Heidelberg, 2008.
- Luijendijk, E.: The role of fluid flow in the thermal history of sedimentary basins: Inferences from thermochronology and numerical modeling in the Roer Valley Graben, southern Netherlands, Vrije Universiteit Amsterdam, 2012.
- 975 Marx, A., Boeing, F., Rakovec, O., Müller, S., Can, Ö., Malla, C., Peichl, M., and Samaniego, L.: Auswirkungen des Klimawandels auf Wasserbedarf und -dargebot, *WASSERWIRTSCHAFT*, 111, 14-19, <https://doi.org/10.1007/s35147-021-0905-5>, 2021.
- Maxwell, R. M. and Kollet, S. J.: Interdependence of groundwater dynamics and land-energy feedbacks under climate change, *Nature Geoscience*, 1, 665-669, 10.1038/ngeo315, 2008.
- 980 Menberg, K., Bayer, P., Zosseder, K., Rumohr, S., and Blum, P.: Subsurface urban heat islands in German cities, *Science of The Total Environment*, 442, 123-133, <https://doi.org/10.1016/j.scitotenv.2012.10.043>, 2013.
- Merrifield, A. L., Brunner, L., Lorenz, R., Humphrey, V., and Knutti, R.: Climate model Selection by Independence, Performance, and Spread (ClimSIPS v1.0.1) for regional applications, *Geosci. Model Dev.*, 16, 4715-4747, 10.5194/gmd-16-4715-2023, 2023.
- 985 Ministerium für Wirtschaft: Arbeit und Energie Brandenburg: Geothermie, <https://mwae.brandenburg.de/de/geothermie/bb1.c.478390.de>, last access: 6/12/2023.
- Moeck, C., Brunner, P., and Hunkeler, D.: The influence of model structure on groundwater recharge rates in climate-change impact studies, *Hydrogeology Journal*, 24, 1171-1184, 10.1007/s10040-016-1367-1, 2016.
- 990 Nguyen, V. D., Vorogushyn, S., Nissen, K., Brunner, L., and Merz, B.: A non-stationary climate-informed weather generator for assessing future flood risks, *Adv. Stat. Clim. Meteorol. Oceanogr.*, 10, 195-216, <https://doi.org/10.5194/asemo-10-195-2024>, 2024.
- Noack, V., Scheck-Wenderoth, M., and Cacace, M.: Sensitivity of 3D thermal models to the choice of boundary conditions and thermal properties: a case study for the area of Brandenburg (NE German Basin), *Environmental Earth Sciences*, 67, 1695-1711, 10.1007/s12665-012-1614-2, 2012.
- 995 Noack, V., Scheck-Wenderoth, M., Cacace, M., and Schneider, M.: Influence of fluid flow on the regional thermal field: results from 3D numerical modelling for the area of Brandenburg (North German Basin), *Environmental earth sciences*, 70, 3523-3544, <https://doi.org/10.1007/s12665-013-2438-4>, 2013.
- Noack, V., Scheck-Wenderoth, M., Cacace, M., and Schneider, M.: The 3D Structural Model of Brandenburg, Zenodo [dataset], <https://doi.org/10.5281/zenodo.10526955>, 2024.
- 1000 Odyssee-Mure: Germany | Energy profile, 12, <https://www.odyssee-mure.eu/publications/efficiency-trends-policies-profiles/germany-country-profile-english.pdf>, 2024.

- Pei, L., Virchow, L., Blöcher, G., Kranz, S., and Saadat, A.: Characterization of artesian flow and heat transition in an ATEs research wellbore using DTS monitoring and numerical modelling, *Adv. Geosci.*, 65, 37-44, 10.5194/adgeo-65-37-2024, 2024.
- 1005 Pfeifer, S., Rechid, D., and Bathiany, S.: Klimaausblick Brandenburg, [https://gerics.de/products\\_and\\_publications/fact\\_sheets/index.php.de](https://gerics.de/products_and_publications/fact_sheets/index.php.de), 2021.
- Reinecke, R., Müller Schmied, H., Trautmann, T., Andersen, L. S., Burek, P., Flörke, M., Gosling, S. N., Grillakis, M., Hanasaki, N., Koutroulis, A., Pokhrel, Y., Thiery, W., Wada, Y., Yusuke, S., and Döll, P.: Uncertainty of simulated groundwater recharge at different global warming levels: a global-scale multi-model ensemble study, *Hydrol. Earth Syst. Sci.*, 25, 787-810, <https://doi.org/10.5194/hess-25-787-2021>, 2021.
- 1010 Riedel, T.: Temperature-associated changes in groundwater quality, *Journal of Hydrology*, 572, 206-212, <https://doi.org/10.1016/j.jhydrol.2019.02.059>, 2019.
- Rivera, J. A., Blum, P., and Bayer, P.: Increased ground temperatures in urban areas: Estimation of the technical geothermal potential, *Renewable Energy*, 103, 388-400, <https://doi.org/10.1016/j.renene.2016.11.005>, 2017.
- 1015 Rossman, N. R., Zlotnik, V. A., Rowe, C. M., and Szilagyi, J.: Vadose zone lag time and potential 21st century climate change effects on spatially distributed groundwater recharge in the semi-arid Nebraska Sand Hills, *Journal of Hydrology*, 519, 656-669, <https://doi.org/10.1016/j.jhydrol.2014.07.057>, 2014.
- Scheck, M. and Bayer, U.: Evolution of the Northeast German Basin — inferences from a 3D structural model and subsidence analysis, *Tectonophysics*, 313, 145-169, [https://doi.org/10.1016/S0040-1951\(99\)00194-8](https://doi.org/10.1016/S0040-1951(99)00194-8), 1999.
- 1020 Scibek, J. and Allen, D. M.: Modeled impacts of predicted climate change on recharge and groundwater levels, *Water Resources Research*, 42, <https://doi.org/10.1029/2005WR004742>, 2006.
- Seidenfaden, I. K., Sonnenborg, T. O., Stisen, S., and Kidmose, J.: Quantification of climate change sensitivity of shallow and deep groundwater in Denmark, *Journal of Hydrology: Regional Studies*, 41, 101100, <https://doi.org/10.1016/j.ejrh.2022.101100>, 2022.
- 1025 Seneviratne, S. I., Corti, T., Davin, E. L., Hirschi, M., Jaeger, E. B., Lehner, I., Orlowsky, B., and Teuling, A. J.: Investigating soil moisture–climate interactions in a changing climate: A review, *Earth-Science Reviews*, 99, 125-161, 2010.
- SenStadt: Senatsverwaltung für Stadt-entwicklung, Bauen und Wohnen - Berlin Environmental Atlas, Berlin, <https://www.berlin.de/umweltatlas/en/water/groundwater-temperature/>, 2020.
- 1030 Singer, J.: Numerische Untersuchung der thermischen Beeinflussung von hangenden Grundwasserleitern eines saisonalen ATEs-Systems am Standort des Reallabors in Berlin-Adlershof, Masterarbeit, Fakultät VI, Technische Universität Berlin, Berlin, 2025.
- Sirocko, F., Reicherter, K., Lehné, R., Hübscher, C., Winsemann, J., and Stackebrandt, W.: Glaciation, salt and the present landscape, in: Dynamics of complex intracontinental basins. The Central European basin system, edited by: Littke, R., Bayer, U., Gajewski, D., and Nelskamp, S., Springer, Berlin Heidelberg, 233-245, 2008.
- 1035 Smith, L. and Chapman, D. S.: On the thermal effects of groundwater flow: 1. Regional scale systems, *Journal of Geophysical Research: Solid Earth*, 88, 593-608, <https://doi.org/10.1029/JB088iB01p00593>, 1983.
- Stackebrandt, W. and Franke, D.: *Geologie von Brandenburg*, Schweizerbart, 805 pp., 2015.
- Stackebrandt, W. and Manhenke, V. (Eds.): *Atlas zur Geologie von Brandenburg im Maßstab 1:1 000 000.*, Landesamt für Geowissenschaften und Rohstoffe, Cottbus, 2010.
- 1040 Stallman, R. W.: Steady one-dimensional fluid flow in a semi-infinite porous medium with sinusoidal surface temperature, *Journal of Geophysical Research* (1896-1977), 70, 2821-2827, <https://doi.org/10.1029/JZ070i012p02821>, 1965.
- Stemmler, R., Arab, A., Bauer, S., Beyer, C., Blöcher, G., Bossennec, C., Dörnbrack, M., Hahn, F., Jaeger, P., Kranz, S., Mauerberger, A., Nordheim, J. N., Ohagen, M., Petrova, E., Regenspurg, S., Rettenmaier, D., Saadat, A., Sass, I., Scheytt, T., Scholliers, N., Shao, H., Tzoufka, K., Zosseder, K., and Blum, P.: Current research on aquifer thermal energy storage (ATES) in Germany, *Grundwasser*, 30, 107-124, 10.1007/s00767-025-00590-3, 2025.
- 1045 Taniguchi, M.: Impacts of climate change on groundwater in recharge and discharge areas, AGU Fall Meeting Abstracts, H23C-01, 2021.
- 1050 Taniguchi, M., Shimada, J., Tanaka, T., Kayane, I., Sakura, Y., Shimano, Y., Dapaah-Siakwan, S., and Kawashima, S.: Disturbances of temperature-depth profiles due to surface climate change and subsurface water flow: 1. An effect of linear increase in surface temperature caused by global warming and urbanization in the Tokyo Metropolitan Area, Japan, *Water Resources Research*, 35, 1507-1517, <https://doi.org/10.1029/1999WR900009>, 1999.
- 1055 Taylor, R. G., Scanlon, B., Döll, P., Rodell, M., van Beek, R., Wada, Y., Longuevergne, L., Leblanc, M., Famiglietti, J. S., Edmunds, M., Konikow, L., Green, T. R., Chen, J., Taniguchi, M., Bierkens, M. F. P., MacDonald, A., Fan, Y., Maxwell, R. M., Yechieli, Y., Gurdak, J. J., Allen, D. M., Shamsudduha, M., Hiscock, K., Yeh, P. J. F., Holman, I., and Treidel, H.: Ground water and climate change, *Nature Climate Change*, 3, 322-329, 10.1038/nclimate1744, 2013.
- 1060

- Tissen, C., Benz, S. A., Menberg, K., Bayer, P., and Blum, P.: Groundwater temperature anomalies in central Europe, *Environmental Research Letters*, 14, 104012, 10.1088/1748-9326/ab4240, 2019.
- 1065 Tsy-pin, M., Cacace, M., Guse, B., Güntner, A., and Scheck-Wenderoth, M.: Modeling the influence of climate on groundwater flow and heat regime in Brandenburg (Germany), *Frontiers in Water*, 6, <https://doi.org/10.3389/frwa.2024.1353394>, 2024.
- Tsy-pin, M., Cacace, M., Guse, B., Lischeid, G., Güntner, A., and Scheck-Wenderoth, M.: Damped groundwater response to recharge: From spectral analysis to regional modeling, *Journal of Hydrology*, 658, 133193, <https://doi.org/10.1016/j.jhydrol.2025.133193>, 2025.
- 1070 Wunsch, A., Liesch, T., and Broda, S.: Deep learning shows declining groundwater levels in Germany until 2100 due to climate change, *Nature Communications*, 13, 1221, 10.1038/s41467-022-28770-2, 2022.
- Zhang, Y.-P., Jiang, X.-W., Ge, S., Zhang, Z.-Y., Han, P.-F., Wang, X.-S., Wang, L., Liu, Q., and Wan, L.: Effect of climate warming on subsurface temperature in basins with topography-driven groundwater flow, *Journal of Hydrology*, 644, 132024, <https://doi.org/10.1016/j.jhydrol.2024.132024>, 2024.
- 1075 Zhou, P., Wang, G., and Duan, R.: Impacts of long-term climate change on the groundwater flow dynamics in a regional groundwater system: Case modeling study in Alashan, China, *Journal of Hydrology*, 590, 125557, <https://doi.org/10.1016/j.jhydrol.2020.125557>, 2020.