

Constraining the wavefield of volcano-seismic events on Mt. Etna, Italy through [a rotational sensor](#) and [seismic array observations](#)

Nele Inken Käte Vesely¹, Eva Patrica Silke Eibl¹, Gilda Currenti², Mariangela Sciotto², Giuseppe Di Grazia², Matthias Ohrnberger¹, and Philippe Jousset³

¹Institute of Geosciences, University of Potsdam, Potsdam, Germany

²Istituto Nazionale di Geofisica e Vulcanologia-Osservatorio Etneo, Catania, Italy

³GFZ Helmholtz Centre for Geosciences, Potsdam, Germany

Correspondence: Nele Inken Käte Vesely (vesely1@uni-potsdam.de)

Abstract.

Long-period (LP) events and tremor are characteristic seismic signals of active volcanoes, offering insight into underlying fluid-driven processes. ~~Their~~ ~~However, their~~ emergent wavefield is complex and challenging to characterise. ~~Seismic arrays as well as a rotational sensor with a co-located~~ [Here we decipher the LP event and tremor wavefield composition using a seismic array combined with a rotational sensor co-located with a](#) seismometer (6C station) ~~can decipher LP event and tremor wave field composition.~~ This study ~~aims to analyse and compare~~ [analyses and compares](#) directional and phase velocity estimates by processing a 25-day long dataset from a rotational sensor and an array of seven broadband stations deployed at Mt. Etna, Italy, in August-September 2019. We derive the back azimuths (BAz) of LP events and tremor from both the seismometer array and the 6C station, and we compare these estimates with a reference BAz obtained from the network locations from the Istituto Nazionale di Geofisica e Vulcanologia-Osservatorio Etneo (INGV-OE) on Mt. Etna.

Volcanic tremor occurs in distinct phases with varying seismic and surface activity. Depending on the phase, either the array or 6C method provides reliable [tremor](#) BAz estimates, agreeing well with the INGV-OE reference. We find that BAz estimates of both methods are shifted southward relative to the reference location for the LP events. We attribute the larger southward deviation observed in the 6C results to local heterogeneities which exert a stronger influence on the 6C station than on the array.

Based on the array derived slownesses we infer that the tremor and LP events mainly consist of surface waves. Further, the rotational sensor recordings suggest a wavefield dominated by SH-type waves. In combination with the observed temporal evolution of the 6C phase velocity in narrow frequency bands, we infer Love-wave dominance. This study highlights the value of a rotational sensor to constrain the wavefield in a deterministic way in a complex volcanic environment.

20 1 Introduction

Volcanic tremor often marks the build-up to, and accompanies eruptive activity (McNutt, 2002; Zuccarello et al., 2022). At many volcanos, ~~it~~ [tremor](#) is closely correlated with explosive phenomena such as paroxysms, and lava fountaining (Zobin, 2017). Tremor is characterized as an emergent, continuous signal lasting minutes to days, typically with peak power in the

1-5 Hz range, though this varies between volcanic systems (McNutt, 2002). Another class of typically observed volcanic seismic signal are long-period (LP) events which exhibit dominant frequencies from 0.5 to 5 Hz (Chouet and Matoza, 2013). Variations in LP event frequency have been attributed to property changes in the resonating conduit (Jousset et al., 2003). Unlike tremor, LP events can sometimes show a clear onset of the p-wave arrival (Chouet, 2009). ~~Different~~ However, transitions in which LP events merge into tremor have been observed for Soufrière Hills volcano in Montserrat (Neuberg et al., 2000). Different network-based location approaches to handle LP events and volcanic tremor ~~with seismometer networks~~ exist (e.g. Battaglia et al. (2003); Di Grazia et al. (2006); De Barros et al. (2009); Cannata et al. (2010) Battaglia et al. (2003); Di Grazia et al. (2006)). The wavefield of those event types is complex and ~~lacking observations at appropriately sized arrays or 6C recordings, so that~~ the detailed composition of wave types often remains unclear due to a lack of observations at appropriately sized arrays or 6C recordings.

Conventional seismometer networks record unrest on volcanoes, ~~but for detecting.~~ However, to detect weak volcano-seismic signals, smaller, denser aperture networks ~~are more promising as arrays are more suitable~~ (Chouet, 1996b; Saccorotti et al., 2001; Wassermann, 1997). Arrays, originally set up in the 1960s to detect nuclear tests (Douglas, 2002), have since become ~~key tools~~ a key tool for studying the Earth's structure and exploring volcanic activity (Rost and Thomas, 2002). These seismic arrays consist of multiple seismometers placed at small station spacings, ranging from a few tens to hundreds meters. An incoming wave is recorded coherently on all seismometers within a frequency range that depends on the station spacing and the seismic ground velocities (McNutt, 2002). In such a set-up the ground motion along three orthogonal axes is measured. Weak or emergent signals can then be detected more easily by stacking data. Information about the wavefield can be gathered, migrating sources tracked and source directions or incidence angles determined (McNutt, 2002; Rost and Thomas, 2002). Seismic arrays are advantageous for exploring volcanic tremor (Chouet, 1988, 1996a; Ferrazzini et al., 1991).

Arrays have been used to locate (Chouet, 2003; Métaixian et al., 2002) and distinguish tremor wave-types (Saccorotti et al., 2004), track migrating tremor sources (~~Eibl et al., 2017b, 2023, 2020; Zuccarello et al., 2022)~~ (Eibl et al., 2017b, 2020; Zuccarello et al., 2022) and differentiate between different simultaneously recorded tremor (Eibl et al., 2017a) or between tremor and long-period event sources (Almendros et al., 2014). Long-period seismicity can likewise be analysed by arrays (Almendros et al., 2001; Chouet, 2003). Even though arrays enable a better understanding of the wavefield and volcanic structures, their installation and maintenance is challenging and costly in volcanic settings which are mostly difficult to access or do not permit specific array geometries. The performance depends on the operation of all seismometer stations. In case of station failure, the array geometry, aperture and thus sensitivity to a certain frequency range changes (Wassermann et al., 2016).

If space is limited or the site is difficult to access, ~~point measurements using~~ rotational sensors might offer an alternative to seismic arrays (Cochard et al., 2006). In recent years, portable rotational sensors have become available allowing the recording of the full rotational ~~wave field~~ wavefield with high resolution around three orthogonal directions. These fibre optic gyroscopes can be co-located with a seismometer to measure six degrees of freedom: three translations and three rotations ~~. A six component (6C station).~~ Such a six component (6C) station requires less installation effort and maintenance ~~in comparison with~~ compared to a multiple station array, while being able to separate the wavefield and calculate directions of arriving signals. Processing techniques with ~~six component~~ 6C measurements (Hadziioannou et al., 2012; Wassermann et al., 2020) aim at pro-

viding the same information as normally obtained by a multi-station array (Brotzer et al., 2025; Cochard et al., 2006). Various laboratory (Bernauer et al., 2018) and passive and active field experiments (Izgi et al., 2021, 2025) with rotational sensors have confirmed low self-noise, a broad frequency range and realistic event direction estimation. ~~First experiments~~ Experiments on volcanoes have been carried out on Kilauea (Wassermann et al., 2020), Stromboli (Wassermann et al., 2022) and Etna (Eibl et al., 2022a) which have shown great advances in wavefield analysis using ~~a rotational sensor with a co-located seismometer~~ 6C stations. Wassermann et al. (2022) were able to ~~detect-identify~~ gas jetting events not ~~recorded-on-detected by~~ other instruments, leading to the build-up of a new vent on Stromboli volcano. ~~By using~~ Using a rotational sensor, Eibl et al. (2022a) ~~separated the wavefield of LP events and tremor have shown, that LP events~~ at Mt. Etna ~~which is helpful in characterizing the source system. mainly have a strongly polarized wavefield in the horizontal plane and are therefore composed of SH-type waves. The tremor wavefield is composed of SH-type waves in August and early September and features a mixed wavefield from 9 September 2019 until 13 September 2019~~ (Eibl et al., 2022a).

~~A recent study by Keil et al. (2022) compares~~ Keil et al. (2022) compared rotational sensor and array recordings of anthropogenic noise. Resulting P- and S-wave velocity profiles from arrays and the rotational sensor and co-located seismometer ~~(6C) station~~ were in agreement, thus confirming the suitability of using the ~~six component station approach~~ (Keil et al., 2022) 6C station approach. The self-noise of the rotational sensor was a major constraint for frequencies below 5 Hz ~~(Keil et al., 2022)~~. Bernauer et al. (2021) identified a lower frequency limitation of 4 Hz in the rotational sensor's response during their comparative study of various sensors used for measuring rotational motion. Recordings of rotation and rotation rate are furthermore stronger affected by local heterogeneities than displacement, velocity and acceleration recordings (Singh et al., 2019). ~~Another study by~~ Brotzer et al. (2025) compared a rotational sensor and seismic array with respect to Signal-to-Noise Ratio (SNR) and back azimuth calculation of a local and a regional earthquake. Stations with downtime had an effect on the array derived rotation (ADR) ~~(Brotzer et al., 2025). The accuracy of ADR furthermore depends on the array aperture, distance to and type of analysed signals~~ (Suryanto et al., 2006). in their study. In contrast, measurements obtained from a single rotational sensor are independent of inter-station geometry or availability, as they directly record ground rotations at a single point.

~~In volcanic environments, source signals might be stronger and additional information about source processes could help improve eruption forecasting.~~ We investigate the performance of a 6C station in comparison to an array ~~by calculating~~ deployed at Etna volcano (Italy). We calculate back azimuths and phase velocities of LP event and tremor signals. The aim of this study is to test ~~for a first time in a volcanic environment~~, whether the 6C approach ~~yields reliable back azimuth~~ provides reliable estimates of back azimuths and velocities compared with those obtained from a conventional seismic array ~~and whether they furthermore match with the, and whether these results are consistent with~~ reference locations from the Istituto Nazionale di Geofisica e ~~Vulcanologia-Osservatorio~~ Vulcanologia-Osservatorio Etna (INGV-OE) 's network. We briefly introduce the area of our study at Etna volcano, summarize the INGV-OE's network processing for localizing the long-period events and volcanic tremor and explain the rotational sensor and the array processing in Section 3. Results of the tremor and LP event back azimuth comparisons to the INGV-OE locations are presented in Section 4 ~~for tremor and LP events~~. An interpretation and discussion is given in Section 5 along with an explanation of limitations in this study. We conclude that a rotational sensor in combination with a seismic array can be used to ~~pin down~~ decipher the wave types in a complex wavefield (6).

2 Methodology Seismic installation on Etna volcano

95 2.1 ~~Seismic installation on Etna volcano~~


Mount Etna is one of Europe's most active and visited volcanoes (Scarfi et al., 2023). This stratovolcano is located on the Italian island of Sicily (Fig. 1a) and is characterized by Strombolian activity, lava flows and fountains, as well as earthquakes from the sliding eastern flank. ~~Touristic areas on the volcano's flanks (Currenti and Bonaccorso, 2019); nearby~~ The volcanic and tectonic activity put the city of Catania, the villages and the ~~town of Catania are at risk under the volcanic activity~~ touristic summit areas at risk (Currenti and Bonaccorso, 2019). Thus, understanding volcanic activity is undoubtedly important for mitigating hazard. Although fissure eruptions occur, the most frequent eruptive activity is concentrated in the main summit area within Bocca Nuova (BN), North East crater (NEC), Voragine (VOR), South East crater (SEC) and the New South East crater (NSEC), as illustrated in Fig. 1e.

From August to September 2019, a dense broadband array and a rotational sensor were installed in Piano delle Concazze
105 on Mt. Etna (Currenti et al., 2021; Eibl et al., 2022a). Six 3C Trillium Compact 120 s seismometer (Nanometrics™) with DiGOS DATA-CUBE3 digitisers are used as a small aperture array where one of them is co-located with the rotational sensor (Fig. 1d). The inter-station distance is 60-90 m and the seven seismometers are buried at 40 cm depth in pyroclastic deposit (Currenti et al., 2021). Their maximum elevation difference is 10 m. One 3C blueSeis-3A rotational sensor *RS1* (formerly: iXblue, now: exail) was co-located with the 3C Trillium Compact 120s seismometer named *Bb17* as a 6C station (Fig. 1c) on
110 the same quadratic, granitic plate and recording with a 200 Hz sample rate (Eibl et al., 2022a). ~~We refer to the rotational sensor and the co-located seismometer as the six-component (6C) station (Fig. 1e).~~ In the recording time period, an eruption started on 4 September 2019 with weak ash emission at the NEC and Voragine crater. Around two days later it was accompanied by Strombolian activity at the NEC and finally led to lava effusion from 18 September 2019 until around 21 September 2019 at Voragine crater (Eibl et al., 2022a). ~~Eibl et al. (2022a) have shown using a rotational sensor, that LP events at Mt. Etna mainly have a strongly polarized wavefield in the horizontal plane and are therefore composed of SH-type waves. The tremor wavefield is composed of SH-type waves in August and early September and features a mixed wavefield from 9 September 2019 until 13 September 2019 (Eibl et al., 2022a).~~

3 Methodology

120 3.1 **Root mean square calculation and Signal-to-Noise ratio**

The preprocessing steps include tapering and instrument correction for the seismometers. Then, a two-pole zero-phase Butterworth bandpass filter from 0.6 to 10 Hz is set for the array and from 0.6 to 1.4 Hz for the rotational sensor. For the tremor data the same steps are applied, but the data is filtered from 0.5 to 10 Hz for the seismometer and from 0.5 to 2.5 Hz for the rotational sensor. The tremor data is furthermore resampled from 200 Hz to 50 Hz.

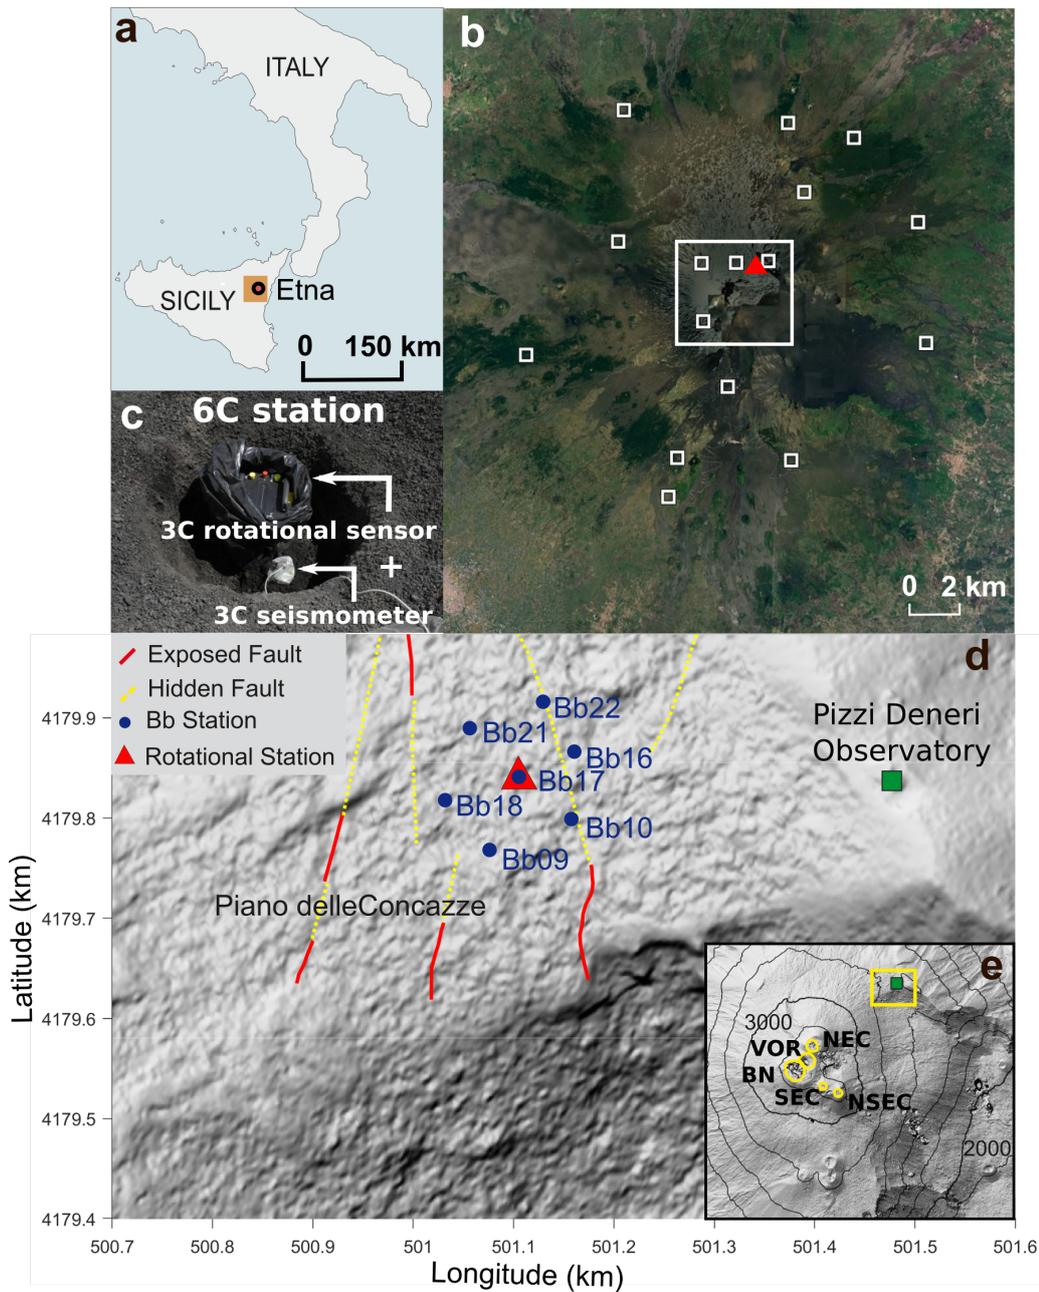

Overview of the network

set-up. (a) Etna volcano on Sicily, Italy. (b) Locations of 16 stations of the INGV-OE network around the main craters used for tremor processing (little white squares). Stations within the white frame box were used for the catalogue LP event detection. The satellite image is taken from © Google Earth 2019. (c) Set-up of the 6C station. (d) Location of the array stations (blue dots), the 6C station (red triangle) and faults (red and dotted yellow lines). (e) Summit crater locations.

Figure 1. Overview of the network set-up. (a) Etna volcano on Sicily, Italy. (b) Locations of 16 stations of the INGV-OE network around the main craters used for tremor processing (little white squares). Stations within the white frame box are used for the LP event detection. The red triangle indicates the rotational sensor station. The satellite image is taken from © Google Earth 2019. (c) Set-up of the 6C station. (d) Location of the array stations (blue dots), rotational sensor (red triangle) and faults (red and dotted yellow lines). (e) Summit crater locations (NEC: North East crater, VOR: Voragine, BN: Bocca Nuova, SEC: South East crater, NSEC: New South East crater).

125 The root mean square (RMS) is a statistical measure to quantify the average signal (S) amplitude. The RMS value reflects the signal energy over a specific time period. It is calculated by squaring each signal value i , averaging these squares over all samples I , and then taking the square root:

$$RMS_{signal} = \sqrt{\frac{1}{I} \sum_{i=0}^I S_i^2}. \quad (1)$$

The RMS of the long duration tremor is calculated with sliding windows of 30 minutes and 20% overlap. ~~We plot this for visualisation.~~

130 For each LP event, we calculate the RMS ~~in one 5 second long within a 5 second~~ time window containing the signal ~~and the RMS in a 5 second long time window with noise that starts 25 second as well as the RMS within a visually confirmed 5-second noise window that starts~~ prior to the ~~start of the~~ signal window. Finally, we use these to calculate the Signal-to-Noise ratio (SNR) by:

$$135 \quad SNR_c = \frac{RMS_{signal}}{RMS_{noise}}. \quad (2)$$

The SNR indicates how well a signal is visible in comparison with the noise level. For all LP events the SNR is calculated for ~~each component (e). vertical component data. The LP event data is tapered, instrument corrected for the seismometers only, then filtered by a two-pole zero-phase Butterworth bandpass filter from 0.6 to 10 Hz for the array and from 0.6 to 1.4 Hz for the rotational sensor. For the tremor data the same steps are applied, but the data is filtered from 0.5 to 10 Hz for the~~ seismometer and from 0.5 to 2.5 Hz for the rotational sensor. ~~The tremor data is furthermore resampled from 200 Hz to 50 Hz. are preprocessed using the ObsPy toolbox (Beyreuther et al., 2010).~~

3.2 INGV-OE network processing

~~First, We next describe~~ the amplitude-based tremor localization method ~~is described, followed by the INGV-OE network's use of radial and the approach using the~~ semblance for LP event localization. ~~Both are implemented using INGV-OE seismic network data from August and September 2019.~~

145 The volcanic tremor source is routinely located using a subset of 16 permanent seismic network stations equipped with Trillium seismometers (Nanometrics™) operated by INGV-OE and installed at altitudes from 1200 m to 3000 m ~~altitude in a range of within~~ 10 km from the summit craters (Fig. 1b). The location procedure is based on the seismic amplitude decay method and implemented as a 3D grid search (Battaglia et al., 2005; Di Grazia et al., 2006; Cannata et al., 2013). The spatial grid is centred at the summit crater Voragine and extends horizontally 6x6 km and 3 km vertically with a node spacing of 250 m. Amplitudes are measured from the vertical component data of 30-min seismic signal windows. The data are Butterworth filtered (0.5-2.5 Hz) and used to fit the RMS amplitude to source-station distance. This step is performed for each working station and each node of the grid, that is iteratively assumed to be the source of the volcanic tremor. The goodness of the linear regression

fit is represented by the value of R^2 , and the source is identified as the centroid of the grid nodes whose R^2 values do not differ more than 1% from the maximum R^2 value (Di Grazia et al., 2006; Cannata et al., 2013). To obtain reliable solutions, thresholds of R^2 goodness ≥ 0.9 and a minimum station number of 13 are set. An uncertainty of 500 m, based on Jackknife estimation (Efron, 1982), is assumed ~~to assess tremor location stability for each tremor location~~. The event location uncertainty ~~is on the order of a few hundred meters in latitude and longitude, but~~ can reach up to approximately 1 km in depth (Di Grazia et al., 2006; Cannata et al., 2018; Cannavo' et al., 2019).

For the location of the LP events, we consider a catalogue of amplitude transients with peak frequency in the spectral band 0.2-1.1 Hz detected and extracted from the continuous signal by means of the Short Time Average/ Long Time Average (STA/LTA) energy algorithm (e.g.: Trnkoczy 2012). The event source location method is based on the similarity among waveforms at the different stations on the particle motion of very long-period (VLP) events (Cannata et al., 2009). It is a grid search method (with the same grid used for volcanic tremor location) and implements, using the three components of the filtered signal, the radial semblance function (Cannata et al., 2013). The source is placed in the node of the grid characterized by the maximum semblance value. For this procedure, only summit stations are used, which in the time interval of the field campaign were only four (see the white frame box around the summit in Fig. 1b). To obtain robust locations, solutions with a radial semblance ~~higher larger~~ than 0.6 are considered reliable and locations outside the summit crater area are excluded. 371 LP events were detected and located during the field experiment. An uncertainty of 500 m for the LP event locations ~~from~~ INGV-OE is included in the analysis. We ~~furthermore~~ associate the lateral resolution to the radius of the first Fresnel volume calculated with an assumed velocity v of 1000 m/s⁻¹ (Eibl et al., 2022a), 1 Hz frequency (f) and 500 m source depth (z) resulting in 500 m uncertainty ~~(Yilmaz and Doherty, 2001):-~~

$$r = \frac{v}{2} \cdot \sqrt{\frac{2 \cdot z}{f \cdot v}}$$

with r as the point distance ~~, in this case the uncertainty, the velocity v , source depth z , and frequency f (Yilmaz and Doherty, 2001)~~ ~~-(Yilmaz and Doherty, 2001):~~

$$r = \frac{v}{2} \cdot \sqrt{\frac{2 \cdot z}{f \cdot v}} \quad (3)$$

Further parameter combinations for this calculation can be found in Suppl. Table S1. ~~The average of all combinations is~~ All frequency, velocity and source depth combinations result in a mean uncertainty of 480 m; accordingly, we assume an uncertainty of approximately 500 m.

The back azimuth (BAz) of the incoming wavefront is defined as the angle between North and the direction to the epicentre from the station (Rost and Thomas, 2002). We calculate the INGV-OE back azimuth for LP events and tremor as the direction measured clockwise from North to the INGV-OE locations from the array centre point of view. This enables direction comparison with the array and 6C BAz estimates, as the back azimuth to the array and the rotational sensor respectively only differ by 0.02° to 0.05° around the main crater region.

185 3.3 Rotational sensor processing

SH-type waves are recorded on the vertical component of the rotational sensor and on the horizontal components of the seismometer. We therefore correlate the vertical rotation rate with the transverse acceleration for a given angle (Cochard et al., 2006; Hadziioannou et al., 2012; Izgi et al., 2021; Keil et al., 2022) and save the correlation coefficient. This procedure is repeated for all angles from 0 to 360 degree. Finally, the angle that yields the highest correlation between transverse acceleration and vertical rotation rate is assumed as the source back azimuth (Hadziioannou et al., 2012).

By dividing \ddot{u}_T by the vertical rotation rate $\dot{\omega}_Z$, assuming a transversely polarized plane wave with amplitude A , wavenumber k and phase velocity c propagating in x-direction, we obtain Eq. 4 and 5. The ratio of \ddot{u}_T and $\dot{\omega}_Z$ is constant and equal to $-2c$ (Eq. 6).

$$\ddot{u}_T = -k^2 c^2 A \sin(kx - kct) \quad (4)$$

$$\dot{\omega}_Z = \frac{1}{2} k^2 c A \sin(kx - kct) \quad (5)$$

$$\frac{\ddot{u}_T}{\dot{\omega}_Z} = -2c \quad (6)$$

The phase velocity is calculated from the RMS amplitude ratio of rotation rate and transverse acceleration motions for the angle that yields the highest correlation of the waveforms (Hadziioannou et al., 2012). We refer to this method as the 6C approach.

First, we demean and detrend the data linearly and apply a cosine taper. We then use a bandpass zero phase filter with two corners. We calculate the BAZ in steps of 1° and with a correlation coefficient threshold of 0.15. Additionally, Uncertainties in back azimuth and phase velocity are quantified by reprocessing the data using shorter time windows. For each presented value we calculate the standard deviation ~~of all BAZ values within each sliding time window if their correlation values are at least 95% of the maximum correlation of that time window~~ from short-window results occurring within half the long-window before and after the timestamp.

Rotational sensor back azimuths for the tremor ~~were are~~ derived in a frequency range of 0.5 to 2.5 Hz with sliding time windows of 30 minutes. For the uncertainty estimate we calculate the standard deviation of 0.5 minute sliding time windows 15 minutes before and 15 minutes after each timestamp. We tested different LP event frequency ranges for the 6C processing ~~which resulted in best BAZ results for the~~ and found the strongest BAZ agreement with the reference in the 0.6 to 1.4 Hz range. We also compared our results to an INGV-OE catalogue ~~of in~~ the same frequency range, which did not ~~enhance the comparison~~ lead to high agreement between the back azimuth results, thus adhere to the initial 0.2-1.1 Hz INGV-OE catalogue. Sliding window length in this case relates to the minimum frequency of interest. We choose a window length of three times the

215 corresponding signal period at 0.6 Hz, thus 5 s with 90% overlap. For every LP event we obtain one back azimuth value and one phase velocity value by selecting the time of highest correlation between the vertical component of the rotational sensor and the rotated horizontal (transverse) components of the co-located seismometer ~~bb17~~ [Bb17](#) within the manually selected event time by the Pyrocko seismogram workbench (Heimann et al., 2017). [For those results we calculate the standard deviation from shorter time windows \(99% overlap\).](#)

220 3.4 Array analysis

Plane wave parameters are estimated from array data by a standard band-limited slowness power spectrum analysis in [the](#) frequency domain. For this purpose we maximize the beam power BP, computed as:

$$BP(\mathbf{s}) = \sum_{m=m1}^{m2} \left| \sum_{n=1}^N X_n(m\Delta f) \exp(-j2\pi m\Delta f \mathbf{r}_n \mathbf{s}) \right|^2 \quad (7)$$

for slowness vectors $\mathbf{s} = (s_x, s_y)^T$ in a slowness grid in the horizontal plane of wave propagation. In Eq. 7, $X_n(m\Delta f)$ represents the Fourier coefficient for the observed signal at station n at position \mathbf{r}_n and discrete frequency $m\Delta f$. The shifted signals are summed over the total number of [array](#) stations N ~~within the array~~. The squared sum of the stacked signals is then further summed over the frequency band from [the lowest](#) (~~$m1$ to $m2$ corresponding to the indices for the lowest~~) and highest frequencies ($m2$) of interest. $\Delta f = 1/T$ represents the frequency resolution of the Fourier transformed signal of length T .

The slowness vector corresponding to the maximum power in the map points to the propagation direction of the best fitting plane wave and its absolute value indicates the inverse of its apparent velocity (Wassermann, 1997). The horizontal slowness and back azimuth from azimuth Ψ can be obtained from the components of the slowness vector (~~Beyreuther et al., 2010; Chouet et al., 1997~~) ([Chouet et al., 1997; Beyreuther et al., 2010](#)) as:

$$s_{hor} = \sqrt{s_x^2 + s_y^2}. \quad (8)$$

and

$$235 \quad \Psi = \frac{180^\circ}{\pi} \cdot \arctan(s_x, s_y). \quad (9)$$

For details we refer to ~~Rost and Thomas (2002), Schweitzer et al. (2012) and Buttkus (2000)~~ [Buttkus \(2000\), Rost and Thomas \(2002\) and Schweitzer et al. \(2012\)](#).

We perform array processing from 24 August 2019 to 14 September 2019 on tremor signal with the vertical component seismometer data. Unlike the horizontal components, the vertical components are not expected to be strongly influenced by topography, tilt (Wassermann, 1997) or misalignment with geographical north. The slowness grid boundaries are defined to 240 $\pm 3 \text{ s km}^{-1}$ with a step size of 0.01 s km^{-1} . A frequency range from 0.5 to 10 Hz was selected, as the tremor signal is strongest

from 1 to 5 Hz (Suppl. Fig. S1), but the array response shows best directional sensitivity with low power side lobes from 0.6 to 10 Hz (Suppl.-Fig. S2). We furthermore want to distinguish between noise and signal and chose a broader frequency range. We ~~process 30-min sliding windows that have no overlap to compare with the INGV-OE results as in Eibl et al. (2022a). We~~
245 ~~downsample the tremor data from 200 Hz to 50 Hz after applying a lowpass filter of 20 Hz to avoid aliasing~~ ~~-.Uncertainties~~
~~and process 30-min sliding windows that have no overlap to compare with the INGV-OE results as in Eibl et al. (2022a).~~
~~Uncertainties for the 30-min back azimuth and slowness results~~ within the array processing are ~~calculated from back azimuth~~
~~and slowness values for each grid point if the power is at least 95% of the maximum value (Eibl et al., 2017b).~~~~obtained from~~
~~the standard deviation of 0.5-min sliding time window results (Fig. S3c-f).~~

250 For analysing 371 LP events the same slowness grid was used. A sliding time window of 5 seconds and 90% overlap, as suggested in Eibl et al. (2022a), is applied. Results are displayed in the centre of the sliding window of 5 s which shifts by 0.5 s during each iteration. Although the highest LP event amplitude is expected from 0.6 to 1.4 Hz by the spectrogram and power spectral density (PSD) analysis (Suppl.-Figs. S3, S4, S5, S6), we apply a maximum frequency of 10 Hz for the array processing according to the aperture of the array (Suppl.-Fig. S2) and a minimum frequency of 0.6 Hz due to poor resolution
255 at lower frequencies similar to Zuccarello et al. (2016). The event signal's frequency content is expected to dominate the recording, while noise before and after spans a broader frequency range. Therefore, we can compare with the 6C results. For comparison with the rotational sensor and the routine monitoring locations by INGV-OE, we take the back azimuths during the LP event based on the manually selected event time picks in the Pyrocko seismogram workbench (Heimann et al., 2017). For every LP event, the BAZ and slowness value is taken from the time of maximum relative power (semblance) within
260 the time window of the event. As a result, we obtain one back azimuth and slowness value for each event. The associated uncertainties are derived from the standard deviation calculated over results from sliding time windows with higher overlap of 0.99, analogous to the 6C-method. LP event result uncertainties were additionally quantified through Monte Carlo simulations combining fixed parameters such as station geometry and frequency range, together with variable parameters including noise level and inter-station time errors. Repeating these simulations produces a distribution of estimated slowness vectors, from
265 which uncertainties can be assessed and one-sigma confidence ellipses calculated (Fig. S7).

4 Results

4.1 Volcanic tremor analysis

4.1.1 Volcanic activity, tremor amplitude and location

We use the observed volcanic activity described by Eibl et al. (2022a) to define eruption phases (Table 1). We then attribute the
270 INGV-OE tremor locations (Fig.2) derived by the INGV-OE 2) to these phases. Prior to the first observed activity, during phase 0 tremor was located around NSEC, SEC and reaching towards VOR crater (white circles in Fig. 2). From 4 September 2019, weak ash emission was noted. Until 6 September 2019 locations during this phase 1 activity cluster around SEC and mostly ~~the~~-NSEC. During phase 2 (yellow circles in Fig. 2), the INGV-OE detected Strombolian activity and tremor east of NSEC,

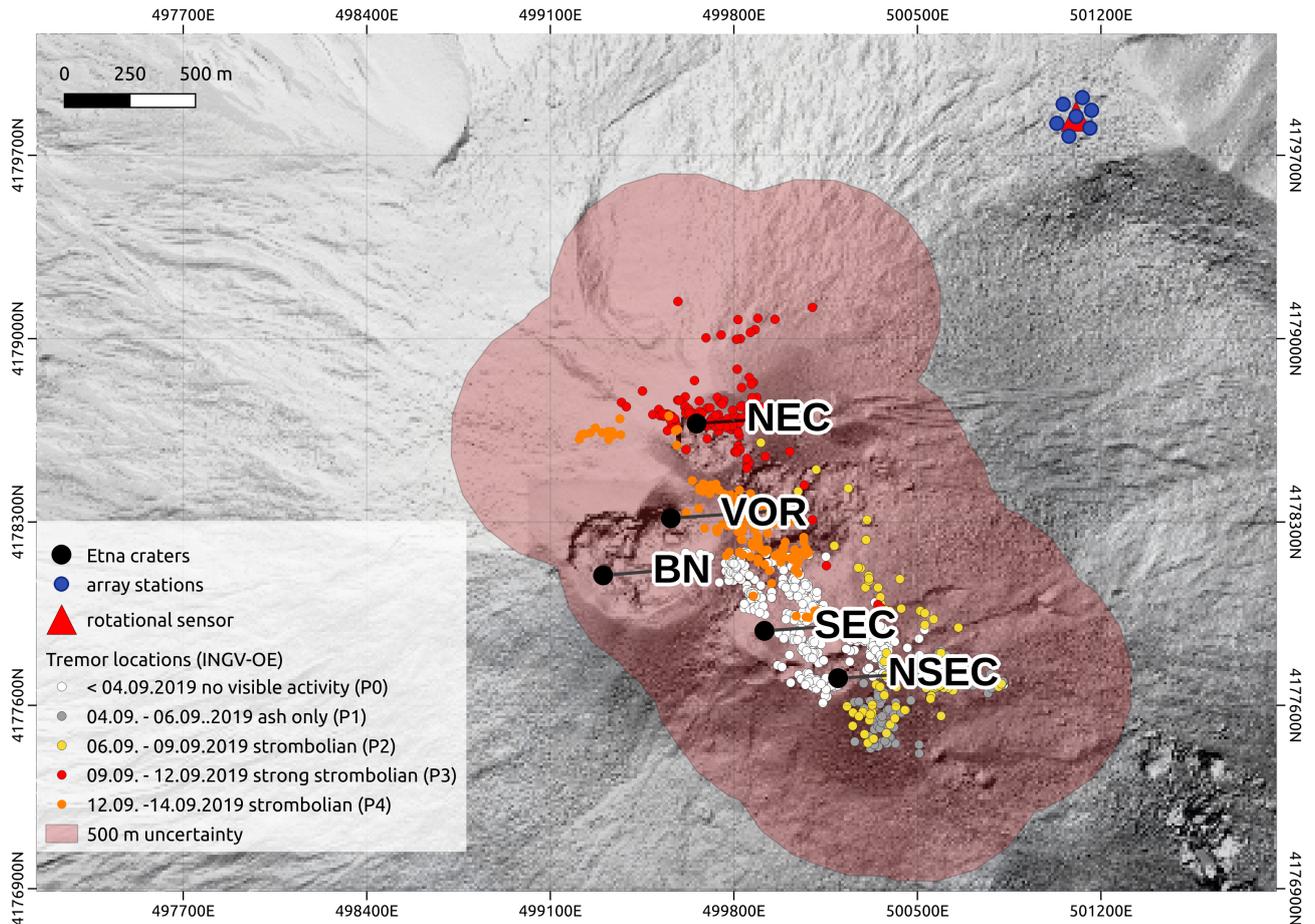


Figure 2. Illustration of the tremor locations (white (Phase-phase 0), gray-grey (Phase-phase 1), yellow (Phase-phase 2), red (phase 3) and orange (Phase-phase 4) according to eruption phases), array stations (blue dots) and rotational sensor (red triangle), array centre (yellow dot). Uncertainties of 500 m are drawn around the locations as red circles. Summit craters are indicated.

with some locations further north. Strong Strombolian activity was observed from 9 September until 12 September (orange-red circles in Fig. 2). Locations during these days spread between an area from NEC to north of NSEC and in between, but mostly accumulate below the NEC. This phase was followed by Strombolian activity until 13 September at the NEC, then at VOR crater. Tremor locations for this last phase comprise a broad area between the NEC, VOR and SEC with some locations west of NEC and are displayed as yellow circles with black outline, orange circles in Fig. 2.

Both instruments' components, the vertical rotation (HJZ) and the vertical velocity (HHZ) show similar RMS amplitude changes over time (Fig. 3a). RMS data for all components of Bb17 and RS1 show similar trends (Suppl.-Fig. S7). The amplitude is low until S8). Before 3 September 2019 3 PM UTC. Then the amplitude-tremor amplitude is low. It then rises and ash emissions (phase 1 as gray-grey colour in Fig. 3a) start on 4 September at NE-crater NEC. At the first tremor increase, the

phase	timing	eruption state	visible activity	tremor locations
phase 0	before 2019-09-04	pre-eruption	no visible activity	between NSEC, SEC, VOR
phase 1	2019-09-04 to 2019-09-06	eruption start	ash emission (NEC)	NSEC to SEC
phase 2	2019-09-06 to 2019-09-09	eruption evolving	Strombolian activity (NEC, VOR)	south, east of NSEC
phase 3	2019-09-09 to 2019-09-12	eruption climax	strong Strombolian activity (NEC)	mostly NEC
phase 4	2019-09-12 to 2019-09-14	stable eruption, declining	Strombolian activity (NEC,VOR)	south and west of NEC

Table 1. Eruption phases, classifications of superficial activity and ~~BAz-based-on-the~~INGV-OE locations.

frequency ranges from 1-2 Hz and is strongest on the horizontal array components and the vertical rotational sensor component. Phase 2 with Strombolian activity starts on 6 September, but the tremor RMS does not increase further compared to phase 1. A
285 minor peak in amplitude is visible on 8 September from 02:58 to 06:30 UTC. A significant increase on 9 September at 01:30 UTC marks the beginning of phase 3 (~~red colour in Fig. 3a~~) with sustained Strombolian activity at the North East crater until 10 September ~~shown in orange~~. Strong amplitude tremor energy reaches from 1 Hz to ~~45~~ Hz (~~Suppl.~~Fig. S1 and ~~S7S9~~). Large amplitudes are visible until 12 September (~~Fig. 3a~~), when another minor peak appears, after which the amplitude decreases to a level similar to the eruption start. This is assigned to phase 4 until the end of analysed time on 14 September 2019.

290 4.1.2 Tremor back azimuths

We compare the time series of tremor back azimuths derived from (i) array processing, (ii) a rotational sensor and (iii) the INGV-OE network catalogue locations from the end of August 2019 to 14 September 2019 (Fig. 3).

From phase 0 to phase ~~1 we observe 2~~, ~~we generally observe a INGV-OE~~ back azimuth changes from 210° ~~decreasing~~ to 190° ~~on 4 September, which fall within the ±10° uncertainty range~~ (Fig. 3b). ~~In phase 1 and 2 the BAZ values vary between~~
295 ~~190° and 200°~~. On 8 September, ~~however~~, during the RMS peak from 3 AM to 6 AM UTC, BAZ values increase from 190° to 225°, pointing to the northern (~~NENE~~NEC, BN, VOR) craters. ~~Afterwards the BAZ values migrate again to around~~ ~~The BAZ values then migrate back to~~ 190° until the next day, when the BAZ values then continuously move from 200° to 230°, the directions of the northern craters, coinciding with the increase of Strombolian activity observed at those. ~~From 9 September~~ ~~(During phase 3)~~ the BAZ values are stable at around 230° to 235°, pointing still to the northern craters. On 12 September
300 (phase 4), back azimuth values start to decrease from around 240° to 210° until 14 September. ~~These~~ ~~The~~ INGV-OE reference back azimuths and uncertainty ranges are shown in Fig. 3c, d ~~as grey lines for comparison~~.

The array-derived BAZ (Fig. 3c) fit the INGV-OE reference range until the beginning of phase 1. From 4 until 8 September, BAZ with higher relative power than during phase 0 show directions towards the southern craters and are within the upper limit of the INGV-OE reference. On 8 September with the first strong tremor amplitude peak, ~~BAz array~~ and INGV-OE ~~values~~
305 ~~BAz~~ overlap. Directional estimates continue to agree in phase 3 in which Strombolian activity intensified. Nevertheless, ~~the array~~ BAZ scatter more strongly ~~between the reference range from 210° to 240° within the INGV-OE reference range~~. In phase

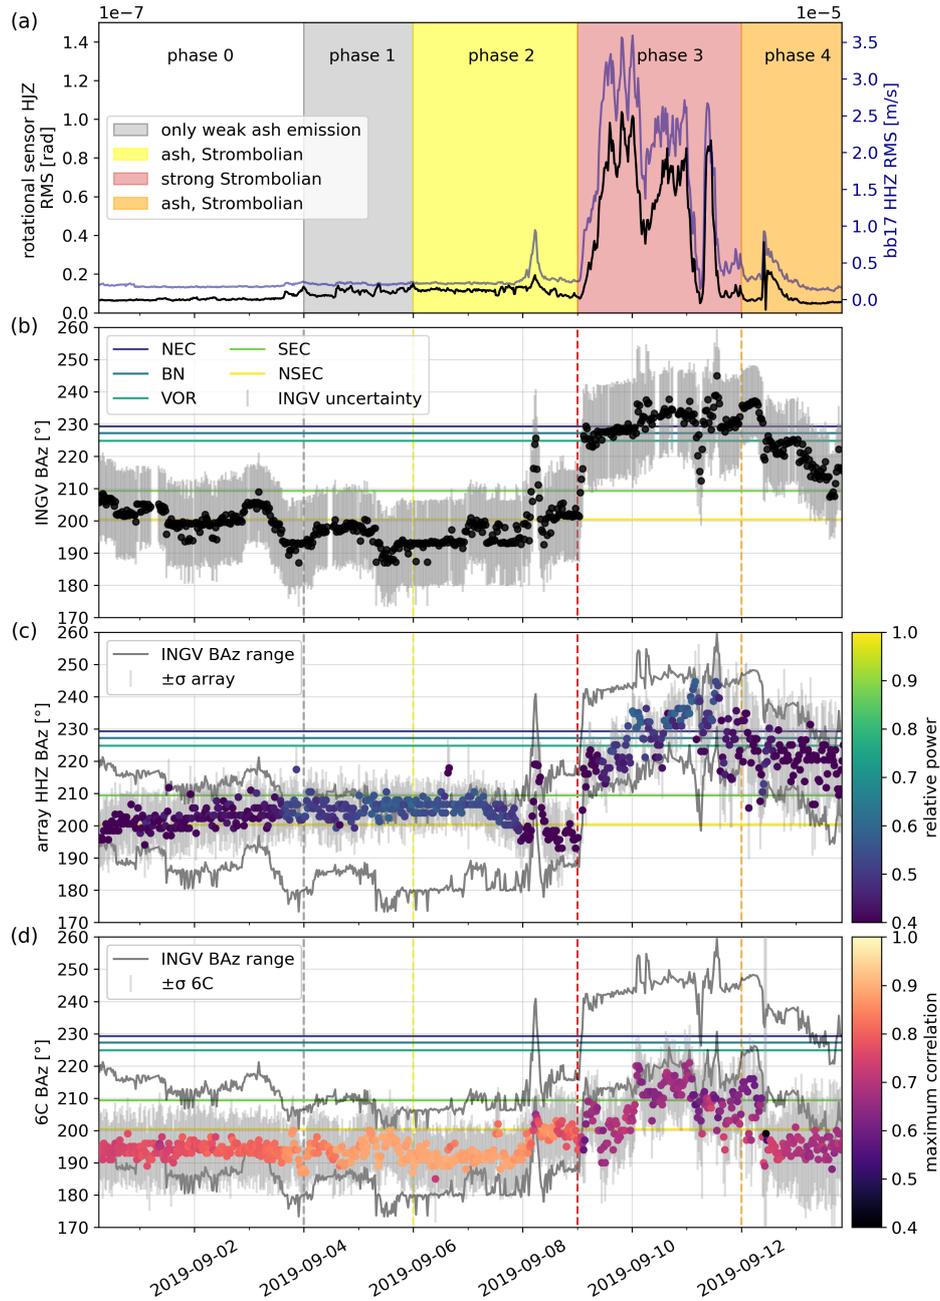


Figure 3. Back azimuth tremor comparison from 31 August 2019 until to 14 September 2019. (a) RMS of seismic data of the Bb17 seismometer (HHZ component, blue) filtered from 0.5 to 10 Hz and rotational sensor (HJZ component, black) filtered from 0.5 to 2.5 Hz and plotted above observed activity as coloured blocks. (b) Black points show the INGV-OE BAZ, with the respective uncertainty bars of 500 m. Coloured horizontal lines indicate the BAZ of the craters. (c) Back azimuths derived using the vertical array component, coloured according to the semblance with gray vertical bars indicating the associated uncertainty. Gray lines in the background show the INGV-OE BAZ uncertainty range. (d) The back azimuth values derived using the 6C-method, coloured according to correlation between the transverse acceleration and the vertical rotation rate.

4 Strombolian activity was still noted, but switched from NEC to VOR crater between 12 and 13 September, ~~represented by decreasing BAZ values from 230°-240° to 210°-220°.~~ Array BAZ fall within the INGV-OE range but have higher uncertainties reaching outside the range.

310 During ~~phase-phases 0, phase-1 and phase-2,~~ the 6C-derived BAZ (Fig. 3d) vary mostly between 185° and 200° within the INGV-OE reference range and show little changes with respect to the uncertainties. Correlation between the horizontal seismometer and vertical rotational sensor components is highest during ~~these times-phase 1 and 2.~~ From phase 3 to phase 4, the 6C BAZ ~~are lower than~~ point to directions south of the INGV-OE range BAZ range, even accounting for the uncertainties. Directions point to NSEC and SEC instead of the northern craters where strong Strombolian activity was observed.

315 In summary, phase 0 features different direction trends for all methods. During phase 1, 6C-derived BAZ fit the reference better than the array results, even though the tremor onset on 3 September is clearly visible on both instruments (Suppl. Figs. S1, S6, S7, S8, S9). Phase 2 is best displayed by the 6C BAZ as well, but the first RMS amplitude peak on 8 September and corresponding direction changes are better represented by the array-derived BAZ. In phase 3 and 4 with highest tremor amplitude and following decreasing amplitudes we see closest agreement between the array-derived BAZ values and the INGV-
320 OE locations' BAZ. For all methods, the semblance and maximum correlation are highest from 4 until 8 September, phases 1 and 2. However, some time windows during phase 3 also show high semblance for the array.

4.1.3 Tremor slownesses and phase velocities

~~We compare slowness and phase velocity results with the visible activity and the RMS tremor amplitude (Fig. 4).~~ The hypocentral distance (Fig. 4b) of tremor INGV-OE locations to the array centre varies from 2.1 km to 2.5 km until the end of phase
325 2, when it decreases with the first RMS amplitude peak to 1.6 km distance before increasing to 2 km again. At the beginning and end of phase 3, the distance drops from ≈ 2 km to ≈ 1.6 km each time. At the onset of phase 4, tremor is located at a distance between ≈ 2.2 km and ≈ 2 km. ~~Uncertainties of the distance are of~~ The horizontal resolution is constrained by 500 m. ~~The vertical resolution is constrained,~~ the vertical resolution by 1000 m uncertainty. Accordingly, small-scale variations in the estimated source position fall within the range of methodological uncertainty and cannot be considered resolvable with
330 confidence. The strongest change ~~of the distance results from in~~ distance represents the deepening of the tremor source during phase 3 with sustained Strombolian activity. The tremor migrated from the surface at ≈ 2.9 km down to 1.6 km altitude, a trend which is ~~despite the uncertainties, reliable~~ significant despite the vertical uncertainty.

Array-derived slowness values (Fig. 4c) ~~decrease from 1.6 s km⁻¹ to 1.0~~ slightly decrease to 1.2 s km⁻¹ ~~during from~~ phase 0 ~~and to~~ phase 1. With exception of the ~~RMS peak peak on 8 September,~~ slowness values ~~are stable mostly at 1.2 s km⁻¹~~ remain stable during phase 2. Highest slowness values of around ≈ 1.7 s km⁻¹ are reached during the RMS peak ~~in phase 2~~ and with the strong tremor amplitude increase at the beginning of phase 3. ~~During phase 3 slowness values vary only between 1.4 s km⁻¹ and 1.2 s km⁻¹~~ From 10 to 12 September slowness variations are not significant with respect to the uncertainties. With the beginning of phase 4, ~~slowness values increase linearly from 1.2 s km⁻¹~~ slownesses show an increasing trend to 1.6 s km⁻¹. Interestingly, slowness values are stable at the times of highest relative power, which coincides with the beginning
340 of visible activity and the strong Strombolian activity.

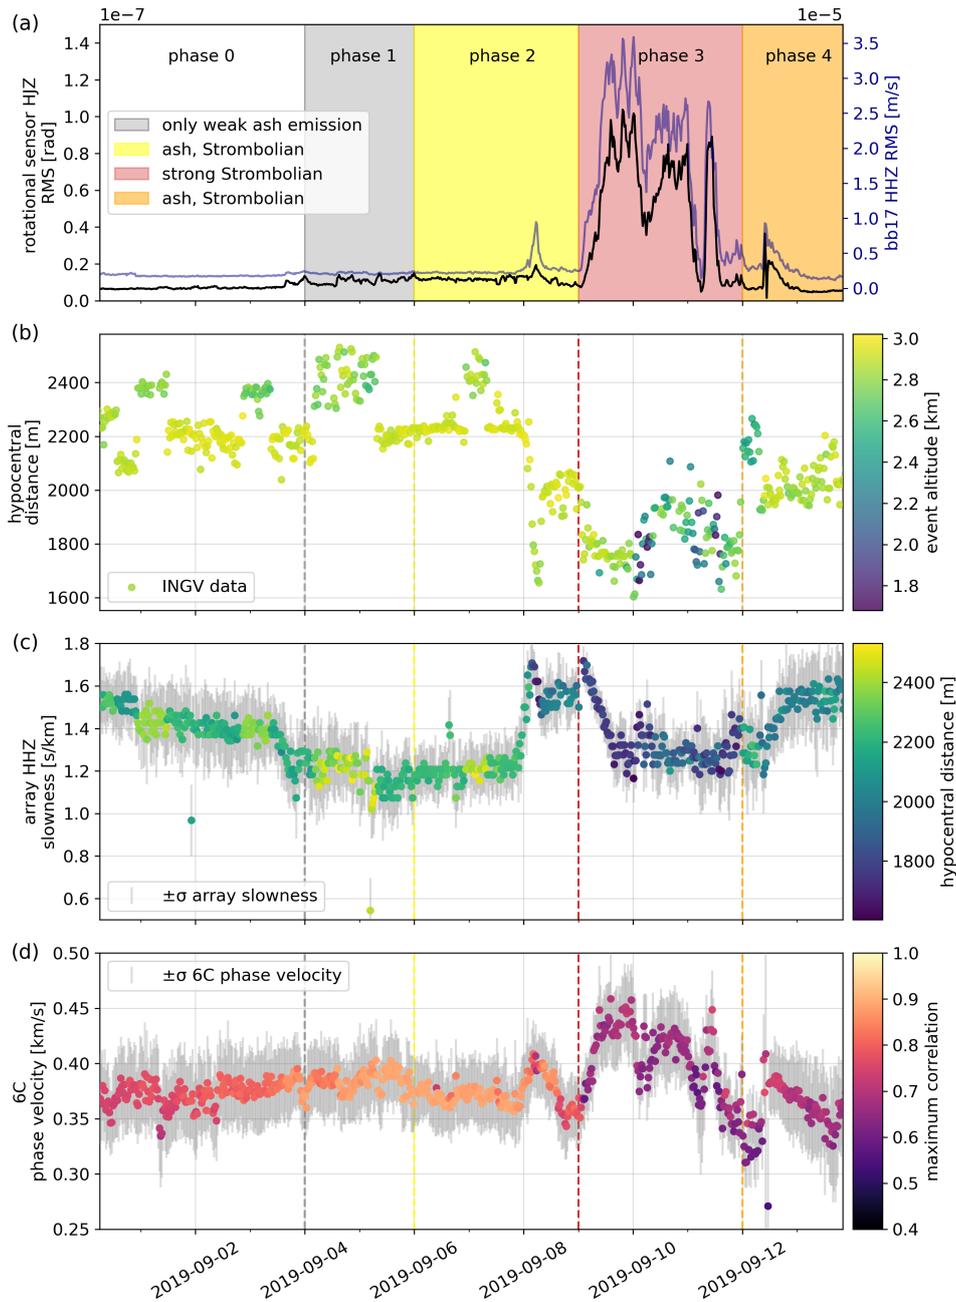


Figure 4. Slowness and phase velocity comparison for the tremor from 31 August until 14 September 2019. (a) RMS of 0.5 to 10 Hz filtered seismic data of the Bb17 seismometer (HHZ component, blue) with a 0.5 to 10 Hz filter and alongside the RMS of rotational sensor data (HJZ component, black) with a filtered from 0.5 to 2.5 Hz filter and observed. Observed activity is indicated as coloured blocks, indicated and as vertical dashed lines in the following subplots. (b) Hypocentral distance from the array to the tremor locations coloured by event altitude. (c) Slowness values derived using the vertical array component, coloured by semblance hypocentral distance. (d) The phase-Phase velocities derived using the 6C-method, coloured by correlation between the transverse acceleration and the vertical rotation rate.

Phase velocities obtained from the 6C method (Fig. 4d) ~~vary mostly between~~ seem stable around 0.35 km s^{-1} and 0.4 km s^{-1} ~~in during~~ phase 0, 1 and 2. With the beginning of phase 3 the velocities increase slightly from 0.35 km s^{-1} to 0.45 km s^{-1} . The shape of velocity changes ~~seem seems~~ to represent the RMS tremor amplitude changes ~~with three peaks in phase 3-~~ indicating slightly higher velocities with higher tremor amplitudes. In phase 4 the values drop ~~linearly from~~ 0.4 km s^{-1} to $\approx 0.33 \text{ km s}^{-1}$.

345 The most pronounced changes in tremor distance, altitude, array slowness, and 6C phase velocities occur during the end of phase 2 and throughout phase 3, coinciding with elevated RMS tremor amplitude and intense Strombolian activity. Velocities derived from the combination of the transverse acceleration and vertical rotation correlations (6C velocities) correlate with peaks in tremor amplitude.

4.2 Long-period event analysis

350 In the following we first ~~discuss~~ present the LP event signal-to-noise ratios, and show an exemplary long-period event to explain the processing used to obtain one event back azimuth and phase velocity value for every LP event. We then present an comparative overview of all ~~the 371 LP events analysed~~ analysed LP events.

4.2.1 Signal-to-noise ratio of LP events

While most events show comparable SNR across components, some exhibit highest SNR on ~~HHZ~~ the vertical seismometer component (HHZ), supporting the use of the vertical component for the array analysis (~~Suppl. Fig. S8S9~~). The SNR from the ~~HJZ~~ vertical component of the rotational sensor (HJZ) mostly exceeds those of the horizontal components (HJN and HJE components by) by a factor of two. The SNR for the selected LP event on 2 September 15:51:10 UTC is shown in ~~Suppl. Fig. S9, S10 and S11~~ Figs. S11, S12 and S13. For that LP event, SNR values are highest for the array's horizontal components (HHN and HHZ components) and for the rotational sensor's HJZ and HJN components. This event is detected on
360 all components, but exhibits highest energy amplitudes on the horizontal components of the co-located seismometer and on the vertical component of the rotational sensor as shown in the spectrogram (~~Suppl. Fig. S3S4~~).

4.2.2 ~~Exemplary Example~~ LP event: back azimuths azimuth, phase velocity and correlations slowness

The HHZ component of one array station is shown alongside the vertical component of the rotational sensor (Fig. 5a, b). ~~High amplitudes indicate the INGV-OE picked LP event~~ The LP event is shown within the grey dashed lines. Another lower amplitude event is also visible approximately 10 seconds earlier on both instruments' components. Array-derived back azimuths
365 fluctuate between mostly 180° to 240° (Fig. 5c). At the event start, the BAZ fits well is consistent with the INGV-OE reference (red line) and semblance between the array stations is high. ~~The small time shifts between the high semblance time windows and the event waveforms result from the sliding windows~~ Sliding windows of 5 seconds (Fig. 5e) ~~and 0.1 overlap applied in the analysis~~ c) and overlap of 90% lead to temporal smearing of the high semblance and back azimuth results in comparison
370 with the event waveform and high amplitudes. A slight increase in semblance is also observed approximately 10 seconds prior to the event, coinciding with the potential recording of another LP event with lower amplitude. Slowness values are lowest at

the event start with $\approx 0.5 \text{ s km}^{-1}$, increasing linearly to 2 s m^{-1} towards the event's end. ~~No such slowness change is noted 10 seconds prior the picked event.~~ The rotational sensor back ~~azimuths~~ azimuth (Fig. 5d) range is broader than the array results with $\approx 150^\circ$ to 230° . At the event start 6C BAZ indicate a direction of 201° , thus pointing 24° further south than the INGV-OE reference. Phase velocities are highest at the event start reaching up to $\approx 0.8 \text{ km s}^{-1}$ and 10 seconds prior at 0.6 km s^{-1} .

4.2.3 LP event catalogue: temporal and spatial distribution

We analysed a total of 371 LP events (Fig. 6a) from 24 August 2019 to 14 September 2019, with no LP events in the INGV-OE catalogue from ~~5-6~~ to 14 September, during the eruption phase (Fig. ~~??a6d~~). Additional LP events are visible during this phase but not listed in the catalogue, either because they were not possible to locate with low amplitude in comparison to the tremor amplitude (Sciotto et al., 2022) or because of the catalogue frequency range set for ~~this our~~ study. Other small-amplitude signals are visible, but have not been detected by the INGV-OE network, see Fig. 5a, b at 15:51:05. We do see similar small-amplitude signals for ≈ 103 of the 371 LP events picked. All 371 catalogue events have been located by the INGV-OE routine at eleven locations (Fig. ~~??b6a~~) at altitudes varying from 2.75 km to 3.25 km, ~~but mostly at 3~~ with an uncertainty of 1 km. 189 LP catalogue events occurred from 27 until 29 August (Fig. ~~??a6d~~). Prior to the first visible activity on 4 September, LP BAZ from the INGV-OE catalogue point to the ~~north-east, Bocca Nuova and Voragine~~ NEC, BN and VOR craters alternately. ~~The first~~ First LP events further south appear from the evening on 3 September until early 4 September, however other LP events are still detected at the northern craters. Only four LP events are located by the INGV-OE at the southern craters ~~in total~~ (Fig. ~~??b6a~~).

4.2.4 Back azimuths of the LP events

If the LP event back azimuth estimated from the array or 6C method ~~for an LP event~~ falls within the corresponding uncertainty range of the INGV-OE BAZ, the event is counted as a valid result for the respective method, as indicated in the legend ~~(Fig. 6b, c)~~. For all LP events the uncertainty range of INGV-OE BAZ varied from ± 10 - 14° . The respective BAZ are obtained at the event time of highest semblance (array) or highest correlation (6C). Of 371 LP events, we obtained 119 valid Baz BAZ from the HHZ components and 67 valid BAZ from the 6C method, see legends in Fig. ~~??e, d~~. ~~Craters are indicated as coloured horizontal lines for orientation.~~ 6b, c. INGV-OE locations ~~(black points)~~ point to the northern craters until 4 September when few LP events are located at SEC (Fig. ~~??e, d~~ 6b, c). HHZ components' BAZ point mostly to a direction in between the northern and southern craters ~~, are thus by around about~~ 10°-15° ~~slightly deviated southwards~~ further south compared to the INGV-OE reference (Fig. ~~??e6b~~). Higher event signal-to-noise ratios ~~, circled in blue, from the array~~ mostly result in BAZ between the northern and southern crater region. 6C BAZ ~~scatter in a broader range, not focussing results do not focus~~ on a specific area ~~, but are also rather deviated~~ throughout the entire time analysed, but also deviate towards the south in comparison with the reference directions (Fig. ~~??d~~). ~~Although some LP events exhibit higher 6c~~. Higher SNRs on the HJZ component ~~, it does do~~ not systematically result in back azimuths that better match the INGV-OE reference, suggesting that high SNR alone does not imply more accurate BAZ estimates.

No clear deviation according to specific sites classified in Fig. ~~??e-7a~~ is observed either. The array-derived BAZ predominantly align approximately 20° south of the reference direction, with deviations reaching up to 40° further south in some cases

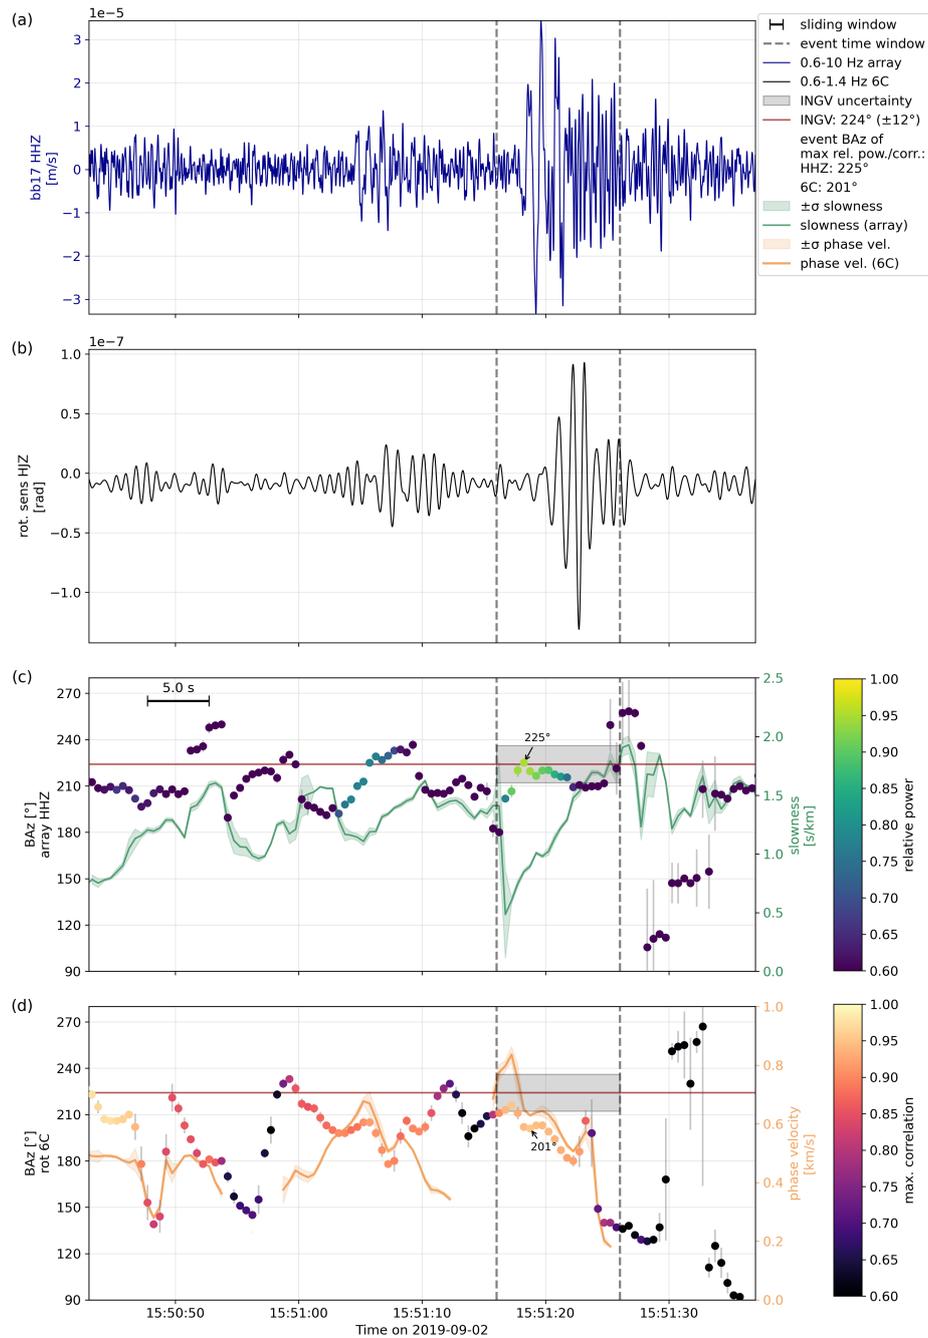


Figure 5. Comparison of the long-period event at 15:51:10 on 2 September 2019. (a) Bandpass-filtered seismograms (2nd-order) are shown for the vertical component of seismometer **Bn17-Bb17** (0.6 – 10 Hz) and (b) for the vertical component of the rotational sensor (0.6 – 1.4 Hz). **GrayGrey**, dashed lines indicate the event time windows, the black line (c) the sliding window. (c, d) BAZ and slowness (phase velocities) derived using the vertical components of the array (c) and the 6C method (d). Colours indicate the semblance for the array and maximum correlation for the 6C results. The BAZ of highest power (correlation) is annotated. The INGV-OE value is shown as a red line with its uncertainty as a **gray-grey** rectangle. Array slowness is shown as a green line (c) and phase velocities as an orange line (d) with the respective uncertainty.

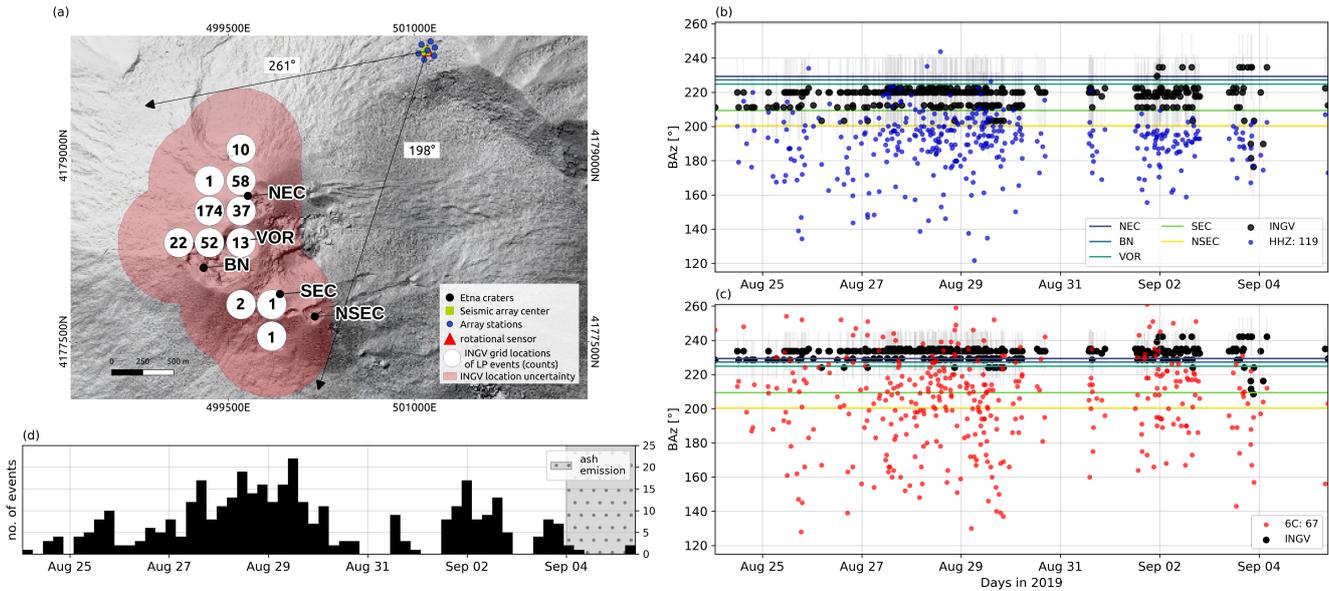


Figure 6. Overview of all 371 LP event back azimuths and deviation from reference. (a) LP event numbers over time. (b) ING V locations with uncertainty (red) showing LP event counts. (c) BAZ for all LP events by the vertical array components. (d) BAZ from rotational sensor 6C method. The crater directions are shown as coloured horizontal lines and the legend shows the counts of LP events whose BAZ align with the reference (black dots), including uncertainty. (e) numbered ING V locations for (f), (g) plots LP event numbers over time with start of BAZ deviation to reference versus location visible activity. (f), (g) Scatter colour by SNR. (h) Back azimuth histograms.

405 (Fig. 7b, e). The majority of 6C BAZ measurements also exhibit deviations, with some directions pointing of around 20° north of the reference and outside the crater region. However, the majority deviate south, but also reach up to 80° to the south relative to south of the direction indicated by the ING V-OE location (Fig. 7c, f), resulting in directions far outside the expected range of Mount Etna's crater region. A higher number of high-SNR events is observed at location IV for both methods, which also corresponds to the area with the greatest concentration of located LP events. Whereas ING V-OE and array-derived
 410 directions (Fig. 7e, h) directions (6b, 7d) are focussed on the crater region, 6C BAZ show a broad range reaching outside the crater range (Fig. 7d, h6c, 7d).

4.2.5 Slownesses and phase velocities of the LP events

We present the results of phase velocity analyses and spectrograms to furthermore characterize the wave types long-period events consist of. In particular, we aim to determine whether the observed long-period events exhibit characteristics of SH
 415 body waves or of Love-waves (surface waves). Calculating phase velocities with the 6C approach for different frequency ranges (Fig. 8a), we observe a decrease of velocity with increasing frequencies. Whereas some LP events yield similar frequencies throughout the event The frequency content of LP events may be constant (Fig. 8b), others show an increase of frequencies from the start towards the end of the event or vary during the event duration (Fig. 8c). The temporal evolution of the phase

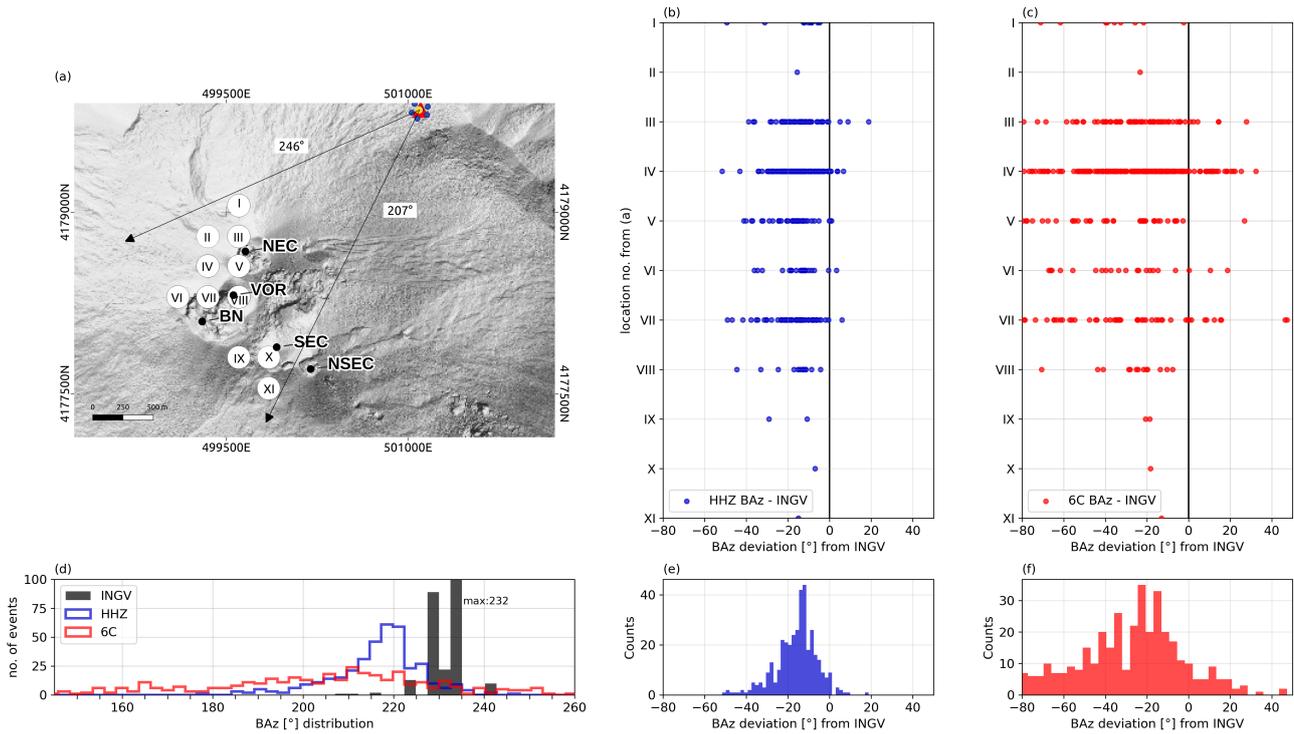


Figure 7. Overview of all 371 LP event back azimuth deviations from the reference. (a) Numbered INGV locations of LP events. (b-c) BAZ deviation from reference locations marked in subfigure (a). (d) Back azimuth distribution for all methods. Histograms of the array (e) and 6C (f) deviations from the INGV-OE reference.

velocities for all 371 LP events obtained in the frequency range of 0.6 to 1.4 Hz indicates a slight decrease of velocity over
 420 the event time (Fig. 8d). ~~Since the event start times were selected manually with a possibility of timing inaccuracies, the first second is consequently excluded from this analysis.~~

To enhance the analysis, we also apply array analysis to a selection of volcanic-tectonic (VT) events, where the P- and S-wave arrival times can be detected precisely. One exemplary VT event with the corresponding BAZ and slowness results is shown in [Suppl.-Fig. S12S14](#). The HHZ components show high semblance for the event start and resulting back azimuth
 425 azimuths are in strong agreement with the INGV-OE reference ([Suppl.-Fig. S12d](#)). ~~Array-derived slowness is at 0.2 s km^{-1} while the S14d~~. The p-wave arrival is visible on the ~~vertical component seismogram (Suppl.-HHZ component seismogram and array-derived slowness is at 0.15 s km^{-1}~~ (Fig. [S12aS14a](#), g). Slownesses observed for s-waves ([Suppl.-Fig. S12bS14b](#)) increase non-linearly. A further step-wise slowness increase is observed for the following surface waves. Comparing these VT event p-, s- and surface wave slownesses with the slownesses obtained for the 371 LP events ([Suppl.-Fig. S13aS15a](#)), the array-derived
 430 LP event slownesses ~~match expected VT event surface wave velocities~~ from around 0.6 to 1.5 s km^{-1} ~~match expected VT event surface wave velocities~~.

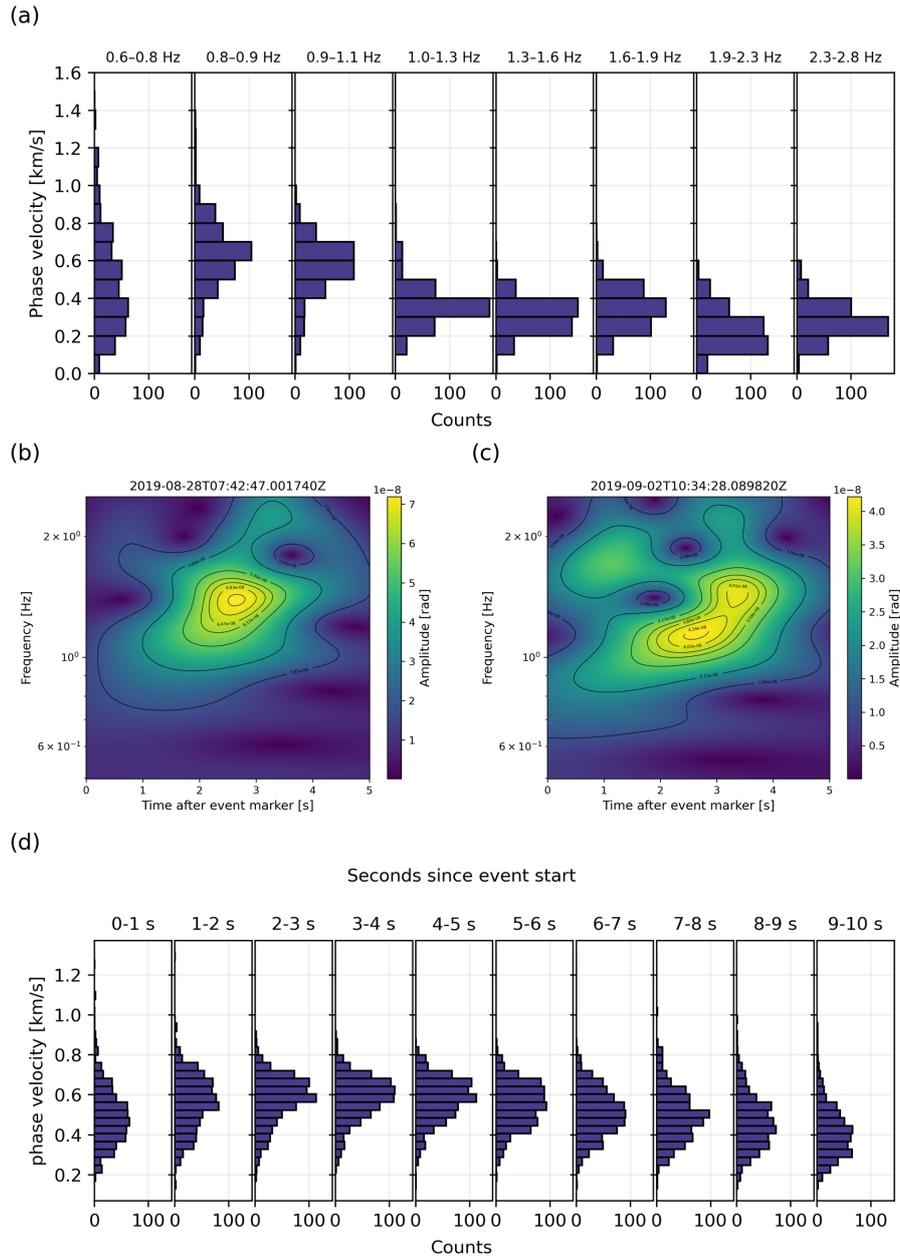


Figure 8. Overview of LP event frequency-dependent phase velocity, signal spectrograms, and velocity changes over event time. (a) Phase velocities of the 371 LP events obtained by the 6C method for different frequency ranges respectively. (b, c) Exemplary [rotational sensor \(HJZ\)](#) spectrograms of the high amplitude LP events. (d) Phase velocity evolution over the event time for all the LP events in the 0.6 to 1.4 Hz frequency range.

5 Interpretation and discussion

5.1 Limitations and constraints of the applied methods

Array performance depends on the array response defined by the station set-up. Here, Bb17 was placed on a granitic plate
435 with the rotational sensor, while others were buried directly. Additionally, the event distance should be much larger than
the aperture of the array (Schweitzer et al., 2012). Tremor sources are located 1.2–2.5 km from the array, and LP events at
1.7–2.6 km. The array aperture is of 0.156 km, thus suitable for analysing events at that distance. Minimum and maximum
slowness ($1\text{--}2\text{ s km}^{-1}$) and ~~frequency~~ frequency range (0.6–1.4 Hz) ~~values~~ of the exemplary LP event (Fig. 5, S4) yield
wavelengths of 0.36–1.7 km. At 1.7–2.6 km distance, longer wavelengths may be poorly resolved, as the wavefront can no
440 longer be assumed planar (Schweitzer et al., 2012).

~~The high uncertainties~~ Sliding window lengths of 0.5 and 5 min applied in the array ~~processing, despite a well-fitting BAZ,~~
~~are likely caused by the array response at the time of event (Suppl. analysis result in similar trends as the here presented 30-min~~
processing windows (Fig. S14) ~~S3) and confirm reliability of the results.~~ The strong main lobe near the slowness grid centre
(i.e., at low slowness) leads to multiple possible BAZ solutions within the high-semblance region ~~(Fig. S16)~~. A larger array
445 aperture would enhance the BAZ resolution for ~~the~~ lower frequencies (Schweitzer et al., 2012). Based on the general array
response ~~Suppl.~~ (Fig. S2) and the slowness grid results for the start of the exemplary LP event (~~Suppl.~~ Fig. S14) ~~S16~~, we can
conclude, that it primarily emphasizes the main lobe when a narrow-band coherent signal is present. Low uncertainties for LP
events derive from similar back azimuths and slowness values obtained by higher resolution results, but can be confirmed by
synthetic simulations (Fig. S7). With high SNR of 10 we expect uncertainties of less than 10° and 0.02 s km^{-1} , whereas lower
450 SNR leads to higher uncertainties for back azimuth and slowness results.

Local heterogeneities affect small arrays more than large ones, with near-surface structures distorting the wavefield. For
Etna volcano, these heterogeneities and topographic effects have been used to explain differences in the inversion of slowness
data, with two arrays pointing to different directions of the same recorded tremor signal (Saccorotti et al., 2004), while site
effects do not show a strong influence on the ~~tremor source network~~ network tremor locations (Cannata et al., 2013). However,
455 according to Cannata et al. (2013) and Battaglia et al. (2005), two simultaneously active sources could lead to volcanic tremor
sources being located in between the actual locations by the network amplitude decay technique. LP events and tremor share
the 0.6-1.4 Hz range, complicating separation, but tremor locations from the INGV-OE network match actual volcanic activity
well (Cannata et al., 2013; Sciotto et al., 2022).

Finally, we compare the BAZ from the array components and the 6C station results to the INGV-OE reference locations
460 assuming that those are close to the true locations. However, the amplitude-based method of the network for tremor is associated
with uncertainties of around 500 m. The rotational sensor is sensitive to local heterogeneities which limits the accuracy of
direction results and velocities (Keil et al., 2022; Donner, 2021).

5.2 Tremor source parameters: Comparative and joint analysis of the array, 6C, and the INGV-OE network

~~We plot the~~ INGV-OE tremor locations ~~and observe~~ (Fig. 2) indicate, despite some outliers, a location clustering according to
465 the eruption phases. Pre-eruptive back azimuths differ between the methods and possibly result from low tremor amplitudes
and stronger influence of noise (Fig. 3**b-d**). From the eruption start with ash emission (phase 1) through Strombolian activity
(phase 2) at the northern craters, INGV-OE and 6C tremor directions point south of the southern craters to SEC and NSEC.
Array HHZ directions point to SE and NSE crater. We assume activity at both crater regions during phase 1 and 2, that are
respectively indicated by the array directions (southern craters) and visible activity (northern craters). The network and 6C
470 BAZ results possibly indicate insufficient high amplitudes to resolve correct directions at the general crater region or might be
deviated due to local heterogeneities (Donner (2021) and references therein) that could effectively be mitigated by the array
analysis.

During the high amplitude tremor and strong Strombolian activity, INGV-OE and array-derived back azimuths coincide
and align with visible activity. They are assumed to be correct. The systematically lower ~~phase-3~~ back azimuths estimated
475 by the 6C method during this phase 3, compared to those from array and network analyses, raise the question of whether the
rotational sensor's 6C method is more sensitive to secondary activity south of the New South East crater, or whether they result
from small-scale structures (Keil et al., 2022), given that the 6C method relies on a single-point measurement. Multiple active
tremor sources have been confirmed for an eruption in 1999 on Mt. Etna (Cannata et al., 2008) and can not be excluded for
this 2019 eruption. However, we believe that the back azimuth differences by the 6C method are rather caused by local site
480 heterogeneities. We assume that a secondary activity would to some extent as well be displayed by array back azimuths.

The accuracy of array results depends on the semblance of all stations. As semblance is low before any visible activity, the
array BAZ are not in agreement with the reference (Fig. 4**3c**). At the onset of the eruption, the tremor amplitude increases
slightly with high correlation and semblance for ~~all the both~~ methods. Lower array semblance and lower 6C station correlation
are observed from phase 3 onwards. At the same time tremor ~~depths~~ depth changes occur. We hypothesize that the difference in
485 medium propagation paths results in low semblance. While the array slowness reaches similar values during high semblance,
the 6C phase velocities represent the tremor amplitude changes and are stable with the exception of phase 3 only, as noted by
Eibl et al. (2022a). During phase 3, the reduced 6C station correlation between the seismometer and rotational sensor might be
caused by the deepening of the tremor source and consequently wave type mixing associated with intense Strombolian activity
on the surface but tremor ~~in the at~~ depth. Eibl et al. (2022a) already noticed SV type of waves during the elevated Strombolian
490 activity. Distance increase by around 5 km and tremor slowness decrease were interpreted as tremor deepening by Eibl et al.
(2017a) on Iceland. However, ~~here the distance change is of~~ in this case the distance changes by 0.8 km and might thus not
show a significant change in slowness.

We conclude, that low tremor amplitude results in diverging direction ~~estimations~~ estimates by all methods, which could
confirm either noise dominance or secondary sources, as interpreted for LP events by Schick et al. (1982) and tremor by
495 Cannata et al. (2008) on Mt. Etna. During high tremor amplitudes the phase-based array results fit the INGV-OE reference
directions and the visible activity locations, whereas the amplitude-based 6C method might be deviated by local heterogeneities
(Keil et al., 2022; Donner, 2021) or due to SV wave types. The tremor slowness decreases with increasing depths while phase
velocities increase coherently. Relatively high slowness values of around 1.2 to 1.7 km s⁻¹ in comparison to slowness values of

0.5 to 0.7 km s⁻¹ for volcanic tremor on Iceland (Eibl et al., 2017a) could be related to deeper sources, higher complexity of the volcanic edifice and surface wave type tremor. Assuming that array slownesses represent surface waves (1.2-1.4 s km⁻¹), we convert them to phase velocities of 0.7 to 0.8 km s⁻¹. There is a discrepancy of around 0.3 km s⁻¹ compared with the phase velocities derived using the 6C method. This might be, as before mentioned, due to small-scale structures deviating the incoming waves (Keil et al., 2022; Donner, 2021), or due to a mixtures of wave types during phase 3 (Eibl et al., 2022a), resulting in slower phase velocities.

5.3 Love wave type LP events: velocities and directions

Even though the eruption, starting on 4 September 2019 with weak ash emissions, took place at the North East and Voragine craters (Eibl et al., 2022a), most LP events point to a source at shallow depth further north of the North East crater according to the network directions. In previous studies, LP events at Mt. Etna have ~~in other studies already~~ been mentioned to be present without volcanic activity as well, thus not directly related to volcanic activity (Cannata et al., 2009).

For the exemplary LP event on 2 September 2019 no clear direction change is observed comparing the BAZ of the small-amplitude signals emerging around 15:50:45 and 15:51:05 in Fig. 5a, b, - prior to the detected LP event ~~-to the LP event (Fig. 5)-~~ at 15:51:15. Persistent low amplitude activity could explain similar directions before and after the defined LP event, we thus interpret those high correlation times as real pulse signals of lower amplitude than the LP events.

We achieve better fitting BAZ from the array processing for all the LP events than from the 6C analysis. ~~However, both methods~~ Towards the visible activity start, array BAZ seem to focus more on the crater area, a change which is not observed for the 6C BAZ. However, the array and 6C BAZ seem to be both influenced by a deviation of 20° towards south, ~~-the array mostly by up to 20° and the rotational sensor method by~~ but the 6C BAZ even up to 80°, ~~but the latter thus~~ generally more scattered ~~results~~ in comparison with the INGV-OE directions. Disagreement could possibly be related to the faults indicated in Fig. 1d, which have already been found to cause short wavelength discrepancies in the comparison of strain recorded by Distributed Dynamic Strain Sensing (DDSS) and the array derived strain (Currenti et al., 2021; Jousset et al., 2025). Station *Bb22*, which was also used in ~~this our~~ study, seemed to be most affected by the faults (Currenti et al., 2021). ~~However~~ Nevertheless, no significant waveform differences were observed between the array stations. The faults may affect the entire array, not just the nearest station. The INGV-OE network locations ~~could furthermore be affected by up to~~ are constrained by an estimated 500 m uncertainty, making it difficult to even distinguish between northern and southern craters. If this separation is not possibly due to the uncertainties, then array back azimuths point at least mostly to the summit region, fitting visible activity generally in general. 6C LP event BAZ results, from a point measurement, are possibly again affected by local heterogeneities, as LP event amplitudes and LP event SNR for the HJZ component (~~Fig. ??d) did do~~ not show a clear effect on the BAZ reference agreement. Low 6C SNR relative to the array, however, likely ~~contributes contribute~~ to the increased scatter (Brotzer et al., 2025) observed in the results (~~Brotzer et al., 2025~~); (Figs. 6, 7).

The frequency increase over the LP event time is interpreted as dispersion. ~~Together with the~~ Combined with the decrease in 6C phase velocity ~~decrease with increasing frequencies~~ surface waves are expected (Udías and Buforn, 2018; Bormann et al., 2012; Chouet at higher frequencies, this behaviour is consistent with the presence of surface waves (Chouet et al., 1997; Bormann et al., 2012; Udías and

. Rotational sensor recordings suggest a SH-wave dominated wavefield and the array-derived slownesses are typical for surface waves [in volcanic media](#). The joint interpretation of array and rotational sensor results hence allow us to constrain that long-period events at Etna between 24 August to 6 September 2019 were predominantly composed of Love-waves. 6C LP phase velocities of mostly 400-700 ms⁻¹, as mentioned by Eibl et al. (2022a) match the shear wave velocity range of 400-1100 ms⁻¹ obtained from distributed acoustic sensing (DAS) investigation on Mt. Etna (Jousset et al., 2022). Zuccarello et al. (2016) obtained the same range of shear wave velocities (400-700 ms⁻¹) down to 130 m depth. Tremor array slowness values are around 1.2 s km⁻¹ with high semblance and agree with expected surface wave slownesses from [VT event analysis](#)[the analysis of a 2.4 magnitude VT event that occurred on 6 September 9:34 UTC at NEC](#). The 6C phase velocities ~~are related~~ [correspond](#) to higher slowness values of 2.2 to 2.8 s km⁻¹ which is possibly ~~a cause of~~ [related to](#) local scattering.

6 Conclusion and Outlook

~~For the first time in a volcanic setting, we~~ [We](#) present a direct comparison between back azimuths derived from a seismic array and those obtained from a six-component-station of a rotational sensor and a seismometer [in a volcanic setting](#). Differences in tremor and long-period event back azimuths between the two methods and in comparison with the network reference of the INGV-OE highlight the complexity and influence of the volcanic edifice. We conclude that low amplitude tremor leads to back azimuth disagreement between all three methods and none leads to directions indicating the actual surface activity. During high amplitude tremor, the INGV-OE network and array BAz overlap and point to the northern craters where strong Strombolian activity was observed. The 6C ~~BAz however are by~~ [BAz, however, point back in a direction 20° deviated further](#) south, which is interpreted to result from topography or local heterogeneities. The array tremor slownesses indicate reliable results with slightly faster velocities during the eruption confirming a deeper tremor source. 6C phase velocities are ~~expected to be~~ higher and the disagreement might derive likewise from topographic influence or local structures. Eibl et al. (2022a) noted a mixed tremor wavefield during strong Strombolian activity. As the 6C method relies on the SH-type waves only, it can not be expected to represent the mixed wavefield directions accurately. Applying another method for SV-type waves on the horizontal components of the rotational sensor (Wassermann et al., 2020) resulted in expected directions towards the northern craters (Eibl et al., 2022a). Likewise, applying array processing on the horizontal array components for the low amplitude eruption phases mainly consisting of SH-type waves should result in more accurate directions too. We thus suggest adapting the methodology according to the wavefield once known.

As LP event back azimuths show southward deviation from the INGV-OE reference for both methods, we assume a strong topographic effect due to the volcanic site itself (Schick et al., 1982), which could to some extent also affect the array ~~(Eibl et al., 2017a; Chouet et al., 1997)~~ [\(Chouet et al., 1997; Eibl et al., 2017a\)](#). Nonetheless, array-derived BAz encompass the entire crater region and network locations yield uncertainties comprising the entire summit area as well. Scattered 6C BAz could derive from local heterogeneities (Singh et al., 2019) or the distance of the 6C set-up to the events (Izgi et al., 2025), as a direct influence of event SNR and amplitude could be excluded.

565 Sciotto et al. (2022) stated, that tremor amplitudes at Mt. Etna are more connected to volcanic activity, than the LP event amplitudes, which could be confirmed in terms of locations in our work. They deduce from their findings, that tremor and LP events at Mt. Etna most likely have different source mechanisms. Further possible interpretation of no clear correlation between LP events and ~~eruption~~ other eruptions on Mt. Etna are given by De Barros et al. (2009); Cannata et al. (2009); Sciotto et al. (2022).

570 Adding more stations improves the array's ability to filter seismic signals based on their slowness and direction, allowing for better isolation of the target signals and suppression of unwanted energy (Schweitzer et al., 2012). Even more information could be obtained from a second array together with another 6C station at two different locations to derive event locations instead of directions while compensating for structural effects on the wavefield (Métaxian et al., 2002). Relocating the instruments to a different site of Mount Etna could offer a more detailed understanding of the path effects mentioned by Saccorotti et al. (2004).

575 Finally, we recommend further investigation of the low-amplitude signals preceding the network-detected LP events to better constrain source information. Fibre optic technologies, of which rotational sensors, are promising for volcano monitoring in terms of understanding volcanic processes and structure (Jousset et al., 2025). We recommend more testing of rotational sensors in volcanic environments to understand specific influence of topography and scattering on both methods. While the array processing appears to provide more accurate directions of tremor and LP event signals, the rotational sensor facilitates
580 wavefield separation. ~~Our study's outcomes~~ Outcomes of our study highlight the advantage of combining both approaches, resulting in improved volcano-seismic source characterization.

Data availability. The seismic data will be made publicly available at GEOFON during the review process. Preprocessed data files will be made available through GFZ Data Services. The rotational sensor and Bb17 data is available at GEOFON Eibl et al. (2022b) via <https://doi.org/10.14470/ME7564062119>.

585 *Author contributions.* PJ, EE, and GC planned the campaign; EE, GC, and PJ installed the sensors; EE developed the conceptualization; NV and EE analysed the data; NV developed the visualisations and wrote the manuscript draft; EE, MO, GC, GdG, MS and PJ reviewed and edited the manuscript.

Competing interests. At least one of the (co-)authors is a member of the editorial board of Solid Earth.

Acknowledgements. We thank the "Geophysical Instrument Pool Potsdam" from GFZ for providing instruments and the "Parco dell'Etna" and the municipalities (Linguaglossa and Castiglione di Sicilia) for the permit to deploy the instruments in the Etna national park. This work
590 was possible thanks to support with logistics and in the field of Daniel Vollmer from University of Potsdam and Danilo Contrafatto, Graziano

Larocca, Daniele Pellegrino and Mario Pulvirenti from the Istituto Nazionale di Geofisica e Vulcanologia-Osservatorio Etneo (INGV-OE). Many thanks go to Gizem Izgi for improving comments and discussion.

Financial support. This research was funded by the Deutsche Forschungsgemeinschaft (DFG, German Research Foundation) - grant number 595 440761244.

References

- Almendros, J., Chouet, B., and Dawson, P.: Spatial extent of a hydrothermal system at Kilauea Volcano, Hawaii, determined from array analyses of shallow long-period seismicity: 1. Method, *Journal of Geophysical Research: Solid Earth*, 106, 13 565–13 580, <https://doi.org/https://doi.org/10.1029/2001JB000310>, 2001.
- 600 Almendros, J., Abella, R., Mora, M. M., and Lesage, P.: Array analysis of the seismic wavefield of long-period events and volcanic tremor at Arenal volcano, Costa Rica, *Journal of Geophysical Research: Solid Earth*, 119, 5536–5559, <https://doi.org/https://doi.org/10.1002/2013JB010628>, 2014.
- Battaglia, J., Got, J.-L., and Okubo, P.: Location of long-period events below Kilauea Volcano using seismic amplitudes and accurate relative relocation, *Journal of Geophysical Research: Solid Earth*, 108, <https://doi.org/https://doi.org/10.1029/2003JB002517>, 2003.
- 605 Battaglia, J., Aki, K., and Ferrazzini, V.: Location of tremor sources and estimation of lava output using tremor source amplitude on the Piton de la Fournaise volcano: 1. Location of tremor sources, *Journal of Volcanology and Geothermal Research*, 147, 268–290, <https://doi.org/https://doi.org/10.1016/j.jvolgeores.2005.04.005>, 2005.
- Bernauer, F., Wassermann, J., Guattari, F., Frenois, A., Bigueur, A., Gaillot, A., de Toldi, E., Ponceau, D., Schreiber, U., and Igel, H.: BlueSeis3A: Full Characterization of a 3C Broadband Rotational Seismometer, *Seismological Research Letters*, 89, 620–629, <https://doi.org/10.1785/0220170143>, 2018.
- 610 Bernauer, F., Behnen, K., Wassermann, J., Egdorf, S., Igel, H., Donner, S., Stammler, K., Hoffmann, M., Edme, P., Sollberger, D., Schmelzbach, C., Robertsson, J., Paitz, P., Igel, J., Smolinski, K., Fichtner, A., Rossi, Y., Izgi, G., Vollmer, D., Eibl, E. P. S., Buske, S., Veress, C., Guattari, F., Laudat, T., Mattio, L., Sèbe, O., Olivier, S., Lallemand, C., Brunner, B., Kurzych, A. T., Dudek, M., Jaroszewicz, L. R., Kowalski, J. K., Bońkowski, P. A., Bobra, P., Zembaty, Z., Vackář, J., Málek, J., and Brokesova, J.: Rotation, Strain, and Translation Sensors Performance Tests with Active Seismic Sources, *Sensors*, 21, <https://doi.org/10.3390/s21010264>, 2021.
- 615 Beyreuther, M., Barsch, R., Krischer, L., Megies, T., Behr, Y., and Wassermann, J.: ObsPy: A Python Toolbox for Seismology, *Seismological Research Letters*, 81, 530–533, <https://doi.org/10.1785/gssrl.81.3.530>, 2010.
- Bormann, P., Engdahl, B., and Kind, R.: Seismic Wave Propagation and Earth models, in: *New Manual of Seismological Observatory Practice 2 (NMSOP-2)*, edited by Bormann, P., pp. 1–105, Deutsches GeoForschungsZentrum GFZ, Potsdam, https://doi.org/10.2312/GFZ.NMSOP-2_ch2, 2012.
- 620 Brotzer, A., Igel, H., Bernauer, F., Wassermann, J., Mellors, R., and Vernon, F.: On single-station, six degree-of-freedom observations of local to regional seismicity at the Piñon Flat Observatory in Southern California, *Seismica*, 4, <https://doi.org/10.26443/seismica.v4i1.1416>, 2025.
- Buttkus, B.: *Multidimensional Filters*, pp. 549–580, Springer Berlin Heidelberg, Berlin, Heidelberg, ISBN 978-3-642-57016-2, https://doi.org/10.1007/978-3-642-57016-2_25, 2000.
- 625 Cannata, A., Catania, A., Alparone, S., and Gresta, S.: Volcanic tremor at Mt. Etna: Inferences on magma dynamics during effusive and explosive activity, *Journal of Volcanology and Geothermal Research*, 178, 19–31, <https://doi.org/https://doi.org/10.1016/j.jvolgeores.2007.11.027>, dynamics of Volcanic Explosions: Field Observations, Experimental Constraints and Integrated Modelling of Volcanic Explosions: Field Observations, Experimental Constraints and Integrated Modelling, 2008.
- 630

- Cannata, A., Hellweg, M., Di Grazia, G., Ford, S., Alparone, S., Gresta, S., Montalto, P., and Patanè, D.: Long period and very long period events at Mt. Etna volcano: Characteristics, variability and causality, and implications for their sources, *Journal of Volcanology and Geothermal Research*, 187, 227–249, <https://doi.org/https://doi.org/10.1016/j.jvolgeores.2009.09.007>, 2009.
- 635 Cannata, A., Di Grazia, G., Montalto, P., Ferrari, F., Nunnari, G., Patanè, D., and Privitera, E.: New insights into banded tremor from the 2008–2009 Mount Etna eruption, *Journal of Geophysical Research: Solid Earth*, 115, <https://doi.org/https://doi.org/10.1029/2009JB007120>, 2010.
- Cannata, A., Di Grazia, G., Aliotta, M., Cassisi, C., Montalto, P., and Patanè, D.: Monitoring Seismo-volcanic and Infrasonic Signals at Volcanoes: Mt. Etna Case Study, *Pure and Applied Geophysics*, 170, <https://doi.org/10.1007/s00024-012-0634-x>, 2013.
- 640 Cannata, A., Di Grazia, G., Giuffrida, M., Gresta, S., Palano, M., Sciotto, M., Viccaro, M., and Zuccarello, F.: Space-Time Evolution of Magma Storage and Transfer at Mt. Etna Volcano (Italy): The 2015–2016 Reawakening of Voragine Crater, *Geochemistry, Geophysics, Geosystems*, 19, 471–495, <https://doi.org/https://doi.org/10.1002/2017GC007296>, 2018.
- Cannavo', F., Sciotto, M., Cannata, A., and Di Grazia, G.: An Integrated Geophysical Approach to Track Magma Intrusion: The 2018 Christmas Eve Eruption at Mount Etna, *Geophysical Research Letters*, 46, 8009–8017, <https://doi.org/https://doi.org/10.1029/2019GL083120>, 2019.
- 645 Chouet, B.: Resonance of a fluid-driven crack: Radiation properties and implications for the source of long-period events and harmonic tremor, *Journal of Geophysical Research: Solid Earth*, 93, 4375–4400, <https://doi.org/https://doi.org/10.1029/JB093iB05p04375>, 1988.
- Chouet, B.: Long-period volcano seismicity: its source and use in eruption forecasting, *Nature*, 380, 309–316, <https://doi.org/10.1038/380309a0>, 1996a.
- Chouet, B.: Volcano Seismology, pure and applied geophysics, 160, 739–788, <https://doi.org/10.1007/PL00012556>, 2003.
- 650 Chouet, B.: Volcanoes, Non-linear Processes in, in: *Complexity in Tsunamis, Volcanoes, and their Hazards*, pp. 469–502, Springer New York, NY, ISBN 978-1-0716-1705-2, <https://doi.org/10.1007/978-1-0716-1705-2>, 2009.
- Chouet, B. and Matoza, R. S.: A multi-decadal view of seismic methods for detecting precursors of magma movement and eruption, *Journal of Volcanology and Geothermal Research*, 252, 108–175, <https://doi.org/https://doi.org/10.1016/j.jvolgeores.2012.11.013>, 2013.
- 655 Chouet, B., Saccorotti, G., Martini, M., Dawson, P., De Luca, G., Milana, G., and Scarpa, R.: Source and path effects in the wave fields of tremor and explosions at Stromboli Volcano, Italy, *Journal of Geophysical Research: Solid Earth*, 102, 15 129–15 150, <https://doi.org/https://doi.org/10.1029/97JB00953>, 1997.
- Chouet, B. A.: *New Methods and Future Trends in Seismological Volcano Monitoring*, pp. 23–97, Springer Berlin Heidelberg, Berlin, Heidelberg, ISBN 978-3-642-80087-0, https://doi.org/10.1007/978-3-642-80087-0_2, 1996b.
- 660 Cochard, A., Igel, H., Schuberth, B., Suryanto, W., Velikoseltsev, A., Schreiber, U., Wassermann, J., Scherbaum, F., and Vollmer, D.: Rotational Motions in Seismology: Theory, Observation, Simulation, in: *Earthquake Source Asymmetry, Structural Media and Rotation Effects*, edited by Teisseyre, R., Majewski, E., and Takeo, M., pp. 391–411, Springer Berlin Heidelberg, Berlin, Heidelberg, ISBN 978-3-540-31337-3, https://doi.org/10.1007/3-540-31337-0_30, 2006.
- Currenti, G. and Bonaccorso, A.: Cyclic magma recharge pulses detected by high-precision strainmeter data: the case of 2017 inter-eruptive activity at Etna volcano, *Scientific Reports*, 9, 1–7, <https://doi.org/https://doi.org/10.1038/s41598-019-44066-w>, 2019.
- 665 Currenti, G., Jousset, P., Napoli, R., Krawczyk, C., and Weber, M.: On the comparison of strain measurements from fibre optics with a dense seismometer array at Etna volcano (Italy), *Solid Earth*, 12, 993–1003, <https://doi.org/10.5194/se-12-993-2021>, 2021.

- De Barros, L., Bean, C. J., Lokmer, I., Saccorotti, G., Zuccarello, L., O'Brien, G. S., Métaxian, J.-P., and Patanè, D.: Source geometry from exceptionally high resolution long period event observations at Mt Etna during the 2008 eruption, *Geophysical Research Letters*, 36, <https://doi.org/https://doi.org/10.1029/2009GL041273>, 2009.
- 670 Di Grazia, G., Falsaperla, S., and Langer, H.: Volcanic tremor location during the 2004 Mount Etna lava effusion, *Geophysical Research Letters*, 33, <https://doi.org/https://doi.org/10.1029/2005GL025177>, 2006.
- Donner, S.: Chapter Three - Rotational ground motion measurements for regional seismic moment tensors: A review, in: *Inversion of Geophysical Data*, edited by Schmelzbach, C., vol. 62 of *Advances in Geophysics*, pp. 141–186, Elsevier, <https://doi.org/https://doi.org/10.1016/bs.agph.2021.06.002>, 2021.
- 675 Douglas, A.: 23 - Seismometer Arrays—Their Use in Earthquake and Test Ban Seismology, in: *International Handbook of Earthquake and Engineering Seismology*, Academic Press, 2002.
- Efron, B.: *The Jackknife, the Bootstrap and Other Resampling Plans*, Society for Industrial and Applied Mathematics, <https://doi.org/10.1137/1.9781611970319>, 1982.
- Eibl, E. P. S., Bean, C., Jónsdóttir, I., Hoskuldsson, A., Thordarson, T., Coppola, D., Witt, T., and Walter, T. R.: Multiple Coincident Eruptive
680 Seismic Tremor Sources During the 2014-2015 Eruption at Holuhraun, Iceland, *Journal of Geophysical Research: Solid Earth*, 122, <https://doi.org/10.1002/2016JB013892>, 2017a.
- Eibl, E. P. S., Bean, C., Vogfjörð, K., Ying, Y., Lokmer, I., Möllhoff, M., O'Brien, G., and Pálsson, F.: Tremor-rich shallow dyke formation followed by silent magma flow at Bárðarbunga in Iceland, *Nature Geoscience*, 10, 299–304, <https://doi.org/10.1038/ngeo2906>, 2017b.
- Eibl, E. P. S., Bean, C. J., Einarsson, B., Pálsson, F., and Vogfjörð, K. S.: Seismic ground vibrations give advanced early-warning of subglacial
685 floods, *Nature Communications*, 11, <https://doi.org/10.1038/s41467-020-15744-5>, 2020.
- Eibl, E. P. S., Rosskopf, M., Sciotto, M., Currenti, G., Di Grazia, G., Jousset, P., Krüger, F., and Weber, M.: Performance of a Rotational Sensor to Decipher Volcano Seismic Signals on Etna, Italy, *Journal of Geophysical Research: Solid Earth*, 127, e2021JB023617, <https://doi.org/https://doi.org/10.1029/2021JB023617>, e2021JB023617 2021JB023617, 2022a.
- Eibl, E. P. S., Vollmer, D., Jousset, P., Currenti, G., Contrafatto, D., Larocca, G., Pellegrino, D., and Pulvirenti, M.: 1-month seismological
690 experiment on Etna, Italy in 2019, <https://doi.org/10.14470/ME7564062119>, 2022b.
- Eibl, E. P. S., Vogfjörð, K. S., Ófeigsson, B. G., Roberts, M. J., Bean, C. J., Jones, M. T., Bergsson, B. H., Heimann, S., and Dietrich, T.: Subaerial and subglacial seismic characteristics of the largest measured jökulhlaup from the eastern Skaftá cauldron, Iceland, *Earth Surface Dynamics*, 11, 933–959, <https://doi.org/10.5194/esurf-11-933-2023>, 2023.
- Ferrazzini, V., Aki, K., and Chouet, B.: Characteristics of seismic waves composing Hawaiian volcanic tremor and gas-piston events observed
695 by a near-source array, *Journal of Geophysical Research: Solid Earth*, 96, 6199–6209, <https://doi.org/https://doi.org/10.1029/90JB02781>, 1991.
- Hadziioannou, C., Gaebler, P., Schreiber, K., Wassermann, J., and Igel, H.: Examining ambient noise using colocated measurements of rotational and translational motion, *Journal of Seismology*, 16, <https://doi.org/10.1007/s10950-012-9288-5>, 2012.
- Heimann, S., Kriegerowski, M., Isken, M., Cesca, S., Daout, S., Grigoli, F., Juretzek, C., Megies, T., Nooshiri, N., Steinberg,
700 A., Sudhaus, H., Vasyura-Bathke, H., Willey, T., and Dahm, T.: Pyrocko - An open-source seismology toolbox and library, <https://doi.org/10.5880/GFZ.2.1.2017.001>, 2017.
- Izgi, G., Eibl, E. P. S., Donner, S., and Bernauer, F.: Performance Test of the Rotational Sensor blueSeis-3A in a Huddle Test in Fürstenfeldbruck, *Sensors*, 21, 3170, <https://doi.org/10.3390/s21093170>, 2021.

- Izgi, G., Eibl, E. P. S., Krueger, F., and Bernauer, F.: Direction finding in an active source experiment in Fürstenfeldbruck, Germany using 6
705 DoF measurements, *Geophysical Journal International*, 240, 2042–2059, <https://doi.org/10.1093/gji/ggaf021>, 2025.
- Jousset, P., Neuberg, J., and Sturton, S.: Modelling the time-dependent frequency content of low-frequency volcanic earthquakes, *Journal of
Volcanology and Geothermal Research*, 128, 201–223, [https://doi.org/https://doi.org/10.1016/S0377-0273\(03\)00255-5](https://doi.org/https://doi.org/10.1016/S0377-0273(03)00255-5), putting Volcano
Seismology in a Physical Context. In memory of Bruno Martinelli, 2003.
- Jousset, P., Currenti, G., Schwarz, B., Chalari, A., Tilmann, F., Reinsch, T., Zuccarello, L., Privitera, E., and Krawczyk, C. M.: Fibre optic
710 distributed acoustic sensing of volcanic events, *Nature Communications*, 13, <https://doi.org/10.1038/s41467-022-29184-w>, 2022.
- Jousset, P., Currenti, G., Murphy, S., Eibl, E. P. S., Caudron, C., Retailleau, L., Wollin, C., Klaasen, S., Nishimura, T., Fichtner, A., Spica,
Z., Lemarchand, A., and Krawczyk, C.: Fiber Optic Sensing for Volcano Monitoring and Imaging Volcanic Processes, in: *Modern Volcano
Monitoring*, edited by Spica, Z. and Caudron, C., pp. 509–567, Springer Nature Switzerland, Cham, ISBN 978-3-031-86841-2,
https://doi.org/10.1007/978-3-031-86841-2_17, 2025.
- 715 Keil, S., Wilczek, A., Wassermann, J., and Kremers, S.: Comparing single-station 6C measurements and array measurements for seismic
microzonation in Munich, Germany, *Geophysical Journal International*, 231, 1634–1652, <https://doi.org/10.1093/gji/ggac273>, 2022.
- McNutt, S. R.: 25 - Volcano Seismology and Monitoring for Eruptions, in: *International Handbook of Earthquake and Engineering Seismol-
ogy*, Academic Press, 2002.
- Métaxian, J.-P., Lesage, P., and Valette, B.: Locating sources of volcanic tremor and emergent events by seismic triangula-
720 tion: Application to Arenal volcano, Costa Rica, *Journal of Geophysical Research: Solid Earth*, 107, ECV 10–1–ECV 10–18,
<https://doi.org/https://doi.org/10.1029/2001JB000559>, 2002.
- Neuberg, J., Luckett, R., Baptie, B., and Olsen, K.: Models of tremor and low-frequency earthquake swarms on Montserrat, *Journal of
Volcanology and Geothermal Research*, 101, 83–104, [https://doi.org/https://doi.org/10.1016/S0377-0273\(00\)00169-4](https://doi.org/https://doi.org/10.1016/S0377-0273(00)00169-4), 2000.
- Rost, S. and Thomas, C.: Array Seismology: Methods and Applications, *Reviews of Geophysics*, 40, 2–1–2–27,
725 <https://doi.org/https://doi.org/10.1029/2000RG000100>, 2002.
- Saccorotti, G., Chouet, B., and Dawson, P.: Wavefield properties of a shallow long-period event and tremor at Kilauea Volcano, Hawaii,
Journal of Volcanology and Geothermal Research, 109, 163–189, [https://doi.org/https://doi.org/10.1016/S0377-0273\(00\)00310-3](https://doi.org/https://doi.org/10.1016/S0377-0273(00)00310-3), 2001.
- Saccorotti, G., Zuccarello, L., Del Pezzo, E., Ibanez, J., and Gresta, S.: Quantitative analysis of the tremor wavefield at Etna Volcano, Italy,
Journal of Volcanology and Geothermal Research, 136, 223–245, <https://doi.org/https://doi.org/10.1016/j.jvolgeores.2004.04.003>, 2004.
- 730 Scarfì, L., Aloisi, M., Barberi, G., and Langer, H.: Observing Etna volcano dynamics through seismic and deformation patterns, *Scientific
Reports*, 13, 12951, <https://doi.org/10.1038/s41598-023-39639-9>, 2023.
- Schick, R., Cosentino, M., Lombardo, G., and Patanè, G.: Volcanic tremor at Mount Etna. A brief description, *Mem. Soc. Geol. Ital.*, 23,
191–196, 1982.
- Schweitzer, J., Fyen, J., Mykkeltveit, S., Gibbons, S. J., PIRLI, M., Kühn, D., and Kværna, T.: Seismic Arrays, in: *New Manual of Seis-
735 mological Observatory Practice 2 (NMSOP-2)*, edited by Bormann, P., pp. 1–80, Deutsches GeoForschungsZentrum GFZ, Potsdam,
https://doi.org/10.2312/GFZ.NMSOP-2_ch9, 2012.
- Sciotto, M., Cannata, A., Di Grazia, G., and Montalto, P.: Volcanic tremor and long period events at Mt. Etna: Same mechanism at different
rates or not?, *Physics of the Earth and Planetary Interiors*, 324, 106850, <https://doi.org/https://doi.org/10.1016/j.pepi.2022.106850>, 2022.
- Singh, S., Capdeville, Y., and Igel, H.: Correcting wavefield gradients for the effects of local small-scale heterogeneities, *Geophysical Journal
740 International*, 220, 996–1011, <https://doi.org/10.1093/gji/ggz479>, 2019.

- Soubestre, J., Seydoux, L., Shapiro, N. M., de Rosny, J., Droznin, D. V., Droznina, S. Y., Senyukov, S. L., and Gordeev, E. I.: Depth Migration of Seismovolcanic Tremor Sources Below the Klyuchevskoy Volcanic Group (Kamchatka) Determined From a Network-Based Analysis, *Geophysical Research Letters*, 46, 8018–8030, <https://doi.org/https://doi.org/10.1029/2019GL083465>, 2019.
- 745 Suryanto, W., Igel, H., Wassermann, J., Cochard, A., Schuberth, B., Vollmer, D., Scherbaum, F., Schreiber, U., and Velikoseltsev, A.: First Comparison of Array-Derived Rotational Ground Motions with Direct Ring Laser Measurements, *Bulletin of the Seismological Society of America*, 96, 2059–2071, <https://doi.org/10.1785/0120060004>, 2006.
- Trnkoczy, A.: Understanding and parameter setting of STA/LTA trigger algorithm, in: *New Manual of Seismological Observatory Practice 2 (NMSOP-2)*, edited by Bormann, P., pp. 1–20, Deutsches GeoForschungsZentrum GFZ, Potsdam, Germany, 2012.
- Udías, A. and Buforn, E.: *Principles of Seismology*, Cambridge University Press, 2 edn., ISBN 9781107138698, 2018.
- 750 Wassermann, J.: Locating the sources of volcanic explosions and volcanic tremor at Stromboli volcano (Italy) using beam-forming on diffraction hyperboloids, *Physics of the Earth and Planetary Interiors*, 104, 271–281, [https://doi.org/https://doi.org/10.1016/S0031-9201\(97\)00041-1](https://doi.org/https://doi.org/10.1016/S0031-9201(97)00041-1), *stochastic Seismology Stochastic Seismic Wave Fields and Realistic Media*, 1997.
- Wassermann, J., Wietek, A., Hadziioannou, C., and Igel, H.: Toward a Single-Station Approach for Microzonation: Using Vertical Rotation Rate to Estimate Love-Wave Dispersion Curves and Direction Finding, *Bulletin of the Seismological Society of America*,
755 <https://doi.org/10.1785/0120150250>, 2016.
- Wassermann, J., Bernauer, F., Shiro, B., Johanson, I., Guattari, F., and Igel, H.: Six-Axis Ground Motion Measurements of Caldera Collapse at Kilauea Volcano, Hawai‘i—More Data, More Puzzles?, *Geophysical Research Letters*, 47, e2019GL085999, <https://doi.org/https://doi.org/10.1029/2019GL085999>, e2019GL085999 2019GL085999, 2020.
- Wassermann, J., Braun, T., Ripepe, M., Bernauer, F., Guattari, F., and Igel, H.: The use of 6DOF measurement in volcano seismology – A first application to Stromboli volcano, *Journal of Volcanology and Geothermal Research*, 424, 107499, <https://doi.org/https://doi.org/10.1016/j.jvolgeores.2022.107499>, 2022.
- 760 Yilmaz, Ö. and Doherty, S.: *Seismic Data Analysis: Processing, Inversion, and Interpretation of Seismic Data*, Nr. 10, Bd. 2, Society of Exploration Geophysicists, 2 edn., ISBN 1-56080-099-2, 2001.
- Zobin, V. M.: Chapter 12 - Volcanic Tremor, in: *Introduction to Volcanic Seismology (Third Edition)*, edited by Zobin, V. M., pp. 263–
765 288, Elsevier, Oxford, third edition edn., ISBN 978-0-444-63631-7, <https://doi.org/https://doi.org/10.1016/B978-0-444-63631-7.00012-1>, 2017.
- Zuccarello, L., Paratore, M., La Rocca, M., Ferrari, F., Messina, A., Branca, S., Contrafatto, D., Galluzzo, D., Rapisarda, S., and García, L.: Shallow velocity model in the area of Pozzo Pitarrone, Mt. Etna, from single station, array methods and borehole data, *Annals of Geophysics*, 59, <https://doi.org/10.4401/ag-7086>, 2016.
- 770 Zuccarello, L., De Angelis, S., Minio, V., Saccorotti, G., Bean, C. J., Paratore, M., and Ibanez, J. M.: Volcanic Tremor Tracks Changes in Multi-Vent Activity at Mt. Etna, Italy: Evidence From Analyses of Seismic Array Data, *Geophysical Research Letters*, 49, e2022GL100056, <https://doi.org/10.1029/2022GL100056>, 2022.