

Best practices for estimating turbulent dissipation from oceanic single-point velocity timeseries observations

Cynthia E. Bluteau¹, Danielle J. Wain², Julia C. Mullarney³, and Craig L. Stevens^{4,5}

¹Institute of Ocean Sciences, Fisheries and Oceans Canada, Sidney BC, Canada

²7 Lakes Alliance, Belgrade Lakes ME, USA

³Coastal Marine Group, School of Science, University of Waikato, Hamilton, New Zealand

⁴Institute for Earth Science, Wellington, New Zealand

⁵Dept. Physics, University of Auckland, Auckland, New Zealand

Correspondence: Cynthia E. Bluteau (cynthia.bluteau@dfo-mpo.gc.ca)

Abstract. We provide best practices for estimating the dissipation rate of turbulent kinetic energy, ε , from velocity measurements in an oceanographic context. These recommendations were developed as part of the Scientific Committee on Oceanographic Research (SCOR) Working Group #160 “Analyzing ocean turbulence observations to quantify mixing”. The recommendations here focus on velocity measurements that enable fitting the inertial subrange of wavenumber velocity spectra. The method
5 examines the measurable range for this method of dissipation rates in the ocean, seas, and other natural waters. The recommendations are intended to be platform-independent since the velocities may be measured using bottom-mounted platforms, platforms mounted beneath the ice, or platforms directly on mooring lines once the data is motion-decontaminated. The procedure for preparing the data for spectral estimation is discussed in detail, along with the quality control metrics that should accompany each estimate of ε during data archiving. The methods are applied to four ‘benchmark’ datasets covering different flow regimes
10 and two instrument types (acoustic-Doppler and time of travel). Problems associated with velocity data quality, such as phase-wrapping, spikes, measurement noise, and frame interference, are illustrated with examples drawn from the benchmarks. Difficulties in resolving and identifying the inertial subrange are also discussed, and recommendations on how these issues should be identified and flagged during data archiving are provided.

1 Introduction

15 Quantifying turbulence and mixing in the ocean is critical for understanding many processes including the turbulent transfer of momentum, heat and material —as well as the dissipation of energy (Fox-Kemper et al., 2019). For example, when seeking to understand how an ocean boundary layer responds to wind, it is critical to reliably understand how energy is dissipated by a turbulent cascade to the viscous scales —or how material is exchanged across isolines, such as the seasonal thermocline, as well as through boundaries of the fluid into the benthos or atmosphere (D’Asaro, 2014).

20 However, owing to the small temporal and spatial scales which inherently characterize turbulent flow, key representative quantities are often not straightforward to measure (Gregg, 1999). The dissipation rate of turbulent kinetic energy ε describes the energy lost from the fluid system to viscous dissipation. In addition, ε can be related to processes that drive turbulent fluxes of momentum, heat and material. The small scales and variable nature of the processes require precise measurement and analysis before one arrives at an estimate of ε and associated quantities.

25 These computations are especially challenging in the ocean as ε can range over almost ten orders of magnitude (Stewart and Grant, 1999). Consequently, distinct measurement techniques have been developed for differing parts of this wide range of ε . Microstructure ~~profiling shear probes can measure turbulence~~ shear probes are particularly useful for measuring turbulence profiles in low to medium energy regions of the ocean (Lueck et al., 2024), ~~while typical point-velocity sensors allow for estimating~~ as these sensors typically resolve the smallest, viscous, turbulence scales (Lueck et al., 2024). Point-velocity sensors are better suited for obtaining timeseries of dissipation rate ~~in higher-energy environments~~ than shear probes. However, velocity sensors can typically only resolve the larger turbulence length scales, and thus estimating ε is limited to relatively high energy environments.

Acoustic point-measurement instruments —sensors which measure point-velocity timeseries in the ocean —have been deployed since the mid-1990s (Lemmin et al., 1999; Rusello et al., 2006), and are based on either acoustic backscatter ~~(e.g., MAVS) are better suited to low-energy environments~~, such as Modular Acoustic Velocity Sensor (MAVS), are typically better suited than the acoustic backscatter approach in environments with low concentration of acoustic scatterers or weak currents. These environments are typically associated with low ε . The single-point measurements were found to be especially well-suited to capture ε values within boundary-layers to improve understanding of dynamics and transfer processes (Li et al., 2022); or, in ~~experiments in which the control volume is fixed in space - i.e., the sensor is mounted on the sea bed or a fixed platform, rather than in open-ocean measurements of ε such as recorded with a falling profiler (Le Boyer et al., 2023).~~

Technology for acoustic point velocity timeseries measurements has matured over the last decades, with many commercial instruments now well-established (e.g., the Nortek Acoustic Doppler Velocimeter, ADV, and Nobska Modular Acoustic Velocity Sensor, MAVS), resulting in a wide user base of researchers and engineers. In particular, improvements in noise reduction meant ~~that by the late 1990s, data from these instruments were able to be analysed to provide turbulence estimates (e.g., Voulgaris and Trowbridge, 1998; Kim et al., 2000). Previously, such estimates were only undertaken by a small number of groups worldwide with bespoke equipment that was built, maintained, and operated in-house. With this expansion in the user-base comes a need~~

for consistent, or at least comparable, methods to assess data quality and archive datasets. However, currently no standardized methods or guidelines exist for these velocity measurements.

- 50 Here, we address this deficit by describing recommendations for best practices for obtaining ε from point velocity measurements. These recommendations were developed through the Scientific Committee on Oceanic Research working group #160 on Analysing ocean Turbulence Observations to quantify MIXing (ATOMIX), specifically the subgroup on point velocities. Our aim was to evaluate various methods for different processing steps and to provide recommendations of the most robust approach for researchers who are new to measuring turbulence in aquatic and oceanic flows. When multiple methods yielded similar results, we recommended the one that was easiest to implement. The working group ~~established~~ also created benchmark datasets to help assess and validate algorithms ~~(independent of programming language)~~ for estimating ε , regardless of programming language. The format of the benchmarks was designed to let researchers test processing workflows at intermediate checkpoints, enabling them to build on our working group's activities and propose new techniques. Our choice of benchmarks and their format recognizes that alternative methods may yield similar results at the processing checkpoints.
- 55
- 60 In addition, ATOMIX developed recommendations for two other types of technologies, shear probes (Lueck et al., 2024), and acoustic-Doppler current profilers (in prep). The ATOMIX approach promotes a consistent variable naming framework, followed by example-based description of guidelines for formatting, processing level, parameter estimation, and quality control. A key result is the provision of final ε estimates for the benchmark datasets to enable researchers to check their own analyses.

2 Background theory and sampling requirements

- 65 A critical aspect of most approaches to sampling environmental turbulence is that data are typically acquired in the time domain, but the mechanistic, physical understanding is best described and analyzed in the spatial (i.e., wavenumber) domain. Technological developments ~~are on the cusp of~~ have reduced the sampling volumes (bin size) measured by current-profilers, thus enabling the direct measurement of spatial spectra ~~(e.g., Shcherbina et al., 2018), but (e.g., Shcherbina et al., 2018; Zippel et al., 2021b).~~ However, we focus on the more traditional timeseries measurements ~~. These measurements are converted from a time to~~ spatial frame of reference that must be converted from temporal to spatial measurements by invoking Taylor's frozen turbulence hypothesis whereby, under certain conditions, turbulent structure can be considered 'frozen' as it moves past a stationary sensor (Lumley, 1965; Wyngaard and Clifford, 1977). In practice, this hypothesis requires an estimate of the mean advection speed \bar{U} past the sensor, which enables the conversion of spectral observations $\hat{\Psi}$ from the frequency f (Hz) to wavenumber domain \tilde{k} (cpm) as:
- 70

$$\hat{\Psi}(\tilde{k}) = \bar{U} \hat{\Psi}(f)$$

- 75 $\tilde{k} = \frac{f}{\bar{U}}.$ (1)

The presence of $\hat{\cdot}$ above variables indicate observational or estimated parameters.

Irrespective of whether the instrument is fixed or moving (e.g., drifting or moored), the velocity \bar{U} is always the speed relative to the instrument rather than the actual water speed. This conversion can lead to errors in ε of a few percent when

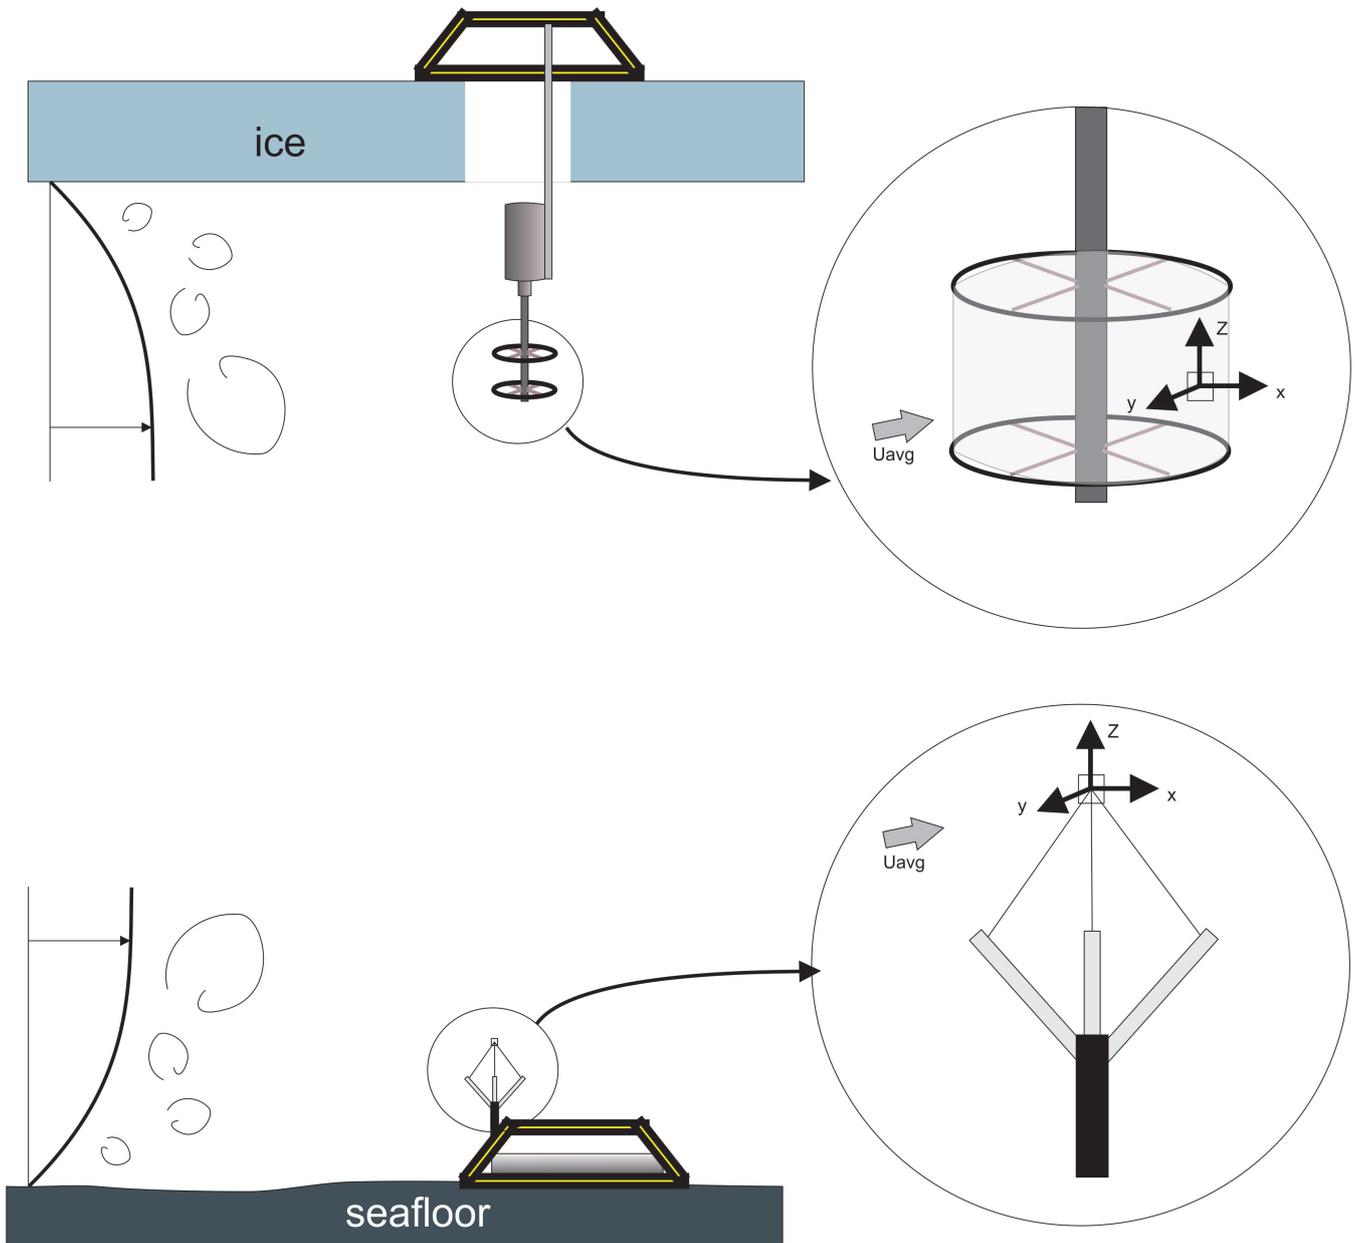


Figure 1. Sketch of point velocity deployment configurations showing both under ice and seafloor deployments with examples of a time of travel sensor (upper) or acoustic backscatter sensor (lower).

\bar{U} is about ten times larger than the root-mean-square of the turbulent velocity fluctuations in the direction of the mean flow u_{rms} (Wyngaard and Clifford, 1977; Lumley, 1965). The error magnitude in flows with low mean speeds \bar{U} was determined more recently by Pécseli and Trulsen (2022), using idealized numerical experiments. Their work excludes the impact of surface

waves on the advection of turbulence and the estimated u_{rms} . They found that the expected errors on $\hat{\varepsilon}$ drops when the ratio u_{rms}/\bar{U} increases. When \bar{U} was three times larger than u_{rms} , the $\hat{\varepsilon}$ estimates were overpredicted by less than 10%. The errors grew to about 25% when \bar{U} was comparable in magnitude to u_{rms} (Pécsele and Trulsen, 2022).

85 Taylor’s hypothesis impacts which wavenumbers are resolved in the final spectra. Slower mean speeds enable resolution of the smaller turbulence scales within the viscous subrange without increasing the sampling rate of measurements (Figure 2). Hence, the expected mean speed \bar{U} must be considered when selecting the sampling frequency of measurements and setting the ambiguity velocity of the instrument. ~~A low~~ The ambiguity velocity defines the maximum (unambiguous) along-beam velocity that can be measured (for a given transmit pulse). A smaller ambiguity velocity in pulse-coherent Doppler instruments
 90 improves the data quality by reducing the measurement noise but might “phase wrap” the measured velocities (Lhermitte and Serafin, 1984; Lohrmann and Nylund, 2008). Section §4.1 covers how phase-wrapped data can be identified and remedied, while the metrics for assessing the validity of Taylor’s hypothesis will be discussed in section 4.2.

The sampling rate and segmenting choices must consider the time and length scales associated with ocean turbulence, particularly those corresponding to the inertial subrange (Figure 2). Estimating turbulence quantities from field measurements
 95 also necessitates satisfying the stationarity assumption. This assumption implies that the key statistical properties of the flow do not ~~vary with time; and hence, change over timescales shorter than the segment length chosen to estimate ε . This length must also be sufficiently long to resolve the inertial subrange and fit the spectra and obtain ε does not evolve faster than the timescales over which the value is estimated. Stationarity must be considered when choosing the time over which to estimate ε (see § 4.2).~~ More importantly, however, the sampling rate and segmenting choices must consider the time and length scales associated with
 100 ocean turbulence, particularly those corresponding to the inertial subrange (Figure 2) Within the inertial subrange, the cascade of turbulent kinetic energy is independent of both the properties of the mean flow and molecular viscosity (Pope, 2000), unlike the larger scales in the energy-containing range and the smaller scales in the viscous subrange.

The inertial subrange spectral model $\Psi_j(k)$ is given by:

$$\Psi_j(k) = a_j C_k \varepsilon^{2/3} k^{-5/3}, \quad (2)$$

105 where k is the wavenumber expressed in rad m^{-1} rather than \tilde{k} expressed in cpm ($\tilde{k} = 2\pi k$), C_k is the empirical Kolmogorov universal constant that is approximately $C_k = 1.5$ as given in Sreenivasan (1995). The constant a_j depends on the velocity component for estimating ε . In the longitudinal direction $a_1 = 18/55$, while the values are $4/3$ larger in the vertical and transverse directions, i.e. $a_2 = a_3 = 4a_1/3$ (Pope, 2000). Sreenivasan (1995) collated and interpreted multiple studies to obtain an average value for $C_k=1.62$ ($a_1 C_k = 0.53$) with a standard deviation of 0.1681 (or 0.055 for $a_1 C_k$).

110 The inertial subrange covers larger scales than the viscous subrange. It can be nonexistent in low Reynolds number flow in which the larger turbulent scales become more comparable in size to the smallest scales (Saddoughi and Veeravalli, 1994; Gargett et al., 1984). The largest scales depend on the sought-after quantities – ε and the background flow properties. ~~The~~ while the smallest scales are defined by the Kolmogorov length scale L_K :

$$L_K = (\nu^3/\varepsilon)^{1/4}, \quad (3)$$

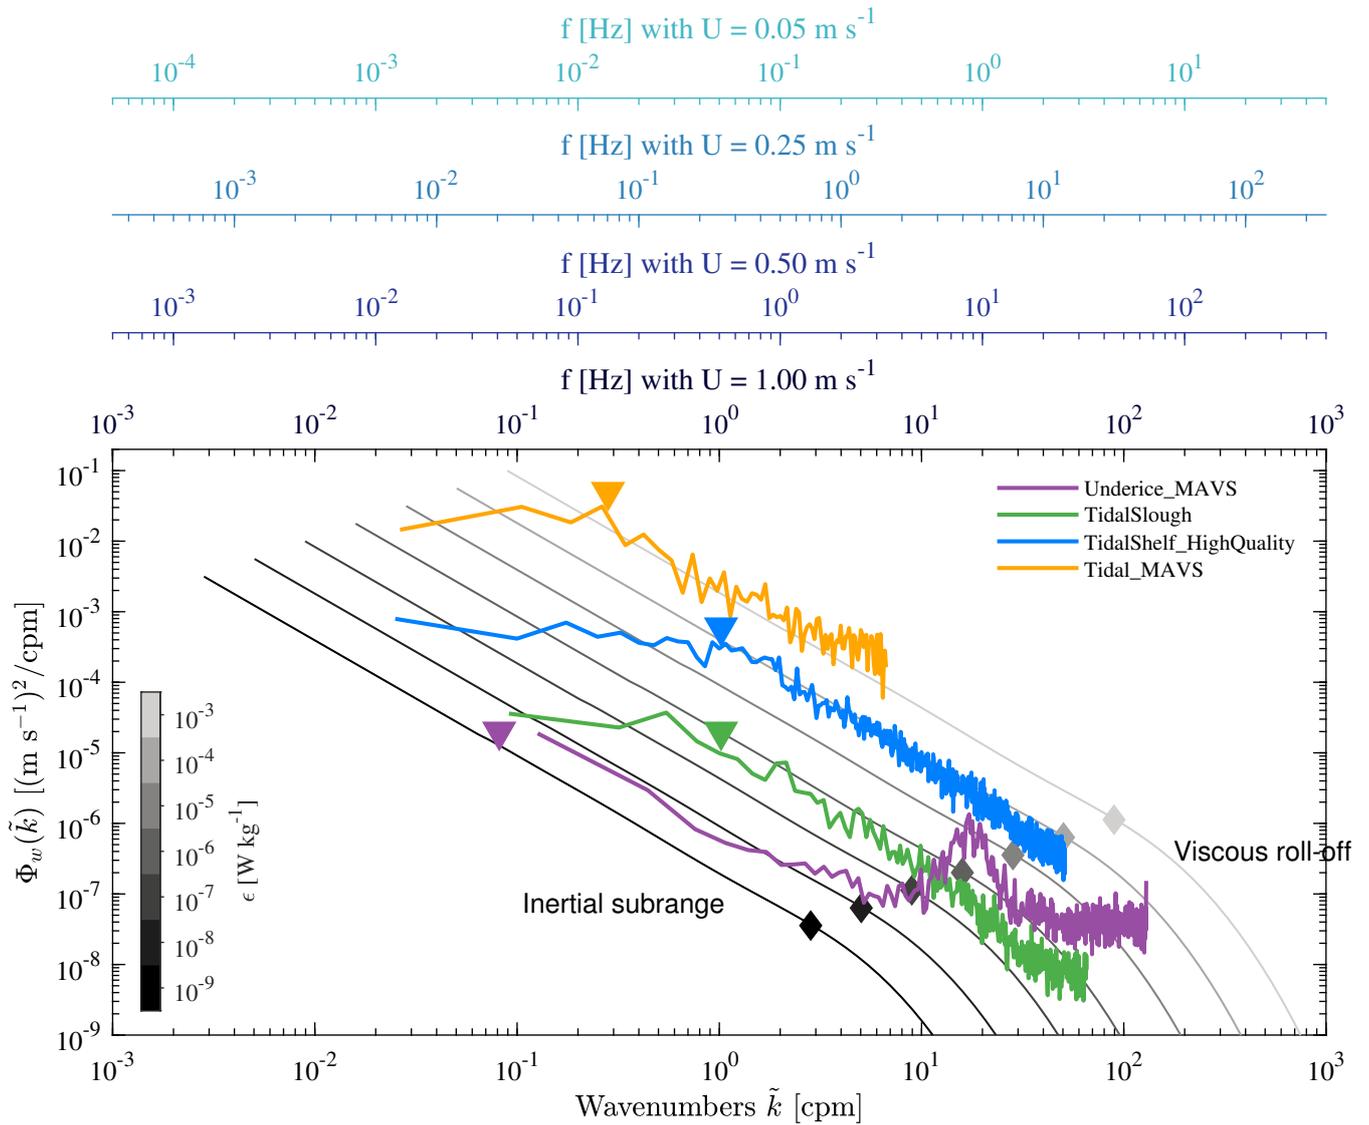


Figure 2. Spectral representations from the four benchmark datasets overlaying the expected idealized curves for a range of ε . The [secondary frequency axes above the figure shows the relationship between different mean advection speeds and wavenumbers](#). The gray diamonds denote the empirical limit of the inertial subrange and depend on ε . The coloured triangles represent the approximate distance of the platform from the nearest boundary ($2\pi/\kappa z$). The impact of vortex shedding is apparent in the under-ice MAVS example at approximately 25 cpm.

115 where ν is the kinematic viscosity of seawater. The largest scales of the inertial subrange are about ten times the Kolmogorov scale, which translates to:

$$k_{is} \approx \frac{1}{10L_K} \quad (4)$$

(Pope, 2000). When the ratio between the largest and smallest turbulent length scale becomes smaller than roughly 300, the inertial subrange becomes severely anisotropic (see the review in Bluteau et al., 2011). Energy levels drop below those predicted by the isotropic model in equation 2, and the inertial subrange becomes unsuitable for estimating ε . These problems typically occur for weakly turbulent flows, especially near boundaries or in highly stratified-sheared flows (Gargett et al., 1984; Saddoughi and Veeravalli, 1994).

Several relationships exist to define the scale of the largest turbulent overturns (Ivey et al., 2018). We provide a brief overview, noting that these scales can be of the order of meters. The scales are always limited by the distance to the nearest boundary, either the bottom or the surface. One common definition for the large overturns in a stratified-sheared flow is the Ozmidov length scale L_O (Ozmidov, 1965):

$$L_O = (\varepsilon/N^3)^{1/2}, \quad (5)$$

or by the ~~Corrsin~~-Corrsin length scales in sheared flows (Corrsin, 1958):

$$L_S = (\varepsilon/S^3)^{1/2}, \quad (6)$$

where N and S are the background stratification and velocity shear. This length scale tends to be smaller than L_O and better represents the low wavenumber limit of the inertial subrange (see, for example Bluteau et al., 2011).

Near boundaries, other definitions for the largest overturn size may be warranted. For example, the Obukhov length scale for ocean convection includes the effects of buoyancy and applied wind stress (Obukhov, 1946; Zheng et al., 2021). Near a solid boundary,

$$L_S \equiv \kappa z \quad (7)$$

when the assumptions of the log-law of the wall are satisfied (Bluteau et al., 2011). The Von Kàrmàn's constant is $\kappa = 0.39$, as revised by Marusic et al. (2013) using atmospheric and laboratory observations over a wide range of Reynolds numbers. Hence, when no velocity shear measurements are available, the distance of the nearest boundary can be used to characterize the largest overturns, although this approach may overestimate the overturn sizes (Bluteau et al., 2011).

Generally, the inertial subrange can be identified directly from the spectral observations. Knowledge of the above length scales is important to ensure the sampling and analysis strategies do not inadvertently reduce the range of wavenumbers resolved within the inertial subrange. These scales partly dictate the segmenting and spectral averaging strategies described below (§ 4.2 and 4.3), as well as the choice of burst sampling duration if continuous sampling is unfeasible with the available battery power of the instrument.

Measurement campaigns must ensure the sampling rate is sufficiently fast to resolve the high, most isotropic, wavenumbers of the inertial subrange (Figure 2). The sampling rate must be faster for fast-moving flows than in low-energy environments, although the high-energy flows typically lead to a wider inertial subrange. A sampling rate of 64 Hz has a Nyquist frequency of 32 Hz. If the noise levels are low, the highest wavenumbers of the inertial subrange are resolved for $\varepsilon \lesssim 10^{-5} \text{ W kg}^{-1}$ and mean speeds $\bar{U} \lesssim 1 \text{ m s}^{-1}$. For slower expected speeds $\bar{U} \lesssim 0.25 \text{ m s}^{-1}$, a sampling rate of about 16 Hz suffices for resolving the

150 entire inertial subrange when $\varepsilon \lesssim 10^{-5} \text{ W kg}^{-1}$. The sampling rate can be further reduced if the expected ε is much lower than $10^{-5} \text{ W kg}^{-1}$ (see Figure 2). However, the noise floor adversely impacts our ability to estimate low ε by potentially drowning out the high wavenumbers of the inertial subrange (§4.4.3).

3 Benchmark datasets and formatting

The benchmark datasets were ~~selected to~~ created to allow testing of algorithms (independent of programming language) for
155 estimating ε ; these datasets cover a range of instrument types and environmental conditions that can be encountered ranging from low-energy environments, such as beneath sea ice or lakes, to high-energy environments, such as sills and obstacles in coastal oceans or shallow embayments and estuaries (Bluteau et al., 2025). Here, we focus on four benchmark datasets encompassing a range of water depths and background flow speeds (Table 1). Other datasets were considered, but the present ones have problematic sections that allowed us to demonstrate the application of quality control metrics.

160 All four datasets are characterized by being recorded relatively close to a horizontal boundary. The four benchmark datasets are split evenly across two types of instruments - (i) acoustic-Doppler velocimeter (ADV) which is a backscatter device, and (ii) Modular Acoustic Velocity Sensor (MAVS) which is a time-of-travel device. The ADV datasets presented here were both collected with a Vector, Nortek AS, while the MAVS instruments were produced by Nobska. The MAVS instrument notably does not require particulate material in the water column to resolve speed fluctuations and, thus, turbulence. However, as we
165 discuss later, their sampling rings shed vortexes that contaminate velocities in the direction perpendicular to the instrument's main shaft (Hay et al., 2013). Bottom frames may also contaminate MAVS and ADV velocity measurements.

We specify the technology type used for collecting the velocities in the names of the benchmark datasets, which can be summarized as follows:

1. *Tidal Slough ADV* - unstratified, shallow water;
- 170 2. *Tidal Shelf ADV* - stratified boundary-layer with relatively fast speeds, in deep water;
3. *Under-ice MAVS* - weak flows, 5 m beneath rough ice;
4. *Tidal MAVS* - fast flows, near bed in shallow and unstratified waters.

~~The format of these benchmarks was devised to facilitate testing from different checkpoints, i.e., processing levels, and include quality-control parameters to assess data quality. The benchmarks~~

175 The benchmarks use the NetCDF-4 file format with four distinct processing levels stored in their own group named according to the processing levels-level (Figure 3).~~The variable dimensions were repeated within each group even though the last three processing levels shared many dimensions. This choice accommodates the possibility of archiving only some processing levels in a central repository since archiving all levels may be prohibitive for long timeseries.~~

and Appendix A). This format was devised to facilitate testing from different checkpoints. Below, in section 4, we explain the
180 processing steps at each level in detail. The first data level contains the raw velocity measurements and boolean quality-control

Table 1. Summary of setup, environmental conditions, and estimated $\hat{\varepsilon}$ for benchmark datasets (Bluteau et al., 2025). The 2.5th, 50th and 97.5th percentiles for mean speed \bar{U} are listed, while the range for $\hat{\varepsilon}$ represents the 2.5th to 97.5th percentile.

Name	Water depth	z	\bar{U}	τ_ε (τ_{FFT})	sampling rate	$\hat{\varepsilon}$	Comments
	m	m	m s^{-1}	seconds	Hz	W kg^{-1}	
Tidal slough ADV	2.8	0.45	0.01, 0.15, 0.34	540 (135)	16	1e-7 to 1e-5	Tidal slough deployment where the viscous subrange is occasionally resolved. Unstratified, but shear-induced anisotropy
Tidal shelf ADV	250	0.4	0.02, 0.26, 0.77	256 (32)	64	1e-7 to 1e-4	Continental shelf deployment in a Stratified bottom log layer. Dataset has phase wrapping and flow-dependent evidence of vortex shedding.
Under-ice MAVS	353	5	6×10^{-2} , 0.03, 0.06	1024 (256)	8	3e-9 to 7e-8	Slow under-ice and weakly-stratified, boundary layer in deep water. The instrument was suspended beneath crystal-coated ice.
Tidal MAVS	20	1.45	0.9, 1.0, 1.1	82.8 (20.7)	12.35	3e-4 to 1e-3	Strong tidal flows in shallow water. Weak stratification

indicators that flag poor-quality velocity samples. The second level involves applying the quality control flags, replacing the missing samples (typically through linear interpolation), and then segmenting the time series into smaller subsets, usually a few minutes long.

This second level separates each subset of velocity samples used for computing spectra and other statistics required for converting from time to space ~~or selecting turbulence models and for applying the inertial model to the spectra~~ (e.g., ~~wave statistics~~ mean speed past the sensor). The third level contains the spectral observations for each segment that are used to derive ε by fitting the observations over the inertial subrange with the appropriate theoretical model (e.g., equation 2). The fourth level contains the estimated ε from all available velocity components, along with boolean quality-control flags that indicate one or many reasons why an ε should be discarded or, at the very least, have the quality questioned. The flags' metadata includes thresholds for any quality-control test applied to the original measurements. This level contains the ε , and quality-control indicators, which would typically be presented in a scientific article or technical report.

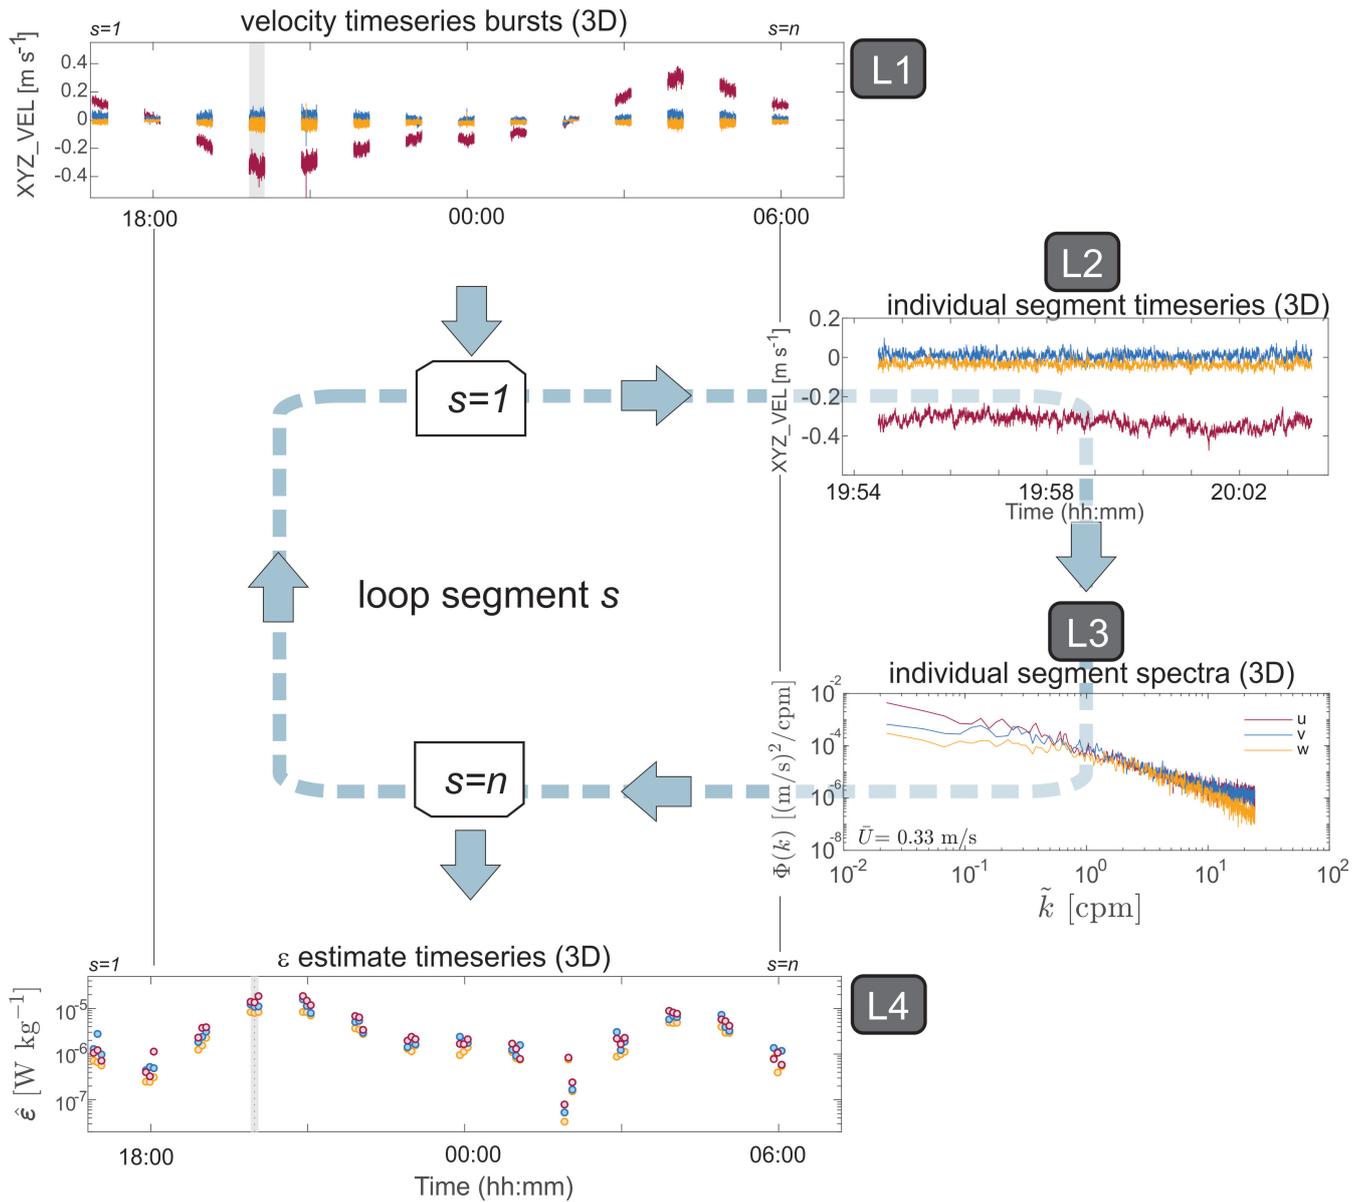


Figure 3. Parallel Left shows the data and processing workflow associated with hierarchical group stored in the NetCDF files. Level hierarchy showing-1 begins with the transition from raw time-series timeseries and its quality control flags that get segmented and stored at level 2. These segmented timeseries are converted into spectra at level 3 so that the ϵ can be estimated to create the final ϵ -timeseries with the segment analyses at each burst-level 4.

4 Processing methods

We detail the best practices for the processing step as they are applied to each NetCDF data level (Figure 3). Our processing choices were determined using the existing literature, ATOMIX members' experience, and testing of alternative methods. The current benchmarks and proposed best practices are a starting point for eventual processing standards for estimating ε . Our intention is for future users to verify their results at different data processing checkpoints, allowing the quality of archived datasets to improve further over time.

4.1 Quality control of raw velocity measurements

A timeseries, recorded from one instrument, is stored as a two-dimensional matrix where each column represents a velocity component. The Level 1 flags are obtained by applying multiple quality-control processing steps to the raw measurements. We note that several of the quality control steps are applied to the velocities collected in beam coordinates. However, in acoustic systems with three or four transducers, data is rotated into horizontal and vertical velocity components by applying linear transformations to the data in beam coordinates; thus, a 'bad data' flag in beam coordinates should generally also be applied in each of the xyz coordinates. Below, we describe identification of bad data and formation of the quality control flags as applied to the ADV benchmarks. The MAVS benchmarks have flags only at Level 4 for the $\hat{\varepsilon}$ estimates. The primary data quality issue for this instrument is vortex shedding from the sampling rings.

4.1.1 Removal of low quality data

The most common indicators of low-quality data are either low backscatter amplitudes or low signal-to-noise ratios, which express the strength of the signal relative to a background noise level ($\text{SNR} = 20 \log_{10}(A_{\text{signal}}/A_{\text{noise}})$). Critical cut-off values for discarding data are instrument- and environment-specific. For the Nortek Vector used in the benchmark datasets, the manufacturer recommends values are 6 dB above the noise floor (around 50 dB) and 15 for amplitude and SNR, respectively (Nortek, 2018). In contrast, an obstruction of an acoustic beam may manifest as high values in both backscatter and SNR. This obstruction may be identified by a large difference in amplitude between the adjacent acoustic beams, especially if another beam is located behind the obstruction.

ADV systems use pulse-to-pulse coherent technology in which a pair of pulses separated by a known time lag are emitted. The similarity between the measured echo of the two pulses is assessed and reported as a percentage value, which provides a further indication of data quality (Lohrmann and Nylund, 2008). It is worth noting that coherence and amplitude are functions of different parameters with varying sensitivities, and thus provide two separate measures of quality control. Low correlation values can be used to identify bad data; but the converse is not necessarily true, that is, a large value doesn't indicate good quality data in all cases. A canonical cut-off value of 70% has been shown to generally reduce variance within the dataset; however, values of 50% are also commonly used as a cut-off. ~~In general, values should be set on a case-by-case basis following careful inspection of the dataset (Nortek, 2018).~~

225 Our quality control data format provides users with the ability to specify the threshold and rationale in the NetCDF data file, which should also be described in the methods of their scientific publications. We recommend that these additional user-defined flags also consider other data quality concerns, e.g., the pressure sensor indicating that the instrument was out of the water or change in pitch, roll, or heading indicating that the instrument has moved. Once bad data has been flagged, other QC measures such as phase unwrapping and velocity despiking can be applied to improve data quality.

4.1.2 Phase unwrapping

230 For pulse-coherent instruments, the Doppler phase shift can only be determined from $-\pi$ to π . For values outside this range, when the along-beam velocity exceeds the ambiguity velocity as set by the time-lag between pulses, ‘phase wrapping’ can occur. This effect manifests as a sudden and unrealistic change in velocities, which is usually also accompanied by a change in sign. These ‘phase-wrapped’ velocities can sometimes be corrected for in beam coordinates by subtracting or adding twice the ambiguity velocity. Several algorithms are available to transform phase-wrapped to actual velocities with reasonable success (Han et al., 2018; Shcherbina et al., 2018; Zippel et al., 2021a). However, it is nonetheless still preferable to set the nominal
235 maximum velocity to a sufficiently large value when programming the instrument for deployment to reduce data processing issues (Rusello, 2009).

~~Further quality-control measures may involve removing excessively large speeds and/or other outliers, which could arise under some circumstances, such as broken instruments or biofouling. Our quality control data format provides users with the ability to specify the threshold and rationale in the data file, which can also be described in the methods in their scientific~~
240 ~~publications. We recommend that these additional user-defined flags also consider other data quality concerns. For example, suddenly varying pitch, roll, or heading measurements may indicate unwanted movement of the instrument, or pressure sensors may indicate whether the instrument is out of the water.~~This maximum velocity setting requires prior knowledge about the expected velocities at a given site, which can be gained through previous field studies, use of operational tidal or hydrological predictions, or even specialised numerical modelling for the site. The velocities from our different benchmarks provide some
245 examples for how velocities may vary across environments (Table 1). For example, weak flows under the ice sheet (*Under-ice MAVS*) to very strong flows in constricted channels (*Tidal MAVS*). However, the velocities can still be much higher than expected from modelling and previous studies. A prime example is the *Tidal shelf ADV* benchmark, which was programmed with an expected maximum horizontal velocity of 0.8 m s^{-1} which was expected to be sufficient given the environment (0.4 m above the seabed in 250 m of water), but velocities over 1 m s^{-1} were observed, resulting in phase wrapping that needed to be
250 addressed.

4.1.3 **Despiking velocities**

Short-lived transient spikes may contaminate velocity measurements, often only a few samples in duration but with different amplitude to the neighbouring "correct" signal. It is critical to remove as many of these spikes as possible, as they can dramatically alter the velocity spectra, which are required for fitting the inertial subrange model. Spikes in ADV measurements

255 may manifest because of aliasing of the Doppler signal, which happens when pulses are contaminated through reflection off complex objects and boundaries (Goring and Nikora, 2002).

To despike ADV velocity measurements, we recommend the median filter-based method described by Brock (1986). This method was originally developed for atmospheric measurements and was also recommended by Starkenburg et al. (2016) review for despiking high-frequency atmospheric measurements of carbon dioxide used to quantify vertical turbulent fluxes. 260 They found that the median filter was more robust than other filters such as the commonly applied phase-space thresholding method developed by Goring and Nikora (2002). In particular, the median filter method (i) is better at handling missing points, (ii) copes with the presence of low-frequency coherent turbulent structures, and (iii) is less biased by spikes than other methods (Starkenburg et al., 2016).

The method requires a window length, over which to calculate the median, and a threshold for spike identification. The 265 window length must be longer than the duration of spikes, which can span consecutive samples but also must be sufficiently short to compute a reasonable local median (see Table 1 of Starkenburg et al., 2016). For the spike-identification threshold, we recommend a method that calculates a histogram of velocity differences between the original minus the smoothed velocities (Brock, 1986). In this technique, the local minimums on either side from the center define the positive and negative thresholds, and velocity differences exceeding these thresholds are deemed to be spikes (Figure 4).

270 4.1.4 Formation of data quality flags

Each step flags velocity samples that do not meet the quality-control criteria. Each criterion uses binary (1/0) values that are then transformed into a “bitwise” flag. The maximum flag value depends on the number of criteria N_c used to assess data quality. The overall value of the boolean flag increases as the number of failed quality-control metrics increases. The maximum possible value for the flag will be less than 2^{N_c} , which translates to 255 when eight quality-control metrics are being evaluated 275 ($N_c = 8$).

To flag the raw velocities, we use an 8-bit boolean number calculated from:

$$\text{VEL_FLAG} = \sum_{j \in I}^{N_c} 2^{j-1}, \quad (8)$$

where j is the flag number amongst those applicable to each velocity sample. For example, $I = \{2, 5\}$ if the second and fifth quality-control flags apply to the velocity samples, translating to a boolean value of 18. These boolean flags allow tracking 280 the state of multiple metrics simultaneously while reporting only one number. A value of 0 means the velocity sample was not flagged and thus is likely high-quality. These boolean flags were designed with the Climate and Forecast (CF) metadata conventions in mind.

Flags are identifiable in the NetCDF file by the FLAG suffix appended to the variable name, i.e., XYZ_VEL_FLAG for raw velocities collected in the instrument’s XYZ coordinates, or EPSI_FLAG for $\hat{\epsilon}$ estimates (Table A1). We also included 285 additional metadata in the variables’ attributes. We added “flag thresholds” and “flag thresholds meanings” to CF recommended “flag_meanings” and “flag_masks” attributes (see Table 2). The “flag thresholds” provide the thresholds associated with a

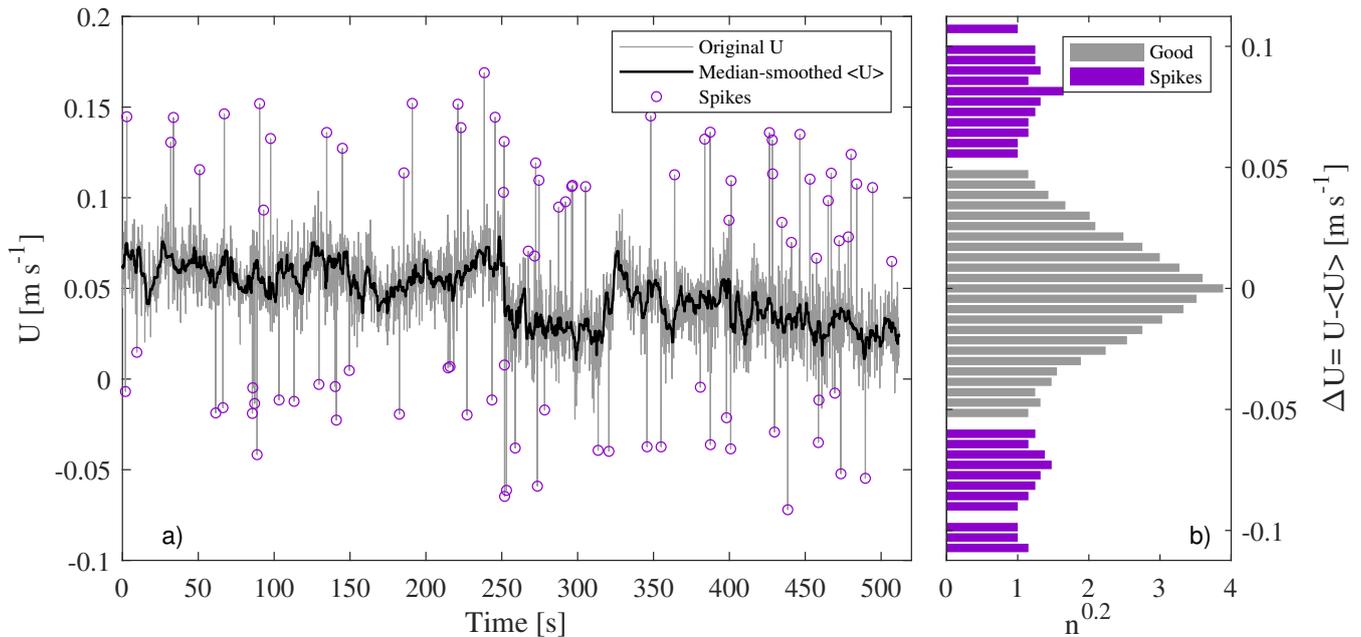


Figure 4. Example of the despiking procedure adapted from Brock (1986). (a) original velocities and smoothed signal obtained by applying a median filter over $2f_s + 1$ samples. (b) Histogram of the difference between the original and smoothed velocity timeseries during the first despiking iteration. A power of 0.2 was applied to the number of samples n in each histogram bin [for clearer visible confirmation of the spike thresholds](#). The $\Delta U = 0$ threshold for identifying spikes was determined from this histogram as the first instance where $n = 0$ above and below $\Delta U = 0$. In this example, the thresholds for accepting velocities as good is $-0.056 \text{ m s}^{-1} < \Delta U < 0.051 \text{ m s}^{-1}$. If no bins have $n = 0$, then the ΔU corresponding to the minimum n is used for setting despiking thresholds.

given flag, while the “flag thresholds meanings” briefly explain how the thresholds are applied. These extra attributes allow future users to revisit the flags, particularly the thresholds used, and apply more stringent (or less stringent) thresholds at their discretion. [We also recommend that these quality-control flags be briefly described in the methods of publication, along with the chosen thresholds for each flag.](#)

290

4.2 Segmented timeseries

At Level 1, quality control of the raw velocity measurements was completed. For the spectral calculations required to compute ε , (1) the measurements must be segmented in time, (2) flagged data must be replaced, (3) the velocities must be rotated into the frame of reference of the mean flow, and (4) the rotated velocities must be detrended to calculate the velocity fluctuations

295

The time series must be segmented before computing properties of turbulence. Selecting the length of the segments requires a balance between using sufficient data to resolve the inertial subrange in wavenumber space, while still ensuring stationarity of the turbulence. Stationarity implies that the key properties of the flow do not change over timescales shorter than the length

Table 2. Summary of the different boolean flags and thresholds used to flag raw velocity samples. This information is stored with the suffix `_FLAGS` appended to the velocity variable name at the first processing level (Table A1). None of the MAVS datasets were flagged at level 1. As contamination from vortex shedding impacts the quality of $\hat{\epsilon}$ estimates, these data are flagged at level 4.

Flag meanings	Flag masks	Flag threshold	Flag threshold meaning
1. Low signal to noise ratio	1	10 db	Ratio is below the threshold.
2. Low amplitude	2	60 counts	Amplitude is below the threshold.
3. Low correlation	4	70	Correlation is below the threshold.
4. Obstructed beam	8	40	Amplitude difference between adjacent beams is above the threshold.
5. Spike	16	Sampling rate	Median filter half-width number of samples (Brock, 1986). Set to the sampling rate of the instrument.
6. Suspiciously large velocity	32	3	Sample exceeds the standard deviation by the set multiplying factor.
7. User-defined	64	n/a	User can optionally flag out-of-water samples, broken probes, etc.
8. Phase-wrapped	128	n/a	Replaced by unwrapped velocity
Total	255 if all eight metrics are used		

of the segment. For many aquatic systems, this time scale is on the order of 5-15 minutes. If burst sampling is used because
300 continuous sampling is unfeasible for the duration of the deployment, the segmenting considerations discussed below should be incorporated into the experimental design, as each burst is typically considered a segment. However, it is possible to break up bursts into segments if they are long enough (e.g., Tidal slough ADV benchmark in Table 1). These choices are made at the data processing stage for continuous time series.

The choice of segment length τ_ϵ for estimating the dissipation impacts the resolvable wavenumbers of the inertial subrange
305 and ultimately the statistical accuracy of the final spectrum to be computed. As described below (§ 4.3), a fast Fourier transform (FFT) is used to convert the time series into frequency space. The number of velocity samples N_{FFT} included in each FFT, the sampling frequency f_s , and the mean velocity \bar{U} dictate the spectral resolution and the smallest resolvable wavenumbers $\Delta\tilde{k}$:

$$\Delta\tilde{k} = \frac{f_s}{N_{\text{FFT}}\bar{U}} = \frac{1}{\tau_{\text{FFT}}\bar{U}}. \quad (9)$$

The duration of each FFT-length is given by $\tau_{\text{FFT}} = N_{\text{FFT}}/f_s$. The low wavenumber and resolution that resolves theoretically
310 at least one decade of the inertial subrange is given by:

$$\Delta\tilde{k} \lesssim \frac{1}{70L_k}. \quad (10)$$

When a decade is resolved, ten spectral samples N_s are available for spectral fitting (Figure 5b). This wavenumber resolution depends on the ε (Figure 5a), while the FFT duration τ_{FFT} depends also on the mean speed past the sensor (Figure 5c). Increasing the τ_{FFT} by a factor of 10 allows for 100 spectral samples to be theoretically resolved in the inertial subrange (Figure 5b). Once a τ_{FFT} is chosen, the total duration of each segment (or burst duration) for estimating dissipation $\tau_\varepsilon \geq 2\tau_{\text{FFT}}$, and preferably $\tau_\varepsilon \geq 3\tau_{\text{FFT}}$. These choices ensure the spectra have sufficient statistical certainty (degrees of freedom) for fitting (↔) (Bluteau, 2025a).

With real observations, we recommend first selecting τ_{FFT} from Figure 5c using the lowest expected ε and a relatively low \bar{U} derived from the observations. The spectra can then be estimated and plotted in wavenumber space against the theoretical velocity spectra in a similar format as Figure 2. This visual representation can immediately show whether the chosen τ_{FFT} is longer than necessary (e.g., Tidal Shelf High Quality example in Figure 2) or if the length needs to be extended because the high wavenumbers are drowned by noise. The goal is to choose a τ_{FFT} that is sufficiently long to resolve a decade of the inertial subrange throughout the entire dataset. The duration τ_{FFT} will be longer than necessary when ε or \bar{U} increases (Figure 5c). For our benchmarks, the total segment duration varied from 82 seconds for the high-energy Tidal MAVS benchmark to 1024 seconds for the low-energy Under-ice MAVS benchmark (Table 1).

The Level 1 flags can exclude data points from further analysis. Once the time series has been segmented, data loss due to flagged points must be addressed before spectral calculations. For spectral computations, these excluded data points must be replaced in the time series as appropriate. ~~H~~ There are several strategies for replacing missing data, including linear interpolation, using the variance of the signal (a technique commonly used in eddy covariance studies, e.g. Davis and Monismith (2011)), or using an unevenly spaced least-square Fourier transform (i.e., no replacement at all). These replacement strategies were trialed with one of the cleanest benchmarks (Underice MAVS sampling at 8 Hz) with randomly removed data in varying length gaps. For all tests, linear interpolation did the best job in recovering the original spectra, followed by the unevenly spaced techniques. From these tests, it is recommended that linear interpolation replace missing points and record the percent of good samples in each segment in the NetCDF Level 2 and 4 data. Segments with more than 10% missing data should be flagged and rejected (Table 3). The threshold chosen for rejection should be recorded at Level 4 in the NetCDF file within the EPSI_FLAGS metadata (Table A4).

To estimate ε from all the different velocity components, the measurements must be rotated into the main direction of the flow. In some instances, the instrument's frame of reference may be aligned with the direction of flow, which is ideal to account for the varying levels of anisotropy among components (Gargett et al., 1984; Bluteau et al., 2011). If this alignment isn't set, then the velocities' measurement frame must be rotated into that of the flow, which we refer to as the analysis frame of reference. This process can be done by using the time-averaged velocities in each segment. If only the vertical velocity component will be used for calculation ε , then this step may not be necessary. The frame of reference for velocity analysis is noted in the NetCDF metadata within the Level 2 hierarchical group (Table A2). These velocities should be stored at Level 2 in a 3-D matrix UVW_VEL with dimensions [N_SEGMENT, N_SAMPLE, N_VEL_COMPONENT] with the rotation method (if any) for obtaining UVW_VEL velocities noted in the Level 2 metadata. Each N_SEGMENT are associated with a unique timestamp taken at the mid-point of each segment and stored in the TIME variable. We also store at Level 2 the variables ROT_AXIS

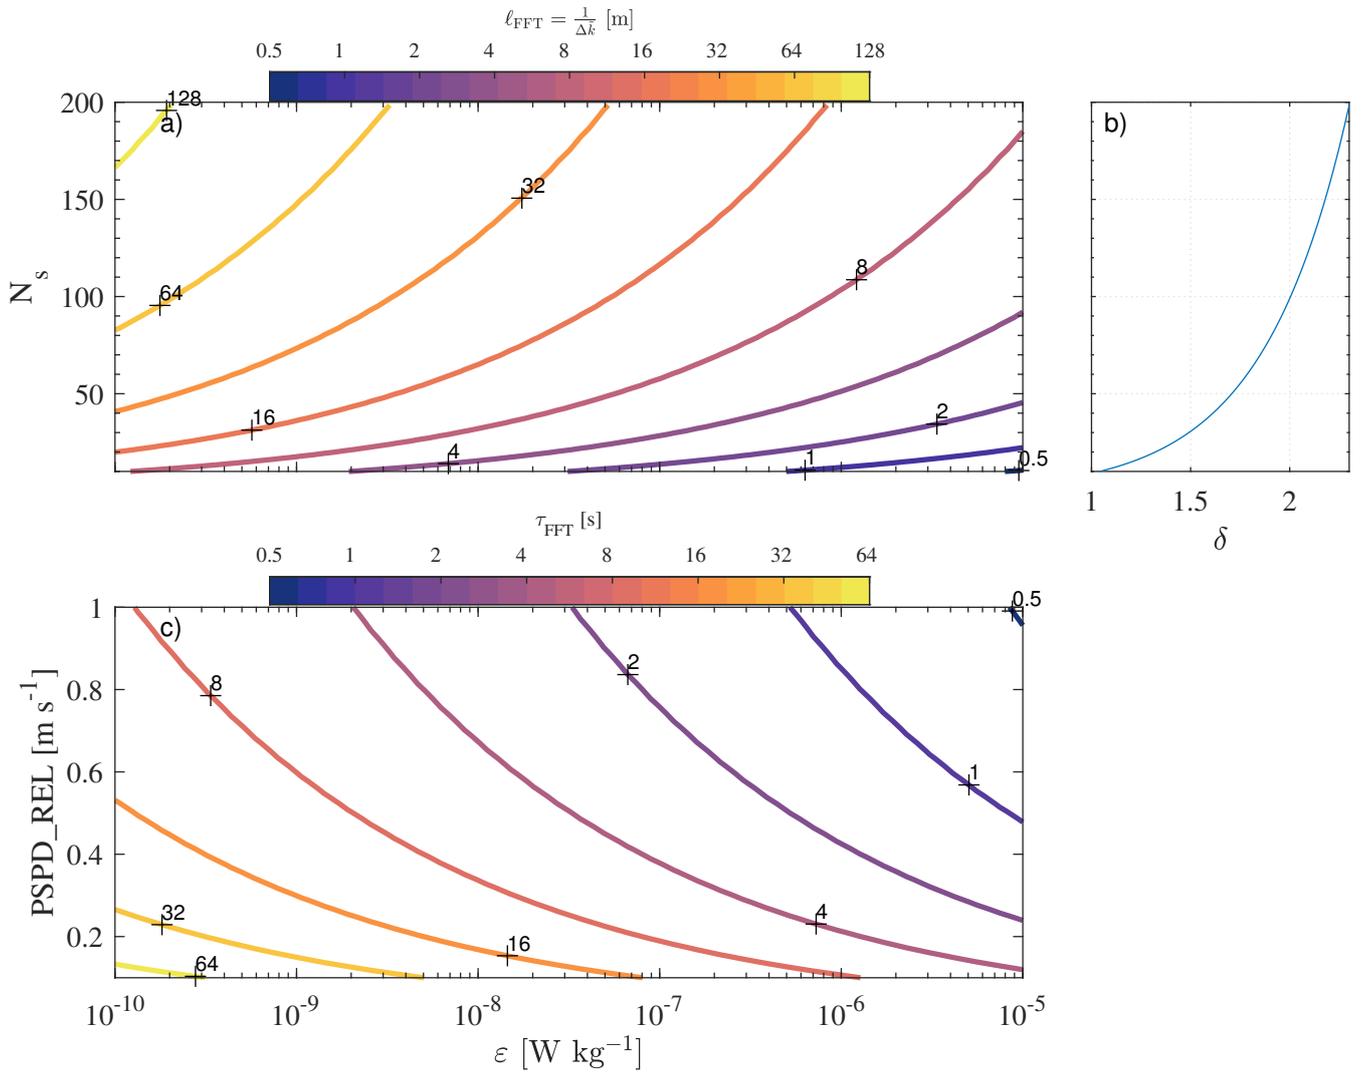


Figure 5. a) Minimum FFT length scale ℓ_{FFT} that must be resolved by the spectra as a function of ε and the number of fitted spectral samples N_s . The lowest resolved wavenumber and resolution $\Delta \tilde{k} = \ell_{\text{FFT}}^{-1}$. (b) The number of spectral samples available for fitting as a function of the number of resolved decades $\delta = \log_{10} \left(\frac{k_{i,s}}{\Delta \tilde{k}} \right)$ within the inertial subrange. (c) Minimum FFT-length duration τ_{FFT} required for resolving $N_s = 10$ spectral samples within the inertial subrange. Note (a) and (c) represent minimum lengths and durations since the available bandwidth for spectral fitting may be reduced because of measurement noise and/or anisotropy.

and ROT_ANGLE, which can be used for rotating velocities from the measured coordinate system (e.g., XYZ_VEL) into the analysis frame of reference UVW_VEL (Table A2). This information is helpful for recovering the velocities of each segment in the original frame of reference.

The parameters chosen when computing spectra can restrict the range of resolved wavenumbers, thus impacting the suitability of the spectra for estimating dissipation rates $\hat{\varepsilon}$. In particular, spectra must resolve as much of the available inertial subrange as possible (Figure 2) while considering how measurement noise may dominate the high wavenumbers close to the viscous subrange, which tend to be more isotropic than low wavenumbers. These choices also impact the statistical reliability of the velocity spectrum, and thus $\hat{\varepsilon}$ obtained from fitting algorithms as well as the accuracy of the spectral slope estimates ~~(?)~~ (Bluteau, 2025a) — a quality-control indicator presented below in §4.6.

Our recommended spectral averaging involves splitting the time series into N_f subsets that are 50% overlapped and windowed using a Hanning function (Lueck et al., 2024) (see Section 3.3 of ATOMIX paper on shear probes for review of spectral averaging; Lueck et al., 2024). An FFT is applied to each windowed subset before computing the squared magnitude to get the power spectral density estimates (chapter 8 for pwelch methods; Percival and Walden, 2020) (Chapter 8 for pwelch methods; Percival and Walden, 2020). These power spectral density of all subsets are then averaged together to yield the spectra used for estimating ε . When computing spectra from 50% windowed time series with a Hanning (cosine) window results in degrees of freedom d :

$$d = cN_f = c \left(\frac{2\tau_\varepsilon}{\tau_{\text{FFT}}} - 1 \right) \quad (11)$$

with $c = 1.9$ (Equation 416 of Percival and Walden, 2020) or $c = 1.92$ according to Nuttall and Carter (1980). With our suggested segment duration of $\tau_\varepsilon \geq 3\tau_{\text{FFT}}$ (§4.2), $N_f \geq 5$ since $N_f = 2\tau_\varepsilon/\tau_{\text{FFT}} - 1$. The resulting spectral observations will have about 10 degrees of freedom, i.e., $d \approx 10$. This recommendation is based on ~~log-fitting~~ log-based fitting methods returning $\hat{\varepsilon}$ within a factor of about 1.5 of the actual value when applied to synthetic spectra with $d = 10$ ~~(?)~~ (Bluteau, 2025a).

4.4 Estimates of turbulent kinetic energy dissipation ε

We now discuss obtaining ε from the spectral observations, which involves spectral fitting Equation 2 to the wavenumbers within the inertial subrange. We will focus first on the fitting methods before addressing how to identify the wavenumbers that belong to the inertial subrange, as these wavenumbers depend on ε – the sought quantity.

4.4.1 Spectral fitting techniques

We considered six methods to fit the model $\Psi_j(k)$ to the spectral observations $\Phi_j(k)$, and subsequently estimate ε . ~~The Four methods fit the model spectra directly to the spectral observations, while the two remaining methods fitted log-transformed spectral observations by minimizing the sum of squared residuals or minimizing the sums of the absolute residuals (logLSQ and logLAD methods).~~ Of the four methods applied directly against the spectral observations, two methods minimized the sum of squared residuals using a gradient or gradient-free minimization algorithms (power and LSQ methods in Bluteau, 2025a). The third method in this category minimized the absolute residuals using the same gradient-free minimization as the LSQ method (LAD method in Bluteau, 2025a). The fourth method tested relied on the maximum likelihood estimator and presumed statistical distribution of the spectra (MLE method in Bluteau, 2025a). The full details of the methods and their assessment against synthetic spectra are described

in [Bluteau \(2025a\)](#). Spectra were synthesized by specifying ε in Equation 2 and adding uncertainty to the spectra via two different statistical distributions ([Bluteau, 2025b](#)). The sensitivity of the fitting methods was also evaluated against the uncertainty (smoothness) of the spectral observations and, the number of ~~samples used in the fitting~~ spectral samples N_s , and the decadal range:

$$385 \quad \delta = \log_{10}(k_N/k_1) \tag{12}$$

[between the first \$k_1\$ and the last \$k_N\$ fitted wavenumber \(Bluteau, 2025a\).](#)

From ~~this that~~ analysis, we recommend using fitting methods applied to log-transformed spectral observations. [These methods returned more accurate results than those applied to untransformed spectra \(Figure 3 and 4 Bluteau, 2025a\). These methods were less sensitive to outliers that might be introduced in the spectra by unremoved spikes in the raw timeseries.](#)
 390 Specifically, we recommend minimizing the least-absolute deviation (residuals) between the fitted model and the observations ([logLAD method in Bluteau, 2025a](#)). This method requires no assumption about the statistical distribution of the observations, unlike least-square regression, which expects normally distributed data. Minimizing the absolute residuals is considered less [mathematically](#) stable than least-square regression (Tercan, 2021). However, since only the intercept β_0 that best fits the log-transformed spectral observations $\hat{\Psi}(k)$ is required; the technique amounts to:

$$395 \quad \beta_0 = \text{median} \left[\ln(\hat{\Psi}_i) - \beta_1 \ln(k_i) \right]. \tag{13}$$

The spectral slope β_1 is set to the expected value of $-5/3$ for the inertial subrange (Equation 2), and i denotes each observation in the spectra. Linear least squares would take the mean of Equation 13 rather than the median. Both least-square regression and least-absolute deviation performed well against the synthetic spectra ([Bluteau, 2025a](#)). However, the estimated $\hat{\varepsilon}$ from least-absolute deviation were less biased [than other methods](#), especially for spectra with low degrees of freedom, i.e., high
 400 degrees of uncertainty because of limited spectral averaging [from using short segments \$\tau_\varepsilon\$](#) .

From the fitted intercept $\hat{\beta}_0$, we can estimate $\hat{\varepsilon}$ using:

$$\hat{\varepsilon} = \left(\frac{\exp(\hat{\beta}_0)}{a_j C_k} \right)^{3/2}, \tag{14}$$

where $a_j C_k$ are the constants already defined above for the inertial subrange model (Equation 2). Using the [ladLog-logLAD](#) fitting method and FFT-lengths that are 1/4 of the segment length ($d \approx 14$), the estimated $\hat{\varepsilon}$ is expected to be within 43% of the
 405 actual ε if ten samples are fitted over one decade ([Figure 3 and 4 of Bluteau, 2025a](#)). This error reduces to 15% when the number of samples increases to 100, which tends to occur when the fit falls at wavenumbers nearing the high wavenumber limit of the inertial subrange. The synthetic spectra were also used to evaluate the ability of the fitting technique to estimate the spectral slope $\hat{\beta}_1$ ([Bluteau, 2025a](#)). The spectral slope estimates help flag spectra that do not exhibit a clear inertial subrange because of poor data quality, low energy, and anisotropy, or simply because the sampling protocol or spectral
 410 averaging cannot resolve the inertial subrange. The latter occurs when sampling too slowly or using fft-lengths that are too short to resolve the entire inertial subrange (§4.3). As with the estimation of $\hat{\varepsilon}$, the methods applied to the log-transformed data were better at recovering the spectral slope $\hat{\beta}_1$ than those used to untransformed data. The logLAD method was less sensitive to

outliers than the least-square regression (?). (Bluteau, 2025a). The logLAD method involves minimizing the sums of absolute residuals rather than the sums of squared residuals (see equation 7 and 4, respectively of Bluteau, 2025a).

415 Their results from fitting synthetic spectra using the logLAD method are shown in Figure 8 to determine a relationship for flagging $\hat{\epsilon}$ estimates. The deviation of $\hat{\beta}_1$ from the expected $\beta_1 = -5/3$ varied with the number of spectral samples fitted N_s , the degrees of freedom d of the synthetic spectra, and the decadal range:-

$$\delta = \log_{10}(k_N/k_1)$$

420 between the first and N_s fitted wavenumber. The estimated 99.7% bounds from fitting synthetic spectra can be mathematically represented by:-

$$\hat{\beta}_1 > \beta_1 \pm \frac{A}{\delta \sqrt{2dN_s}}$$

425 with A ranging between 7 to 17 (Figure 8). A small A is a stricter threshold for deeming spectra as exhibiting an inertial subrange. This factor is documented in the metadata of the Level 4 NetCDF quality-control $\hat{\epsilon}$ flags (EPSI_FLAGS in Table A4). To apply Equation 24, we also store at Level 4 the number of samples fitted N_s as N_FITTED, the bounds of fitted wavenumbers K_BNDS to calculate δ , and the degrees of freedom d (Table A4).

(a) The 99.7% bounds (0.15th and 99.85th percentiles) for the logLAD method and the χ_d^2 distributed synthetic spectra dataset. The numerical experiments are shown for both numbers of samples N_s and decadal range δ fitted by ?. Results are scaled by the expected standard deviation of χ_d^2 distributed samples ($\sqrt{2d}$) in addition to $\delta \sqrt{N_s}$. This figure illustrates that deviation of $\hat{\beta}_1$ from the true value $\beta_1 = -5/3$ scales approximately with $\delta \sqrt{2dN_s}$.

430 4.4.2 Locating the inertial subrange in spectral observations

A primary challenge in obtaining $\hat{\epsilon}$ is identifying the spectral wavenumbers that most likely belong to the inertial subrange, as these wavenumbers depend on $\hat{\epsilon}$ – the sought quantity. Additionally, the location in wavenumber space also depends on the mean speed past the sensor \bar{U} when converting timeseries into spatial spectra. With appropriate choices for data sampling, segmenting (§4.2), and spectral averaging (§4.3), this step amounts to avoiding the low wavenumbers dominated by anisotropy and the high wavenumbers dominated by instrument noise. Other wavenumbers to avoid are those impacted by vortex shedding off instrument frames (e.g., Under-ice MAVS in Figure 2), or surface waves.

435 We evaluated four strategies for identifying the inertial subrange within the spectra by adding white noise to the ~~synthetic of ?~~. ~~Two strategies involved taking same synthetic spectra used to test fitting methods (Bluteau, 2025a, b).~~ The two first strategies require computing the absolute deviation between the each of the fitted log-transformed spectra and the model and spectral observations and its log-transformed model spectrum given by equation 2:

$$\Delta \log \Psi_i = |\log \hat{\Psi}_i - \log \Psi_i| \tag{15}$$

and then taking the mean or median of the quantity $|\ln \hat{\Psi} - \ln \Psi|$ these deviations across different subsets of wavenumbers (Figure 6 d,e respectively). The third strategy estimated the ~~the~~ mean absolute deviation of $\hat{\Psi}/\Psi - \hat{\Psi}_i/\Psi_i$ (Equation 24 of

Ruddick et al., 2000). Our fourth ~~and recommended strategy is to estimate~~ strategy estimated $\hat{\varepsilon}$ and the spectral slopes $\hat{\beta}_1$ over
445 short wavenumber subsets of the spectra (see Figure 6c). The wavenumbers with the estimated slope closest to the expected
 $\beta_1 = -5/3$ for the inertial subrange are then selected to calculate the spectrum's final $\hat{\varepsilon}$. The other three methods situate the
inertial subrange over the wavenumbers that yield the minimum value for the calculated statistics.

The slope method was recommended because it performed slightly better than the other three against synthetic spectra of
Bluteau (2025b) for which we added white noise floor to mimic the impact of instrument noise on observed spectra. The slope
450 method tended to situate the inertial subrange at lower wavenumbers than the other three methods even when the synthetic
spectra were further flattened by adding white noise at low wavenumbers. This additional flattening crudely replicated the
narrowing of the inertial subrange when the energy containing range begins to impinge on the inertial subrange (e.g., $\hat{k} \lesssim 1$
cpm for Tidal Shelf ADV example in Figure 2). We note, however, that all four methods generally situated the wavenumbers
within the inertial subrange of the synthetic and real spectra (e.g., Figure 6c-e). Overall, we recommended the slope method
455 because it performs slightly better than the other methods, while the estimated slope β_1 is required later for flagging of $\hat{\varepsilon}$ at
level 4.

In practice, the user must select the size of each subset, in addition to the wavenumber overlap for each subset within the
spectra. For our benchmark datasets, we used an overlap equivalent to 1/20 of a decade, but other users may prefer shifting
the window by one spectral sample at a time. We recommend a minimum decadal wavenumber range of $\delta = 0.8$ and that each
460 fitted subset includes at least ten samples, especially when $\delta < 1$ (?)(Bluteau, 2025a). Users may also specify a maximum k_{\max}
and minimum wavenumbers k_{\min} that can be fitted upon inspection of the spectral observations (e.g., Figure 2). For example,
 $k_{\max} \approx 2\pi/L_b$ where L_b is the distance to the nearest boundary, while $k_{\min} \approx \pi/\ell$ depends on the dimension ℓ of the sampling
volume of the instrument. For each subset, the estimated $\hat{\varepsilon}_i$ is used to calculate L_K , and verify whether the fitted wavenumbers
are within the inertial subrange. The user may provide some allowance, but we recommend ensuring that the median fitted
465 k_{med} is within the inertial subrange, i.e., $k_{\text{med}} < 0.1/L_K$. Spectra for which none of the fitted subsets satisfy this requirement
were flagged (see § 4.6).

4.4.3 Impact of noise on ε estimates

In some instances measurement noise may adversely impact the estimated $\hat{\varepsilon}$, and render the spectra unusable for estimating
turbulence quantities. The drowning of the inertial subrange by noise is particularly common in low-energy environments such
470 as the ocean interior or in lakes. To deal with this issue, some authors have presumed the shape of the noise spectra to either
remove it from the spectral observations (e.g., Davis and Monismith, 2011), or add the presumed noise shape to the model used
for fitting the unaltered spectral observations (e.g., Ruddick et al., 2000). The former is challenging because measurement noise
levels change with the flow conditions and must be estimated from the spectra itself (see Voulgaris and Trowbridge, 1998). The
noise floor can be particularly hard to estimate in high energy flows being drowned by the signal. The latter method has the
475 same challenges but prevents us from using spectral fitting methods applicable to log-transformed spectra. Rather than use
these strategies, we recommend comparing the estimated $\hat{\varepsilon}$ to the minimum ε_m when the corresponding theoretical spectral

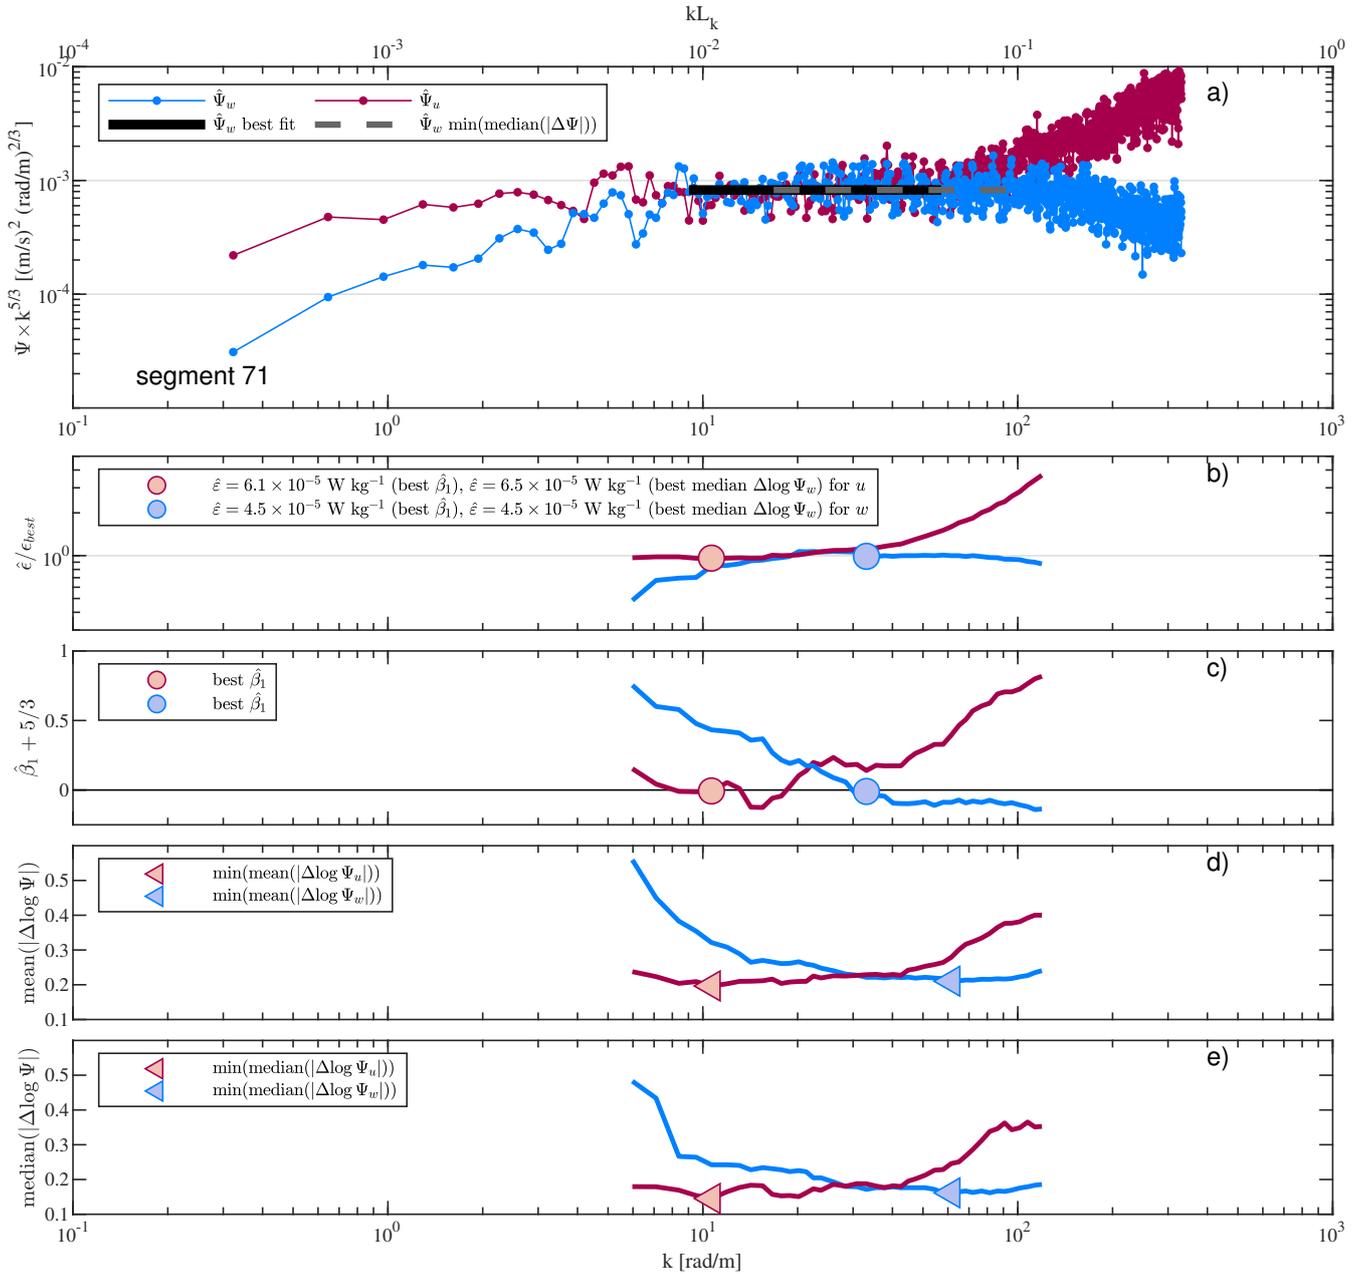


Figure 6. Example of locating the inertial subrange from (a) the spectra of two velocity components collected concurrently in the *Tidal Shelf ADV*. (b) Deviation of the estimated $\hat{\epsilon}/\epsilon_{best}$ from subsets, including each subset that included a decade's worth of spectral samples from the ϵ_{best} estimate, which represents is the $\hat{\epsilon}$ that yields the spectral slope $\hat{\beta}_1$ closest to the expected $-5/3$ presented in panel (c) in the vertical velocity direction. The top secondary x-axis in (a) shows the non-dimensional wavenumber based on the best-fit ϵ_{best} estimated from the vertical, less noisy component that was less impacted by measurement noise. (d) Mean of the absolute deviation between the log-transformed spectral observations and the fitted value over each subset (equation 15). (e) Same as (d) but taking the median instead of the mean. The triangles in both (d) and (e) represents the median wavenumber where the most likely wavenumbers representing the inertial subrange would be identified from these two methods.

energy levels in the inertial subrange (Equation 2) exceeds the noise floor Φ_n (Bluteau et al., 2011):

$$\varepsilon_m = \left(\frac{\Phi_n}{a_j C_k} \right)^{3/2} k^{5/2}. \quad (16)$$

This recommendation is based on the relatively low positive bias introduced when leaving the noise “as-is” in the spectra (Figure 7). The noise floor Φ_n typically appears as white noise (flat) in velocity spectra and can be estimated by averaging the energy levels of the highest wavenumbers where $\hat{\beta}_1 \approx 0$. Equation 16 depends on the fitted wavenumbers k and can be generalized further as a function of the smallest turbulent length scales L_k defined in Equation 3 (Bluteau et al., 2011):

$$k = \frac{\alpha}{L_k} = \frac{\alpha}{(\nu^3/\varepsilon)^{1/4}}. \quad (17)$$

The inertial subrange corresponds to $\alpha \leq 0.1$. Substituting this relationship for k into Equation 16 yields the following minimum ε_m :

$$\varepsilon_m = \frac{\alpha^{20/3}}{\nu^5} \left(\frac{\Phi_n}{a_j C_k} \right)^4. \quad (18)$$

This equation demonstrates that noise is most detrimental when fitting wavenumbers approaching the theoretical high wavenumber bound of the inertial subrange ($\alpha = kL_k = 0.1$). The minimum resolvable ε_m can be viewed as the measurement detection limit. The limit increases with noise levels, albeit the increase is amplified when fitting large wavenumbers i.e., k close to the beginning of the viscous subrange (Figure 7). For example, the inertial subrange sits above the noise floor for $\varepsilon > 10^{-7}$ W kg⁻¹ at wavenumbers ten times smaller than the highest within the inertial subrange ($\alpha = 0.01$) provided the noise levels Φ_n are less than 10^{-6} m² s⁻²/(rad/m) (Figure 7a). However, if fitting the highest wavenumbers within the inertial subrange ($\alpha = 0.1$), the spectra sit above the noise floor only if $\Phi_n \lesssim 2 \times 10^{-8}$ m² s⁻²/(rad/m) (Figure 7b).

By leaving the noise floor “as-is” in the spectral observations, a positive bias occurs when estimating $\hat{\varepsilon}$. The over-estimation is in addition to other errors associated with spectral fitting techniques described above. When $\hat{\varepsilon} \approx \varepsilon_m$, the estimated $\hat{\varepsilon}$ over-predicts the prescribed value ε by a factor of 3 (circles in Figure 7). When $\hat{\varepsilon} \approx 100\varepsilon_m$, the estimated $\hat{\varepsilon}$ over-predicts ε by a factor of 1.5 (squares in Figure 7). These positive biases are relatively small compared to the range of ε encountered in environmental flows, especially considering how quickly the bias lessens when including lower wavenumbers ($\alpha \leq 0.1$) in the fit. Hence, the biases shown in Figure 7 are conservative when α is determined from the largest fitted wavenumber k_N .

To flag overly noisy spectra with Equation 18, the user must estimate the spectral noise floor Φ_n from the observations. For our benchmarks, Φ_n was calculated as the average spectral energy levels over the last $\delta = 0.1$ decadal range or the last 30 spectral samples, whichever leads to a larger number of averaged samples. The resulting Φ_n is stored as SPEC_NOISE_UVW in the same units as the spectra from which the average was determined at Level 3 UVW_VEL_SPEC. The spectral noise estimate Φ_n is used with the maximum fitted wavenumber k_N stored in K_BNDS and the estimated dissipation $\hat{\varepsilon}$ stored in Level 4 to estimate ε_m using Equation 18. The estimated ε_m is stored as MIN_EPSI_NOISE at Level 4 so that this value can be used to generate quality control flags for $\hat{\varepsilon}$ in section 4.6.

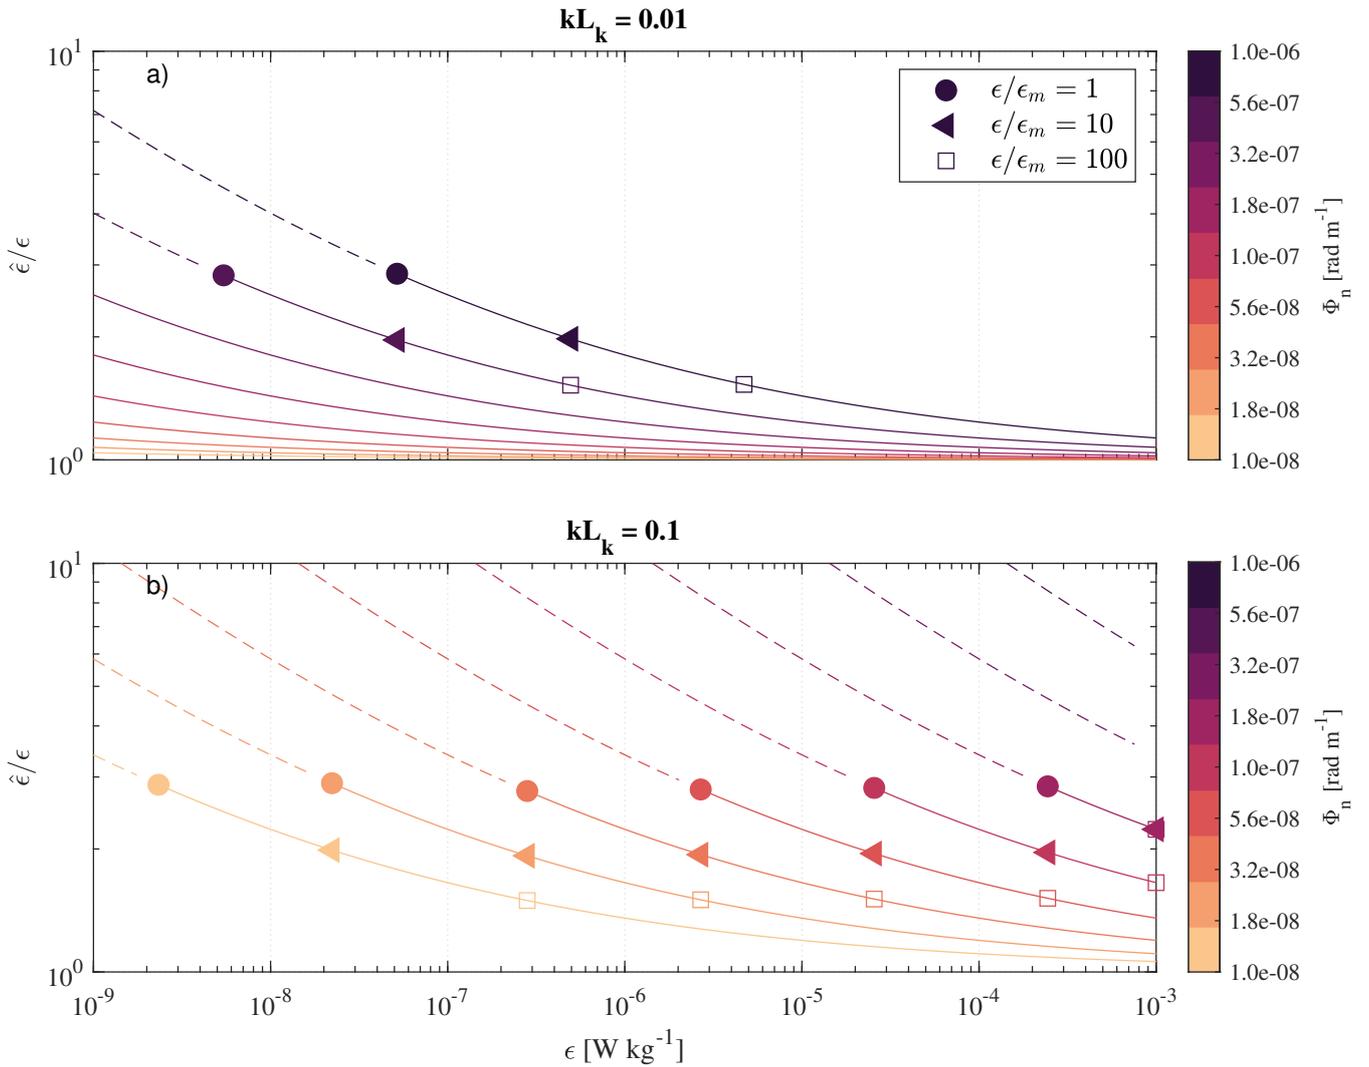


Figure 7. Over-estimation of $\hat{\epsilon}$ as a function of noise level Φ_n and wavenumber fitted. The fitted wavenumber in (a) corresponds to $\alpha = 0.01$; in (b), to $\alpha = 0.1$, the high [wavenumber](#) k limit for the inertial subrange. The circles show the [minimum](#) resolvable dissipation ϵ_m (Equation 18). The dashed line indicates that the inertial subrange sits below the noise floor; thus, $\hat{\epsilon}$ cannot be resolved. [\$L_k\$ is the Kolmogorov length scale that defines the smallest turbulent scales \(equation 3\).](#)

4.4.4 Flow interference

Nearby instrument frames may obstruct the flow or shed vortices, contaminating the velocity observations. This contamination is often recognizable as a narrow band peak in the velocity spectra when the frame obstructs the flow upstream of the sampling

510 following (Figure 2). In this situation, the contamination frequency f_c can be determined from the Strouhal number Sr :

$$f_c = 0.21 \frac{\bar{U}}{D} \quad (19)$$

for high Reynolds flow ($Sr \approx 0.21$, Kundu, 1990). The frequency of the disturbances increases with decreasing diameter D of the obstruction or an increase in the velocities past the frame \bar{U} . These disturbances are typically associated with a specific flow direction relative to the instrument's frame of reference. Hence, if the instrument is fixed in space, the flow direction can
 515 be used to identify when vortex shedding is potentially contaminating the velocity spectra, Alternatively, near boundaries, the estimated $\hat{\varepsilon}$ can be compared to the predicted values for the log-law of the wall and the flow direction (see Figure 4 McGinnis et al., 2014). This contamination may occur at wavenumbers higher than those within the inertial subrange, as apparent in the first 25 minutes of the *Tidal Shelf ADV* benchmark. The flow disturbances will sometimes be significant enough to increase energy levels within the inertial subrange. Thus, it is preferable to avoid the problem by placing the sampling volume of the
 520 instruments far from the obstruction. A common rule of thumb is leaving a space larger than ten times the diameter of the obstruction between the frame and the sampling volume. When the sampling volume is obstructed, $\hat{\varepsilon}$ will be over-estimated downstream of the disturbance (see Figure 4 of McGinnis et al., 2014).

Another contamination source specific to the MAVS velocity sensor is the rings that house the acoustic transducers. These rings shed vortices, contaminating the velocity measurements. This contamination affects most directions transverse to the
 525 instrument's main shaft. For a horizontally mounted instrument, such as our *Tidal MAVS* benchmark, the longitudinal direction was the least affected by the rings' vortex shedding (Hay et al., 2013). In contrast, the transverse direction was the most affected. The other *Under-ice MAVS* benchmark was mounted vertically on a rod lowered beneath the ice sheet. The vertical velocity direction was the least affected, followed by the longitudinal, although the vertical component still shows evidence of a high-frequency flow disturbance in its spectra (Figure 2). Our quality-control metrics below include optional flagging for $\hat{\varepsilon}$
 530 estimates affected by flow disturbances.

4.5 Confidence intervals for $\hat{\varepsilon}$

Given the above recommendation for fitting the spectra using the least-absolute deviation method, we suggest creating confidence intervals on $\hat{\varepsilon}$ using bootstrapping techniques (Davison and Hinkley, 1997). The advantage of bootstrapping is that no assumption is made about the statistical distribution of the observations. Bootstrapping involves resampling the dataset and recomputing the
 535 desired statistics to provide a distribution of estimates, from which confidence intervals can be obtained. For our application, we bootstrapped the fitted $\hat{\beta}_0$ since it is used to estimate $\hat{\varepsilon}$ from Equation 14. This step is achieved by resampling the residuals r between the log-transformed observations ($\ln \hat{\Psi}$) and the best-fit $\hat{\beta}_0$:

$$r_i = \ln \hat{\Psi}_i - \left(\hat{\beta}_0 - \frac{5}{3} \ln k_i \right) \quad (20)$$

and adding them to the best-fit line in log-log space to create a new dataset $\ln \tilde{\Psi}$:

$$540 \ln \tilde{\Psi}_i = \tilde{r}_i + \left(\hat{\beta}_0 - \frac{5}{3} \ln k_i \right), \quad (21)$$

where i represents an observation and \tilde{r}_i , the bootstrapped residuals. The new spectral log-transformed spectra $\ln \tilde{\Psi}$ are refitted with Equation 13 to obtain a bootstrapped $\hat{\beta}_0$ estimate. The resampling of residuals and fitting are repeated many, typically more than 1000, times (Davison and Hinkley, 1997), to obtain a collection of bootstrapped $\hat{\beta}_0$ estimates for a given velocity spectrum, and thus $\hat{\epsilon}$ estimate. Finding the 2.5th and 97.5th percentiles from the collection of $\hat{\beta}_0$ provides the 95% confidence interval.

545 These percentiles are then substituted into Equation 14 to obtain the confidence levels for $\hat{\epsilon}$. In the benchmark datasets, we obtained the 95% confidence intervals for each $\hat{\epsilon}$ estimate by resampling the residuals and refitting 1000 times $\ln \tilde{\Psi}$ (Equation 21).

4.6 Quality-control considerations and flags

Similarly to the raw velocities at Level 1, we assess our $\hat{\epsilon}$ estimates against multiple quality-control metrics. The results of this

550 assessment are stored using an 8-bit ($N_c = 8$) boolean flag calculated with the same equation as for our raw velocities (eq. 8). Thus, the maximum flag value is 255 when all eight quality-control metrics apply to a given $\hat{\epsilon}$ estimate. [The use of boolean codes allows for flagging estimates for one or multiple reasons at once.](#) This number is stored at Level 4 as EPSI_FLAGS. Below we describe each metric individually, which are summarized in Table 3.

Table 3. Summary of the different boolean flags and thresholds used to mask ε estimates, stored as EPSI_FLAGS variable in the 4th processing level within NetCDF file.

Flag meanings	Flag masks	Flag threshold	Flag threshold meaning
1. Non-stationary	1	20 subsets	Number of subsets used for calculating runs. The acceptable number of runs is in between 6 and 15 when subdividing the dataset into 20 subsets.
2. Failed Taylor hypothesis	2	\mathcal{T}_H in Eq. 22	Ratio is above the acceptable threshold $T_H = 0.33$ (Pécseleli and Trulsen, 2022).
3. Noise dominated spectra	4	\mathcal{T}_n in Eq. 23	Ratio $\varepsilon/\varepsilon_m$ is below the acceptable threshold. A low ratio implies the high wavenumbers of the inertial subrange are drowned by noise.
4. Poor spectral slope	8	A in Eq. 24	Smaller A reduces the range of acceptable slopes $\hat{\beta}_1$ for an inertial subrange.
5. Missing velocity samples	16	$\mathcal{T}_P = 10\%$	Maximum permissible percentage of missing velocity samples in a segment.
6. Anisotropic (optional)	32	\mathcal{T}_A in eq. 25	Ratio of largest to smallest turbulent overturns too low for the spectra to exhibit a well-defined isotropic inertial subrange. May require information about the background shear and/or stratification, especially if far from a boundary.
7. Outside inertial subrange	64	Eq. 26	Estimated $\hat{\varepsilon}$ places the fitted k within the viscous subrange.
8. User-defined	128		Example of user-defined metrics could be outliers in the $\hat{\varepsilon}$ timeseries, contamination from vortex shedding shedding, etc.
Total	255 if all eight metrics are used		

4.6.1 Non-stationarity

555 Our first metric presents the results from testing the stationarity of turbulent velocities. Both spectra computations and the
inertial subrange model rely on the assumption of stationarity. The test is applied to each velocity component separately. For
this purpose, we used the nonparametric test by Bendat and Piersol (2000), which involves calculating two statistics (standard
deviations and average) over shorter subsets of each velocity timeseries segment (of duration τ_ε). We then compare the number
of runs (crossings) of each statistic about its average to the expected values in Table A.6 of Bendat and Piersol (2000). For
560 this evaluation, the user must choose the significance level and the number of subsets to subdivide each segment. We used 20
subsets and a 95% level, resulting in an acceptable number of runs between 6 and 15. We flagged $\hat{\varepsilon}$ as non-stationary if the
number of runs for the standard deviation and means for the velocity segment are outside the expected range.

4.6.2 Violation of Taylor’s frozen hypothesis

The second quality metric focuses on Taylor’s frozen turbulence hypothesis. We recommend flagging $\hat{\varepsilon}$ estimates associated
565 with low advection velocities \bar{U} relative to the root mean square of the turbulent velocity fluctuations along the direction of
mean advection u_{rms} . This condition translates to flagging $\hat{\varepsilon}$ associated with u_{rms}/\bar{U} exceeding a threshold \mathcal{T}_H :

$$\frac{u_{\text{rms}}}{\bar{U}} > \mathcal{T}_H. \quad (22)$$

We suggest $\mathcal{T}_H = 0.33$ based on the work of Pécseli and Trulsen (2022) who showed that the error for $\hat{\varepsilon}$ for this value is
about 10%. Larger errors are expected when $\frac{u_{\text{rms}}}{\bar{U}}$ increases (see Figure 12 of Pécseli and Trulsen, 2022). Thus, \mathcal{T}_H could be
570 increased but it should always remain smaller than 1. The chosen threshold should be specified in the metadata of EPSI_FLAGS
accompanying the $\hat{\varepsilon}$ estimates as detailed in Table 3.

4.6.3 Noise-dominated spectra

The third flag considers whether the fitted spectra are drowned by noise. This criteria involves calculating the minimum
resolvable ε_m using equations 17 and 18 from the dissipation $\hat{\varepsilon}$ estimates, the maximum fitted wavenumber k_{max} , and the
575 estimate of the spectral noise floor Φ_n (see § 4.4.3). The estimated $\hat{\varepsilon}$ is compared to the minimum resolvable ε_m . Dissipation
estimates are flagged as being drowned by noise when the ratio between these two quantities is less than the user-defined
threshold \mathcal{T}_n :

$$\frac{\hat{\varepsilon}}{\varepsilon_m} < \mathcal{T}_n. \quad (23)$$

The threshold \mathcal{T}_n must always be larger than one and specified in the $\hat{\varepsilon}$ flag’s metadata (see Table 3). We suggest $\mathcal{T}_n = 3$ owing
580 to the positive bias shown when the highest wavenumbers of the inertial subrange sit near spectral observations as illustrated
in Figure 7).

4.6.4 Spectral slope outside expected range

Our fourth flag involves estimating the spectral slope $\hat{\beta}_1$ from the observations ~~-. We identify $\hat{\epsilon}$ associated with to identify~~ spectral slopes that deviate too much from the expected $-5/3$ value ~~-. This situation (thus rendering suspect the associated~~ estimate of $\hat{\epsilon}$). These deviations may occur because of excessive noise, anisotropy, or other contamination (e.g., vortex shedding). ~~Spectral slope estimates that fall outside the bounds given by Equation 24 are flagged. An estimated slope that deviates from~~ $-5/3$ can also occur when the slope is actually $-5/3$ due to statistical variability of the computed spectra d , the number of spectral points N_s used for the fitting, and the decadal range δ fitted (Figure 7 and 8 Bluteau, 2025a). Their results were obtained by fitting the inertial subrange to 3200 synthetic spectra (100 spectra per degrees of freedom tested) with uncertainty generated using the χ_d^2 -distribution (Bluteau, 2025b). Figure 8 recasts their results in a different form to show that the estimated 99.7% bounds can be represented by:

$$\hat{\beta}_1 > \beta_1 \pm \frac{A}{\delta \sqrt{2dN_s}} \quad (24)$$

with empirical estimates of A ranging between 7 to 17. The maximum A from the numerical experiments was about 17 for $N_s = 100$ and $\delta = 1$ (Figure 8). This A denotes the maximum deviation obtained from the expected $\beta_1 = 5/3$ when fitting idealized velocity spectra.

~~To We chose this maximum $A = 17$ to flag $\hat{\epsilon}$, we set $A = 17$ because we estimated the spectral slopes $\hat{\beta}_1$ using methods~~ applied to log-transformed spectral observations. This A value is based on the 99.7% bounds in Figure 8. with spectral slope estimates that fall outside the bounds given by equation 24. Reducing A would render the threshold more stringent, flagging an increased number of $\hat{\epsilon}$ estimates. Users should always specify their choice of A in the metadata accompanying their of the Level 4 NetCDF quality-control $\hat{\epsilon}$ estimates flags (EPSI FLAGS in Table A4). This information in combination with the variables for estimating the acceptable bounds (Equation δ , N_s , and d in equation 24) should be available also stored as variables at Level 4 to enable other users to re-flag $\hat{\epsilon}$ if desired (see Table A5).

4.6.5 Missing too many samples

Our fifth flag involves identifying segments with significant data loss during the quality-control of raw velocities, which render the spectra unreliable for estimating $\hat{\epsilon}$ (§ 4.1). Limited testing involving the random removal of velocity samples from our benchmarks showed that spectral shapes deviate considerably from the original when more than 10% of samples are removed. As the percentage of data loss increases, the interpolated time series yield spectra with increased energy levels at low k and decreased energy at high k . We suspect acceptable data loss depends on data quality (i.e., noise levels) and underlying turbulence captured in the original time series. We thus recommend users specify their threshold \mathcal{T}_P for the maximum percentage of data loss in the segment after quality-controlling the raw velocities. For our benchmark datasets, we use 10% as the minimum percentage of good samples in a segment.

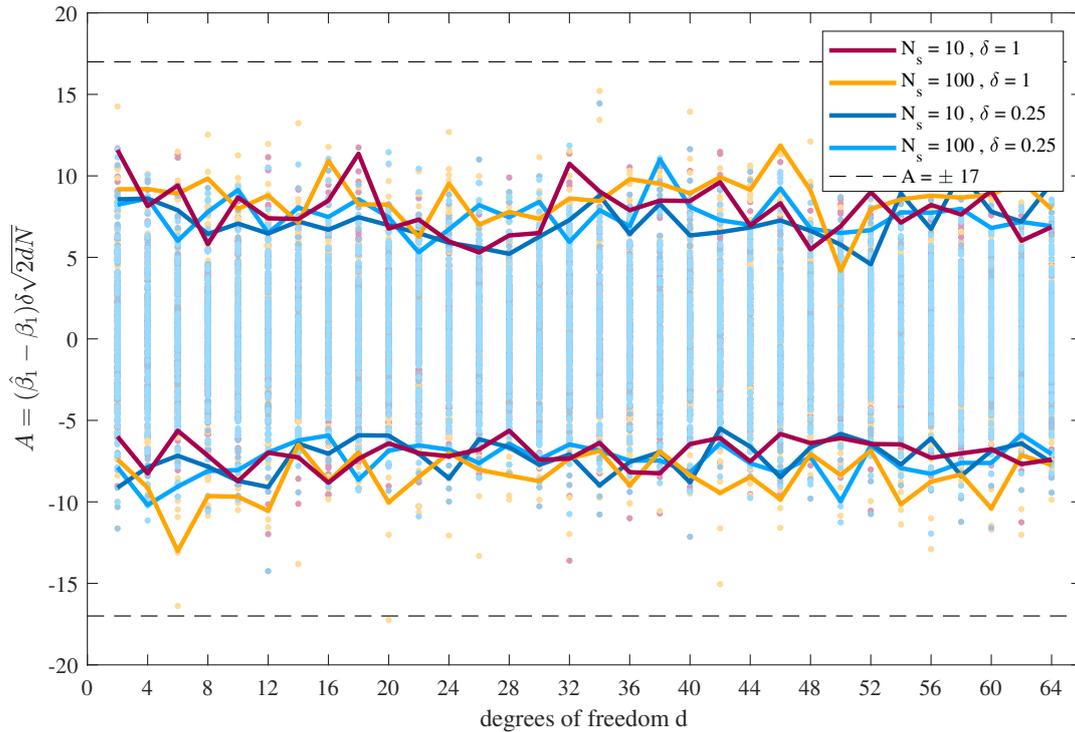


Figure 8. Estimated A from computing spectral slopes $\hat{\beta}_1$ using the logLAD method on the χ_d^2 distributed synthetic spectra dataset Bluteau (2025b, a). The thick lines provide the 99.7% bounds (0.15th and 99.85th percentiles) for the numerical experiments when changing the number of samples N_s and decadal range δ fitted. Results are scaled by the expected standard deviation of χ_d^2 distributed samples ($\sqrt{2d}$) in addition to $\delta\sqrt{N_s}$. This figure illustrates that deviation of $\hat{\beta}_1$ from the true value $\beta_1 = -5/3$ scales approximately with $\delta\sqrt{2dN_s}$. There were 3200 synthetic spectra fitted for each series of numerical experiments (100 spectra per degrees of freedom tested).

4.6.6 Spectral anisotropy

The sixth metric is for flagging **anisotropic** $\hat{\varepsilon}$ estimates associated with low energy turbulence, resulting in anisotropic spectra. This flag is not for excluding anisotropic spectra, when one velocity component is more impacted by the flow properties than the others. This impact manifests itself as flatter spectral slopes at low wavenumbers preferentially in one direction compared to the others (e.g., $\hat{\Psi}_w$ vs $\hat{\Psi}_u$ for $k < 8$ rad m^{-1} , Figure 6). This feature does not render the spectra unusable for estimating ε until the turbulence becomes so weak that the scales of the energy containing subrange start approaching those at the high end of the inertial subrange. The spectral slopes may start to deviate from the $-5/3$, but oftentimes a $-5/3$ slope still exists but its energy levels drop below those expected for isotropic turbulence (equation 2). Spectra are considered too anisotropic when the ratio L/L_K is small, which results in underestimating $\hat{\varepsilon}$.

This flag is optional as it typically requires an estimate of the largest turbulent overturns L (see §2). The size of the large overturns depends on the mean flow characteristics and so necessitate measuring the background stratification (L_O , Equation

5) or the background shear (L_S , Equation 6) unless the distance from the boundary is a suitable alternative for L (Equation 7). Spectra are considered too anisotropic when the ratio L/L_K is small, which would potentially lead to underestimating $\hat{\epsilon}$. To flag this issue, we compare ~~this ratio~~ the ratio L/L_K to a user-defined threshold \mathcal{T}_A :

$$\frac{L}{L_K} < \mathcal{T}_A. \quad (25)$$

The threshold \mathcal{T}_A depends on the chosen measure for L and the velocity component (see Bluteau et al., 2011, for an extensive review). The longitudinal direction tends to have a broader inertial subrange than the vertical and transverse directions. We recommend a similar threshold $\mathcal{T}_A = 100$ to Bluteau et al. (2011), noting that higher thresholds might be necessary when the transverse or vertical components are used to estimate $\hat{\epsilon}$. The user should specify the definition of their largest L and the threshold \mathcal{T}_A for flagging the data in the EPSI_FLAG metadata. For our benchmarks, this length-scale was set $L = \kappa L_b$ and stored as at level 4.

4.6.7 Fit located outside inertial subrange

The seventh flag identifies spectra when most fitted wavenumbers sit outside the inertial subrange. This situation arises when the median fitted wavenumber k_{med} during the search of the inertial subrange (see §4.4.2) are high and always lies within the viscous subrange:

$$k_{\text{med}} \gtrsim \frac{0.1}{L_K} \quad (26)$$

(Pope, 2000). This situation typically arises when the speed past the sensor is very slow, or the spectra are very noisy, such that the algorithm places the inertial subrange at very high wavenumbers.

Alternatively, the fitted wavenumbers may be too small and thus outside the inertial subrange. This situation will arise if the inertial subrange is unresolved because the sampling frequency is too slow or the largest overturns' are negligible. For the benchmarks, these wavenumbers are those smaller than those dictated by the distance to the nearest boundary (see Figure 2).

4.6.8 User-defined flags

The last flag is reserved for missing $\hat{\epsilon}$ estimates or any other user-defined flag. For example, the user may flag data loss onboard the instrument, $\hat{\epsilon}$ outliers in the time series, or perhaps unrealistically different $\hat{\epsilon}$ between velocity components. Occasionally, all components will yield $\hat{\epsilon}$ estimates, passing all quality control criteria, but significant differences still exist between components. This situation may occur, for instance, because of vortex shedding from nearby flow obstacles (§ 4.4.4). We used this user-defined flag to denote velocity directions from the MAVS benchmark datasets that were impacted by vortex shedding.

4.6.9 Final $\hat{\epsilon}$ estimates

In the NetCDF file, a final estimate for $\hat{\epsilon}$ is stored as a 1d timeseries EPSI_FINAL. This parameter is effectively the “best” $\hat{\epsilon}$ issued from the data processing and flagging with the EPSI_FLAGS. There can often be large differences in dissipation

estimates among the three velocity components caused by differing impacts of noise, anisotropy at low wavenumbers, and vortex shedding on the spectral observations. Thus, we select one of the velocity component to produce the final $\hat{\epsilon}$ estimates, and document the choice in the EPSI_FINAL metadata.

655 5 Application of methods to benchmark datasets

We illustrate the methods, common data quality issues, and the application of quality-control flags for our *Tidal Shelf ADV* benchmark. The quality-control thresholds and processing choices are summarized in Table 4 for our four benchmarks. The velocities’ “legged” appearance was caused by setting the velocity range below the maximum observed during deployment. This issue is rectified once beam velocities are unwrapped. These velocities were stored as XYZ_VEL_UNWRAP at level
660 1, and once quality-controlled, they are segmented and included in the NetCDF file at level 2 (Figure 3 and Table A1). This dataset was high quality as the data return was more than 85% for all segments (Figure 9c). The most significant data loss coincided with the period of strong flows when many velocity samples were phase-wrapped. Despite the unwrapping, some poor ~~velocities-velocity~~ samples remained and were flagged using the 5 and 6th flags that denote spikes and suspiciously large velocities in Table 2. These samples appeared in the timeseries as having velocities flags totaling 160 and 176, respectively
665 (Figure 9c). For this dataset, the 8th flag, denoting phase-wrapped samples, was not used to discard velocity samples since these were unwrapped before segmenting. This flag yielded a boolean value of 128. ~~To be discarded, the samples must be flagged for another reason, so only samples with flags~~ Velocity samples were only discarded if flagged for any other reason. Only samples with flag values greater than 0 and not equal to 128 were replaced using linear interpolation at level 2 (see §4.3). This interpolated dataset was then split into 256-sec long segments with a 25% overlap between adjacent segments and stored
670 in the Level 2 group within the NetCDF file.

The Level 2 segmented and quality-controlled data were then used to calculate the spectra stored in the NetCDF file at Level 3. Spectra from four different segments of the *Tidal Shelf ADV* benchmark are illustrated in Figure 10. This benchmark displayed evidence of vortex shedding when velocities were directed at 220° relative to the instrument’s frame of reference and exceeded 5 cm s^{-1} (segments 1 to 7). However, the shedding was well outside the inertial subrange (100 cpm, Figure 10a), so
675 $\hat{\epsilon}$ was not flagged for this criteria.

The spectra from segments 8 through 10 were not impacted by vortex shedding because the flow was too weak despite the velocities being oriented in the right direction to contaminate the measurements (see segment 10 in Figure 10b). In this second example, the $\hat{\epsilon}$ estimates of all velocity components were nonetheless flagged for failing the Taylor Hypothesis criteria and for most of the spectra sitting within the theoretical viscous subrange based on the fitted $\hat{\epsilon}$ (2nd and 7th flags, respectively, in
680 Table 3). Combined, these two flags translate to a boolean value of 66 for the longitudinal and transverse $\hat{\epsilon}$ flag stored at level 4 (Equation 8). The vertical component had a larger flag of 67 because it was also deemed non-stationary (1st flag in Table 3).

For our third example, $\hat{\epsilon}$ estimates from the transverse and vertical components received a boolean $\hat{\epsilon}$ equal to 32 (Figure 10c). This value translates to applying the 6th flag, concerning turbulence anisotropy ($I \in 6$ in Equation 8). For this dataset, we used a threshold of $\mathcal{T}_A = 100$ to identify segments that were too anisotropic to yield a reliable $\hat{\epsilon}$ estimate (Equation 25, Table

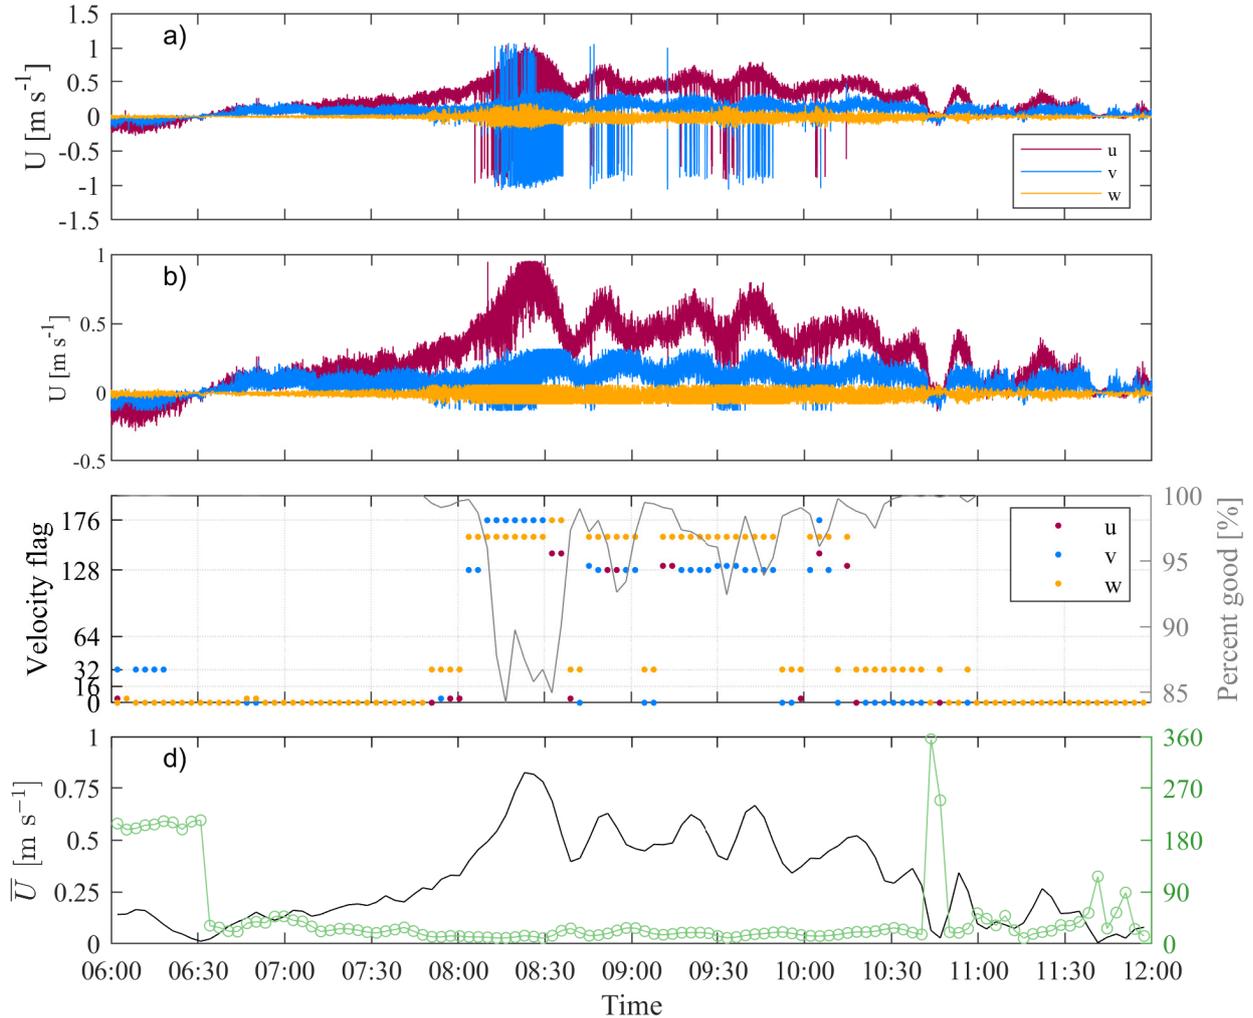


Figure 9. Level 1 and 2 observations associated with the *Tidal Shelf ADV* benchmark. (a) Raw velocities with obvious signs of phase-wrapping. (b) Quality-controlled and unwrapped velocities for the benchmark. (c) Maximum boolean velocity flags (i.e., XYZ_VEL_FLAG) value for each 256 s long segment. The secondary axis shows the percentage of good samples within each segment. (d) Mean velocities and direction relative to the instrument's frame of reference. Table 2 summarizes the meaning of the velocity boolean flags.

685 4). The longitudinal component passed the condition for being sufficiently isotropic, while passing all other quality-control criteria (EPSI_FLAG = 0).

Our fourth and final example received an EPSI_FLAG of 8 in the longitudinal velocity component (Figure 10d). This boolean code implies that this segment failed the 4th criterion, which indicates that the spectral slope $\hat{\beta}_1 = -0.83$ (Figure 11e)

Table 4. Data processing choices when estimating $\hat{\epsilon}$ from quality-controlled velocities.

	Tidal slough ADV	Tidal shelf ADV	Under-ice MAVS	Tidal MAVS
Measured coordinate system	XYZ	XYZ	ENU	XYZ
Rotation method	None	to align with \vec{U}	to align with \vec{U}	None
δ wavenumber range for fitting	0.8	0.8	0.8	0.8
EPSI in EPSI_FINAL	Vertical (w)	Vertical (w)	Vertical (w)	Transverse (v)
Thresholds used when creating EPSI_FLAG				
1. Non-stationary (subsets)	20	20	20	20
2. Failed Taylor Hypothesis: \mathcal{T}_h	0.33	0.33	0.33	0.33
3. Noise dominated spectra: \mathcal{T}_n	3	3	3	3
4. Poor spectral slope: A	17	17	17	17
5. Missing velocity samples: \mathcal{T}_p	10	10	10	10
6. Anisotropic: \mathcal{T}_a and $L = \kappa L_b$	150 and L=0.18 m	100 and L=0.16 m	200 and L=2 m	200 and L=0.58 m
7. Outside inertial subrange	Assumes the inertial subrange ends at $k \approx 0.1/L_k$			
8. User-defined	Not used	Not used	Vortex shedding in u and v	Vortex shedding in u and w

was outside the expected range based on Equation 24. For this computation, we used $d = 28.5$ for the spectra's degrees of freedom, $N = 32$ for the number of fitted samples, and $\delta = 0.8$ for the decadal range fitted. The other two velocity components passed all quality-control criteria (EPSI_FLAG=0).

Despite not flagging any of the $\hat{\epsilon}$ from the *Tidal Shelf ADV* for vortex contamination, this contamination source did impact the reliability of $\hat{\epsilon}$ of other benchmarks. For example, we flagged all of the MAVS $\hat{\epsilon}$ estimates obtained from velocity components perpendicular to the instrument's shaft. This step translates to flagging all the *Tidal MAVS* $\hat{\epsilon}$ estimates, which were not from the transverse (y) direction and all *Under-ice MAVS* $\hat{\epsilon}$ estimates that were not from the vertical (w) direction (Table 4). The chosen velocity component for the final $\hat{\epsilon}$ estimates differs between the datasets. The *Tidal MAVS* assigns the $\hat{\epsilon}$ estimates from the transverse direction given the orientation of the flow relative to the instrument's shaft, while the other datasets assigned $\hat{\epsilon}$ from the vertical component. Depending on the intended scientific purposes for the $\hat{\epsilon}$ estimates, users may want to be more or less stringent when applying the quality-control metrics. Hence, we recommend documenting the chosen thresholds in the NetCDF metadata for EPSI_FLAGS.

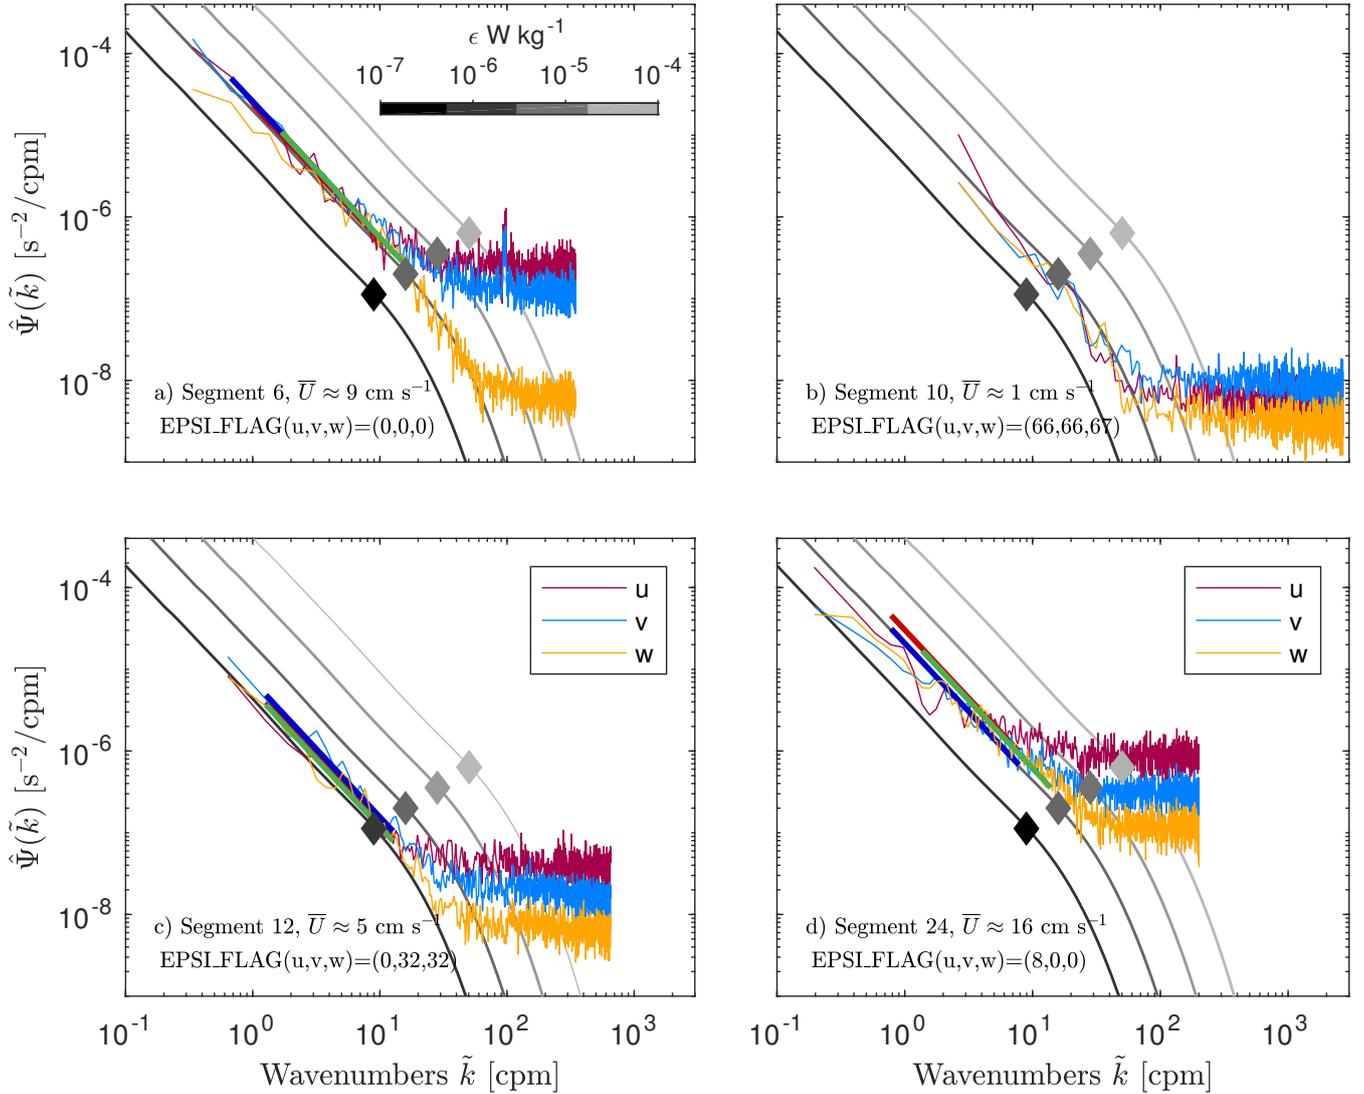


Figure 10. Example spectra from four different segments of the *Tidal Shelf ADV* benchmark are shown in separate panels for all three velocity components. The turbulence model spectra for velocities are shown in gray for 10^{-7} (darkest) to 10^{-4} W kg^{-1} (lightest) as digitized by Luznik et al. (2007) from the work of Gargett et al. (1984). The approximate limit between the inertial and viscous subrange for each model spectra is denoted by the diamonds (Equation 4).

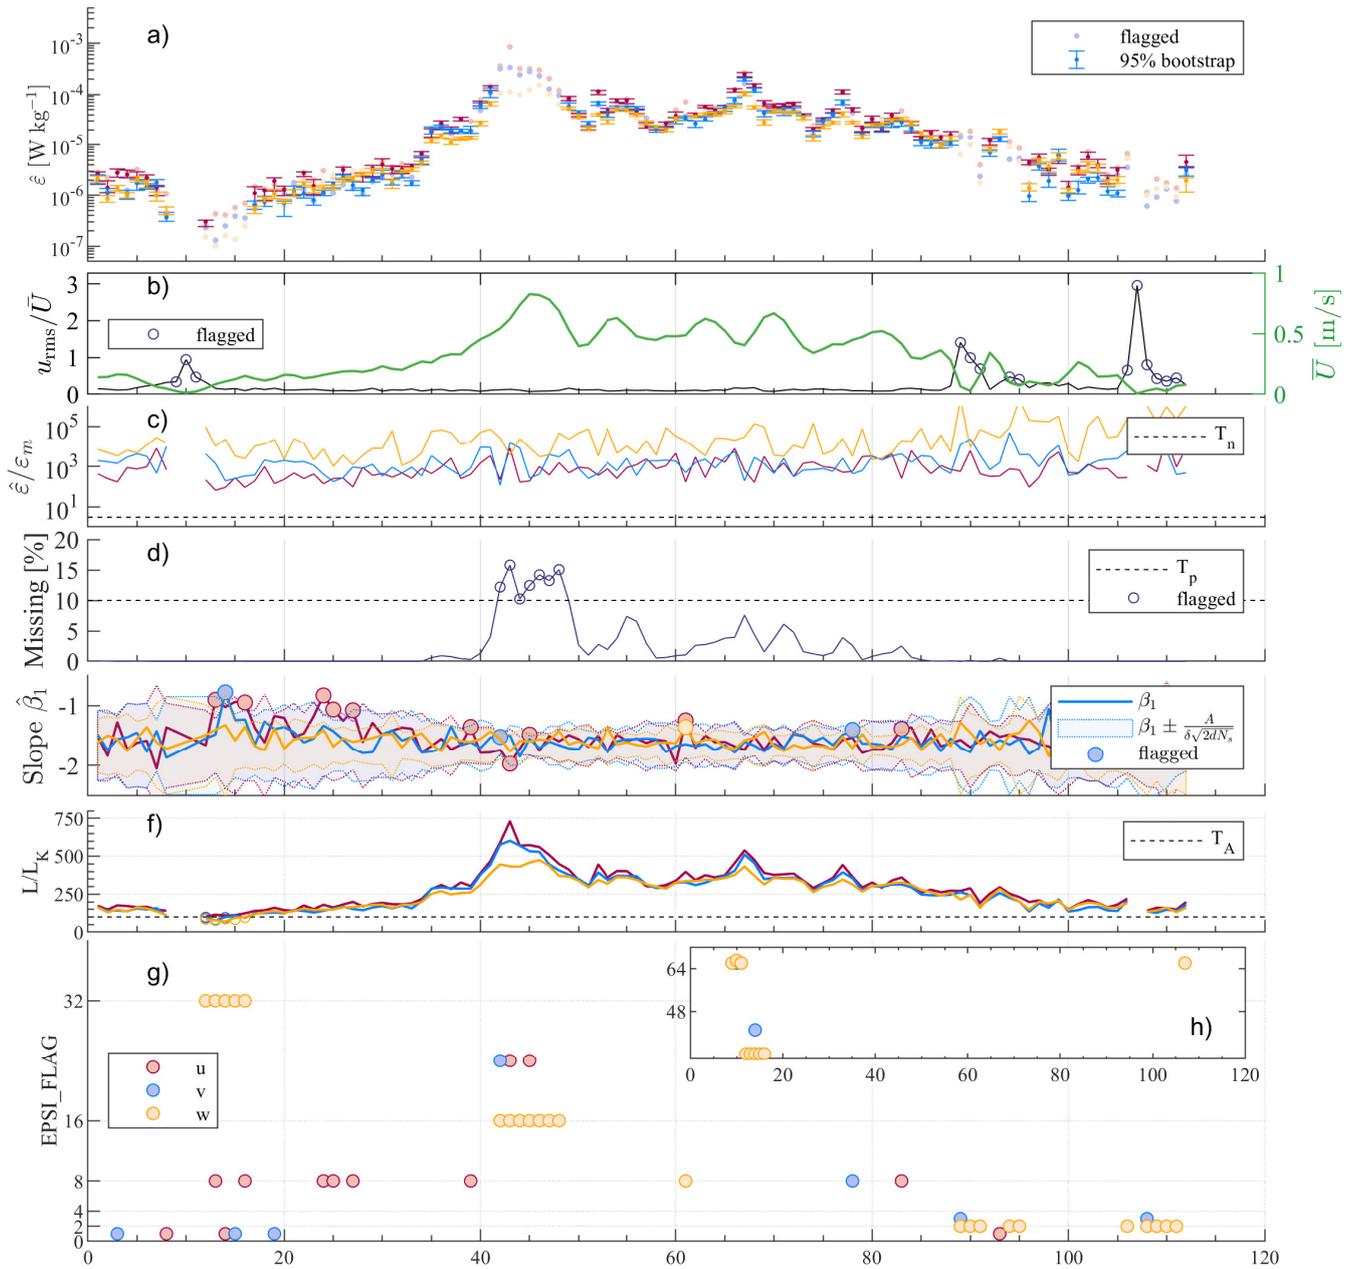


Figure 11. Estimated $\hat{\epsilon}$ and associated quality control metric used for flagging the *Tidal Shelf ADV* benchmark dataset. a) The 95% bootstrap confidence intervals are shown for the $\hat{\epsilon}$ estimates that passed all quality-control metrics. [If no error bars are presented, then the estimate was flagged for not meeting one or several quality-control criteria](#). b) Taylor Frozen hypothesis (Equation 22) with the mean speed \bar{U} past the sensor on the secondary right axis. c) Noise-dominated spectra metric (Equation 23). d) Too many missing velocity samples [compared](#) to T_p . e) Spectral slopes β_1 deviate from the expected range (Equation 24). f) Likely anisotropic spectra (Equation 25). g) Boolean flag for our estimated $\hat{\epsilon}$. The higher EPSI_FLAGS are show in h).

6 Conclusions

This paper uses acoustic point-measurement data to describe a systematic approach to obtaining reliable estimates of a key ocean parameter—the dissipation rate of turbulent kinetic energy ε . We describe the processing and data handling steps, quality control, and associated flags. Finally, we provide benchmark results for researchers to validate their computer methodologies.

705 [For peer-reviewed publications, we recommend depositing in data centers, at a minimum, the Level 4 NetCDF group \(see Table A4 and A5\). Providing example spectra like in Figure 2, or alternatively providing the Level 3 NetCDF group \(Table A3\) is strongly encouraged. The publication’s methods should summarize the data processing choices for quality-controlling the raw timeseries \(Table 2\) and for estimating \$\hat{\varepsilon}\$ from these velocities \(e.g., Table 4\).](#)

This approach was developed as part of the ATOMIX working group. As such, parallel analyses exist for other ocean measurement measurement techniques (Lueck et al., 2024). There are benefits to this combined approach, including the ability to leverage a broader range of experience and coding and making the step from one type of measurement to another much easier. This benefit also applies to field campaigns with overlapping measurement approaches (e.g., the near-bed section of a shear profile overlapping with a region measured with a bed-mounted acoustic velocimeter).

715 One clear but simple conclusion is that there are significant benefits to consistently employing the ATOMIX naming and storage convention described here. In particular, this enables rapid integration with existing approaches and builds a more cohesive and efficient sampling community with enhanced cross-talk between researchers using different methods. Over time, we expect improvements to the best practices as new instruments become available and new environmental conditions are sampled. With the oceans’ continued importance and role in key Earth system processes, more systematic sampling of the oceans is inevitable. It is important that this sampling produces results that are consistent and reliable.

720 . The benchmarks and tools for loading benchmark datasets are available at the following public repository [10.5281/zenodo.1679890](https://zenodo.org/record/1679890) (Bluteau et al., 2025) under the SCOR community resources. This repository also includes example templates for writing our recommended metadata into NetCDF files.

. Lead author CEB had primary responsibility for writing the manuscript as well as its conception. The other co-authors contributed to the following sections: Introduction – All co-authors with strong participation from CLS, DW, JM; section 2 and 3 – CLS, CEB; section 4 – 725 CEB, DW, JM; section 5 – CEB; Conclusion: CLS. All authors contributed to the article and approved the submitted version. CLS prepared most tables and all schematics. CEB prepared all data-centric figures. All authors critically reviewed the manuscript’s scientific according to the ATOMIX working group’s discussion.

. The authors declare that they have no competing interests.

. These benchmarks were created according to the terms of reference of an international working group #160 ATOMIX, and the authors thank
730 the other members of the ATOMIX working group (co-chairs Cynthia Bluteau, Ilker Fer and Yueng-Djern Lenn). The Scientific Committee
on Oceanic Research funds this working group through a grant from the National Science Foundation (NSF grant #OCE-2140395) and
contributions from national SCOR committees. CS was supported by Marsden Fund awards NIW1702 and NIW2102. MAVS datasets were
provided by Natalie Robinson (supported by the NZ Antarctic Science Platform project ANTA1801) and Alex Hay (*Tidal MAVS*). The
ATOMIX wiki has more information about the group's activities, and can be accessed from the working group's website:
735 <https://scor-int.org/group/analysing-ocean-turbulence-observations-to-quantify-mixing-atomix/>.

References

- Bendat, J. S. and Piersol, A. G.: *Random Data: Analysis and Measurement Procedures*, Probability and statistics, Wiley - Interscience, 3rd edn., 2000.
- Bluteau, C.: Assessing statistical fitting methods used for estimating turbulence parameters, *Limnol. Oceanogr.: Methods*,
740 <https://doi.org/10.1002/lom3.10729>, 2025a.
- Bluteau, C.: Synthetic spectra for assessing statistical fitting methods used to estimate ocean turbulence, *Zenodo*,
<https://doi.org/10.5281/zenodo.10576543>, <https://doi.org/10.5281/zenodo.10576543>, zenodo, 2025b.
- Bluteau, C., Stevens, C., Wain, D., and Mullarney, J.: NetCDF templates and code for creating and loading ATOMIX ADV benchmark datasets, <https://doi.org/10.5281/ZENODO.16798905>, 2025.
- 745 Bluteau, C. E., Jones, N. L., and Ivey, G. N.: Estimating turbulent kinetic energy dissipation using the inertial subrange method in environmental flows, *Limnol. and Oceanogr.: Methods*, 9, 302–321, <https://doi.org/10.4319/lom.2011.9.302>, 2011.
- Brock, F. V.: A Nonlinear Filter to Remove Impulse Noise from Meteorological Data, *Journal of Atmospheric and Oceanic Technology*, 3, 51 – 58, [https://doi.org/10.1175/1520-0426\(1986\)003<0051:ANFTRI>2.0.CO;2](https://doi.org/10.1175/1520-0426(1986)003<0051:ANFTRI>2.0.CO;2), 1986.
- Corrsin, S.: On local isotropy in turbulent shear flow, *NACA R & M*, 1958.
- 750 D'Asaro, E. A.: Turbulence in the upper-ocean mixed layer, *Annual review of marine science*, 6, 101–115, 2014.
- Davis, K. A. and Monismith, S. G.: The Modification of Bottom Boundary Layer Turbulence and Mixing by Internal Waves Shoaling on a Barrier Reef, *J. Phys. Oceanogr.*, 41, 2223–2241, <https://doi.org/10.1175/2011JPO4344.1>, 2011.
- Davison, A. C. and Hinkley, D. V.: *Bootstrap Methods and their Application*, Cambridge University Press, <https://doi.org/10.1017/cbo9780511802843>, 1997.
- 755 Fox-Kemper, B., Adcroft, A., Böning, C. W., Chassignet, E. P., Curchitser, E., Danabasoglu, G., Eden, C., England, M. H., Gerdes, R., Greatbatch, R. J., Griffies, S. M., Hallberg, R. W., Hanert, E., Heimbach, P., Hewitt, H. T., Hill, C. N., Komuro, Y., Legg, S., Le Sommer, J., Masina, S., Marsland, S. J., Penny, S. G., Qiao, F., Ringler, T. D., Treguier, A. M., Tsujino, H., Uotila, P., and Yeager, S. G.: Challenges and Prospects in Ocean Circulation Models, *Front. Mar. Sci.*, 6, 65, <https://doi.org/10.3389/fmars.2019.00065>, 2019.
- Gargett, A. E., Osborn, T. R., and Nasmyth, P. W.: Local isotropy and the decay of turbulence in a stratified fluid, *J. Fluid Mech.*, 144,
760 231–280, <https://doi.org/10.1017/S0022112084001592>, 1984.
- Goring, D. G. and Nikora, V. I.: Despiking acoustic Doppler velocimeter data, *J. Hydraul. Eng.*, 128, 117–126, [https://doi.org/10.1061/\(ASCE\)0733-9429\(2002\)128:1\(117\)](https://doi.org/10.1061/(ASCE)0733-9429(2002)128:1(117)), 2002.
- Gregg, M. C.: Uncertainties and limitations in measuring ϵ and χ_T , *J. Atmos. Oceanic Technol.*, 16, 1483–1490, [https://doi.org/10.1175/1520-0426\(1999\)016<1483:UALIMA>2.0.CO;2](https://doi.org/10.1175/1520-0426(1999)016<1483:UALIMA>2.0.CO;2), 1999.
- 765 Han, N., Fan, Z., and Fang, S.: Phase unwrapping methods for solving the ambiguity in current velocity estimation based on combined signal design, *Flow Measurement and Instrumentation*, 59, 126–134, <https://doi.org/https://doi.org/10.1016/j.flowmeasinst.2017.12.001>, <https://www.sciencedirect.com/science/article/pii/S0955598617302601>, 2018.
- Hay, A. E., McMillan, J. M., Cheel, R. A., and Schillinger, D.: Turbulence and drag in a high Reynolds number tidal passage targetted for in-stream tidal power, 2013 OCEANS - San Diego, pp. 1–10, <https://api.semanticscholar.org/CorpusID:39423238>, 2013.
- 770 Henchicks, P. J.: Comparison of turbulence measurements from a SonTek ADV and a Nobska MAVS, in: *MTS/IEEE Oceans 2001. An Ocean Odyssey. Conference Proceedings (IEEE Cat. No. 01CH37295)*, vol. 3, pp. 1860–1866, IEEE, 2001.

- Ivey, G. N., Bluteau, C. E., and Jones, N. L.: Quantifying Diapycnal Mixing in an Energetic Ocean, *J. Geophys. Res.*, 123, 346–357, <https://doi.org/10.1002/2017JC013242>, 2018.
- Kim, S.-C., Friedrichs, C. T., Maa, J. P.-Y., and Wright, L. D.: Estimating Bottom Stress in Tidal Boundary Layer from Acoustic Doppler
775 Velocimeter Data, *J. Hydraul. Eng.*, 126, 399–406, [https://doi.org/10.1061/\(ASCE\)0733-9429\(2000\)126:6\(399\)](https://doi.org/10.1061/(ASCE)0733-9429(2000)126:6(399)), 2000.
- Kundu, P. K.: Chapter 10 - Boundary Layers and Related Topics, in: *Fluid Mechanics*, edited by Kundu, P. K., pp. 299–348, Academic Press, San Diego, <https://doi.org/https://doi.org/10.1016/B978-0-12-428770-9.50016-1>, <https://www.sciencedirect.com/science/article/pii/B9780124287709500161>, 1990.
- Le Boyer, A., Couto, N., Alford, M. H., Drake, H. F., Bluteau, C. E., Hughes, K. G., Naveira Garabato, A. C., Moulin, A. J., Peacock, T.,
780 Fine, E. C., et al.: Turbulent diapycnal fluxes as a pilot Essential Ocean Variable, *Frontiers in Marine Science*, 10, Art–Nr, 2023.
- Lemmin, U., Lhermitte, R., Nikora, V. I., and Goring, D. G.: ADV measurements of turbulence: can we improve their interpretation?, *Journal of Hydraulic Engineering*, 125, 987–988, 1999.
- Lhermitte, R. and Serafin, R.: Pulse-to-Pulse Coherent Doppler Sonar Signal Processing Techniques, *Journal of Atmospheric and Oceanic Technology*, 1, 293 – 308, [https://doi.org/10.1175/1520-0426\(1984\)001<0293:PTPCDS>2.0.CO;2](https://doi.org/10.1175/1520-0426(1984)001<0293:PTPCDS>2.0.CO;2), 1984.
- 785 Li, R., Voulgaris, G., and Wang, Y. P.: Turbulence structure and burst events observed in a tidally induced bottom boundary layer, *Journal of Geophysical Research: Oceans*, 127, e2021JC018 036, 2022.
- Lohrmann, A. and Nylund, S.: Pure coherent Doppler systems - how far can we push it?, in: 2008 IEEE/OES 9th Working Conference on Current Measurement Technology, pp. 19–24, <https://doi.org/10.1109/CCM.2008.4480837>, 2008.
- Lueck, R., Fer, I., Bluteau, C., Dengler, M., Holtermann, P., Inoue, R., LeBoyer, A., Nicholson, S.-A., Schulz, K., and Stevens,
790 C.: Best practices recommendations for estimating dissipation rates from shear probes, *Frontiers in Marine Science*, 11, <https://doi.org/10.3389/fmars.2024.1334327>, 2024.
- Lumley, J. L.: Interpretation of Time Spectra Measured in High-Intensity Shear Flows, *Phys. Fluids*, 8, 1056–1062, <https://doi.org/10.1063/1.1761355>, 1965.
- Luznik, L., Gurka, R., Nimmo Smith, W. A. M., Zhu, W., Katz, J., and Osborn, T. R.: Distribution of Energy Spectra, Reynolds
795 Stresses, Turbulence Production, and Dissipation in a Tidally Driven Bottom Boundary Layer, *J. Phys. Oceanogr.*, 37, 1527–1550, <https://doi.org/10.1175/JPO3076.1>, 2007.
- Marusic, I., Monty, J. P., Hultmark, M., and Smits, A. J.: On the logarithmic region in wall turbulence, *J. Fluid Mech.*, 716, <https://doi.org/10.1017/jfm.2012.511>, 2013.
- McGinnis, D. F., Sommer, S., Lorke, A., Glud, R. N., and Linke, P.: Quantifying tidally driven benthic oxygen exchange across permeable
800 sediments: An aquatic eddy correlation study, *J. Geophys. Res.*, 119, 6918–6932, <https://doi.org/10.1002/2014JC010303>, 2014.
- Nortek: *The Comprehensive Manual for Velocimeters*, Nortek Manuals, 2018.
- Nuttall, A. and Carter, G.: A generalized framework for power spectral estimation, *IEEE Trans. Acoust., Speech, Signal Process.*, 28, 334–335, <https://doi.org/10.1109/tassp.1980.1163412>, 1980.
- Obukhov, A. M.: Turbulence in thermally inhomogeneous atmosphere, *Tr. Inst. Teoret. Geofiz. Akad. Nauk SSSR*, 1, 95–115, 1946.
- 805 Ozmidov, R. V.: Energy distribution between oceanic motions of different scales, *Izv. Atm. Ocean Phys.*, 1, 257–261, 1965.
- Pécseli, H. L. and Trulsen, J. K.: On the applicability of Taylor’s hypothesis, including small sampling velocities, *Journal of Fluid Mechanics*, 932, A22, 2022.
- Percival, D. B. and Walden, A. T.: *Combining Direct Spectral Estimators*, p. 351–444, Cambridge Series in Statistical and Probabilistic Mathematics, Cambridge University Press, 2020.

- 810 Pope, S. B.: *Turbulent flows*, Cambridge University Press, 1st edn., 2000.
- Ruddick, B., Anis, A., and Thompson, K.: Maximum likelihood spectral fitting: The Batchelor spectrum, *J. Atmos. Oceanic Technol.*, 17, 1541–1555, [https://doi.org/10.1175/1520-0426\(2000\)017<1541:MLSFTB>2.0.CO;2](https://doi.org/10.1175/1520-0426(2000)017<1541:MLSFTB>2.0.CO;2), 2000.
- Rusello, P. J.: *A Practical Primer for Pulse Coherent Instruments*, Nortek technical note no.: TN-027, NortekUSA, 2009.
- Rusello, P. J., Lohrmann, A., Siegel, E., and Maddux, T.: *Improvements in acoustic Doppler velocimetry*, 2006.
- 815 Saddoughi, S. G. and Veeravalli, S. V.: Local isotropy in turbulent boundary layers at high Reynolds number, *J. Fluid Mech.*, 268, 333–372, <https://doi.org/10.1017/S0022112094001370>, 1994.
- Shcherbina, A. Y., D’Asaro, E. A., and Nylund, S.: Observing Finescale Oceanic Velocity Structure with an Autonomous Nortek Acoustic Doppler Current Profiler, *Journal of Atmospheric and Oceanic Technology*, 35, 411–427, <https://doi.org/10.1175/jtech-d-17-0108.1>, 2018.
- Sreenivasan, K. R.: On the universality of the Kolmogorov constant, *Phys. Fluids*, 7, 2778–2784, <https://doi.org/10.1063/1.868656>, 1995.
- 820 Starckenburg, D., Metzger, S., Fochesatto, G. J., Alfieri, J. G., Gens, R., Prakash, A., and Cristóbal, J.: Assessment of Despiking Methods for Turbulence Data in Micrometeorology, *Journal of Atmospheric and Oceanic Technology*, 33, 2001 – 2013, <https://doi.org/10.1175/JTECH-D-15-0154.1>, https://journals.ametsoc.org/view/journals/atot/33/9/jtech-d-15-0154_1.xml, 2016.
- Stewart, R. and Grant, H.: Early measurements of turbulence in the ocean: Motives and techniques, *Journal of Atmospheric and Oceanic Technology*, 16, 1467–1473, 1999.
- 825 Tercan, A. E.: *Least Absolute Deviation*, pp. 1–3, Springer International Publishing, https://doi.org/10.1007/978-3-030-26050-7_176-1, https://doi.org/10.1007/978-3-030-26050-7_176-1, 2021.
- Trowbridge, J. and Elgar, S.: Turbulence Measurements in the Surf Zone, *J. Phys. Oceanogr.*, 31, 2403–2417, [https://doi.org/10.1175/1520-0485\(2001\)031<2403:TMITSZ>2.0.CO;2](https://doi.org/10.1175/1520-0485(2001)031<2403:TMITSZ>2.0.CO;2), 2001.
- Voulgaris, G. and Trowbridge, J. H.: Evaluation of the Acoustic Doppler Velocimeter (ADV) for Turbulence Measurements, *J. Atmos. Oceanic Technol.*, 15, 272–289, [https://doi.org/10.1175/1520-0426\(1998\)015<0272:EOTADV>2.0.CO;2](https://doi.org/10.1175/1520-0426(1998)015<0272:EOTADV>2.0.CO;2), 1998.
- 830 Wyngaard, J. C. and Clifford, S. F.: Taylor’s Hypothesis and High-Frequency Turbulence Spectra, *J. Atmospheric Sci.*, 34, 922–929, [https://doi.org/10.1175/1520-0469\(1977\)034<0922:thahts>2.0.co;2](https://doi.org/10.1175/1520-0469(1977)034<0922:thahts>2.0.co;2), 1977.
- Zheng, Z., Harcourt, R. R., and D’Asaro, E. A.: Evaluating Monin–Obukhov Scaling in the Unstable Oceanic Surface Layer, *J. Phys. Oceanogr.*, 51, 911–930, <https://doi.org/10.1175/jpo-d-20-0201.1>, 2021.
- 835 Zippel, S. F., Farrar, J. T., Zappa, C. J., Miller, U., Laurent, L. S., Ijichi, T., Weller, R. A., McRaven, L., Nylund, S., and Bel, D. L.: Moored Turbulence Measurements Using Pulse-Coherent Doppler Sonar, *Journal of Atmospheric and Oceanic Technology*, 38, 1621 – 1639, <https://doi.org/10.1175/JTECH-D-21-0005.1>, <https://journals.ametsoc.org/view/journals/atot/38/9/JTECH-D-21-0005.1.xml>, 2021a.
- Zippel, S. F., Farrar, J. T., Zappa, C. J., Miller, U., Laurent, L. S., Ijichi, T., Weller, R. A., McRaven, L., Nylund, S., and Le Bel, D.: Moored Turbulence Measurements using Pulse-Coherent Doppler Sonar, *Journal of Atmospheric and Oceanic Technology*, 38, 1640–1653, <https://doi.org/10.1175/jtech-d-21-0005.1>, 2021b.
- 840

Appendix A: NetCDF variable names

Table A1. Summary of Level 1 NetCDF data format. This level includes the full resolution raw timeseries velocities in physical units, quality-control flags, and ancillary data.

Short name Standard name	Dimensions	Comments
TIME time	TIME	units: Days since a specified reference, e.g., Days since 2005-01-01T00:00:00Z
N_VEL_COMPONENT unique_identifier_for_each_velocity_component	N_VEL_COMPONENT	Maximum of 3 for u,v, w (east, north, up) velocities
XYZ_VEL water_velocity_measured_in _instrument_coordinates or ENU_VEL water_velocity_measured_in _geographical_coordinates or BEAM_VEL water_velocity_measured_in _beam_coordinates	TIME, N_VEL_COMPONENT	units: m/s reference datum: instrument, geographical, or beam frame of reference for XYZ, ENU or BEAM. The same coordinate system should be used to provide the flags (e.g., XYZ_VEL_FLAGS) and optionally the unwrapped velocities (e.g., XYZ_VEL_UNWRAP_FLAGS)
XYZ_VEL_FLAGS water_velocity_measured_in _instrument_coordinates_status_flags	TIME, N_VEL_COMPONENT	CF-compliant 8-bit (0-255) boolean flag that designates why a velocity sample was discarded.
HEIGHT or DEPTH	TIME	units: meters
Optional or sensor-dependent		
BURST_NUMBER unique_identifier_for_each_burst	TIME	Integers of 1, 2, etc, to designate which burst the velocities are associated with. For continuous sampling, this can be omitted or have all samples associated with burst 1.
HEADING platform_yaw_angle	TIME	units: degrees positive: clockwise reference datum: true North
PITCH platform_pitch_angle	TIME	units: degrees positive: counterclockwise reference datum: around the instrument y-axis
ROLL platform_roll_angle	TIME	units: degrees positive: counterclockwise reference datum: around the instrument x-axis
ABSIC backscatter_intensity	TIME, N_VEL_COMPONENT	units: counts
CORRN noise_correlation_percent	TIME, N_VEL_COMPONENT	units: %
SNR signal_noise_ratio	TIME, N_VEL_COMPONENT	units: db
XYZ_VEL_UNWRAP water_velocity_measured_in_ instrument_coordinates_unwrapped	TIME, N_VEL_COMPONENT	units: $m s^{-1}$ These velocities needed to be unwrapped owing to choosing an ambiguity velocity too small compared to measured velocities.

Table A2. Summary of Level 2 NetCDF data format. This level includes quality-controlled and segmented timeseries.

Short name Standard name	Dimensions	Comments
TIME time	TIME	units: Days since a specified reference, e.g., Days since 2005-01-01T00:00:00Z
UVW_VEL water_velocity_in_the_analysis_frame_of_reference	TIME, N_VEL_COMPONENT, N_SAMPLE	units: m/s reference datum: analysis frame of reference Velocities from level 1 stored on a per-segment, i.e., duration τ_e basis. These may be rotated from the original measurement frame stored in level 1.
PERGD percentage_of_samples_good	TIME	units: % Percentage of samples in each segment that passed all quality-control metrics.
TIME_BNDS time_interval_bounds	TIME, N_BNDS	units: same as TIME Provides the beginning and end of each interval specified by the variable TIME
TAYL ratio_of_rms_of_turbulent_velocity_with_mean_water_speed	TIME	Left hand side of Equation 22
ROT_AXIS axis_of_rotation_from_east_to_x	TIME, N_VEL_COMPONENT	units: degree reference datum: east positive: counterclockwise Axis in the geographical coordinate system to rotate velocities into the analysis frame of reference.
ROT_ANGLE angle_of_rotation_from_east_to_x	TIME	units: degree reference datum: east positive: counterclockwise Angle for rotating the velocities from geographical coordinates into the analysis frame of reference
BURST_NUMBER unique_identifier_for_each_burst	TIME	Integers of 1, 2, etc, to designate which burst the velocities are associated with. For continuous sampling, this can be omitted or have all samples associated with burst 1
N_SAMPLE unique_identifier_for_each_sample_within_the_segment	N_SAMPLE	Value from 1 to $f_s \tau_e$ to designate the velocity sample in each segment, and thus the largest value is based on sampling frequency f_s and segment duration τ_e
N_BNDS unique_identifier_for_defining_low_high_bounds	1,2	1 represents the lower bound and 2 the upper bound
N_VEL_COMPONENT unique_identifier_for_each_velocity_component	N_VEL_COMPONENT	Same as level 1

Table A3. Summary of Level 3 NetCDF data format. This level includes the spectral observations.

Short name Standard name	Dimensions	Comments
TIME	TIME	Same as level 2
TIME_BNDS	TIME, N_BNDS	Same as level 2
UVW_VEL_SPEC power_spectrum_density_of_velocity_in_the_analysis_ frame_of_reference	FREQ, N_VEL_COMPONENT, TIME	units: $(\text{m s}^{-1})^2/\text{Hz}$ reference datum: analysis frame of reference Summing these spectra across all frequencies should equal to the signal's variance estimated in the time-domain.
FREQ frequency	FREQ	units: Hz
PSPD_REL platform_speed_wrt_sea_water	TIME	units: m s^{-1} Mean speed past the sensor \bar{U} used to convert from frequency (time) to wavenumber (space).
DOF degrees_of_freedom_of_spectrum	1	See Equation 11 since it depends on how the spectra was computed.
SPEC_NOISE_UVW power_spectrum_density_white_noise_of_velocity_in_the_ analysis_frame_of_reference	TIME, N_VEL_COMPONENT	units: $(\text{m s}^{-1})^2/\text{Hz}$ Typically determined from the high-frequency (noise-dominated) part of the spectrum i.e., noise floor (§4.4.3).
KVISC kinematic_viscosity_of_water	1 or TIME	units: $\text{m}^2 \text{s}^{-1}$
BURST_NUMBER unique_identifier_for_each_burst	TIME	Same as level 2
N_VEL_COMPONENT unique_identifier_for_each_velocity_component	N_VEL_COMPONENT	Same as level 1
N_BNDS unique_identifier_for_defining_low_high_bounds	1,2	Same as level 2

Table A4. Summary of Level 4 NetCDF data format. This level includes timeseries of the $\hat{\epsilon}$ dissipation estimates. The parameters necessary for re-flagging $\hat{\epsilon}$ estimates are shown separately in Table A5.

Short name Standard name	Dimensions	Comments
EPSI specific_turbulent_kinetic_energy_dissipation_in_water	TIME, N_VEL_COMPONENT	units: W kg^{-1} $\hat{\epsilon}$ estimated from each of the individual velocity component.
EPSI_FLAGS specific_turbulent_kinetic_energy_dissipation_in_water status_flag	TIME, N_VEL_COMPONENT	units: W kg^{-1} See Table 3. CF-compliant 8-bit (0-255) boolean flag that designates why an $\hat{\epsilon}$ estimate was flagged as being of poor quality.
EPSI_CI specific_turbulent_kinetic_energy_dissipation_in_water confidence_interval	TIME, N_VEL_COMPONENT	units: W kg^{-1} 95% confidence interval from bootstrapping residuals
EPSI_FINAL specific_turbulent_kinetic_energy_dissipation_in_water_final	TIME	units: W kg^{-1} comment: Specifies which velocity component was retained as the final $\hat{\epsilon}$ estimates that would be provided in a scientific publication.
EPSI_FINAL_CI specific_turbulent_kinetic_energy_dissipation_in_water final_confidence_interval	TIME	units: W kg^{-1} 95% confidence interval of the final $\hat{\epsilon}$ from bootstrapping residuals.
TIME	TIME	Same as level 2
TIME_BNDS	TIME, N_BNDS	Same as level 2
PSPD_REL	TIME	Same as level 3
K_BNDS fitted_wavenumber_bounds_of_spectra	TIME, N_VEL_COMPONENT, N_BNDS	units: $(\text{m s}^{-1})^2$ per cpm Provides the first and last wavenumber bound fitted to estimate $\hat{\epsilon}$
BURST_NUMBER	TIME	Same as level 2
N_VEL_COMPONENT	N_VEL_COMPONENT	Same as level 1
N_BNDS	1,2	Same as level 2

Table A5. Additional parameters stored at Level 4 NetCDF for re-flagging $\hat{\epsilon}$ estimates.

Short name Standard name	Dimensions	Comments
PERGD	TIME	Same as level 2
TAYL	TIME	Same as level 2
MIN_EPSI_NOISE minimum_specific_turbulent_kinetic_energy_dissipation in_water_resolvable	TIME, N_VEL_COMPONENT	units: W kg^{-1} Calculates ϵ_m using Equation 18 with the highest fitted wavenumber k .
L turbulent_length_scale	1 or TIME	units: m comment: Should specify the definition used for estimating the largest turbulent overturn, which could be L_O , L_S , or $L_z = \kappa z$ (Equation 5, 6, 7).
KVISC	1 or TIME	Same as level 3
SPEC_SLOPE estimated_spectral_slope_of_fitted_wavenumbers _in_logspace	TIME, N_VEL_COMPONENT	β_1 in $\hat{\Psi} \sim k^{\beta_1}$ (Equation 2)
DECADE	1	The fitted wavenumber range δ given by Equation 12 and needed for calculating the acceptable $\hat{\beta}_1$ range in Equation 24
N_FITTED number_of_fitted_samples	TIME, N_VEL_COMPONENT	N_s in Equation 24
DOF	1	Same as level 3. Required for calculating the acceptable slope $\hat{\beta}_1$ range in Equation 24
DIR_CSPD direction_of_water_speed	TIME	units: degree reference datum: x-axis positive: counterclockwise Useful for flow interference.