

# Synthesis of ARM User Facility Surface **Precipitation**—Rainfall Datasets to Construct a Best Estimate Value Added Product (PrecipBE)

5 Israel Silber<sup>1</sup>, Jennifer M. Comstock<sup>2</sup>, Adam K. Theisen<sup>3</sup>, Michael R. Kieburtz<sup>2</sup>, Zeen Zhu<sup>4</sup>, Jenni Kyrouac<sup>3</sup>

<sup>1</sup> Atmospheric, Climate, and Earth Sciences Division, Pacific Northwest National Laboratory, Richland, WA, 99352, USA

<sup>2</sup> Advanced Computing, Mathematics, and Data Division, Pacific Northwest National Laboratory, Richland, WA, 99352, USA

<sup>3</sup> Environmental Science Division, Argonne National Laboratory, Lemont, IL 60439, USA

<sup>4</sup> Environmental Science and Technologies Department, Brookhaven National Laboratory, Upton, NY 11973, USA

10 *Correspondence to:* Israel Silber (israel.silber@pnnl.gov)

**Abstract.** Surface precipitation measurements are essential for Earth system model (ESM) evaluation and understanding cloud processes. An ever-growing need for robust, temporally evolving, and easy-to-use statistical datasets provides motivation for a baseline ground-based precipitation properties data product. The U.S. Department of Energy Atmospheric Radiation Measurement (ARM) user facility operates an extensive suite of precipitation instruments with various sensitivities and 15 operating mechanisms, which render the decision of which instrument to use based on one or more fixed thresholds challenging and prone to errors and bias. Using a long-term instrument inter-comparison from a unique per-precipitation event perspective, rather than instantaneous sample comparison, we demonstrate that ARM **rainfall-measuring precipitation** instruments are generally consistent with each other at the statistical level. Inter-instrument deviations at the single event level can be large, especially at specific **precipitation rainfall** event properties such as maximum precipitation rates. A machine-learning (ML) 20 analysis **using a random forest regressor** indicates that in some cases, **(e.g., certain depending on instrument, s or local site climatology, and/or specific deployment configurations)**, **certain** atmospheric state variables influence the measured quantities **in an unpredictable manner and therefore the observed deviations between instruments**. **Thus, a-priori weighing of different instruments does not necessarily lead to more accurate and less biased synthesis of instrument data.** These results motivate the design of the ARM precipitation best-estimate (PrecipBE) value-added product, which incorporates all valid precipitation data 25 while considering data quality and other instrument limitations.

PrecipBE consists of time series and tabular statistics datasets in an easy-to-use and insightful per-precipitation event format. It provides a large set of precipitation event properties supplemented with ancillary data from various ARM datasets that correspond to the detected precipitation events. We describe the PrecipBE algorithm and demonstrate its use via the examination of a single-day output as well as a long-term trend analysis of precipitation events at the ARM Southern Great 30 Plains (SGP) site, covering more than 30 years of data. The trend analysis tentatively suggests a long-term tendency for mainly shorter and less intense precipitation events at the SGP site, but a long-term increase in annual rainfall by more than 36 mm (5%) per decade. This rainfall trend is catalyzed primarily by more extreme event properties of relatively rare, intense precipitation events, with event total and 1-minute maximum precipitation rate at a 1-year timeframe increasing up to 5 mm

and 9 mm/hr (several percent) per decade, respectively. While the currently available PrecipBE datasets (at 35 <https://adc.arm.gov/discovery/>) cover rainfall from multiple ARM deployments up until to March 2025, PrecipBE is planned to be expanded to include solid-phase precipitation and will soon become an operational product with a several-day lag from real-time, and we invite the ARM user community to leverage this new product and welcome user feedback to further enhance the dataset. it further.

## 1 Introduction

40 Surface precipitation measurements serve as a crucial benchmark in Earth system model (ESM) evaluation (e.g., Emmenegger et al., 2022; Mikkelsen et al., 2024; Zhang et al., 2017) and aerosol-cloud interactions (ACI) studies (e.g., Christensen et al., 2024; Martin et al., 2017), among other process understanding efforts. Detailed case studies using surface precipitation data often require temporally evolving precipitation rate and accumulation data to account for the dynamic nature and short time scales of cloud evolution relative to the typically slower-evolving atmospheric state (e.g., Bretherton et al., 2010). These time  
45 series data serve as target quantities (benchmarks) for model simulations or analytical models. Certain precipitation-characterizing disdrometers, such as laser and video disdrometers, provide additional observational constraints on the precipitation properties, such as hydrometeor particle size distributions (PSDs). ESM evaluation studies, on the other hand, often rely on bulk statistics or data subsets and, therefore, utilize isolated precipitation event statistics after conditioning on quantities such as surface temperature, for example.

50 The U.S. Department of Energy Atmospheric Radiation Measurement (ARM) user facility (Mather, 2024; Mather et al., 2016) operates multiple types of precipitation-measuring instruments, including impact (Bartholomew, 2016a), video (Bartholomew, 2020b), and laser disdrometers (Bartholomew, 2020a), as well as tipping and weighing bucket rain gauges (Bartholomew, 2019; Kyrouac and Tuftedal, 2024). Each instrument tends to have higher sensitivity and/or better accuracy at certain precipitation conditions (e.g., Ciach, 2003; Fehlmann et al., 2020; Ro et al., 2024; Wang et al., 2021). For example, the Pluvio2  
55 weighing bucket operated by ARM tends to be robust at high precipitation-rainfall rates (Ro et al., 2024; Saha et al., 2021). The OTT Parsivel2 (LDIS; Bartholomew, 2020a), distributed in many ARM sites, is generally considered robust, but has been shown to suffer from biases at a specific drop size range (e.g., Raupach and Berne, 2015) and to underestimate the vertical velocity of drops larger than 1 mm, which translates to precipitation rate underestimation (Tokay et al., 2014). Similarly, the two-dimensional video disdrometer (VDIS; Bartholomew, 2020b) is often treated as a reference precipitation instrument,  
60 specifically when the drop PSDs are of interest (e.g., Tokay et al., 2020). However, this instrument is more likely to underestimate precipitation-rainfall amounts in cases with drops smaller than roughly 0.3 mm (corresponding to its first size bin) or when large drops ( $> \sim 2.4$  mm; often commensurate with heavy precipitation) are observed, due to terminal velocity underestimation (e.g., Tokay et al., 2013).

The availability of independent studies evaluating the performance of precipitation instruments under strict laboratory  
65 conditions (e.g., Colli et al., 2013; Lanza et al., 2010; Lanza and Vuerich, 2009; Saha et al., 2021) is still scarce. Moreover, comprehensive analyses of precipitation errors as a function of various background conditions (high wind, etc.) and deployment configurations (e.g., Montero-Martínez et al., 2016; Montero-Martínez and García-García, 2016; Wang et al., 2021), let alone snowy conditions (e.g., Battaglia et al., 2010; Milewska et al., 2019; Yuter et al., 2006), is still limited and requires additional research. In the interim, however, determining the “*true*” precipitation properties or weighting different  
70 ARM instrument samples based on the current literature is prone to unpredictable errors and biases. Therefore, as comprehensively discussed below, straightforward statistics combining data from measurements collected (per deployment)

would ostensibly provide the best estimates of precipitation event properties (onset and ending, accumulation, precipitation rates, etc.).

75 Here, we first present a long-term multi-instrument inter-comparison of precipitation rainfall event data collected at the ARM Southern Great Plains (SGP; Sisterson et al., 2016) observatory (Section 2). Supported by the application of a machine learning (ML) algorithm (a random forest regressor), this analysis underscores the challenge in such cases of multi-instrument data without a clear and consistent “*true*” benchmark. The results from this comparison serve as a strong motivation for a best-estimate data product implementing straightforward statistics. These comparison results are also used to guide the design of the ARM precipitation best-estimate (PrecipBE) value-added product (VAP), the processing algorithm of which is elaborated 80 on in Section 3. Section 4 describes PrecipBE’s data structure, and Section 5 presents a brief trend analysis using more than 30 years of ARM precipitation data from the ARM SGP site, available on the ARM Data Discovery (<https://adc.arm.gov/discovery/>). Conclusions and a short outlook are given in Section 65.

## 2 Instrument Inter-Comparison as Motivation for a Best-Estimate Data Product

### 2.1 Data Processing

85 Which precipitation instrument has the most reliable precipitation readings and should be used by default in given conditions? An answer to this question is not trivial. First, precipitation instruments have different sensitivities, which are influenced by ambient conditions and are often impacted by the same variables they aim to measure, namely, precipitation amount, rate, or particle properties, as noted above. In addition, those instruments have minimum quantization sizes, which could result in inconsistencies concerning precipitation event onset and ending times, leading to differences in event totals. As such, data 90 mining efforts aimed at determining those instrument strengths and weaknesses require a baseline definition of precipitation events instead of typical instantaneous sample comparisons. In this section, we perform an inter-comparison on a per-event basis by examining inter-instrument differences in precipitation rainfall event properties.

The analysis focuses on precipitation rainfall data collected at the ARM SGP site’s co-located central (C1) and extended facility 13 (E13) over a 14-year period, from January 10, 2011, to January 10, 2025. A list of the instruments and data products 95 analyzed is provided in Table 1. (Refer to <https://armgov.svcs.arm.gov/capabilities/observatories/sgp> for site information and central facility layout.) For a given instrument, we define a precipitation rainfall event as a set of positive-accumulated precipitation samples (at temperatures greater than 3 °C) with gaps between neighboring precipitation readings (samples) shorter than 30 min. (larger gaps in event definition such as 60 min were tested and exhibited minor changes; not shown). Instrument events continuing to the next day are concatenated as long as they follow the same 30-min maximum gap logic. If 100 the total accumulation in a given instrument event is smaller than 0.1 mm, it is omitted from this analysis. Instrument events that failed quality control (QC) checks (for calibration issues, bad samples, etc.) in some or all event samples are also omitted from this analysis. Finally, a given event is also omitted if it indicates highly unlikely statistics; specifically, event total > 300 mm, event period > 5 days, mean precipitation rate > 120 mm/hr, and/or 1-min average maximum precipitation rate > 300

mm/hr. Some of these thresholds have been met and confirmed in recorded history (e.g., Koralegedara et al., 2019; Lagouvardos et al., 2013), but to our knowledge, have not previously occurred during ARM deployments. However, these thresholds are rarely exceeded in instrument samples, for various reasons, and account for up to a few percent ( $< 2.5\%$ ) of precipitation events detected using all ARM SGP instruments (counting from 2011), except for the optical rain gauge (ORG; Bartholomew, 2016b), with nearly 9% of detected events having one or more variables exceeding these thresholds. We note that ARM is in the process of retiring the ORG, which will not serve as a data source going forward.

110

~~datasets of the PWD (Kyrouac et al., 2021), AOSMET (Kyrouac and Tuftedal, 2010), DISDROMETER (Wang, 2006), VDISQUANTS (Hardin et al., 2021), LDQUANTS (Hardin et al., 2019), TBRG (Kyrouac et al., 2006, 2021), RAINWB (Shi et al., 2010), and ORG (Kyrouac et al., 2021) from the ARM SGP site are available on the ARM Data Discovery (<https://ade.arm.gov/discovery/>; last access: 10 March 2025)~~

115

**Table 1: Precipitation instruments and data products included in the analysis presented in Section 2 and incorporated in the PrecipBE value-added product. The effective quantization increments refer to the reported precipitation variable's increments converted to mm/min.**

Abbreviated name	Description	<u>Temporal resolution and effective quantization increments</u>	Reference
PWD <sup>1,2</sup>	Vaisala RAINCAP acoustic sensor as part of the Present Weather Detector, a component of the surface meteorological system (MET) at the main observatory	<u>1 min</u> <u>0.01 mm/min</u>	(Kyrouac et al., 2021; Kyrouac and Tuftedal, 2024)
AOSMET <sup>1,2</sup>	Vaisala RAINCAP acoustic sensor as part of the meteorological station associated with the Aerosol Observing System (~10-meters above ground)	<u>1 sec</u> <u>0.00016 mm/min</u>	(Kyrouac, 2019a; Kyrouac and Tuftedal, 2010)
DISDROMETER <sup>1,2,3</sup>	Joss-Waldvogel impact disdrometer	<u>1 min</u> <u>0.00001 mm/min</u>	(Bartholomew, 2016a; Wang, 2006)
VDISQUANTS <sup>1,2</sup>	Joanneum Research two-dimensional video disdrometer quantities value-added product	<u>1 min</u> <u>0.00006 mm/min</u>	(Bartholomew, 2020b; Hardin et al., 2020, 2021)
LDQUANTS <sup>1,2</sup>	OTT Parsivel2 laser disdrometer quantities value-added product	<u>1 min</u> <u>0.00006 mm/min</u>	(Bartholomew, 2020a; Hardin et al., 2020, 2021)

WBPLUVIO2 <sup>1,2</sup>	OTT Pluvio2 weighing bucket rain gauge	<u>1 min</u> <u>0.01 mm/min</u>	(Bartholomew, 2019; Zhu et al., 2016)
TBRG <sup>1,2</sup>	Novalynx Tipping bucket rain gauge; commonly part of the MET system	<u>1 min</u> <u>0.256 mm/min</u>	(Kyrouac et al., 2021; Kyrouac and Tuftedal, 2024)
METWXT, PRECIPMET, MARINEMET, and ABMMET <sup>2</sup>	Vaisala RAINCAP acoustic sensor as part of the Vaisala WXT520 or WXT530 meteorological instrument systems installed at various ARM and ARM-related facilities	<u>1 sec</u> <u>0.00016 mm/min</u>	(Holdridge and Kyrouac, 2012; Howie et al., 2016; Kyrouac, 2019b; Kyrouac et al., 2017; Kyrouac and Shi, 2018; Reynolds et al., 2017)
PWS <sup>2,4</sup>	Vaisala FD12P Present Weather Sensor meteorological system	<u>1 min; 0.00016 mm/min</u>	(Kyrouac and Tuftedal, 2001; Ritsche, 2008)
RAINWB <sup>1,4</sup>	Belfort weighing bucket rain gauge	<u>5 min; 0.001 mm/min</u>	(Bartholomew, 2016c; Shi et al., 2010)
ORG <sup>1,4</sup>	Optical Scientific, inc optical rain gauge; commonly part of the MET system	<u>1 min; 0.00015 mm/min</u>	(Bartholomew, 2016b; Kyrouac et al., 2021)

<sup>1</sup>Included in the analysis presented in Section 2.

<sup>2</sup>Incorporated in PrecipBE (where available)

120 <sup>3</sup>ARM changed the DISDROMETER code name to IDIS starting 2025-04-08, outside the date span examined in this study

<sup>4</sup>Retired instrument

To streamline the interpretation of analysis results, we select a “reference” instrument to examine deviations of events from one instrument to another. Thus, we inter-compare pairs of instruments, with one of them being the “reference” instrument.

125 This “reference” instrument is not a “*true*” benchmark, as in the case of the World Meteorological Organisation (WMO) rainfall intensity intercomparison, for example (Lanza et al., 2010; Lanza and Vuerich, 2009; Vuerich et al., 2009), during which only maximum precipitation rates per event were evaluated against a reference set of carefully calibrated rain gauges, and its Here, however, the related biases of the “reference” instrument can still be characterized. For example, in cases where most or all other precipitation instruments show a consistent deviation from the reference, we can tentatively conclude that the

130 observed bias originates in the reference instrument.


Ideally, the best reference instrument would be the tipping bucket rain gauge (TBRG) (TBRG; see Kyrouac and Tuftedal, 2024), because it was the first deployed precipitation instrument at the ARM SGP site (since 1993), and is still operational, covering the whole operation period of all other precipitation instruments. However, the TBRG has a very coarse precipitation amount least count (minimum detection of 0.254 mm; 0.1 inch; cf. Table 1), rendering its sensitivity and general accuracy (in weak events) inadequate for serving as a reference instrument (as demonstrated below), especially compared to other

instruments such as disdrometers. Therefore, we chose to use the Present Weather Detector (PWD), which is integrated in the ARM Surface Meteorological System (MET; Kyrouac and Tuftedal, 2024), as the reference instrument. The PWD has a very long record at the ARM SGP site, starting on January 10, 2011, enabling inter-comparison with a wide range of instruments.

140 One of the main challenges in a per precipitation-event multi-instrument inter-comparison is associating individual instrument precipitation events with the reference instrument event, primarily due to the different onset and event duration times. This could explain why, to our knowledge, event characterization is typically limited to the synthesis of only two instruments (i.e., instrument pairs), a specific case that is more straightforward to resolve (e.g., Keefer et al., 2008), or operating on fixed-duration windows such as defining an event as a day with recorded precipitation above a certain set of thresholds as in the case of the WMO intercomparison (which in practice, also used the “instrument pairs” approach). This challenge is exemplified in

145 the simplified diagram shown in Figure 1. In this case, three precipitation events are identified in the PWD data (reference instrument). One or more events detected with other instrument data can be aggregated and become associated with a given reference instrument event (as a single event). For example, events 1 and 2 detected using the LDIS are associated with the PWD’s event number 1, while events 3, 4, and 5 detected using the TBRG data are associated with the PWD’s event number 2. However, to prevent event conflicts in the inter-comparison, multiple reference instrument events cannot be associated with

150 a single event detected using a different instrument. In such cases, the instrument events are omitted from the inter-comparison. For example, event 1 detected using the VDIS or the LDIS event 4. In the latter case, we have interlacing conditions, resulting in the exclusion of LDIS event 3 as well since including it would likely result in a negative bias when comparing it to the PWD’s event number 2.

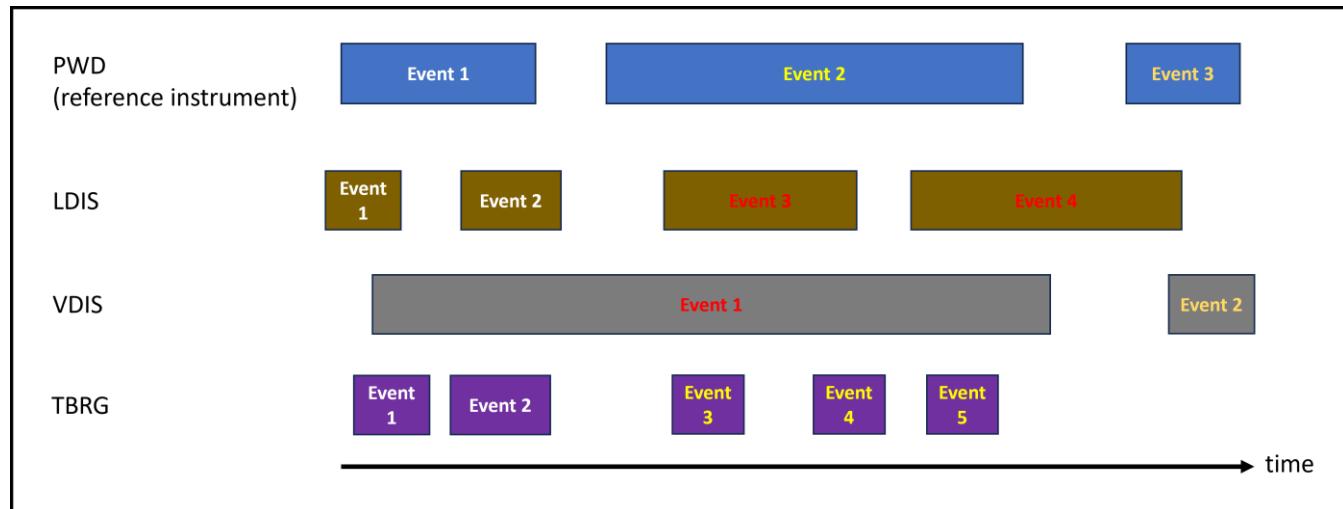


155 **Figure 1: Simplified diagram exemplifying the challenge of associating precipitation events detected using different instruments when a reference instrument is used. Here, the present weather detector (PWD) serves as the reference instrument, and its events are designated using different font colors. Precipitation events detected using the laser disdrometer (LDIS), the video disdrometer (VDIS), or the tipping bucket rain gauge (TBRG) become associated with PWD events only if they are not conflicting with it (event font colors match the associated PWD events). Conflicting events are designated using the red font color.**

This event association and aggregation exercise results in the removal of some instrument pair events. Removal percentages range from 0.7% of TBRG events to 53% of the PWD event pairs with the Belfort weighing bucket rain gauge (RAINWB)(RAINWB; Bartholomew, 2016e). Smaller conflicting percentages, such as in the case of the TBRG or the Pluvio2 weighing bucket (WBPLUVIO2)(WBPLUVIO2; Bartholomew, 2019) with 4.5% of events being conflicted with the reference instrument, are often the result of the compared instrument tending to record shorter events than the reference (see the TBRG versus PWD example in Figure 1). Larger conflicting percentages, such as in the case of the RAINWB or the Joss-Waldvogel impact disdrometer (DISDROMETER)(DISDROMETER; Bartholomew, 2016a) data, with 47%, often occur when the compared instrument tends to longer events than the reference instrument (see the VDIS events versus PWD example in Figure 1). We note that the filtering of QC-flagged or anomalous reading events prior to the aggregation exercise had minor influence on analysis results (not shown), but it could theoretically be more impactful in other cases.

## 2.2 Inter-Comparison Results


Figure 2 shows probability density functions (PDFs) of precipitation (rainfall) event total amount based on the PWD (panel a) and event total deviations of different ARM instruments from the reference (i.e., the PWD; panels b-i). The distribution of event total amounts is strongly skewed (Figure 2a) with a PWD-estimated average of 5.3 mm, within the third distribution tercile. The three terciles are mapped to As suggested by the shape of the deviation PDFs in panels b-i, and indicate that the smallest deviations tend to be associated with the first tercile, whereas the largest deviations between instruments and the reference occur in top-tercile events, with deviations consistently being smaller than their associated terciles' right edge. Combined with the shape of the PDFs, it is suggested that, the vast majority of ARM precipitation instruments tend to be consistent with each other, with mean deviations ( $\mu$ ) smaller than 3 mm in magnitude and variability (represented here by the standard deviation;  $\sigma$ ) being smaller than 10 mm. The PWD appears to be consistent to the greatest extent with the TBRG and the WBPLUVIO2 (means of 0.5 mm or less;  $\sigma$  on the order of 5 mm; in Figure 2ab and Figure 2hi, respectively). Some instruments and data products tend to record larger event totals relative to the PWD (e.g., LDQUANTS in Figure 2ef, AOSMET in Figure 2fg) whereas others exhibit a tendency for smaller totals (e.g., VDISQUANTS in Figure 2ed, DISDROMETER in Figure 2gh). These patterns are robust with the same qualitative results and minor quantitative variations if only events with totals greater than 1 mm are analyzed, for example, and deviations appear directly susceptible only to the magnitude of the evaluated variable (i.e., event total) in the reference instrument, as indicated by the mapped terciles (and examined via linear regression; not shown). While the RAINWB is statistically consistent on average with the PWD (Figure 2de), its variability is somewhat greater than the other instruments. However, it is the ORG's deviations that stand out with a much larger variability (~152 mm) and an average overestimation by more than 45 mm (Figure 2bc) (see also Kyrouac and Tuftedal, 2024). This overestimation becomes stark when conditioning on event totals greater than 1 mm with an average deviation from the reference of +836 mm.

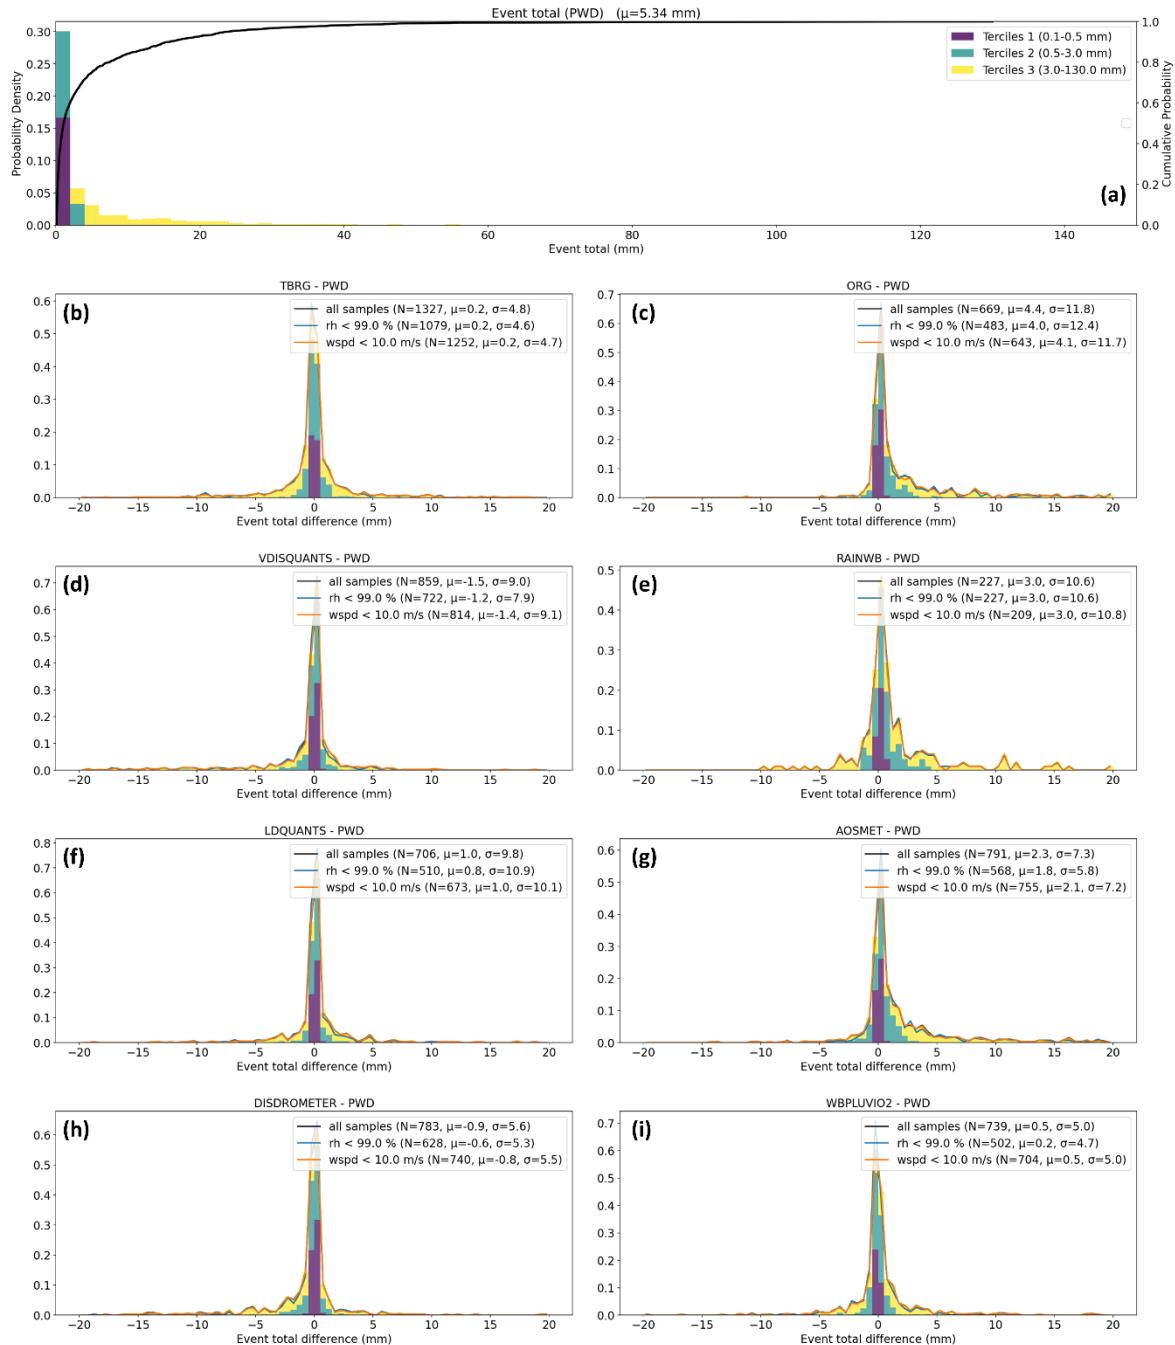

195 **Figure 2: (a) Probability density functions (PDFs) of ARM SGP instrument precipitation (rainfall) event total amount based on the PWD (bin width of 1.0 mm) and (b-i) PDFs of instrument deviations from the PWD, serving as the reference instrument (bin size of 0.5 mm). The purple, green, and yellow colored bars denote the three terciles of the PWD data (see legend in panel a), which are mapped to the histograms in panels b-i. The blue histogram is calculated using all precipitation event samples, while the and orange and green curves designate histograms calculated while conditioning on event-mean relative humidity (omitting likely foggy conditions) and wind speed (omitting strong winds), respectively, both of which are derived from MET**

200 observations. In each panel, see the legends for the total number of event samples ( $N$ ), mean deviation ( $\mu$ ), and standard deviation ( $\sigma$ ). Legend quantity units are mm, x-axis and legend quantity units are mm.


The differences between instrument precipitation event measurements are relatively more variable when examining event periods (Figure 3). Similar to the event total, event periods are positively skewed (Figure 3a), averaging at 105 min, just above the second tercile. The ORG measurements suggest precipitation events that are even more strongly positively skewed than the PWD and, with durations longer by more than 450 min, on average, with a and considerable relative inconsistency variability (deviation  $\sigma$  exceeding 1340 min; (Figure 3cb)). (Note that some of the positive PDF skewness is influenced by the aggregation and filtering methodology discussed above). The DISDROMETER shows a stronger greater tendency, with precipitation events being lasting 12045 min longer on average, and a trend toward extreme values in cases within the third tercile (yellow-shaded areas in Figure 3he), whereas, the RAINWB exhibits an even more substantial positive bias, exceeding 67 hours (Figure 3ed). These long-event tendencies reflect the challenge in aggregating precipitation events, which resulted in the exclusion of a large subset of samples taken by those instruments from this analysis. In fact, the RAINWB event period bias and errors are so large, to an extent that is highly challenging to reconcile in an integrated dataset without introducing significant biases. In this regard, the PWD role as a reference instrument can be justified in the current analysis by the instrument's precipitation measurement properties being "somewhere in the middle" across the ARM precipitation instrument suite. The PWD's event period statistics and general instrument behavior is in good agreement with the VDISQUANTS and LDQUANTS VAPs (Figure 3de and Figure 3fe, respectively), with average deviations of up to several a few minutes, as well as with the AOSMET with average deviations of 124 min (Figure 3gf). The TBRG (Figure 3ba) and WBPLUVIO2 (Figure 3ih) display negatively skewed deviation distributions relative to the reference instrument, with mirror-like patterns compared to the ORG and DISDROMETER, with some TBRG events lasting a few minutes, all the while the corresponding PWD events exceeding 1 hour (see the second tercile's edge in Figure 3b).

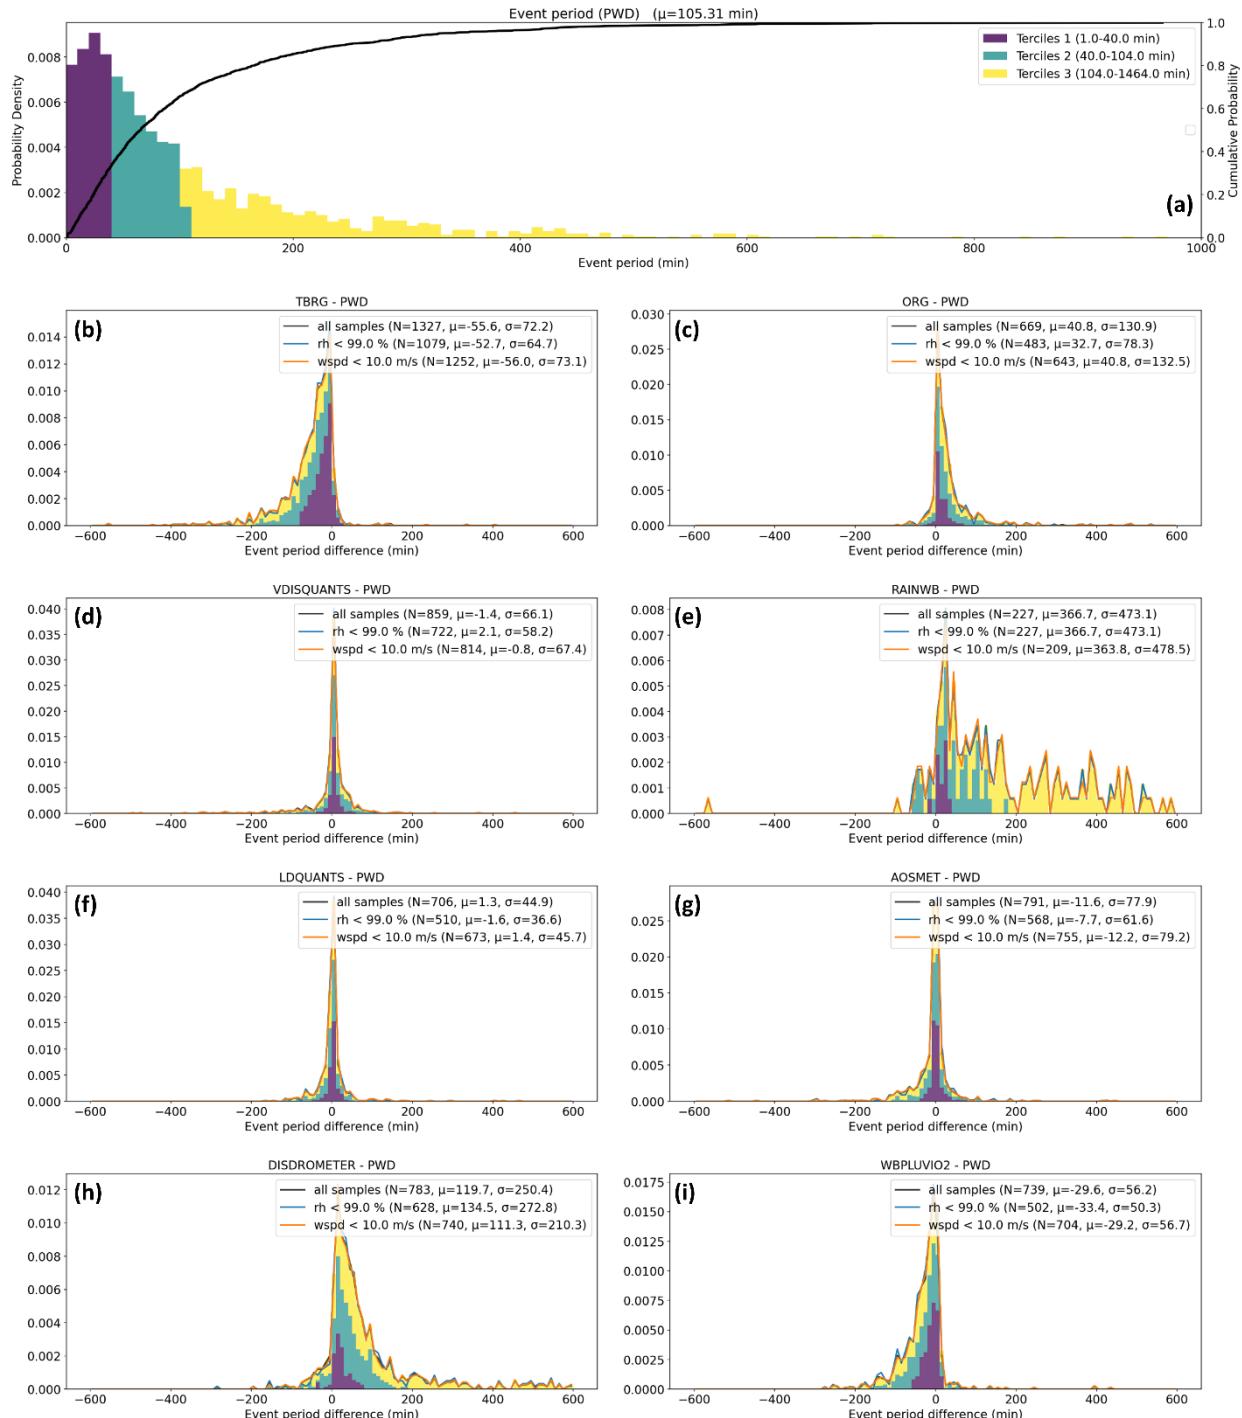

**Figure 3: As in Figure 2, but for the event period (bin widthsize of 10 min; **x-axis and legend** quantities are given in units of min).**

225 The event 1-min-average maximum and event-mean precipitation rate comparisons (Figure 4 and Figure 5, respectively) suggest that most instruments are generally consistent with each other at the bulk level, especially in the case of mean rates, with the VIDSQUANTS (Figure 5e), LDQUANTS (Figure 5e), WBPLUVIO2 (Figure 5h), and AOSMET (Figure 5f) all instruments except for the TBRG -having average differences from the reference smaller than 2±4 mm/h (0.4 mm/h or less in the case of the VDISQUANTS and LDQUANTS; Figure 5d and Figure 5f, respectively).- All instruments except for the  
230 TBRG and ORG also exhibit standard deviations of 4 mm/h or less.  
We do not see any indications for a significant negative bias of the event maximum precipitation rate by the PWD or a positive bias by the LDQUANTS product (Parsivel2), as suggested by the WMO intercomparison (cf. Lanza et al., 2010). Single-event deviations can be quite large, as depicted by distribution tails, but from a bulk perspective, the instrument pair deviations generally tend to be evenly distributed around 0 mm/h in most cases, and the PWD is most consistent with the LDQUANTS  
235 (Figure 4f) and WBPLUVIO2 (Figure 4i). The agreement with the WBPLUVIO2 averages at 0.0 mm/h when conditioning on event totals greater than 1 mm and wind speed smaller than 10 m/s (not shown), close to the operation and filtering conditions of the WMO intercomparison (see Lanza and Vuerich, 2009; Vuerich et al., 2009; sect. 3.1). This result contrasts with the WMO intercomparison, where the Pluvio exhibited the highest performance (Lanza et al., 2010; their Table 2). This contrast is potentially influenced by deployment setup, site-specific factors, and/or sample size (the WMO intercomparison used approximately 1/10 the number of precipitation events analyzed here).  
240 and standard deviations of 3 mm/h or less. In both the mean and 1-min maximum precipitation rates, the TBRG (Figure 4ab and Figure 5ab) exhibits a distinct bi-modal PDF shape, which originates in its coarse minimum least count of 0.254 mm. The events associated with the secondary peak in the mean precipitation rate histogram (Figure 5b) are at the third PWD distribution tercile (yellow-shaded area), i.e., intense enough to be detected by the TBRG, but too weak and/or short to form consistent correspondence with the other instruments, and possibly influenced by some residual water on the bucket's "spoon". The coarse TBRG least count, combined with the 1-min sampling resolution, also results in weak events being below the TBRG's detection limit, as evident by the lack of first tercile events (purple-shaded areas) based on the maximum precipitation rate (Figure 4b) and very few weak events when partitioned based on mean event precipitation rate (Figure 5b). Accounting for this instrument limitation by omitting precipitation events with total amounts lesssmaller than 1 mm results in a behavior  
245 consistent with the aforeabove mentioned instruments and the disappearance of the bi-modal PDF artifact (not shown), suggesting that higher event total thresholds should be used for the TBRG in an integrated data product. The negative (positive) event period tendency of the TBRG in Figure 3ab (DISDROMETER in Figure 3gh) are compensated by the positive (negative) event-mean precipitation rates observed in Figure 5ab (Figure 5gh), resulting in a net event amount that is in agreement with other instruments, as indicated in Figure 2. In this regard, the DISDROMETER compensates for its relatively large event  
250 mean rate variability with a restrained event 1 min maximum precipitation (Figure 4g). While the 1-min maximum precipitation is event characteristic is generally the most variable across the various instruments (Figure 4) due to the irregular, potentially tempestuous nature of precipitation over the commonly-used 1-min precipitation instrument averaging period, combined with sensitivity limitations of different instruments, the ORG and RAINWB exhibit a much more erratic behavior.

Specifically, The RAINWB significantly underestimates both the event 1-min maximum precipitation rate (Figure 4~~de~~) and event-mean precipitation rate (Figure 5~~de~~) ~~by several tens of mm/h~~, which provides an extreme case of error compensation resulting in a moderate bias, as seen in the event total amount PDF (Figure 2~~de~~). ~~The ORG displays less variable, yet inconsistent response, overestimating event precipitation rate peaks (Figure 4b) but underestimating average precipitation rates (Figure 5b), a behavior that becomes even more pronounced when focusing on events with precipitation totals exceeding 1 mm (not shown).~~

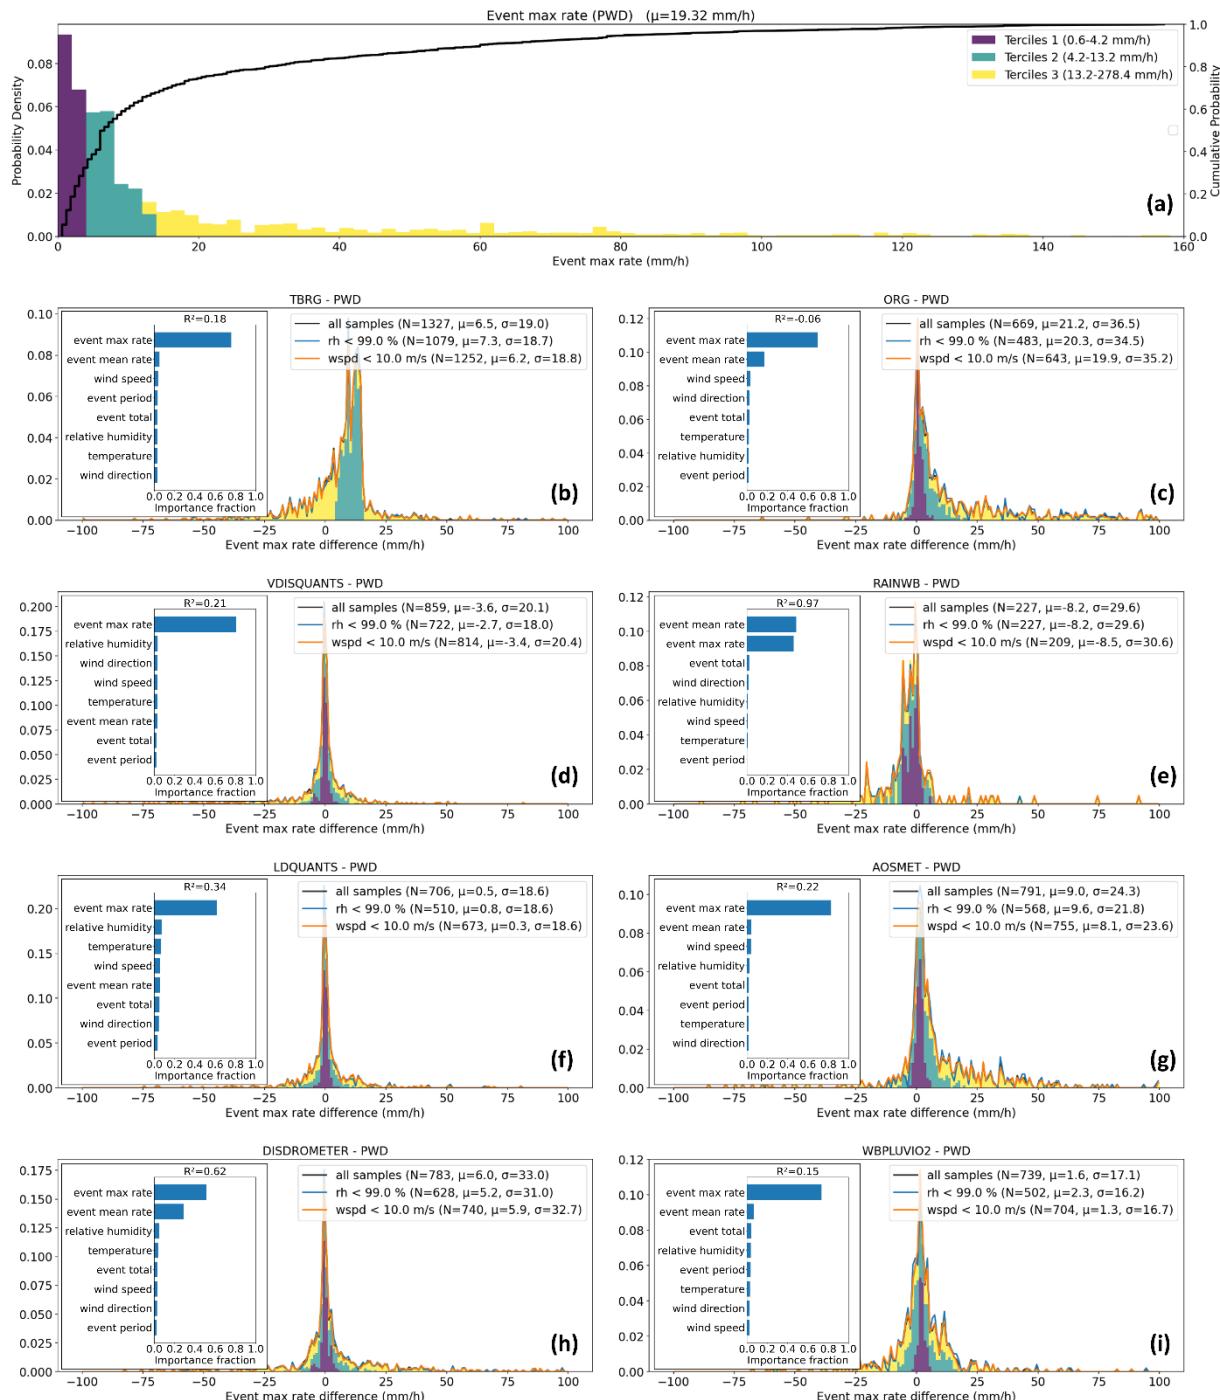

**Figure 4:** As in Figure 2, but for event 1-min-averaged maximum precipitation rate (bin `size_widths` of 2 and 1 mm/h in panels a and b-i, respectively; x-axis and legend quantities are given in mm/h units). The inset panels show feature importance analysis of various PWD event properties and event-mean atmospheric state variables derived from MET observations. The feature importance results are derived from a random forest regression model fit (see text) with the coefficient of determination specified at the top of the inset.

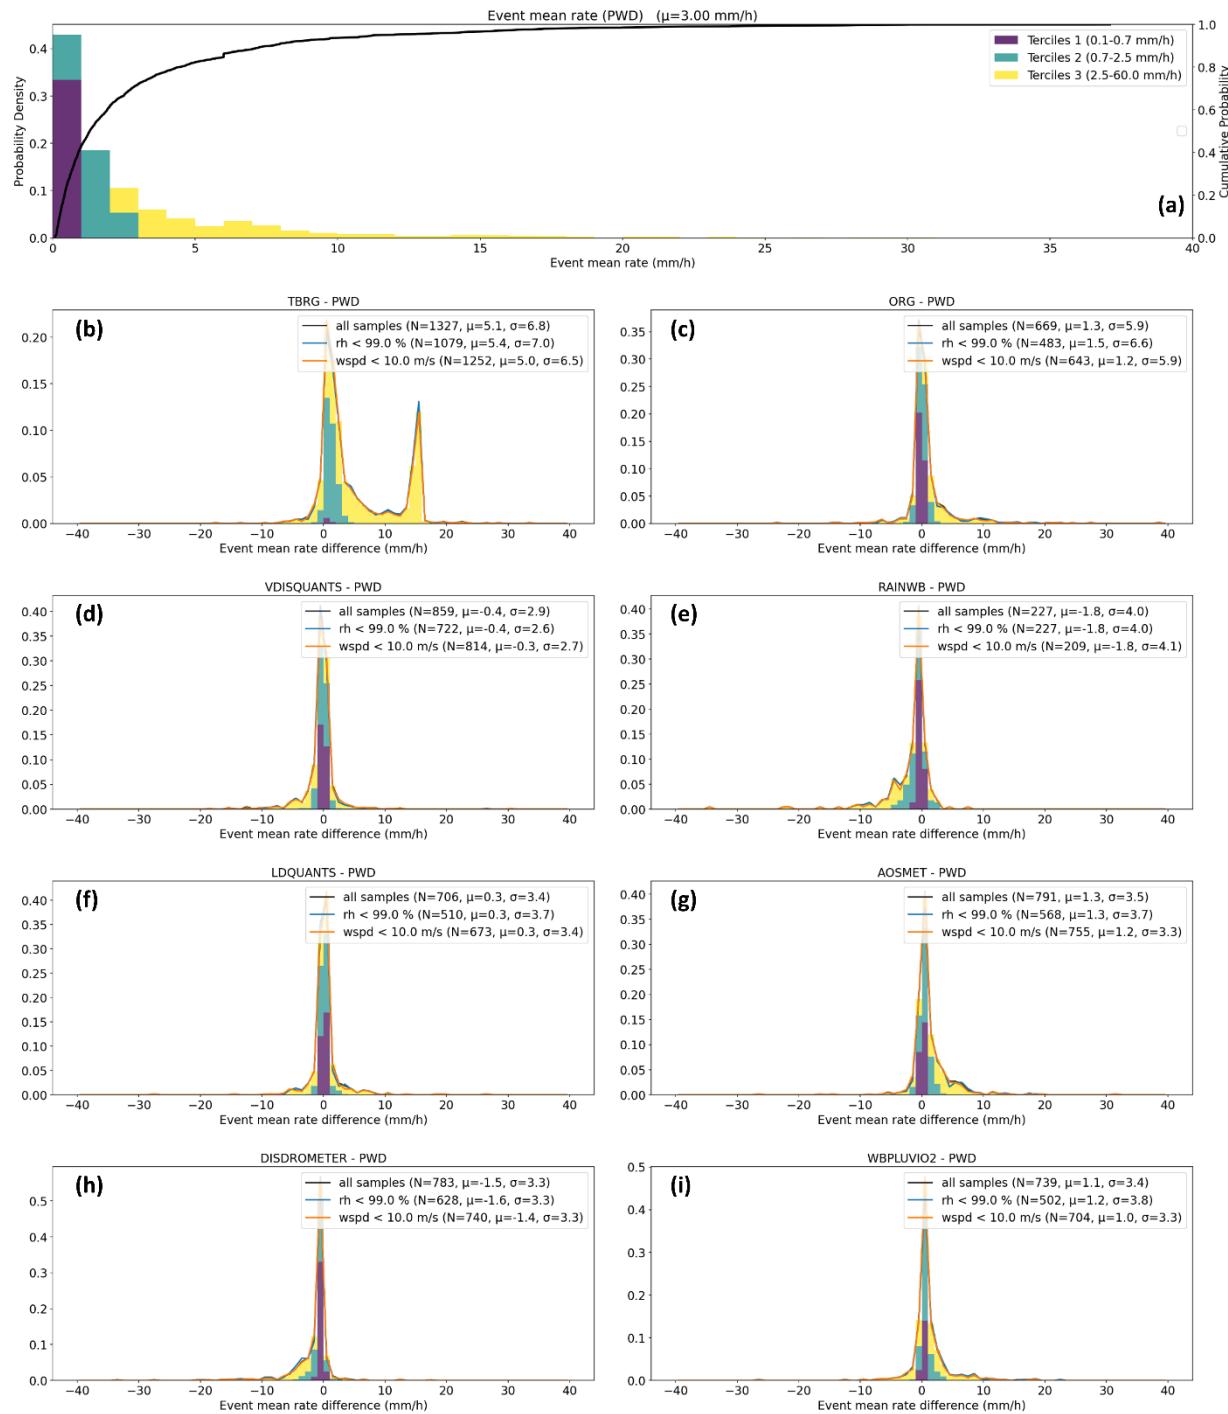


Figure 5: as in Figure 2 but for event-mean precipitation rate (in mm/h; bin size-widths of 1 mm/h).

The inset panels show feature importance analysis of various PWD event properties and event-mean atmospheric state variables derived from MET observations. The feature importance results are derived from a random forest regression model fit (see text) with the coefficient of determination specified at the top of the inset.

### 2.3 Instrument Sensitivity, Deployment Configuration, and Atmospheric State Effects on the Inter-Comparison Results


Ambient conditions can influence deviations between instrument measurements, often as a function of the instrument operation mechanism (e.g., Bartholomew, 2016c, 2020a; Kyrouac and Tuftedal, 2024; Montero-Martínez et al., 2016; Wang et al., 2021).

280 In the secondary (curved line) PDFs illustrated in Figure 2, Figure 3, Figure 4, and Figure 5, we examined the impact of some of these influencing factors. Specifically, by excluding events with event-mean relative humidity exceeding 99% (likely foggy conditions; accounting for the MET system's uncertainty) or events with event-mean wind speeds higher than 10 m/s (high winds), some of the potential impact of these forcings on event statistics can be evaluated. The effect of relative humidity (RH) wind speed appears somewhat limited, with mixed behavior of increasing or decreasing the deviation magnitude or standard deviations. This mixed and weak behavior could be due to the RH threshold used and/or because the examined instruments are less influenced by ambient moisture effects. The wind speed PDFs, however, indicate that conditioning for high winds tends to reduce the instrument deviation mean and standard deviations in all four examined parameters. This mixed and weak behavior could be the result of the wind speed threshold used, or simply that examined instruments are robust to wind effect, which is likely not the case. (We note that surface winds stronger than 10 m/s are likely more impactful on certain instrument samples, but such events are too rare in the SGP dataset to form a robust statistical dataset). The relative humidity (RH) PDFs, however, indicate that conditioning for foggy conditions reduces the instrument deviation mean and standard deviations in precipitation event totals across all instruments (Figure 2) and most instruments in the event period (Figure 3), but the results are less conclusive regarding precipitation rates (Figure 4 and Figure 5).

295 To further demonstrate the often site-dependent challenge of disentangling the influence of different parameters on differences in precipitation event measurements and statistics, we conduct a feature importance analysis using the Random Forest (RF) regressor in the Scikit-Learn Python package. To further demonstrate the challenge in disentangling the influence of different parameters on the difference in precipitation event measurements and statistics, we conduct a feature importance analysis by using the Random Forest (RF) regressor available in the Seikit Learn Python package (Pedregosa et al., 2011). We also perform the analysis using datasets from two additional ARM deployments: The main site at Houston, Texas, of the Tracking Aerosol 300 Convection Interactions Experiment (TRACER; Jensen et al., 2023) spanning October 1, 2021 through October 2, 2022, and the Eastern North Atlantic central site at Graciosa Island (ENA; see Mather, 2024; Wood et al., 2015) spanning October 1, 2013 through January 14, 2025, representing convective- and stratiform-dominated regimes, respectively. (From this aspect, the SGP site, often characterized by continental shallow convection, serves as a season-dependent mixture of the two regimes).

305 The feature importance analysis enables ranking the factors (features) that are most influential on the fitted RF model; i.e., features that have the most impact on the prediction of the model's target variable (in this case, inter-instrument deviations). Using the default algorithm's hyperparameters (100 estimators/trees, unlimited tree depth, etc.), we input as features the four

precipitation event properties from the reference instrument (total, period, mean, and 1-min maximum precipitation rates) as well as the event-mean temperature, RH, pressure, wind speed, and wind direction measured by the MET system. We run the algorithm separately for instrument pairs and event properties; that is, a single RF algorithm run examines the deviations of an instrument pair in one of across the four event properties (the target variable). Because the purpose of this ML exercise is qualitative, for brevity, we only present the results for the run using the event-maximum mean precipitation rate, depicted for the SGP, TRACER, and ENA sites in the insets shown in Figure 4, Figure 6, and Figure 7, respectivelyFigure 5. We present, but overlook, RF fits in which the resultant coefficient of determination ( $R^2$ ) is negative, indicating a fit with no predictive skill.

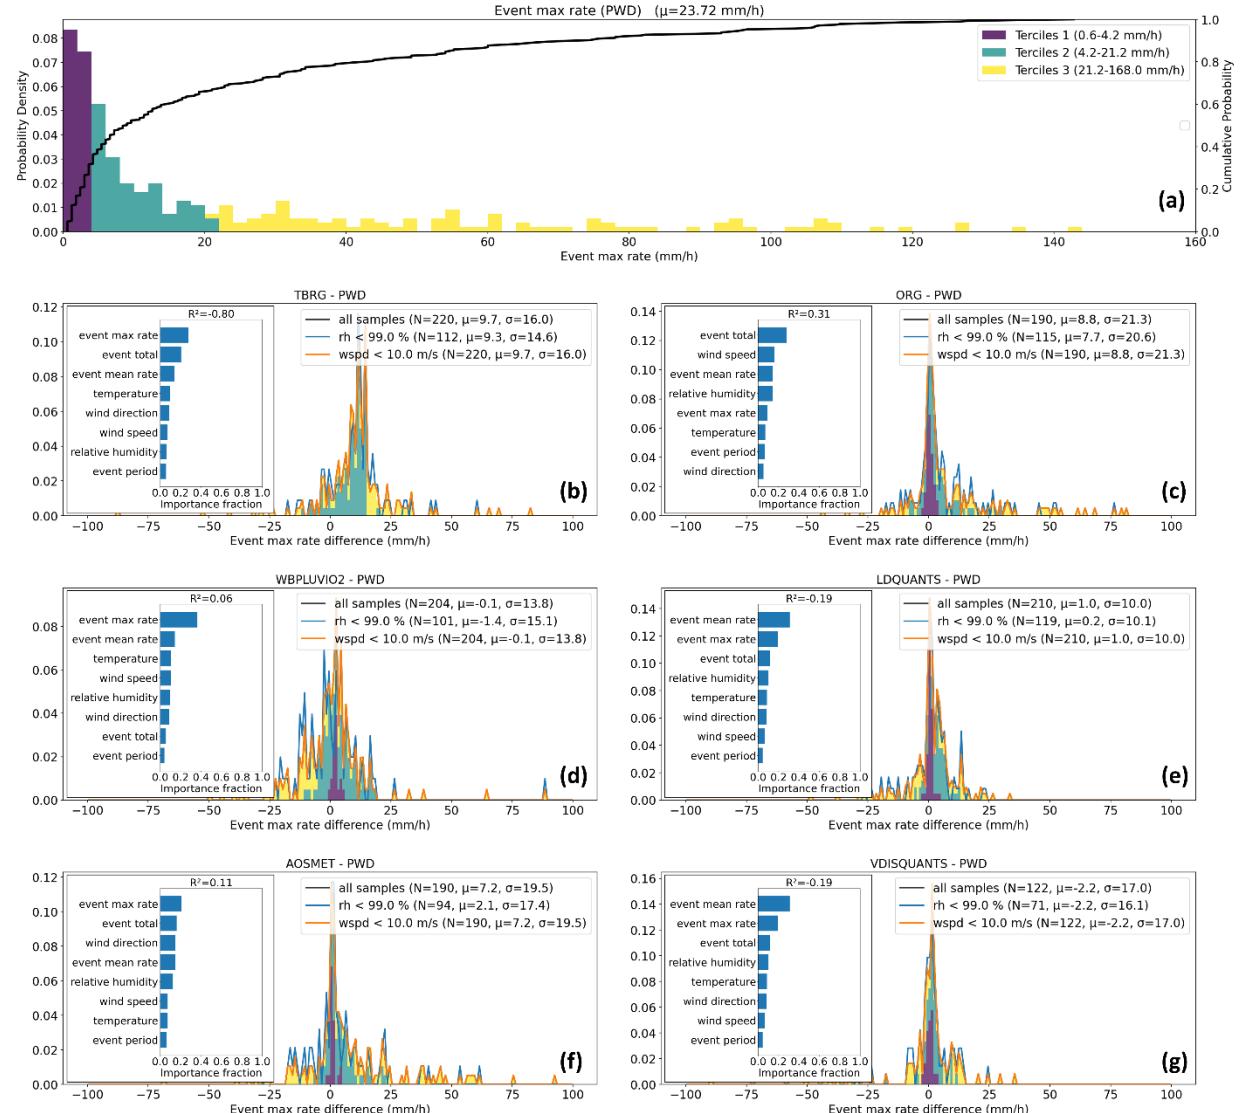

315 **Figure 6: as in Figure 4 but for the Tracking Aerosol Convection Interactions Experiment (TRACER) main site.**

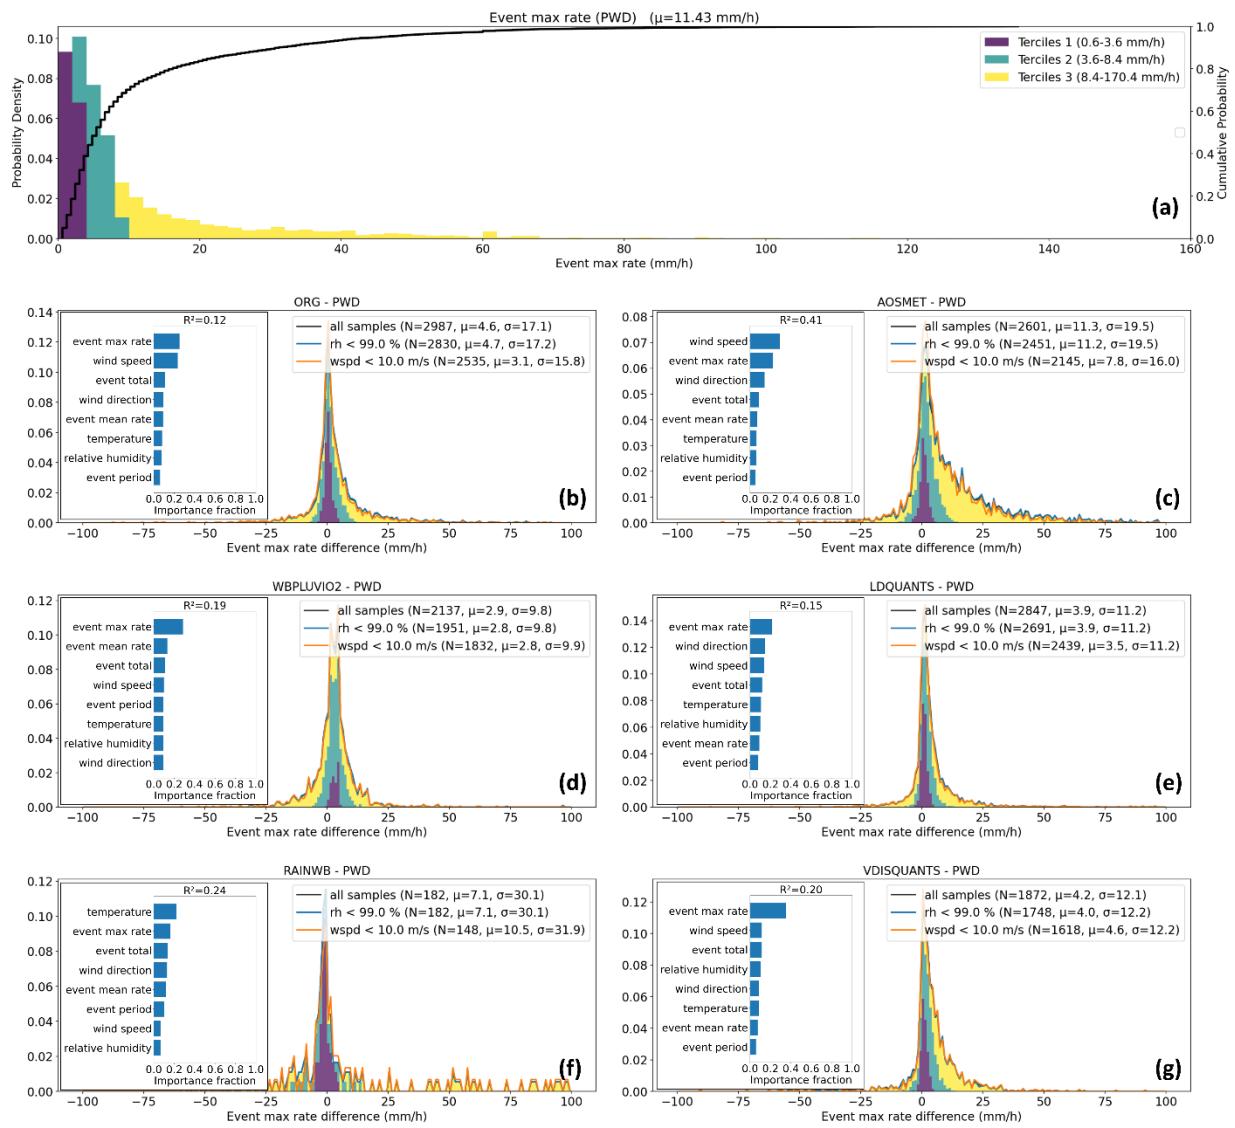


Figure 7: as in Figure 4 but for the ARM Eastern North Atlantic (ENA) central site.

320 The PWD's 1-min maximum precipitation rate distribution for the TRACER main site (Figure 6a) supports its designation as a “convective” site with an average value (23.7 mm/h) greater by roughly 20% than the SGP and second tercile values greater than the SGP site's value by nearly 40%. The ENA distribution, on the other hand, exhibits a tendency toward weaker instantaneous precipitation rates, around 40% lower than at the SGP site, based on mean values and second-tercile statistics in Figure 7a. However, the general patterns of instrument deviations relative to the reference (PWD in all cases) indicate similar tendencies with regard to the average deviation and variability, noting that the ENA PWD (Figure 7) tends to report lower maximum rates relative to all other instruments, which might be an indication of an instrument bias (cf. Lanza et al., 2010).  
 325

Focusing on the SGP feature importance results (Figure 4b-i), all instrument pairs with the PWD, except for the RAINWB-PWD pair, are most influenced by a large margin by the event-max precipitation rates, suggesting the existence of some proportionality between the deviations and the variable itself. All instrument pairs with the PWD are most influenced by the event-mean precipitation rate, suggesting the existence of some proportionality between the deviations and variable itself. This proportionality was also indicated in joint distributions we tested, and the general dominance of the examined target variable with its deviation feature (estimated relative errors for that matter) was seen in the vast majority of cases (not shown). In those analyses, the other examined features typically showed very weak, if any, proportionality (not shown). The ORG (Figure 5b) and RAINWB-PWD pair (Figure 4Figure 5de) has the event-mean rate as the most dominant feature, which is also highly

335 impactful in the case of the DISDROMETER (ranked 2<sup>nd</sup>; see Figure 4h), while having the event mean rate as the dominating feature, have the event 1-min maximum rate at 2<sup>nd</sup> place in importance, reflecting the+ tendency for some inconsistent behavior of those instruments, as discussed above.

The feature importance analysis of the 1-min maximum precipitation rates is less conclusive for the TRACER dataset, with the two most important features being one of the event maximum precipitation rate, the mean precipitation rate, and the event

340 total (Figure 6b-g). This result is likely influenced by the convective nature of this site's dataset, reflecting the tendency of heavy precipitation events to be associated with large amounts, high intensity, and relatively short duration (hence, the mean rates are relatively high as well). However, in some cases, such as the wind speed in the AOSMET-PWD pair (Figure 6f), lower-ranked variables are comparable in amplitude, suggesting site- or deployment-specific constraints, some of which are not predictable in advance without a detailed analysis. The wind speed is also the most informative (ranked 1<sup>st</sup>) for the

345 AOSMET-PWD pair in the ENA dataset (Figure 7c). This might suggest a wind-dependent AOSMET instrument bias, but could alternatively indicate a more general issue in the deployment configuration and/or the combination of site climatology and weaknesses of some instruments given that wind speed is ranked 2<sup>nd</sup> in the ORG-PWD and the VDISQUANTS-PWD pairs (Figure 7b and Figure 7g) and wind direction and speed are ranked 2<sup>nd</sup> and 3<sup>rd</sup>, respectively, in the LDQUANTS-PWD pair (Figure 7e). As noted earlier, the accuracy of those instruments is known to be susceptible to high winds; hence, they are 350 likely more influenced by the climatologically stronger winds at the ENA site than at the TRACER site. (None of the TRACER events is associated with event-mean winds stronger than 10 m/s; compare the orange and black curve statistics in Figure 6b-g).

A tentative conclusion that can be drawn from these results is that weighing different instruments based on their evaluated 355 sensitivities and accuracies from the literature can result in greater bias due to unmatching background conditions as well as unanticipated confounding factors, particularly when combining climatological factors with specific deployment setups. While additional quantitative characterization of instrument susceptibilities to deployment properties and conditions is essential, a deployment-dependent study of this type requires significant effort. The TBRG (Figure 5a) is the only instrument for which the event total feature dominates the deviations from the reference, interpreted as the impact of its coarse least count on precipitation event properties (this event total feature dominance is no longer seen when the exercise is applied to events with 360 total amount greater than 1 mm; not shown). Interestingly, the event mean temperature (2<sup>nd</sup> place) and RH (3<sup>rd</sup> place) features


appear to have some influence over the event mean precipitation rate. The event mean RH seems to influence the VDISQUANTS (Figure 5c) to a relatively greater extent, and to some extent, the ORG (3<sup>rd</sup> place) and WBPLUVIO2 (4<sup>th</sup> place). The influence of the RH on comparisons using different instruments with different operation mechanisms suggests that the PWD is susceptible to RH variability, numerous precipitation instruments are susceptible to RH variability, or both of these options. (Note that this RH variability is likely related to the foggy conditions demonstrated above and potentially also to other conditions such as low RH – dry conditions). The WBPLUVIO2 has the wind speed in 3<sup>rd</sup> place, not far from the precipitation rate features in importance fraction (Figure 5h). This unique importance of wind speed (overlooking instruments with negative  $R^2$ ) insinuates that wind effects are still influencing the rain gauge, even though it is deployed together with a wind shield. We note that equivalent RF analyses using data from other ARM deployments, such as the Tracking Aerosol Convection 365 Interactions Experiment (TRACER; Jensen et al., 2023; not shown), indicated a stronger influence of both wind direction and wind speed on multiple instruments. While additional quantitative characterization of instrument susceptibilities to deployment 370 properties and conditions is essential, a deployment dependent effort of this type requires a significant amount of work. The outcomes of such extensive efforts are highly challenging to predict in advance and are considered less accurate. Therefore, these data characterization studies often take place post-deployment, when the collected dataset is sufficiently large to 375 produce substantial results (beyond the scope of this study).

Suppose one wishes to develop an operational, unbiased (or at least, bias-mitigated) precipitation best-estimate data product. In that case, given that they do not have a *true* benchmark, they need to be aware of all the factors described above by performing robust characterization, which would ideally require a best-estimate product — this presents a conundrum. A first step towards resolving this conundrum would be to assume, given the evidence from this inter-comparison about instrument 380 consistency, that the suite of ARM instruments measure some perturbations from the *true* value, such that their mean could serve as a best-estimate of the *actual* precipitation value, and that other statistics (e.g., minimum, maximum, and standard deviation) could be used to estimate confidence intervals. (Note that because the number of available instruments is typically limited, the traditional 10<sup>th</sup> and 90<sup>th</sup> percentiles of a quantity as confidence intervals are of little meaning in this case). This 385 approach serves as the basis for PrecipBE, ARM's best-estimate precipitation data product, described and demonstrated in the section below.

### 3 The PrecipBE Algorithm

The PrecipBE VAP processing is performed on a per-precipitation-event basis, leveraging ARM measurement capabilities, depending on instrument data availability per deployment, while considering QC samples and ARM data quality reports (DQRs). The VAP currently only synthesizes rainfall data (with future expansion to solid precipitation); its 390 processing workflow is described in the flowchart shown in Figure 8Figure 6. Processing begins separately for each instrument. However, because given precipitation events can persist for more than a day or through 23:59:59 UTC of a given day, data from all available instruments are loaded for up to 7 days following the currently processed day, depending on whether a continuing

event is indicated by one or more of the available instruments. This buffer data loading prevents precipitation event biases driven by day-transition artifacts. Consistent with the inter-comparison discussed above, a continuing event suspect is  
 395 identified if precipitation instances (precipitation amount sample greater than 0 mm) are detected by a given instrument less than 30 minutes from the end of the given day, i.e., after 23:30 UTC.

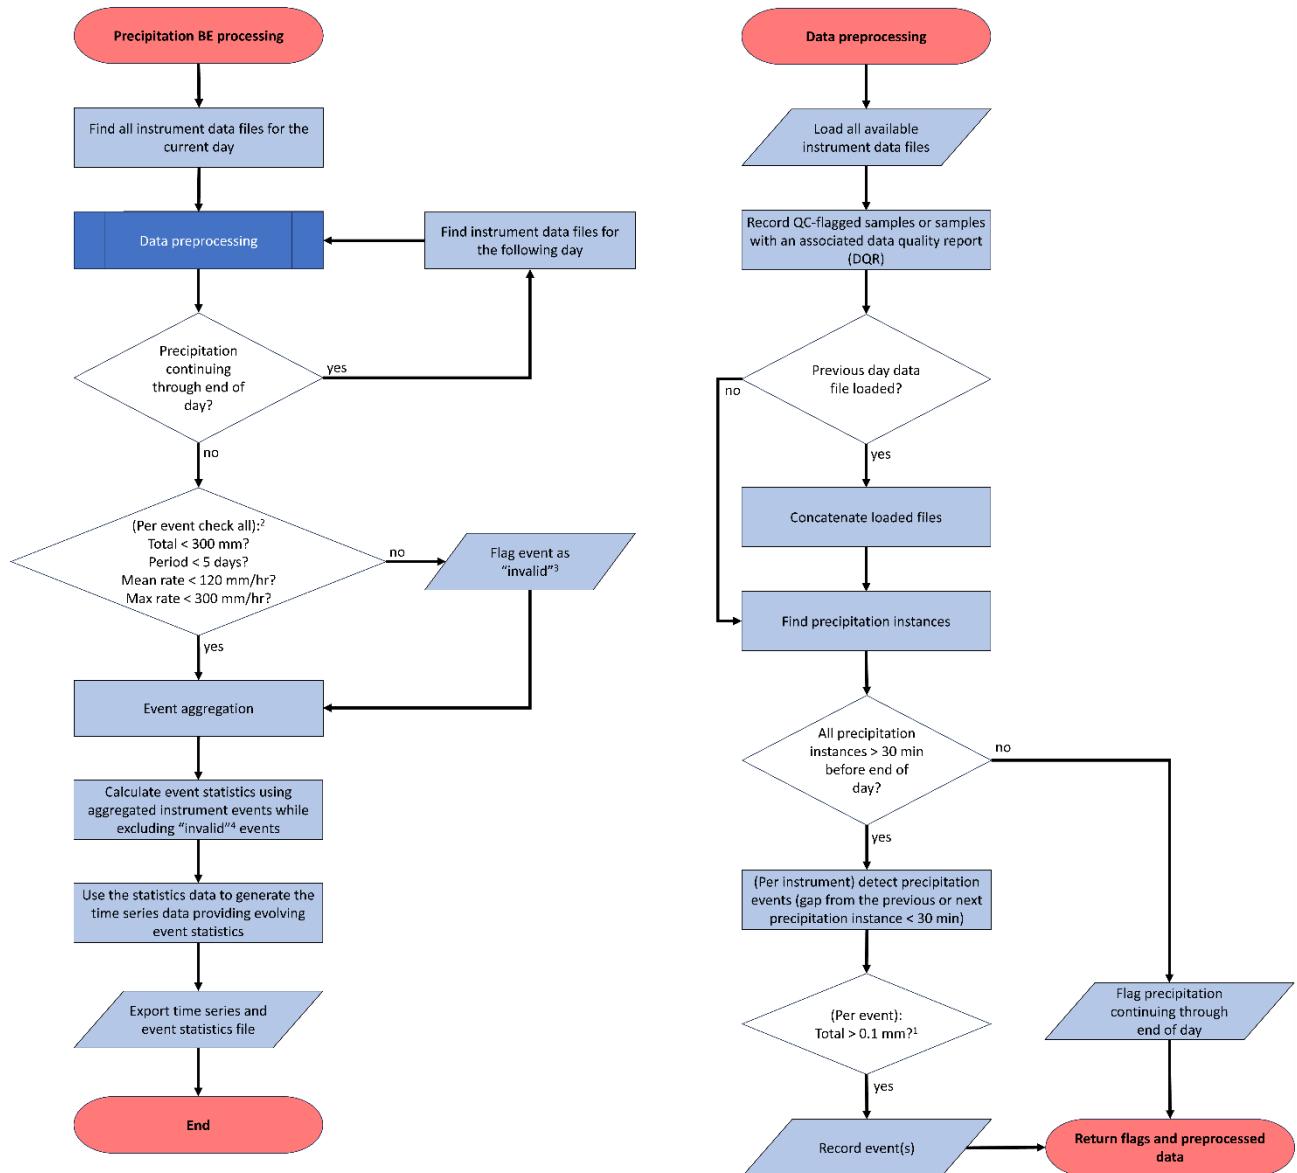

<sup>1</sup> 1.5 mm threshold for TBRG due to a large least count of 0.254 mm (0.01 inch) and a tendency for sporadic counts

<sup>2</sup> Event extremes can be modified or adapted for "extreme" deployment sites

<sup>3</sup> Even with a single invalid sample, the entire event is flagged as a precaution against other bad samples that could pass the extreme threshold test

<sup>4</sup> "Invalid" in this context is an event with sample(s) exceeding the threshold above, sample(s) not passing DQ tests, and/or has an active DQR associated with part or the entire event period.

Figure 86: PrecipBE processing flowchart

400 Precipitation event processing is generally similar to the methodology discussed in Section 2.1 until the event aggregation step of the flowchart. Following the inter-comparison results, the 0.1 mm cumulative precipitation event minimum is applied to all instruments, except for the TBRG, in which case a 1.5 mm threshold is used due to its coarse measurement (equivalent to a minimum effective error of ~8.5%), and because it is more prone to sporadic counts (not shown). In addition, given the RAINWB and ORG biases demonstrated above, those two instruments are entirely omitted from the PrecipBE algorithm (see  
405 Table 1).

During the aggregation stage, all valid instrument events are aggregated together while following the 30-min no-precipitation logic discussed above. As such, if during the aggregation stage, a continuing event suspect (precipitation instances after 23:30 UTC by one or more instruments) is ultimately gapped by more than 30 min from the closest precipitation instance(s) during the following day, the event is not a continuing event, and the loaded buffer day data are discarded.

410 The PrecipBE algorithm robustly addresses potential issues stemming from problematic data. Here, flagged events (events with one or more QC samples or anomalous readings) or events with associated DQRs are not omitted before aggregation, as in the comparison above. Instead, all events detected by a given instrument are still included in the aggregation stage to resolve a PrecipBE event but are excluded from the PrecipBE event statistics calculations if one or more of them have one or more problematic samples. For example, in the case of the diagram shown in Figure 1, the commonly occurring interlaced event  
415 configuration will end in a single resolved PrecipBE event incorporating all four instruments (PWD, LDIS, VDIS, and TBRG), regardless of whether one or more instrument events have problematic samples or an associated DQR. Assuming that all instrument events are valid, all four of them will be included in the statistics calculation. However, assuming an issue with TBRG event 3, for example, all TBRG events will be removed from the resolved PrecipBE event statistics, which will only incorporate three instruments (PWD, LDIS, and VDIS). Assuming instead that LDIS event 4 has problematic samples,  
420 PrecipBE will still resolve a single event, even if the period between the end of VDIS event 1 and the onset of PWD event 3 is greater than 30 min. In that case, statistics will be based on the PWD, VDIS, and TBRG events. We note that other approaches, such as omitting those problematic events from the aggregation stage as well, were extensively tested and resulted in significant PrecipBE event biases driven by the sporadic nature of anomalous samples across instruments (not shown). The currently implemented approach, therefore, prevents event onset and ending inconsistency issues at the expense of fewer  
425 incorporated instruments. This approach also served as the main incentive for excluding the RAINWB instrument from the algorithm due to its substantial positive event period biases (see Figure 3~~e~~).

As suggested by the flowchart in [Figure 8](#)~~Figure 6~~, once the resolved PrecipBE event statistics are calculated, they are used to generate time series data, followed by the export of daily PrecipBE files, which are described below.

## 4 PrecipBE Dataset Structure and SGP Output Demonstration

430 PrecipBE includes two datastreams (data set types) streamlining both process understanding and model evaluation studies using ARM surface precipitation data. The first datastream provides time series (evolving) precipitation data [at 1-min temporal resolution](#), whereas the second includes per-event statistics in an easy-to-use one-dimensional (tabular) format. (PrecipBE data file structure and the utilization of each of these datastreams is demonstrated in a Jupyter notebook available on the ARM Notebooks Github repository at: [https://github.com/ARM-Development/ARM-Notebooks/blob/main/VAPs/precipbe/precipbe\\_intro.ipynb](https://github.com/ARM-Development/ARM-Notebooks/blob/main/VAPs/precipbe/precipbe_intro.ipynb)).

435 The time series datastream (`precipbetseries`) provides the temporally-evolving instrument-mean, minimum, maximum, and standard deviation of event-cumulative precipitation and 1-min precipitation rates. Each timestamp indicates the number of instruments used, and flags are provided for events detected using only a single instrument. The time series files also include bitwise flag arrays for instrument availability, invalid instrument samples, and instrument DQRs. [Figure 9](#)[Figure 7](#) shows an

440 example of the PrecipBE time series output for two events that started at the SGP site on November 8, 2024, with the second event ending just after 04:00 UTC of the following day. Note that the cumulative precipitation (top panel) zeros out after the end of the first event until the beginning of the second event, enabling straightforward, low overhead, analysis. For example, in the first depicted event, cumulative precipitation increases at a varying rate with a short burst around 09:45 UTC, during which a 1-min averaged precipitation rate exceeding 200 mm/h is observed by one of the instruments (lower panel), with very 445 weak and intermittent precipitation in the final 4.5 hours of this event.

The PrecipBE time series data suggest that none of the 7 available instruments were omitted from the statistics calculations of these two events due to flags, bogus samples, or existing DQRs. The time series data file provides information about which instruments were available via its bitwise `available_instruments` field — in this case, the SGP C1 facility's VDISQUANTS and LDQUANTS VAPs, DISDROMETER, and the WBPLUVIO2, and the SGP E13 facility's PWD, 450 AOSMET, and TBRG. However, while this datastream provides all available precipitation data converted to accumulated totals in 1-min increments (in units of mm/min), examining statistics of particular events, such as the two depicted in [Figure 9](#)[Figure 7](#) would require additional processing. Alternatively, one could use the PrecipBE statistics datastream (`precipbestats`) files, which are only generated for days with precipitation event onsets, having the number of timestamps equal to the number of precipitation events that started on a given day. In case of November 8, 2024, illustrated below, the 455 corresponding statistics data file includes two timestamps.

In each timestamp, `precipbestats` informs about statistics of the given event such as the instrument-mean, minimum, maximum, and standard deviation of onset, end time, period, total amount, mean precipitation rate, 1-min-averaged maximum precipitation rate, and precipitation rate standard deviation, as well as various flags and information such as which instrument recorded the highest precipitation rate or smallest total amount for that event. For example, the major precipitation event 460 depicted in [Figure 9](#)[Figure 7](#) resulted in a cumulative amount of  $\sim 54 \pm 9$  mm with an instrument minimum and maximum of 43 and 75 mm, respectively. The statistics data file indicates that the DISDROMETER recorded the maximum precipitation

rate of 218 mm/h during that event. In comparison, the instrument-mean maximum precipitation rate was more moderate yet still rather intense at 85 mm/h. Finally, the statistics dataset contains statistical information about the surface-level atmospheric state during precipitation events, with data harvested from (in order of preference) the MET, the automatic weather station (MAWS; Holdridge and Kyrouac, 2017), or one of the Vaisala WXT systems operated by ARM (see Table 1), as well as drop distribution moment data derived using the VDISQUANTS or LDQUANTS, depending on availability. For example, the surface temperature during the major November 8, 2024, event ranged between 9.3° and 13.6° C, with an average of 10.0° C, while the event-mean RH was 97.5%. The even-mean liquid water content derived by the VDISQUANTS VAP was 0.3 g/m<sup>3</sup>, and the average mass-weighted mean drop diameter was ~1.5 mm.

470

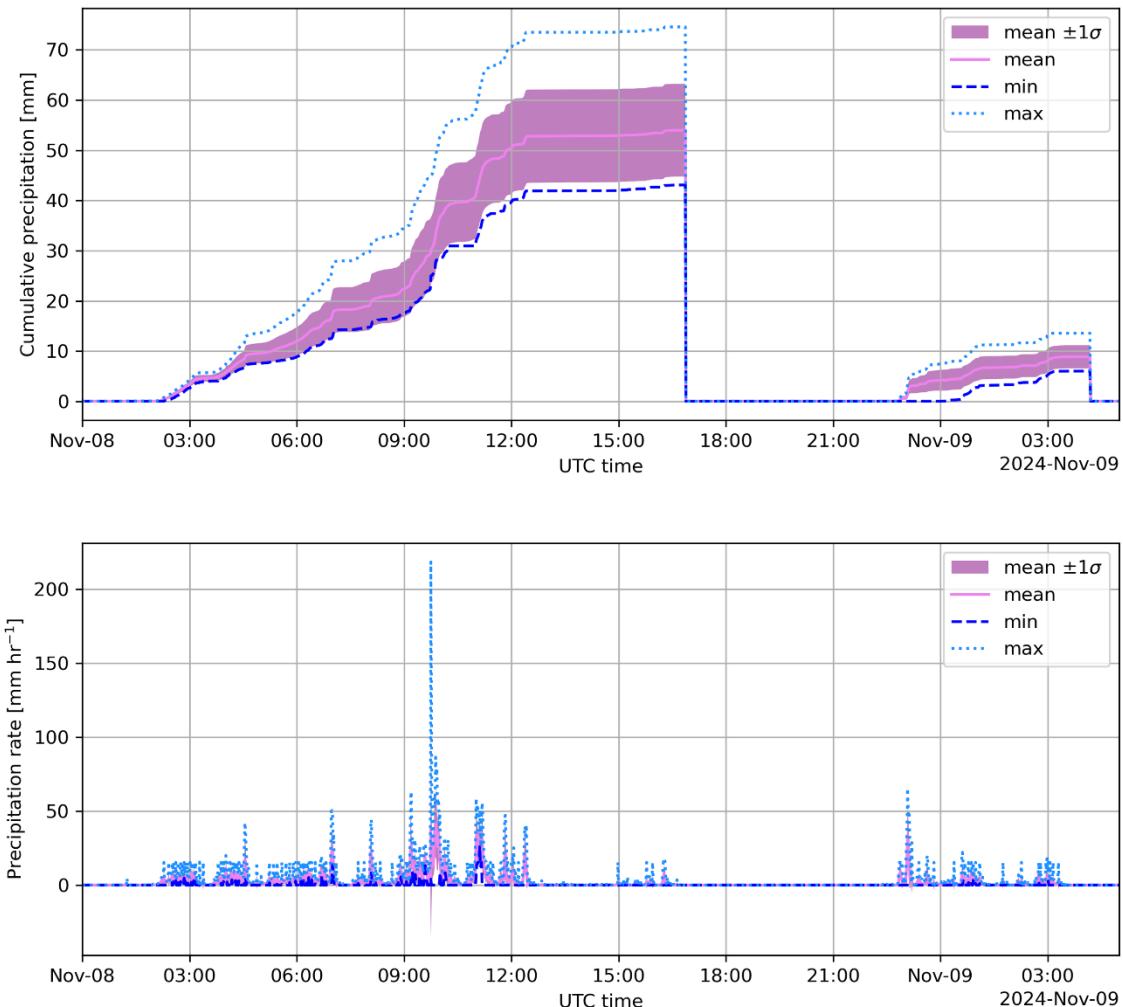


Figure 97: PrecipBE time series of two precipitation events that occurred on November 8, 2024, at the ARM SGP site, the second of which continued into November 9. (Top) Per-event cumulative precipitation, (bottom) precipitation rates. The plot illustrates the instrument-minimum, maximum, mean, and mean  $\pm$  standard deviation ( $\sigma$ ) (see legend).


475

## 5 Long-term Trend Analysis of PrecipBE Output for the ARM SGP Site

Using PrecipBE statistics data files generated for the SGP site, spanning September 2, 1993, to March 4, 2025 ( $\sim 31.5$  years), we can easily examine precipitation event trends at the ARM site. Figure 10Figure 8 shows running-mean time series data that facilitates basic trend analysis. We depict both curves calculated using the full dataset and curves calculated using a data subset derived only from multi-instrument events. Ideally, one should be inclined to use precipitation event properties and statistics derived from more than one instrument, as they are considered more robust than those based on a single instrument. However, ARM operated only the TBRG starting in September, 1993,  $\sim 14$  months after the SGP site launch, until April, 2006, when the DISDROMETER was deployed as the first addition to the growing suite of precipitation instruments ARM operates at the site. The results of the instrument inter-comparison in Section 2 indicated that the TBRG is generally consistent with other advanced precipitation instruments in event totals. It is also consistent with other instruments in event precipitation rates, as long as it is conditioned for event total greater than its least count by some factor (e.g., effective uncertainties of 12.7% and 8.5% at event total of 1 and 1.5 mm, respectively). We follow these conclusions to derive the statistics depicted in Figure 10Figure 8, which are also part of the motivation to examine 1-year-windows.

The 1-year running sum (annual) precipitation record (Figure 10Figure 8a) largely shows little difference in annual amount between the full dataset and multi-instrument subset, with annual means of  $\sim 800$  and  $\sim 750$  mm (respectively) in agreement with previous studies (cf. Sisterson et al., 2016). The SGP annual rainfall is quite variable, with some years in which the site experienced significant amounts (e.g., 2008 and 2019 exceeding 1100 mm), and others when the site exhibited small amounts (e.g., below 400 mm in 2006 and 2011). Statistically significant linear fits suggest a decadal increase in annual rainfall of more than 36 mm per decade ( $\sim 5\%$ ). Those positive rainfall trends are qualitatively consistent with studies that examined single-day precipitation amount trends in station data over the south-central US, where the SGP site is located (e.g., Harp and Horton, 2022; Sun et al., 2021, their Figure 2). The number of significant precipitation events, referred to here as events with totals exceeding 1 mm, tentatively suggests a statistically significant increasing trend (Figure 10Figure 8b), commensurate with  $\sim 18$  min ( $\sim 7\%$ ) decadal reduction in event period (not shown). Here, the higher event total amount threshold mitigates the positive (negative) bias in the number of events (event period) in the earlier years of the SGP site, when the TBRG was the only operating precipitation-measuring instrument, such that event properties are strongly influenced by the TBRG's tendencies discussed in Section 2.2. Yet, between the full dataset and multi-instrument subset during overlapping periods, a limited positive bias is still observed in the case of the number of events (Figure 10Figure 8b). Therefore, all else being equal, it is more likely that the decadal trend leans towards the multi-instrument subset, with an increasing trend in the number of events on the order of 10 more events per year per decade. Given the definition of precipitation events in PrecipBE (precipitation

505 instances gapped by less than 30 min), these results could indicate a growing tendency to more precipitation from broken cloud systems, which could be related to observed trends and feedbacks (e.g., Goessling et al., 2025; Loeb et al., 2024; Sherwood et al., 2020; Song et al., 2023), yet additional research using PrecipBE and other datasets is required to support this hypothesis.

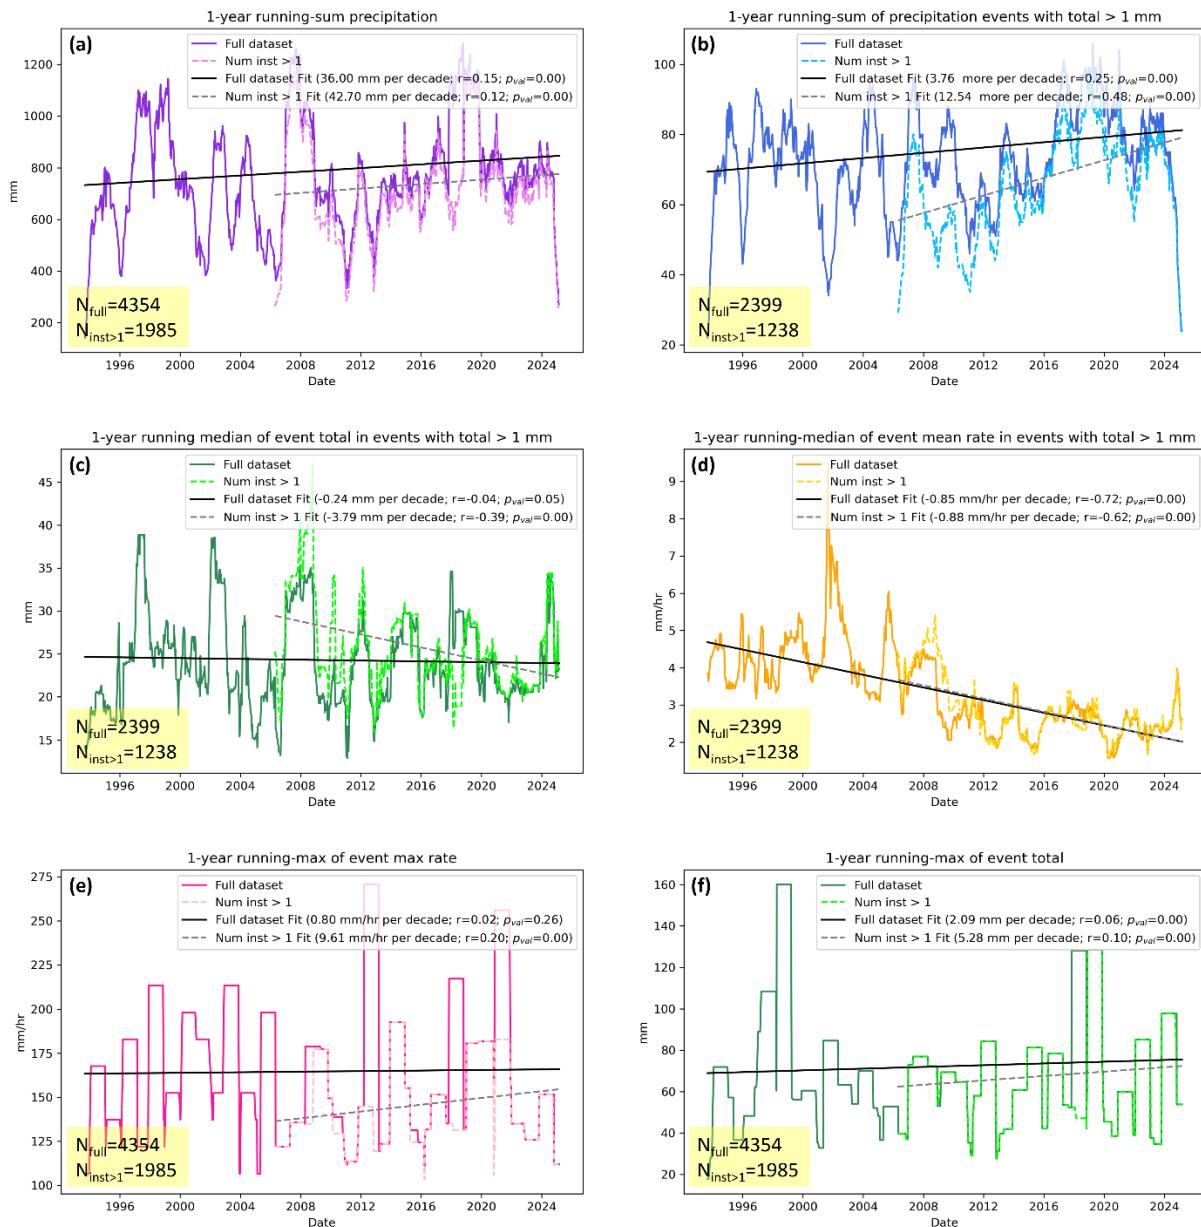

510 | **Figure 108:** Long-term trends in PrecipBE precipitation event properties for the ARM SGP site between September 2, 1993, and March 4, 2025. The solid curves were generated using all of the available precipitation event statistics, whereas the dashed curves were generated using precipitation events detected by two or more instruments (first effective sample on April 11, 2006, with the addition of the DISDROMETER). (a) 1-year running-sum (annual) precipitation totals, (b) 1-year running sum (annual) number of precipitation events with total > 1 mm, (c) 1-year running median of precipitation event total in events with total > 1 mm, (d) 1-year

running median of event-mean precipitation rate in events with total > 1 mm, (e) 1-year running maximum of event 1-min-averaged maximum precipitation rate, and (f) 1-year running maximum of precipitation event total. The solid black and dashed grey lines denote linear fits to the full dataset and the multi-instrument subset, respectively. Decadal trends, correlation coefficients, and P-values are given in the legends. All quantities were calculated using the instrument-mean data. The total number of samples (precipitation events) used in the illustrated curves are given the bottom left corner of each panel.

From a bulk perspective, all else being equal, the reduction in the precipitation event period can be translated, on average, to a trending decrease in event totals, which is indeed suggested from [Figure 10](#)[Figure 8c](#), consistent in both the full dataset and the multi-instrument subset. Following the same logic, one might expect an increasing average precipitation rate, but the 1-year running median of the event-mean precipitation rates indicates a statistically significant decreasing trend, consistent between the full and multi-instrument datasets ([Figure 10](#)[Figure 8d](#)). By examining event period in the multi-instrument subset, thereby mitigating the effect of the TBRG's negative event period bias (e.g., Figure 3ab), a 1-year running sum (annual) precipitation time (not shown) indicates a minimal and statistically insignificant reduction. Therefore, these results raise an apparent inconsistency between higher annual rainfall and shorter yet less intense events, on average. However, this inconsistency can be reconciled via examination of precipitation extremes in a 1-year timeframe of event maximum 1min-averaged maximum precipitation rates and maximum event totals ([Figure 10](#)[Figure 8e](#) and [Figure 10](#)[Figure 8f](#), respectively). These curves exhibit general consistency between the full dataset and the multi-instrument subset and all except the maximum precipitation rate using the full dataset indicate a statistically significant increasing trend in both metrics: more than 9 mm/h per decade increase in maximum precipitation rate (6.5%) using the multi-instrument subset and between 2-5 mm per decade increase in extreme event totals (~3–7.5%) over a 1-year timeframe. Taken together, this precipitation event trend analysis indicates that the observed increase in annual rainfall could be catalyzed by a few more extreme precipitation events taking place at the SGP site. Examination of the causal sources of these trends via counterfactual exercises and their attribution to potential drivers such as regional natural variability (e.g., Higgins et al., 2007; McKinnon and Deser, 2021) or changes to the local land use (e.g., Krishnamurthy et al., 2025) remain a topic of future studies.

## 6 Conclusions and Outlook

In this study, we presented an analysis of differences in ARM precipitation instrument measurements from a unique per-event perspective. Supported by [an](#) ML application to [the](#) instrument differences to examine the importance of various atmospheric state variables and parameters, the analysis indicates that, by and large, most ARM instruments [rainfall observations](#) are [generally](#) consistent with each other. Yet, deviations, occasionally of significant magnitudes, often occur, and could be driven by specific parameters such as relative humidity and wind properties, which could be [site and](#) deployment-dependent, or by differing instrument response functions to the same parameters those instruments are aimed at measuring (e.g., precipitation rates). Without additional prior knowledge, these results suggest that, on a first-order basis, the best estimate of precipitation properties is ostensibly that which incorporates all available valid data, which motivates the design of the PrecipBE value-added product (VAP). That said, while the analysis [showed indicated](#) that specific instruments show some tendency for certain

behaviors, such as shorter precipitation event periods in the case of the TBRG and WBPLUVIO2, other instruments, specifically, the RAINWB and ORG exhibit clear and significant biases, which cannot be ameliorated and therefore integrated into PrecipBE. Fortunately, ARM retired the RAINWB several years ago, and the ORG is in the process of being retired in 550 2025.

PrecipBE provides time series and tabular statistics datasets that are easy to use and comprehensive, including precipitation event properties, and are supplemented with ancillary data from various ARM datasets. Therefore, it is likely that this VAP would become the baseline (go-to) precipitation product for the ARM user community, augmenting the derivation of scientific 555 insights and streamlining model evaluation. Those features of this VAP were demonstrated via the examination of a single-day output as well as a long-term trend analysis of precipitation events at the ARM SGP site. The trend analysis tentatively suggests mainly shorter and less intense precipitation events at the SGP site, but also a long-term increase in annual rainfall driven primarily by more extreme event properties (event totals and maximum precipitation rates) of relatively rare, highly intense precipitation events. While we believe that numerous additional insights about surface precipitation at the SGP and other ARM sites can be derived via conditioning on various metrics related to drop size distribution moments, temperatures, 560 diurnal cycle, time of year, etc. provided in the PrecipBE data files, we leave such analyses for the ARM user community. PrecipBE will soon become an operational product with a several-day lag from real-time, and hence, its datasets will be continuously updated and made available via the ARM Data Discovery (<https://adc.arm.gov/discovery>). Future planned VAP updates include the addition of solid precipitation properties at applicable sites and the potential integration of radar-based low-level precipitation estimates. We invite the ARM user community to leverage PrecipBE and provide feedback to further 565 enhance this new and exciting data product.

## Data Availability

Current and future releases of PrecipBE time series (Silber, 2025c, d) and statistics datasets (Silber, 2025a, b) are and will be available on the ARM Data Discovery (<https://adc.arm.gov/discovery/#/results/s::precipbe>). A Jupyter notebook demonstrating the structure and application of PrecipBE datasets is available on the ARM Notebooks Github repository at: 570 [https://github.com/ARM-Development/ARM-Notebooks/blob/main/VAPs/precipbe/precipbe\\_intro.ipynb](https://github.com/ARM-Development/ARM-Notebooks/blob/main/VAPs/precipbe/precipbe_intro.ipynb). The precipitation datasets of the PWD (Kyrouac et al., 2021), AOSMET (Kyrouac and Tuftedal, 2010), DISDROMETER (Wang, 2006), VDISQUANTS (Hardin et al., 2021), LDQUANTS (Hardin et al., 2019), TBRG (Kyrouac et al., 2006, 2021), WBPLUVIO2 (Zhu et al., 2016), RAINWB (Shi et al., 2010), and ORG (Kyrouac et al., 2021) from the ARM SGP, ENA, and TRACER sites are available on the ARM Data Discovery (<https://adc.arm.gov/discovery/>; last access: 10 March 2025).

## 575 Author Contribution

Conceptualization: IS, JMC, and AT

Formal analysis, investigation, methodology, visualization, and original draft preparation: IS

Project administration: JMC

Data curation and validation: IS and MRK

580 Manuscript review and editing: all authors

### **Competing Interests**

The authors declare that they have no competing interests

### **Acknowledgments**

The authors thank Scott Collis and Scott Giangrande for valuable comments and feedback. Data were obtained from the ARM

585 user facility, a U.S. Department of Energy (DOE) Office of Science user facility managed by the Biological and Environmental Research (BER) program.

### **Financial Support**

This research was supported by the ARM user facility, a U.S. Department of Energy (DOE) Office of Science user facility

managed by the Biological and Environmental Research (BER) program. Pacific Northwest National Laboratory is operated

590 for the U.S. Department of Energy by Battelle under contract DE-AC05-76RL01830.

### **References**

Bartholomew, M. J.: Impact Disdrometers Instrument Handbook, ARM Climate Research Facility, Pacific Northwest National Laboratory, Richland, WA, United States, <https://doi.org/10.2172/1251384>, 2016a.

595 Bartholomew, M. J.: Optical Rain Gauge Instrument Handbook, ARM Climate Research Facility, Pacific Northwest National Laboratory, Richland, WA, United States, <https://doi.org/10.2172/1251388>, 2016b.

Bartholomew, M. J.: Rain Gauges Handbook, <https://doi.org/10.2172/1245982>, 2016c.

Bartholomew, M. J.: Weighing Bucket Rain Gauge Instrument Handbook, United States, <https://doi.org/10.2172/1572341>, 2019.

600 Bartholomew, M. J.: Laser Disdrometer Instrument Handbook, DOE ARM Climate Research Facility, Pacific Northwest National Laboratory, Richland, Washington, United States, <https://doi.org/10.2172/1226796>, 2020a.

Bartholomew, M. J.: Two-Dimensional Video Disdrometer (VDIS) Instrument Handbook, ARM Climate Research Facility, Pacific Northwest National Laboratory, Richland, WA, United States, <https://doi.org/10.2172/1251384>, 2020b.

Battaglia, A., Rustemeier, E., Tokay, A., Blahak, U., and Simmer, C.: PARSIVEL Snow Observations: A Critical Assessment, *J. Atmospheric Ocean. Technol.*, 27, 333–344, <https://doi.org/10.1175/2009JTECHA1332.1>, 2010.

605 Bretherton, C. S., Uchida, J., and Blossey, P. N.: Slow Manifolds and Multiple Equilibria in Stratocumulus-Capped Boundary Layers, *J. Adv. Model. Earth Syst.*, 2, <https://doi.org/10.3894/JAMES.2010.2.14>, 2010.

Christensen, M. W., Wu, P., Varble, A. C., Xiao, H., and Fast, J. D.: Aerosol-induced closure of marine cloud cells: enhanced effects in the presence of precipitation, *Atmospheric Chem. Phys.*, 24, 6455–6476, <https://doi.org/10.5194/acp-24-6455-2024>, 2024.

610 Ciach, G. J.: Local Random Errors in Tipping-Bucket Rain Gauge Measurements, *J. Atmospheric Ocean. Technol.*, 20, 752–759, [https://doi.org/10.1175/1520-0426\(2003\)20%253C752:LREITB%253E2.0.CO;2](https://doi.org/10.1175/1520-0426(2003)20%253C752:LREITB%253E2.0.CO;2), 2003.

Colli, M., Lanza, L. G., and La Barbera, P.: Performance of a weighing rain gauge under laboratory simulated time-varying reference rainfall rates, *Perspect. Precip. Sci. - Part I*, 131, 3–12, <https://doi.org/10.1016/j.atmosres.2013.04.006>, 2013.

615 Emmenegger, T., Kuo, Y.-H., Xie, S., Zhang, C., Tao, C., and Neelin, J. D.: Evaluating Tropical Precipitation Relations in CMIP6 Models with ARM Data, *J. Clim.*, 35, 6343–6360, <https://doi.org/10.1175/JCLI-D-21-0386.1>, 2022.

Fehlmann, M., Rohrer, M., von Lerber, A., and Stoffel, M.: Automated precipitation monitoring with the Thies disdrometer: biases and ways for improvement, *Atmospheric Meas. Tech.*, 13, 4683–4698, <https://doi.org/10.5194/amt-13-4683-2020>, 2020.

620 Goessling, H. F., Rackow, T., and Jung, T.: Recent global temperature surge intensified by record-low planetary albedo, *Science*, 387, 68–73, <https://doi.org/10.1126/science.adq7280>, 2025.

Hardin, J., Giangrande, S., and Zhou, A.: ldquants, <https://doi.org/10.5439/1432694>, 2019.

Hardin, J., Giangrande, S., and Zhou, A.: Laser Disdrometer Quantities (LDQUANTS) and Video Disdrometer Quantities (VDISQUANTS) Value-Added Products Report, DOE Office of Science Atmospheric Radiation Measurement (ARM) Program (United States), <https://doi.org/10.2172/1808573>, 2020.

625 Hardin, J., Giangrande, S., Fairless, T., and Zhou, A.: vdisquants: Video Distrometer derived radar equivalent quantities. Retrievals from the VDIS instrument providing radar equivalent quantities, including dual polarization radar quantities (e.g., Z, Differential Reflectivity ZDR), <https://doi.org/10.5439/1592683>, 2021.

Harp, R. D. and Horton, D. E.: Observed Changes in Daily Precipitation Intensity in the United States, *Geophys. Res. Lett.*, 49, e2022GL099955, <https://doi.org/10.1029/2022GL099955>, 2022.

630 Higgins, R. W., Silva, V. B. S., Shi, W., and Larson, J.: Relationships between Climate Variability and Fluctuations in Daily Precipitation over the United States, *J. Clim.*, 20, 3561–3579, <https://doi.org/10.1175/JCLI4196.1>, 2007.

Holdridge, D. and Kyrouac, J.: ARM: ARM-standard Meteorological Instrumentation, Marine, <https://doi.org/10.5439/1095605>, 2012.

635 Holdridge, D. J. and Kyrouac, J. A.: Meteorological Automatic Weather Station (MAWS) Instrument Handbook, <https://doi.org/10.2172/1373930>, 2017.

Howie, J., Protat, A., Kyrouac, J., and Tuftedal, M.: Australian Bureau of Meteorology surface meteorology data, <https://doi.org/10.5439/1597382>, 2016.

640 Jensen, M. P., Flynn, J. H., Kollias, P., Kuang, C., McFarquhar, G., Powers, H., Brooks, S., Bruning, E., Collins, D., Collis, S. M., Fan, J., Fridlind, A., Giangrande, S. E., Griffin, R., Hu, J., Jackson, R. C., Kumjian, M., Logan, T., Matsui, T., Nowotarski, C. J., Oue, M., Rapp, A. D., Rosenfeld, D., Ryzhkov, A., Sheesley, R., Snyder, J., Stier, P., Usenko, S., van den Heever, S. C., van Lier-Walqui, M., Varble, A., Wang, Y., Aiken, A., Deng, M., Dexheimer, D., Dubey, M., Feng, Y., Ghate, V. P., Johnson, K. L., Lamer, K., Saleeby, S. M., Wang, D., Zawadowicz, M. A., and Zhou, A.: Tracking Aerosol Convection Interactions Experiment (TRACER) Field Campaign Report, United States, <https://doi.org/10.2172/2202672>, 2023.

645 Keefer, T. O., Unkrich, C. L., Smith, J. R., Goodrich, D. C., Moran, M. S., and Simanton, J. R.: An event-based comparison of two types of automated-recording, weighing bucket rain gauges, *Water Resour. Res.*, 44, 2006WR005841, <https://doi.org/10.1029/2006WR005841>, 2008.

Koralegedara, S. B., Lin, C.-Y., and Sheng, Y.-F.: Numerical Analysis of the Mesoscale Dynamics of an Extreme Rainfall and Flood Event in Sri Lanka in May 2016, *J. Meteorol. Soc. Jpn. Ser II*, 97, 821–839, <https://doi.org/10.2151/jmsj.2019-046>, 2019.

650 Krishnamurthy, R., Newsom, R. K., Kaul, C. M., Letizia, S., Pekour, M., Hamilton, N., Chand, D., Flynn, D., Bodini, N., and Moriarty, P.: Observations of wind farm wake recovery at an operating wind farm, *Wind Energy Sci.*, 10, 361–380, <https://doi.org/10.5194/wes-10-361-2025>, 2025.

Kyrouac, J.: Aerosol Observing System Surface Meteorology (AOSMET) Instrument Handbook, United States, <https://doi.org/10.2172/1573797>, 2019a.

655 Kyrouac, J.: Precipitation Meteorological Instruments (PRECIPMET) Handbook, <https://doi.org/10.2172/2575103>, 2019b.

Kyrouac, J. and Shi, Y.: metwxt, <https://doi.org/10.5439/1455447>, 2018.

Kyrouac, J. and Tuftedal, M.: pws (b1), <https://doi.org/10.5439/1992050>, 2001.

Kyrouac, J. and Tuftedal, M.: aosmet (a1), <https://doi.org/10.5439/1984920>, 2010.

660 Kyrouac, J. and Tuftedal, M.: Surface Meteorological System (MET) Instrument Handbook, Atmospheric Radiation Measurement user facility, Richland, WA., United States, <https://doi.org/10.2172/1007926>, 2024.

Kyrouac, J., Shi, Y., Jane, M., and Wang, D.: raintb.b1, <https://doi.org/10.5439/1224827>, 2006.

Kyrouac, J., Shi, Y., and Tuftedal, M.: precipmet, <https://doi.org/10.5439/1353192>, 2017.

Kyrouac, J., Shi, Y., and Tuftedal, M.: met.b1, <https://doi.org/10.5439/1786358>, 2021.

665 Lagouvardos, K., Kotroni, V., Defer, E., and Bousquet, O.: Study of a heavy precipitation event over southern France, in the frame of HYMEX project: Observational analysis and model results using assimilation of lightning, *Atmospheric Res.*, 134, 45–55, <https://doi.org/10.1016/j.atmosres.2013.07.003>, 2013.

Lanza, L. G. and Vuerich, E.: The WMO Field Intercomparison of Rain Intensity Gauges, *Atmospheric Res.*, 94, 534–543, <https://doi.org/10.1016/j.atmosres.2009.06.012>, 2009.

670 Lanza, L. G., Vuerich, E., and Gnecco, I.: Analysis of highly accurate rain intensity measurements from a field test site, *Adv. Geosci.*, 25, 37–44, <https://doi.org/10.5194/adgeo-25-37-2010>, 2010.

Loeb, N. G., Ham, S.-H., Allan, R. P., Thorsen, T. J., Meyssignac, B., Kato, S., Johnson, G. C., and Lyman, J. M.: Observational Assessment of Changes in Earth's Energy Imbalance Since 2000, *Surv. Geophys.*, 45, 1757–1783, <https://doi.org/10.1007/s10712-024-09838-8>, 2024.

675 Martin, S. T., Artaxo, P., Machado, L., Manzi, A. O., Souza, R. A. F., Schumacher, C., Wang, J., Biscaro, T., Brito, J., Calheiros, A., Jardine, K., Medeiros, A., Portela, B., Sá, S. S. de, Adachi, K., Aiken, A. C., Albrecht, R., Alexander, L., Andreae, M. O., Barbosa, H. M. J., Buseck, P., Chand, D., Comstock, J. M., Day, D. A., Dubey, M., Fan, J., Fast, J., Fisch, G., Fortner, E., Giangrande, S., Gilles, M., Goldstein, A. H., Guenther, A., Hubbe, J., Jensen, M., Jimenez, J. L., Keutsch, F. N., Kim, S., Kuang, C., Laskin, A., McKinney, K., Mei, F., Miller, M., Nascimento, R., Pauliquevis, T., Pekour, M., Peres, J., Petäjä, T., Pöhlker, C., Pöschl, U., Rizzo, L., Schmid, B., Shilling, J. E., Dias, M. A. S., Smith, J. N., Tomlinson, J. M., Tóta, J., and Wendisch, M.: The Green Ocean Amazon Experiment (GoAmazon2014/5) Observes Pollution Affecting Gases, Aerosols, Clouds, and Rainfall over the Rain Forest, *Bull. Am. Meteorol. Soc.*, 98, 981–997, <https://doi.org/10.1175/BAMS-D-15-00221.1>, 2017.

Mather, J.: Atmospheric Radiation Measurement (ARM) Management Plan, DOE ARM User Facility, Pacific Northwest National Laboratory, Richland, WA, United States, <https://doi.org/10.2172/1253897>, 2024.

685 Mather, J. H., Turner, D. D., and Ackerman, T. P.: Scientific Maturation of the ARM Program, *Meteorol. Monogr.*, 57, 4.1–4.19, <https://doi.org/10.1175/AMSMONOGRAPHS-D-15-0053.1>, 2016.

McKinnon, K. A. and Deser, C.: The inherent uncertainty of precipitation variability, trends, and extremes due to internal variability, with implications for Western US water resources, *J. Clim.*, 1–46, <https://doi.org/10.1175/JCLI-D-21-0251.1>, 2021.

690 Mikkelsen, A., McCoy, D. T., Eidhammer, T., Gettelman, A., Song, C., Gordon, H., and McCoy, I. L.: Constraining Aerosol-Cloud Adjustments by Uniting Surface Observations with a Perturbed Parameter Ensemble, <https://doi.org/10.5194/egusphere-2024-2158>, 30 August 2024.

Milewska, E. J., Vincent, L. A., Hartwell, M. M., Charlesworth, K., and Mekis, É.: Adjusting precipitation amounts from Geonor and Pluvio automated weighing gauges to preserve continuity of observations in Canada, *Can. Water Resour. J. Rev. Can. Ressour. Hydr.*, 44, 127–145, <https://doi.org/10.1080/07011784.2018.1530611>, 2019.

695 Montero-Martínez, G. and García-García, F.: On the behaviour of raindrop fall speed due to wind, *Q. J. R. Meteorol. Soc.*, 142, 2013–2020, <https://doi.org/10.1002/qj.2794>, 2016.

Montero-Martínez, G., Torres-Pérez, E. F., and García-García, F.: A comparison of two optical precipitation sensors with different operating principles: The PWS100 and the OAP-2DP, *Atmospheric Res.*, 178–179, 550–558, <https://doi.org/10.1016/j.atmosres.2016.05.007>, 2016.

700 Pedregosa, F., Varoquaux, G., Gramfort, A., Michel, V., Thirion, B., Grisel, O., Blondel, M., Prettenhofer, P., Weiss, R., Dubourg, V., Vanderplas, J., Passos, A., Cournapeau, D., Brucher, M., Perrot, M., and Duchesnay, É.: Scikit-learn: Machine Learning in Python, *J. Mach. Learn. Res.*, 12, 2825–2830, 2011.

705 Raupach, T. H. and Berne, A.: Correction of raindrop size distributions measured by Parsivel disdrometers, using a two-dimensional video disdrometer as a reference, *Atmospheric Meas. Tech.*, 8, 343–365, <https://doi.org/10.5194/amt-8-343-2015>, 2015.

Reynolds, M., Ermold, B., and Shi, Y.: Marine Precipitation Measurements, <https://doi.org/10.5439/1372168>, 2017.

Ritsche, M. T.: Surface and Tower Meteorological Instrumentation at Barrow (METTWR4H) Handbook, <https://doi.org/10.2172/1020564>, 2008.

710 Ro, Y., Chang, K.-H., Hwang, H., Kim, M., Cha, J.-W., and Lee, C.: Comparative study of rainfall measurement by optical disdrometer, tipping-bucket rain gauge, and weighing precipitation gauge, *Nat. Hazards*, 120, 2829–2845, <https://doi.org/10.1007/s11069-023-06308-z>, 2024.

Saha, R., Testik, F. Y., and Testik, M. C.: Assessment of OTT Pluvio2 Rain Intensity Measurements, *J. Atmospheric Ocean. Technol.*, 38, 897–908, <https://doi.org/10.1175/JTECH-D-19-0219.1>, 2021.

715 Sherwood, S. C., Webb, M. J., Annan, J. D., Armour, K. C., Forster, P. M., Hargreaves, J. C., Hegerl, G., Klein, S. A., Marvel, K. D., Rohling, E. J., Watanabe, M., Andrews, T., Braconnot, P., Bretherton, C. S., Foster, G. L., Hausfather, Z., Von Der Heydt, A. S., Knutti, R., Mauritsen, T., Norris, J. R., Proistescu, C., Rugenstein, M., Schmidt, G. A., Tokarska, K. B., and Zelinka, M. D.: An Assessment of Earth’s Climate Sensitivity Using Multiple Lines of Evidence, *Rev. Geophys.*, 58, e2019RG000678, <https://doi.org/10.1029/2019RG000678>, 2020.

Shi, Y., Jane, M., and Wang, D.: rainwb.b1, <https://doi.org/10.5439/1224830>, 2010.

720 Silber, I.: precipbeststats (c0), <https://doi.org/10.5439/2523641>, 2025a.

Silber, I.: precipbeststats (c1), <https://doi.org/10.5439/2523640>, 2025b.

Silber, I.: precipbetseries (c0), <https://doi.org/10.5439/2523643>, 2025c.

Silber, I.: precipbetseries (c1), <https://doi.org/10.5439/2523642>, 2025d.

725 Sisterson, D. L., Peppler, R. A., Cress, T. S., Lamb, P. J., and Turner, D. D.: The ARM Southern Great Plains (SGP) Site, *Meteorol. Monogr.*, 57, 6.1-6.14, <https://doi.org/10.1175/AMSMONOGRAPHS-D-16-0004.1>, 2016.

Song, H., Choi, Y.-S., and Kang, H.: Global change in cloud radiative effect revealed in CERES observations, <https://doi.org/10.21203/rs.3.rs-3781529/v1>, 28 December 2023.

Sun, Q., Zhang, X., Zwiers, F., Westra, S., and Alexander, L. V.: A Global, Continental, and Regional Analysis of Changes in Extreme Precipitation, *J. Clim.*, 34, 243–258, <https://doi.org/10.1175/JCLI-D-19-0892.1>, 2021.

730 Tokay, A., Petersen, W. A., Gatlin, P., and Wingo, M.: Comparison of Raindrop Size Distribution Measurements by Collocated Disdrometers, *J. Atmospheric Ocean. Technol.*, 30, 1672–1690, <https://doi.org/10.1175/JTECH-D-12-00163.1>, 2013.

Tokay, A., Wolff, D. B., and Petersen, W. A.: Evaluation of the New Version of the Laser-Optical Disdrometer, OTT Parsivel2, *J. Atmospheric Ocean. Technol.*, 31, 1276–1288, <https://doi.org/10.1175/JTECH-D-13-00174.1>, 2014.

735 Tokay, A., D’Adderio, L. P., Marks, D. A., Pippitt, J. L., Wolff, D. B., and Petersen, W. A.: Comparison of Raindrop Size Distribution between NASA’s S-Band Polarimetric Radar and Two-Dimensional Video Disdrometers, *J. Appl. Meteorol. Climatol.*, 59, 517–533, <https://doi.org/10.1175/JAMC-D-18-0339.1>, 2020.

Vuerich, E., Monesi, C., Lanza, L. G., Stagi, L., and Lanzinger, E.: WMO field intercomparison of rainfall intensity gauges, 2009.

Wang, D.: disdrometer (b1), <https://doi.org/10.5439/1987821>, 2006.

740 Wang, D., Bartholomew, M. J., Giangrande, S. E., and Hardin, J. C.: Analysis of Three Types of Collocated Disdrometer Measurements at the ARM Southern Great Plains Observatory, United States, <https://doi.org/10.2172/1828172>, 2021.

Wood, R., Wyant, M., Bretherton, C. S., Rémillard, J., Kollias, P., Fletcher, J., Stemmler, J., Szoéke, S. de, Yuter, S., Miller, M., Mechem, D., Tselioudis, G., Chiu, J. C., Mann, J. A. L., O'Connor, E. J., Hogan, R. J., Dong, X., Miller, M., Ghate, V., Jefferson, A., Min, Q., Minnis, P., Palikonda, R., Albrecht, B., Luke, E., Hannay, C., and Lin, Y.: Clouds, Aerosols, and Precipitation in the Marine Boundary Layer: An Arm Mobile Facility Deployment, *Bull. Am. Meteorol. Soc.*, 96, 419–440, <https://doi.org/10.1175/BAMS-D-13-00180.1>, 2015.

Yuter, S. E., Kingsmill, D. E., Nance, L. B., and Löffler-Mang, M.: Observations of Precipitation Size and Fall Speed Characteristics within Coexisting Rain and Wet Snow, *J. Appl. Meteorol. Climatol.*, 45, 1450–1464, <https://doi.org/10.1175/JAM2406.1>, 2006.

745 Zhang, L., Dong, X., Kennedy, A., Xi, B., and Li, Z.: Evaluation of NASA GISS post-CMIP5 single column model simulated clouds and precipitation using ARM Southern Great Plains observations, *Adv. Atmospheric Sci.*, 34, 306–320, <https://doi.org/10.1007/s00376-016-5254-4>, 2017.

Zhu, Z., Wang, D., Jane, M., Cromwell, E., Sturm, M., Irving, K., and Delamere, J.: wbpluvio2.a1, <https://doi.org/10.5439/1338194>, 2016.

755