

## Particulate Matter Concentrations Derived from Airborne High Spectral Resolution Lidar Measurements Using Machine Learning Regression

5 Richard Ferrare<sup>1</sup>, Johnathan Hair<sup>1</sup>, Taylor Shingler<sup>1</sup>, Chris Hostetler<sup>1</sup>, Amin Nehrir<sup>1</sup>, Marta Fenn<sup>2</sup>, Amy Jo Scarino<sup>2</sup>, Sharon Burton<sup>1</sup>, Marian Clayton<sup>2</sup>, James Collins<sup>2</sup>, Laura Judd<sup>1</sup>, James Crawford<sup>1</sup>, Katherine Travis<sup>1</sup>, Travis Toth<sup>1</sup>, Pablo Saide<sup>3,4</sup>, Jose Luis Jimenez<sup>5</sup>, Pedro Campuzano-Jost<sup>5</sup>, Guy Symonds<sup>5</sup>, Richard Moore<sup>1</sup>, Luke Ziemba<sup>1</sup>, Michael Shook<sup>1</sup>, Glenn Diskin<sup>1</sup>, Joshua P. DiGangi<sup>1</sup>, Ryan Bennett<sup>6</sup>, Chia-hsiang Ho<sup>7</sup>, Lim-seok Chang<sup>8</sup>, Adisak  
10 Aiampisanuvong<sup>9</sup>, Ittipol Pawarmart<sup>10</sup>

<sup>1</sup>NASA Langley Research Center, Hampton, VA, United States

<sup>2</sup>Coherent Applications, Inc. - Psionic, LLC, Hampton, United States, United States

<sup>3</sup>Department of Atmospheric and Oceanic Sciences, University of California—Los Angeles, [United States](#)

15 <sup>4</sup>Institute of the Environment and Sustainability, University of California—Los Angeles, [United States](#)

<sup>5</sup>CIRES and Department of Chemistry, University of Colorado Boulder, Boulder, Colorado, [United States](#)

<sup>6</sup>Bay Area Environmental Research Institute, Newport News, Virginia, [United States](#)

<sup>7</sup>Ministry of Environment, ROC (Taiwan), Taipei City, Taiwan

<sup>8</sup>Air Quality Research Division, National Institute of Environmental Research, Incheon, Republic of Korea

20 <sup>9</sup>Air and Noise Quality Management Division, Environment Department, Bangkok Metropolitan Administration, Bangkok, Thailand

<sup>10</sup>Pollution Control Department, Bangkok, Thailand

*Correspondence to:* Richard A. Ferrare ([richard.a.ferrare@nasa.gov](mailto:richard.a.ferrare@nasa.gov), [r.a.ferrare@gmail.com](mailto:r.a.ferrare@gmail.com))

25

**Abstract.** We use measurements of near-surface aerosol backscatter, extinction, and depolarization acquired by four NASA Langley Research Center airborne High Spectral Resolution Lidars (HSRLs) in machine learning (ML) regression algorithms to derive concentrations of particulate matter (PM) with aerodynamic diameters less than 2.5  $\mu\text{m}$  ( $\text{PM}_{2.5}$ ), 10  $\mu\text{m}$  ( $\text{PM}_{10}$ ), and the  $\text{PM}_{2.5}/\text{PM}_{10}$  ratio. The ML regression models are trained using airborne HSRL  
30 measurements acquired over major metropolitan regions in the United States and Asia that are coincident with hourly surface  $\text{PM}_{2.5}$  and  $\text{PM}_{10}$  measurements from the EPA air quality system and similar networks in other countries. We examine several regression methods and find that exponential Gaussian Process regression (GPR) algorithms consistently give the best performance in terms of the lowest root-mean-square (RMS) errors and the highest correlations. When evaluated using surface measurements withheld from the training sets, ML models that use the  
35 HSRL near-surface measurements of aerosol backscatter and aerosol intensive properties such as depolarization, backscatter color ratio, and lidar ratio typically give the best performance with RMS differences in  $\text{PM}_{2.5}$  retrievals around 5  $\mu\text{g m}^{-3}$  and correlation coefficients above 0.8, respectively. Corresponding RMS differences and correlation coefficients for  $\text{PM}_{10}$  retrievals are 11  $\mu\text{g m}^{-3}$  and 0.7 and corresponding RMS differences and correlation coefficients for  $\text{PM}_{2.5}/\text{PM}_{10}$  are 0.17 and 0.75. This retrieval performance is achieved using airborne HSRL measurements alone  
40 and so does not depend on external knowledge of or assumptions regarding aerosol type, aerosol mass extinction efficiency, aerosol hygroscopic growth, the ratio of  $\text{PM}_{2.5}$  to  $\text{PM}_{10}$ , particle density, or relative humidity.  $\text{PM}_{2.5}$  values in the training set range from about 5 to 80  $\mu\text{g m}^{-3}$ ;  $\text{PM}_{10}$  values range from about 10 to 100  $\mu\text{g m}^{-3}$ . Accurate retrievals

of PM outside these ranges would require commensurate training data. We present examples of PM retrievals in the United States as well as Asia when HSRL measurements were acquired when the aircraft flew systematic “raster-scan” patterns for several hours over major urban areas. We show that these PM<sub>2.5</sub> retrievals are in good agreement with PM<sub>2.5</sub> derived from coincident airborne *in situ* measurements near the surface as well as aloft. We describe also how the distribution of PM<sub>2.5</sub> varies with aerosol type and altitude over these regions. We use the HSRL measurements of aerosol extinction and retrievals of surface PM<sub>2.5</sub> along with HSRL retrievals of aerosol type to derive estimates of the fine mode aerosol mass extinction efficiency (MEE<sub>f</sub>) for major aerosol types identified by an updated HSRL aerosol classification method. MEE<sub>f</sub> ranges from about  $2.6 \pm 0.5 \text{ m}^2 \text{ g}^{-1}$  for maritime aerosol to  $5.0 \pm 0.7 \text{ m}^2 \text{ g}^{-1}$  for smoke. These estimates of MEE<sub>f</sub> are also in good agreement with values derived from airborne *in situ* measurements. We also discuss how this methodology may be applied to measurements from the Atmospheric Lidar (ATLID) on the EarthCARE satellite.

## 1 Introduction

Aerosol particles, especially particulate matter with aerodynamic diameters less than 2.5  $\mu\text{m}$  (PM<sub>2.5</sub>), have been linked to various respiratory and cardiopulmonary diseases and are reported to relate to ~2 to 4 million premature deaths per year globally (Liu et al., 2005a; Hoff and Christopher, 2009; Silva et al., 2013; Diao et al., 2019; Strosnider et al., 2019). Smoke from wildfires is of particular concern as recent animal toxicological studies suggest that PM<sub>2.5</sub> from wildfires is more toxic than equal doses from other sources such as ambient pollution (Aguilera et al., 2021; Zhang et al., 2023; Wegesser et al., 2009; Kim et al., 2018). In addition, although PM<sub>2.5</sub> in the US has decreased over the last few decades, PM<sub>2.5</sub> from wildfires is projected to increase due to climate change (Zhang et al., 2023); in North America climate change contributed to about 15000 wildfire particulate deaths from 2006-2020 (Law et al., 2025).

Surface PM<sub>2.5</sub> concentrations are monitored by the U.S. Environmental Protection Agency (EPA) and similar agencies in other countries for regulatory purposes. However, the low spatial coverage of these surface stations is problematic for detecting and monitoring PM<sub>2.5</sub> in portions of the United States as well as in foreign countries (e.g., Manila in the Philippines). As an example, since surface stations tend to be in urban areas and far from wildland fires, people living outside the vicinity of an EPA Air Quality System (AQS) monitor (defined by 5 km radius) were subject to 36% more smoke impact days compared to people living nearby such sensors (Zhang et al., 2023). In addition, surface measurements alone often cannot separate PM<sub>2.5</sub> from fire smoke from other sources (Zhang et al., 2023).

Given the limited coverage of surface measurements, monitoring PM<sub>2.5</sub> from space has been investigated extensively, primarily by using aerosol optical thickness (AOT) derived from spaceborne passive sensor measurements (Chu et al., 2003; Wang and Christopher, 2003; Van Donkelaar et al., 2006; Lee et al., 2012; Xie et al., 2015). These efforts have largely focused on developing correlative relationships between ground-based *in situ* PM<sub>2.5</sub> (mass per volume) and satellite AOT (unitless, e.g., (Hoff and Christopher, 2009) and references therein). Using AOT measurements from satellites to estimate PM<sub>2.5</sub> takes advantage of the large spatial and temporal coverage provided by spaceborne passive sensors. However, since AOT retrieved from spaceborne satellite sensors is a column integrated property, in regions

where AOT variations are associated with aerosols above the surface layer, such as elevated aerosol plumes above the planetary boundary layer (PBL),  $PM_{2.5}$  (which is a near-surface property) and AOT can be weakly- or un-correlated (e.g., (Toth et al., 2014; Toth et al., 2019)).

Several studies have used chemical transport models, or CTMs (e.g., (Van Donkelaar et al., 2015; Van Donkelaar et al., 2016)), to improve correlations between AOT and  $PM_{2.5}$  and to account for variability in the aerosol vertical distribution. Such models can also specifically simulate  $PM_{2.5}$  associated with fire smoke thereby enabling epidemiological studies that cover both urban and rural populations. Assimilating satellite AOT data has become increasingly common, significantly enhancing AOT analyses and short-term forecasting (e.g., (Zhang et al., 2014; Sessions et al., 2015)). However, simulations of  $PM_{2.5}$  continue to be inadequate (e.g., (Reid, 2016)). Uncertainties in such studies are unavoidable due to uncertainties in the assimilated AOTs and in CTM-based aerosol vertical distributions, as models do not routinely assimilate lidar profiles that can be used for constraining modeled aerosol vertical distributions. In addition, nighttime AOTs are currently unavailable from passive remote sensing satellite retrievals, although efforts are underway to achieve this (e.g., (Wang et al., 2023)). Attempts to use multisource AOT products (Tang et al., 2019; Liu et al., 2022) or use nighttime light imagery to retrieve nighttime  $PM_{2.5}$  concentrations are usually limited by moonlight conditions and artificial light sources so that study areas are restricted (Wang et al., 2023).

Lidar measurements can help alleviate these issues. Through their ability to provide the fine scale vertical structure of aerosols as well as by constraining aerosol type (Burton et al., 2012), lidar measurements are very helpful for evaluating and improving models. Ground-based lidars such as those operated in the EARLINET (Pappalardo et al., 2014), ADNET (Sugimoto et al., 2016), and MPLNET (Welton et al., 2018) networks are valuable for providing data for climatological studies, long-range transport events, and model evaluation. Lidar measurements of aerosols at or near the surface avoid uncertainties associated with using column aerosol measurements (i.e., AOT) to infer aerosol concentrations near the surface. Lidar measurements of aerosol extinction near the surface have been used to help derive estimates of surface  $PM_{2.5}$  concentrations. For example, Li et al. (2017) used an empirical model based on the regression between  $PM_{2.5}$  and the near-surface backscatter measured by ceilometers to derive surface  $PM_{2.5}$  at a few selected sites. Coincident ground-based lidar and surface  $PM_{2.5}$  measurements were also used to derive a linear model to relate aerosol extinction to surface  $PM_{2.5}$  concentration (Xiang et al., 2020).

Another method, which has been used with space-based Cloud-Aerosol Lidar with Orthogonal Polarization (CALIOP) measurements, uses a bulk-mass-modeling approach whereby  $PM_{2.5}$  is derived by dividing the CALIOP retrieved near-surface extinction coefficient by the product of the aerosol mass extinction efficiency (MEE) (Hand and Malm, 2007), the scattering enhancement factor [ $f(RH)$ ] associated with hygroscopic growth of aerosol particles (Hänel, 1976), and the ratio of  $PM_{2.5}$  to  $PM_{10}$  (Toth et al., 2014; Toth et al., 2019; Toth et al., 2022). Comparisons of surface  $PM_{2.5}$  derived in this manner with daily-averaged surface measurements of  $PM_{2.5}$  have shown some success and indicate long-term spatial and temporal variability of  $PM_{2.5}$  over the USA (Toth et al., 2022). While this methodology generally provides better estimates of  $PM_{2.5}$  than those derived using only column AOT and PBL heights, such estimates still have

relatively large uncertainties and modest correlations due to assumptions regarding these parameters as well as the uncertainty in the near-surface aerosol extinction retrieved from backscatter lidar measurements. These conversion factors typically require some knowledge of the aerosol properties which can vary significantly depending on aerosol type.

Various other methods have used CALIOP measurements to retrieve estimates of  $PM_{2.5}$ . One method used measurements of near-surface aerosol extinction, Aerosol Robotic Network (AERONET) sun photometer retrievals of particle sizes, and assumptions regarding aerosol scattering enhancement factors, particle extinction efficiencies and densities (Ma et al., 2020). Another method has used CALIOP measurements of AOT at various altitude levels, several meteorological variables provided by the Modern-Era Retrospective analysis for Research and Applications, Version 2 (MERRA-2) model, and estimates of the PBL height provided by the ERA-5 model. These data were used with multiple machine learning methods trained using hourly mean  $PM_{2.5}$  concentrations from surface measurements to estimate  $PM_{2.5}$  concentrations at the surface and aloft (Chen et al., 2022). [This previous study found that the combination of meteorological factors \(e.g. air temperature, pressure, relative humidity, wind speed\) was more important than layer AOT in retrieving  \$PM\_{2.5}\$ .](#) This result is likely due to the difficulty in using column AOT to infer surface  $PM_{2.5}$  concentrations as well as the uncertainty in CALIOP retrievals of AOT. In addition, 1064-nm backscatter lidar data from the space-based NASA Cloud-Aerosol Transport System (CATS) and the Goddard Earth Observing System (GEOS) model were used to derive surface  $PM_{2.5}$  (Matus et al., 2025). The CATS lidar data were combined with an ensemble of aerosol profiles from the GEOS Aerosol Data Assimilation System (GAAS). Assimilating the CATS lidar data into the GEOS atmospheric model significantly improved the model's capability to represent the vertical distribution of aerosols.

Elastic backscatter lidars such as CALIOP and CATS have a basic limitation when retrieving AOT and profiles of aerosol extinction. Such lidars measure total attenuated backscatter, which is a combination of backscatter and extinction from higher parts of the profile. Consequently, to derive particulate backscatter, the extinction-to-backscatter ratio, which is also known as the “lidar ratio”, [Young, 1995; Omar et al., 2009] must be assumed and/or additional external constraint(s) must be provided. Some methods assume a single, fixed lidar ratio (Xiang et al., 2020) while others, such as that used for CALIOP and CATS, choose fixed lidar ratios that depend on inferences of aerosol type (Omar et al., 2009). Uncertainties in the lidar ratio are the largest source of systematic error in CALIOP retrievals of AOT and aerosol extinction profiles (Winker et al., 2009; Schuster et al., 2012; Rogers et al., 2014). These errors are often largest near the surface, which is particularly problematic for estimating surface PM concentrations. Combining or assimilating the measurements from these lidars with models can help reduce these uncertainties as model simulations of aerosol types can provide estimates of these lidar ratios.

Alternatively, High Spectral Resolution Lidars (HSRLs), such as the airborne HSRL systems from the NASA Langley Research Center (LaRC) and the Atmospheric Lidar (ATLID) on the EarthCARE satellite (Wehr et al., 2023), are particularly valuable because they provide direct measurements of near-surface calibrated aerosol backscatter and aerosol extinction without additional constraints or assumptions to account for attenuation by overlying aerosols. Also,

HSRL systems provide measurements of aerosol intensive properties that provide valuable information regarding aerosol type (e.g. smoke, pollution, dust, etc.)(Burton et al., 2012; Groß et al., 2013; Floutsi et al., 2024). During several NASA field missions designed to study air quality, airborne HSRLs have provided profiles of aerosol backscatter, extinction, and depolarization over major metropolitan regions in the United States and Asia. These systems use the HSRL technique to independently retrieve aerosol (and tenuous cloud) extinction and backscatter (Shipley et al., 1983; Grund and Eloranta, 1991; She et al., 1992a) without having to assume the aerosol type or aerosol extinction-to-backscatter ratio. During these missions, these lidars were deployed from aircraft that flew at altitudes ranging from 9 to 13 km and measured profiles below the aircraft thereby providing aerosol profiles near the surface.

LaRC airborne HSRL measurements of aerosol extinction and inferences of aerosol type have been used in an algorithm that associates chemical components with aerosol types inferred from the HSRL measurements to derive estimates of surface  $PM_{2.5}$  (Meskhidze et al., 2021). In this Creating Aerosol Types from CHemistry (CATCH) algorithm (Dawson et al., 2017), aerosol composition is derived for each HSRL retrieved aerosol type from GEOS-chem model aerosol types based on the aerosol properties measured by the HSRL. The CATCH algorithm links the HSRL inferences of aerosol type with specific aerosol chemical composition and speciation represented by the GEOS-Chem model. The algorithm was applied to airborne data collected over South Korea (Sutherland et al., 2023) as well as several regions in the United States (Sutherland and Meskhidze, 2025; Meskhidze et al., 2021). Comparisons between the derived surface  $PM_{2.5}$  values and surface measurements from the EPA Air Quality System showed mean absolute errors (MAE) of about  $10 \mu g m^{-3}$  (Sutherland and Meskhidze, 2025). These results also showed the critical importance of accurate PBL heights in such retrievals since discrepancies in aerosol composition could be attributed to layers of different aerosol types aloft compared to those near the surface; differences in estimates of the PBL height were found to lead to about 20% variability in the MAE (Sutherland and Meskhidze, 2025). Another approach uses multiwavelength HSRL aerosol measurements in an inversion algorithm to derive aerosol volume concentration profiles;  $PM_{2.5}$  mass concentration profiles are then estimated by integrating the volume concentration of particles with diameters less than  $2.5 \mu m$  and applying an assumed aerosol density (Zhou et al., 2025). Initial results showed qualitative agreement with ground station measurements; however, the particle density that must be assumed can vary over a wide range of values and depends on several factors (Pitz et al., 2008; Hasheminassab et al., 2014).

Here we present an alternative method of deriving PM concentrations that uses airborne HSRL measurements in a machine learning (ML) regression algorithm to derive  $PM_{2.5}$  and  $PM_{10}$  concentrations. Unlike these previous methods (Meskhidze et al., 2021; Sutherland et al., 2023; Sutherland and Meskhidze, 2025) that have used airborne HSRL data to derive surface  $PM_{2.5}$  concentrations, this method does not require the HSRL qualitative inferences of aerosol type or aerosol chemical composition information provided by models. It also does not require assumptions regarding the aerosol mass scattering and absorption efficiencies, hygroscopic growth factor, the ratio of scattering by fine to coarse mode particles, or particle density. Instead, this new approach takes advantage of machine learning algorithms applied to numerous, detailed, near-surface airborne HSRL measurements of aerosol properties acquired simultaneously with surface  $PM_{2.5}$  and  $PM_{10}$  measurements; such algorithms have used statistical methods to infer surface PM from lidar (Chu et al., 2013; Chu et al., 2015; Ma et al., 2021) and passive sensors (Fang et al., 2021; Lary et al., 2015; Lee et

al., 2021). This approach is somewhat similar to that used to retrieve estimates of cloud condensation nuclei and aerosol absorption using airborne HSRL data (Redemann and Gao, 2024).

We first discuss the airborne HSRL measurements acquired during these field missions. Next, we describe how these data are used in ML regression algorithms to derive surface  $PM_{2.5}$  and  $PM_{10}$  and show how these retrievals depend on the various aerosol parameters measured by these lidars. We then show examples of these PM retrievals using airborne HSRL data collected during recent NASA field missions. We also discuss the uncertainties in the retrievals and the impacts of the training data on the PM values derived from these regression models. We show how the  $PM_{2.5}$  varies with aerosol type as derived from a modified aerosol classification algorithm applied to the HSRL aerosol measurements. We then use the retrieved  $PM_{2.5}$  and  $PM_{10}$  values in conjunction with the HSRL measurements of aerosol extinction to derive estimates of fine mode mass extinction efficiency for these aerosol types. Finally, we discuss the potential use of these machine learning regression techniques for retrieving  $PM_{2.5}$  from satellite lidars such as the ATLID instrument on EarthCARE (Wehr et al., 2023).

## 2 Methodology

### 2.1 Airborne HSRL Measurements

Our methodology takes advantage of a unique set of airborne HSRL measurements acquired by four airborne HSRL systems developed at NASA Langley Research Center. These lidars include HSRL-1 (Hair et al., 2008), HSRL-2 (Burton et al., 2018; Ferrare et al., 2023), DIAL/HSRL (Browell, 1989; Hair et al., 2008), and HALO (Carroll et al., 2022; Barton-Grimley et al., 2022). Each of the airborne lidars employs the HSRL technique at 532 nm to independently retrieve both aerosol extinction and backscatter (Grund and Eloranta, 1991; She et al., 1992b; Shipley et al., 1983) without *a priori* assumptions regarding aerosol type or extinction-to-backscatter ratio. The HSRL technique measures both total attenuated backscatter and attenuated molecular backscatter which are used to directly derive both aerosol extinction and backscatter and consequently the lidar ratio. The ability of HSRL to independently measure extinction and backscatter is a huge advantage over standard backscatter lidars. By measuring the ratio of the total (molecular + particulate) to the molecular signal, the HSRL technique permits measurements of calibrated, unattenuated aerosol backscatter. The vertical derivative of the attenuated molecular backscatter signal measured by HSRL provides the aerosol extinction profile (Hair et al., 2008). HSRL-2 also uses the HSRL technique to measure aerosol backscatter and extinction at 355 nm. These lidars employ the standard elastic backscatter lidar technique to measure aerosol backscatter at 1064 nm. All these lidars measure particulate depolarization at 532 and 1064 nm; HSRL-2 also measures particulate backscatter, extinction, and depolarization at 355 nm. Aerosol and cloud measurement parameters for these lidars are summarized in Table 1.

Additional products are derived from the aerosol profiles measured by these lidars. Backscatter color ratios and Angstrom exponents are derived from the ratio of aerosol backscatter at two wavelengths; spectral depolarization ratios are similarly derived from the ratio of particulate depolarization at two wavelengths. The lidar ratio is also derived from these measurements. Mixed layer heights (MLHs), which are often associated with sharp gradients in

aerosol backscatter profiles, are also derived from these data; these heights have been found to be in good agreement with boundary layer heights (BLHs) derived from radiosondes (Scarino et al., 2014). Aerosol type is derived using a classification algorithm to interpret the information about aerosol physical properties indicated by the measured aerosol intensive parameters<sup>1</sup> (Burton et al., 2012).

**Table 1. Measurement parameters, wavelengths, resolutions, and precision for aerosol products measured in the nadir direction by the airborne HSRL systems discussed in the text. Horizontal resolutions are based on aircraft flying at approximately 200 m/s. All the airborne HSRL systems measure the parameters at the wavelengths shown in black; the additional parameters measured by HSRL-2 at 355 nm are shown in violet.**

| Parameter                                | Wavelength (nm) | Approximate Precision                 | Horizontal Resolution | Vertical Resolution |
|------------------------------------------|-----------------|---------------------------------------|-----------------------|---------------------|
| Aerosol Backscatter                      | 355/532/1064    | 0.2 Mm <sup>-1</sup> sr <sup>-1</sup> | 2 km                  | 30 m                |
| Aerosol Extinction                       | 355/532         | 0.01 km <sup>-1</sup>                 | 12 km                 | 300 m               |
| Aerosol Depolarization                   | 355/532/1064    | 0.01                                  | 2 km                  | 30 m                |
| Aerosol Optical Depth                    | 355/532         | 0.01                                  | 12 km                 |                     |
| Aerosol Type (e.g., marine, dust, smoke) | N/A             | Qualitative                           | 12 km                 | 300 m               |
| Mixed Layer Heights                      | N/A             | 30 m                                  | 2km                   | 30m                 |

A significant advantage of the HSRL technique is that it does not rely on apportioning part of the measurement profile for calibration (Hair et al., 2008) unlike standard elastic backscatter lidars that must assume negligible aerosol in a calibration region. As described in detail by Hair et al. (2008), through careful system design and operations, the channel gain ratios and filter transmission are accurately measured to enable this self-calibration. All the depolarization channels and the aerosol and molecular measurements at 532 nm are self-calibrating, while the 1064 nm backscatter measurement and the 355 nm HSRL-2 measurements take advantage of the calibrated HSRL measurement at 532 nm. The overall systematic error associated with the backscatter and depolarization calibration is estimated to be less than 2-3%. Under typical conditions, the total systematic error for extinction is estimated to be less than 0.01 km<sup>-1</sup> at 532 nm. The random errors for all aerosol products are typically less than 10% for the backscatter and depolarization ratios (Hair et al., 2008). A study designed to validate the HSRL extinction coefficient profiles (2009) found that the HSRL extinction profiles are within the typical state-of-the-art systematic error at visible wavelengths (Schmid et al., 2006). Column AOT values derived from HSRL-2 data were found to be in excellent agreement with coincident measurements from AERONET (e.g. (Sawamura et al., 2017)). LaRC airborne HSRL measurements have been used to assess WRF-Chem regional model representations of aerosol backscatter and extinction profiles (Fast et al., 2011;

<sup>1</sup> Extensive optical parameters, such as backscatter, extinction, and optical depth depend on the amount (concentration) and type (size, composition, shape) of aerosol/cloud particles. Intensive properties, such as depolarization ratios, color ratios, Angstrom exponents, and extinction/backscatter ratio (“i.e. “lidar ratio”) depend only on the type and not on the quantity or concentration.


Fast et al., 2014; Saide et al., 2022) as well as evaluate operational (Rogers et al., 2011) and advanced research-type (Burton et al., 2010; Mcpherson et al., 2010; Josset et al., 2011) CALIOP aerosol profiles, advanced Moderate Resolution Imaging Spectroradiometer (MODIS) retrievals of AOT (Munchak et al., 2013), extinction profiles derived from airborne in situ measurements (Ziemba et al., 2013b), and AOT derived from other remote sensors (Kassianov et al., 2010; Knobelspiesse et al., 2011; Shinozuka et al., 2013).

## 2.2 Airborne HSRL Data Sets

The airborne HSRL systems discussed above have acquired data over several major cities in the United States including Washington D.C., Baltimore, Houston, Los Angeles, Chicago, and New York City, as well as major cities in Asia including Seoul (South Korea), Manila (Philippines), Tainan-Kaohsiung (Taiwan), and Bangkok (Thailand) during several NASA field missions conducted since 2010 as shown in Figure 1. These HSRL measurements were often acquired when the aircraft flew systematic “raster-scan” patterns for several hours and often repeated multiple times per day. These flight patterns provided the opportunity for the airborne HSRL to observe the spatial and temporal variabilities in distributions of aerosol backscatter, aerosol extinction, and AOT over these cities. For the missions considered in the study, the HSRL systems were deployed from several different aircraft including the NASA King Air B200, G-III, G-V, and DC-8.


The raster patterns flown over urban areas in many of these field missions have enabled these systems to acquire data coincident and collocated with surface  $PM_{2.5}$  and  $PM_{10}$  sensors thereby providing the opportunity to assess how well these surface concentrations can be inferred from airborne remote sensing measurements. Hourly surface  $PM_{2.5}$  and  $PM_{10}$  data from the US EPA AirNow network (Environmental Protection Agency, 2017; Toth et al., 2022) as well as similar networks in South Korea, Taiwan, and Thailand were used to examine the relationships among surface  $PM_{2.5}$  concentrations, AOT, and near-surface aerosol extinction. The PM measurements are acquired via several instruments that follow the Federal Reference Method (FRM; gravimetric analysis) and Federal Equivalent Method (FEM; tapered element oscillating microbalance [TEOM] and beta gauge analyses, high volume sampler) regulations (Environmental Protection Agency, 1997; Noble et al., 2001). Uncertainties in EPA  $PM_{2.5}$  are summarized in (Toth et al., 2019); uncertainties in  $PM_{10}$  are described in (Pokhariyal et al., 2019).

Figure 2 shows examples of HSRL-2 measurements over the New York City metropolitan region on July 26, 2023, when HSRL-2 was deployed on the NASA G-V aircraft. Figures 2a and 2d show that the vertical distribution of aerosol backscatter (532 nm) varied considerably between the morning and afternoon legs in this pattern. Figure 2a shows the highest aerosol backscatter was located within 100-200 m above the surface. In contrast, Figure 2d shows a large increase in aerosol backscattering between 1-1.5 km above the surface during the afternoon and the presence of small cumulus clouds at the top of the mixed layer. Figures 2b and 2e show near-surface aerosol extinction (~300 m thick layer) along this same flight leg for the morning and afternoon flight legs, respectively. Similarly, Figures 2c and 2f show AOT for the morning and afternoon legs. These figures illustrate that the spatial and temporal variations in AOT and near-surface aerosol extinction were different on this day.

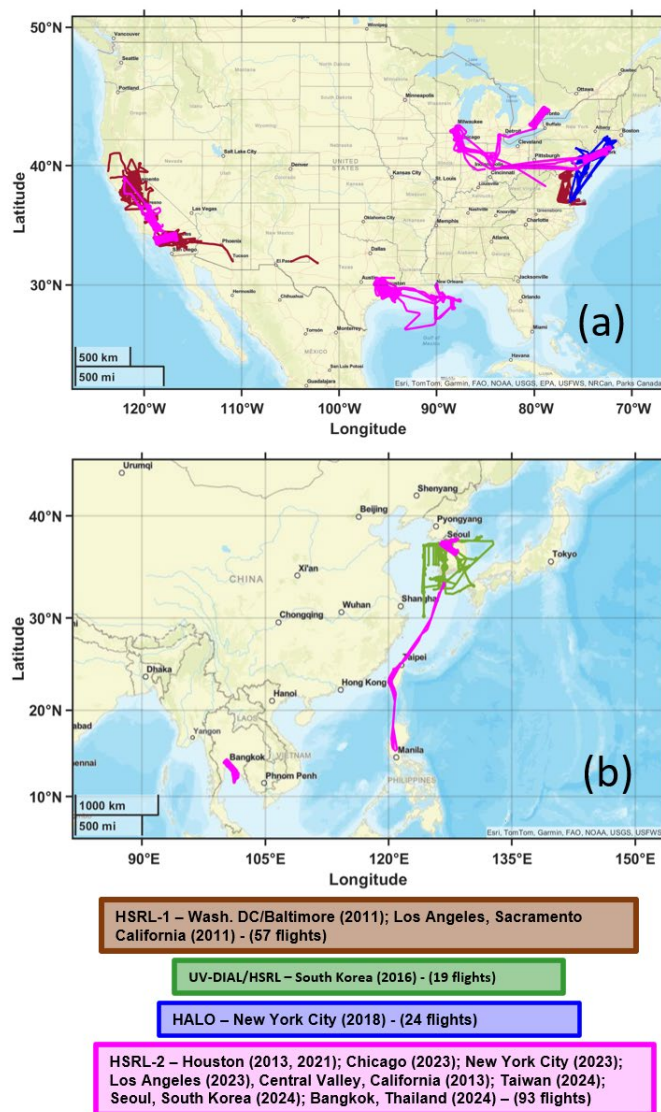


**Figure 1. Locations and dates of airborne HSRL measurements over major urban areas in the USA (a) and Asia (b) used in this study. The different colors represent the four different airborne HSRL systems that provided the data used here. Data from 193 flights that occurred between 2010–2024 are used to develop ML algorithms for retrieving PM concentrations. The number of flights conducted by each lidar system is shown at the bottom of the figure.**

Figure 3a shows airborne HSRL measurements of AOT (532 nm) acquired within 10 kilometers and 15 minutes of the surface PM<sub>2.5</sub> measurements in the urban regions shown in Figure 1. The overall lack of correlation between AOT and surface PM<sub>2.5</sub> concentrations (correlation coefficient  $R \sim 0$ ) is most likely due to differences in the vertical distribution of aerosols among these locations. Elevated aerosol layers were present in all locations except the California Central Valley, where the AOT typically was concentrated in shallow layers near the surface. These elevated aerosol layers impact AOT but not surface aerosol concentrations. This result highlights the difficulty in using column AOT from passive sensors to derive PM<sub>2.5</sub> without accurate knowledge of the vertical distribution of aerosols (Toth et al., 2014; Toth et al., 2019).

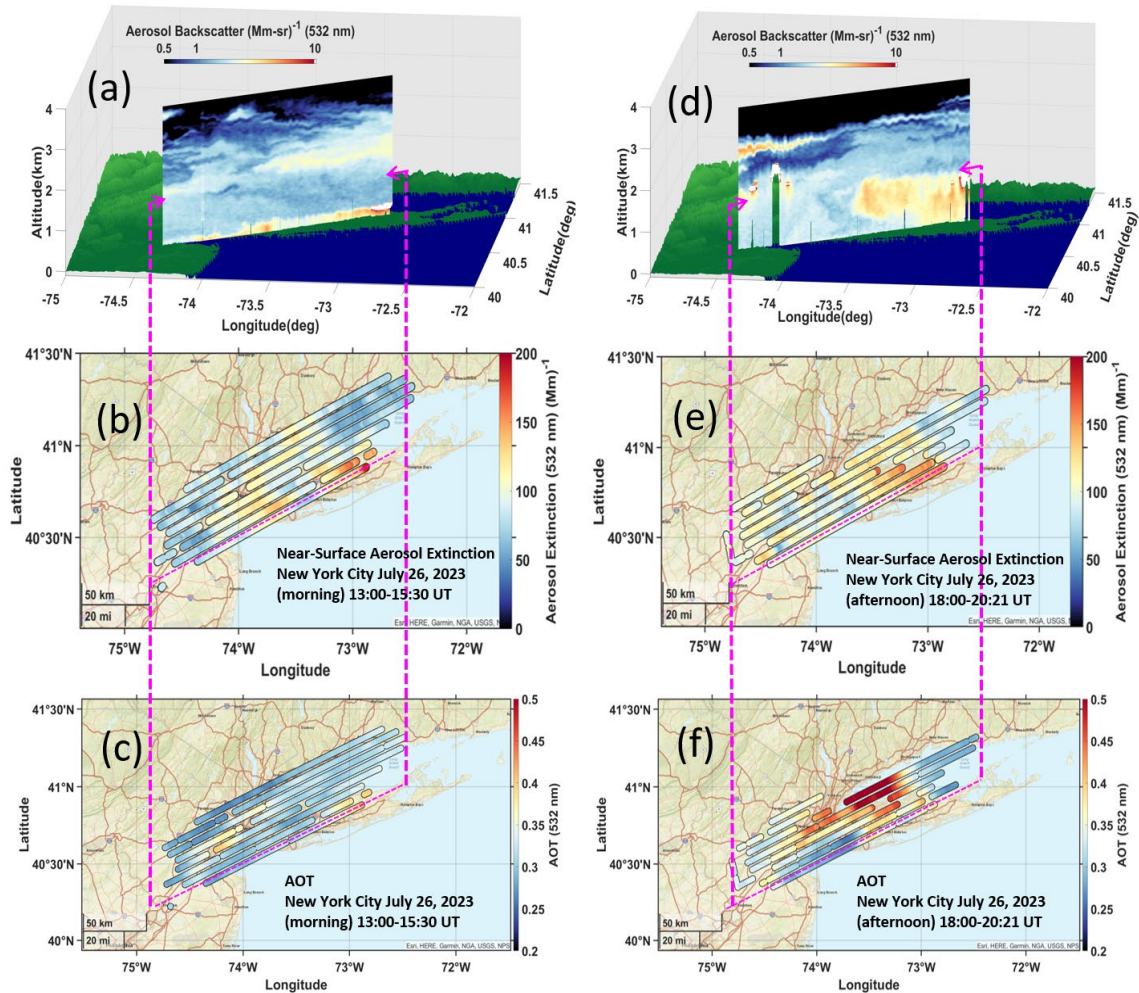

**Figure 2.** (a) aerosol backscatter profiles, (b) near-surface aerosol extinction, and (c) AOT measured by airborne HSRL-2 over New York City during the morning of July 26, 2023. (d-f) show the same during the afternoon. The dotted lines in (b), (c), (e), (f) show the location of the flight legs for the aerosol backscatter profiles shown in (a) and (d).

Various attempts have been made using boundary layer heights (Liu et al., 2005b; Al-Saadi et al., 2008; Chen et al., 2017; Wang et al., 2019; Handschuh et al., 2022) or aerosol layer heights (Chu et al., 2013; Chu et al., 2015) in conjunction with AOT to improve estimates of surface PM<sub>2.5</sub>. Scaling the AOT by the MLH that was derived from the HSRL measurements (Scarino et al., 2014) did not significantly improve the overall correlation because in those locations with elevated aerosol layers much of the AOT was located above the MLH. In contrast to Figure 3a, Figure 3b shows a much better correlation between HSRL measurements of near-surface aerosol backscatter and surface PM<sub>2.5</sub> concentrations for these same datasets. Near-surface aerosol backscatter represents aerosol backscatter between approximately 60 to 100 m above the surface. For these airborne HSRL datasets, Figure 3b indicates that the measurements of near-surface aerosol backscatter are more directly related to surface PM<sub>2.5</sub> concentrations than column AOT.

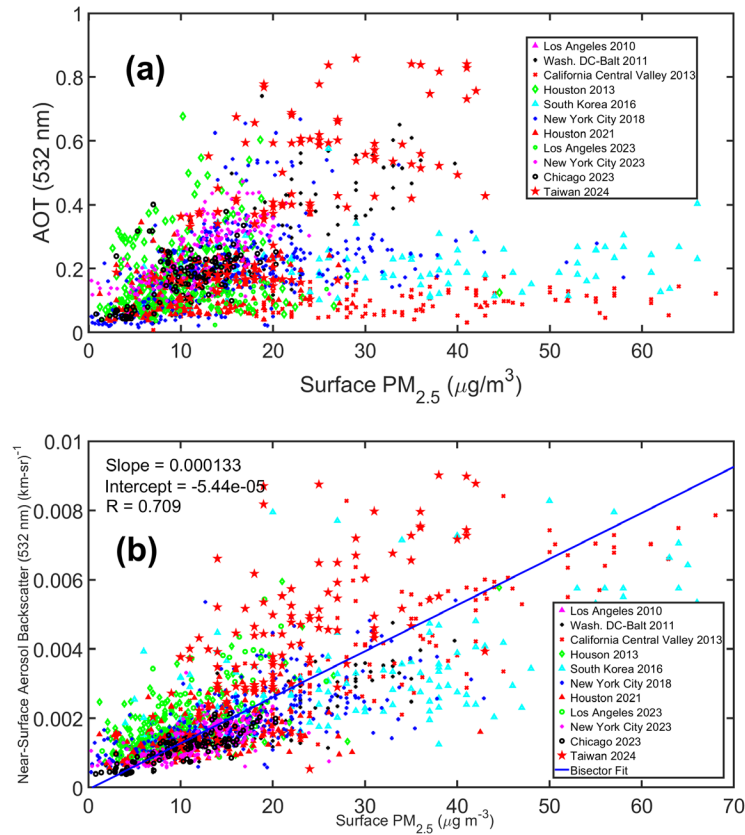

**Figure 3. Surface network measurements of  $PM_{2.5}$  over major metropolitan regions versus airborne HSRL measurements of a) AOT and b) near-surface aerosol backscatter. A linear bisector best fit line is shown in (b).**

### 2.3 Machine Learning Regression Algorithms

Based on the results shown in Figure 3b, we use airborne HSRL measurements of near-surface aerosol properties to retrieve surface  $PM_{2.5}$  and  $PM_{10}$ . For this study, we use ML regression algorithms to estimate  $PM_{2.5}$  and  $PM_{10}$  concentrations and  $PM_{2.5}/PM_{10}$  ratios using these airborne HSRL measurements. Unlike previous methods that have used airborne HSRL data to derive surface  $PM_{2.5}$  concentrations (Meskhidze et al., 2021; Sutherland et al., 2023; Sutherland and Meskhidze, 2025), this method does not require the HSRL qualitative inferences of aerosol type or aerosol chemical composition information provided by models. We instead take advantage of the large database of coincident HSRL and surface  $PM_{2.5}$  measurements and machine learning methodology that has used statistical methods to infer surface  $PM_{2.5}$  from lidar (e.g. (Ma et al., 2021; Fang et al., 2021; Chen et al., 2022)) and passive sensors (e.g. (Lary et al., 2015; Lee et al., 2021; Wang et al., 2023)). We use coincident airborne HSRL and surface hourly PM data collected during 193 flights conducted between 2010 and 2024 over major metropolitan regions in the United States (New York City, Houston, Chicago, Los Angeles, Washington D.C., Baltimore) and Asia (Taiwan, South

Korea, Thailand) (recall Figure 1) to explore various machine learning regression models for deriving surface PM concentrations.

We use hourly surface PM measurements from the surface networks described earlier to train machine learning algorithms to retrieve surface PM concentrations from the HSRL measurements. We compute the average of HSRL measurements within 10 kilometers and 15 minutes of each surface network measurement. The average aerosol backscatter and depolarization values are computed using data within 200 m of the surface and average aerosol extinction values are computed using data within 400 m of the surface. The larger vertical distance is used for aerosol extinction because it has coarser vertical resolution and does not extend as close to the surface as aerosol backscatter and depolarization (recall Table 1). Using the average of the near-surface HSRL measurements within these distance and time constraints rather than each individual HSRL measurement reduces the uncertainties in the HSRL data at each point and reduces number of points used in the training set. This reduction in the number of points consequently reduces the computer time required for subsequent ML regression computations. There are 2382 of these coincident HSRL-surface PM network sets of measurements; approximately 1900 (~80%) of these sets were randomly chosen to train the regression algorithms. The remaining sets are used to test these algorithms.

We use Matlab regression learner software to explore a variety of various regression methods including linear, random forest, ensemble, neural network, Gaussian process, kernel, and support vector machine. This software enables the user to explore various optimization techniques for these various methods. A five-fold cross-validation method was used to protect against overfitting. For each fold a model is trained using the out-of-fold observations, model performance is assessed using the in-fold data, and the average validation error is computed over all folds. This provides a good estimate of the predictive accuracy of the full data set, which is used to train the final model. The remaining coincident measurements (~ 500 or 20%) that were withheld from the training and cross-validation were then used to test these algorithms.

Exponential Gaussian Process Algorithms consistently give the best performance in terms of lowest root-mean-square errors and highest correlations than the other methods. Gaussian process regression (GPR) models are nonparametric, kernel-based probabilistic models based on the assumption that the function to be learned is drawn from a Gaussian process. The GPR model uses Bayesian inference to learn the distribution that is most likely to have generated the data (Williams and Rasmussen, 2006)<sup>2</sup>. Gaussian process regression has the advantage of providing uncertainty estimates along with point predictions thereby providing a means to quantify the confidence in the predictions. A limitation is that Gaussian process regression can be computationally expensive, especially for large datasets<sup>3</sup>.

---

<sup>2</sup> see also

[https://apmonitor.com/pds/index.php/Main/GaussianProcessRegression#:~:text=Gaussian%20process%20regression%20\(GPR\)%20uses,specified%20as%20a%20kernel%20object](https://apmonitor.com/pds/index.php/Main/GaussianProcessRegression#:~:text=Gaussian%20process%20regression%20(GPR)%20uses,specified%20as%20a%20kernel%20object)

<sup>3</sup> <https://medium.com/@pinakdata/unlocking-the-power-of-gaussian-processes-theory-applications-and-insights-081d0b6a0abc>

We examined the performance of the exponential GPR models using various combinations of airborne HSRL measurements. Table 2 lists the variables used for each of these different regression models. For example, Model 1 uses only HSRL measurements of AOT (532 nm) whereas Model 11 used a combination of measured near-surface aerosol properties (backscatter, depolarization, lidar ratio) at three wavelengths. As shown in Table 2, most of the model regressions use only these airborne HSRL measurements, although a few of the models also included surface relative humidity provided by ERA5 hourly reanalyses<sup>4</sup> (Hersbach et al., 2020); these reanalysis data are gridded to a regular latitude-longitude grid of 0.25 degrees. Since surface PM measurements refer to dry aerosol mass and HSRL aerosol measurements are made at ambient RH, relative humidity is added to these models to assess the impact of including surface relative humidity. Models 7-11 include the lidar ratio and either aerosol backscatter or aerosol extinction since the lidar ratio is the ratio of aerosol extinction to aerosol backscatter.

**Table 2. Parameters used in the various exponential GPR ML models.**

| Parameter                                     | Model |   |   |   |   |   |   |   |   |    |    |    |
|-----------------------------------------------|-------|---|---|---|---|---|---|---|---|----|----|----|
|                                               | 1     | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 |
| AOT (532 nm)                                  | X     | X |   |   | X | X |   |   |   |    |    |    |
| Mixed Layer Height                            |       | X |   |   |   |   |   |   |   |    |    |    |
| Aerosol Backscatter (532 nm)                  |       |   | X |   |   |   | X |   | X |    | X  |    |
| Aerosol Extinction (532 nm)                   |       |   |   | X | X | X |   | X |   | X  |    |    |
| Aerosol Depolarization (532 nm)               |       |   |   |   | X | X | X | X | X | X  | X  |    |
| Lidar Ratio (532 nm)                          |       |   |   |   |   |   | X | X | X | X  | X  |    |
| Backscatter Color Ratio (532/1064 nm)         |       |   |   |   |   |   | X | X | X | X  | X  |    |
| Ratio of Aerosol Depolarization (532/1064 nm) |       |   |   |   |   |   | X | X | X | X  | X  |    |
| Aerosol Backscatter (355 nm)                  |       |   |   |   |   |   |   |   |   |    |    | X  |
| Aerosol Extinction (355 nm)                   |       |   |   |   |   |   |   |   |   |    |    | X  |
| Aerosol Depolarization (355 nm)               |       |   |   |   |   |   |   |   |   |    |    | X  |
| Lidar Ratio (355 nm)                          |       |   |   |   |   |   |   |   |   |    | X  | X  |
| Backscatter Color Ratio (355/532 nm)          |       |   |   |   |   |   |   |   |   |    | X  |    |
| Ratio of Aerosol Depolarization (355/532 nm)  |       |   |   |   |   |   |   |   |   |    | X  |    |
| Relative Humidity (from ERA5 model)           |       |   |   |   |   | X |   |   | X | X  |    |    |


Figure 4 shows examples of the performance for deriving surface PM<sub>2.5</sub> from various exponential GPR regression models that used airborne HSRL measurements when compared to surface network measurements of PM<sub>2.5</sub>. The plots in Figure 4 also show correlation coefficient, root-mean-square-error (RMSE) and mean absolute error (MAE). Recall that these results were derived using test data withheld from the training and cross-validation sets. As expected from

<sup>4</sup> Copernicus Climate Change Service, Climate Data Store, (2023): ERA5 hourly data on single levels from 1940 to present. Copernicus Climate Change Service (C3S) Climate Data Store (CDS), DOI: [10.24381/cds.adbb2d47](https://doi.org/10.24381/cds.adbb2d47) (Accessed on 19-Nov-2024)

the results shown in Figure 4, Model 1, which uses only AOT in the GPR ML regression model, performs poorly with a large RMSE error and a low correlation coefficient (Fig. 4a). The poor correlation between AOT and surface PM<sub>2.5</sub> concentrations (correlation coefficient (R)=0.37) is most likely due to differences in the vertical distribution of aerosols among these locations. Elevated aerosol layers, which were present in nearly all locations, impact AOT but not surface aerosol concentrations. This result again shows the difficulty in using column AOT from passive sensors to derive PM<sub>2.5</sub> without accurate knowledge of the vertical distribution of aerosols. Scaling the AOT by the MLH provides some improvement to the overall correlation as shown by Model 2 in Figure 4b; however, the performance is not optimal because in those locations with elevated aerosol layers much of the AOT was located above the MLH. In contrast, model 3 (Figure 4c) performs significantly better highlighting the benefit of using near-surface aerosol backscatter to infer surface PM<sub>2.5</sub>. These near surface lidar measurements of aerosol backscatter were acquired within about 200 m of the surface. The best retrieval performance (i.e., small RMSE and high R) is provided by Model 11 (Figure 4d), which uses near-surface measurements of aerosol backscatter, aerosol backscatter color ratios (i.e., ratio of aerosol backscatter at 532 nm to that at 1064 nm and the ratio of aerosol backscatter between 355 and 532 nm), aerosol lidar ratios (355, 532 nm), aerosol depolarization (532 nm), and spectral ratios of aerosol depolarization at 532 nm to that at 1064 nm and at 355 nm to 532 nm. The RMSE (3.79  $\mu\text{g m}^{-3}$ ) and correlation coefficient (0.84) are considerably better than those from previous studies that used airborne HSRL data in conjunction with models (Meskhidze et al., 2021; Sutherland et al., 2023; Sutherland and Meskhidze, 2025).


The performance of the several exponential GPR models listed in Table 2 that use various combinations of HSRL measurements for retrieving surface PM<sub>2.5</sub> is shown in Figure 5. These results are derived using test data excluded from the training and cross-validation sets. Although these flights occurred predominantly over urban areas, the aerosols encountered over these areas correspond to several different aerosol types (e.g., urban, smoke, maritime, dust, etc.) as derived from the HSRL aerosol typing algorithm. There were no restrictions on aerosol type nor the PM<sub>2.5</sub>/PM<sub>10</sub> ratio when assessing PM concentrations retrieved from the airborne HSRL measurements. Retrieval performance is shown as a function of RMSE and MSE (left axis) and correlation coefficient (right axis). Models 7, 9, 11, and 12, which use some combination of near-surface aerosol backscatter and the aerosol intensive parameters, have the best performance with RMSE generally around 5.4  $\mu\text{g m}^{-3}$  or less and correlation coefficients above 0.8. Performance using only near-surface aerosol backscatter (532 nm) (Model 3) or only near-surface aerosol extinction (Model 4) is generally better than using AOT and MLH (Models 1 and 2). Note also that performance is generally better when using near-surface aerosol backscatter alone (e.g., Model 3) than using near-surface aerosol extinction alone (Model 4). There are (at least) two possible reasons for this. First, aerosol extinction profiles generally have vertical resolutions of between 150-300 meters. To avoid contamination from the surface return, the lowest aerosol extinction value is restricted to be generally 200-350 meters above the surface. In contrast, the near-surface aerosol backscatter can be derived considerably lower, generally around 60-100 m above the surface, and so will likely be better correlated to surface measurements. Second, HSRL measurements of aerosol backscatter are computed from the ratio of the total (aerosol+molecular) signal to the molecular signal, in contrast to the measurements of aerosol extinction, which are computed from the derivative of the molecular signal (Hair et al., 2008). Computing this derivative leads to more

uncertainty than computing the ratio; hence the near-surface aerosol backscatter is less noisy and has generally smaller uncertainties than near-surface aerosol extinction.

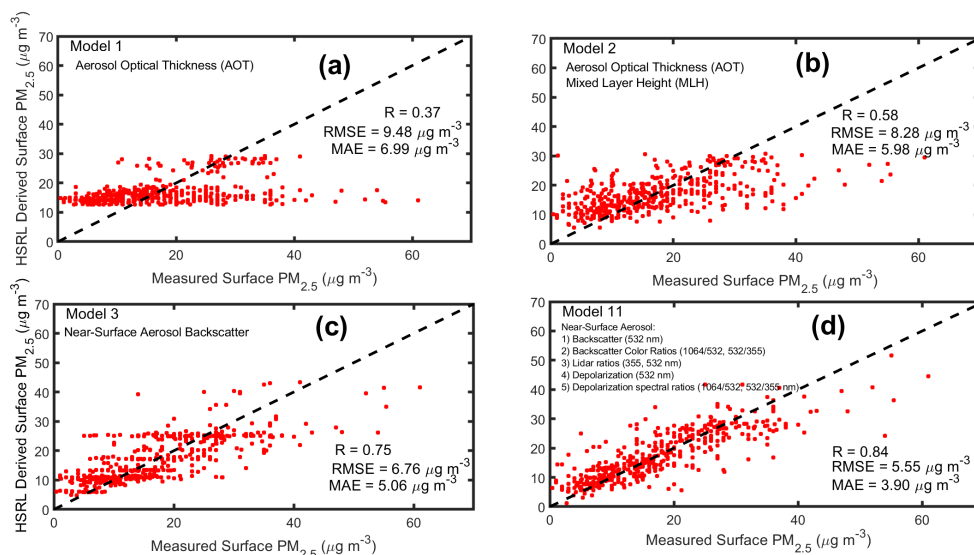

**Figure 4. Machine learning exponential Gaussian regression model predictions of surface  $PM_{2.5}$  using airborne HSRL data versus surface network measurements of  $PM_{2.5}$  over the major metropolitan regions shown in the legends in Figure 3. The regression models use various airborne HSRL measurements including a) AOT (532 nm), b) AOT (532 nm) and MLH, c) AOT (532 nm), MLH, and near-surface aerosol backscatter (532 nm), and d) near-surface aerosol backscatter (532 nm), backscatter color ratio (532/1064 nm), lidar ratio (532 nm), aerosol depolarization (532 nm), and ratio of aerosol depolarizations (532/1064 nm). These results were derived using test data excluded from the training sets.**

Figure 5 shows that performance improves with Models 5 and higher that include aerosol intensive parameters such as aerosol depolarization, lidar ratio, backscatter color ratio, and spectral depolarization ratio. These intensive parameters provide information regarding aerosol composition, shape, and size that improves retrievals of surface  $PM_{2.5}$ . With the addition of these variables, the differences between models using near-surface aerosol backscatter and near-surface aerosol extinction are smaller, i.e., Models 7 vs. 8 and Models 9 vs. 10 have somewhat similar performance. Note that the retrieval performance of Model 11 is about the same as Models 7-10 which indicates that the addition of airborne HSRL aerosol measurements at 355 nm did not significantly improve the  $PM_{2.5}$  predictive performance. This important result indicates that aerosol measurements at 532 nm and 1064 nm provided by the airborne HSRL systems that do not include HSRL measurements at 355 nm (i.e., HSRL-1, DIAL/HSRL, and HALO) can be still used to retrieve surface  $PM_{2.5}$  with the essentially the same retrieval performance as the measurements made by the airborne HSRL-2 system, which includes measurements at 355 nm as well as 532 and 1064 nm. Conversely, note also that the performance of Model 12 is also very similar to that of Models 7-11, which indicates that HSRL measurements of aerosol backscatter, extinction, and depolarization at a single UV wavelength (355 nm) can also be used to retrieve surface  $PM_{2.5}$ . This suggests that lidar systems such as the Atmospheric Lidar (ATLID) on the EarthCARE satellite that operate exclusively at 355 nm can use this methodology to retrieve surface  $PM_{2.5}$ .

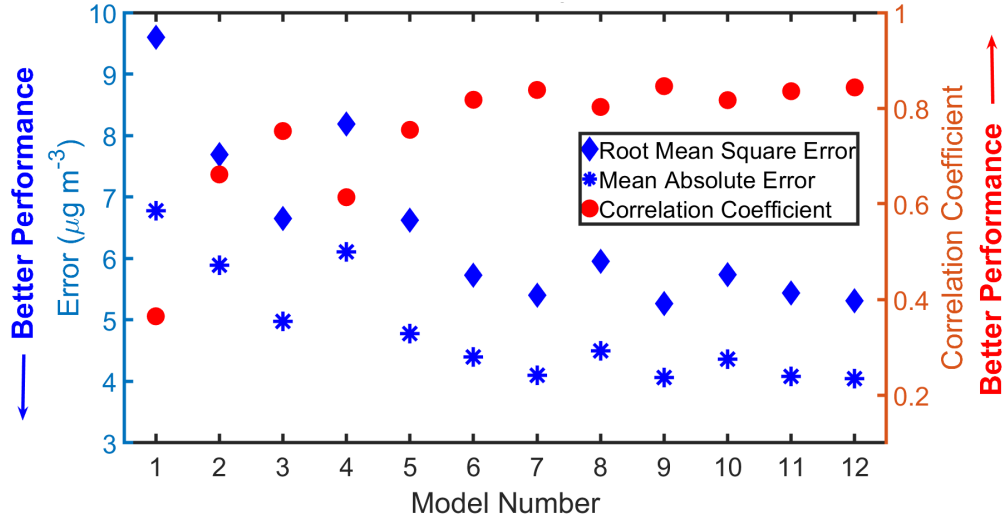

**Figure 5. Performance of exponential Gaussian machine learning regression models listed in Table 2 in deriving surface  $PM_{2.5}$  as measured by RMS and MAE (left axis) and correlation coefficient right axis (right axis) relative to surface  $PM_{2.5}$  measurements. Performance metrics were derived using data withheld from the training and validation datasets.**

It is also interesting to note the performance of Model 5. Of all the models discussed and shown in Table 2, Model 5, which includes measurements of near-surface aerosol extinction, near-surface aerosol depolarization, and AOT and excludes measurements of the lidar ratio and the ratio of aerosol depolarization (532/1064 nm), probably provides the most appropriate configuration to estimate the performance associated with CALIOP. Figures 5 and 6 show that the retrieval performance of Model 5 is not that much worse relative to other models (e.g. 7-11) that included additional parameters as well as Model 12, which corresponds to the ATLID lidar configuration. However, it is important to note that these airborne HSRL systems measure both total attenuated backscatter and total attenuated molecular backscatter to enable direct retrievals of unattenuated aerosol backscatter and aerosol extinction. Since CALIOP did not measure total attenuated molecular backscatter, CALIOP retrievals of aerosol extinction and unattenuated aerosol backscatter typically rely on estimates of the lidar ratio based on inferences of aerosol type. As a result, the CALIOP measurements of near-surface aerosol extinction and, to a lesser extent, near-surface aerosol depolarization can have significant systematic uncertainties due to the uncertainties in the assumed lidar ratios. Consequently, we expect the actual performance of Model 5 as applied to CALIOP retrievals would be worse than the performance as applied to the airborne HSRL systems shown in Figures 5 and 6.

Except for relative humidity (RH), the model input parameters shown in Table 2 use only airborne HSRL aerosol measurements. Variability in airborne HSRL measurements of near-surface aerosol backscatter and extinction may be due to changes in RH in addition to or instead of changes in dry aerosol mass thereby complicating efforts to use these lidar measurements to retrieve  $PM_{2.5}$ . Therefore, surface RH at the  $PM_{2.5}$  stations as represented by the ERA5 model is included in Models 6, 9, and 10. Comparing the performance of Models 5 vs. 6, 7 vs. 9, and 8 vs. 10 as shown in Figure 5 indicates that surface RH provides very little improvement to retrievals of surface  $PM_{2.5}$  values. One possible reason for this lack of sensitivity is that few (<10%) of the surface RH values for these data were above 70% where

increases in aerosol scattering due to hygroscopic growth of the particles are more pronounced. Another reason is that the impact of higher RH is already captured by the behavior of the intensive aerosol parameters measured the airborne HSRL systems. Airborne HSRL measurements of aerosol intensive parameters used in these  $PM_{2.5}$  retrievals have also been used to retrieve fine mode aerosol number, surface, and volume concentrations and effective radius (Müller et al., 2014; Sawamura et al., 2017; Harshvardhan et al., 2022), real and imaginary refractive index (Wang et al., 2022), aerosol absorption (Redemann and Gao, 2024), aerosol single scattering albedo (Wang et al., 2022), and aerosol shape (Burton et al., 2015; Ferrare et al., 2023). Thus, to the extent that aerosol size, shape, and composition are impacted by changes in RH, the HSRL aerosol intensive properties also respond to and can indicate such changes. For example, aerosol depolarization often decreases with increased RH as particles take on water and become more spherical (Ferrare et al., 2021). Also, changes in particle size due to hygroscopic growth are also indicated by changes in the backscatter color ratio (Su et al., 2008; Burton et al., 2015).

The performance of these exponential GPR models for retrieving  $PM_{10}$  and the ratio of  $PM_{2.5}/PM_{10}$  for the various combinations of airborne HSRL aerosol measurements is shown in Figure 6. The overall predictive performance of  $PM_{10}$  and  $PM_{2.5}/PM_{10}$  ratio is somewhat smaller than the performance for  $PM_{2.5}$ . This decrease in performance is likely because typically fine mode aerosols constitute a major part of the aerosol volume; in such cases, accumulation mode aerosols (i.e.,  $PM_{2.5}$  size particles) contribute a larger portion to the total backscatter at the HSRL wavelengths than particles in the coarse mode (i.e.  $PM_{10}$  size particles) (e.g. (Müller and Quenzel, 1985; Veselovskii et al., 2004)). Measurements of near-surface aerosol backscatter and near-surface aerosol extinction alone are not particularly useful for retrieving  $PM_{10}$  (Fig. 6a) and have poor skill in retrieving the  $PM_{2.5}/PM_{10}$  ratio (Fig. 6b). In both cases, performance significantly improves with the addition of aerosol depolarization and, to a lesser extent, other aerosol intensive parameters such as backscatter color ratio. High values of aerosol depolarization are associated with nonspherical particles; dust particles in particular have high aerosol depolarization values (Burton et al., 2012). Nonspherical dust is one of the main types of coarse mode particles, so aerosol depolarization is a particularly useful measurement to indicate the presence of coarse mode particles and for retrieving  $PM_{10}$  and the  $PM_{2.5}/PM_{10}$  ratio. Figure 6 shows that the addition of other aerosol intensive parameters such as backscatter color ratio and spectral depolarization ratio provided only marginal improvement when retrieving  $PM_{10}$  and the  $PM_{2.5}/PM_{10}$  ratio.

Figure 7 shows the importance and relationship of the various parameters to retrievals of  $PM_{2.5}$ ,  $PM_{10}$ , and the  $PM_{2.5}/PM_{10}$  ratio as represented by Shapley scores for Model 9. Shapley values show the relative average impact of each variable on the retrieval<sup>5</sup> and so identify which variables have the largest or smallest average impact on retrieved values<sup>5</sup>. Figures 7a, 7b, and 7c show the mean of the absolute Shapley values for each variable and thus show a measure of each variable's importance for model retrievals. Figures 7d, 7e, and 7f show summaries of the Shapley values for each query point according to its retrieval value. The Shapley value of a variable for a particular point

<sup>5</sup> See <https://www.statcan.gc.ca/en/data-science/network/explainable-learning> and

<sup>5</sup> [https://www.mathworks.com/help/releases/R2025a/stats/explain-model-predictions-for-regression-models-trained-in-regression-learner-app.html#mw\\_9aa6a89c-835c-47fc-b1ec-68ce31e14505](https://www.mathworks.com/help/releases/R2025a/stats/explain-model-predictions-for-regression-models-trained-in-regression-learner-app.html#mw_9aa6a89c-835c-47fc-b1ec-68ce31e14505)

explains the deviation of the retrieval for that point from the average retrieval, due to the variable. The sign of the Shapley value indicates the direction of this deviation, and the absolute value indicates its magnitude. Shapley values near zero indicate that the variable has a minimal impact on the model retrievals for that query point. High Shapley values (orange and red) such as for aerosol backscatter (532 nm) in Figures 7d and 7e indicate that high aerosol backscatter values correspond to a larger retrieved surface  $PM_{2.5}$  and  $PM_{10}$  values. Conversely, lower backscatter values (blue) correspond to lower retrieved surface  $PM_{2.5}$  and  $PM_{10}$  values. Note how the Shapley values for aerosol depolarization (532 nm) differ in behavior for retrievals of  $PM_{2.5}$  and  $PM_{2.5}/PM_{10}$  ratio vs.  $PM_{10}$ . High values of aerosol depolarization that are associated with nonspherical coarse mode dust particles correspond to lower retrieved values of  $PM_{2.5}$  (and lower  $PM_{2.5}/PM_{10}$  ratio) but higher retrieved values of  $PM_{10}$ . These figures again show how aerosol backscatter (532 nm) dominates the retrievals of  $PM_{2.5}$  and the increasing contribution of aerosol depolarization and other intensive parameters for retrievals of  $PM_{10}$ . Since the  $PM_{2.5}/PM_{10}$  ratio is an aerosol intensive parameter providing a measure of aerosol size, aerosol intensive parameters such as aerosol depolarization and backscatter color ratio have a greater impact on this ratio than an extensive parameter such as aerosol backscatter. This figure also shows


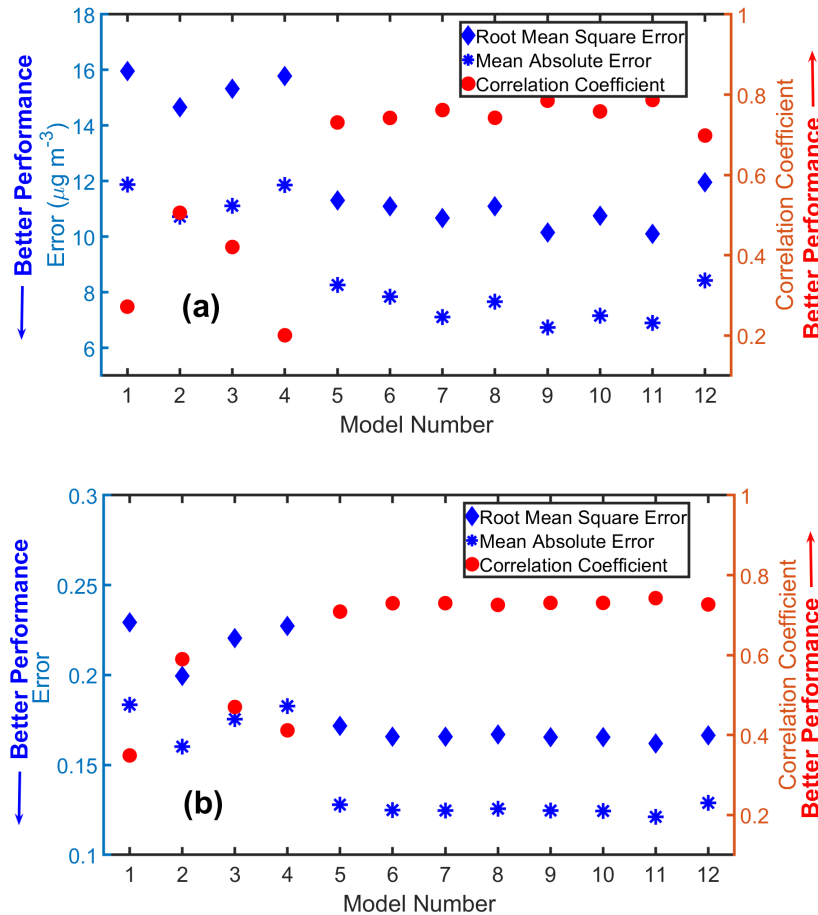


Figure 6. Same as Figure 5 except showing performance for deriving (a)  $PM_{10}$  and (b)  $PM_{2.5}/PM_{10}$ . Performance metrics were derived using data withheld from the training and validation datasets.

the relatively small impact of relative humidity on retrievals of  $PM_{2.5}$  and the negligible impact on predictions of  $PM_{10}$  and  $PM_{2.5}/PM_{10}$ .

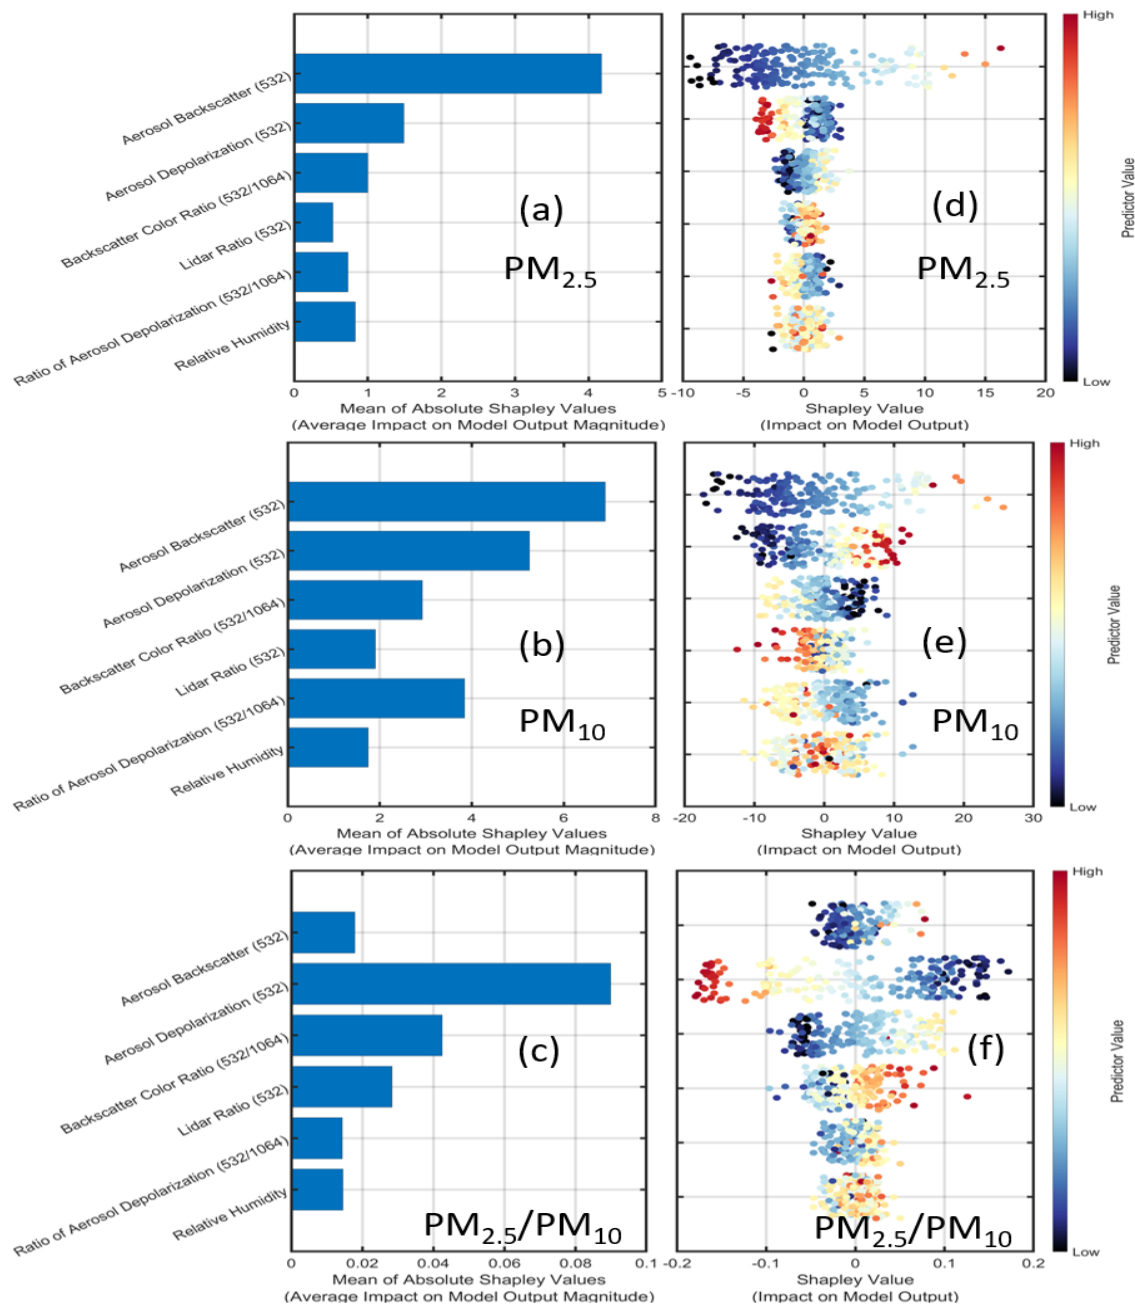

**Figure 7.** Mean of absolute Shapley values for a)  $PM_{2.5}$ , b)  $PM_{10}$ , and c)  $PM_{2.5}/PM_{10}$ . These values identify which predictors have the largest or smallest average impact on predicted response values. Summaries of the Shapley values according to its predictor value for d)  $PM_{2.5}$ , e)  $PM_{10}$ , and f)  $PM_{2.5}/PM_{10}$ . The Shapley value of a variable for a particular point explains the deviation of the prediction for that point from the average prediction, due to the predictor. The sign of the Shapley value indicates the direction of this deviation, and the absolute value indicates its magnitude.

It is important to note that these GPR model results for  $PM_{2.5}$ ,  $PM_{10}$ , and  $PM_{2.5}/PM_{10}$  apply to the ranges of  $PM_{2.5}$ ,  $PM_{10}$ , and  $PM_{2.5}/PM_{10}$  present in the training set. These ranges were: 2-80  $\mu g m^{-3}$  for  $PM_{2.5}$ , 5-110  $\mu g m^{-3}$  for  $PM_{10}$ , and 0.01-0.98 for  $PM_{2.5}/PM_{10}$ . The ranges of HSRL aerosol measurements in these training sets were: 0.1-12  $(Mm\text{-}sr)^{-1}$  for aerosol backscatter (532 nm), 5-500  $Mm^{-1}$  for aerosol extinction (532 nm), 0.01-0.3 (1-30%) for aerosol depolarization (532 nm), 15-80 sr for the lidar ratio (532 nm), and 0.05-4 for the aerosol backscatter color ratio (532 m/1064 nm). The specific training set used here would be suitable for retrieving PM estimates for PM values and HSRL aerosol measurements in these ranges but would not be suitable for retrieving PM significantly higher than the maximum values listed above. Based on additional tests we conducted, in such cases of high PM concentrations the current training set likely would lead to underestimates in the retrieved PM values. However, if additional HSRL aerosol measurements and coincident surface PM measurements associated with higher PM values become available, a revised training set using those measurements could be readily developed for determining revised GPR models that could then be used for such PM retrievals.

### 3 Results

#### 3.1 STAQS and ASIA-AQ missions

We demonstrate the use of this ML methodology to retrieve surface  $PM_{2.5}$  values using airborne HSRL-2 data collected during the NASA Synergistic TEMPO Air Quality Science (STAQS)<sup>6</sup> and Airborne-Satellite Investigation of Asian Air Quality (ASIA-AQ)<sup>7</sup> missions. The STAQS mission was conducted to integrate Tropospheric Emissions: Monitoring of Pollution (TEMPO) satellite observations with traditional and enhanced air quality monitoring to improve the understanding of air quality science for increased societal benefit (Judd et al., 2022). STAQS objectives include the evaluation of TEMPO retrievals of trace gases and assessments of benefits of assimilating TEMPO data into chemical transport models. STAQS conducted flights over major metropolitan areas in the United States during July and August 2023 including Los Angeles, Chicago, and New York City. During the STAQS mission HSRL-2 was deployed on the NASA JSC G-V aircraft which flew raster patterns from an altitude of about 9 km over these cities. Each raster pattern had about 10 legs with each leg separated by about 8 km. Each leg was about 140 km long and took about 12 minutes to complete so the entire raster pattern took around 2 to 2.5 hours. During each eight-hour flight, the G-V typically flew three raster patterns which allowed HSRL-2 to measure profiles of aerosols and ozone and derive PM concentrations along these raster patterns during the morning, mid-day, and afternoon.

The overarching goals of ASIA-AQ are to improve: 1) the integration of satellite observations with existing air quality ground monitoring and modeling efforts across Asia, 2) the understanding of the factors controlling local air quality across Asia. Specific goals involved measurements relating to: satellite validation and interpretation, emissions quantification and verification, model evaluation, aerosol chemistry, and ozone chemistry (Crawford et al., 2022). ASIA-AQ conducted airborne sampling across multiple locations during February and March 2024 with flights over

---

<sup>6</sup> <https://www-air.larc.nasa.gov/missions/staqs/>

<sup>7</sup> <https://www-air.larc.nasa.gov/missions/ASIA-AQ/>

Manila (Philippines), Taiwan, Seoul (South Korea), and Bangkok (Thailand). NASA deployed two aircraft for ASIA-AQ: 1) the LaRC G-III aircraft with HSRL-2 to measure profiles of aerosols and ozone and the GEO-CAPE Airborne Simulator (GCAS) instrument to measure column densities of nitrogen dioxide and formaldehyde, and 2) the DC-8 aircraft with a suite of *in situ* instruments to measure trace gas and aerosol composition. During ASIA-AQ the G-III flew at about 9 km in raster patterns over each metropolitan region. These raster patterns were like those flown during STAQS except that the shorter endurance of the G-III required two separate flights to achieve three raster patterns; two raster patterns were completed during the first flight and another raster pattern was completed during the second flight. Because of the longer transit times, only single raster patterns were flown over Taiwan on each of the four days.


Measurements of aerosol size, composition, scattering and absorption coefficients were acquired by *in situ* instruments on the DC-8 during ASIA-AQ. Sub-micrometer non-refractory aerosol chemical composition (sulfate, nitrate, ammonium, organics, and chlorine) was measured by a High-Resolution Time-of-Flight Aerosol Mass Spectrometer (HR-ToF-AMS) manufactured by Aerodyne Research (Guo et al., 2021; Kim et al., 2025). A Single Particle Soot Photometer (SP2) measured sub-micrometer refractory black carbon mass. A TSI nephelometer (Model 3563) measured sub-micrometer aerosol scattering coefficients and a particle soot absorption photometer (PSAP, Radiance Research, Inc.) measured sub-micrometer aerosol absorption coefficients. Aerosol dry size distributions between 3 and 100 nm (diameter) were measured by a TSI, Inc. Scanning Mobility Particle Sizer (SMPS, Differential Mobility Analyzer model 3085) (Moore et al., 2017); a Droplet Measurement Technologies Ultra-High Sensitivity Aerosol Spectrometer (UHSAS) measured dry aerosol size distributions between 100 and 1,000 nm (diameter) (Moore et al., 2021) and Aerodynamic Particle Sizer (APS, TSI model 3321) provided measurements between about 1,000 and 3,000 nm.

Dry  $PM_{2.5}$  concentrations and fine mode Mass Extinction Efficiency ( $MEE_f$ ) are derived from these DC-8 measurements in the following manner. Size distributions from the SMPS, UHSAS, and APS are converted to geometric diameter and then stitched together following (Soloff et al., 2024) to derive the volume concentration for particle diameters less than 2.5  $\mu m$ . Then, bulk fine mode non-refractory aerosol density is estimated from HR-ToF-AMS and SP2 black carbon measurements (Saide et al., 2022) by means of mass weighting and then used to derive dry  $PM_{2.5}$  mass concentrations. Additional details on the density computations are provided by (Salcedo et al., 2006; Kuwata et al., 2012). These estimates of  $PM_{2.5}$  concentrations are quality assured by removing them whenever the HR-ToF-AMS+SP2 aerosol mass measurements are not existent (i.e., cloud contaminated) or when these estimates of  $PM_{2.5}$  concentrations derived from the size distribution are at least three times larger than those derived from the HR-ToF-AMS+SP2 mass. In-situ dry aerosol extinction at 532 nm is derived from the measurements of aerosol scattering and absorption (Ziemba et al., 2013a). Finally, dry  $MEE_f$  is derived from the ratio of extinction and  $PM_{2.5}$ .

### 3.2 $PM_{2.5}$ , $PM_{10}$ , and $PM_{2.5}/PM_{10}$ retrievals


Figure 8 shows examples of retrievals of surface  $PM_{2.5}$ ,  $PM_{10}$ , and  $PM_{2.5}/PM_{10}$  derived over the New York City (NYC) metropolitan region on July 26, 2023, during the STAQS mission. HSRL-2 was deployed from the NASA G-V aircraft which flew this raster pattern three times during an approximate eight-hour flight over the NYC region. These values

were derived using the Model 11 regression. The HSRL-2 surface PM retrievals show extensive temporal and spatial variability. Note how the location of the highest surface  $PM_{2.5}$  varies during the day between eastern Long Island and central New York City. Interestingly, high surface  $PM_{2.5}$  was derived over Long Island Sound during the morning. Corresponding surface values measured by EPA surface stations are also shown; these measurements were acquired using instruments as per the Federal Reference Method (FRM; gravimetric analysis) and Federal Equivalent Method (FEM; taper element oscillating microbalance [TEOM] and beta gauge analyses) regulations (Register, 2006; Greenstone, 2002). This figure shows that the HSRL-2 retrievals provide considerable additional spatial and vertical information unavailable from the surface sensors.

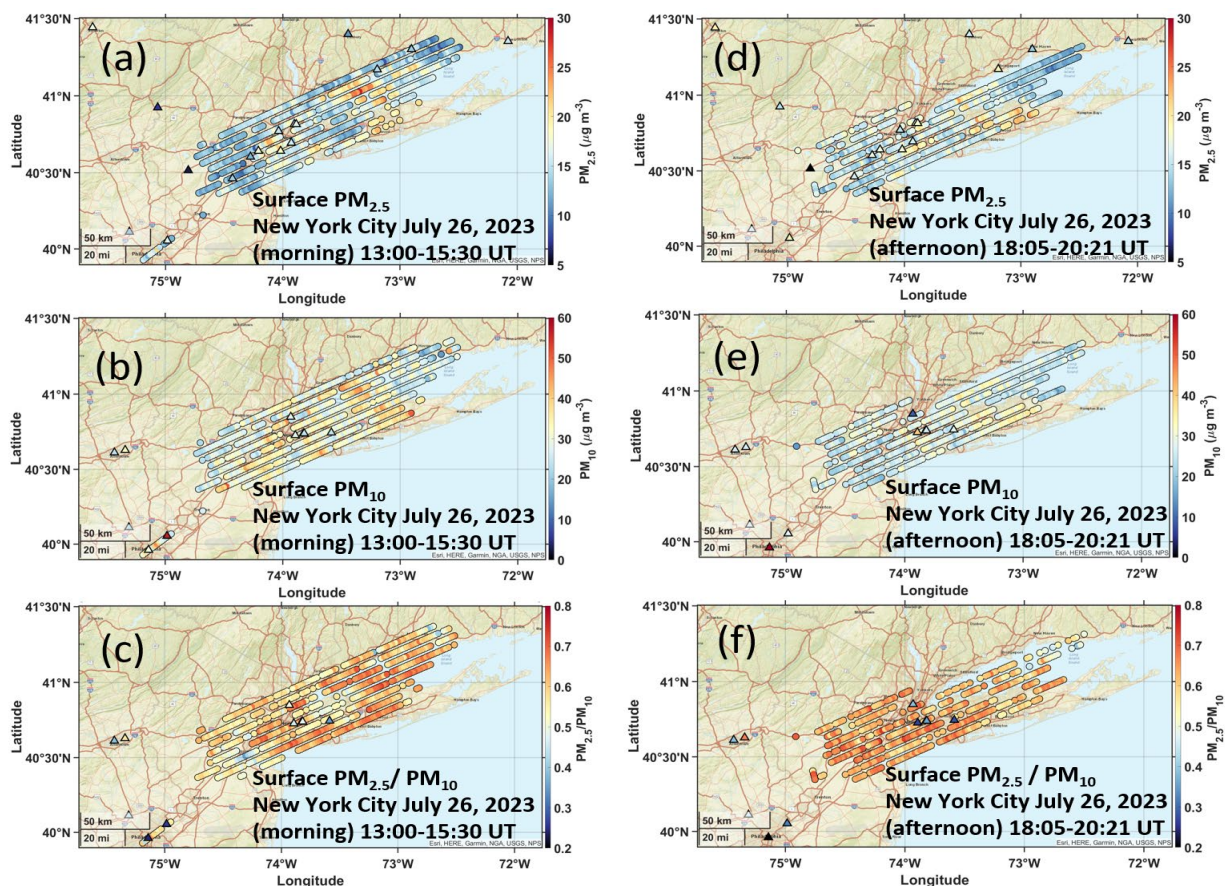

**Figure 8. (a) Surface  $PM_{2.5}$ , (b)  $PM_{10}$ , and (c)  $PM_{2.5}/PM_{10}$  derived from airborne HSRL-2 data acquired over New York City during the morning of July 26, 2023. (d-f) show the same during the afternoon. Corresponding surface values measured by EPA surface stations are also shown as triangles.**

Figure 9 shows examples of surface  $PM_{2.5}$  derived from HSRL-2 measurements acquired over South Korea, Taiwan, and Thailand during ASIA-AQ. The left panels (Figures 9a, 9b, 9c) show the spatial distribution of  $PM_{2.5}$  during each of these flights. Also shown are average surface network  $PM_{2.5}$  measurements during the raster. Figures 10 and 11 show HSRL-2 retrievals of  $PM_{10}$  and  $PM_{2.5}/PM_{10}$  and corresponding surface PM measurements for these regions. The HSRL-2 retrievals of surface  $PM_{2.5}$  show considerable spatial variability in surface  $PM_{2.5}$  over these sites. Figures 9a and 10 shows highest surface  $PM_{2.5}$  and  $PM_{10}$  values occurred over Seoul with lower concentrations over rural areas

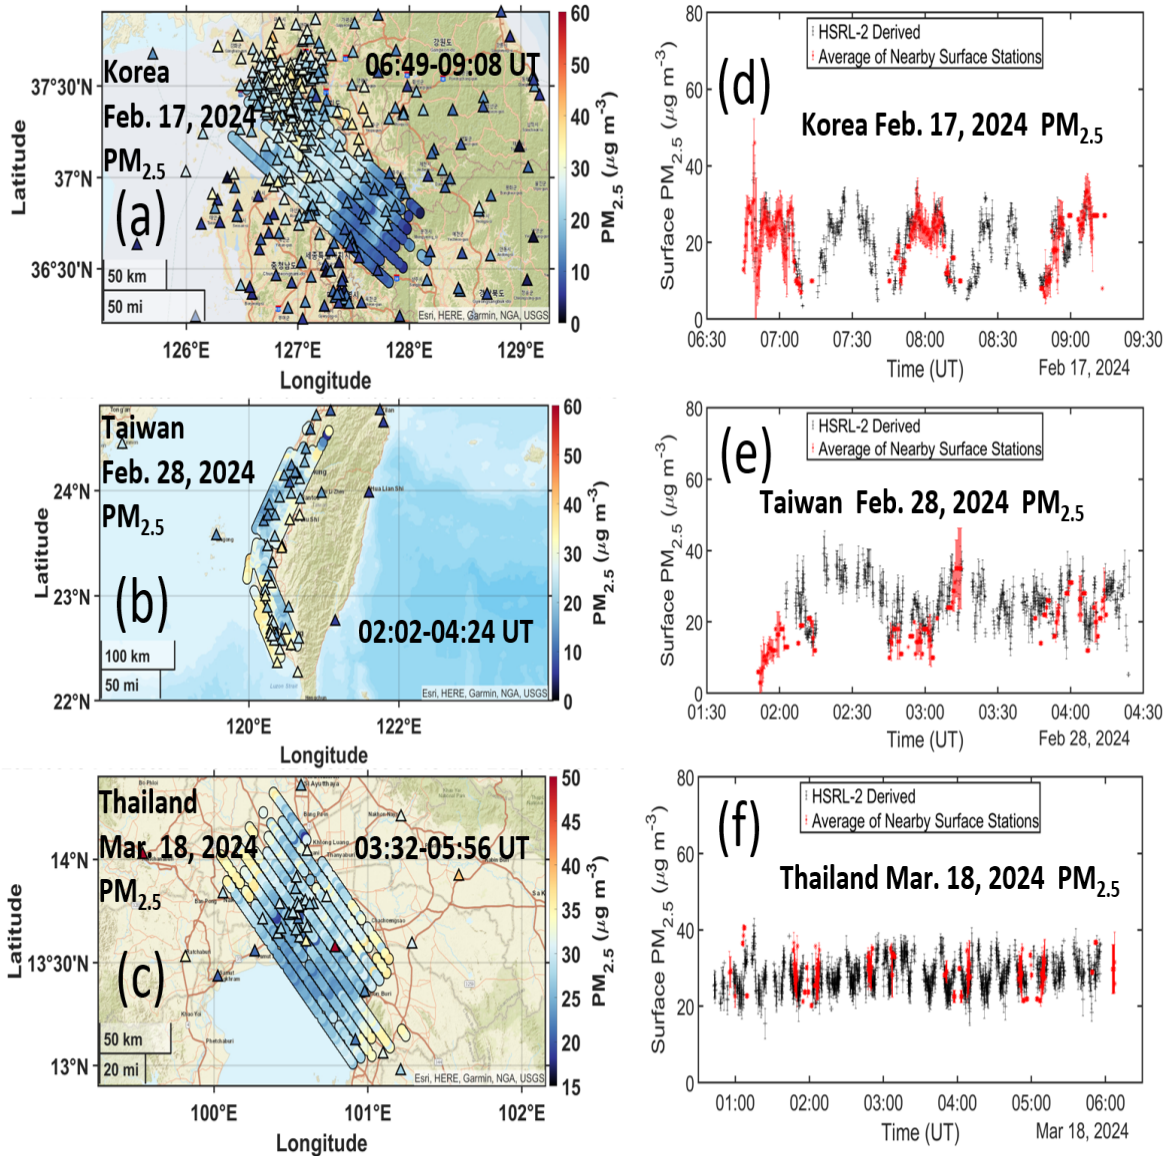

**Figure 9. Surface PM<sub>2.5</sub> derived from airborne HSRL-2 measurements acquired during raster patterns over South Korea (a), Taiwan (b), and Thailand (c). The colored triangles also show surface PM<sub>2.5</sub> values measured by surfaced stations during the HSRL-2 measurements. Corresponding plots showing surface PM<sub>2.5</sub> derived from airborne HSRL-2 measurements and measured by surface stations as a function of time (UT) during these flights are also shown in (d-f).**

southeast of Seoul. Figure 11a shows that the highest values of PM<sub>2.5</sub>/PM<sub>10</sub> ratio corresponding to smaller particles also occurred over this urban region of Seoul. Figures 9b, 10b, 11b show higher PM<sub>2.5</sub> and PM<sub>10</sub> concentrations and higher PM<sub>2.5</sub>/PM<sub>10</sub> values in the urban areas between Tainan and Kaohsiung on the southwestern coast of Taiwan. Figures 9c, 10c, 11c show highest concentrations of surface PM<sub>2.5</sub> and PM<sub>10</sub> occurred slightly to the northwest and southeast of Bangkok with lower concentrations over the Gulf of Thailand south of Bangkok. Figures 9d, 9e, 9f show the HSRL-2 retrievals of surface PM<sub>2.5</sub> during these raster patterns along with the averages of surface PM<sub>2.5</sub> measurements within 15 minutes and 10 kilometers of the HSRL-2 measurements. These also show examples of the

variability in surface  $PM_{2.5}$  over these urban regions. These figures also show that the HSRL-2 surface  $PM_{2.5}$  retrievals and the surface  $PM_{2.5}$  measurements acquired over these regions were in good agreement. Figures 10d, 10e, 10f show corresponding HSRL-2 retrievals of surface  $PM_{10}$  and  $PM_{2.5}/PM_{10}$  during these raster patterns.

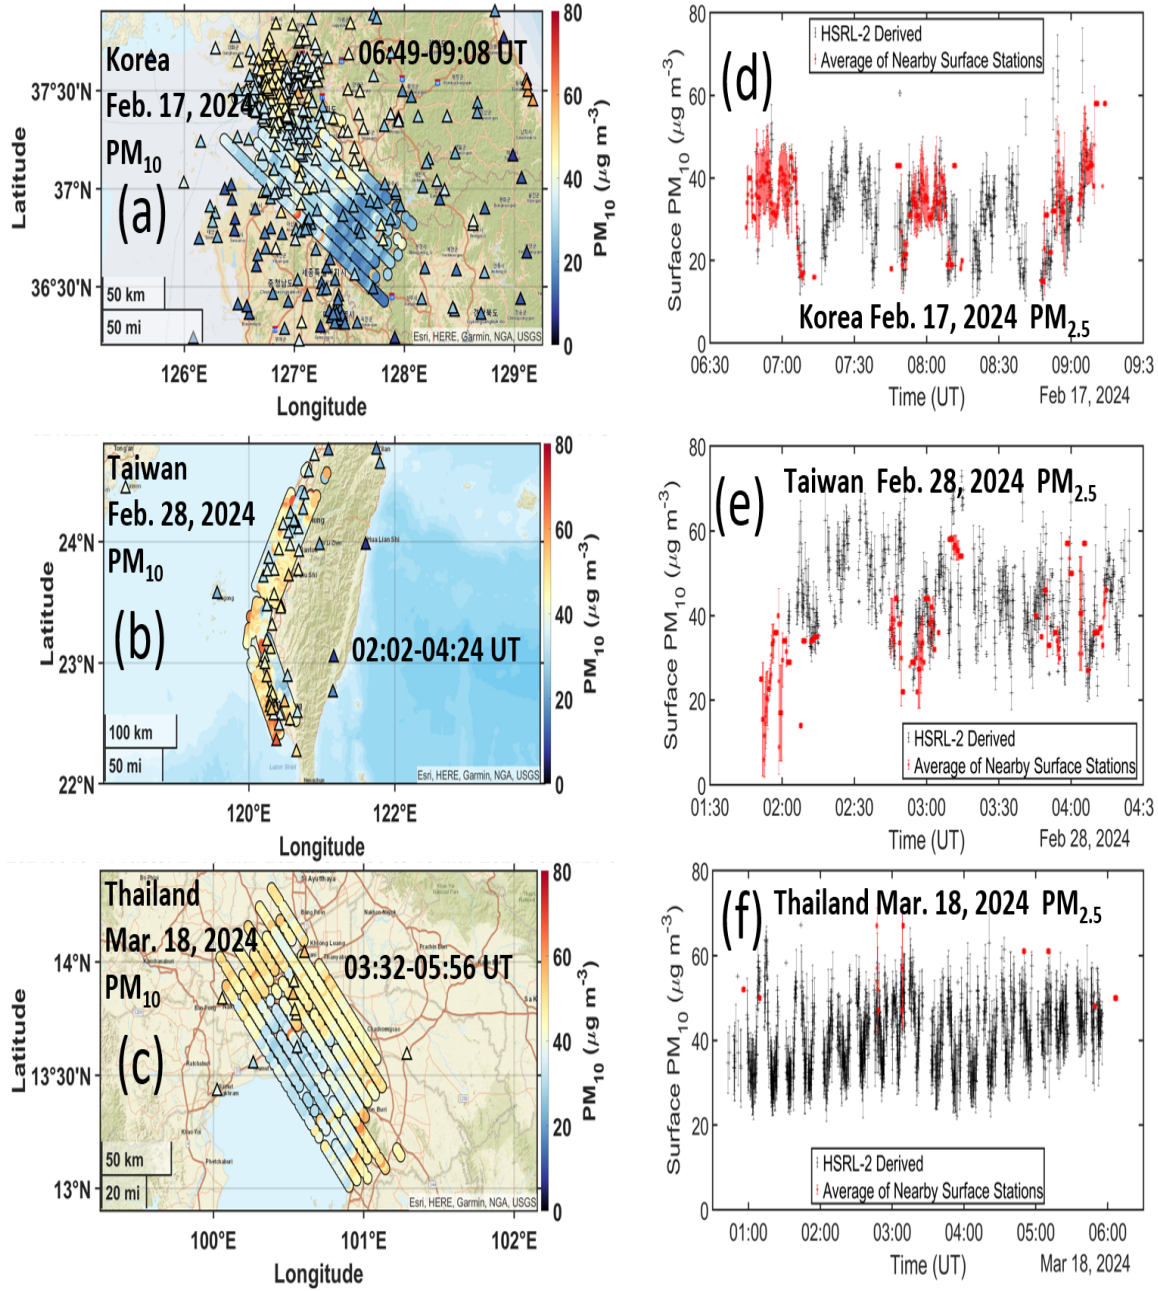


Figure 10. Same as Figure 9 except for surface  $PM_{10}$ .


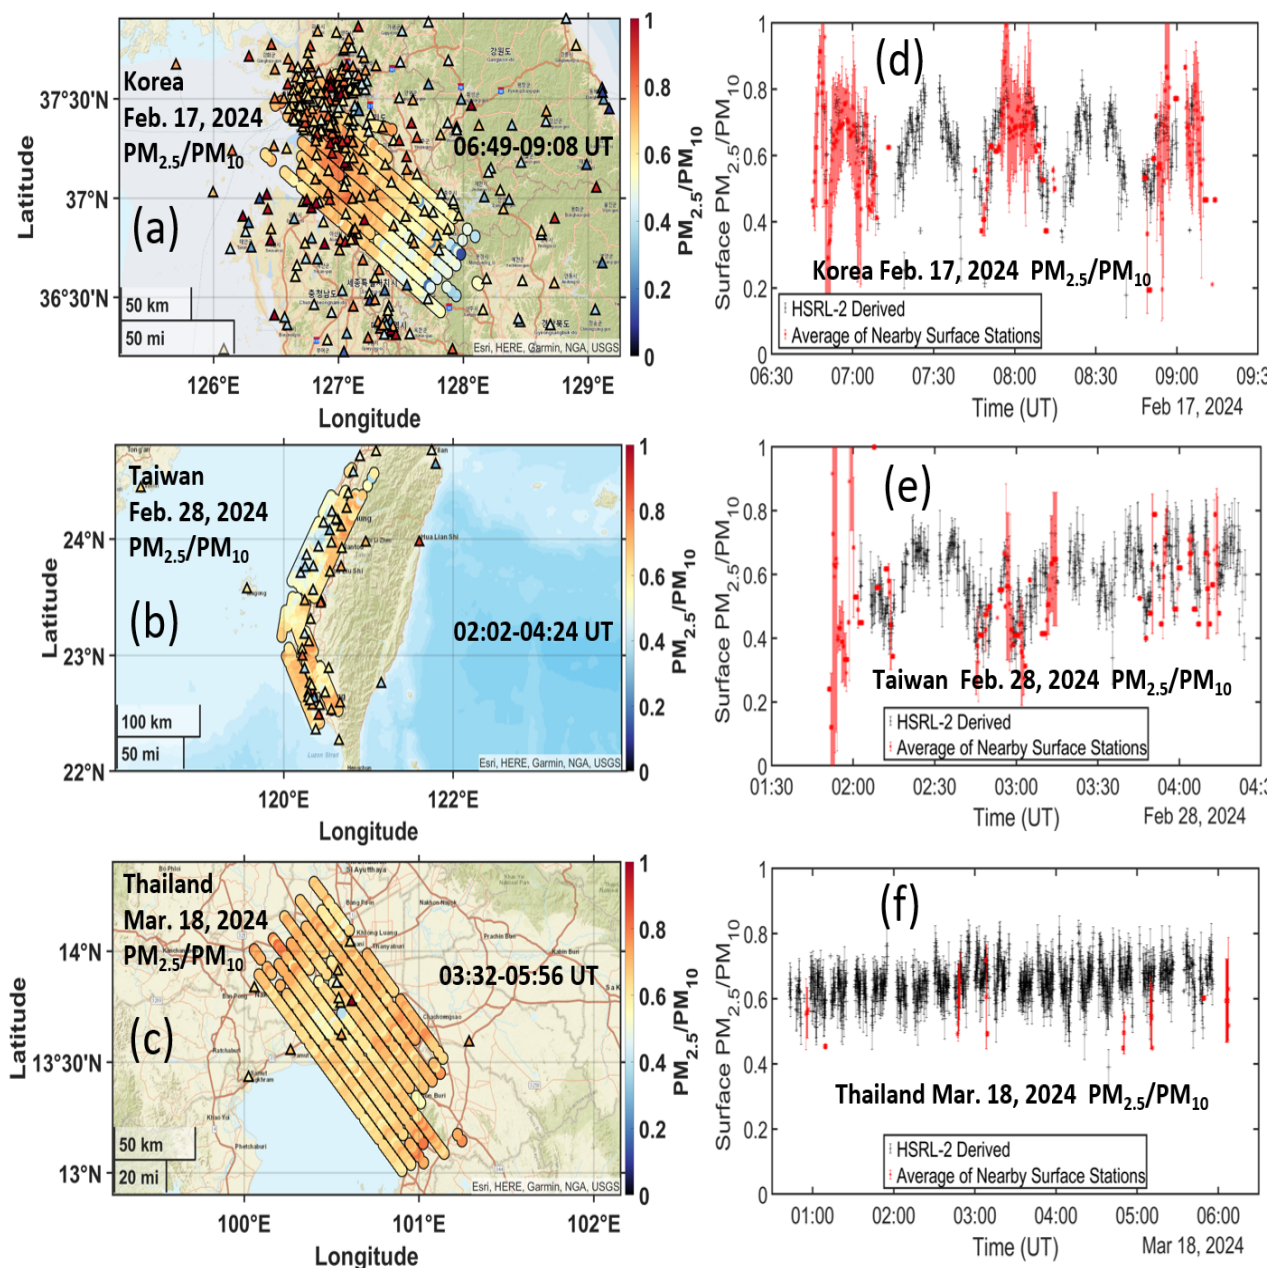


Figure 11. Same as Figure 9 except for surface  $PM_{2.5}/PM_{10}$ .

### 3.3 PM comparisons and sensitivity studies

Overall comparisons of the HSRL-2 surface  $PM_{2.5}$  retrievals and the surface  $PM_{2.5}$  measurements for all HSRL-2 surface  $PM_{2.5}$  retrievals during the STAQS and ASIA-AQ missions are shown in Figures 12 and Figure 13, respectively. Note that these figures show surface  $PM_{2.5}$  derived from each HSRL measurement within 10 km and 15 minutes of a single surface network  $PM_{2.5}$  measurement rather than  $PM_{2.5}$  derived from the average of all HSRL measurements within this same distance and time requirement; consequently, there are many more points that are used

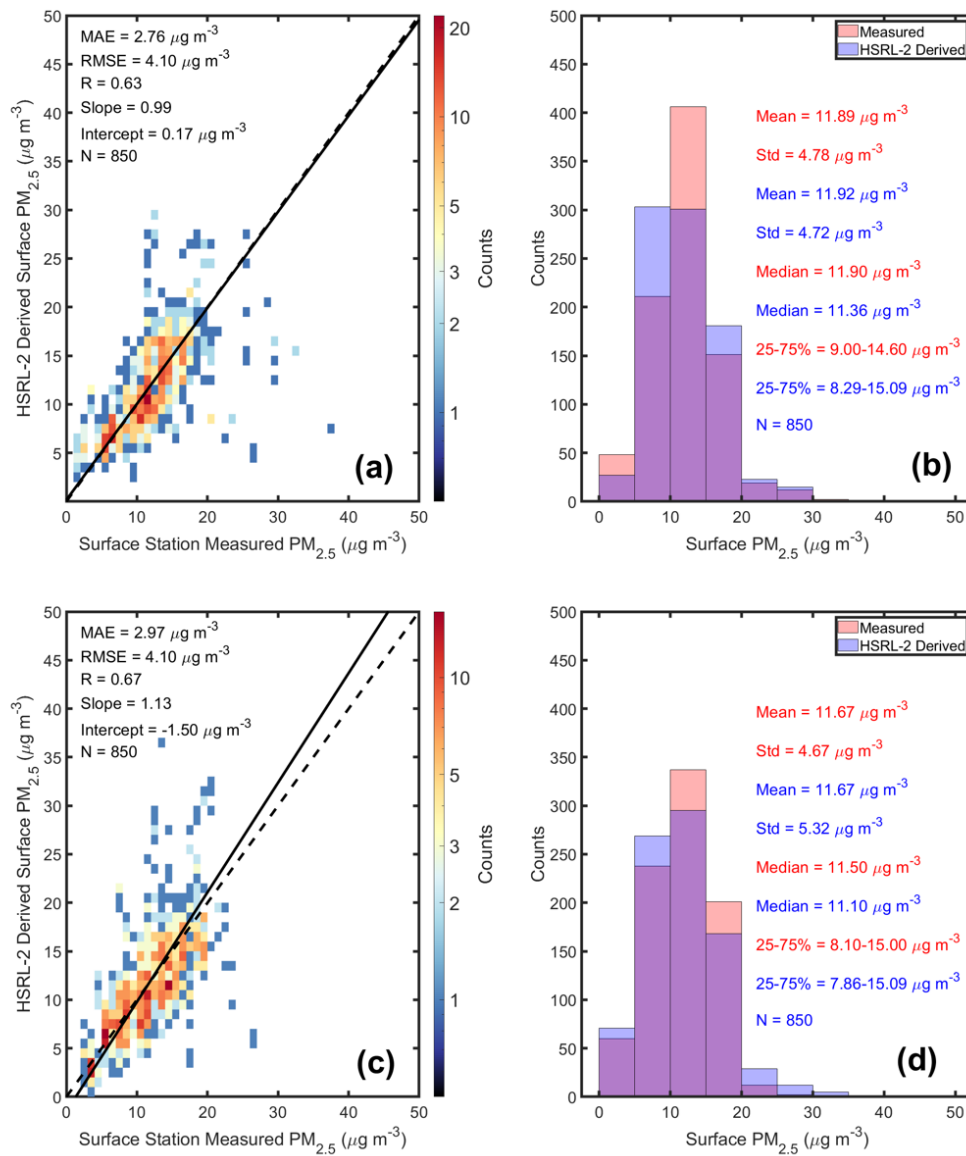

**Figure 12. Regression (a) and histogram (b) comparisons of surface PM<sub>2.5</sub> derived from airborne HSRL-2 measurements and measured by surface stations during the NASA STAQS mission (2023). STAQS data were included in the training set. (c) and (d) are the same except using a model that used the same parameters and a training set that excluded data from the STAQS mission.**

for these comparisons than were used in the training set (i.e., Figure 4). Mean absolute error (MAE) and root-mean-square-error (RMSE) differences between the HSRL-2 surface PM<sub>2.5</sub> retrievals and the surface PM<sub>2.5</sub> measurements are shown along with linear bisector slope, intercept, and correlation coefficient in each case.

Figures 12a and 12b show results from the STAQS mission retrieved from Model 11 that used the training set that included data from the STAQS mission. Approximately 12% of the data used in the training set were from the STAQS mission; the remaining training set data are from other field missions including ASIA-AQ. Figures 12c and 12d show results from Model 11 that used a different training set that excluded data from the STAQS mission. Thus, the results

570 shown in Figures 12c and 12d provide an example of the use of a training set as applied to a new set of measurements. Comparing the retrieval results between the top and bottom panels in Figure 12 shows that excluding STAQS data from the training set did not affect the retrieval performance when applied to the STAQS data. This indicates that the relationships among the HSRL aerosol measurements and the surface  $\text{PM}_{2.5}$  concentrations and the range of  $\text{PM}_{2.5}$  concentrations observed during STAQS was not appreciably different from those observed during the other missions.

575 Figures 13a and 13b show similar results from the ASIA-AQ mission using Model 11 and the training set that included data from the ASIA-AQ mission; Figures 13c and 13d show results from Model 11 that used another training set that


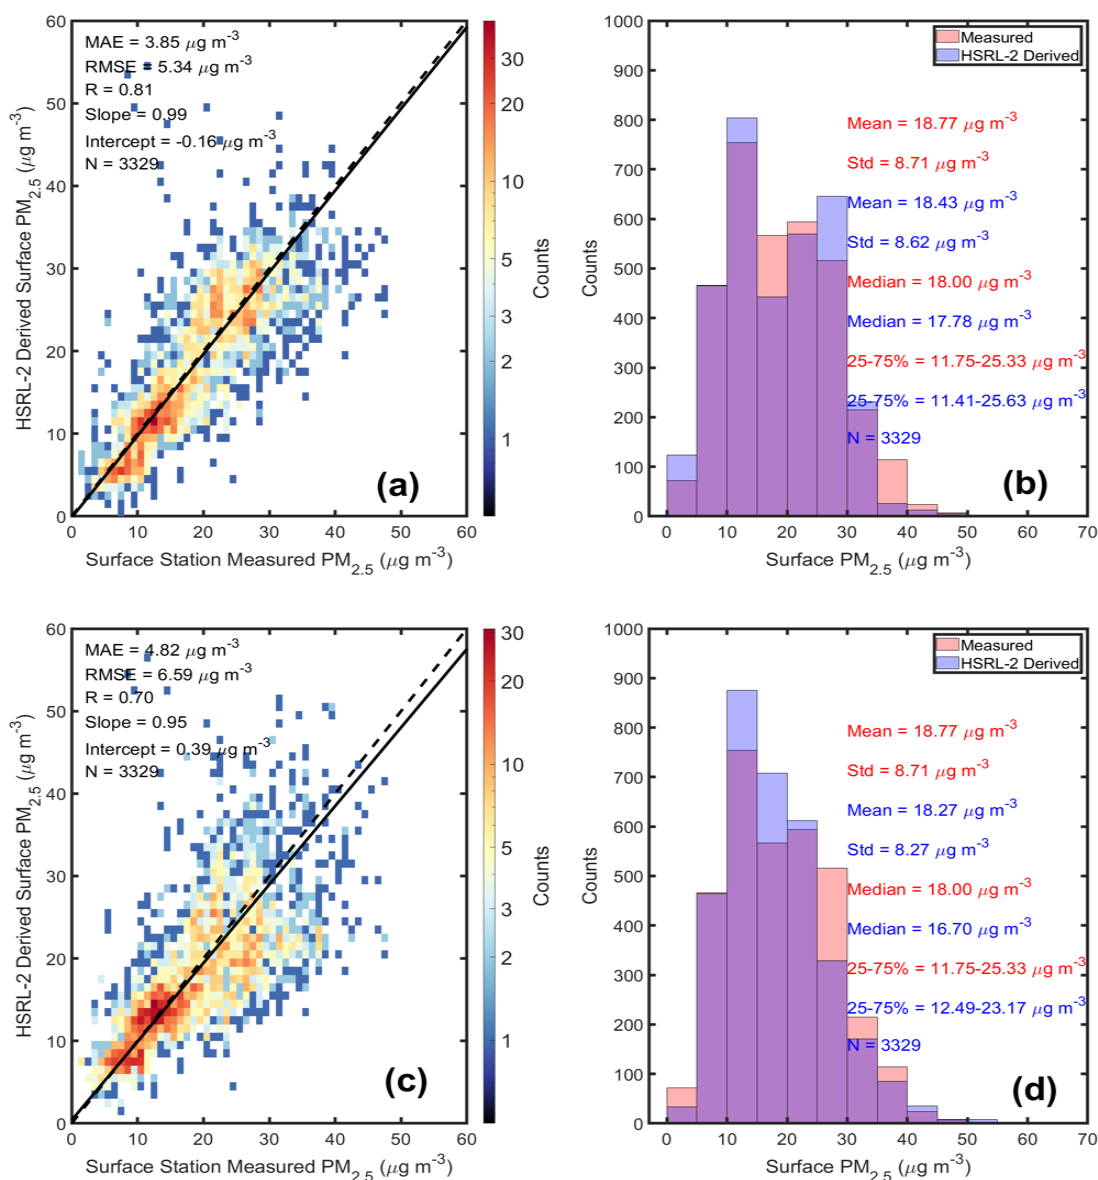


Figure 13. Same as Figure 12 except for the Asia-AQ mission; a) and b) correspond to results where Asia-AQ data were included in the training set and c) and d) correspond to results where Asia-AQ data were not included in the training set.

excluded data from the ASIA-AQ mission. Since nearly half (48%) of the data used in the original training set were from the ASIA-AQ mission, this represents a more extreme test than the exclusion of STAQS training set data discussed above. Note that ASIA-AQ contributed this much larger fraction of data to the training set due to the higher density of surface network ground stations in these locations (e.g. Seoul, South Korea; Taiwan in particular) as compared surface station density to the United States. This test may be somewhat unrealistic, but it does provide an interesting and drastic case where the method is applied to large amount of new data that have not been included in the training set. Such a case may arise when there are no coincident surface network PM measurements available to add to the training set. Comparing the results between the top and bottom panels in Figure 13 shows that excluding ASIA-AQ data from the training set produced only a modest degradation in retrieval performance. Given that ASIA-AQ contributed a large fraction of the data to the training set, this result shows that the methodology is relatively insensitive to changes in the size of the training set assuming that the remaining training data still adequately reflect the relationships among the HSRL aerosol measurements and the surface PM<sub>2.5</sub> concentrations. However, when confronted with a large amount of new data, we recommend, if possible, to include some of these new measurements as additional training data for optimal retrieval performance.

We also compared PM<sub>2.5</sub> derived from the HSRL-2 data acquired during the ASIA-AQ mission with PM<sub>2.5</sub> derived from the DC-8 *in situ* instruments as described in section 3.1. Recall PM<sub>2.5</sub> was retrieved from the DC-8 measurements using particle size distributions measured by the SMPS, UHSAS, and APS instruments and particle density measured by the AMS and SP2 instruments. In addition to providing another independent comparison of PM<sub>2.5</sub>, this exercise provides a way to examine HSRL-2 retrievals of PM<sub>2.5</sub> aloft as well as near the surface. The HSRL-2 retrievals of PM<sub>2.5</sub> aloft used for this comparison are determined in the same manner as the near-surface values such that the profiles of aerosol backscatter, depolarization, lidar ratio, etc. measured by HSRL-2 are used in the same ML regression algorithm that is used to derive near-surface PM<sub>2.5</sub>. PM<sub>2.5</sub> retrieved from DC-8 at one-second frequency was matched to HSRL-2 measurements that were within 5 km horizontally and 30 minutes using software previously developed for this purpose (Schlosser et al., 2024). Since HSRL-2 provides vertically resolved measurements, the closest retrieval to the DC-8 altitude was used for each profile. We then examined results after aggregating to one-minute averages of the matched data. Figure 14 shows that the HSRL and DC-8 *in situ* PM<sub>2.5</sub> retrievals aloft are in good agreement with correlations and MAE and RMS differences that are comparable to those found when comparing the HSRL retrievals of surface PM<sub>2.5</sub> to PM<sub>2.5</sub> measured by the surface network instruments.

Overall comparisons of HSRL-2 surface PM<sub>10</sub> and PM<sub>2.5</sub>/PM<sub>10</sub> retrievals and corresponding surface measurements during the ASIA-AQ mission are shown in Figure 15. These show results when the data from ASIA-AQ were included in the training sets. Consistent with Figures 5 and 6, retrieval performance for PM<sub>10</sub> as indicated by the correlation coefficient and slope is slightly reduced as compared to PM<sub>2.5</sub> (Figure 15a vs. Figure 13a). For typical aerosol size distributions, fine mode particles have a greater impact on the HSRL measurements of aerosol optical properties, particularly 355 nm and 532 nm, than coarse mode particles (Müller and Quenzel, 1985; Veselovskii et al., 2004). Figures 15c and 15d show that HSRL-2 retrievals of PM<sub>2.5</sub>/PM<sub>10</sub> agree well with surface measurements of PM<sub>2.5</sub>/PM<sub>10</sub> ratio for most of the range of PM<sub>2.5</sub>/PM<sub>10</sub> values with correlation coefficient of 0.82 and slope near unity. HSRL-2

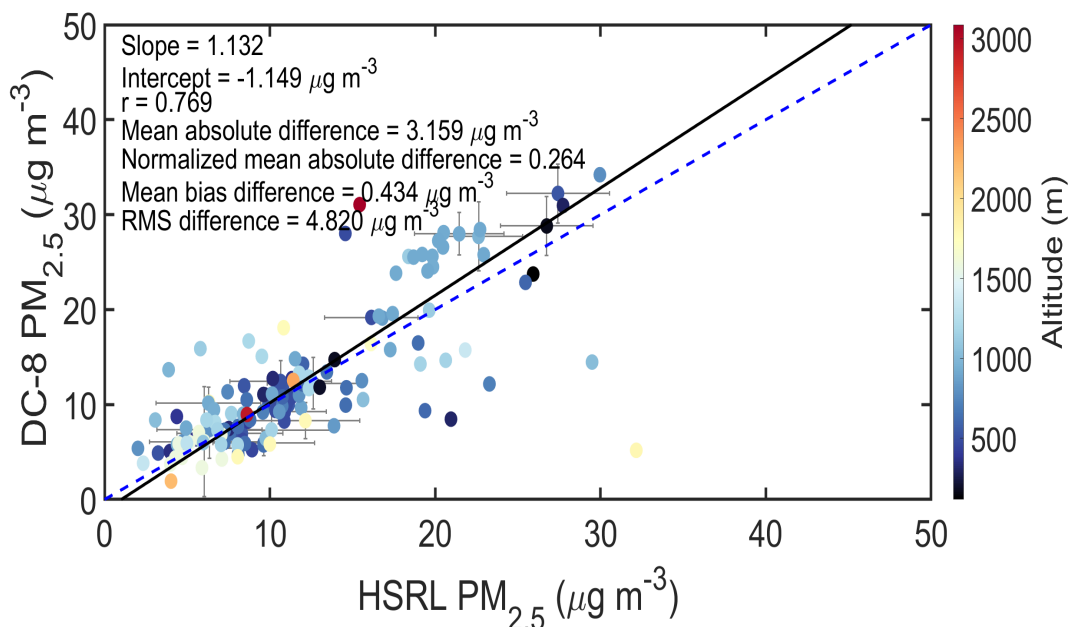


**Figure 14.** Comparison of  $\text{PM}_{2.5}$  derived from ML regression algorithms using HSRL-2 data (x axis) vs.  $\text{PM}_{2.5}$  derived from DC-8 in situ instruments (y-axis) during the ASIA-AQ mission. Results are color-coded by altitude. The solid line represents a least-squares bisector fit and the dashed line represents the 1:1 line. Error bars represent the two standard deviations derived from the one-minute averages.

retrievals of  $\text{PM}_{2.5}/\text{PM}_{10}$  ratio do not exceed about 0.85 and so do not capture the small number of high ( $>0.8$ )  $\text{PM}_{2.5}/\text{PM}_{10}$  ratios measured by the ground stations. This is likely due to the small number of such values in the training set used to derive  $\text{PM}_{2.5}/\text{PM}_{10}$  ratio from the HSRL data.

### 3.4 $\text{PM}_{2.5}$ and Aerosol Type

Airborne HSRL-2 retrievals of  $\text{PM}_{2.5}$  and inferences of aerosol type provide the means to estimate how various aerosol types contribute to  $\text{PM}_{2.5}$  concentrations. We use a classification algorithm to interpret the information about aerosol physical properties as indicated by the HSRL-2 aerosol intensive parameters. We perform this aerosol type classification empirically using HSRL measurements of aerosol intensive quantities for which the dependence on the aerosol amount has been ratioed out, such as the depolarization ratio (which is a ratio of channels sensitive to different polarizations); lidar ratio (the ratio of the extinction-to-backscatter); or “color ratio” of backscatter (the ratio of backscatter at two different wavelengths, closely related to the Angstrom exponent).

The classification method used here is an update on the method (Burton et al., 2012) which has been used extensively for classification of LaRC airborne HSRL data. The updated version of this algorithm adds the aerosol types “Non-spherical smoke” (Burton et al., 2015) and “Dry maritime” (Ferrare et al., 2023), and it drops the types “Polluted Maritime” and “Fresh Smoke” which subsequent use has shown are often not well separable from other types; it also drops the “Ice” type which was used as a way of filtering observations of fine ice particles observed during a particular Arctic field mission. Information about the aerosol type is embedded in aerosol intensive parameters including the 532 nm lidar ratio and the particulate depolarization at 532 and 1064 nm. In contrast to the original version, the updated

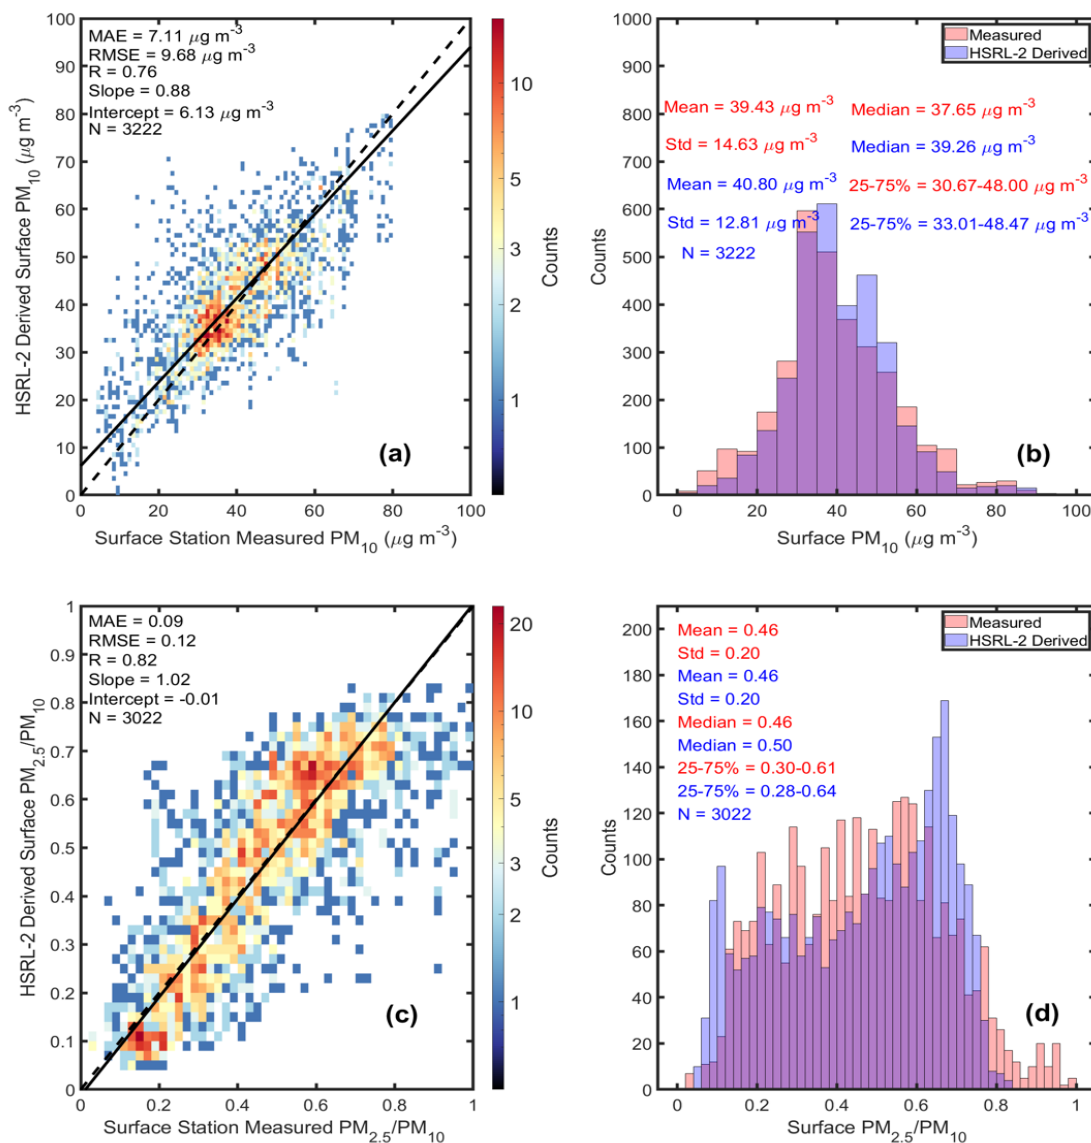


**Figure 15. Regression (a) and histogram (b) comparisons of surface PM<sub>10</sub> derived from airborne HSRL-2 measurements and measured by surface stations during the NASA Asia-AQ mission. (c) and (d) are the same except for the ratio PM<sub>2.5</sub>/PM<sub>10</sub>.**

algorithm also uses measurements of particulate depolarization and lidar ratio at 355 nm. There are sixteen additional training cases, comprising four each for smoke and pollution cases from both North America and Asia, three dry maritime cases, two each maritime and pure dust cases, and a non-spherical smoke case.

The original methodology was a supervised learning method that used training samples to create four-dimensional Gaussian covariance models of known aerosol types. The distance metric between a multi-dimensional point and multi-dimensional covariance matrix is the Mahalanobis distance, which gives scores or probabilities for the point being associated with the model. The updated classification algorithm uses a combination of this methodology with a decision tree. Specifically, a decision tree with specific thresholds on single variables splits the data into “branches”

with one or two aerosol types. Where there are multiple similar aerosol types on a branch, a two-dimensional Gaussian covariance model is used as in the original method (Burton et al., 2012). Limiting the need for covariance models to two types and two variables simplifies the need for training data for each type. An additional advantage of the updated method is that a decision tree avoids non-intuitive mappings of the space such as enclaves. A Gaussian model with large variability in one or more dimensions can act as a sink for noisy observations of all types, even fully surrounding a tighter class that has less variability. A decision tree avoids this problem while also preserving the ability to handle complicated boundaries between similar types in more than one dimension at a time, within the branches of the decision tree.

Figure 16 shows the distribution of  $PM_{2.5}$  associated with various major aerosol types (i.e., smoke, urban, dust, marine) as identified by the updated HSRL aerosol classification method for HSRL-2 data acquired during the ASIA-AQ mission. Shown are  $PM_{2.5}$  values derived during raster patterns over the four main locations of the Asia AQ flights. The results are divided in two altitude regions, 0-1 and 1-4 km, to provide some indication of how the contribution to  $PM_{2.5}$  by aerosol type varies with altitude. These results show that, excluding South Korea, dust generally contributed little to  $PM_{2.5}$ . Dust has often been observed in lidar measurements over Korea, so it is not surprising that dust is a

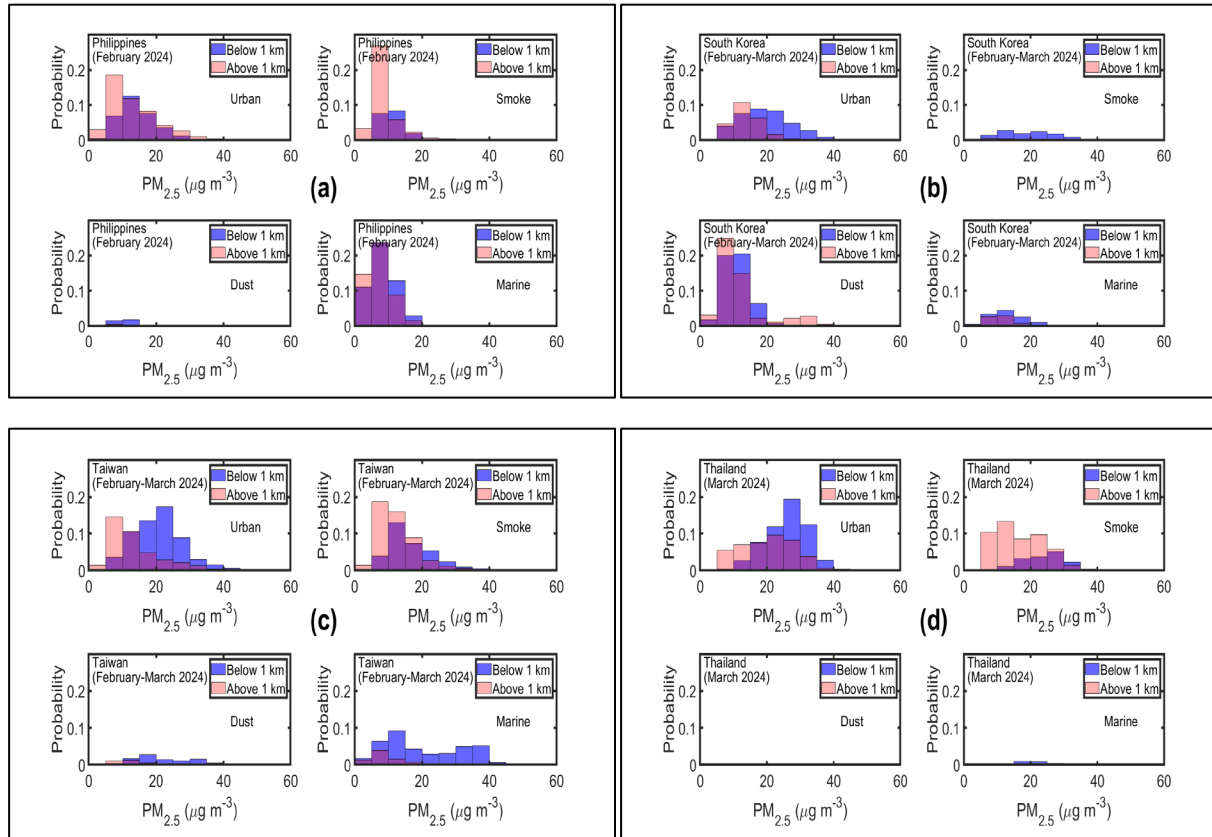

**Figure 16. Distribution of  $PM_{2.5}$  associated with various major aerosol types as identified by the HSRL aerosol classification method for data acquired during the Asia-AQ campaign. Results are shown for data acquired over the (a) Philippines, (b) South Korea, (c) Taiwan, and (d) Thailand.**

significant contributor to PM<sub>2.5</sub> in the HSRL-2 retrievals in this location. The optical properties of Asian dust over Korea have been found to vary depending on the altitude of the dust during transport over China. Dust that has crossed highly polluted regions of China at low altitudes are more likely to have been influenced by anthropogenic pollution (Shin et al., 2015).

As PM<sub>2.5</sub> increased over South Korea, urban (pollution) aerosols became more dominant below 1 km. This trend for urban aerosol to be the largest contributor as PM<sub>2.5</sub> increased, particularly below 1 km, is common to all four urban areas. Marine (sea salt) aerosol generally contributes little to PM<sub>2.5</sub> except for the Philippines and, in some cases, over Taiwan. Note that a significant portion of the raster patterns flown by the G-III aircraft during the Philippines portion of ASIA-AQ occurred over Manila Bay. Figure 16d shows that urban aerosol and smoke were the major contributors to PM<sub>2.5</sub> over Bangkok. The HSRL-2 results show that in the lowest kilometer urban aerosol was a larger contributor to PM<sub>2.5</sub> than smoke; in contrast, above 1 km, smoke more often contributed to PM<sub>2.5</sub> except in cases of higher PM<sub>2.5</sub>. A somewhat similar pattern was found over Taiwan with urban aerosol the major contributor below 1 km and a combination of smoke and urban aerosol above 1 km.

### 3.5 Aerosol Type and Mass Extinction Efficiency

The aerosol mass extinction efficiency (MEE) is an important parameter for translating between aerosol optical properties and aerosol mass and, therefore, is crucial for modeling aerosol transport, air quality, and radiative impacts on climate (Kahn, 2012; Kahn et al., 2017; Gliß et al., 2021; Kahn et al., 2023). Because considerable uncertainty exists among models regarding appropriate values associated with different aerosol types (Gliß et al., 2021), various efforts have been proposed to obtain measurements to derive MEE (Kahn et al., 2017). We use HSRL measurements of near surface extinction and retrievals of surface PM<sub>2.5</sub> and PM<sub>10</sub> concentrations to obtain estimates of MEE corresponding to the HSRL aerosol types.

An estimate of dry aerosol fine mode MEE, MEE<sub>f</sub>, can be obtained from the following equation


$$MEE_f = \frac{\sigma_a}{f(RH) \cdot PM_{2.5}} - \left( \frac{PM_{10}}{PM_{2.5}} - 1 \right) * MEE_c = \frac{\sigma_a}{f(RH) \cdot PM_{2.5}} - \left( \frac{1}{FMF} - 1 \right) * MEE_c \quad (1)$$

where  $\sigma_a$  represents the HSRL near-surface measurement of aerosol extinction (532 nm), PM<sub>2.5</sub> and PM<sub>10</sub> represent the near-surface retrievals of PM described earlier, MEE<sub>c</sub> represents the mass extinction efficiency of coarse mode aerosols,  $f(RH)$  is the humidification factor which represents the increase in scattering associated with hygroscopic growth of hygroscopic aerosols, and FMF is the fine mode fraction. We assume that RH has little impact on aerosol absorption (Nessler et al., 2005; Lynch et al., 2016). The humidification factor is required because HSRL measurements of aerosol extinction are at ambient RH and the derived PM<sub>2.5</sub> concentrations correspond to dry aerosol mass. We use an expression for the humidification factor as given by (Hänel, 1976)

$$f(RH) = \left( \frac{1 - \frac{RH}{100}}{1 - (RH_{ref}/100)} \right)^{-\Gamma} \quad (2)$$

where RH is the ambient relative humidity from the ERA5 reanalysis,  $RH_{ref}$  is a reference RH set to 30% (Lynch et al., 2016; Toth et al., 2019), and  $\Gamma$  is a fit parameter assumed to be 0.63, which corresponds to sulfate aerosol (Hänel, 1976; Lynch et al., 2016; Toth et al., 2019). To reduce the impact of  $f(RH)$  on estimates of  $MEE_f$ , we only examine cases for which  $RH < 70\%$ ; in such cases  $f(RH)$  is less than 1.7 and generally close to unity. We assume that coarse mode aerosol absorption is negligible so that the coarse mode mass extinction efficiency ( $MEE_c$ ) can be approximated by the coarse mode mass scattering efficiency. Coarse mode mass scattering (extinction) efficiencies typically range from roughly 0.5 to 1.5  $m^2 g^{-1}$  (Hand and Malm, 2007; Jung et al., 2018) so we have computed  $MEE_f$  assuming that  $MEE_c$  can vary over this range. To reduce the dependence of the estimated  $MEE_f$  on  $MEE_c$ , we avoid cases for which coarse mode aerosol extinction dominates and so examine cases for which the fine mode fraction (FMF) =  $PM_{2.5}/PM_{10}$  is greater than 0.5.


We examine cases corresponding to four major aerosol types identified by the HSRL aerosol classification algorithm during the ASIA-AQ mission: dusty mix, maritime, urban, and smoke. Figure 17 shows the retrieved  $MEE_f$  for these four types. The median value for dusty mix (3.3  $m^2 g^{-1}$ ) is within the range of mass scattering efficiency (2.6 – 3.4  $m^2 g^{-1}$ ) reported for fine mode dust (Hand and Malm, 2007). The median value for maritime aerosol (2.6  $m^2 g^{-1}$ ) is lower than the value associated with fine mode sea salt (4.5  $m^2 g^{-1}$ ) (Hand and Malm, 2007); however, this study recommends a much lower value ( $\sim 1.2 m^2 g^{-1}$ ) if some coarse mode sea salt aerosol is included in the sampling. The median value for urban aerosol (3.8  $m^2 g^{-1}$ ) is close to the value of 3.4  $m^2 g^{-1}$  used for pollution aerosol over the US (Toth et al., 2019; Toth et al., 2022), the value of 3.6  $m^2 g^{-1}$  recommended for mixed fine mode aerosol (Hand and Malm, 2007), and the value of 4.4  $m^2 g^{-1} \pm 0.8 m^2 g^{-1}$  found for urban China (Cheng et al., 2017). The median value of

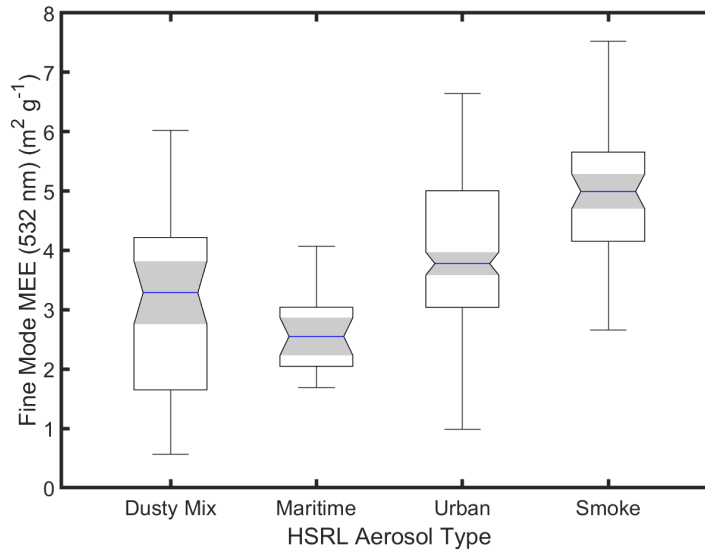

**Figure 17. Box chart showing the  $MEE_f$  retrieved from the HSRL-2 measurements for data acquired during the Asia-AQ mission. The results are shown for the various major aerosol types as identified by the HSRL aerosol classification method. Blue lines inside each box correspond to the median. Top and bottom edges of each box are the upper and lower quartiles, respectively. Whiskers represent the maximum and minimum values. Boxes whose shaded notch regions do not overlap have different medians at the 5% confidence level.**

5.0  $\text{m}^2 \text{g}^{-1}$  for smoke falls at the upper range of smoke MEE (1.5 to 6  $\text{m}^2 \text{g}^{-1}$ ) (Saide et al., 2022) reported from laboratory and field measurements and most likely corresponds to aged smoke (Reid et al., 2005; Kleinman et al., 2020; Saide et al., 2022).

We also compare  $\text{MEE}_f$  derived from the HSRL-2 data and from the DC-8 *in situ* data like the  $\text{PM}_{2.5}$  comparison shown in Figure 14. Recall that DC-8  $\text{MEE}_f$  is derived using the submicrometer dry aerosol extinction and  $\text{PM}_{2.5}$  derived from the DC-8 *in situ* measurements. As discussed above, to reduce the impact of uncertainties in  $f(\text{RH})$  and  $\text{MEE}_c$ , we compare HSRL-2 retrievals of  $\text{MEE}_f$  for which  $\text{RH} < 70\%$  and  $\text{FMF} > 0.5$ . Figure 18 shows that  $\text{MEE}_f$  derived from the HSRL-2 and DC-8 are in generally good agreement with MAE and RMS differences less than 1  $\text{m}^2 \text{g}^{-1}$ . In addition, both retrievals show the tendency of  $\text{MEE}_f$  to increase as the aerosol type changed from maritime to urban to smoke. Some of the discrepancies can be explained by the large variability in the one-minute averages, which likely represents inhomogeneous conditions with large gradients in aerosol properties.

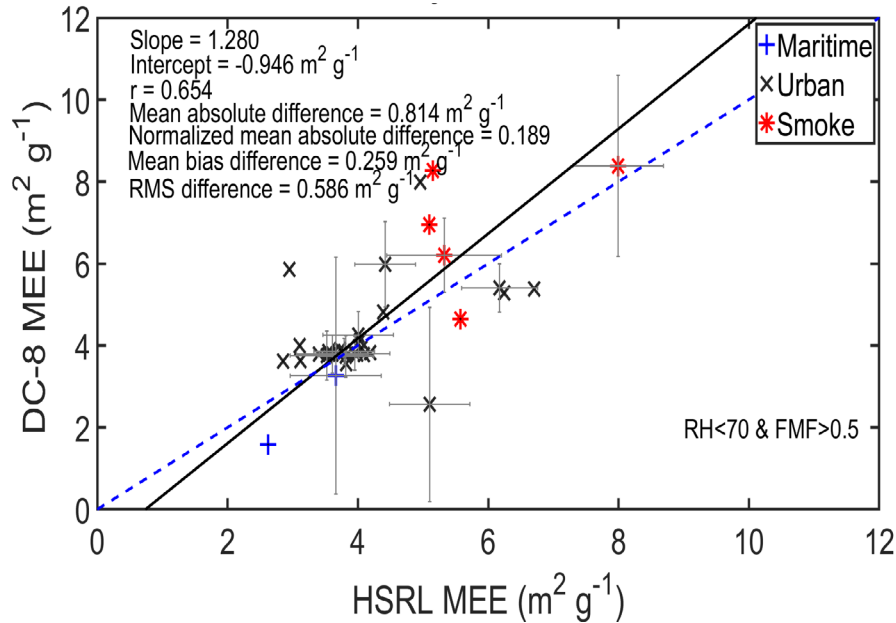

**Figure 18.** Comparison of  $\text{MEE}_f$  derived from HSRL-2 data (x axis) vs.  $\text{MEE}_f$  derived from DC-8 *in situ* instruments (y-axis) during the ASIA-AQ mission. Results are color-coded by aerosol type inferred from HSRL-2 data. The solid line represents a least-squares bisector fit and the dashed line represents the 1:1 line. Error bars represent the two standard deviations derived from the one-minute averages.

#### 4 Summary and Conclusion

We have developed a new method to retrieve  $\text{PM}_{2.5}$  and  $\text{PM}_{10}$  concentrations using airborne High Spectral Resolution Lidar (HSRL) measurements in machine learning regression algorithms. Unlike previous methods that have used airborne HSRL data to derive surface  $\text{PM}_{2.5}$  concentrations, this method does not require the HSRL qualitative inferences of aerosol type or aerosol chemical composition information provided by models. Nor does this method require estimates or assumptions of the mass extinction efficiency, aerosol humidification factor, fine mode fraction,

or particle density. This method takes advantage of the extensive set of airborne HSRL measurements acquired over major metropolitan regions in the United States and Asia over many years. We use hourly surface  $PM_{2.5}$  and  $PM_{10}$  measurements acquired within 10 kilometers and 15 minutes of these near-surface HSRL measurements to train models that compute PM concentrations based on these HSRL measurements. The extensive airborne HSRL datasets of aerosol measurements over metropolitan areas and surface are particularly well suited for developing this methodology of inferring surface PM concentrations. These algorithms take advantage of the unique capability of airborne HSRL systems to provide accurate aerosol measurements near the surface. In contrast to backscatter lidars, these systems provide direct measurements of near-surface calibrated aerosol backscatter and aerosol extinction without additional constraints or assumptions to account for attenuation by overlying aerosols. Also, HSRL systems provide measurements of aerosol intensive properties that provide valuable information regarding aerosol shape, size, and composition to help account for variations in these aerosol properties.

Our investigations have focused on the use of the aerosol properties (aerosol backscatter, extinction, depolarization) that are measured by these lidars and, except for relative humidity, have not attempted to include additional meteorological, surface, or aerosol parameters in these model regressions. There are three reasons for this. First, focusing on regression models that exclusively use airborne HSRL measurements provides the ability to retrieve accurate estimates of PM concentrations using HSRL measurements in near real-time when measurements or model simulations of additional meteorological and/or aerosol parameters are often unavailable. This permits rapid use of these PM retrievals to assess model forecasts and rapidly changing conditions over urban areas which is particularly useful in planning and executing field missions designed to study air quality. Second, these retrievals are independent of model simulations and model parameters and so represent an unbiased method to evaluate the model results. Third, the HSRL measurements themselves contain key information regarding aerosol shape, size, and composition and have been used in various methodologies to retrieve these parameters. Therefore, including such measurements in the machine learning regression provides the ability of these ML models to capture changes in aerosol type and physical properties (size, shape, composition) such as those caused by changes in relative humidity that impact the ability to infer PM concentrations. We found surface relative humidity to have minimal impact on the retrievals of surface PM and believe this is due, at least in part, to the inclusion of HSRL measurements of aerosol intensive parameters that respond to changes in RH.

We examined several regression methods and found that exponential Gaussian Process regression (GPR) algorithms consistently give the best retrieval performance in terms of the lowest root-mean-square (RMS) errors and the highest correlations. These GPR models also have the advantage of providing uncertainty estimates to quantify the confidence in the predictions. A disadvantage of GPR models is that such models can be computationally expensive. We also tested several different combinations of airborne HSRL measurements of near-surface aerosol parameters (e.g., aerosol backscatter, extinction, depolarization, backscatter color ratios, lidar ratios, aerosol optical thickness) and retrievals (e.g., mixed layer height, aerosol type) used in the ML regressions. Models that use near-surface measurements of aerosol backscatter and aerosol intensive properties such as depolarization, backscatter color ratio, and lidar ratio yielded retrievals of surface  $PM_{2.5}$  that agreed well with surface PM measurements; RMS differences between HSRL

retrievals and surface  $\text{PM}_{2.5}$  measurements were around  $5 \mu\text{g m}^{-3}$  with correlation coefficients above 0.8. Model performance was generally better for models that used near-surface aerosol backscatter rather than near-surface aerosol extinction. This is because near-surface aerosol backscatter profile measurements extend closer to the surface (within ~60-100 m) than near-surface aerosol extinction profiles (within ~ 200-350 meters). Also, the HSRL measurements of aerosol backscatter have smaller uncertainties and so are less noisy than the aerosol extinction measurements. Corresponding results for  $\text{PM}_{10}$  were slightly worse, with RMS differences around  $11 \mu\text{g m}^{-3}$  and correlation coefficients around 0.7. These comparison results were derived using data withheld from the training sets. Shapley scores reveal that aerosol backscatter (532 nm) was by far the most important variable for retrieving surface  $\text{PM}_{2.5}$ , and to a lesser extent, surface  $\text{PM}_{10}$ . Aerosol depolarization (532 nm) was the most important parameter for retrieving estimates of the  $\text{PM}_{2.5}/\text{PM}_{10}$  ratio due to its sensitivity to coarse mode nonspherical dust particles.

We used the airborne HSRL-2 aerosol measurements acquired during the recently completed NASA ASIA-AQ campaign to derive qualitative estimates of aerosol types using an updated aerosol classification algorithm. This new algorithm differs from our previous algorithm in two ways. First, it uses aerosol measurements acquired at 355 nm in addition to measurements acquired at 532 and 1064 nm. Second, the updated algorithm uses a decision tree in addition to the Mahalanobis distance metric. The  $\text{PM}_{2.5}$  retrievals showed that dust contributed little to the  $\text{PM}_{2.5}$  concentrations over the Philippines, Taiwan, and Thailand but had larger contributions over South Korea. For all areas, urban aerosol type became the largest contributor as  $\text{PM}_{2.5}$  levels increased. Over Thailand, both smoke and urban area were large contributors, with smoke providing the largest contribution above 1 km.

We used these estimates of aerosol types along with HSRL measurements of aerosol extinction and retrievals of surface  $\text{PM}_{2.5}$  to derive estimates of fine mode mass extinction efficiency  $\text{MEE}_f$  associated with major aerosol types. These estimates correspond to conditions of lower RH (<70%) and where the ratio  $\text{PM}_{2.5}/\text{PM}_{10}$  is above 0.5.  $\text{MEE}_f$  values for dusty mix ( $3.3 \text{ m}^2 \text{ g}^{-1}$ ) and urban aerosol ( $3.8 \text{ m}^2 \text{ g}^{-1}$ ) fall with the ranges reported elsewhere. The median value for smoke ( $5.0 \text{ m}^2 \text{ g}^{-1}$ ) lies at the upper range of reported values and most likely corresponds to aged smoke. The HSRL-2  $\text{PM}_{2.5}$  retrievals and  $\text{MEE}_f$  estimates are consistent with those derived from airborne *in situ* estimates.

The ML methodology described here can also be applied to ground-based and space-based lidars. For the former, it probably would be best to use a single training set based on measurements from several locations to include a wide variety of different aerosol types with different levels of PM. This training set could be developed using measurements from several of these lidars assuming that coincident and collocated measurements of PM were available for training. It would also be beneficial that measurements from these lidars had the same or very similar temporal and vertical resolutions and averaging characteristics.

In the case of the space-based lidars, satellite aerosol measurements such as those from the ATLID sensor on board the EarthCARE satellite could also be used with this ML methodology. ATLID is also an HSRL and so it independently measures backscattered light from atmospheric aerosols and backscattered light from atmospheric molecules, which enables it to derive independently both aerosol backscatter and extinction. Our tests using airborne

790 HSRL-2 data using data only acquired at 355 nm showed retrieval performance comparable to that obtained using  
 data from two (532 and 1064 nm) and three wavelengths (355, 532, 1064 nm). Since ATLID also provides  
 measurements of aerosol extinction, backscattering, and depolarization at 355 nm, these three parameters could be  
 used in the same regression model that was developed using the corresponding airborne HSRL-2 data. Alternatively,  
 a separate machine learning regression algorithm could be developed using these ATLID measured aerosol parameters  
 795 trained using coincident hourly measurements of surface  $PM_{2.5}$  from EPA surface stations and from similar networks  
 in other countries. Carefully chosen training data sets that include a wider range of PM values, locations, and aerosol  
 parameters acquired during both daytime and nighttime could be used to construct a robust regression model. Such a  
 model could take advantage of global data and so would have the advantage of being applicable over a much wider  
 range of PM values.

800 Long-term satellite lidar measurements such as those from ATLID offer the opportunity to provide a unique long-term  
 global lidar record of near-surface aerosol measurements that can be leveraged to study temporal and spatial variations  
 in PM. For example, twelve years of CALIOP measurements of near-surface aerosol extinction were used to derive  
 multi-year mean and trends of surface  $PM_{2.5}$  over the contiguous United States (Toth et al., 2022). ATLID  
 measurements provide the means to extend this record. These satellite and airborne HSRL measurements described  
 805 here can be used to evaluate the ability of aerosol models to depict the vertical structure of aerosols, apportion aerosol  
 extinction and optical thickness to aerosol species, and estimate PM concentrations.

### Data Availability

Airborne HSRL data from the NASA STAQS and ASIA-AQ missions are available from the NASA Langley  
 810 Research Center's Atmospheric Science Data Center (ASDC)  
 ([https://asdc.larc.nasa.gov/project/STAQS/STAQS\\_AircraftRemoteSensing\\_JSC-GV\\_HSRL2\\_Data\\_1](https://asdc.larc.nasa.gov/project/STAQS/STAQS_AircraftRemoteSensing_JSC-GV_HSRL2_Data_1)) (doi  
 10.5067/ASDC/SUBORBITAL/STAQS/DATA001/GV/AircraftRemoteSensing/HSRL2\_1) and  
 ([https://asdc.larc.nasa.gov/project/ASIA-AQ/ASIA-AQ\\_AircraftRemoteSensing\\_LaRC-G3\\_HSRL2\\_Data\\_1](https://asdc.larc.nasa.gov/project/ASIA-AQ/ASIA-AQ_AircraftRemoteSensing_LaRC-G3_HSRL2_Data_1)) (doi  
 10.5067/ASDC/SUBORBITAL/ASIA-AQ/DATA001/G3/AircraftRemoteSensing/HSRL2\_1), respectively. Airborne  
 815 in situ data collected on the NASA DC-8 aircraft during ASIA-AQ are also available from the ASDC at  
 ([https://asdc.larc.nasa.gov/project/ASIA-AQ/ASIA-AQ\\_Analysis\\_DC-8\\_Data\\_1](https://asdc.larc.nasa.gov/project/ASIA-AQ/ASIA-AQ_Analysis_DC-8_Data_1)) (doi  
 10.5067/SUBORBITAL/ASIA-AQ/DATA001/DC-8/Analysis\_1). Surface  $PM_{2.5}$  retrievals for the HSRL-2  
 measurements acquired during the ASIA-AQ mission are also available from this archive. Surface  $PM_{2.5}$  data in the  
 USA were provided by the US Environmental Protection Agency, Air Quality System Data Mart [internet database]  
 820 available via <https://www.epa.gov/outdoor-air-quality-data>. Accessed November 2024.

### Author Contributions

JH, TS, CH, AN, JC, LJ contributed to the collection of airborne HSRL data. JC, KT, JLJ, PCJ, GS, JD, RB  
 825 contributed to the collection of airborne DC-8 data. CH, LC, AA, and IP contributed to the collection of surface PM

network data. MF, AJS, SB, MC, PS contributed to the data analyses. SB developed the HSRL aerosol classification algorithm. All authors participated in the review and editing process.

### Competing Interests

The contact author has declared that none of the authors has any competing interests.

### Funding

This work was funded by the NASA Tropospheric Composition and Radiation Sciences Programs. Funding for the *in situ* aerosol composition measurements acquired by JLJ, PCJ, and GS was provided by NASA Grant #80NSSC23K0828.

### Acknowledgements

We thank the NASA aircraft pilots, aircrew, and maintenance personnel for their support during the NASA field missions that made these measurements possible. Surface PM data in the USA were provided by the US Environmental Protection Agency, Air Quality System Data Mart [internet database] available via <https://www.epa.gov/outdoor-air-quality-data>. Accessed November 2024.

### References

- Aguilera, R., Corringham, T., Gershunov, A., and Benmarhnia, T.: Wildfire smoke impacts respiratory health more than fine particles from other sources: observational evidence from Southern California, *Nat Commun*, 12, 1493, 10.1038/s41467-021-21708-0, 2021.
- Al-Saadi, J. A., Rosen, R., Bohnenkamp, C., Szykman, J., Chu, D., Hair, J., Hostetler, C., Ferrare, R., Arcemont, G., and Kittaka, C.: Application of satellite aerosol optical depth and airborne lidar data for monitoring fine particulate formation and transport in San Joaquin Valley, California, 10th Conference on Atmospheric Chemistry,
- Barton-Grimley, R. A., Nehrir, A. R., Kooi, S. A., Collins, J. E., Harper, D. B., Notari, A., Lee, J., DiGangi, J. P., Choi, Y., and Davis, K. J.: Evaluation of the High Altitude Lidar Observatory (HALO) methane retrievals during the summer 2019 ACT-America campaign, *Atmos. Meas. Tech.*, 15, 4623-4650, 10.5194/amt-15-4623-2022, 2022.
- Browell, E. V.: Differential absorption lidar sensing of ozone, *Proceedings of the IEEE*, 77, 419-432, 1989.
- Burton, S., Hair, J., Kahnert, M., Ferrare, R., Hostetler, C., Cook, A., Harper, D., Berkoff, T., Seaman, S., and Collins, J.: Observations of the spectral dependence of linear particle depolarization ratio of aerosols using NASA Langley airborne High Spectral Resolution Lidar, *Atmospheric Chemistry and Physics*, 15, 13453-13473, 2015.
- Burton, S., Hostetler, C., Cook, A., Hair, J., Seaman, S., Scola, S., Harper, D., Smith, J., Fenn, M., and Ferrare, R. A.: Calibration of a high spectral resolution lidar using a Michelson interferometer, with data examples from ORACLES, *Applied optics*, 57, 6061-6075, 2018.
- Burton, S. P., Ferrare, R. A., Hostetler, C. A., Hair, J. W., Rogers, R. R., Obland, M. D., Butler, C. F., Cook, A. L., Harper, D. B., and Froyd, K. D.: Aerosol Classification of Airborne High Spectral Resolution Lidar Measurements – Methodology and Examples, 10.5194/amt-5-73-2012, 2012.
- Burton, S. P., Ferrare, R. A., Hostetler, C. A., Hair, J. W., Kittaka, C., Vaughan, M. A., Obland, M. D., Rogers, R. R., Cook, A. L., Harper, D. B., and Remer, L. A.: Using airborne high spectral resolution lidar data to evaluate combined active plus passive retrievals of aerosol extinction profiles, 10.1029/2009jd012130, 2010.

Carroll, B. J., Nehrir, A. R., Kooi, S. A., Collins, J. E., Barton-Grimley, R. A., Notari, A., Harper, D. B., and Lee, J.: Differential absorption lidar measurements of water vapor by the High Altitude Lidar Observatory (HALO): retrieval framework and first results, *Atmos. Meas. Tech.*, 15, 605-626, 10.5194/amt-15-605-2022, 2022.

Chen, B., Song, Z., Pan, F., and Huang, Y.: Obtaining vertical distribution of PM<sub>2.5</sub> from CALIOP data and machine learning algorithms, *Science of The Total Environment*, 805, 150338, <https://doi.org/10.1016/j.scitotenv.2021.150338>, 2022.

Chen, Q.-X., Yuan, Y., Huang, X., Jiang, Y.-Q., and Tan, H.-P.: Estimation of surface-level PM<sub>2.5</sub> concentration using aerosol optical thickness through aerosol type analysis method, *Atmospheric Environment*, 159, 26-33, <https://doi.org/10.1016/j.atmosenv.2017.03.050>, 2017.

Cheng, Z., Ma, X., He, Y., Jiang, J., Wang, X., Wang, Y., Sheng, L., Hu, J., and Yan, N.: Mass extinction efficiency and extinction hygroscopicity of ambient PM<sub>2.5</sub> in urban China, *Environmental Research*, 156, 239-246, <https://doi.org/10.1016/j.envres.2017.03.022>, 2017.

Chu, D. A., Kaufman, Y., Zibordi, G., Chern, J., Mao, J., Li, C., and Holben, B.: Global monitoring of air pollution over land from the Earth Observing System-Terra Moderate Resolution Imaging Spectroradiometer (MODIS), *Journal of Geophysical Research: Atmospheres*, 108, 2003.

Chu, D. A., Tsai, T.-C., Chen, J.-P., Chang, S.-C., Jeng, Y.-J., Chiang, W.-L., and Lin, N.-H.: Interpreting aerosol lidar profiles to better estimate surface PM<sub>2.5</sub> for columnar AOD measurements, *Atmospheric environment*, 79, 172-187, 2013.

Chu, D. A., Ferrare, R., Szykman, J., Lewis, J., Scarino, A., Hains, J., Burton, S., Chen, G., Tsai, T., and Hostetler, C.: Regional characteristics of the relationship between columnar AOD and surface PM<sub>2.5</sub>: Application of lidar aerosol extinction profiles over Baltimore–Washington Corridor during DISCOVER-AQ, *Atmospheric Environment*, 101, 338-349, 2015.

Crawford, J. H., Travis, K. R., Judd, L. M., Lefer, B. L., Dibb, J. E., Kim, J., Park, R., Lee, G., Chang, L., and Simpas, J. B. B.: The Airborne and Satellite Investigation of Asian Air Quality (Asia-Aq): An Opportunity for International Collaboration, *IGARSS 2022-2022 IEEE International Geoscience and Remote Sensing Symposium*, 6506-6509, 2022.

Dawson, K. W., Meskhidze, N., Burton, S. P., Johnson, M. S., Kacenelenbogen, M. S., Hostetler, C. A., and Hu, Y.: Creating Aerosol Types from CHEMISTRY (CATCH): A New Algorithm to Extend the Link Between Remote Sensing and Models, *Journal of Geophysical Research: Atmospheres*, 122, 12,366-312,392, <https://doi.org/10.1002/2017JD026913>, 2017.

Diao, M., Holloway, T., Choi, S., O'Neill, S. M., Al-Hamdan, M. Z., Van Donkelaar, A., Martin, R. V., Jin, X., Fiore, A. M., Henze, D. K., Lacey, F., Kinney, P. L., Freedman, F., Larkin, N. K., Zou, Y., Kelly, J. T., and Vaidyanathan, A.: Methods, availability, and applications of PM(2.5) exposure estimates derived from ground measurements, satellite, and atmospheric models, *J Air Waste Manag Assoc*, 69, 1391-1414, 10.1080/10962247.2019.1668498, 2019.

Environmental Protection Agency, U.: National ambient air quality standards for particulate matter: Final rule, *Federal Register*, 62, 38651-38701, 1997.

Environmental Protection Agency, U.: Reviewing National Ambient Air Quality Standards (NAAQS): scientific and technical information, 2017.

Fang, Z., Yang, H., Li, C., Cheng, L., Zhao, M., and Xie, C.: Prediction of PM<sub>2.5</sub> hourly concentrations in Beijing based on machine learning algorithm and ground-based LiDAR, *Archives of Environmental Protection*, 47, 2021.

Fast, J., Allan, J., Bahreini, R., Craven, J., Emmons, L., Ferrare, R., Hayes, P., Hodzic, A., Holloway, J., and Hostetler, C.: Modeling regional aerosol and aerosol precursor variability over California and its sensitivity to emissions and long-range transport during the 2010 CalNex and CARES campaigns, *Atmospheric Chemistry and Physics*, 14, 10013-10060, 2014.

Fast, J. D., Gustafson Jr, W. I., Chapman, E. G., Easter, R. C., Rishel, J. P., Zaveri, R. A., Grell, G. A., and Barth, M. C.: The Aerosol Modeling Testbed: A community tool to objectively evaluate aerosol process modules, *Bulletin of the American Meteorological Society*, 92, 343-360, 2011.

Ferrare, R., Hair, J., Hostetler, C., Shingler, T., Burton, S. P., Fenn, M., Clayton, M., Scarino, A. J., Harper, D., and Seaman, S.: Airborne HSRL-2 measurements of elevated aerosol depolarization associated with non-spherical sea salt, *Frontiers in Remote Sensing*, 4, 1143944, 2023.

Ferrare, R., Hostetler, C., Burton, S., Fenn, M., Harper, D., Cook, T., Scarino, A. J., Clayton, M., Hair, J., and Lee, J.: Airborne High Spectral Resolution Lidar Measurements of Aerosol Distributions and Properties during the NASA CAMP2Ex Mission, *American Meteorological Society Annual Meeting*, 2023.

- Floutsis, A. A., Baars, H., and Wandinger, U.: HETEAC-Flex: an optimal estimation method for aerosol typing based on lidar-derived intensive optical properties, *Atmos. Meas. Tech.*, 17, 693-714, 10.5194/amt-17-693-2024, 2024.
- 930 Gliß, J., Mortier, A., Schulz, M., Andrews, E., Balkanski, Y., Bauer, S. E., Benedictow, A. M. K., Bian, H., Checa-Garcia, R., Chin, M., Ginoux, P., Griesfeller, J. J., Heckel, A., Kipling, Z., Kirkevåg, A., Kokkola, H., Laj, P., Le Sager, P., Lund, M. T., Lund Myhre, C., Matsui, H., Myhre, G., Neubauer, D., van Noije, T., North, P., Olinié, D. J. L., Rémy, S., Sogacheva, L., Takemura, T., Tsigaridis, K., and Tsyro, S. G.: AeroCom phase III multi-model evaluation of the aerosol life cycle and optical properties using ground- and space-based remote sensing as well as surface in situ observations, *Atmos. Chem. Phys.*, 21, 87-128, 10.5194/acp-21-87-2021, 2021.
- 935 Greenstone, M.: The impacts of environmental regulations on industrial activity: Evidence from the 1970 and 1977 clean air act amendments and the census of manufactures, *Journal of political economy*, 110, 1175-1219, 2002.
- Groß, S., Esselborn, M., Abicht, F., Wirth, M., Fix, A., and Minikin, A.: Airborne high spectral resolution lidar observation of pollution aerosol during EUCAARI-LONGREX, 10.5194/acp-13-2435-2013, 2013.
- 940 Grund, C. J. and Eloranta, E. W.: University-of-Wisconsin High Spectral Resolution Lidar, *Optical Engineering*, 30, 6-12, 1991.
- Guo, H., Campuzano-Jost, P., Nault, B. A., Day, D. A., Schroder, J. C., Kim, D., Dibb, J. E., Dollner, M., Weinzierl, B., and Jimenez, J. L.: The importance of size ranges in aerosol instrument intercomparisons: a case study for the Atmospheric Tomography Mission, *Atmospheric Measurement Techniques*, 14, 3631-3655, 2021.
- 945 Hair, J. W., Hostetler, C. A., Cook, A. L., Harper, D. B., Ferrare, R. A., Mack, T. L., Welch, W., Izquierdo, L. R., and Hovis, F. E.: Airborne High Spectral Resolution Lidar for profiling aerosol optical properties, 10.1364/AO.47.006734, 2008.
- Hand, J. L. and Malm, W. C.: Review of aerosol mass scattering efficiencies from ground-based measurements since 1990, *Journal of Geophysical Research: Atmospheres*, 112, <https://doi.org/10.1029/2007JD008484>, 2007.
- 950 Handschuh, J., Erbertseder, T., Schaap, M., and Baier, F.: Estimating PM<sub>2.5</sub> surface concentrations from AOD: A combination of SLSTR and MODIS, *Remote Sensing Applications: Society and Environment*, 26, 100716, <https://doi.org/10.1016/j.rsase.2022.100716>, 2022.
- Hänel, G.: The properties of atmospheric aerosol particles as functions of the relative humidity at thermodynamic equilibrium with the surrounding moist air, in: *Advances in geophysics*, Elsevier, 73-188, 1976.
- 955 Harshvardhan, H., Ferrare, R., Burton, S., Hair, J., Hostetler, C., Harper, D., Cook, A., Fenn, M., Scarino, A. J., and Chemyakin, E.: Vertical structure of biomass burning aerosol transported over the southeast Atlantic Ocean, *Atmospheric Chemistry and Physics*, 22, 9859-9876, 2022.
- Hasheminassab, S., Pakbin, P., Delfino, R. J., Schauer, J. J., and Sioutas, C.: Diurnal and seasonal trends in the apparent density of ambient fine and coarse particles in Los Angeles, *Environ Pollut*, 187, 1-9, 10.1016/j.envpol.2013.12.015, 2014.
- 960 Hersbach, H., Bell, B., Berrisford, P., Hirahara, S., Horányi, A., Muñoz-Sabater, J., Nicolas, J., Peubey, C., Radu, R., and Schepers, D.: The ERA5 global reanalysis, *Quarterly journal of the royal meteorological society*, 146, 1999-2049, 2020.
- Hoff, R. M. and Christopher, S. A.: Remote Sensing of Particulate Pollution from Space: Have We Reached the Promised Land?, *Journal of the Air & Waste Management Association*, 59, 645-675, 10.3155/1047-3289.59.6.645, 2009.
- 965 Josset, D., Rogers, R., Pelon, J., Hu, Y. X., Liu, Z. Y., Omar, A., and Zhai, P. W.: CALIPSO lidar ratio retrieval over the ocean, *Opt Express*, 19, 18696-18706, 2011.
- Judd, L., Sullivan, J., Crawford, J., Lefer, B., Martin, M. Y., Travis, K., Chance, K., Liu, X., Janz, S., and Hair, J.: Accelerating TEMPO Air Quality Science Through STAQS, *AGU Fall Meeting*,
- 970 Jung, C. H., Um, J., Bae, S. Y., Yoon, Y. J., Lee, S. S., Lee, J. Y., and Kim, Y. P.: Analytic expression for the aerosol mass efficiencies for polydispersed accumulation mode, *Aerosol and Air Quality Research*, 18, 1503-1514, 2018.
- Kahn, R. A.: Reducing the Uncertainties in Direct Aerosol Radiative Forcing, *Surveys in Geophysics*, 33, 701-721, 10.1007/s10712-011-9153-z, 2012.
- 975 Kahn, R. A., Andrews, E., Brock, C. A., Chin, M., Feingold, G., Gettelman, A., Levy, R. C., Murphy, D. M., Nenes, A., Pierce, J. R., Popp, T., Redemann, J., Sayer, A. M., da Silva, A. M., Sogacheva, L., and Stier, P.: Reducing Aerosol Forcing Uncertainty by Combining Models With Satellite and Within-The-Atmosphere Observations: A Three-Way Street, *Reviews of Geophysics*, 61, e2022RG000796, <https://doi.org/10.1029/2022RG000796>, 2023.
- 980 Kahn, R. A., Berkoff, T. A., Brock, C., Chen, G., Ferrare, R. A., Ghan, S., Hansico, T. F., Hegg, D. A., Martins, J. V., McNaughton, C. S., Murphy, D. M., Ogren, J. A., Penner, J. E., Pilewskie, P., Seinfeld, J. H., and Worsnop, D. R.: SAM-CAAM: A Concept for Acquiring Systematic Aircraft Measurements to Characterize Aerosol Air

Masses, Bulletin of the American Meteorological Society, 98, 2215-2228, <https://doi.org/10.1175/BAMS-D-16-0003.1>, 2017.

985 Kassianov, E., Ovchinnikov, M., Berg, L. K., McFarlane, S. A., Flynn, C., Ferrare, R., Hostetler, C., and Alexandrov, M.: Retrieval of aerosol optical depth in vicinity of broken clouds from reflectance ratios: case study, Atmospheric Measurement Techniques, 3, 1333-1349, DOI 10.5194/amt-3-1333-2010, 2010.

990 Kim, D., Campuzano-Jost, P., Guo, H., Day, D. A., Yang, D., Dhaniyala, S., Williams, L., Croteau, P., Jayne, J., and Worsnop, D.: Development and characterization of an aircraft inlet system for broader quantitative particle sampling at higher altitudes: aerodynamic lenses, beam and vaporizer diagnostics, and pressure-controlled inlets, Aerosol Research, 3, 371-404, 2025.

Kim, Y. H., Warren, S. H., Krantz, Q. T., King, C., Jaskot, R., Preston, W. T., George, B. J., Hays, M. D., Landis, M. S., Higuchi, M., DeMarini, D. M., and Gilmour, M. I.: Mutagenicity and Lung Toxicity of Smoldering vs. Flaming Emissions from Various Biomass Fuels: Implications for Health Effects from Wildland Fires, Environ Health Perspect, 126, 017011, 10.1289/EHP2200, 2018.

995 Kleinman, L. I., Sedlacek Iii, A. J., Adachi, K., Buseck, P. R., Collier, S., Dubey, M. K., Hodshire, A. L., Lewis, E., Onasch, T. B., Pierce, J. R., Shilling, J., Springston, S. R., Wang, J., Zhang, Q., Zhou, S., and Yokelson, R. J.: Rapid evolution of aerosol particles and their optical properties downwind of wildfires in the western US, Atmos. Chem. Phys., 20, 13319-13341, 10.5194/acp-20-13319-2020, 2020.

1000 Knobelspiesse, K., Cairns, B., Ottaviani, M., Ferrare, R., Hair, J., Hostetler, C., Obland, M., Rogers, R., Redemann, J., Shinzuka, Y., Clarke, A., Freitag, S., Howell, S., Kapustin, V., and McNaughton, C.: Combined retrievals of boreal forest fire aerosol properties with a polarimeter and lidar, Atmos Chem Phys, 11, 7045-7067, DOI 10.5194/acp-11-7045-2011, 2011.

Kuwata, M., Zorn, S. R., and Martin, S. T.: Using elemental ratios to predict the density of organic material composed of carbon, hydrogen, and oxygen, Environmental science & technology, 46, 787-794, 2012.

1005 Lary, D. J., Lary, T., and Sattler, B.: Using Machine Learning to Estimate Global PM<sub>2.5</sub> for Environmental Health Studies, Environmental Health Insights, 9s1, EHI.S15664, 10.4137/ehi.s15664, 2015.

Law, B. E., Abatzoglou, J. T., Schwalm, C. R., Byrne, D., Fann, N., and Nassikas, N. J.: Anthropogenic climate change contributes to wildfire particulate matter and related mortality in the United States, Communications Earth & Environment, 6, 336, 2025.

1010 Lee, A., Jeong, S., Joo, J., Park, C.-R., Kim, J., and Kim, S.: Potential role of urban forest in removing PM<sub>2.5</sub>: A case study in Seoul by deep learning with satellite data, Urban Climate, 36, 100795, <https://doi.org/10.1016/j.uclim.2021.100795>, 2021.

Lee, H. J., Coull, B. A., Bell, M. L., and Koutrakis, P.: Use of satellite-based aerosol optical depth and spatial clustering to predict ambient PM<sub>2.5</sub> concentrations, Environ Res, 118, 8-15, 10.1016/j.envres.2012.06.011, 2012.

1015 Li, S., Joseph, E., Min, Q., Yin, B., Sakai, R., and Payne, M. K.: Remote sensing of PM<sub>2.5</sub> during cloudy and nighttime periods using ceilometer backscatter, Atmos. Meas. Tech., 10, 2093-2104, 10.5194/amt-10-2093-2017, 2017.

1020 Liu, Y., Sarnat, J. A., Kilaru, V., Jacob, D. J., and Koutrakis, P.: Estimating ground-level PM<sub>2.5</sub> in the eastern United States using satellite remote sensing, Environ Sci Technol, 39, 3269-3278, 10.1021/es049352m, 2005a.

Liu, Y., Sarnat, J. A., Kilaru, V., Jacob, D. J., and Koutrakis, P.: Estimating ground-level PM<sub>2.5</sub> in the eastern United States using satellite remote sensing, Environmental science & technology, 39, 3269-3278, 2005b.

Liu, Y., Li, C., Liu, D., Tang, Y., Seyler, B. C., Zhou, Z., Hu, X., Yang, F., and Zhan, Y.: Deriving hourly full-coverage PM<sub>2.5</sub> concentrations across China's Sichuan Basin by fusing multisource satellite retrievals: A machine-learning approach, Atmospheric Environment, 271, 118930, 2022.

1025 Lynch, P., Reid, J. S., Westphal, D. L., Zhang, J., Hogan, T. F., Hyer, E. J., Curtis, C. A., Hegg, D. A., Shi, Y., and Campbell, J. R.: An 11-year global gridded aerosol optical thickness reanalysis (v1. 0) for atmospheric and climate sciences, Geoscientific Model Development, 9, 1489-1522, 2016.

1030 Ma, X., Huang, Z., Qi, S., Huang, J., Zhang, S., Dong, Q., and Wang, X.: Ten-year global particulate mass concentration derived from space-borne CALIPSO lidar observations, Science of the Total Environment, 721, 137699, 2020.

Ma, Y., Zhu, Y., Liu, B., Li, H., Jin, S., Zhang, Y., Fan, R., and Gong, W.: Estimation of the vertical distribution of particle matter (PM<sub>2.5</sub>) concentration and its transport flux from lidar measurements based on machine learning algorithms, Atmos. Chem. Phys., 21, 17003-17016, 10.5194/acp-21-17003-2021, 2021.

1035 Matus, A. V., Nowotnick, E. P., Yorks, J. E., and da Silva, A. M.: Enhancing Surface PM<sub>2.5</sub> Air Quality Estimates in GEOS Using CATS Lidar Data, Earth and Space Science, 12, e2024EA004078, <https://doi.org/10.1029/2024EA004078>, 2025.

- McPherson, C. J., Reagan, J. A., Schafer, J., Giles, D., Ferrare, R., Hair, J., and Hostetler, C.: AERONET, airborne HSRL, and CALIPSO aerosol retrievals compared and combined: A case study, 10.1029/2009jd012389, 2010.
- 1040 Meskhidze, N., Sutherland, B., Ling, X., Dawson, K., Johnson, M. S., Henderson, B., Hostetler, C. A., and Ferrare, R. A.: Improving estimates of PM<sub>2.5</sub> concentration and chemical composition by application of High Spectral Resolution Lidar (HSRL) and Creating Aerosol Types from chemistry (CATCH) algorithm, *Atmospheric Environment*, 250, 118250, 2021.
- 1045 Moore, R. H., Thornhill, K. L., Weinzierl, B., Sauer, D., D'Ascoli, E., Kim, J., Lichtenstern, M., Scheibe, M., Beaton, B., and Beyersdorf, A. J.: Biofuel blending reduces particle emissions from aircraft engines at cruise conditions, *Nature*, 543, 411-415, 2017.
- Moore, R. H., Wiggins, E. B., Ahern, A. T., Zimmerman, S., Montgomery, L., Campuzano Jost, P., Robinson, C. E., Ziemba, L. D., Winstead, E. L., and Anderson, B. E.: Sizing response of the Ultra-High Sensitivity Aerosol Spectrometer (UHSAS) and Laser Aerosol Spectrometer (LAS) to changes in submicron aerosol composition and refractive index, *Atmospheric Measurement Techniques*, 14, 4517-4542, 2021.
- 1050 Müller, D., Hostetler, C. A., Ferrare, R., Burton, S., Chemyakin, E., Kolgotin, A., Hair, J. W., Cook, A., Harper, D. B., and Rogers, R.: Airborne Multiwavelength High Spectral Resolution Lidar (HSRL-2) observations during TCAP 2012: vertical profiles of optical and microphysical properties of a smoke/urban haze plume over the northeastern coast of the US, *Atmospheric measurement techniques*, 7, 3487-3496, 2014.
- 1055 Müller, H. and Quenzel, H.: Information content of multispectral lidar measurements with respect to the aerosol size distribution, *Applied Optics*, 24, 648-654, 10.1364/AO.24.000648, 1985.
- Munchak, L. A., Levy, R. C., Mattoo, S., Remer, L. A., Holben, B. N., Schafer, J. S., Hostetler, C. A., and Ferrare, R. A.: MODIS 3 km aerosol product: applications over land in an urban/suburban region, 10.5194/amt-6-1747-2013, 2013.
- 1060 Nessler, R., Weingartner, E., and Baltensperger, U.: Effect of humidity on aerosol light absorption and its implications for extinction and the single scattering albedo illustrated for a site in the lower free troposphere, *Journal of Aerosol Science*, 36, 958-972, 2005.
- Noble, C. A., Vanderpool, R. W., Peters, T. M., McElroy, F. F., Gemmill, D. B., and Wiener, R. W.: Federal reference and equivalent methods for measuring fine particulate matter, *Aerosol science & technology*, 34, 457-464, 2001.
- 1065 Omar, A. H., Winker, D. M., Kittaka, C., Vaughan, M. A., Liu, Z. Y., Hu, Y. X., Trepte, C. R., Rogers, R. R., Ferrare, R. A., Lee, K. P., Kuehn, R. E., and Hostetler, C. A.: The CALIPSO Automated Aerosol Classification and Lidar Ratio Selection Algorithm, 10.1175/2009jtecha1231.1, 2009.
- Pappalardo, G., Amodeo, A., Apituley, A., Comeron, A., Freudenthaler, V., Linné, H., Ansmann, A., Bösenberg, J., D'Amico, G., Mattis, I., Mona, L., Wandinger, U., Amiridis, V., Alados-Arboledas, L., Nicolae, D., and Wiegner, M.: EARLINET: towards an advanced sustainable European aerosol lidar network, *Atmos. Meas. Tech.*, 7, 2389-2409, 10.5194/amt-7-2389-2014, 2014.
- 1070 Pitz, M., Schmid, O., Heinrich, J., Birmili, W., Maguhn, J., Zimmermann, R., Wichmann, H. E., Peters, A., and Cyrys, J.: Seasonal and diurnal variation of PM<sub>2.5</sub> apparent particle density in urban air in Augsburg, Germany, *Environ Sci Technol*, 42, 5087-5093, 10.1021/es7028735, 2008.
- 1075 Pokhariyal, J., Mandal, A., and Aggarwal, S. G.: Uncertainty Estimation in PM<sub>10</sub> Mass Measurements, *MAPAN*, 34, 129-133, 10.1007/s12647-018-0285-1, 2019.
- Redemann, J. and Gao, L.: A machine learning paradigm for necessary observations to reduce uncertainties in aerosol climate forcing, *Nature Communications*, 15, 8343, 2024.
- Register, F.: National ambient air quality standards for particulate matter. Proposed Rule 10, 2006.
- 1080 Reid, J. S., Eck, T. F., Christopher, S. a., Koppmann, R., Dubovik, O., Eleuterio, D., Holben, B. N., Reid, E. A., and Zhang, J.: A review of biomass burning emissions part III: intensive optical properties of biomass burning particles, *Atmospheric Chemistry and Physics*, 5, 827-849, 2005.
- Reid, J. S. e. a.: Skill of Operational Aerosol Forecast Models in Predicting Aerosol Events and Trends of the Eastern United States, Fall AGU 2016.
- 1085 Rogers, R. R., Vaughan, M. A., Hostetler, C. A., Burton, S. P., Ferrare, R. A., Young, S. A., Hair, J. W., Obland, M. D., Harper, D. B., and Cook, A. L.: Looking through the haze: evaluating the CALIPSO level 2 aerosol optical depth using airborne high spectral resolution lidar data, *Atmospheric Measurement Techniques*, 7, 4317-4340, 2014.
- 1090 Rogers, R. R., Hostetler, C. A., Hair, J. W., Ferrare, R. A., Liu, Z., Obland, M. D., Harper, D. B., Cook, A. L., Powell, K. A., Vaughan, M. A., and Winker, D. M.: Assessment of the CALIPSO Lidar 532 nm attenuated backscatter calibration using the NASA LaRC airborne High Spectral Resolution Lidar, *Atmos. Chem. Phys.*, 11, 1295-1311, 10.5194/acp-11-1295-2011, 2011.

- 1095 Rogers, R. R., Hair, J. W., Hostetler, C. A., Ferrare, R. A., Obland, M. D., Cook, A. L., Harper, D. B., Burton, S. P., Shinozuka, Y., McNaughton, C. S., Clarke, A. D., Redemann, J., Russell, P. B., Livingston, J. M., and Kleinman, L. I.: NASA LaRC airborne high spectral resolution lidar aerosol measurements during MILAGRO: observations and validation, 10.5194/acp-9-4811-2009, 2009.
- 1100 Saide, P. E., Thapa, L. H., Ye, X., Pagonis, D., Campuzano-Jost, P., Guo, H., Schueneman, M. K., Jimenez, J.-L., Moore, R., Wiggins, E., Winstead, E., Robinson, C., Thornhill, L., Sanchez, K., Wagner, N. L., Ahern, A., Katich, J. M., Perring, A. E., Schwarz, J. P., Lyu, M., Holmes, C. D., Hair, J. W., Fenn, M. A., and Shingler, T. J.: Understanding the Evolution of Smoke Mass Extinction Efficiency Using Field Campaign Measurements, *Geophysical Research Letters*, 49, e2022GL099175, <https://doi.org/10.1029/2022GL099175>, 2022.
- 1105 Salcedo, D., Onasch, T. B., Dzepina, K., Canagaratna, M., Zhang, Q., Huffman, J., DeCarlo, P., Jayne, J., Mortimer, P., and Worsnop, D. R.: Characterization of ambient aerosols in Mexico City during the MCMA-2003 campaign with Aerosol Mass Spectrometry: results from the CENICA Supersite, *Atmospheric Chemistry and Physics*, 6, 925-946, 2006.
- 1110 Sawamura, P., Moore, R. H., Burton, S. P., Chemyakin, E., Müller, D., Kolgotin, A., Ferrare, R. A., Hostetler, C. A., Ziemba, L. D., Beyersdorf, A. J., and Anderson, B. E.: HSRL-2 aerosol optical measurements and microphysical retrievals vs. airborne in situ measurements during DISCOVER-AQ 2013: an intercomparison study, *Atmos. Chem. Phys.*, 17, 7229-7243, 10.5194/acp-17-7229-2017, 2017.
- 1115 Scarino, A. J., Obland, M., Fast, J. D., Burton, S., Ferrare, R., Hostetler, C. A., Berg, L. K., Lefer, B., Haman, C., and Hair, J.: Comparison of mixed layer heights from airborne high spectral resolution lidar, ground-based measurements, and the WRF-Chem model during CalNex and CARES, *Atmospheric Chemistry and Physics*, 14, 5547-5560, 2014.
- 1120 Schlosser, J. S., Bennett, R., Cairns, B., Chen, G., Collister, B. L., Hair, J. W., Jones, M., Shook, M. A., Sorooshian, A., and Thornhill, K. L.: Maximizing the Volume of Collocated Data from Two Coordinated Suborbital Platforms, *Journal of Atmospheric and Oceanic Technology*, 41, 189-201, 2024.
- 1125 Schmid, B., Ferrare, R., Flynn, C., Elleman, R., Covert, D., Strawa, A., Welton, E., Turner, D., Jonsson, H., Redemann, J., Eilers, J., Ricci, K., Hallar, A. G., Clayton, M., Michalsky, J., Smirnov, A., Holben, B., and Barnard, J.: How well do state-of-the-art techniques measuring the vertical profile of tropospheric aerosol extinction compare?, 10.1029/2005jd005837, 2006.
- 1130 Schuster, G. L., Vaughan, M., MacDonnell, D., Su, W., Winker, D., Dubovik, O., Lapyonok, T., and Trepte, C.: Comparison of CALIPSO aerosol optical depth retrievals to AERONET measurements, and a climatology for the lidar ratio of dust, 10.5194/acp-12-7431-2012, 2012.
- 1135 Sessions, W. R., Reid, J. S., Benedetti, A., Colarco, P. R., da Silva, A., Lu, S., Sekiyama, T., Tanaka, T., Baldasano, J., and Basart, S.: Development towards a global operational aerosol consensus: basic climatological characteristics of the International Cooperative for Aerosol Prediction Multi-Model Ensemble (ICAP-MME), *Atmospheric Chemistry and Physics*, 15, 335-362, 2015.
- 1140 She, C. Y., Alvarez, R. J., Caldwell, L. M., and Krueger, D. A.: High-Spectral-Resolution Rayleigh-Mie Lidar Measurement of Vertical Aerosol and Atmospheric Profiles, *Applied Physics B-Photophysics and Laser Chemistry*, 55, 154-158, 1992a.
- 1145 She, C. Y., Alvarez, R. J., Caldwell, L. M., and Krueger, D. A.: High-Spectral-Resolution Rayleigh-Mie Lidar Measurement of Aerosol and Atmospheric Profiles, *Opt. Lett.*, 17, 541-543, 1992b.
- 1150 Shin, S. K., Müller, D., Lee, C., Lee, K. H., Shin, D., Kim, Y. J., and Noh, Y. M.: Vertical variation of optical properties of mixed Asian dust/pollution plumes according to pathway of air mass transport over East Asia, *Atmos. Chem. Phys.*, 15, 6707-6720, 10.5194/acp-15-6707-2015, 2015.
- 1155 Shinozuka, Y., Johnson, R. R., Flynn, C. J., Russell, P. B., Schmid, B., Redemann, J., Dunagan, S. E., Kluzek, C. D., Hubbe, J. M., Segal-Rosenheimer, M., Livingston, J. M., Eck, T. F., Wagener, R., Gregory, L., Chand, D., Berg, L. K., Rogers, R. R., Ferrare, R. A., Hair, J. W., Hostetler, C. A., and Burton, S. P.: Hyperspectral aerosol optical depths from TCAP flights, *Journal of Geophysical Research: Atmospheres*, 118, 12,180-112,194, 10.1002/2013jd020596, 2013.
- 1160 Shipley, S. T., Tracy, D. H., Eloranta, E. W., Trauger, J. T., Sroga, J. T., Roesler, F. L., and Weinman, J. A.: High Spectral Resolution Lidar to Measure Optical-Scattering Properties of Atmospheric Aerosols .1. Theory and Instrumentation, *Applied Optics*, 22, 3716-3724, 1983.
- 1165 Silva, R. A., West, J. J., Zhang, Y., Anenberg, S. C., Lamarque, J.-F., Shindell, D. T., Collins, W. J., Dalsoren, S., Faluvegi, G., and Folberth, G.: Global premature mortality due to anthropogenic outdoor air pollution and the contribution of past climate change, *Environmental Research Letters*, 8, 034005, 2013.
- 1170 Soloff, C., Ajayi, T., Choi, Y., Crosbie, E. C., DiGangi, J. P., Diskin, G. S., Fenn, M. A., Ferrare, R. A., Gallo, F., Hair, J. W., Hilario, M. R. A., Kirschler, S., Moore, R. H., Shingler, T. J., Shook, M. A., Thornhill, K. L., Voigt,

- C., Winstead, E. L., Ziemba, L. D., and Sorooshian, A.: Bridging gas and aerosol properties between the northeastern US and Bermuda: analysis of eight transit flights, *Atmos. Chem. Phys.*, 24, 10385-10408, 10.5194/acp-24-10385-2024, 2024.
- 1150 Strosnider, H. M., Chang, H. H., Darrow, L. A., Liu, Y., Vaidyanathan, A., and Strickland, M. J.: Age-Specific Associations of Ozone and Fine Particulate Matter with Respiratory Emergency Department Visits in the United States, *Am J Respir Crit Care Med*, 199, 882-890, 10.1164/rccm.201806-1147OC, 2019.
- 1155 Su, W. Y., Schuster, G. L., Loeb, N. G., Rogers, R. R., Ferrare, R. A., Hostetler, C. A., Hair, J. W., and Obland, M. D.: Aerosol and cloud interaction observed from high spectral resolution lidar data, 10.1029/2008jd010588, 2008.
- Sugimoto, N., Nishizawa, T., Shimizu, A., and Jin, Y.: The Asian Dust and Aerosol Lidar Observation Network (AD-Net), *Light, Energy and the Environment*, Leipzig, 2016/11/14, EW2A.1, 10.1364/EE.2016.EW2A.1,
- 1160 Sutherland, B. and Meskhidze, N.: Assessment of High Spectral Resolution Lidar-derived PM<sub>2.5</sub> concentration from SEAC4RS, ACEPOL, and three DISCOVER-AQ campaigns, *Environmental Science: Atmospheres*, 2025.
- Sutherland, B., Burton, S., Hostetler, C. A., Ferrare, R. A., Hair, J., Park, R. J., Oak, Y. J., and Meskhidze, N.: Application of DIAL/HSRL and CATCH algorithm-based methodologies for surface PM<sub>2.5</sub> concentrations during the KORUS-AQ campaign, *Atmospheric Environment*, 301, 119719, <https://doi.org/10.1016/j.atmosenv.2023.119719>, 2023.
- 1165 Tang, D., Liu, D., Tang, Y., Seyler, B. C., Deng, X., and Zhan, Y.: Comparison of GOCI and Himawari-8 aerosol optical depth for deriving full-coverage hourly PM<sub>2.5</sub> across the Yangtze River Delta, *Atmospheric Environment*, 217, 116973, 2019.
- Toth, T., Zhang, J., Campbell, J., Hyer, E., Reid, J., Shi, Y., and Westphal, D.: Impact of data quality and surface-to-column representativeness on the PM<sub>2.5</sub>/satellite AOD relationship for the contiguous United States, *Atmospheric Chemistry and Physics*, 14, 6049-6062, 2014.
- 1170 Toth, T. D., Zhang, J., Reid, J. S., and Vaughan, M. A.: A bulk-mass-modeling-based method for retrieving particulate matter pollution using CALIOP observations, *Atmospheric Measurement Techniques*, 12, 1739-1754, 2019.
- 1175 Toth, T. D., Zhang, J., Vaughan, M. A., Reid, J. S., and Campbell, J. R.: Retrieving particulate matter concentrations over the contiguous United States using CALIOP observations, *Atmospheric Environment*, 274, 118979, 2022.
- Van Donkelaar, A., Martin, R. V., and Park, R. J.: Estimating ground-level PM<sub>2.5</sub> using aerosol optical depth determined from satellite remote sensing, *Journal of Geophysical Research: Atmospheres*, 111, 2006.
- 1180 Van Donkelaar, A., Martin, R. V., Spurr, R. J., and Burnett, R. T.: High-resolution satellite-derived PM<sub>2.5</sub> from optimal estimation and geographically weighted regression over North America, *Environmental science & technology*, 49, 10482-10491, 2015.
- Van Donkelaar, A., Martin, R. V., Brauer, M., Hsu, N. C., Kahn, R. A., Levy, R. C., Lyapustin, A., Sayer, A. M., and Winker, D. M.: Global estimates of fine particulate matter using a combined geophysical-statistical method with information from satellites, models, and monitors, *Environmental science & technology*, 50, 3762-3772, 2016.
- 1185 Veselovskii, I., Kolgotin, A., Griaznov, V., Müller, D., Franke, K., and Whiteman, D. N.: Inversion of multiwavelength Raman lidar data for retrieval of bimodal aerosol size distribution, *Applied Optics*, 43, 1180-1195, 2004.
- Wang, C., Jia, M., Xia, H., Wu, Y., Wei, T., Shang, X., Yang, C., Xue, X., and Dou, X.: Relationship analysis of PM<sub>2.5</sub> and boundary layer height using an aerosol and turbulence detection lidar, *Atmos. Meas. Tech.*, 12, 3303-3315, 10.5194/amt-12-3303-2019, 2019.
- 1190 Wang, J. and Christopher, S. A.: Intercomparison between satellite-derived aerosol optical thickness and PM<sub>2.5</sub> mass: Implications for air quality studies, *Geophysical research letters*, 30, 2003.
- Wang, J., Gao, K., Hu, X., Zhang, X., Wang, H., Hu, Z., Yang, Z., and Zhang, P.: PM<sub>2.5</sub> Estimation in Day/Night-Time from Himawari-8 Infrared Bands via a Deep Learning Neural Network, *Remote Sensing*, 15, 4905, 2023.
- 1195 Wang, N., Xiao, D., Veselovskii, I., Wang, Y., Russell, L. M., Zhao, C., Guo, J., Li, C., Gross, S., Liu, X., Ni, X., Tan, L., Liu, Y., Zhang, K., Tong, Y., Wu, L., Chen, F., Wang, B., Liu, C., Chen, W., and Liu, D.: This is FAST: multivariate Full-permutation based Stochastic forest method—improving the retrieval of fine-mode aerosol microphysical properties with multi-wavelength lidar, *Remote Sensing of Environment*, 280, 113226, <https://doi.org/10.1016/j.rse.2022.113226>, 2022.
- 1200 Wegesser, T. C., Pinkerton, K. E., and Last, J. A.: California wildfires of 2008: coarse and fine particulate matter toxicity, *Environ Health Perspect*, 117, 893-897, 10.1289/ehp.0800166, 2009.
- Wehr, T., Kubota, T., Tzeremes, G., Wallace, K., Nakatsuka, H., Ohno, Y., Koopman, R., Rusli, S., Kikuchi, M., and Eisinger, M.: The EarthCARE mission—science and system overview, *Atmospheric Measurement Techniques*, 16, 3581-3608, 2023.

- 1205 Welton, E. J., Stewart, S. A., Lewis, J. R., Belcher, L. R., Campbell, J. R., and Lolli, S.: Status of the NASA Micro Pulse Lidar Network (MPLNET): Overview of the network and future plans, new version 3 data products, and the polarized MPL, EPJ Web of Conferences, 09003, Williams, C. K. and Rasmussen, C. E.: Gaussian processes for machine learning, 3, MIT press Cambridge, MA2006.
- 1210 Winker, D. M., Vaughan, M. A., Omar, A., Hu, Y. X., Powell, K. A., Liu, Z. Y., Hunt, W. H., and Young, S. A.: Overview of the CALIPSO Mission and CALIOP Data Processing Algorithms, 10.1175/2009jtechal281.1, 2009.
- Xiang, Y., Lv, L., Chai, W., Zhang, T., Liu, J., and Liu, W.: Using Lidar technology to assess regional air pollution and improve estimates of PM<sub>2.5</sub> transport in the North China Plain, Environmental Research Letters, 15, 094071, 10.1088/1748-9326/ab9cfd, 2020.
- 1215 Xie, Y., Wang, Y., Zhang, K., Dong, W., Lv, B., and Bai, Y.: Daily Estimation of Ground-Level PM<sub>2.5</sub> Concentrations over Beijing Using 3 km Resolution MODIS AOD, Environ Sci Technol, 49, 12280-12288, 10.1021/acs.est.5b01413, 2015.
- Zhang, D., Wang, W., Xi, Y., Bi, J., Hang, Y., Zhu, Q., Pu, Q., Chang, H., and Liu, Y.: Wildland Fires Worsened Population Exposure to PM(2.5) Pollution in the Contiguous United States, Environ Sci Technol, 57, 19990-19998, 10.1021/acs.est.3c05143, 2023.
- 1220 Zhang, J., Campbell, J. R., Hyer, E. J., Reid, J. S., Westphal, D. L., and Johnson, R. S.: Evaluating the impact of multisensor data assimilation on a global aerosol particle transport model, Journal of Geophysical Research: Atmospheres, 119, 4674-4689, 2014.
- 1225 Zhou, Z., Ma, Y., Yin, Z., Jin, S., and Gong, W.: The Profiles of Aerosol Microphysical Properties and PM<sub>2.5</sub> Mass Concentration Retrieve Based on HSRL, Journal of Physics: Conference Series, 3055, 012040, 10.1088/1742-6596/3055/1/012040, 2025.
- Ziemba, L. D., Lee Thornhill, K., Ferrare, R., Barrick, J., Beyersdorf, A. J., Chen, G., Crumeyrolle, S. N., Hair, J., Hostetler, C., Hudgins, C., Obland, M., Rogers, R., Scarino, A. J., Winstead, E. L., and Anderson, B. E.: Airborne observations of aerosol extinction by in situ and remote-sensing techniques: Evaluation of particle hygroscopicity, 10.1029/2012gl054428, 2013a.
- 1230 Ziemba, L. D., Thornhill, K. L., Ferrare, R., Barrick, J., Beyersdorf, A. J., Chen, G., Crumeyrolle, S. N., Hair, J., Hostetler, C., Hudgins, C., Obland, M., Rogers, R., Scarino, A. J., Winstead, E. L., and Anderson, B. E.: Airborne observations of aerosol extinction by in situ and remote-sensing techniques: Evaluation of particle hygroscopicity, Geophys Res Lett, 40, 417-422, Doi 10.1029/2012gl054428, 2013b.
- 1235