

# ~~Systematic~~ Assessment of the RFI Environment in Key Passive Microwave Bands for Earth Observation ~~from 6 to 200 GHz.~~

Raul Onrubia<sup>1</sup>, Roger Oliva<sup>1</sup>, David Duncan<sup>2</sup>, Niels Bormann<sup>2</sup>, Jose Barbosa<sup>3</sup>, Ioannis Nestoras<sup>3</sup>, Adriano Jordão<sup>3</sup>, Flavio Jorge<sup>4</sup>, Juliette Challot<sup>4</sup>, and Yan Soldo<sup>4</sup>

<sup>1</sup>ZenithalBlue Technologies S.L.U. Barcelona, Spain.

<sup>2</sup>European Centre for Medium-Range Weather Forecasts (ECMWF), Reading, United Kingdom.

<sup>3</sup>Research and Development for Aerospace S.L.U. Zürich, Switzerland.

<sup>4</sup>European Space Agency, ESTEC, 2201 Noordwijk, The Netherlands.

**Correspondence:** Raul Onrubia (onrubia@zenithalblue.com) and David Duncan (david.duncan@ecmwf.int)

**Abstract.** Radio Frequency Interference (RFI) is spreading worldwide, affecting numerous Earth Observation (EO) instruments. Among these, microwave radiometers play an essential role, providing critical measurements for climate monitoring, weather forecasting, and numerous other applications. In order to plan for future satellite missions and fully exploit currently available measurements, it is crucial to study the contamination levels at bands where radiometers operate. This work presents the Earth Observation RFI Scanner (EORFIScan), an RFI detection system for EO products that combines multiple RFI detection techniques in order to reduce missed detections. This software has been used to ~~survey~~ assess several passive microwave bands from 6 GHz up to 200 GHz, including both exclusive and shared bands. Analysis and validation of this method is presented for the year 2022. The resulting RFI probability maps show significant contamination in the bands up to and including 18.7 GHz; thus for evaluation, we mainly focus on bands from 6 to 18.7 GHz, where the most widespread contamination is found. A few brightness temperatures in the range of 350-400 K have been observed at 23.8 GHz and one at 36.5 GHz, which suggest the presence of man-made emissions. At higher frequencies, RFI contamination is not clearly visible in the analysed data. Comparisons with simulated radiances from a numerical weather prediction model are presented as a way to evaluate the RFI detection, finding that flagged observations are typically warmer than model simulations, as would be expected for RFI. It is clear from the results presented that RFI is already a concern for users at lower frequency passive microwave bands, and it is recommended that real-time monitoring systems are developed to keep an eye on the evolving threat of RFI in EO bands.

## 1 Introduction

Radio spectrum monitoring and enforcement actions are key to deliver radio protection and ensure that the different radio services operate in compliance with the in-force radio regulations and to secure an efficient and effective spectrum use, free from Radio Frequency Interference (RFI) (Pedro et al., 2022). Notwithstanding these essential actions, RFI is an inevitable consequence of the operation of radio systems, and it is a growing threat that has affected numerous Earth Observation (EO) satellite missions in recent years, especially passive microwave sensors (Draper, 2016b; Oliva et al., 2016; Piepmeier et al., 2014). These interferences vary widely in power level, radiation pattern, polarization, bandwidth, time duration, duty cycle, etc.,

and as a consequence there is no single algorithm that can optimally detect all levels and types of radiometric contamination (Querol et al., 2017).

25 The European Space Agency (ESA) and other space agencies rely on microwave radiometers for a wide variety of Earth Observation (EO) missions, operating in frequency bands from 1 to 700 GHz. RFI can negatively impact these radiometers in three different ways: High power RFIs can potentially damage the instrument, but have low occurrence probability; medium power RFIs cause data loss and gaps; and low power RFIs, mostly undetected, can distort scientific data, potentially compromising geophysical retrievals and weather forecasts.

30 It is thus of utmost importance to detect such RFI occurrences, not only to address their impact on the users' side, but also to support respective radio protection actions. However, instances of interference can vary widely not just in magnitude as mentioned above, but also in whether it is possible or appropriate to assign responsibility. Albeit the role of the International Telecommunications Union (ITU) in facilitating international coordination of radio protection actions, national administrations, by means of their National Regulatory Authorities (NRA), are responsible for overseeing the spectrum use and enforce the  
35 law in the territory under their jurisdiction. The bands typically used in EO missions fall into EESS (Earth Exploration-Satellite Service), including passive allocations with either exclusive access or shared access with active services. Service disruptions should always be reported to NRA who are responsible for conducting the required investigations and actions on the field to secure integrity of the spectrum so it can be effectively and efficiently used. In the case of exclusive access bands, clear violations, from the law enforcement standpoint, are easier to act upon. In case of shared access bands, the regulatory  
40 framework is still to be enforced. If the regulatory framework is enforced and service disruptions still occur, those findings are relevant in closing the loop for future enhanced spectrum policy, planning and assignment conditions. Comprehensive details about radio protection policies and practices can be found in ~~Pedro et al. (2022)~~ [\(Pedro et al., 2022\)](#). There are numerous instances of the process to locate and shut down illegal transmissions ongoing, but new RFI sources appear constantly and the procedure to detect, attribute, and shut down illegal operators takes time.

45 In addition to clear violations of ITU regulations, many instances of apparent RFI come from legal operations in nearby bands or simply other users in a non-exclusive band. Furthermore, the spectral response of a radiometer can vary significantly from its specified bandwidth, and in this case apparent violations may be caused by radiometer sensitivity outside of the exclusive-use band due to being manufactured outside specified tolerances. Many space agencies now publicly provide measured spectral response functions (SRFs) for MW radiometers (SFCG, 2014) and it is a recognized best practice (English et al., 2020), but  
50 it is rare for heritage sensors and indeed most of the instruments studied here do not have measured SRFs publicly available. In other words, the cause of apparent RFI may be due to instrument design, illegal operators, or be a simple consequence of sharing a crowded part of the spectrum. No matter their source, satellite operators and downstream users need to address the inevitable presence of unwanted emissions.

Regardless of the source of RFI, and although the RF environment is constantly changing, it remains critically important for  
55 the planning of future EO missions to know the current status of contamination at bands of interest. For example, the L-band has been widely studied (Oliva et al., 2016; Bringer et al., 2018; Parde et al., 2011), and this has led to tangible changes in mission design and requirements for subsequent L-band missions. Nevertheless, the ESA RFI Monitoring & Information Tool

(ERMIT) showed that the decreasing trend in worldwide contamination suddenly changed in 2024 when the Russo-Ukrainian war and the Myanmar civil war led to massive contamination in all observations over Europe and most of the South and South East Asia (ERMIT, 2025). C-band contamination was first discovered in AMSR-E measurements (Li et al., 2004). The presence of RFI in this band led to inclusion of an extra C-band channel on the follow-on AMSR2 mission for the purpose of RFI mitigation (Imaoka et al., 2010). RFI surveys conducted with different methodologies have only been conducted up to and including the 23.8 GHz band (Draper, 2018; Wu et al., 2020; Casey et al., 2022; Farrar and Jones, 2016), showing contamination in the 18.7 GHz band but not at higher frequencies. Quartly et al. (2020) reports RFI up to the 36.5 GHz band, albeit not widespread. Despite the best efforts of space agencies to predict the potential contamination issues of future EO missions, the RFI environment could change rapidly as services require more and more bandwidth, technology becomes more accessible and thus widespread, active services are aiming at higher frequencies, and the spectrum becomes more crowded with different users. Spectrum use, in the past, present and future, by Earth observation missions has been reviewed in Jorge et al. (2023).

The objective of this study is to survey RFI contamination in several key passive microwave bands from 6 GHz up to 200 GHz using the same methodology, independent on the sensor characteristics (conical scan, across-track scan, ...), in all bands commonly used by microwave radiometers using software developed under an ESA contract: the Earth Observation RFI Scanner (EORFIScan). This system is designed to be placed between the data generated from EO missions and the end users, such as the Numerical Weather Prediction (NWP) centres, with the goal of detecting and filtering RFI in order to avoid the assimilation of RFI-contaminated data. These new flags are appended to the original EO products. For this analysis, a comprehensive library of RFI detection algorithms is used, supported by external information and RFI databases. As the system analyses the incoming EO products, the results are stored in internal RFI databases that are used to improve future detection of RFI signals in the products. These databases show a picture of the RFI environment in each frequency band analysed. L-band is not analysed since EORFIScan is an upgrade of the Ground Detection RFI System (GRDS), which already surveyed this frequency band (Oliva et al., 2021), and frequency bands beyond 200 GHz the number of sensors working at these bands is reduced and RFIs are less likely to happen.

It is worth emphasizing that proper validation of RFI detection methods is difficult because no source of truth is available. Traditional metrics like a false alarm ratio are then hard to define, in contrast to a parameter like precipitation for which rain gauges offer a local measure of truth. In this study, RFI detection is assessed using simulations from an NWP model, following the idea that NWP model simulations provide information on the expected natural variability, which can be used as reference for RFI detection. This allows some validation of the methods, both instantaneously and in aggregate, but does not lead to specific conclusions on aspects like detection limits or false alarms. Furthermore, even an excellent RFI detection method will miss contamination that is within instrument or geophysical noise levels. This type of low-level RFI would be effectively undetectable on an instantaneous basis. Therefore, the lack of detection does not preclude the existence of RFI in a given band. This is especially true at higher frequencies where natural variability is larger due to more significant atmospheric signals.

This paper is structured as follows. Section 2 describes the system architecture, the RFI detection techniques utilized, and the threshold computation procedure, Section 3 shows the RFI maps of the passive microwave bands from 6 GHz up to 200 GHz, which are discussed in Section 4. Section 5 describes the results validation, and Section 6 draws some conclusions.

## 2 Materials and Methods

95 This section presents a brief overview of the system architecture, describes which instruments were analysed during which time period, describes the RFI detection techniques applied in the analysis, and explains the procedure to compute the thresholds of each detection technique.

### 2.1 Instruments Used and Temporal Scope of the Analysis

In order to minimize the number of different instruments used to cover as many bands as possible, AMSR2 (Imaoka et al., 100 2010), AMSU-A (Mo, 1996), MWHS-2 (Zhang et al., 2012)) and AMR-C (Maiwald et al., 2020) were chosen. Table 1 shows the passive microwave bands under study and the bands and polarizations covered by each instrument. The numbers inside parentheses state which channels or bands each instrument has in each polarization in that band. AMSR2 provides observations at H (horizontal) and V (vertical) polarizations for all frequency bands, whereas the other instruments only measure one polarization. Cross-track scanners such as AMSU-A and MWHS-2 have polarization that shifts as a function of scan angle, 105 with the polarization typically referred to as quasi-vertical or -horizontal (QV or QH) depending on the polarization at nadir. AMSR2, AMSU-A and MWHS-2 provide 2-D  $T_B$  observations per frequency band and polarization. AMR-C is, instead, a single-beam radiometer; therefore, it provides 1-D observations. Using these 4 instruments, all bands above L-band up to 200 GHz were covered. Note that the 18.7 GHz band is observed by two sensors (AMR-C and AMSR2), the 23.8 GHz is observed by 3 (AMR-C, AMSR2 and AMSU-A), and 89 GHz is also observed by 3 (AMSR2, AMSU-A and MWHS-2). This allows 110 cross-validation between instruments. AMSR2 is the sole payload on GCOM-W, and is a one-off instrument. In contrast, the other instruments studied have flown or will fly on multiple satellite platforms. The analysis here uses AMSU-A from Metop-C, MWHS-2 from FY-3E, and AMR-C from Sentinel-6A.

If the product contains the water fraction of each observation, pixels are labeled as “land” (water fraction lower than 5%), “sea” (water fraction higher than 95%), and “coast” (water fraction between 5% and 95%, and pixels 50 km up to away from 115 the coastline according to CIA World Data Bank II (CIA, 1985)). If the product only distinguishes pixels as land or sea, coast pixels are deduced as pixels up to 50 km away from the same coastlines database. Labels “sea-ice” and “storm/clouds” are added afterwards. In the case of AMSR2, sea-ice is detected using the ARTIST sea-ice algorithm (Spreen et al., 2008), [which to the authors knowledge performs well in the Arctic marginal zone \(Kern et al., 2019\)](#), and storms are obtained using the procedure from Draper (2016a). For AMSU-A, MWHS-2 and AMR-C, the k-means algorithm is used to separate “sea” into 120 “sea-only”, “sea-ice”, and “storm/clouds”.

Table 2 shows the time span covered by the analysis, which tried to cover all 2022. However, MWHS-2 only provides observations for the 166 GHz band from October 2022 onward (in the case of satellite FY-3E, the first of the series FY that

**Table 1.** Passive microwave bands covered by this study, and instruments observing them. Parentheses state the channel number(s) that the instrument has in that band. Correspondence between channel numbers and band characteristics can be found in ~~(World Meteorological Organization (WMO), 2025)~~ [World Meteorological Organization \(WMO\) \(2025\)](#).

Frequency Band	Band Status	AMSR2	AMSU-A	MWHS-2	AMR-C
6.4-7.7 GHz	Shared Services	H+V (6.9, 7.3)			
10.6-10.7 GHz	Shared Services	H+V (10.65)			
18.6-18.8 GHz	Shared Services	H+V (18.7)			H* (Ch.1)
23.6-24 GHz	Exclusive	H+V (23.8)	QV (Ch.1)		H* (Ch.2)
31.3-31.8 GHz	Mostly Exclusive in Region 2		QV (Ch.2)		
33.5-34.5 GHz	Shared Services				H* (Ch.3)
36-37 GHz	Shared Services	H+V (36.5)			
50.2-50.4 GHz	Exclusive		QV (Ch.3)		
52.6-59.3 GHz	Exclusive up to 54.25 GHz		QV (Ch.4,7) QH (Ch.5,6,8-14)		
86-92 GHz	Exclusive	H+V (89)	QV (Ch.15)	QH (Ch.1)	
114.25-122.25 GHz	Exclusive up to 116 GHz			QV (Ch.2-9)	
164-167 GHz	Shared Services			QH (Ch.10)	
183 GHz	Exclusive			QV (Ch.11-15)	

\* AMR-C observes at nadir using H polarization. V polarization is present in the instrument as back-up, since there is no difference between H and V observations when observing at nadir.

covers this band). In order to cover a similar period of time to be able to observe any seasonality, the time span analyzed from FY-3E covers 2023 instead of 2022.

**Table 2.** Time span for each satellite. The specified months are included in the analysis.

Instrument	T. Start	T. Stop
AMSR2	January 2022	December 2022
AMSU-A	January 2022	December 2022
MWHS-2	October 2022	November 2023
AMR-C	January 2022	December 2022

## 125 2.2 RFI Detection techniques

Multiple RFI detection techniques are applied to the observations with three progressive threshold levels. Different thresholds will therefore correspond to how strict the detection is, and how confident we are that the detections picked up actual RFI

(referred later as “confidence level”). The flags for each frequency band are combined with a logical *OR*, so they keep the highest confidence level. By doing so, observations have 4 possible flags that can be encoded in 2 bits: no RFI flag, low confidence flag, medium confidence flag, and high confidence flag. The RFI techniques used in the analysis are the following:

- **Intensity algorithm:** An observation with brightness temperature  $T_B$  is flagged if  $T_B > \alpha(\lambda)$ , where  $\alpha(\lambda)$  represents the threshold as a function of the latitude  $\lambda$ . Applied to all instruments.
- **Polarization ratio:** An observation with brightness temperatures  $T_H$  and  $T_V$  for H and V polarizations, respectively, is flagged if the polarization ratio  $P$  exceeds a threshold  $\alpha(\lambda)$  that depends on latitude  $\lambda$ . ~~In this paper, this only applies to~~  
 135 ~~the~~ Only applied to AMSR2 instrument. The Polarization ratio is defined as:

$$P = \frac{T_V - T_H}{T_V + T_H} \quad (1)$$

- **Spatial Variability:** An observation is flagged if the modulus of the components of the spatial variability is greater than a threshold  $\alpha(az)$  that depends on the azimuth angle  $az$ . For 2-D imaging, both components of the spatial variability are computed by doing the convolution of the data in the instrument reference frame (field of view number and scan number)  
 140 with the matrices in Equations 2 and 3. Applied to all instruments.

$$h_{SV_1} = \begin{pmatrix} 0 & 0 & 0 \\ -1 & 0 & 1 \\ 0 & 0 & 0 \end{pmatrix} \quad (2)$$

$$h_{SV_2} = \begin{pmatrix} 0 & 1 & 0 \\ 0 & 0 & 0 \\ 0 & -1 & 0 \end{pmatrix} \quad (3)$$

In the case of AMR-C, that is a 1-D instrument, the convolution is conducted with a vector composed of ten  $-1$ , a  $0$ , and ten  $1$ :  $\langle -1.. -1 \ 0 \ 1..1 \rangle$

- **Image Enhancement:** An observation is flagged if the modulus of the result of applying a high pass filter to the image is greater than a threshold  $\alpha(az)$  that depends on the azimuth angle  $az$ . To apply the high pass filter in 2-D images, the data in the instrument reference frame (field of view number and scan number) is convoluted with the matrix:

$$h_{HPF} = \begin{pmatrix} -0.5 & -1.5 & -0.5 \\ -1.5 & 8 & -1.5 \\ -0.5 & -1.5 & -0.5 \end{pmatrix} \quad (4)$$

No useful equivalent has been found for 1-D sensors. Not applied to AMR-C.

150 – **Generalized RFI Index:** An observation is flagged if the generalized RFI Index  $\Delta T_B[i]$  at a given frequency channel  $i$  is positive and larger than a given threshold  $\alpha$ . The generalized RFI Index (Draper, 2018) is defined as the difference between observation  $T_B[i]$  and the expected value  $\widehat{T}_B[i]$ :

$$\Delta T_B[i] = T_B[i] - \widehat{T}_B[i] \quad (5)$$

$$\widehat{T}_B[i] = a_0[i] + \sum_{j \in \{f_C(j) \neq f_C(i)\}} (a_j \cdot T_B[j] + b_j \cdot T_B^2[j]) \quad (6)$$

155 The expected brightness temperature  $\widehat{T}_B$  is estimated using the brightness temperatures and their squared values of the other frequency channels  $j \neq i$  weighted by the coefficients  $a$  and  $b$ , which are determined statistically by minimizing  $\min \{T_B[i] - \widehat{T}_B[i]\}$ . If RFI is present, the observation  $\Delta T_B[i]$  will be larger than the estimation  $\widehat{T}_B[i]$ . Note that this technique assumes that the observations from other frequency channels are RFI-clean. Nonetheless, note that this is not always the case. This could lead to RFI contamination from other frequency channels leaking as false signatures in the  
 160 desired channel. [Applied to all instruments.](#)

### 2.3 Threshold computation procedure

The EORFIScan has three threshold levels. Each is defined through a False Alarm Probability. The higher  $P_{fa}$ , the higher the number of detections, but their certainty decreases since the number of possible missed detections increases. In contrast, the lower  $P_{fa}$ , the lower the number of detections, but the higher the certainty of detection. From now on, the first case will be  
 165 referred to as less strict and the latter as more strict in terms on how certain we are that a detection is not a false alarm.

Since one of the applications is to use the cleaned data to feed geophysical models, thresholds must be determined statistically and be model independent. Otherwise, the data used to feed models would only contain the data that already fit the models, preventing thus any improvement in these same models.

The time period used for the threshold computation has been determined empirically. For AMSR2, one week of each consecutive month of 2021 was used, to take into account the variability between seasons. For AMSU-A and MWHS-2, which have less dense data sampling, two weeks of each month were used. AMR-C data is even more scarcely sampled, so two full  
 170 years (2020 and 2021) were used. [Each instrument's thresholds have been computed separately using uniquely its own data.](#)

The ideal procedure for setting the RFI detection technique thresholds is to first apply the RFI detection techniques to a large number of clean observations. Then, to estimate the probability density function  $f_X(x_1)$  for each frequency band, polarization, and surface type (e.g. land, sea, coast). Then, a threshold  $\alpha$  defined by a given *a priori* probability of false alarm  $P_{fa}$  is found  
 175 using the equation 7 (Querol et al., 2017):

$$P_{fa} = \int_{\alpha}^{\infty} f_X(x_1) dx_1 \quad (7)$$

The *a priori* probability of false alarm is defined as erroneously choosing hypothesis  $H_1$  (RFI is present) when the true hypothesis is  $H_0$  (no RFI is present), which can be formulated as  $P_{fa} = P(H_1|H_0)$ . The only exception to this procedure is the Generalized RFI Index, which first estimates the coefficients to compute the index, and then the thresholds are set to the PDF of the resulting error. In reality, it is impossible to exclude all samples contaminated with RFI, since this is actually the goal of the study. These samples modify the PDF used in 7. To minimize this effect, the strongest and most obvious contaminated samples and the nearby ones are excluded with a preliminary RFI screening method.

The function  $f_X(x_1)$  depends not only on the random variable  $x_1$ , but also on the geometrical variables  $y_1, \dots, y_N$  (latitude, longitude, incidence angle, azimuth angle, etc.). Ideally, the (N+1)-dimensional histogram of  $f_X(x_1, y_1, \dots, y_N)$  would be computed and the threshold  $\alpha$  would be computed for the desired  $P_{fa}$  for each N-dimensional bin  $(Y_1, \dots, Y_N)$ :


$$P_{fa} = \int_{\alpha(Y_1, \dots, Y_N)}^{\infty} f_X(x_1, y_1, \dots, y_N | y_1 = Y_1, \dots, y_N = Y_N) dx_1 \quad (8)$$

Estimating small  $P_{fa}$  values for all bins would require a huge amount of data, or else the threshold values for low  $P_{fa}$  values would be quite noisy. Instead, to simplify, it will be assumed that  $f_X$  depends only on a single variable  $y_1$ , that stands for the most relevant geometrical variable, and that it only changes the mean value of  $f_X$  with a deterministic function  $g(y)$ :

$$f_X(x_1, y_1) = f_X(x_1 + g(y_1)) \quad (9)$$

The procedure for determining thresholds consists in first estimating  $g(y)$  so that  $f_x$  becomes the probability density function of a unidimensional random variable with deterministic dependency on the function  $g(y_1)$ , then remove this dependency, and last compute the thresholds with respect this unidimensional random variable. The steps for this procedure are **S.1** to **S.9** described below.

**S.1** First, the data from AMSR2, AMSU-A and MWHS-2 was pre-filtered for strong RFI contamination using the high pass filter from the Image Enhancement algorithm. AMR-C data are used without RFI prefiltering. To do so, the filter is applied and the results are collocated in cells of  $0.5^\circ \times 0.5^\circ$  in latitude and longitude. The standard deviation of each cell is computed, and the cells are classified according to their surface type (“land”, “sea-only”, “coast”, “sea-ice”, “cloud/storm”). For a given terrain type “land” and “sea-only”, cells are discarded if they are considered an outlier following the criteria  $\sigma_X \geq \text{median}(X) + 4 \cdot c \cdot \text{MAD}\{X\}$ , where  $\text{MAD}\{X\} = \text{median}(|X - \text{median}(X)|)$  is the Median Absolute Deviation, and  $c = \frac{-1}{\sqrt{(2) \cdot \text{erfc}^{-1}(3/2)}}$  (Leys et al., 2013). Figure 1a shows the standard deviation of the high-pass filter in each cell for AMSR2 at 6.9 GHz H Polarization. Note how it matches the literature in Figure 1b (Draper, 2018). Likely false positives due to sea-ice on the southern coast of Alaska, the Baltic Sea, and the Russian-Pacific coast are ignored, since they are “coast” pixels.

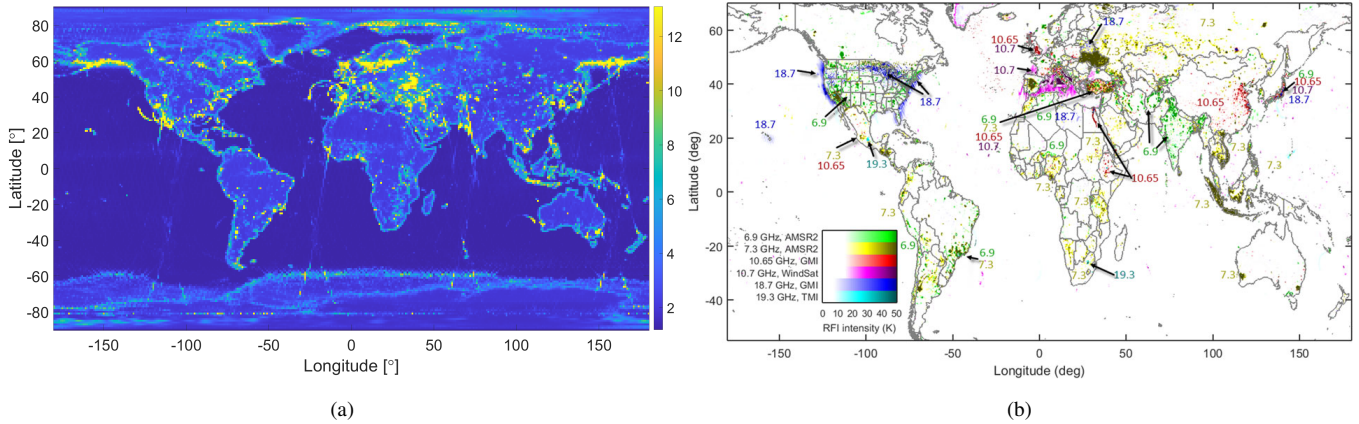


**Figure 1.** (a) AMSR2 RFI pre-filtering map at 6.9 GHz and H polarization. Color axis shows the standard deviation of the high-pass filter value. (b) RFI Contamination maps observed by Draper (2018).

210


**S.2** 2-D histograms of each RFI detection technique (except the Generalized RFI Index), frequency band, and polarization are computed as a function of the available geometric parameters (latitude, incidence angle, etc.) to visualize which one has more influence. For instance, Figure 2 shows the brightness temperature as function of the latitude. The dependencies found between thresholds and geometric parameters for each RFI detection techniques is mentioned in the list of RFI detection techniques in Section 2.2. The histograms are normalized in bins of the variable  $y_1$  (the X-axis). In the case of the brightness temperature for ASMR2, the bins are  $0.25^\circ$  wide.

In the case of the Generalized RFI Index, once the coefficients  $a_i$  and  $b_i$  are estimated in Equation 6, the 1-D histogram of the error in Equation 5 is computed. In the case no geometrical dependencies are found, also the 1-D histogram is computed. Both cases jump directly to **S.5**.

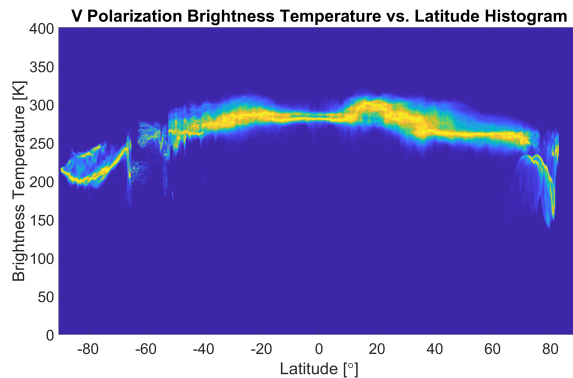

**Figure 2.** Biased 2-D histogram of the brightness temperature at 6.9 GHz V polarization in AMSR2 as function of the latitude.

215 **S.3** The contribution  $g(y_1)$  is estimated as  $\hat{g}(y_1) = \max_{x_a} f_X(x_1, y_1)$ , and the unbiased 2-D histogram is computed as  $\hat{f}_X(x_1) = f_X(x_1 - \hat{g}(y_1), y_1)$  as shown in Figure 3a.

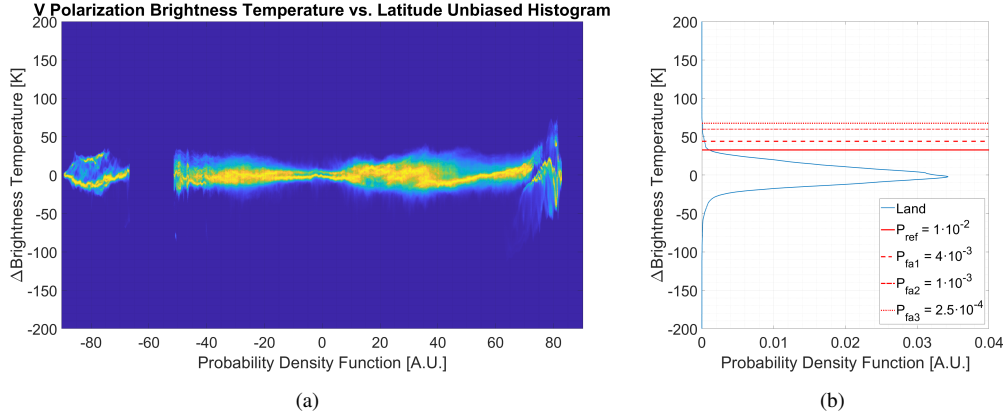

**Figure 3.** (a) Unbiased 2-D histogram of the brightness temperature at 6.9 GHz V polarization in AMSR2 as function of the latitude. The histogram is normalized in bins of  $0.25^\circ$  latitude. (b) Integrated 1-D histogram for the unbiased 2-D histogram in (a). The figure has been rotated and vertically aligned to match the integration of (a) along the latitudinal axis aligning their peaks.

**S.4** The 2-D histogram in Figure 3a is integrated along the  $y_1$  dimension as shown in Figure 3b.

220 **S.5** The three desired thresholds  $\alpha_i, i = 1..3$  (dashed lines in Figure 3b) and a reference threshold  $\alpha_{ref}$  (continuous line in Figure 3b) are computed for a given set of  $P_{fa_i}, i = 1..3$  and  $P_{fa_{ref}}$  using Equation 7. The reference false alarm probability is a high probability  $P_{fa_i} = 10^{-2}$  used to smooth the threshold function as will be shown later. The other false alarm probabilities are set to  $P_{fa_1} = 4 \cdot 10^{-3}$ ,  $P_{fa_2} = 1 \cdot 10^{-3}$ , and  $P_{fa_3} = 2.5 \cdot 10^{-4}$ , respectively. In the case of 1-D histograms only the three thresholds  $\alpha_i, i = 1..3$  are computed, and the procedure finishes here.


**S.6** The distances between the thresholds to the reference threshold  $d_i = \alpha_i - \alpha_{ref}$  are calculated.

225 **S.7** The reference threshold  $\alpha_{ref}(y_1)$  as function  $y_1$  is computed in the 2-D biased histogram using Equation 10, and is shown with a continuous red line in Figure 4.

$$P_{fa_{ref}}(y_1) = \int_{\alpha_{ref}(y_1)}^{\infty} f_X(x_1, y_1) dx_1 \quad (10)$$

**S.8** The threshold approximation function for the reference false alarm probability  $\alpha_{ref}(y_1)$  is approximated with a  $M$  order polynomial, shown in 4 as a continuous green line:

$$\alpha_{ref}(y_1) \approx p(y_1) = a_M \cdot y^M + \dots + a_1 \cdot y + a_0 \quad (11)$$

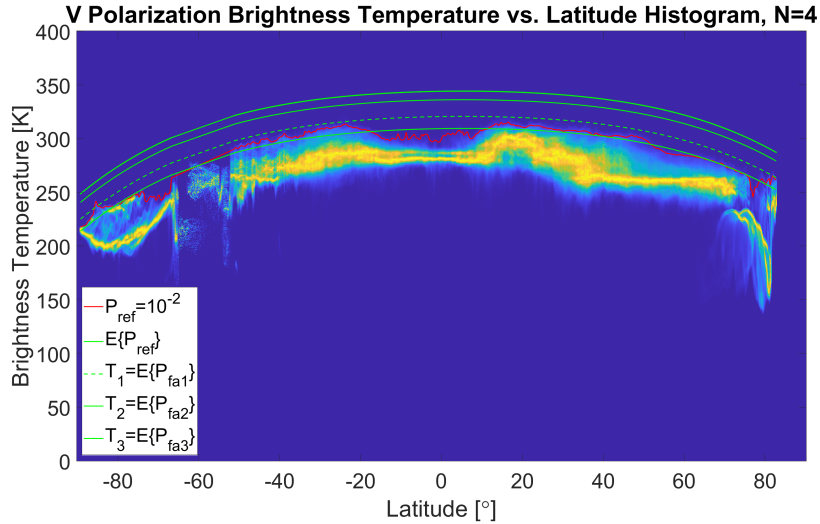

**Figure 4.** Biased 2-D histogram of the brightness temperature at 6.9 GHz V polarization in AMSR2 as function of the latitude, with the reference threshold  $\alpha_{ref}(y_1)$  in red, the threshold approximation function for the reference false alarm probability in continuous green line, and the threshold approximation function for each threshold level in green dashed lines. The histogram is normalized in bins of  $0.25^\circ$  latitude.

230 **S.9** The threshold approximation function for each threshold level is defined as  $\alpha_i(y_1) = p(y_1) + d_i$  and is shown in 4 as a dashed green lines.

If equations 10 and 11 were used to directly compute  $\alpha_i(y_1)$ , a large dataset would be required since  $P_{fa_i}$  are small, and small datasets will imply excessively noisy estimations. Still, large datasets will not ensure that two polynomial approximation functions  $\alpha_i(y_1)$  do not cross each other. The procedure described here reduces the amount of data needed, and ensures that  
 235 threshold approximation functions do not cross each other, and therefore increasing false alarm probabilities always ensures a less strict threshold as defined at the beginning of this subsection.

Note that this subsection focused on the probability of false alarm and does not mention the *a priori* probability of missed detections  $P_{md}$ . Calculating  $P_{md}$  requires knowing the statistics on the RFI sources. These statistics are scarce, vary over time, have been conducted in particular frequency bands (not necessarily generalized to other bands), and barely include low power  
 240 RFIs, the ones more likely to be miss detected. As a consequence, this computation is not possible or may be inaccurate.

Note that since no ground truth is available, it is not possible to estimate the *a posteriori* probability of false alarms or the *a posteriori* probability of missed detections.

### 3 Results

In order to evaluate the status of the RFI environment, RFI probability maps are used. Neither AMSR2, AMSU-A or MWHS-2  
 245 data is gridded, so EASE2 grid with 25 km spacing has been used for the database. Observations are assigned to the closest grid

point. Then, the probability of RFI is calculated at each grid point as  $P_{RFI} = D/O$ , where  $D$  is the number of RFI detections, and  $O$  is the total number of observations.

The maps are computed for each month along the temporal scope of each sensor analysis using both ascending and descending data, and both H and V polarization (if available). In the following, we present maps of mean RFI probabilities generated from these monthly maps, with the aim to highlight areas that are consistently flagged as RFI-affected. While these average maps may not capture more transient events that are only present during certain times, they provide a representative overview of the main affected areas. Average maps are a good trade-off between showing RFI contamination and mitigating false alarms.

Furthermore, after discarding measurements potentially affected by sun glint, observations over 350 K were stored along with their latitude, longitude and date per each frequency band. Then, they were grouped into clusters using k-means method.


Figures 5 and 6 show mean RFI probability maps for selected channels from the four instruments considered, covering the frequency range 6.9 GHz to 183 GHz.

Maps from AMSR2 have been prioritized over AMSU-A since two polarizations are available, and consequently the resulting maps are less noisy. Furthermore, the higher the frequency, the noisier the maps, since the spatial resolution is higher, the atmospheric effects on the  $T_B$  become more intense, and the atmospheric contributions are less smooth than the land or sea dynamics particularly because cloud and precipitation sensitivity generally increases with frequency.


#### 4 Discussion of the Identified RFI Environment

The 6.4-7.7 GHz band is not exclusively allocated for passive applications and therefore passive sensors cannot claim protection. This regulatory framework can be linked to the significant contamination documented previously (Draper, 2018; Wu et al., 2019, 2020). It is separated into the 6.9 and 7.3 GHz sub-bands. At the 6.9 GHz sub-band contamination is widespread in the US, and India. Some contamination is scattered in South America (with a denser detection area in Brazil), in Africa (with a denser detection area in South Africa), Europe (note the dense detection area over Ukraine and the detection from possible oil rigs in the North Sea), and the sea contamination in the Yellow Sea in front of China probably due to marine traffic. Point sources of 6.9 GHz contamination over sea had previously not been identified in the literature. In the 7.3 GHz sub-band contamination is present in all populated continents. Both North and South America show a few scattered detections, with strong detections in Central America. Europe also shows a few RFI sources, mostly in the North Sea due to oil rigs, and a large contaminated area over Ukraine. The Middle East is heavily contaminated in Turkey and Syria, with some contamination seen in Saudi Arabia. Indonesia and Thailand show strong signatures across their entire areas due to a telecommunication service using this band. Some isolated RFI sources can be seen in the rest of Oceania. Also note the reflection of geostationary satellite signals over the sea near Japan, in the Mediterranean Sea and the Atlantic Ocean near Europe, and in the Pacific Ocean between Hawaii and the US.

Only a part of the 10.7 GHz band is exclusive for passive services (10.68 to 10.70 GHz), whereas AMSR2 has a nominal bandwidth from 10.60 to 10.70 GHz. RFI contamination is mostly present in Europe due to the reflection of geostationary TV broadcast satellites over the sea [Scanlon et al. \(2025\)](#). The reflections are seen as stripes following the descending orbit

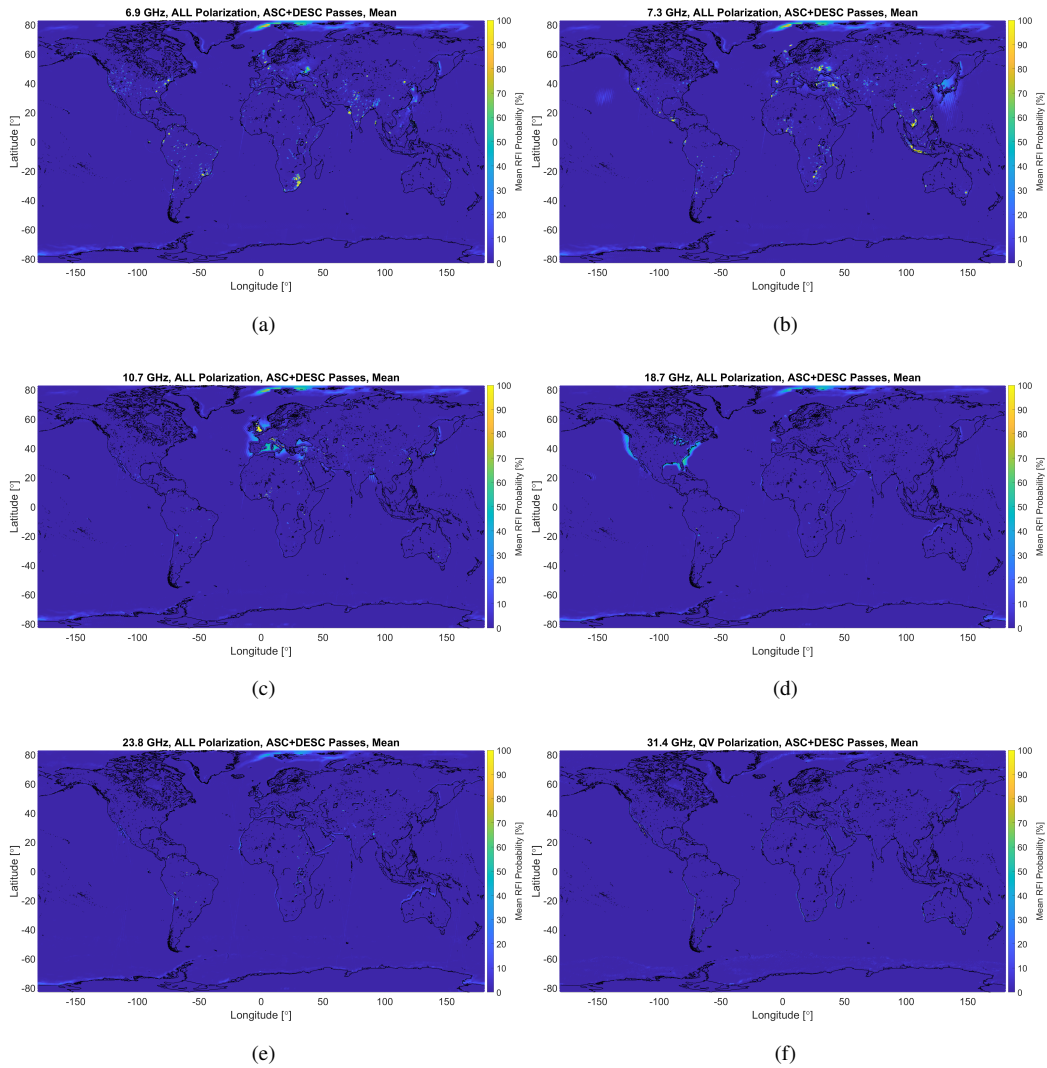

**Figure 5.** RFI Probability maps for: (a) 6.9 GHz (AMSR2), (b) 7.3 GHz (AMSR2), (c) 10.7 GHz (AMSR2), (d) 18.7 GHz (AMSR2), (e) 23.8 GHz (AMSR2) and (f) 31.4 GHz (AMSU-A)

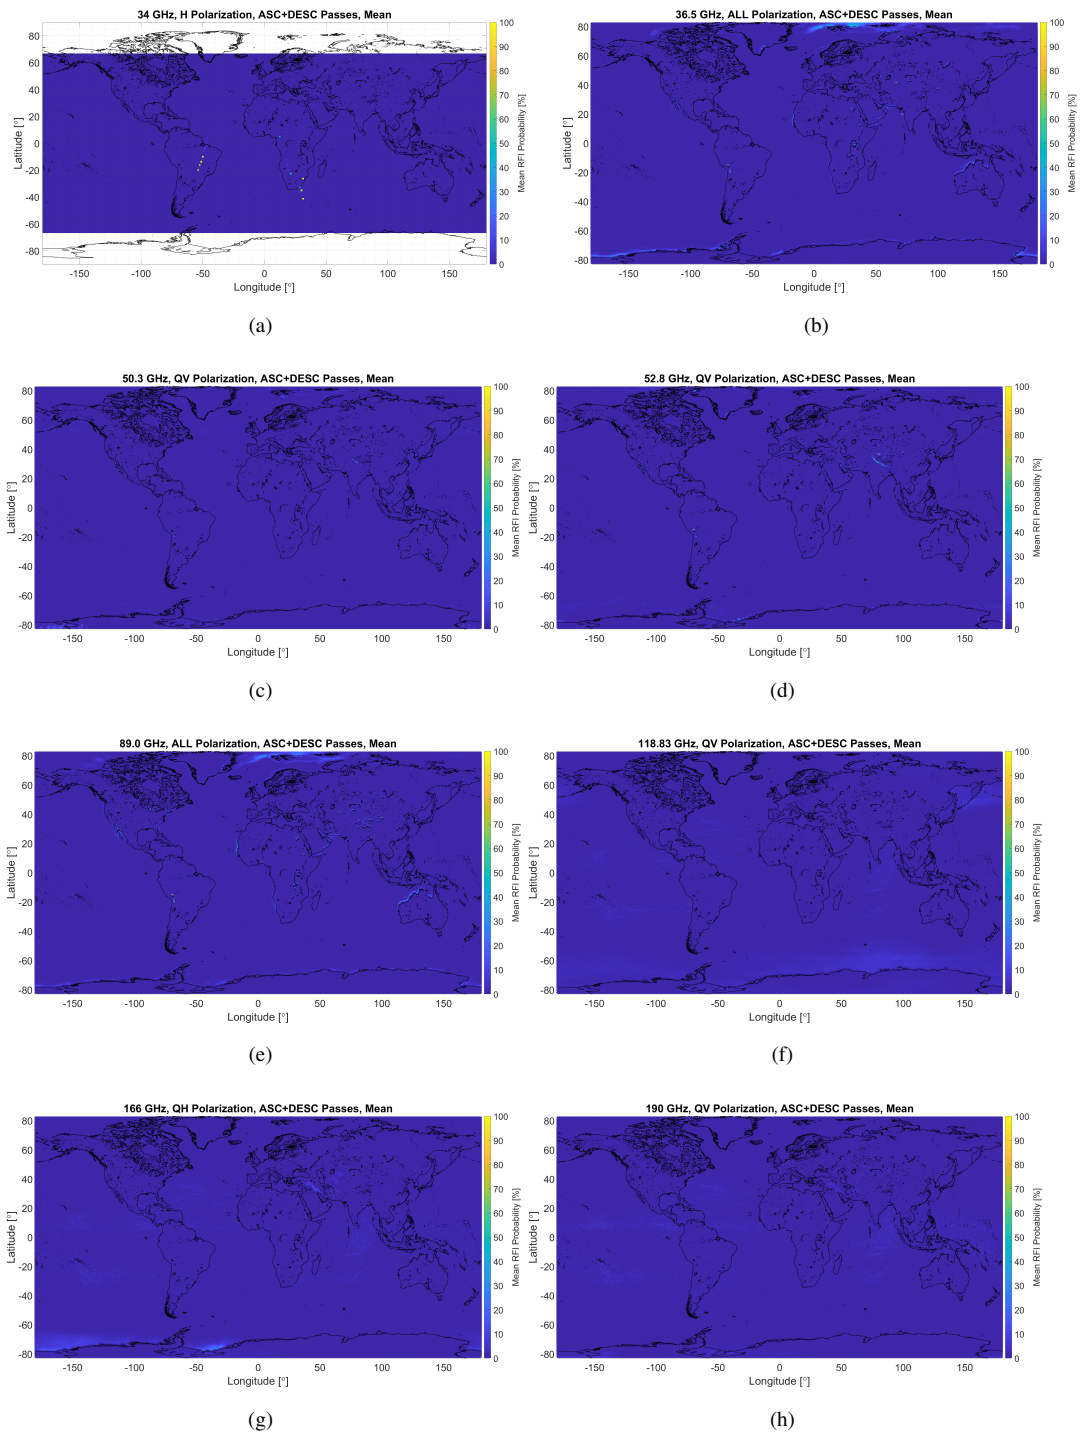


**Figure 6.** RFI Probability maps for: (a) 34 GHz (AMR-C), (b) 36.5 GHz (AMSR2), (c) 50.3 GHz (AMSU-A), (d) 52.6-59.3 GHz (AMSU-A), (e) 89 GHz (AMSR2), (f) 118 GHz (MWHS-2), (g) 166 GHz (MWHS-2) and (h) 183 GHz (MWHS-2).

direction. The same signatures can be seen as descending stripes in the Bay of Bengal near the coast, which were not observed  
280 in previous analyses. Some strong signatures can be seen in the UK, and some contamination is visible along the Nile River, in  
Nigeria, on the east coast of China, Mexico, Middle East, Central and Western Europe, Australia and widespread in Japan and  
Turkey.


The 18.7 GHz frequency band is not exclusive for Earth Observation, but despite this the RFI contamination maps are  
relatively clean. RFI contamination is found on the US coast, also including Hawaii. No other regions seem to be contaminated.  
285 However, the analysis focused on 2022; since then, strong contamination has been observed by the recent Compact Ocean Wind  
Vector Receiver onboard the International Space Station (COWVR-ISS) instrument (Brown and Morris, 2024). It is true that  
COWVR-ISS has a larger bandwidth than AMSR2, and the detected RFIs could be out of the AMSR2 bandwidth. This fact  
plus a growing presence of contaminated areas makes an RFI detection and mitigation system increasingly attractive at this  
frequency band.

290 One area where we can zoom in is near the Norwegian coast in the North Sea and Arctic Ocean, where several spots of  
contamination at different bands can be observed. They closely match the location of the 2022 oil rig maps observed in Figure  
7 and it seems reasonable to view this as causal. These signatures are only observed by AMSR2. They are also visible at 6.9  
GHz, 7.3 GHz and 36.5 GHz (see Section 5.1.2), but not at 10.7 GHz, and 89 GHz. A possible explanation could be that the RFI  
Index technique is causing false positives due to the coefficients associated with certain bands. Bands where RFI is erroneously  
295 detected (tentatively 18.7 GHz) are explained by the coefficients in  $a$  and  $b$  corresponding to the  $T_b$  of the channels where the  
RFI is present being negative, contributing positively to the RFI Index (see Equation 5). On the contrary, in bands that do not  
show this “cross-contamination” effect, the coefficients in  $a$  and  $b$  corresponding to the  $T_b$  of the channels where the RFI is  
present is positive, contributing negatively to the RFI Index. Figure 7 shows that the upper RFI detected area at 7.3 GHz and  
the lower RFI detected area at 6.9 GHz seem to be “cross-contaminating” the 18.7 and 36.5 GHz maps, since patterns have  
300 similar shapes. It could be the opposite way, but it is less likely that an oil rig is transmitting at 36.5 GHz, since commercial  
radio links are common at 6.9 and 7.3 GHz bands.

The 23.8 GHz frequency band is exclusive for passive services, but the deployment of communication services for 5G  
services in the nearby band 24.25-27.5 GHz might cause RFI contamination in this band. This band was identified for use by  
5G in 2019 (Ookla, 2023). Analysis of the AMSR2 measurements at 23.8 GHz highlighted instances in which the measured  
305 brightness temperature was between 350 K and 400 K which indicates presence of RFI. Some of those observations are  
~~due to suspected to be caused by sun glint effects, and they~~. These measurements were scattered along a constant latitude  
that changed from month to month, and matched the regions prone to sun glint shown in (Wentz et al.) and Section 3 of  
(Kazumori et al., 2016) whose latitude also change along the year. Some of these observations even showed abnormally high  
values compared to the surrounding area in the higher frequency bands. These observations were discarded from the analysis.  
310 The rest of those observations over 350 K were grouped in clusters and are listed in the table 3. The largest cluster of RFI  
signatures is located in Yuzhong County, Lanzhou, Gansu, China. These observations are, to our knowledge, the first confirmed  
detection of RFI in the 23.8 GHz band. The COWVR-ISS also reported RFI in this frequency band (Brown and Morris, 2024),  
but since the instrument’s bandwidth is 75 MHz larger than the allocated band for passive observations, it is not possible to

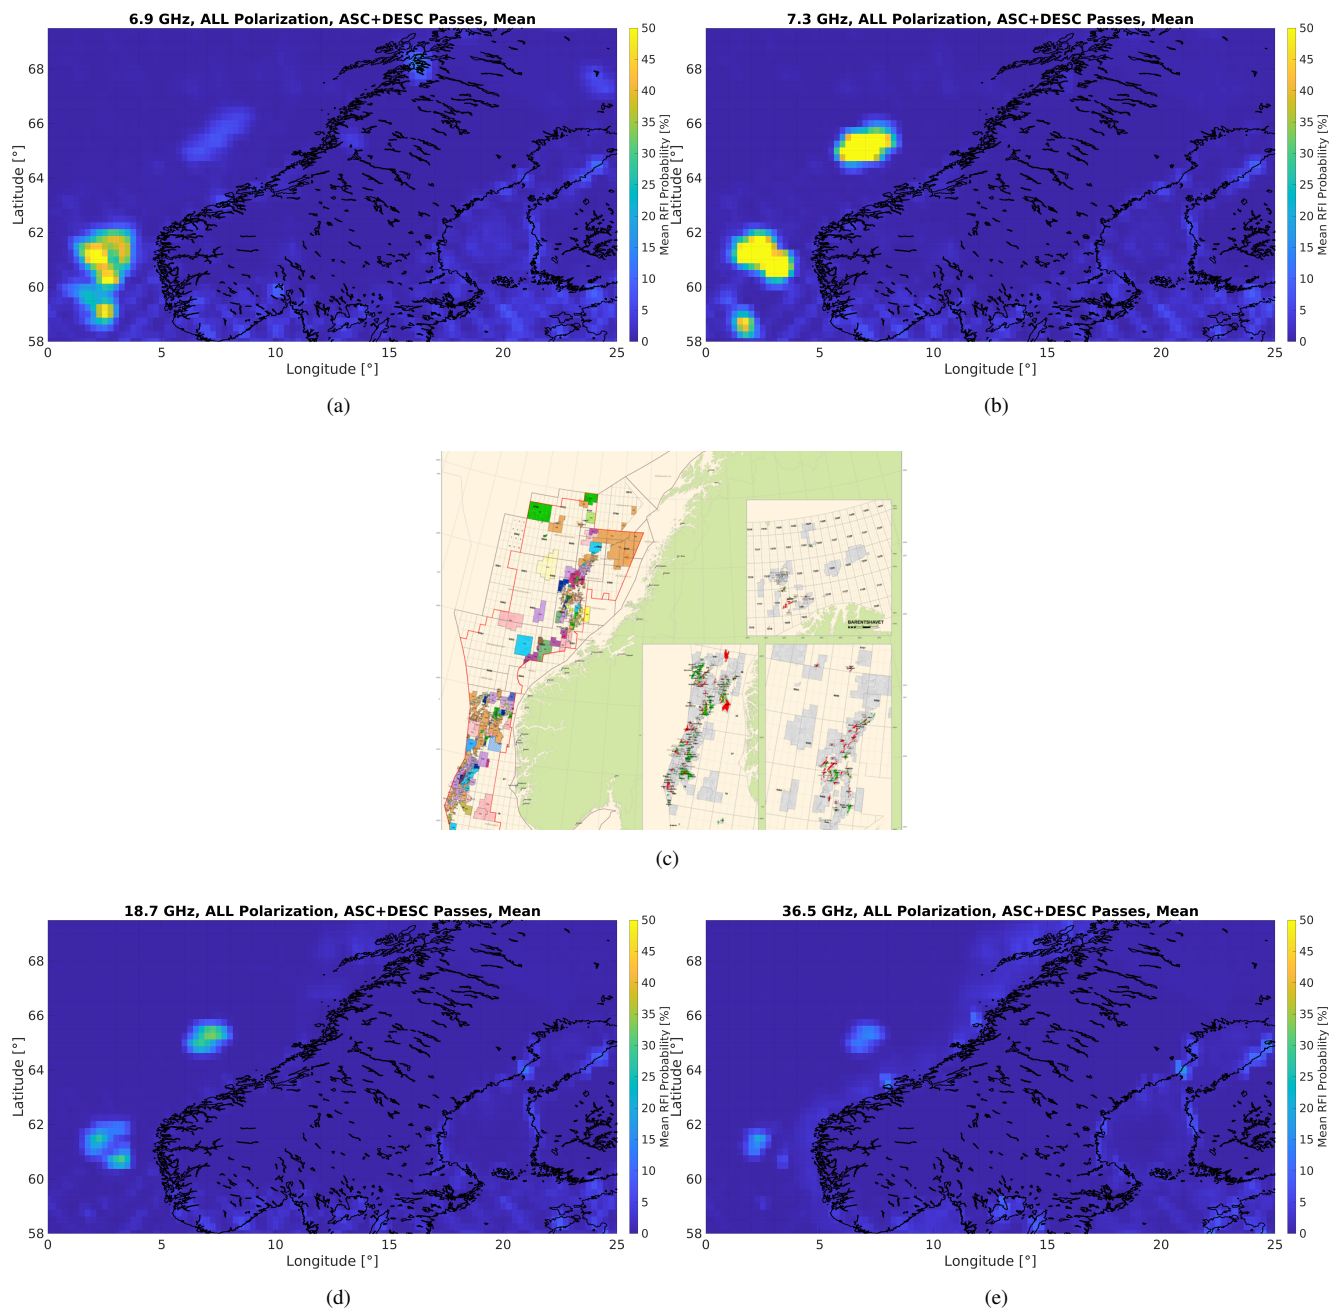

**Figure 7.** AMSR-2 RFI Probability maps centred at the Norwegian coastline for: (a) 6.9 GHz, (b) 7.3 GHz, (d) 18.7 GHz, and (e) 36.5 GHz; and (c) Oil Rig distribution near the Norwegian coast in 2022 (NOD, 2024).

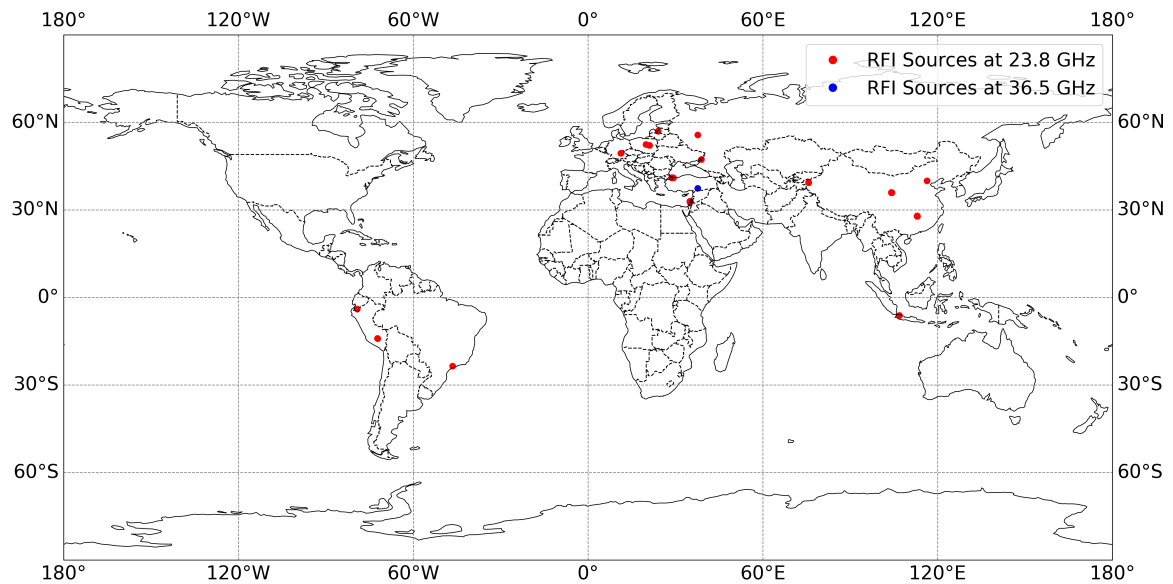

(a)

**Figure 8.** Map showing the location of all RFI at 23.8 GHz (red), and at 36.5 GHz (blue).

ensured if it is an in-band or out-of-band emission. Adjacent channels include mobile and fixed communications, and amateur  
 315 communications. All RFI observations have been located in a World map in Figure 8. These detections are not observed in the RFI Probability maps since the number of contaminated observations is proportionally low to the total number of observations collocated to a cell. Furthermore, the smaller antenna swath makes adjacent cells not to contain any contaminated observations, and therefore they do not show the typical “bump” shape. As consequence of both, the effect of these observations in the maps can not be distinguished from the detection noise.

320 The 31.3-31.8 GHz is exclusive for passive services in region 2, but no clear signs of RFI contamination can be seen except than false positives in already previously mentioned areas such as sea-ice missed classifications and coastal up-welling areas. The band from 33.5-34.5 GHz is shared but results do not suggest man-made RFI contamination. RFI has been found in this frequency band with COWVR (Brown and Morris, 2024), but the larger bandwidth of COWVR (1975 MHz) also covers part of the adjacent bands. Therefore, these reported sources cannot be confirmed as in-band.

325 The 36-37 GHz band is shared with other services. RFIs have been reported in this frequency band in November 2018 caused by a radar facility in Roi Namur in the Kwajalein atoll, Marshall Islands. The RFI signal only affected the gain of the Sentinel-3 instrument, and the radiometric data quality was not affected (Quartly et al., 2020). No clear RFI signatures were detected in the considered dataset. AMSR2 data showed 1 single observations in 2022 over 350K which could not be linked to

**Table 3.** Centroid coordinates of each cluster of RFI signatures at 23.8 GHz band, sorted by number of observations.

Coordinates (Lat, Lon)	Notes
35.9°, 104.2°	Yuzhong County, Lanzhou, Gansu, China
32.8°, 35.0°	Haifa, Israel
27.9°, 113.0°	Yuetang District, Xiangtan, Hunan, China
41.0°, 28.7°	West Istanbul, Turkey
39.4°, 75.7°	Shufu County, Prefectura de Kasgar, Sinkiang, China
-6.2°, 106.8°	Yakarta, Indonesia
52.1°, 21.1°	Warsav, Poland
41.0°, 29.2°	East side of Istanbul, Turkey
47.3°, 38.9°	Outskirts of Taganrog, Russia
-4.0°, -79.2°	San Cayetano, Ecuador
57.0°, 24.0°	Riga, Latvia
-14.1°, -72.3°	Choqueca, Peru
49.4°, 11.3°	Leinburg, Germany
55.7°, 37.6°	Moscow, Russia
-23.5°, -46.5°	São Paulo, Brasil
52.4°, 19.8°	Nowe Wymyśle, Polonia
40.0°, 116.3°	Pekin, China

sun glint effects. The only remaining observation is located at 37.41°, 37.61° in Araban, Gaziantep province, Turkey. This RFI  
330 observation has been located in a World map in Figure 8.

At higher frequencies, there were no clear detections of RFI signals in the considered dataset, regardless of whether the  
bands are exclusive or shared. The signatures shown in the maps seem to respond to geophysical signatures rather than RFI  
contamination due to their large extension, location, and variability throughout the year. Most bands show false detections at  
the sea-ice borders as a result of missed classifications in both hemispheres—, even after using a sea ice concentration algorithm  
335 that performs well in the ice marginal zone (Kern et al., 2019). Threshold could have been adjusted to reduce the false positives  
in the ice edges, but it would had come at the expense of misdetections in this area. Although not many RFI are expected here,  
some ships cross this area and their presence should not be neglected. False detections can also be seen at the borders of the  
Greenland ice sheet, or in the Himalayan mountains. Many coastlines, such as the Mauritanian coast, the Angola-Namibia  
coast, the Chilean-Peruvian coast, the north-west coast of Australia, the Yemen-Oman coast, the Somalia coast, the Baltic Sea  
340 coastline, the Yellow Sea coastline, and the California coast show a high RFI probability in many frequency bands (such as  
18.7, 23.8, 36.5, or 89 GHz) and instruments. Capone and Hutchins (2013) shows correspondence between these areas and  
the so-called upwelling regions of the ocean, of which the four main ones are the Chilean-Peruvian coast, the California coast,  
the Angola-Namibia coast, and the Mauritanian coast. Upwelling waters cool down the sea surface, and this effect The water  
anomaly observed by this effect in the Canary and California currents can reach 4 K after long time averaging and could explain

345 the detection in these areas ~~-(Gómez-Ocampo et al., 2018; Benazzouz et al., 2014).~~ For analogous reasons to the sea ice edge  
false alarms, softening the thresholds might result in misdetections in marien regions such as the Yellow sea of the seas around  
Japan. Other false positives are observed in South America and Africa can be seen in all frequency bands such as the Lakes  
Titicaca and Poopó. The RFI probability changes over the year with a stable decreasing trend until mid-year, when it starts to  
increase again. This could be caused by a reduction on the water level during summer until the rainy period in winter.

## 350 **5 Results Validation**

NWP models compare millions of observed radiances with model-simulated radiances every day as part of the data assimilation  
procedure. For microwave radiances at ECMWF, this process employs the RTTOV-SCATT radiative transfer model (Geer  
et al., 2021), simulating radiative effects from the surface, atmospheric gases, clouds, and precipitation—a so-called all-sky  
simulation. The observed radiance ( $O$ ) is compared to the model's short-range forecast simulation of the observation, known  
355 as the model background ( $B$ ), interpolated in time and space to the observation location and with the same viewing geometry.  
This is the first step of the assimilation of the observations, which will subsequently lead to updated model fields. In addition  
to offering information to update the model state, analysis of departures between observations and model ( $O - B$ ) can be  
instructive for monitoring the quality of observations themselves. It is worth noting that in this study the full spatial resolution of  
radiances are analyzed (i.e. with no averaging applied), in contrast to typical pre-processing of observations before assimilation  
360 at ECMWF that includes averaging (superobbing) for most microwave data.

Simulations of the NWP model background do not include artificial sources. The background thus represents a realization  
of a pristine RF environment, one with natural sources of emission only. Analysis of departures can therefore aid in the  
identification and quantification of RFI sources, as the natural range of  $O - B$  variability is known very well in most cases. For  
example, over the ocean at low frequencies that are primarily sensitive to SST,  $O - B$  variations are typically within about 1 K.  
365 This provides a tight constraint on expected behavior, allowing abnormal radiative signals to stand out as likely contamination.  
Instantaneous departures can show these anomalous scenes, but the real power of NWP-based monitoring is in the aggregate,  
with signals able to emerge even in noisy sampling over many days and weeks. Crucially, RFI should manifest as a positive  
 $O - B$  signal only, whereas other mismatches between the model and observations should be distributed between positive and  
negative departures. For example, a misplaced cloud in the model background will show up at a cloud-sensitive frequency band  
370 as a positive blob next to a negative one, whereas a region of RFI should be overwhelmingly positive. Even if RFI is coincident  
with cloud and precipitation, the large amount of sampling afforded by NWP-based analysis means that these signals should  
still be clear in time-averaged maps and histograms.

In this validation analysis, only results from AMSR2 low frequency channels are presented, covering March and October  
of 2022. This is to focus on frequency bands in which significant contamination was found. Fuller analysis can be found in  
375 the technical report from ~~Duncan and Bormann (2024)~~ (Duncan and Bormann, 2024), and comprehensive analysis of AMSR2  
performance in the ECMWF system can be found in Kazumori et al. (2016).

## 5.1 Definitions, Screening, and Instantaneous Departures


Here we define the departure with inclusion of a bias correction term, as calculated by the variational bias correction scheme used within the data assimilation system (Auligné et al., 2007). This is a method of removing persistent sources of bias between observations and model, including overall instrument bias against the model plus terms for angular and atmospheric thickness components among others. Inclusion of the [channel-dependent](#)  $BC$  term here is important for analyzing AMSR2, which has roughly 2-5 K mean biases against the ECMWF model at several channels (Duncan et al., 2024). This should also aid in isolating signals of contamination rather than bias. The departure is defined:

$$D_{BC} = (O - B) - BC \quad (12)$$


To illustrate what can be seen in the departures, Figure 9 shows AMSR2 observations at 18.7V, the model background simulated values, and the difference. East of the United States' east coast is a long frontal region of cloud and precipitation, resulting in positive and negative departures side-by-side. In contrast, the area around Florida shows relatively weak but persistent positive departures of roughly 5-10 K, consistent with a reflected geostationary broadcast signal. In this way, RFI contamination can be identified by eye in  $O - B$  fields.

However, the fidelity of model-simulated radiances is not the same everywhere and it is therefore necessary to introduce some screening of departures for statistical analysis. For example, microwave radiances over ice-free oceans have very well-modeled surface emissivities at the frequencies discussed, whereas more challenging surfaces such as sea-ice, high orography, and snow-covered ground have much poorer emissivity modeling. Certain regions are thus screened out of the validation analysis in order to exclude areas of known model bias or deficiencies in the forward modeling. This is why frozen surfaces of Canada, high orography of the Rocky Mountains, and some coastal scenes are not shown in Fig. 9. This data selection essentially follows the screening rules for microwave imagers assimilated at ECMWF (Geer et al., 2022). For more details on the data selection, see [Duncan and Bormann \(2024\)](#) ([Duncan and Bormann, 2024](#)).

RFI sources are spectrally narrow in most cases and should therefore be distinct between radiometry bands. This is important for departure-based RFI detection because model assumptions and radiative transfer modeling will be very similar at nearby frequencies. Consequently, a forward model error such as an erroneous surface emissivity will manifest similar at nearby frequencies whereas RFI will not. Figure 10 shows departures from the three lowest frequency bands on AMSR2 at V over Western Europe. The left panels show all departures, while the right panels show only points that EORFIScan flagged as likely RFI. As the figure presents descending nodes of the GCOM-W orbit and AMSR2 scans in the forward direction, it is possible to see reflected RFI from geostationary sources, particularly over sea at 10.65V in the Bay of Biscay, the North Sea, and in parts of the Mediterranean. It is also clear that some surfaces over land are simulated better than others, with larger model biases apparent over complex surfaces and some artefacts along coastlines. Regardless, several point sources of RFI are evident through localized positive departures over both land and sea, most evident at 6.9V in the North Sea, Luxembourg, and southern Spain, at 7.3V at different sites in the North Sea and Italy, and then very strong sources at 10.65V in the UK and Italy. Most of the clear examples of RFI in the left panels are identified by EORFIScan in the right panels. One possible exception is

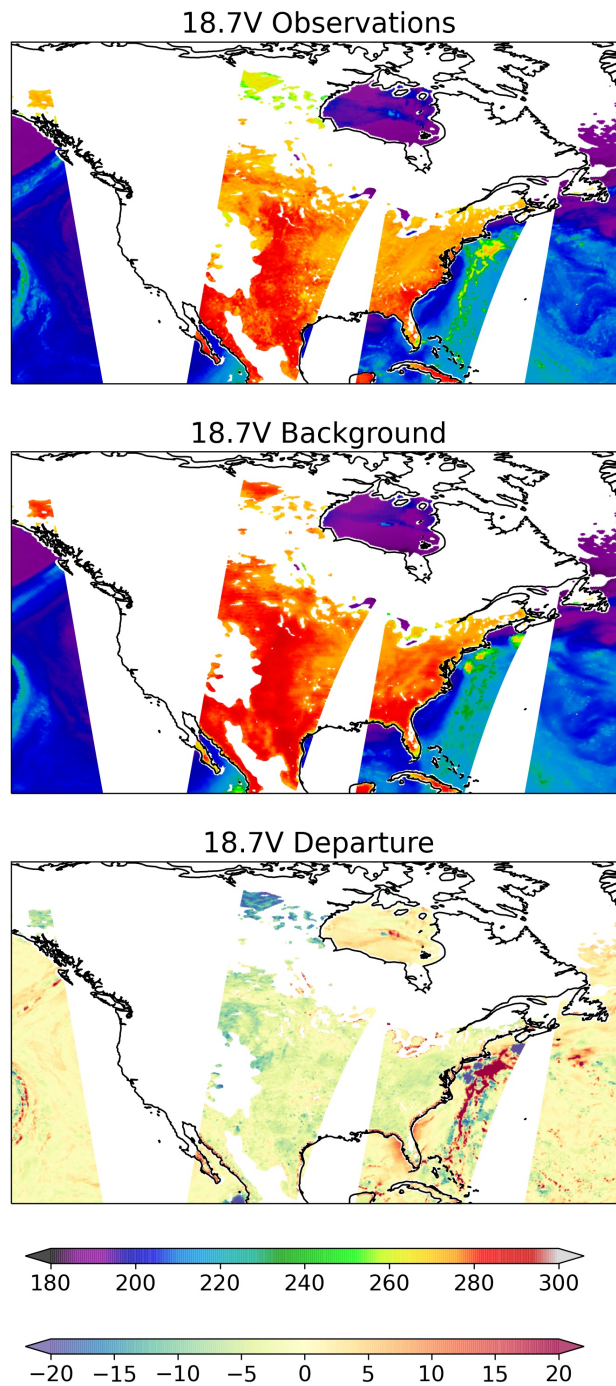

**Figure 9.** Observed radiances (top), model background equivalents (middle), and background departures ( $O - B$ ; bottom) from AMSR2 18.7V on October 2, 2022 over North America.

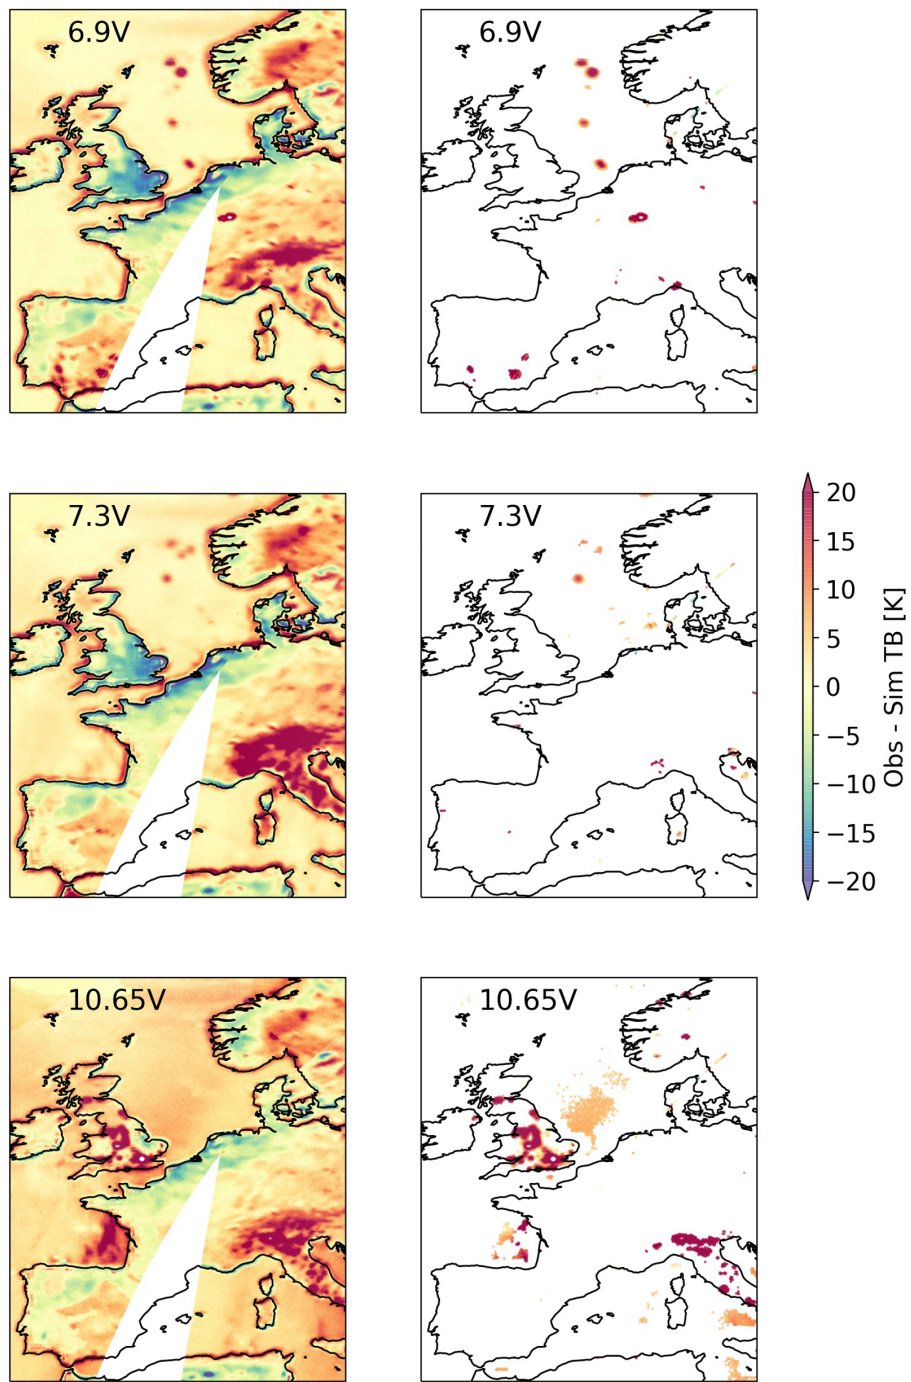

**Figure 10.** Departures for AMSR2 channels 1, 3, and 5 (all V) on March 2, 2022 over western Europe. The right column only shows departures identified by EORFIScan as likely contamination.


410 7.3V contamination in Italy where despite both 6.9V and 10.65V RFI in the vicinity, the much stronger departures at 7.3 GHz suggest likely RFI here.

## 5.2 Statistical Evaluation


Moving from qualitative to quantitative evaluation of flagged departures, it is best to focus on areas in which there is known contamination to improve the signal to noise ratio of the analysis. For example, it is not useful to analyze the Southern Ocean  
415 for RFI flagging when it is clear from Figs. 5 and 6 that little to no real contamination is found there. The focus here is on a region encompassing North America, Europe, North Africa, and the Middle East (20-70N, 140W-50E), as this region includes a variety of sources at different frequency bands. Figure 11 shows mean departure maps of this region for March 2022, gridded at a 1-degree resolution. The four lowest-frequency V channels from AMSR2 are shown, now with all screened departures in the top panels and flagged departures only in the bottom ones. In this analysis, the two higher-confidence flag levels (introduced  
420 in Sec. 2.3) are used together as simply 'flagged data' for simplicity.

Due to atmospheric and surface variability, well-identified RFI will not exclusively manifest as positive departures, but will generally produce positive departures in the aggregate. Strong and/or persistent contamination should thus be red in the figure. The monthly mean departures for all data do indicate some regions for which frequent RFI can be picked out by eye without any filtering: e.g. Morocco and Ukraine at 7.3V or England and Italy at 10.65V. These are clearly regions with persistent  
425 contamination. For flagged points only, the expectation is that skillful detection would identify positive departures in the aggregate—lighter red for weak or infrequent true RFI, and dark red for consistently strong RFI. Most of the flagged points do match with positive mean departures, with larger magnitudes typical over land and weaker but more widespread RFI over sea. Some of the main features found by EORFIScan in Fig. 5 — e.g. reflected contamination at 10.65V around Europe and 18.7V around the USA — are verified by the departure analysis. Many smaller features that are either not persistent or not strong  
430 enough to be clear in Fig. 5 are visible in Fig. 11, including the Nile Valley at 10.65V, Southern California at 6.9V, Spain at 7.3V, and so on.

Along the same lines, aggregate departures can be analysed across this region by separating points by land and sea. Figure 12 provides histograms of departures from this region, showing all data and flagged data from land and sea separately. This allows investigation of relative thresholds of detection and viewing the symmetry of the departures. It is clear that EORFIScan flags  
435 a large majority of very positive departures at 6.9 and 7.3 GHz over both land and sea, with nearly all departures larger than +30 K flagged as likely contamination at 6.9V, for example. In these cases, it is quite likely that these are indeed RFI, as the departure PDFs have long positive tails. In general, EORFIScan flags very few negative departures, especially over sea, and this indicates a low rate of false positives. It is interesting to note that the histograms are significantly wider for H channels than for V at all frequencies, as might be expected from the larger dynamic range at H. Possibly as a result of this, EORFIScan  
440 is more cautious in flagging for H channels. This means that detection thresholds appear larger at H channels, as can be seen in the histogram peaks for flagged data over sea especially. One further feature to note is that EORFIScan thinks that most contamination over sea is fairly weak, with most cases being between about +5 and +20 K departures; this is in contrast to

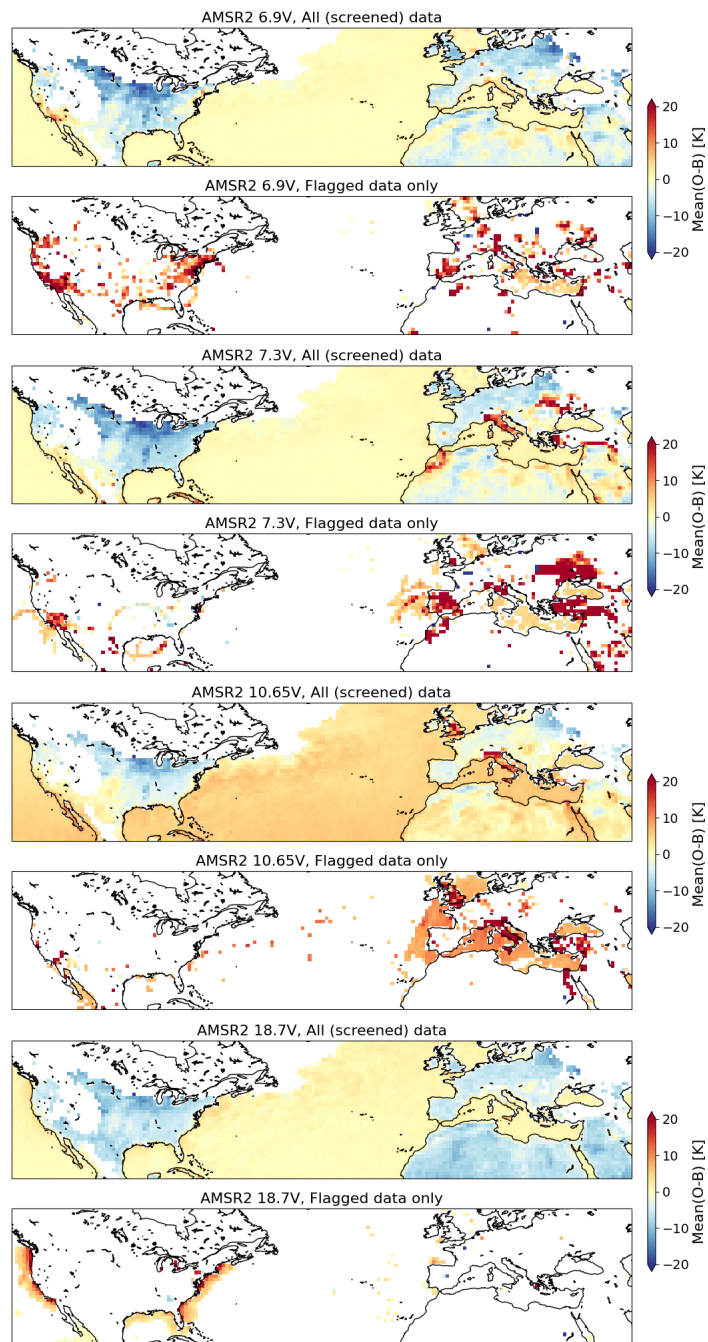

**Figure 11.** Mean departures from AMSR2 channels 6.9V, 7.3V, 10.65V, and 18.7V comprising data from March 2022. Plots alternate between all observations that passed the screening criteria (top) and RFI-flagged observations only (bottom). At least 1000 observations need to exist in a grid box for it to be plotted, and at least 10 flagged observations for the bottom panels.

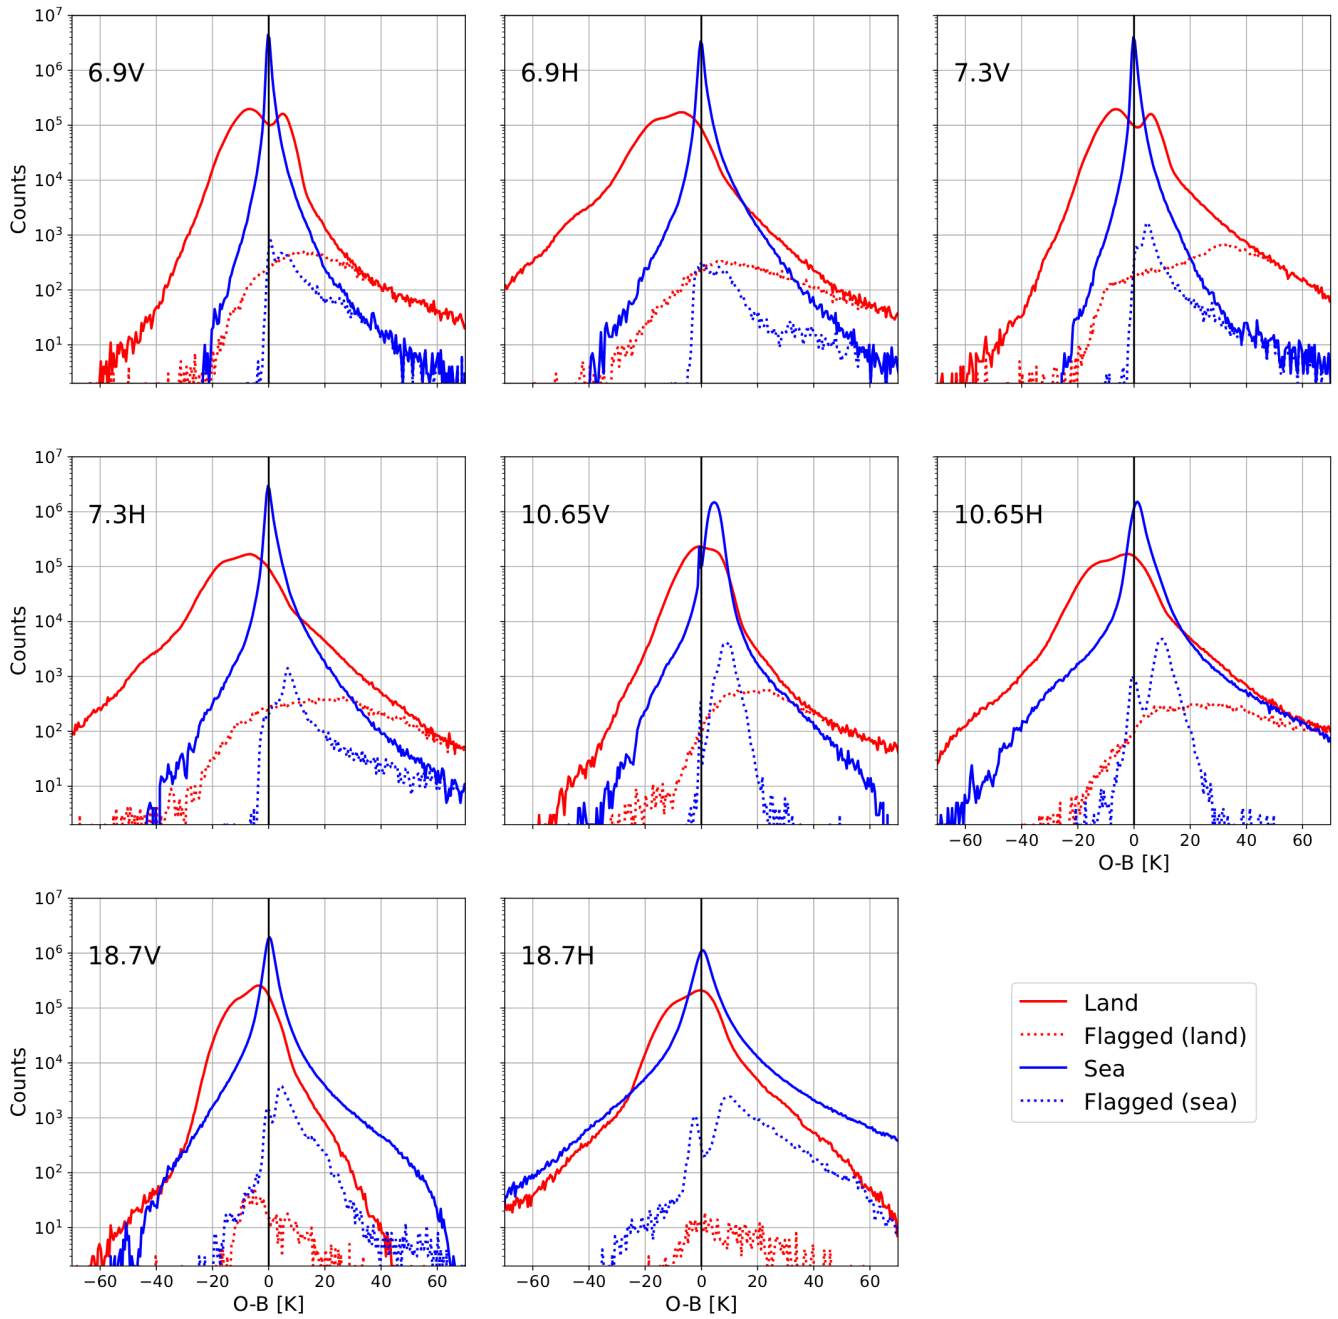

**Figure 12.** Histograms of departures for screened observations over land (red; > 95% land fraction) and sea (blue; < 1% land fraction), comprising data from March 2022. The histograms of all points are given by solid lines, with the flagged histograms given by dotted lines. Region is the same as for the previous figure.

much of the contamination over land, where +20 K signals are common and 7.3 GHz contamination is typically a +25 K signal or more.


### 445 5.3 Validation Discussion and Critique

One aspect that is very important for data assimilation is that RFI screening does not remove real, natural signals of clouds and precipitation. This is more of a concern for higher frequency channels due to hydrometeor sensitivity generally increasing with frequency. The challenge for good RFI identification is to retain the natural signals while having a detection threshold that is low enough for the application of interest. Judging the performance of EORFIScan is not quite as easy as simply ensuring that  
450 the departure standard deviation decreases globally — if the flagging removes too many points with real geophysical signals, then it is undesirable.

With this in mind, Figure 13 shows the standard deviation of departures before and after flagged data have been removed at 6.9V and 10.65V, now over October 2022 rather than March. Comparing the top and bottom panels, there are regions in which likely contamination appears almost entirely removed by EORFIScan flagging, for example over the UK at 10.65V or the  
455 northeast US at 6.9V. Some regions like southeast Ukraine do appear much improved after screening at 6.9V, but significant contamination remains. Outside of the known areas of contamination, the standard deviations of departures appear almost entirely unchanged; examples include the northwestern Atlantic in the Gulf Stream and the Sahara and Arabian deserts, in which large variability is expected and indeed retained by EORFIScan. This indicates that false positives are not significantly dampening the natural variability of departures.

Balancing detection against false positives is difficult to assess for RFI because there is not a truth dataset to compare  
460 against, and assessing the detection threshold is similarly challenging because low-level RFI is particularly hard to identify. In our analysis, negative departures represent likely (but not certain) false positives if they are flagged. With this definition of false positives, EORFIScan has a false positive rate of between 0.05 to 0.2 %, depending on the frequency. Given this low rate of false positives, it could be suggested that the flagging is primarily identifying larger instances of RFI. Going back to the  
465 swath-level view of Fig. 10, it does appear that flagging is rare near coastlines, and some points of likely RFI remain in the un-flagged maps of Fig. 13 along coastlines.

This balance is more difficult for H channels where the range of natural variability is larger because of more variable emissivity. The histograms of Fig. 12 suggest that detection limits of EORFIScan are perhaps twice or more what they are at V, though 10.65 GHz departures over sea are an interesting outlier with most flagged departures lying between about + 8 to 15  
470 K at both polarizations. It is hard to say anything definitive about the strength of expected contamination because these could conceivably be quite different at V and H at the same frequency band. But if the assumption is that RFI magnitudes are similar across polarizations then the detection skill is stronger at V over both land and sea, especially at C-band.

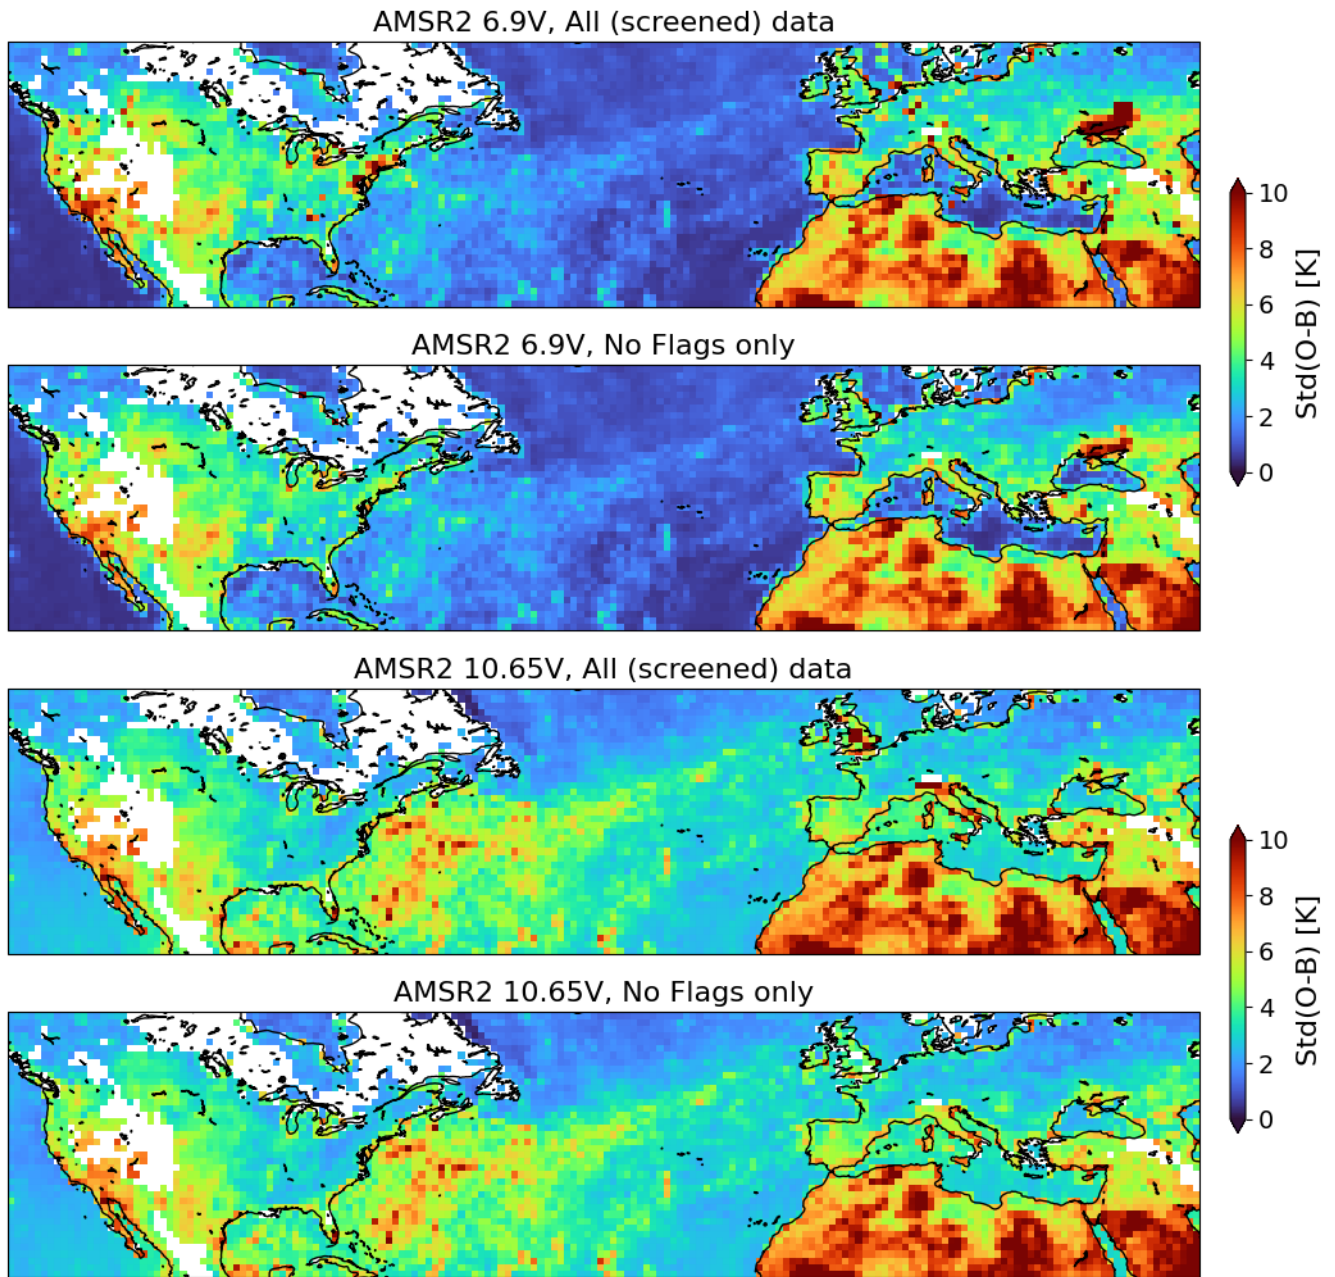

**Figure 13.** Standard deviation of departures for all screened observations (top) and just observations with no flag (bottom) from AMSR2 channels 6.9V and 10.65V, comprising data from October 2022. At least 1000 (screened) observations need to exist in a grid box for it to be plotted.

## 6 Conclusions

This paper described ~~a survey conducted on an assessment of~~ key passive microwave bands exploited for Earth Observation  
475 from the 6.4-7.3 GHz band to 174-191 GHz. First the EORFIScan software has been described, which applies multiple RFI  
detection techniques to EO brightness temperature products. This part includes a description of the RFI detection techniques  
and the methodology to compute the thresholds. The software has then been used to analyze a year of AMSR2, AMSU-A,  
MWHS-2, and AMR-C data in order to cover all main EO passive microwave bands beyond the L-band. The methodology has  
been assessed for AMSR2 and AMSU-A via comparisons with NWP model equivalents, with results presented for the 6-19  
480 GHz bands on AMSR2, where the large majority of corroborated RFI was found. RFI probability maps for 2022 have been  
computed as the number of detections over the number of observations accounting for all polarizations and orbital passes.

The results have shown heaviest contamination in the 6.4-7.3 GHz band, more moderate contamination at 10.7 and 18.7  
GHz bands. The identified areas of systematic contamination have been assessed using all-sky NWP departures, and in most  
cases are found to correlate strongly with positive departures as would be expected for skilful flagging of RFI. Several new  
485 sources are observed in these bands with respect to the literature and corroborated by the NWP-based analysis. The emergence  
of 6.9 GHz contamination over sea is particularly troubling, as this is a key band for all-weather SST and sea-ice measurements  
(Scanlon et al., 2025), and will be flown on the upcoming CIMR mission from ESA as well as on the successor instrument to  
AMSR2, AMSR3. First RFI signatures have been found at 23.8 and 36.5 GHz in AMSR2.

Consideration of RFI detection systems in these bands is strongly advised as part of future mission planning, as the contam-  
490 ination observed already has an impact on users and may be expected to worsen in the upcoming years. At bands from 50 GHz  
and up, no significant contamination has been detected in the dataset under consideration. However, the constantly evolving  
threat of RFI in EO bands would benefit greatly from monitoring in real time, especially for bands of consequence for NWP  
and other operational applications. It is clearly suboptimal to discover new sources of contamination a year or two after those  
radiances have been ingested into a variety of operational models and retrievals, and thus real-time monitoring would provide  
495 significant benefit to a wide community of users.

It is reasonable to expect that high-frequency technology will become more accessible, low-frequency bands will become  
more crowded, and new services will require greater bandwidths in the near future. As a result, higher frequency bands may  
start showing contamination and RFI at lower frequency bands could become more widespread than it already is, which will  
threaten their use for Earth observation. Given that new missions take years from design until the end of their operational  
500 lifetime, new EO missions should include RFI detection and mitigation systems to be prepared for the expected worsening of  
the RFI environment.

*Code and data availability.* The threshold coefficients, the RFI Index coefficients, the functions to compute the thresholds and the RFI  
Index, and an example script to generate them can be found in Onrubia and Oliva (2026). Data used for AMSR2, AMSU-A and MWHS-  
II are in BUFR format for convenience of ECMWF. The data in this format is not publicly available, however it is publicly available in  
505 other data formats such as HDF5, which containing additional auxiliary data not included in the BUFR ones. AMSR2 data can be found in

Japan Aerospace Exploration Agency (JAXA) (2012), AMSU-A data can be found in Zou et al. (2013), MWHS-II can be found in Xian et al. (2021), and AMR-C data can be downloaded from EUMETSAT for Copernicus and European Organisation for the Exploitation of Meteorological Satellites (2025).

*Author contributions.* Ra.O., J.B., I.N., and A.J. wrote the software; Ra.O. processed the data; D.D. and N.B. validated the results; Ra.O.,  
510 Ro.O., D.D., and N.B. interpreted the results; Ra.O. and D.D. graphic results generation; Ra.O., Ro.O., J.B., D.D., and N.B. wrote the  
resulting technical reports; Y.S., J.C., and F.J. reviewed the technical reports; Ra.O., Ro.O., D.D., N.B. and J.B. requested the funding; Ra.O.,  
Ro.O., J.B. and N.B. managed the project; Y.S., J.C., and F.J. supervised the project; Ra.O. and D.D. wrote and edited the manuscript; all  
authors reviewed the manuscript.

*Competing interests.* The authors declare no conflicts of interest.

515 *Acknowledgements.* This project was developed under ESA Contract No. 4000141035/23/NL/SD. The authors acknowledge the Japan  
Aerospace Exploration Agency (JAXA) for the GCOM-W BUFR data provided through ECMWF, to European Organization for the Exploita-  
tion of Meteorological Satellites (EUMETSAT) for the AMSU-A and AMR-C data, and to the Chinese National Satellite Meteorological  
Center (NSMC) for the MWHS-II data. The authors also acknowledge Antonio Martelucci and Stephen English for his help and comments  
during the project.

## 520 References

- Auligné, T., McNally, A., and Dee, D.: Adaptive bias correction for satellite data in a numerical weather prediction system, *Quart. J. Roy. Meteor. Soc.*, 133, 631–642, <https://doi.org/10.1002/qj.56>, 2007.
- Benazzouz, A., Mordane, S., Orbi, A., Chagdali, M., Hilmi, K., Atillah, A., Lluís Pelegrí, J., and Hervé, D.: An improved coastal upwelling index from sea surface temperature using satellite-based approach – The case of the Canary Current upwelling system, *Continental Shelf Research*, 81, 38–54, <https://doi.org/10.1016/j.csr.2014.03.012>, 2014.
- 525 Bringer, A., Daehn, M., Johnson, J. T., Soldo, Y., Le Vine, D. M., de Matthaeis, P., Piepmeier, J. R., and Mohammed, P.: SMAP Mission: Changes in the RFI Environment, p. 3754–3757, IEEE, <https://doi.org/10.1109/igarss.2018.8519067>, 2018.
- Brown, S. and Morris, M.: Compact Ocean Wind Vector Radiometer (COWVR) Environmental Data Record (EDR) Quick-start User's Guide, Pasadena, CA, [https://archive.podaac.earthdata.nasa.gov/podaac-ops-cumulus-docs/cowvr-tempest/open/docs/STP\\_H8\\_COWVR\\_User-Guide\\_v6.pdf](https://archive.podaac.earthdata.nasa.gov/podaac-ops-cumulus-docs/cowvr-tempest/open/docs/STP_H8_COWVR_User-Guide_v6.pdf), version 1.02, 2024.
- 530 Capone, D. G. and Hutchins, D. A.: Microbial biogeochemistry of coastal upwelling regimes in a changing ocean, *Nature Geoscience*, 6, 711–717, <https://doi.org/10.1038/ngeo1916>, 2013.
- Casey, A., Gagnon, N., Bedard, J., Beaulne, A., Shahabadi, M. B., and Aparicio, J.: Potential impact of RFI on NWP: a Canadian perspective, in: RFI, ECMWF, [https://events.ecmwf.int/event/258/contributions/2884/attachments/1564/2803/RFI2022\\_Casey\\_Beaulne.pdf](https://events.ecmwf.int/event/258/contributions/2884/attachments/1564/2803/RFI2022_Casey_Beaulne.pdf), accessed: 24 April 2024, 2022.
- 535 CIA: World Data Bank II: North America, South America, Europe, Africa, Asia, <https://doi.org/10.3886/ICPSR08376.V1>, 1985.
- Draper, D. W.: Report on GMI Special Study #15: Radio Frequency Interference, Technical Report 20160003316, Goddard Space Flight Center, Greenbelt, USA, 2016a.
- Draper, D. W.: Terrestrial and space-based RFI observed by the GPM microwave imager (GMI) within NTIA semi-protected passive earth exploration bands at 10.65 and 18.7 GHz, in: 2016 Radio Frequency Interference (RFI), pp. 26–30, <https://doi.org/10.1109/RFINT.2016.7833526>, 2016b.
- 540 Draper, D. W.: Radio Frequency Environment for Earth-Observing Passive Microwave Imagers, *IEEE Journal of Selected Topics in Applied Earth Observations and Remote Sensing*, 11, 1913–1922, <https://doi.org/10.1109/JSTARS.2018.2801019>, 2018.
- Duncan, D. and Bormann, N.: Assessing RFI flags at passive microwave bands with an NWP model, Tech. rep., ESA Contract Report, Reading, <https://doi.org/10.21957/eefd6f0954>, 2024.
- 545 Duncan, D. I., Geer, A., Bormann, N., and Dahoui, M.: Vicarious calibration monitoring of MWI and ICI using NWP fields, Tech. rep., EUMETSAT Contract Report, <https://doi.org/10.21957/7c2d18d2e1>, 2024.
- English, S., Duncan, D., and Turner, E.: Assessment of Value of Provision of Spectral Response Functions from CGMS Agencies, in: CGMS-48 WG II, [https://www.researchgate.net/publication/351358361\\_Assessment\\_of\\_Value\\_of\\_Provision\\_of\\_Spectral\\_Response\\_Functions\\_from\\_CGMS\\_Agencies](https://www.researchgate.net/publication/351358361_Assessment_of_Value_of_Provision_of_Spectral_Response_Functions_from_CGMS_Agencies), 2020.
- 550 ERMIT: ESA RFI Monitoring & Information Tool, <https://rfi.smos.eo.esa.int/rfimanager/publicindex.jsp>, (Accessed: 15 April 2025), 2025.
- EUMETSAT for Copernicus and European Organisation for the Exploitation of Meteorological Satellites: Advanced Microwave Radiometer (AMR-C) Level 2 Products (baseline version G01) - Sentinel-6 - Reprocessed, [https://doi.org/10.15770/EUM\\_SEC\\_CLM\\_0116](https://doi.org/10.15770/EUM_SEC_CLM_0116), 2025.
- Farrar, S. and Jones, L.: Corruption of the TRMM microwave imager cold sky mirror due to RFI, in: 2016 14th Specialist Meeting on Microwave Radiometry and Remote Sensing of the Environment (MicroRad), pp. 76–81, <https://doi.org/10.1109/MICRORAD.2016.7530508>, 2016.

- Geer, A. J., Bauer, P., Lonitz, K., Barlakas, V., Eriksson, P., Mendrok, J., Doherty, A., Hocking, J., and Chambon, P.: Bulk hydrometeor optical properties for microwave and sub-millimetre radiative transfer in RTTOV-SCATT v13.0, *Geosci. Model Dev.*, 14, 7497–7526, <https://doi.org/10.5194/gmd-14-7497-2021>, 2021.
- 560 Geer, A. J., Lonitz, K., Duncan, D. I., and Bormann, N.: Improved Surface Treatment for All-sky Microwave Observations, Tech. Rep. 894, ECMWF Tech. Memo., Shinfield Park, Reading, <https://doi.org/10.21957/zi7q6hau>, 2022.
- Gómez-Ocampo, E., Gaxiola-Castro, G., Durazo, R., and Beier, E.: Effects of the 2013–2016 warm anomalies on the California Current phytoplankton, *Deep Sea Research Part II: Topical Studies in Oceanography*, 151, 64–76, <https://doi.org/10.1016/j.dsr2.2017.01.005>, 2018.
- 565 Imaoka, K., Kachi, M., Kasahara, M., Ito, N., Nakagawa, K., and Oki, T.: Instrument performance and calibration of AMSR-E and AMSR2, *International archives of the photogrammetry, remote sensing and spatial information science*, 38, 13–18, 2010.
- Japan Aerospace Exploration Agency (JAXA): GCOM-W/AMSR2 L1B Brightness Temperature, <https://doi.org/10.57746/EO.01GS73ANS548QGHAKNZDJYXD2H>, 2012.
- Jorge, F., Pedro, L., and Mendonça, S.: Emerging prospects for Earth observation in addressing sustainable development goals, *ITU News Magazine*, 5, 50–54, 2023.
- 570 Kazumori, M., Geer, A. J., and English, S. J.: Effects of all-sky assimilation of GCOM-W/AMSR2 radiances in the ECMWF numerical weather prediction system, *Quart. J. Roy. Meteor. Soc.*, <https://doi.org/10.1002/qj.2669>, 2016.
- Kern, S., Lavergne, T., Notz, D., Pedersen, L. T., Tonboe, R. T., Saldo, R., and Sørensen, A. M.: Satellite passive microwave sea-ice concentration data set intercomparison: closed ice and ship-based observations, *The Cryosphere*, 13, 3261–3307, [https://doi.org/10.5194/tc-13-](https://doi.org/10.5194/tc-13-3261-2019)
- 575 [3261-2019](https://doi.org/10.5194/tc-13-3261-2019), 2019.
- Leys, C., Ley, C., Klein, O., Bernard, P., and Licata, L.: Detecting outliers: Do not use standard deviation around the mean, use absolute deviation around the median, *Journal of experimental social psychology*, 49, 764–766, <https://doi.org/10.1016/j.jesp.2013.03.013>, 2013.
- Li, L., Njoku, E., Im, E., Chang, P., and Germain, K.: A preliminary survey of radio-frequency interference over the U.S. in Aqua AMSR-E data, *IEEE Transactions on Geoscience and Remote Sensing*, 42, 380–390, <https://doi.org/10.1109/tgrs.2003.817195>, 2004.
- 580 Maiwald, F., Brown, S. T., Koch, T., Milligan, L., Kangaslahti, P., Schlecht, E., Skalare, A., Bloom, M., Torossian, V., Kanis, J., Statham, S., Kang, S., and Vaze, P.: Completion of the AMR-C Instrument for Sentinel-6, *IEEE Journal of Selected Topics in Applied Earth Observations and Remote Sensing*, 13, 1811–1818, <https://doi.org/10.1109/JSTARS.2020.2991175>, 2020.
- Mo, T.: Prelaunch calibration of the advanced microwave sounding unit-A for NOAA-K, *IEEE Transactions on Microwave Theory and Techniques*, 44, 1460–1469, <https://doi.org/10.1109/22.536029>, 1996.
- 585 NOD, N.: Maps of the Norwegian Continental Shelf, <https://www.sodir.no/en/whats-new/publications/Maps-of-the-ncs>, (Accessed: 14 March 2025), 2024.
- Oliva, R., Daganzo, E., Richaume, P., Kerr, Y., Cabot, F., Soldo, Y., Anterrieu, E., Reul, N., Gutierrez, A., Barbosa, J., and Lopes, G.: Status of Radio Frequency Interference (RFI) in the 1400–1427MHz passive band based on six years of SMOS mission, *Remote Sensing of Environment*, 180, 64–75, <https://doi.org/10.1016/j.rse.2016.01.013>, special Issue: ESA’s Soil Moisture and Ocean Salinity Mission -
- 590 *Achievements and Applications*, 2016.
- Oliva, R., Onrubia, R., Martellucci, A., Daganzo-Eusebio, E., Jorge, F., Soldo, Y., English, S., De Rosnay, P., Weston, P., Barbosa, J., and Nestoras, I.: Results from the Ground RFI Detection System for Passive Microwave Earth Observation Data, in: 2021 IEEE International Geoscience and Remote Sensing Symposium (IGARSS), pp. 1827–1830, IEEE, <https://doi.org/10.1109/igarss47720.2021.9553636>, 2021.

- Onrubia, R. and Oliva, R.: Threshold Generation Coefficients for the EORFIScan Software, <https://doi.org/10.5281/ZENODO.19727331>, 595 2026.
- Ookla: 5G in asia pacific: Deployment momentum continues, [https://www.gsma.com/get-involved/gsma-membership/gsma\\_resources/5g-in-asia-pacific-deployment-momentum-continues](https://www.gsma.com/get-involved/gsma-membership/gsma_resources/5g-in-asia-pacific-deployment-momentum-continues), 2023.
- Parde, M., Zribi, M., Fanise, P., and Dechambre, M.: Analysis of RFI Issue Using the CAROLS L-Band Experiment, *IEEE Transactions on Geoscience and Remote Sensing*, 49, 1063–1070, <https://doi.org/10.1109/tgrs.2010.2069101>, 2011.
- 600 Pedro, L., Sá, M., Fernandes, R., Jorge, F., and Mendonça, S.: Protection of Earth Observation Satellites From Radio-Frequency Interference: Policies and Practices [Perspectives], *IEEE Geoscience and Remote Sensing Magazine*, 10, 278–288, <https://doi.org/10.1109/MGRS.2022.3221824>, 2022.
- Piepmeier, J. R., Johnson, J. T., Mohammed, P. N., Bradley, D., Ruf, C., Aksoy, M., Garcia, R., Hudson, D., Miles, L., and Wong, M.: Radio-Frequency Interference Mitigation for the Soil Moisture Active Passive Microwave Radiometer, *IEEE Transactions on Geoscience and Remote Sensing*, 52, 761–775, <https://doi.org/10.1109/TGRS.2013.2281266>, 2014.
- 605 Quartly, G. D., Nencioli, F., Raynal, M., Bonnefond, P., Nilo Garcia, P., Garcia-Mondéjar, A., Flores de la Cruz, A., Crétaux, J.-F., Taburet, N., Frery, M.-L., Cancet, M., Muir, A., Brockley, D., McMillan, M., Abdalla, S., Fleury, S., Cadier, E., Gao, Q., Escorihuela, M. J., Roca, M., Bergé-Nguyen, M., Laurain, O., Bruniquel, J., Féménias, P., and Lucas, B.: The Roles of the S3MPC: Monitoring, Validation and Evolution of Sentinel-3 Altimetry Observations, *Remote Sensing*, 12, <https://doi.org/10.3390/rs12111763>, 2020.
- 610 Querol, J., Onrubia, R., Alonso-Arroyo, A., Pascual, D., Park, H., and Camps, A.: Performance Assessment of Time–Frequency RFI Mitigation Techniques in Microwave Radiometry, *IEEE Journal of Selected Topics in Applied Earth Observations and Remote Sensing*, 10, 3096–3106, <https://doi.org/10.1109/JSTARS.2017.2654541>, 2017.
- Scanlon, T., Geer, A. J., Bormann, N., and Duncan, D. I.: Using 6.9 and 10.65 GHz From the AMSR2 and GMI Microwave Imagers in the ECMWF NWP System (IFS), *IEEE Transactions on Geoscience and Remote Sensing*, 63, 1–19, <https://doi.org/10.1109/tgrs.2025.3627448>, 2025.
- 615 SFCG: Report 32-1R2: Passive Sensor Filter Characteristics, Tech. rep., Space Frequency Coordination Group, 2014.
- Spreen, G., Kaleschke, L., and Heygster, G.: Sea ice remote sensing using AMSR-E 89-GHz channels, *Journal of Geophysical Research: Oceans*, 113, <https://doi.org/10.1029/2005JC003384>, 2008.
- Wentz, F., Meissner, T., Gentemann, C., Hilburn, K., and Scott, J.: RSS / AMSR-2 Data Images / Daily, [https://images.remss.com/amsr/amsr2\\_data\\_daily.html](https://images.remss.com/amsr/amsr2_data_daily.html), (Accessed: 23 April 2026).
- 620 World Meteorological Organization (WMO): List of all Instruments, <https://space.oscar.wmo.int/instruments>, <https://space.oscar.wmo.int/instruments>, observing Systems Capability Analysis and Review Tool (OSCAR), 2025.
- Wu, Y., Qian, B., Bao, Y., Li, M., Petropoulos, G. P., Liu, X., and Li, L.: Detection and Analysis of C-Band Radio Frequency Interference in AMSR2 Data over Land, *Remote Sens.*, 11, <https://doi.org/10.3390/rs11101228>, 2019.
- 625 Wu, Y., Li, M., Bao, Y., and Petropoulos, G. P.: Cross-Validation of Radio-Frequency-Interference Signature in Satellite Microwave Radiometer Observations over the Ocean, *Remote Sensing*, 12, <https://doi.org/10.3390/rs12203433>, 2020.
- Xian, D., Zhang, P., Gao, L., Sun, R., Zhang, H., and Jia, X.: Fengyun Meteorological Satellite Products for Earth System Science Applications, *Advances in Atmospheric Sciences*, 38, 1267–1284, <https://doi.org/10.1007/s00376-021-0425-3>, 2021.
- Zhang, S., Li, J., Wang, Z., Wang, H., Sun, M., Jiang, J., and He, J.: Design of the second generation microwave humidity sounder (MWHs-II) for Chinese meteorological satellite FY-3, in: 2012 IEEE International Geoscience and Remote Sensing Symposium, pp. 4672–4675, <https://doi.org/10.1109/IGARSS.2012.6350423>, 2012.
- 630

Zou, C.-Z., Wang, W., and NOAA CDR Program: NOAA Climate Data Record (CDR) of AMSU-A Level 1c Brightness Temperature, Version 1.0, <https://doi.org/10.7289/V5X63JT2>, 2013.