



# Eradiate: An Accurate and Flexible Radiative Transfer Model for Earth Observation and Atmospheric Science

Vincent Leroy<sup>1</sup>, Nicolae Marton<sup>1</sup>, Claudia Emde<sup>1</sup>, Nicolas Misk<sup>1</sup>, Misael Gonzalez Almeida<sup>1</sup>, Sebastian Schunke<sup>2</sup>, Noelle Cremer<sup>3</sup>, Ferran Gascon<sup>4</sup>, and Yves Govaerts<sup>1</sup>

<sup>1</sup>Rayference, Brussels, Belgium

<sup>2</sup>Formerly Rayference, Brussels, Belgium

<sup>3</sup>Serco SpA c/o European Space Agency (ESA), European Space Research Institute (ESRIN), Frascati, Italy

<sup>4</sup>European Space Agency (ESA), European Space Research Institute (ESRIN), Frascati, Italy

**Correspondence:** Vincent Leroy (vincent.leroy@rayference.eu)

**Abstract.** Eradiate is a new open-source 3D radiative transfer model designed to provide highly accurate results for various applications in Earth observation and atmospheric science. Its Monte Carlo ray tracing radiometric kernel is derived from Mitsuba 3, a research-oriented rendering system, and therefore benefits from many technological advances made in the computer graphics community. This foundation unlocks a path to improving radiative transfer simulation accuracy by facilitating the integration of models and numerical techniques developed by scientific communities that are otherwise compartmentalized. Eradiate currently covers the [250 nm, 3  $\mu$ m] spectral region and offers advanced 3D surface modelling features, as well as a state-of-the-art 1D atmospheric model (plane-parallel and spherical-shell) and polarization support. Designed for modern scientific Python programming workflows, it is intended for use in interactive Python sessions such as Jupyter notebooks. Eradiate is thoroughly tested and validated against various radiative transfer benchmarks, ensuring its suitability for calibration and validation tasks. This paper introduces Eradiate from historical, scientific, and architectural perspectives. It elaborates on its feature set and showcases a variety of applications, with scenes ranging from simple 1D plane-parallel setups to complex, fully resolved 3D vegetated canopies and even large regions on Earth.



## List of the main acronyms

|      |                                                 |
|------|-------------------------------------------------|
| AOT  | aerosol optical thickness                       |
| BOA  | bottom of atmosphere                            |
| BRF  | bidirectional reflectance factor                |
| BRDF | bidirectional reflectance distribution function |
| BSDF | bidirectional scattering distribution function  |
| CKD  | correlated- $k$ distribution                    |
| CAMS | Copernicus atmosphere monitoring service        |
| DEM  | digital elevation model                         |
| EO   | Earth observation                               |
| HDRF | hemispherical directional reflectance factor    |
| MCRT | Monte Carlo ray tracing                         |
| TOA  | top of atmosphere                               |
| TOC  | top of canopy                                   |
| RTLS | RosThick-LiSparse                               |
| RTM  | radiative transfer model                        |
| RTE  | radiative transfer equation                     |
| RPV  | Rahman-Pinty-Verstraete                         |
| SRF  | spectral response function                      |
| VRTE | vector radiative transfer equation              |

## 15 1 Introduction

Radiative transfer plays a central role in Earth observation (EO) and related fields: for the interpretation of radiance observations, the simulation of sensor signals for instrument design and mission planning, vicarious calibration and validation of satellite data, and the inversion of radiometric measurements to retrieve key scene properties such as surface reflectance, aerosol and cloud characteristics, or trace gas concentrations. Beyond EO, radiative transfer modelling is also fundamental in numerical weather prediction, climate modelling, solar energy assessment, and the simulation of exoplanetary atmospheres.

Over the past decades, radiative transfer theory and modelling has developed as an autonomous field in the EO community, extending the classical radiative transfer equation (RTE) with specialized models aimed at better describing the various components of the incredibly complex Earth system. As in many, if not all, other scientific fields, the EO community is structured in subcommunities that focus their efforts on problems with limited scope. In that case, the scope pertains to a specific part of the Earth system, *e.g.* atmosphere, biosphere, hydrosphere, lithosphere or cryosphere. Each Earth system component poses different radiative transfer modelling challenges, which have been tackled mostly with a compartmentalized approach,



each subcommunity addressing its own issues. These decades of research and development were successful and yielded a vast collection of theoretical models, numerical techniques, and simulation tools.

However, the Earth system itself is made up of many components that interact radiatively. Therefore, the advances made in all the aforementioned subcommunities should, at some point, meet and combine for models and simulation tools to embrace the full complexity of the real world. In practice, this need for convergence remains largely unaddressed and results in a strong community fragmentation, which limits the possibilities to take Earth system radiative transfer modelling to the next level of accuracy.

The need for more accurate radiative transfer simulations in the context of remote sensing is primarily motivated by the improving radiometric accuracy of modern satellite-borne instruments. Such radiometers can often only be calibrated through the process of *vicarious calibration*, which compares recorded satellite data with a trusted numerical reference obtained by simulating radiative transfer over a well-characterized target. Modern instruments often achieve accuracy levels around 2 %, and sometimes perform even better; some missions specifically targeting calibration applications, such as TRUTHS (Fox and Green, 2020) or CLARREO (Salehi et al., 2022), are even expected to have a radiometric accuracy better than 1 %. However, the models routinely used for such calibration tasks do not consistently achieve an accuracy better than 1 %. This is mainly attributable to two factors (Govaerts et al., 2022):

- The atmosphere is composed of a mixture of gaseous molecules and suspended particles (aerosols and clouds). The absorption of the molecular component is a complex modelling problem, in which uncertainties can arise at every point: molecular absorption depends on the state of the atmosphere; molecular absorption cross-sections have high-frequency features that are difficult to characterize; those features can only be accurately resolved with costly line-by-line methods; and to meet performance requirements, molecular absorption is usually parametrized (*e.g.* with the popular correlated-*k* method) to reduce the algorithmic complexity of the problem. Thus, simulating molecular absorption with the accuracy required to achieve the aforementioned requirements is very challenging.
- The world is intrinsically three-dimensional, but most simulation tools, for performance reasons, currently represent the scene using a plane-parallel geometry, *i.e.* with two translational invariances. This means that planetary curvature, surface heterogeneity (topography, vegetated or urban cover, optical properties varying horizontally) and atmospheric 3D structure (clouds) are ignored, although they have a significant impact on the radiative transfer problem.

Separately, both challenges have been tackled using proven techniques developed by many research groups from diverse scientific communities over the past decades; but addressing both issues together requires a modelling framework capable of aggregating the advances of a fragmented scientific community. In that context, we present Eradiate, an open-source radiative transfer model (RTM) born from this need for scientific convergence, as well as a desire to offer the community a high-quality open product through long-term maintenance, thorough documentation, and modern software development practices. Eradiate offers a radiative transfer simulation framework for EO scientists that can model the atmosphere with state-of-the-art techniques and represent the surface with an arbitrary level of detail. Its flexible Python interface makes it ideal for integration in a modern scientific software environment.



The scientific and technical background underlying this project is reviewed in Section 2. Sections 3, 4 and 5 provide an overview of the capabilities of the software. Section 6 provides an overview of the architecture of Eradiate v1.0.0. Section 7 elaborates on several activities undertaken to validate Eradiate’s output. Finally, Section 8 showcases a few applications to 1D and 3D radiative transfer problems.

## 65 2 Background and related work

Eradiate is built to address the needs of EO scientists, with a strong influence from the computer graphics community. This section outlines the scientific background in the EO community and emphasizes important similarities with the field of computer graphics that are beneficial to radiative transfer modelling for EO applications. The vocabulary occasionally borrows from computer graphics: in case of doubt, the reader is referred to the work of Salesin et al. (2024), which clarifies some important  
 70 points.

### 2.1 Radiative transfer simulation for Earth observation

*One-dimensional radiative transfer models.* As mentioned previously, many RTMs assume that the geometry of the problem is one-dimensional, often with plane-parallel geometry, which greatly simplifies the implementation of many numerical methods. Many of these models share a focus on atmosphere modelling, since 1D surface modelling is fairly simple in comparison. One  
 75 can cite the 6SV (Kotchenova et al., 2006), libRadtran’s publicly available version (Mayer and Kylling, 2005; Emde et al., 2016), MODTRAN (Berk et al., 2014), SCIATRAN (Rozanov et al., 2014), or ARTDECO (Compiègne et al., 2013) models without being exhaustive. Eradiate does not position itself as an equivalent to any of these models, because the requirements underlying its development are different; but it can produce simulation results which can be compared to those of 1D models.

*Surface modelling.* Natural and artificial land surfaces have a complex geometric structure due to vegetation, buildings, or  
 80 topography, which cause complex radiative effects such as shadowing-masking or interreflection (Pharr et al., 2023). In addition, the materials composing the surface have an internal microstructure, making their radiative behaviour equally complex. 3D RTMs can account for that complexity by implementing explicit surface modelling. A few examples are DART (Wang et al., 2022), LESS (Qi et al., 2019), Librat (Lewis, 1999; Calders et al., 2018), FluorWPS (Tong et al., 2021), or DIRSIG (Goodenough and Brown, 2017). Although accounting for all subtle radiative phenomena occurring in natural surfaces re-  
 85 quires a 3D model, such a level of detail is not always necessary: complex surfaces are often approximated by equivalent bidirectional reflectance distribution functions (BRDFs), which can be used by both 3D and 1D models. The Lambertian (or diffuse) reflection model is the simplest, but also hardly representative of natural surfaces. A variety of models are used in EO applications, and a review is beyond the scope of this article. We can cite, without being exhaustive, models based on the work of Minnaert (1941) or Hapke (1963), many variants of the RossThick-LiSparse (RTLS) model (Lucht et al., 2000), the  
 90 Rahman-Pinty-Verstraete (RPV) BRDFs (Rahman et al., 1993; Pinty et al., 2000), or physically based subsurface scattering models (Gobron et al., 1997). Specialized models are also available for cryosphere- (Mei et al., 2022) and hydrosphere-related (Mishchenko and Travis, 1997; Litvinov et al., 2024) applications.



*Atmosphere modelling.* The Earth's atmosphere is composed of gases and particles of various sizes (aerosols and clouds). In the visible and infrared spectral regions, the particulate components usually have spectrally smooth absorption and scattering coefficients. The gaseous component, on the other hand, has a fine-structured line absorption spectrum which makes the simulation of radiative transfer with good accuracy and performance a challenging task. The spectral complexity of the gaseous component drives the selection of the numerical method used to handle the spectral dimension of the simulation.

Spectroscopic databases, such as HITRAN (Gordon et al., 2022) or GEISA (Delahaye et al., 2021), provide absorption line parameters that are used by line-by-line spectroscopic models, such as LBLRTM (Clough, 1991; Clough et al., 2005), ARTS (Buehler et al., 2025) or RADIS (Pannier and Laux, 2019), to compute absorption coefficient spectra.

Radiative transfer solvers can use these absorption coefficients directly to solve the RTE at many wavelengths, with a spectral density sufficient to resolve line spectrum features. This kind of approach, without approximation, can easily become computationally expensive unless carefully optimized. Of notable interest is the ALIS method (Emde et al., 2011), which drastically reduces the variance, and thus the computational cost, of such spectrally dense Monte Carlo methods by tracking many wavelengths simultaneously during the ray tracing random walk.

To reduce the computational cost of molecular absorption modelling, many approaches have been developed. Without being exhaustive, we can cite the correlated- $k$  distribution (CKD) family (Goody et al., 1989; Lacis and Oinas, 1991), REPTRAN (Gasteiger et al., 2014) or the  $\ell$ -distribution method (André, 2016; André et al., 2021).

*Aerosol modelling.* Aerosols are major contributors to the planetary radiative budget and are subject to particular modelling attention. Just like other participating media, when solving the RTE, they are characterized by their absorption and scattering coefficients and phase function, varying against spatial and spectral coordinates. RTM input may however be formulated in higher-level terms (*e.g.* aerosol layer height and optical thickness at a reference wavelength for a 1D geometry) or using microphysical properties, assuming a scattering model (*e.g.* Mie scattering for spherical particles).

*Cloud modelling.* In principle, the modelling of radiative transfer in clouds shares many similarities with that in aerosols. However, hydrometeors are much larger than aerosols, which introduces potential complications in scattering modelling due to peaked forward scattering. Methods have been developed to address these difficulties (Buras and Mayer, 2011). Clouds also usually feature 3D structures that have a strong impact on the radiative transfer problem. Several RTMs, *e.g.* 3DMCPOL (Cornet et al., 2010), MYSTIC (Mayer, 2009; Emde et al., 2016), or htrdr (Villefranche et al., 2019), have a strong 3D cloud modelling component.

*Technological background.* Most RTMs consist of a high-performance core component that implements basic numerical methods, accessible through a higher-level interface that provides more intelligible abstractions for the user. The high-performance core takes low-level input. Configuring it manually is tedious, error-prone, and time-consuming. For example, the DISORT solver (Stamnes et al., 2000) uses atmospheric optical properties as its input: these are hard to derive for many RTM users, who usually have access more easily to higher-level quantities (*e.g.* atmospheric profile of temperature and pressure, aerosol optical thickness (AOT), etc.). For this reason, most RTMs wrap this core component in an interface taking as input quantities that are closer to physical abstractions relevant to the radiative transfer problem being solved. The interface itself may take input from files or through an application programming interface (API). Some RTMs that do not provide an API



end up being interfaced by third-party software (Wilson, 2013; de Boissieu et al., 2019), which shows community interest for integrating RTMs in a programmatic workflow—especially in Python-based processing pipelines.

130 Core components are typically written in Fortran, C, or C++, and interface components may be written in higher-level languages such as Python or Java. Although most RTMs target CPU architectures, it is worth noting that some projects, such as SMART-G (Ramon et al., 2019), target GPU hardware to take advantage of its exceptional parallel processing capabilities.

## 2.2 Physically based rendering

Physically based rendering consists in creating images by modelling the propagation of light based on physical laws, *i.e.* by solving the RTE. Since a realistic scene contains many objects with subtle appearance details, the problem of realistic rendering is complex, and the current standard numerical method to solve it is Monte Carlo ray tracing (MCRT).

Over the years, the computer graphics community has developed and enhanced MCRT techniques (Kajiya, 1986; Veach, 1997; Pharr et al., 2023) to improve the realism and efficiency of the rendering process. Significant resources were invested in the development of effective theoretical frameworks, efficient Monte Carlo integration algorithms, variance reduction techniques, data representations, and realistic scattering models.

*Similarities and differences with radiative transfer for Earth observation.* Without looking into details, simulating a satellite image by running an RTM is not very different from generating a synthetic picture of the target scene: both consist in solving the RTE in a scene observed by a sensor, where light is scattered by an arbitrary number of objects with arbitrarily complex scattering properties.

145 However, the purposes of computer graphics and remote sensing are different: the former seeks plausible appearance, while the latter aims at quantitative accuracy. Consequently, the focus of model and algorithm development for rendering and remote sensing is different: a biased Monte Carlo integration algorithm may be acceptable for rendering because it produces plausible—although biased, thus inaccurate in a metrological sense—images, but may not be for remote sensing because the bias exceeds quantitative accuracy requirements; on the other hand, a reflectance model may be suitable for remote sensing for its ability to represent certain parts of the Earth system, but may be ruled out for rendering applications because its formulation makes it hard to sample efficiently and therefore degrades performance to an unacceptable point.

An interesting example is how molecular absorption is modelled. The subtle effects originating from the complex line structure of molecular absorption spectra, although hardly perceptible to a human observer, must be modelled accurately to reach requirements for EO applications. This led to the development of the specific techniques mentioned above, which are not necessarily required for plausible rendering—although recent work has demonstrated interest in more realistic atmospheric models in the context of computer graphics (Wilkie et al., 2021).

The size of the computer graphics community and the converging interests of numerous scientists and users led to the development of “standard” software architectures suitable for incorporating the complexity of MCRT techniques. Many modern renderers support surface and volumetric scattering, polarization, surface and volume emission, and are built on a modular architecture which makes it easy to implement additional models and algorithms: when it comes to software architecture, the computer graphics community is less fragmented than the remote sensing community.



*Influence on radiative transfer modelling for remote sensing.* Physically based rendering has had an influence on radiative transfer modelling for decades. Many modern RTMs, *e.g.* htrdr, DART, LESS, or DIRSIG5, are based directly or indirectly on rendering software, either by using a rendering framework such as PBRT (Pharr et al., 2023), LuxCoreRender (Bucciarelli et al., 2025) or Mitsuba (Jakob, 2010; Nimier-David et al., 2019; Jakob et al., 2022a) as their radiometric core component, or by drawing architectural or conceptual inspiration from rendering software, modelling, or theory.

### 3 Theoretical foundations

#### 3.1 Radiative transfer theory

Like all RTMs, Eradiate solves the RTE. Many variants of it exist, all with a specific set of assumptions relevant to the application targeted by each RTM. A common general expression, neglecting volume emission, writes

$$\boldsymbol{\omega} \cdot \nabla L(\mathbf{p}, \boldsymbol{\omega}) = -\sigma_t(\mathbf{p}, \boldsymbol{\omega}) L(\mathbf{p}, \boldsymbol{\omega}) + \int_{\mathcal{S}} \sigma_s(\mathbf{p}, \boldsymbol{\omega}) p(\mathbf{p}, \boldsymbol{\omega}_i, \boldsymbol{\omega}) L(\mathbf{p}, \boldsymbol{\omega}_i) d\boldsymbol{\omega}_i, \quad (1)$$

where  $L$  is the spectral radiance (typically in  $\text{W} \cdot \text{m}^{-2} \cdot \text{sr}^{-1} \cdot \text{nm}^{-1}$ );  $\boldsymbol{\omega}$  is an arbitrary direction vector, and  $\mathbf{p}$  is an arbitrary point in space;  $\sigma_t$  and  $\sigma_s$  are the extinction and scattering coefficients; and  $p$  is the scattering phase function. The  $\mathcal{S}$  domain is the entire sphere. The spectral dependency is omitted for brevity. This volumetric transport equation notably neglects the effects of radiative emission, inelastic scattering (or any effect in which radiative energy can be transferred from one frequency to another), and polarization.

To this volumetric transport equation must be added equally essential boundary conditions. A purely reflective local boundary condition at the surface of an opaque body writes

$$L(\mathbf{p}, \boldsymbol{\omega}) = \int_{\mathcal{H}(\mathbf{n})} f_r(\mathbf{p}, \boldsymbol{\omega}_i, \boldsymbol{\omega}) (\boldsymbol{\omega}_i \cdot \mathbf{n}) d\boldsymbol{\omega}_i \quad \text{for } \boldsymbol{\omega} \cdot \mathbf{n} > 0, \quad (2)$$

where  $f_r$  is the BRDF (Nicodemus et al., 1977) and  $\mathcal{H}(\mathbf{n})$  is the hemisphere oriented by the local surface normal vector  $\mathbf{n}$ . Many BRDFs exist, ranging from diffuse (a.k.a. Lambertian) materials with  $f_r = \text{constant}$ , to complex material models that account for all kinds of angular, spatial and spectral behaviours. Other types of boundary conditions are possible, *e.g.* to account for transmission at the interface. Eradiate can handle all these different types of surfaces.

Although incident solar radiation is unpolarized, atmospheric and surface scattering polarizes it. Neglecting this effect can lead to errors as large as about 10 % (Mishchenko et al., 1994; Emde and Mayer, 2018). Eradiate implements a polarized mode that solves the vector radiative transfer equation (VRTE), which describes the behaviour of polarized electromagnetic radiation, and writes

$$\boldsymbol{\omega} \cdot \nabla L(\mathbf{p}, \boldsymbol{\omega}) = -\boldsymbol{\Sigma}_t(\mathbf{p}, \boldsymbol{\omega}) \cdot L(\mathbf{p}, \boldsymbol{\omega}) + \int_{\mathcal{S}} \sigma_s(\mathbf{p}, \boldsymbol{\omega}) \mathbf{R}(\theta_{\text{out}}) \cdot \mathbf{P}(\mathbf{p}, \boldsymbol{\omega}_i, \boldsymbol{\omega}) \cdot \mathbf{R}(\theta_{\text{in}}) \cdot L(\mathbf{p}, \boldsymbol{\omega}_i) d\boldsymbol{\omega}_i, \quad (3)$$



where  $\mathbf{L}$  is the Stokes vector, whose components describe light intensity (typically in  $\text{W} \cdot \text{m}^{-2} \cdot \text{sr}^{-1} \cdot \text{nm}^{-1}$ ) and polarization state;  $\mathbf{\Sigma}_t$  is the extinction matrix;  $\mathbf{P}$  is the scattering phase matrix;  $\mathbf{R}$  is a matrix that rotates the Stokes vector from a reference frame to another; and  $\theta_{\text{in}}$  (respectively  $\theta_{\text{out}}$ ) is the angle between the pre-scattering propagation and scattering (respectively scattering and post-scattering) reference frames.

### 3.2 Problem geometry

Eradiate uses as a baseline a 1D background scene, *i.e.* with two spatial invariances. The scene includes a smooth surface, positioned at an arbitrary altitude, and an atmosphere discretized in a sequence of layers. Two configurations are possible:

- in *plane-parallel* mode, the scene has two translational invariances, the surface is a horizontal plane and the atmospheric layers are horizontally infinite slabs;
- in *spherical-shell* mode, the scene has two rotational invariances, the surface is a sphere and the atmospheric layers are spherical shells.


Spherical-shell geometry support is essential for accurate simulation at grazing viewing or illumination angles. In both cases, the atmospheric layers are assumed to have uniform optical properties. All layers have identical thickness, which allows for constant-complexity lookups. The default layer thickness (100 m) should fit most cases, but that number can be adjusted to optimize performance or resolve fine spatial variations of optical properties.

### 3.3 Monte Carlo ray tracing

Eradiate uses backward MCRT methods which perform a random walk from the sensor to connect it with emitters in the scene (see Fig. 1). These methods include powerful variance reduction techniques that are commonly found in rendering system and / or atmospheric RTMs (local estimate / next event estimation / direct illumination sampling, multiple importance sampling, Russian roulette termination).

In plane-parallel geometry, the algorithm variant that is used takes advantage of prior knowledge of the 1D geometry to sample distances and transmittance in the atmosphere analytically in an optimized way.

In spherical-shell geometry, a flexible volumetric path tracing algorithm is used. This algorithm implements null-collision-based distance and transmittance sampling (Galtier et al., 2013; Novák et al., 2018; Miller et al., 2019), and trades off performance for flexibility. It uses a rejection technique to sample distances and estimate transmittance: this sets no constraint on scene geometry or on extinction coefficient data spatial variations and the method therefore adapts very well, in principle, to all kinds of atmospheric profiles. In practice, the method becomes less efficient at high optical thicknesses (above 1) due to the use of a global majorant for distance sampling. Several strategies are possible to overcome this issue, such as local majorants (Villefranche et al., 2019; Pharr et al., 2023) or an analytical estimator: these are areas for improvement for a future release.

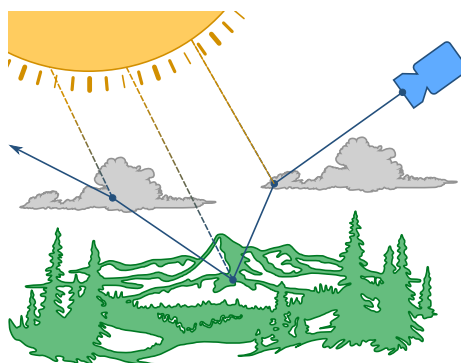

**Figure 1.** Eradiate uses a path tracing algorithm which builds light paths by performing random walks from the sensor. At each node, a radiance sample is computed and added to the path contribution (this is the next event estimation method, also known as local estimate). The path is terminated if the ray escapes the medium or by the Russian roulette criterion.

## 4 Earth surface-atmosphere system components

### 4.1 Surface

#### 220 4.1.1 Reflection models

The surface in the baseline scene (see Sect. 3.2) can be assigned various bidirectional scattering distribution functions (BSDFs).


The simplest reflection model provided by Eradiate is a diffuse (a.k.a. Lambertian) reflectance. The kernel-level implementation is wrapped in a high-level interface that allows specifying spectral variations with an xarray dataset object. This flexible data structure can be loaded from standard formats (*e.g.* NetCDF) or supplied directly by the user, who can write their own  
 225 data converter very easily.

Several more complex BSDFs are available: implementations of the RPV (Rahman et al., 1993; Pinty et al., 2000), RTLS (Strahler et al., 1999) and Hapke (Hapke, 1984, 2012) models, as well as three different water surface models (Mishchenko and Travis, 1997; Litvinov et al., 2024; Kotchenova et al., 2006), are provided and can be assigned to the surface. Similar to the diffuse model, the kernel-level implementation of all reflection models is wrapped in a high-level interface that simplifies  
 230 user input.

#### 4.1.2 Complex surface features (vegetation, topography)

Building on its radiometric kernel, Eradiate offers the possibility to load arbitrary shapes and assign them any reflection model implemented at the kernel level. In particular, it is possible to load triangulated meshes, which allows representing surface features of arbitrary complexity with relatively low effort and great flexibility.

235 All shapes can also be “cloned” with low memory cost using *instancing*. Instances can be positioned arbitrarily in the scene, in any number, and can be used *e.g.* to replicate a tree model or a forest patch many times.

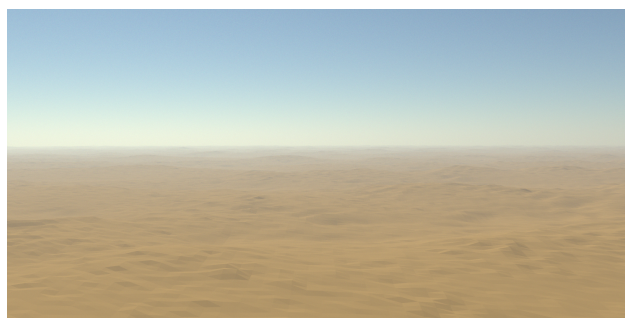

**Figure 2.** RGB view of the Algeria-5 pseudo-invariant calibration site with a plane-parallel atmosphere. The scene features an aerosol layer with an optical thickness of 0.2 and an exponential density distribution. The surface shape is a triangulation of the Copernicus GLO-30 (30 m resolution) digital elevation model (DEM) (Strobl, 2020) with a diffuse reflection model. See Section 8.2.2 for more technical details.



**Figure 3.** RGB view of the Savanna Pre-fire scene (Disney et al., 2011) with a plane-parallel atmosphere. The scene features an aerosol layer with an optical thickness of 0.1 and an exponential density distribution. See Section 8.2.1 for more technical details.

These features can be used to model topography (Fig. 2), as well as explicitly resolved vegetated canopies and urban environments (Fig. 3). Users can also use their own 3D models, and Eradiate provides specific infrastructure to load the 3D canopies defined in the RAMI benchmark series (Widlowski et al., 2007, 2015) based on PLY meshes.

#### 240 4.1.3 Surface texturing

Most BSDF parameters can be *textured*, *i.e.* assigned spatial variations in addition to their spectral variations. This allows one to, *e.g.*, vary the reflectance of a diffuse BSDF at a surface. Texturing is done by mapping an object's *texture coordinates* (sometimes referred to *uv coordinates*) to a data source, typically an array with two spatial dimensions and one spectral dimension such as a spatially resolved hyperspectral albedo dataset. Fig. 4 shows an example of diffuse reflectance texturing.

245 The Eradiate kernel also ships with a “selector” BSDF plugin, which dispatches calls to multiple nested BSDF plugins, based on an index texture. In practice, this can be used to map land cover categories to associated material models, which do not have to be identical: one can assign, *e.g.*, an RPV model to the land parts of a topographic model, and a water surface model to the water parts. Fig. 5 shows an example of land cover-based material selection, as well as instancing (see Section 4.1.2).



**Figure 4.** Nadir top of atmosphere (TOA) view of the Gobabeb HYPERNETS site in Namibia (De Vis et al., 2024) with a plane-parallel atmosphere (AFGL 1986 US Standard profile, no aerosols). The surface shape is a triangulation of the Copernicus GLO-30 DEM (30 m resolution) with a diffuse reflection model textured by a resampling at 1 km of the HAMSTER dataset (Roccetti et al., 2024).



**Figure 5.** RGB view of a synthetic scene created after the area of Mbita, on Lake Victoria in Kenya. The surface shape (a triangulation of the Copernicus GLO-30 DEM) is assigned different reflection models (*e.g.* water, diffuse, RPV) based on land cover information contained in a texture encoded as a PNG image. Where relevant, land areas are also tiled with 3D objects at a reduced memory cost using instancing: a few templates (*e.g.* village, forest) are cloned many times to create a radiatively plausible reflection pattern. See also Section 8.2.3 for a similar example.



## 4.2 Atmosphere

250 The atmospheric medium is split into “molecular” (mostly gases) and “particulate” (aerosols or clouds) components. Components can be described with different vertical resolutions and are all resampled to the computational vertical grid (see Section 3.2). Only one molecular component is allowed, while any number of particulate components is allowed.

### 4.2.1 Molecules

255 The molecular component’s optical properties are driven by a thermophysical property vertical profile that maps the temperature, pressure and species concentrations against altitude. Thermophysical profile handling tools are factored in an independent library (Nollet and Leroy, 2024) that can generate standard profiles such as the six *AFGL* profiles (Anderson et al., 1986), and rescale their total column concentrations to a target value, *e.g.* to account for the increase in CO<sub>2</sub> concentration since the 1980s. Eradiate can also use arbitrary, user-supplied input, allowing for instance to derive thermophysical profiles from data provided by the Copernicus atmosphere monitoring service (CAMS) (Inness et al., 2019) for improved realism.

260 *Molecular scattering.* Molecular scattering is modelled with a polarized Rayleigh phase function (Hansen and Travis, 1974) that includes the depolarization factor to account for molecular anisotropy. When polarization is neglected, the (1, 1) element of the phase matrix serves as the scattering phase function.

*Molecular absorption.* The thermophysical profile is used to query an absorption cross-section database and build an absorption coefficient vertical profile. Eradiate’s molecular cross-sections are created from the HITRAN 2020 spectroscopic database (Gordon et al., 2022) using the RADIS (Pannier and Laux, 2019) software package and incorporating additional cross-section data that are not found in the absorption line database (*e.g.* ozone photodissociation data published by Gorshelev et al. (2014); Serdyuchenko et al. (2014)).

Eradiate can process the spectral dimension using two methods, which are selected upon activation of the operational mode:

- In *monochromatic* mode, the user inputs the sequence of wavelengths for which the RTE is solved. In that mode, the atmospheric absorption database should have a spectral resolution that is fine enough to resolve the complex line structure of the molecular absorption spectrum.
- In *CKD* mode, the spectral dimension is discretized in a database-dependent set of bins. The bins that will be processed are selected either manually by the user, or based on the sensor’s spectral response function. Each active spectral bin is discretized on the *g* pseudo-spectral coordinate according to user-configurable input. When launching the simulation, Eradiate solves the RTE for each *g*-points of each active CKD bin, then aggregates each bin’s *g*-points using the specified quadrature rule.

280 Monochromatic absorption databases are indexed by wavelength, pressure, temperature and species concentrations. Samples covering the solar reflective region (250 nm to 3 μm) are available through the data management interface. To restrict the amount of data delivered to a reasonable amount, these databases are sparse in all dimensions and are not recommended for quantitative applications. Providing a database with a higher spectral resolution is however possible.



CKD absorption databases are provided for the same spectral region with four resolutions ( $100\text{ cm}^{-1}$ ,  $10\text{ nm}$ ,  $1\text{ nm}$  and  $0.1\text{ nm}$ ).<sup>1</sup> Like their monochromatic counterparts, the CKD databases feature pressure, temperature and species concentration dimensions. Two spectral dimensions are used: each CKD bin is identified by its central wavelength, and the absorption coefficient is then indexed by the  $g$  pseudo-spectral coordinate in the CKD method. This indexing method allows to store a highly resolved  $k$ -distribution, giving flexibility in how  $g$ -points can be chosen during computation. Eradiate uses a conservative setup with a 16-point Gaussian quadrature, but other quadrature rules or number of  $g$ -points are supported.

## 4.2.2 Aerosols

The aforementioned molecular component can be combined with an arbitrary number of aerosol (or other particulates) layers parametrized by a vertical extent, a total optical thickness at a reference wavelength, a vertical density distribution and a dataset describing, as a function of the spectral coordinate, the single-scattering properties for that layer (extinction coefficient, single-scattering albedo, and phase matrix). Such single-scattering properties can be computed from microphysical properties, *e.g.* using Mie theory (for spherical particles) or the T-matrix method (for non-spherical particles).

Eradiate ships with a few sample datasets, and notably includes the aerosol classes defined by the 6SV RTM. Eradiate can also import data in the NetCDF format supported by the libRadtran RTM: Thus, users can provide customized input generated, *e.g.*, using the MOPSMAP online tool (Gasteiger and Wiegner, 2018).

## 4.2.3 Clouds

Eradiate also supports cloud modelling, under the 1D assumption, using the same framework as for aerosols. Single-scattering properties therefore have to be supplied to the model, and can be derived from microphysical properties using Mie theory for liquid water clouds. Data for ice clouds based on appropriate parametrizations can also be imported, *e.g.* from libRadtran. 3D clouds are not supported by this release, but their addition is planned in a future version.

## 4.3 Illumination

*Top of atmosphere irradiance spectrum.* Several irradiance spectra are provided (Thuillier et al., 2003; Woods et al., 2009; Haberreiter et al., 2017; Meftah et al., 2018) and normalized to 1 AU, with the CEOS-endorsed TSIS-1 spectrum (Coddington et al., 2021) as the default. For more accurate radiance simulations, irradiance values can be scaled to account, *e.g.*, for seasonal variations due to the eccentricity of the Earth's orbit around the Sun. The irradiance spectrum class accepts user-defined input in the documented format.

*Illumination model.* Two illumination models are provided: a perfectly directional model, where the angular distribution is a delta Dirac distribution, and a finite-aperture illumination model characterized by the angular size of the emitter. Both assume that the emitter (the Sun) is located at an infinite distance from the Earth and are parametrized by the local zenith and azimuth angles and the selected irradiance spectrum.

<sup>1</sup>The  $0.1\text{ nm}$ -resolution database only covers the  $[250, 2550]\text{ nm}$  interval.



## 5 Sensors and measurements

Most sensors implemented by Eradiate can be positioned arbitrarily in the scene. It is therefore possible to simulate measurements at the top of the atmosphere (*e.g.* to model a satellite), at the bottom of the atmosphere (ground level, *e.g.* to model a camera or a sun photometer), or anywhere in between (*e.g.* to model an airborne radiometer).

### 315 5.1 Fundamental radiometric quantities (radiance, fluxes)

Eradiate provides several sensors that offer interfaces to sample radiance at the aforementioned locations, varying the pixel count, angular coverage or spatial sampling—depending on what is most appropriate for the targeted application.

A simple *radiancemeter* allows to record radiance in a single direction from an arbitrary position in the scene. The interface allows to define several such sensors (positioned at different locations and pointing to different directions) that will be processed  
320 in parallel.

Another variant targets a specific location in the scene from a distant location. This *distant radiancemeter* also exists in several versions, which have various angular parametrizations (discrete or continuous). The distance between the target location and ray origins can be adjusted, up to infinity, making this sensor family a very flexible tool for computing various kinds of radiance estimates.

325 A special variant of the distant radiancemeter records the incident flux at a target location with respect to a reference surface and can, in practice, be used to compute the directional or total flux reflected by a surface.

Finally, a perspective camera sensor can be used as a more traditional interface to generate images. It implements a pinhole camera model with a configurable field of view.


These fundamental radiometric quantities can be combined to simulate more complex measurements. Section 8 provides a  
330 few examples that use one or multiple sensors.

### 5.2 Spectral response

All sensors can be assigned a spectral response function (SRF). Two main spectral response types are available:

- The *delta* spectral response selects one or several wavelengths in the spectrum at which Eradiate performs radiometric computations. In monochromatic modes, the exact wavelength is processed; in CKD modes, the CKD bin that includes  
335 the selected wavelength is processed. Results obtained with a delta SRF are not applied spectral weighting (a.k.a. *convolution*).
- The *band* spectral response applies an instrument spectral response function. Eradiate performs radiometric computations on the spectral domain covered by the SRF data, and outputs both the raw radiometric output, and the SRF-weighted radiometric quantities.

340 Eradiate ships with a library of band SRF data, and the documented xarray dataset format allows users to easily add their own.



**Figure 6.** Architectural overview of Eradiate. The user-facing Python interface wraps a modified version of Mitsuba, our radiometric kernel, through its Python interface. The Python interface exposes library components written in C++ through extensive bindings. Mitsuba plugins, written in C++ or Python, implement kernel-level models and algorithms.

## 6 Architecture and design

Eradiate is written in the Python 3 and C++17 languages. It consists of a high-performance radiometric kernel driven by an interface layer. The radiometric kernel uses low-level abstractions to run simulations; the interface layer exposes higher-level abstractions to the user, builds and runs simulations, then collects the results and packages them in a convenient format (see

345 Fig. 6).

### 6.1 Radiometric kernel: Mitsuba 3

Eradiate’s radiometric kernel is a modified version of Mitsuba 3 (Jakob et al., 2022a), a research-oriented rendering system written in C++ and Python. Its architecture shares similarities with that of PBRT (Pharr et al., 2023), which simplifies the learning curve despite the large number of advanced features it implements. Using an existing open-source renderer as the  
 350 radiometric kernel, instead of writing a dedicated piece of software, dramatically reduces the amount of work required on foundational infrastructure (*e.g.* ray-shape intersections, optical property representation, MCRT algorithm implementation). Mitsuba is built by trained computer scientists on the basis of proven architecture and takes advantage of utility libraries that ensure excellent performance. Its community of users and contributors helps to detect and solve issues and provide software usage examples.

355 Mitsuba is a *retargetable* system: its codebase is written with C++ template metaprogramming, which allows performing compile-time code transformation varying fundamental aspects of the renderer. This notably includes varying colour representation (*e.g.* monochromatic, RGB or spectral), accounting for polarization and changing floating point number precision. The renderer is built on top of the Dr.Jit just-in-time compilation library (Jakob et al., 2022b), which provides various computational backends targeting CPU or GPU hardware, also selectable through template metaprogramming. Each combination of template  
 360 parameters is called a *variant*; compiled variants are defined at the beginning of the build process, and the active variant is selected at runtime. Eradiate takes advantage of this aspect of Mitsuba which greatly reduces the amount of code to maintain.



For example, our polarized reflection and scattering algorithms are all implemented as variants of an unpolarized baseline in a unified codebase.

Mitsuba has a modular architecture: a core library provides basic infrastructure and interfaces, and the implementation of most of the algorithms involved in the MCRT process is contained in *plugins* dynamically loaded at runtime. Core library components and interfaces are generally stable and rarely require deep changes: thus, the API changes made in Eradiate’s modified version of Mitsuba are carefully pondered to reduce the overhead when integrating upstream updates, which happen frequently due to Mitsuba’s research software status. On the other hand, Eradiate’s kernel contains a lot of plugin code that complements Mitsuba’s shipped plugins with remote sensing-oriented components that implement specialized algorithms and models.

Mitsuba provides a set of fine-grained Python bindings which grant full access to most of the components of the renderer. The completeness of this Python interface was decisive when selecting the renderer to use as our radiometric kernel: the radiometric kernel can be entirely controlled in the language used to implement the interface layer.


## 6.2 Basic concepts

Mitsuba’s variant selection system propagates to Eradiate in the form of *operational modes*. The active operational mode is selected globally and defines how the spectral dimension is handled (monochromatic or CKD), and whether polarization is accounted for. Eradiate currently operates entirely in double-precision to accommodate easily the potentially huge characteristic length scale differences there can be between the largest (a planet and its atmosphere) and smallest (a tree leaf or grass blade) objects in the simulation. Each mode is identified by a single keyword (e.g. `mono` or `ckd_polarized`).

Eradiate defines simulations using objects called *experiments* and formalized by the `Experiment` interface. An experiment class automates the assembly of a *scene* which consists of geometric primitives, surface and volume scattering properties, illumination and measure models, and an RTE integration algorithm, referred to as *scene elements* in the following.<sup>2</sup> The `Experiment` base type is subclassed to provide an interface that has a scope limited to a specific type of problem.

Experiment initialization does not trigger the simulation: the experiment object is created by the user and only holds a configuration until the `eradiate.run()` function is called. At this point, the scene assembly process is triggered, the experiment is translated into a *kernel dictionary*—the input to the Mitsuba radiometric kernel—depending on the active operational mode, and a Mitsuba scene object is instantiated. Eradiate then takes advantage of Mitsuba’s scene update system: a Mitsuba scene object exposes *scene parameters* that can be dynamically updated while maintaining scene state consistency. In particular, the spectral properties of objects can be changed without triggering a full scene reload. Eradiate leverages this to run a sequence of monochromatic simulations in a so-called *spectral loop*. Each iteration of the spectral loop produces monochromatic output data held by a Mitsuba bitmap object. Collected bitmaps are aggregated into an `xarray` (Hoyer and Hamman, 2017) data structure (Fig. 7).

<sup>2</sup>The concept of a scene is more general than just physical objects (shapes and their attached optical properties): it includes all the components used for the radiative simulation, including the surface and atmosphere objects, but also the illumination, sensor and Monte Carlo integration. This wording is more similar to the vocabulary used in the computer graphics community.

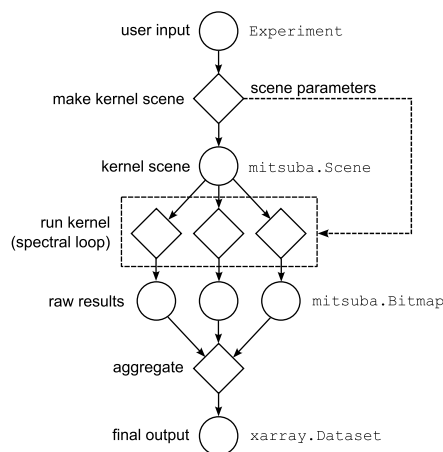

**Figure 7.** Eradiate’s processing pipeline pre-processes user input, issued as an `Experiment` object, and generates a kernel scene dictionary, itself turned into a Mitsuba `Scene` object. The Mitsuba renderer is called repeatedly in a sequence where each iteration corresponds to a point in Eradiate’s spectral discretization. The resulting raw output is then post-processed and formatted as an `xarray` dataset.

### 6.3 Scene assembly

*Simple interface.* Eradiate’s scene assembly process is centred around scene elements. They can represent geometric primitives, optical properties, illumination conditions, measures or MCRT algorithms. Various interface classes are defined, then implemented by concrete classes. They are generally independent of each other, acting as wrappers around one or several Mitsuba plugins. Coupling between scene elements generally occurs on an `Experiment`-dependent basis. For instance, a measure’s target area may be constrained by the geometry of the problem: the `Experiment` object will then take care of making sure that the geometry and measure definitions are compatible with each other, and either automatically correct the configuration, warn the user or fail (*i.e.* raise an exception).

Scene assembly components are categorized thematically. Each general scene element class is embodied by an interface (see Table 1), itself implemented by various concrete classes. Although combining scene elements arbitrarily is conceptually possible, their assembly is constrained by their parent `Experiment`. For instance, a user will not be allowed to add multiple molecular atmospheric components at the same time.

*Expert interface.* Simulations of complex scenes are generally out of the scope of the constrained simple interface defined by `Experiment` classes. For such situations, Eradiate offers the possibility to users to define their input using low-level Mitsuba primitives directly. When inserting such objects, users must pay attention to scene consistency themselves, but are in exchange free to do anything the radiometric kernel allows. The *expert interface* extends the baseline `Experiment` interface with two kinds of input:

- Mitsuba scene input, either in the form of full or partial kernel dictionaries, or fully initialized Mitsuba objects;
- *scene parameters*, which describe how Mitsuba scene parameters are updated at each iteration of the spectral loop.



**Table 1.** List of Eradiate’s main `SceneElement` interfaces.

| Name          | Description                                                            |
|---------------|------------------------------------------------------------------------|
| Atmosphere    | Combined atmosphere geometric primitives and optical properties.       |
| BSDF          | Thin interface to BSDF plugins.                                        |
| Canopy        | Combined canopy geometric primitives and optical properties.           |
| Illumination  | Combined illumination spatial, directional and spectral distributions. |
| PhaseFunction | Thin interface to PhaseFunction plugins.                               |
| Shape         | Thin interface to Shape plugins.                                       |
| Spectrum      | Spectrally dependent quantities.                                       |
| Surface       | Combined surface geometric primitives and optical properties.          |

A scene parameter definition includes:

- the parameter update protocol in the form of a callable that takes as input spectral loop contextual data;
- additional metadata used to associate the update protocol with a node in the Mitsuba scene parameter tree.

415 This infrastructure is what powers internally the simple interface and allows power users to use all Mitsuba plugins in their customized setup, including those which are not exposed by any Eradiate scene element. User kernel dictionary and scene parameter definitions are merged with the ones generated by the simple interface upon experiment initialization.

Appendix C elaborates on Eradiate’s user interface and provides examples of simple and expert interface scripting.

## 7 Validation and benchmarking

420 As mentioned earlier, Eradiate is intended to provide a highly accurate simulation framework suitable for cal/val applications and is validated against both analytical test cases, community-approved benchmarking results and actual measurements.

### 7.1 Analytical solutions and unit testing

425 The first validation stage consists in checking Eradiate’s output against known analytical solutions. While full radiative transfer simulation scenarios are generally too complex to derive an analytical solution, many components in the software package can be validated individually. This notably includes the evaluation and sampling routines of most scattering models, as well as the scene assembly process. These tests are implemented as part of Eradiate’s unit testing framework, based on pytest (Krekel et al., 2004), which is run frequently on the development branch to detect regressions.

### 7.2 RAMI benchmark series

430 *RAMI Online Model Checker (ROMC)*. Eradiate’s canopy simulation features are validated against scenarios defined for the ROMC tool<sup>3</sup> (Widlowski et al., 2008). It provides a framework for autonomous canopy RTM benchmarking based on scenar-

<sup>3</sup><https://romc.jrc.ec.europa.eu/>



ios developed during the first three phases of the Radiative transfer Model Intercomparison (RAMI) (Pinty et al., 2001, 2004; Widlowski et al., 2007). Users can submit simulation results for various measurements: top of canopy (TOC) bidirectional reflectance factor (BRF) (full contribution, as well as partial contributions accounting for various orders of scattering or ignoring reflection by specific objects in the scene), fraction of radiation absorbed by foliage, albedo and flux transmitted through the canopy. ROMC submissions can be done in two modes: the DEBUG mode allows repeated submissions on many scenes and reveals to the user a reference against which they can compare and adjust; the VALIDATE mode allows only one submission on a restricted set of randomly chosen scenes different from those available in DEBUG mode, and provides no “ground truth” for comparison.

Eradiate was used to simulate the BRF in the principal and orthogonal planes.<sup>4</sup> The full, single- and multiple-scattering contributions were computed. Periodic boundary conditions were simulated by padding the unit cell with instances of itself. The number of padding rows required to converge to a quasi-periodic setup depends on the scene. For the tested scenes, a padding value of 20 was appropriate. Various submissions were done in DEBUG mode, presented in Appendix A. A VALIDATE mode run was also performed, with results shown in Table 2. The skill score (as defined by Widlowski et al. (2008)) on the submitted measurements is generally high (99 % or higher). The only exception is the `brfpp_mlt` measurement (multiple scattering in the principal plane) which is computed from three combined Monte Carlo estimators and thus accumulates variance: this results in increased noise, particularly visible when the expected value is low (all scenarios except `HET41_DIS_ERE_NIR_30`), and degrades the skill score. This measurement is however correct when the expected value takes more significant values (see the `HET41_DIS_ERE_NIR_30` scenario). Lower variance could be achieved by implementing an integrator that returns this measurement directly.

From this, we conclude that Eradiate performs well on a variety of discrete scenes to compute radiance estimates. Remaining issues are attributed to operator mistakes, *i.e.* incorrect scene or measure setup.

*Other RAMI phases.* In addition to the permanently open ROMC, Eradiate was used to contribute to the RAMI-V and RAMI4ATM phases. RAMI-V (Lanconelli et al., 2025) further increases the complexity of canopy-centric benchmarking scenarios, with multiple scenes derived from actual canopies. At that time, Eradiate’s canopy simulation features were in an early development stage and the submission was partial, focusing on a single scene and reflectance measures. The submitted results were within good agreement with other well-established MCRT models such as DART or LESS.

The RAMI4ATM phase (Joint Research Centre, 2025), in progress at the time of writing, focuses on benchmarking RTMs targeting 1D atmospheric simulation. Eradiate’s coverage for that phase is much more extensive.



















*Relationship with unit testing.* A few scenarios derived from the RAMI scenario pool were turned into regression tests and are executed as part of Eradiate’s regular unit test suite using a statistical testing framework, mitigating the risk of regression without the need to run complete benchmarks.

---

<sup>4</sup>The principal plane is the set of directions in a plane generated by the Sun direction and the local vertical. The orthogonal plane is the plane perpendicular to the principal plane.



**Table 2.** Eradiate ROMC submissions (model name: `eradiatev100`) in **VALIDATE** mode. Visuals are representative of the mentioned scenes, but not accurate renders of the particular simulated variants (*e.g.* the **HET01** and **HET41** scenes feature different numbers of spherical leaf clouds).

| Measurement →<br>↓ Scene                                                                                    |  | brfpp                                                                               | brfpp_uc_sgl                                                                        | brfpp_mlt                                                                            | brfop                                                                                 |
|-------------------------------------------------------------------------------------------------------------|--|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| HOM11_DIS_PLA_RED_00<br>  |  |    |    |    |    |
|                                                                                                             |  |   |   |   |   |
| HOM12_DIS_ERE_RED_60                                                                                        |  |  |  |  |  |
|                                                                                                             |  |  |  |  |  |
| HET01_DIS_UNI_RED_60<br> |  |                                                                                     |                                                                                     |                                                                                      |                                                                                       |
| HET41_DIS_ERE_NIR_30                                                                                        |  |                                                                                     |                                                                                     |                                                                                      |                                                                                       |
| Skill                                                                                                       |  | 99.395                                                                              | 99.594                                                                              | 70.721                                                                               | 99.558                                                                                |



**Table 3.** Relative root mean square differences in per cent between Eradiate and MYSTIC for 1D IPRT cases published in Emde et al. (2015).

|   | A – single-layer |           |           |       |       |       |         |       |       | B – multi-layer |       |       |         |
|---|------------------|-----------|-----------|-------|-------|-------|---------|-------|-------|-----------------|-------|-------|---------|
|   | A1 case 0        | A1 case 1 | A1 case 2 | A2    | A3    | A4    | A5 ap   | A5 pp | A6    | B1              | B2    | B3    | B4      |
| I | 0.028            | 0.027     | 0.027     | 0.016 | 0.038 | 0.025 | 0.244   | 0.192 | 0.073 | 0.034           | 0.027 | 0.030 | 0.508   |
| Q | 0.035            | 0.045     | 0.045     | 0.072 | 0.053 | 0.078 | 3.168   | 2.459 | 0.100 | 0.057           | 0.065 | 0.078 | 4.358   |
| U | –                | 0.042     | 0.041     | 0.047 | 0.046 | 0.092 | 4.043   | –     | 0.177 | 0.041           | 0.053 | 0.076 | 4.218   |
| V | –                | –         | –         | –     | 0.629 | 3.055 | 120.407 | –     | –     | –               | –     | 3.530 | 204.452 |

### 7.3 IPRT benchmark series


In order to validate Eradiate for polarimetric simulations including scattering from molecules, aerosol particles and cloud droplets in the Earth atmosphere, we compared against comprehensive benchmark results established by the International Working Group on Polarized Radiative Transfer IPRT (Emde et al., 2015). The first phase of IPRT includes 1D setups for clear atmospheres, for cloud and aerosol scattering, as well as for surface reflection. The benchmark results were established by intercomparison of six participating independently developed radiative transfer codes.

Fig. 8 shows the Eradiate results for case B3 as an example. This case is for a standard atmosphere described by 30 layers and includes a standard aerosol profile with a vertical optical thickness of 0.2. The wavelength is 350 nm, in the UV, including strong Rayleigh scattering and also absorption by ozone. The figure can directly be compared to Fig. 8 in Emde et al. (2015). It should be noted that Eradiate simulates the complete Stokes vector, the linear polarization as expressed by  $Q$  and  $U$ , and also the circular polarization expressed by  $V$ , which is about 3-4 orders of magnitude smaller than the linear polarization. The circular polarization is caused by scattering from aspherical aerosol particles. The intensity  $I$  at the bottom of the atmosphere shows the sharp forward scattering peak into the direction of the sun. The pattern of the degree of polarization is dominated by Rayleigh scattering; its maximum is seen at scattering angles around  $90^\circ$ .

Table 3 shows the relative root mean square differences between Eradiate and MYSTIC (corresponding to Tables 3 and 4 in Emde et al. (2015)). All cases except A5 were run with  $10^8$  samples, for A5 including the cloud layer  $10^7$  samples were used. Overall, we find a very good agreement with relative root mean square differences below 0.1 % for intensity and linear polarization. Larger differences are found for cases including clouds because less samples were run due to the high computational time caused by enhanced multiple scattering in clouds. Moreover, Eradiate does not include sophisticated variance reductions for cloud scattering so far. Nevertheless, for the intensity, the relative root mean square difference is still smaller than 0.5 %, and larger for the polarization because  $Q$ ,  $U$  and  $V$  are very small for the cloud case. The differences are comparable to those of TROPOS, a Monte Carlo code without specific variance reduction methods for cloud scattering.

### 7.4 Comparison against experimental measurements

In addition to validation against analytical references and other trusted RTMs, Eradiate was compared to experimental measurements.

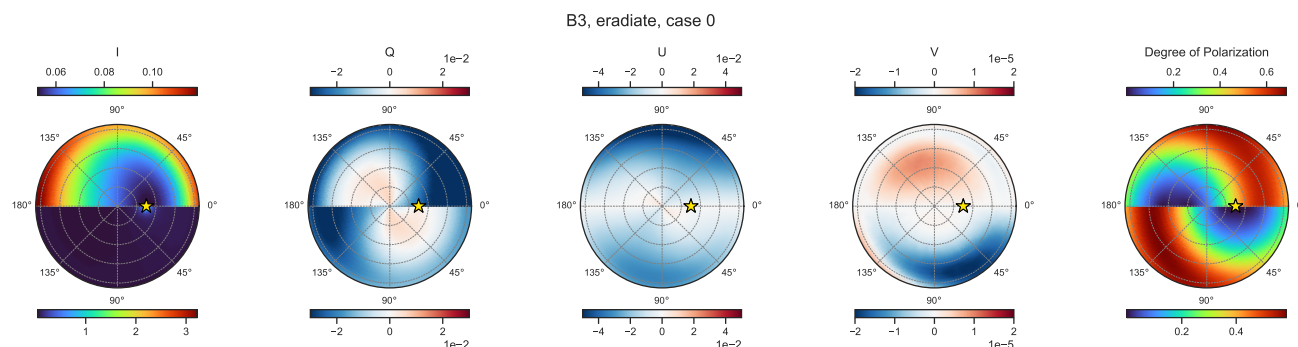

**Figure 8.** Simulated radiance field (Stokes components and degree of polarization) at 350 nm for a standard atmosphere and vertically inhomogeneous aerosols with an optical thickness of 0.2. The upper part of the figures represents the radiance field at the top of the atmosphere for down-looking directions, and the bottom part is for up-looking directions at the surface.


A validation exercise was conducted against SI-traceable reflectance measurements on an well-characterized artificial target (Leroy et al., 2025a). The target was measured optically with an SI-traceable spectro-goniophotometer, and the experiment was digitally replicated with Eradiate using as much information as possible from the experimental setup. The collected radiometric records, as well as the corresponding simulations, were attached uncertainty that allowed for comparison following metrological guidelines. The simulated reflectance values were found to agree with the experimental records within 2 % in most cases. Given the unbiased nature of Eradiate’s MCRT methods, the error is mostly attributable to the accuracy of input data, in a broad sense (*e.g.* the selected surface scattering model and its parameters, the 3D model’s geometric description, or the light source and sensor models). That exercise gave an order of magnitude of the accuracy that can be expected from a simulation in a highly controlled setup without volumetric scattering.

Eradiate was also used to produce a hyperspectral radiometric calibration reference for satellite-borne instruments (Luffarelli et al., 2025). In that study, volumetric scattering plays an important role and, although the selected calibration targets are very stable desert PICS, their optical characterization is very challenging. The simulation setup (notably relying on a spherical-shell geometry and detailed atmospheric molecular profiles sourced from CAMS) allowed to consistently reproduce measurements from various multispectral and hyperspectral instruments with an accuracy of 3 % or better in spectral regions where the atmospheric molecular transmittance is higher than 0.8, showing the suitability of Eradiate for that type of use case.

## 8 Applications and results

In this section, we demonstrate some of Eradiate’s capabilities with simple examples pertaining to actual 1D and 3D use cases. Most of these examples are available as reproducible Jupyter notebooks shared in a companion repository.<sup>5</sup>

<sup>5</sup><https://github.com/rayference/paper-eradiate-v100>

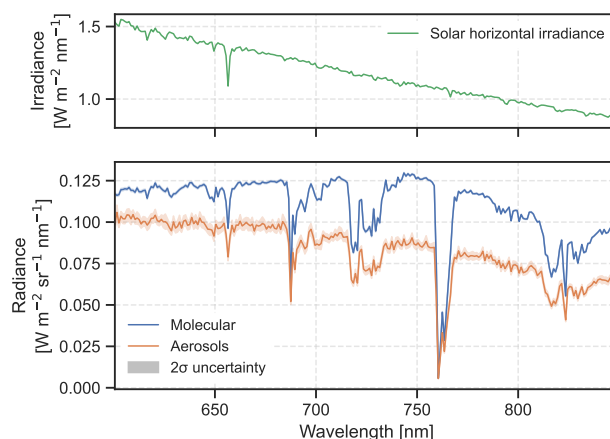

**Figure 9.** Top: Solar horizontal irradiance spectrum (which factors in the solar zenith angle). Bottom: Reflected radiance spectrum using the *panellus* absorption parametrization with a spectral resolution of 1 nm.

## 505 8.1 1D simulation

### 8.1.1 Calculation of radiance spectrum at top of atmosphere

To simulate hyperspectral satellite observations, we employ the correlated- $k$  distribution *panellus* to generate spectra at a resolution of 1 nm. The example notebook<sup>6</sup> illustrates how to set up such a simulation using the US Standard Atmosphere together with representative continental aerosol particles. For the lower boundary condition, we apply a spectrally dependent  
 510 Lambertian surface albedo representative of a desert environment, extracted from the HAMSTER database (Roccetti et al., 2024).


Fig. 9 presents the resulting TOA radiance spectrum for a viewing geometry defined by a zenith angle of 60° and an azimuth angle of 75°. The corresponding solar zenith and azimuth angles are 30° and 160°, respectively. The simulated spectrum clearly reveals the oxygen A and B absorption bands, centred near 760 nm and 686 nm, respectively. The TSIS-1 solar irradiance  
 515 spectrum (Coddington et al., 2021) is used.

### 8.1.2 Sun photometer

AERONET (AErosol RObotic NETwork) (Holben et al., 1998) is a global network of ground-based sun photometers designed to measure aerosol optical properties. These instruments record direct solar irradiance and polarized sky radiances at multiple wavelengths across the visible and near-infrared spectral range. The example notebook<sup>7</sup> demonstrates how Eradiate can be used  
 520 to simulate such observations for an atmosphere containing an aerosol layer with an optical thickness of 0.5. The simulation is performed at the centre wavelengths of a typical sun photometer.

<sup>6</sup>hyperspectral\_radiance\_toa.ipynb

<sup>7</sup>sunphotometer.ipynb

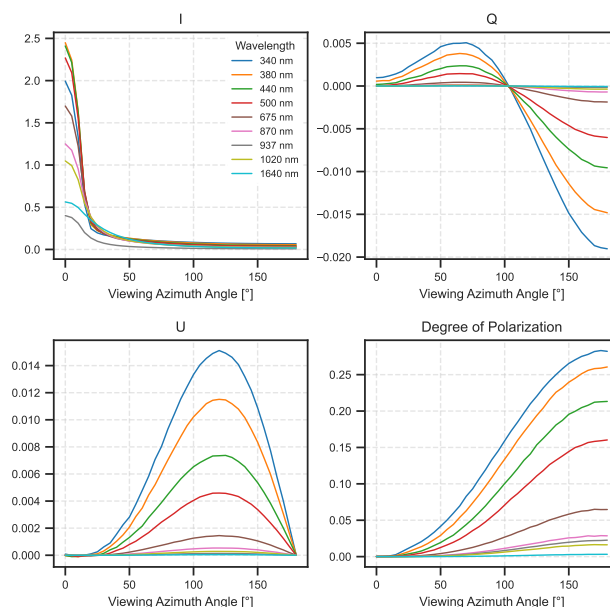

**Figure 10.** Simulation of radiance at the ground in the solar almucantar plane. The solar zenith angle is  $30^\circ$ , the surface albedo is 0.05 and the AOT is 0.5.

Fig. 10 shows the results of a simulated almucantar scan. In this example, polarization effects are included, and the figure displays the total intensity  $I$ , the Stokes parameters  $Q$  and  $U$ , and the degree of polarization. The intensity peaks near the solar direction due to the strong forward scattering by aerosol particles. The degree of polarization decreases with increasing wavelength, reflecting the decrease of Rayleigh scattering, which is the dominant source of polarization.

### 8.1.3 Spherical geometry


Eradiate supports simulations in fully spherical geometry. This implementation has been validated against benchmark results published by Korkin et al. (2022). While spherical geometry is essential for limb or twilight observations, it is also critical for radiance simulations of polar-orbiting satellites, where neglecting atmospheric sphericity can introduce significant errors.

The example notebook<sup>8</sup> demonstrates this effect. We include the US Standard atmosphere and compute TOA radiances for a solar zenith angle of  $60^\circ$  in both plane-parallel and fully spherical geometry. Fig. 11 presents the resulting radiances, normalized to the incident solar irradiance. The comparison shows that plane-parallel geometry substantially underestimates radiances at viewing zenith angles exceeding about  $50^\circ$ .


### 8.1.4 Reflectance calculations

Eradiate can be used to compute reflectance quantities useful for EO applications. We follow the standard nomenclature established by (Nicodemus et al., 1977) in the following. It should be noted that Eradiate computes only radiances, fluxes and

<sup>8</sup>spherical\_vs\_plane\_parallel.ipynb

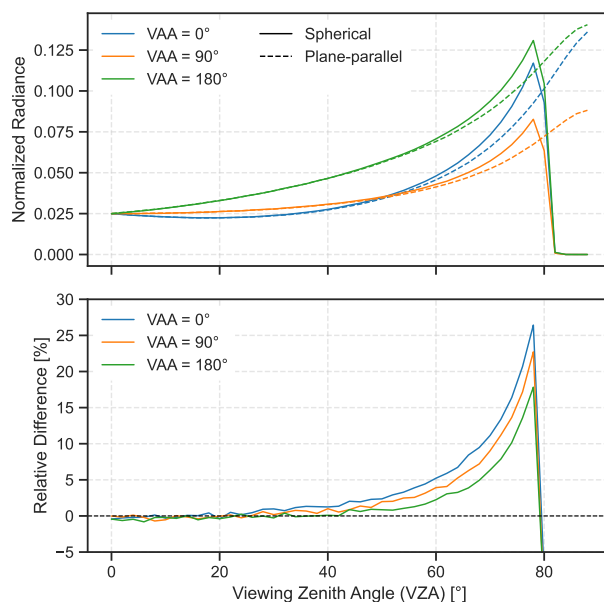

**Figure 11.** Comparison between spherical and plane-parallel geometry for a sensor at the top of the atmosphere. The solid lines show the results for spherical geometry, and the dashed lines those for plane-parallel geometry. The solar zenith angle is set to  $60^\circ$ .

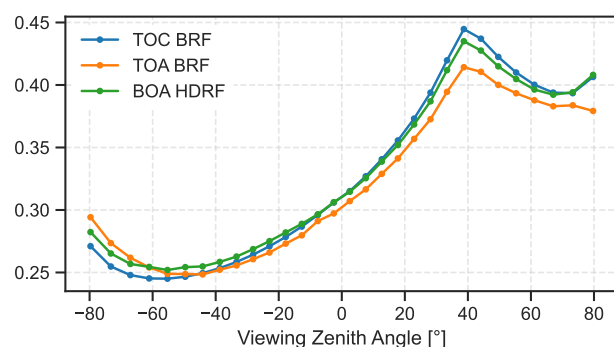


**Figure 12.** The TOA BRF, bottom of atmosphere (BOA) hemispherical directional reflectance factor (HDRF) and TOC BRF for a retro-reflective RPV surface illuminated with a solar zenith angle of  $38^\circ$ . In the scenarios that include an atmosphere, a clear-sky AFGL 1986 (US Standard) profile is used. The values shown are computed using Eradiate in monochromatic at 550 nm.

powers, which means that reflectance quantities emerge after processing simulation results in a way similar to what would be done with experimental data: accessing some of the terms defined by (Nicodemus et al., 1977) may require a specific simulation setup or an indirect computation.

540 The example notebook<sup>9</sup> provided in the companion repository demonstrates how to compute (Fig. 12):

<sup>9</sup>reflectance.ipynb

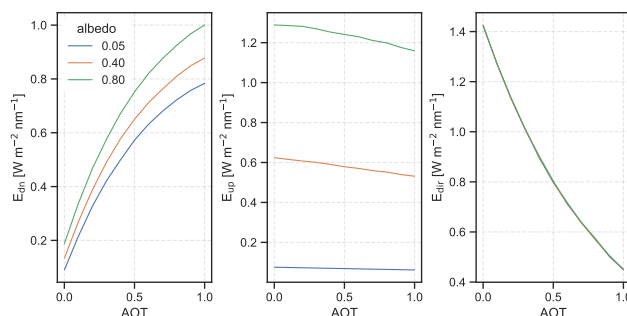

**Figure 13.** Simulated surface irradiances as functions of AOT and surface albedo. Shown are (left) diffuse downwelling irradiance  $E_{dn}$ , (middle) diffuse upwelling irradiance  $E_{up}$ , and (right) direct downwelling irradiance  $E_{dir}$ .

- the “top of canopy” BRF, obtained by computing the reflected radiance over a surface with no atmosphere, at the surface level;
- the “top of atmosphere” BRF, obtained by computing the reflected radiance over a surface with an atmosphere, at the TOA level;
- the “bottom of atmosphere” HDRF, obtained by combining the reflected radiance and incident radiant flux over a surface with an atmosphere, at the surface level.

Schunke et al. (2023) apply this to quantify the error made when retrieving the TOC BRF using drone-recorded HDRF values.


### 8.1.5 Irradiance calculation

Irradiance is defined as the electromagnetic energy incident on a surface per unit time and per unit area. In Eradiate, irradiance can be computed using the *distant\_flux* measure.

The example notebook<sup>10</sup> illustrates the simulation of diffuse and direct downwelling irradiances at the surface, as well as the upwelling irradiance reflected by the surface. The setup includes the US Standard atmosphere and a desert aerosol model (*govaerts\_2021\_desert*). Irradiances are evaluated for varying AOTs and surface albedos.

Fig. 13 shows the expected behaviour: as the AOT increases, more radiation is scattered within the atmosphere. This enhances the diffuse irradiance while reducing the direct irradiance. Increasing the surface albedo primarily raises the upwelling irradiance and, to some extent, the diffuse downwelling irradiance, since part of the reflected radiation is redirected back towards the surface. The direct irradiance, by contrast, represents unscattered radiation reaching the surface and is therefore unaffected by surface albedo.

<sup>10</sup>[irradiance\\_aot.ipynb](#)

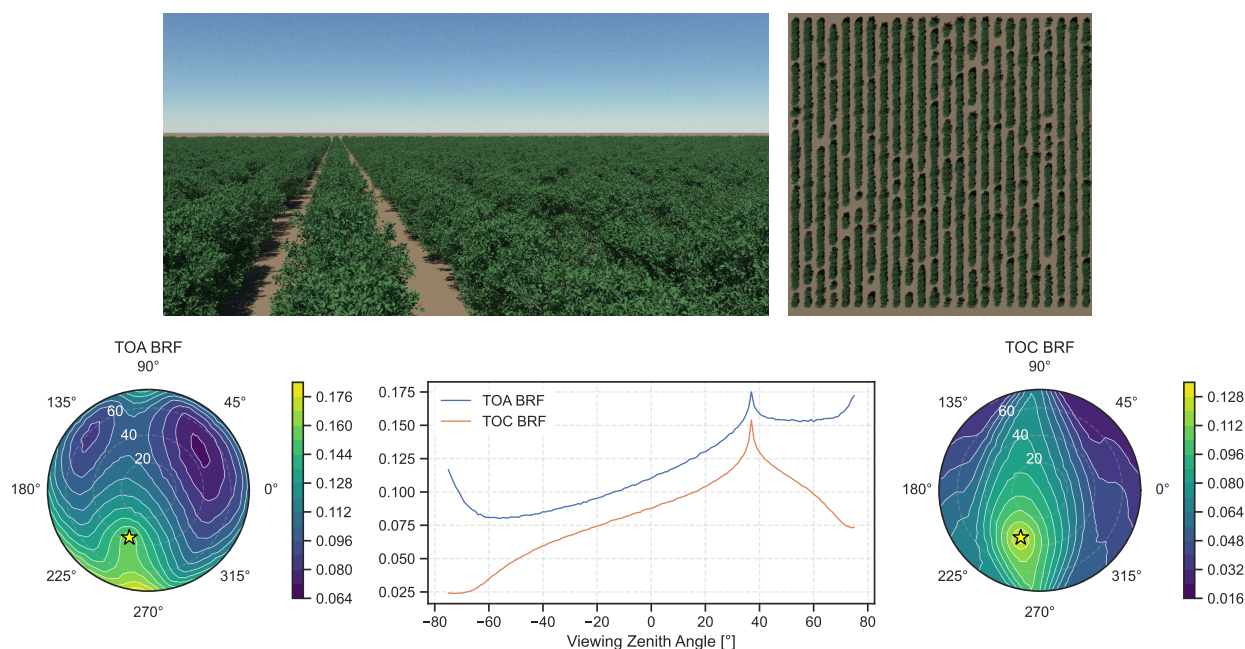

**Figure 14.** An example of output achievable with Eradiate’s RAMI canopy loader. The scene is the Wellington Citrus Orchard (Stuckens et al., 2009; Somers et al., 2009). Top row: A perspective camera view of the scene (left), and a nadir-looking render of the unit cell (right). Bottom row: TOA (left) and TOC (right) reflectance of the Wellington Citrus Orchard scene. Both in the principal plane (centre). The TOA setup includes a clear-sky atmosphere (AFGL 1986 US Standard profile). The highly directional features of the scene result in strong anisotropy in the canopy’s reflective pattern.

## 8.2 3D simulation

560 This series of examples showcase Eradiate’s 3D surface simulation features with gradually increasing complexity in terms of required knowledge of Eradiate’s expert interface.

### 8.2.1 Vegetated canopies from RAMI-V


565 This example shows how to use the automatic RAMI canopy loader, with or without padding the canopy with clones of itself, and with default or customized optical properties. The example notebook<sup>11</sup> mainly uses perspective cameras for educational purposes, but the resulting scenes can be used readily to compute other quantities such as the ones defined in Section 8.1.4 (see Fig. 14). This setup is used to create Fig. 3.

### 8.2.2 Algeria-5 pseudo-invariant calibration site

This example<sup>12</sup> demonstrates a relatively simple use case of Eradiate’s expert interface. It combines a spherical-shell background atmosphere (AFGL 1986 US Standard molecular atmosphere and an aerosol layer with an exponential vertical density

<sup>11</sup>canopies.ipynb

<sup>12</sup>algeria\_5.ipynb

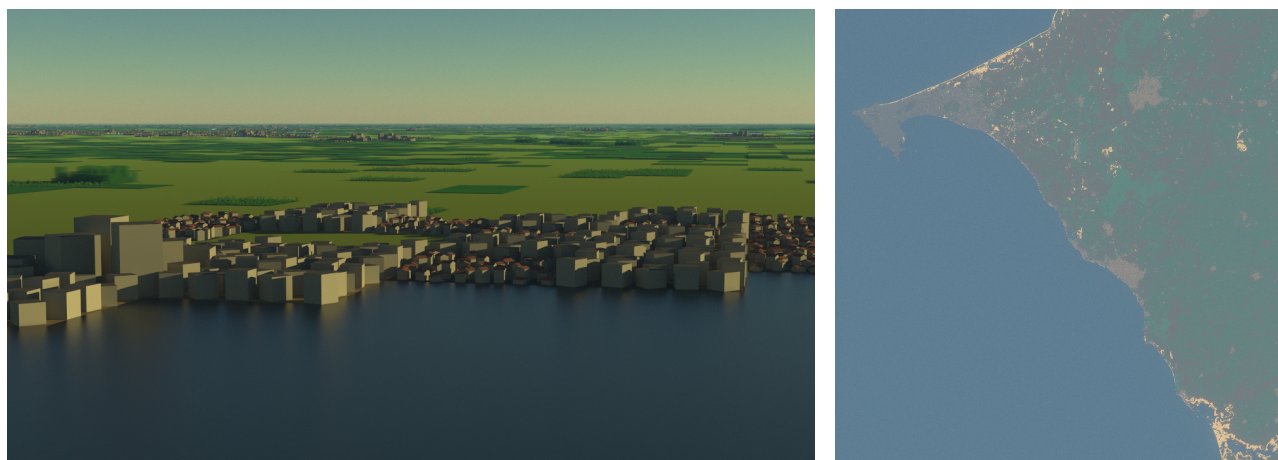

**Figure 15.** This synthetic scene is modelled after 100 km-wide area near the city of Dakar and created with a scene generator that leverages land cover information to select materials and clone instances of urban and vegetation 3D tiles. Except for the illumination angle, the RGB render (left) and the nadir-looking ortho-image (right) use identical scene input (land cover, a plane-parallel atmosphere with an AFGL 1986 US Standard profile and an aerosol layer with exponential density). The simulated pixel size of the ortho-image is 1 km, and the land cover tile size is 100 m.

570 distribution) with a triangulated DEM of the Algeria-5 PICS integrated directly as a Mitsuba primitive. This setup is used to create Fig. 2.

### 8.2.3 Sunset on Dakar

This last example is derived from a study in which a scene generator was implemented on top of the expert interface to create synthetic scenes derived from actual locations on Earth. This scene exploits instancing and land cover-based material  
 575 dispatching (see also Section 4.1.3). The output (see Fig. 15) shows an example of a coastal area near the city of Dakar, with both an *in situ* render and a synthetic satellite image. A similar setup is used to create Fig. 5.

## 9 Conclusions and outlook

Eradiate builds on the history of radiative transfer simulation software for EO and incorporates modelling and technical advances made in other scientific fields, in particular computer graphics. The Mitsuba 3 renderer, integrated as our radiometric  
 580 kernel, drastically simplifies the development of additional components, allows for providing a convenient Python-based interface and provides promising opportunities for future iterations of the model thanks to its retargetable architecture.

Eradiate v1.0.0 focuses on providing advanced surface modelling and 1D atmospheric modelling to meet the accuracy requirements for the vicarious calibration of modern instruments. The development roadmap includes the addition of 3D atmospheric scattering, as well as cloud-focused variance reduction techniques and optimizations to improve the efficiency  
 585 of the MCRT algorithm. Extensions to the thermal infrared and microwave domains are planned. Finally, the simulation of



volumetric scattering in aquatic bodies is foreseen. Continued validation, through regression detection against prior validated solutions, as well as benchmark participation, is planned.

Eradiate is intended to be both an easy entry point for radiative transfer beginners, a powerful tool allowing experts to build simulations with total freedom, and a sandbox for developers willing to experiment with new models, algorithms or scene setups, as illustrated by the examples shown in this paper. It hopefully contributes to making radiative transfer simulation software more comprehensive and accessible.

*Code and data availability.* The latest version of Eradiate is available from the project GitHub repository (<https://github.com/eradiate/eradiate>) under the GNU Lesser General Public License (LGPLv3). The exact version of the model used to produce the results used in this paper is archived on Zenodo under <https://doi.org/10.5281/zenodo.17226380> (Leroy et al., 2025b). The additional code and data used to run the model and produce the plots for all the simulations presented in this paper are available from a dedicated companion repository at <https://github.com/rayference/paper-eradiate-v100>.

## Appendix A: ROMC results examples in DEBUG mode

ROMC's DEBUG mode offers a broader scene variety than the VALIDATE mode and is an excellent testing sandbox for RTM development. Although the results submitted in this mode cannot be used to make claims on RTM performance, we show examples in Table A1 to illustrate the variety of surfaces that can be simulated with Eradiate.







## Appendix B: General requirements





This appendix reviews the broad requirements which drive Eradiate's design. This is not a detailed requirement list, but it motivates some of the architectural and technological choices and numerical method selection decisions mentioned throughout this paper.

*High accuracy.* Eradiate primarily targets cal/val applications, with the ambition of eventually simulating satellite images with an accuracy better than 1 %, as mentioned in Section 1. This goal has consequences on the requirements underlying its design:

- **Accuracy over performance.** Since accuracy is the highest priority, it must not be sacrificed for performance. This means, in particular, that when selecting models and numerical methods, the candidate meeting the best Eradiate's accuracy requirements is prioritized, even if it is not the choice optimizing computational cost. This, however, does not mean that Eradiate's performance should not be optimized.
- **3D geometry support.** High accuracy requires the support of 3D geometry to overcome the fundamental limitations of 1D models ("smooth and flat planet"). Here, 3D geometry is to be understood in a broad sense, and covers planetary

**Table A1.** Examples of ROMC submissions in DEBUG mode.

| Scene name                                  | Homogeneous discrete                                                              | Discrete floating spheres                                                          | Heterogeneous conifer forest<br>no topography                                       |
|---------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| Render                                      |  |  |  |
| Example of BRF<br>in the principal<br>plane |  |  |  |

| Scene name                                  | Heterogeneous real zoom-in                                                          | Heterogeneous birchstand                                                             |
|---------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
| Render                                      |  |  |
| Example of BRF<br>in the principal<br>plane |  |  |

curvature, terrain modelling, cloud modelling, non-uniform surface reflective properties and explicit surface geometric representation (detailed trees and buildings).

- **Monte Carlo ray tracing.** The very high scene complexity implied by the handling of 3D geometry features makes MCRT the natural method of choice to solve the RTE. MCRT can indeed deal with arbitrarily complex problems and solve them efficiently if correctly implemented. MCRT also has the big advantage of handling arbitrary length-scale complexity, making it possible, in principle, to include, in a fully coupled simulation, both centimetre- and kilometre-sized objects.



- **State-of-the-art molecular absorption.** We saw that molecular absorption modelling is a source of disagreement between RTMs and is also the cause of inaccuracies in satellite bands where it plays a significant role. Eradiate should implement state-of-the-art molecular absorption models, which starts with the ubiquitous CKD distribution method. It should be noted that the input data is as critical as the numerical method: Eradiate also has to ship high-quality atmospheric data.

*Traceability and reliability.* Traceability refers to the possibility to know where algorithms and data come from. This is an essential quality for a product meant for cal/val applications, but also for a community-oriented project. Reliability is the possibility to understand how well the software will achieve tasks executed with it. Eradiate covers these topics as follows:

- **Free and open-source software.** Eradiate is licensed under the GNU Lesser General Public License (LGPLv3) and designed as free software. Its source code is freely available and can be studied and audited.
- **Extensive algorithm and data documentation.** Eradiate ships with extensive documentation, with a user manual, tutorials and complete code reference. Data is self-documented using metadata.
- **Benchmarking.** Regular comparison exercises, based on benchmarks, are conducted. This way, we verify that the results produced by Eradiate are in line with other models in relevant situations.

*Modern technology.* This project was started with the intention of making radiative transfer modelling more accessible to users and developers.

- **Modular architecture.** Eradiate is designed in a modular way, using abstractions inspired by the architecture of the rendering software and incorporating EO idioms. This facilitates code maintenance, but also makes it possible to change parts of the model with only partial knowledge of how it works.
- **Robust testing process.** The codebase is systematically tested using pytest (Krekel et al., 2004). The test suite includes unit tests checking basic functionality, but also larger integration tests verifying that the model always performs consistently. In particular, selected benchmarking cases are used for regression testing.
- **User-friendly Python interface.** A typical scientific workflow often involves using software through an interactive Python console such as a Jupyter notebook (Kluyver et al., 2016). Eradiate is designed to address such use cases well and makes it easy to define and inspect simulations, run computations, and visualize results interactively.

## Appendix C: User interface

Eradiate’s user interface relies entirely on Python programming. Various features are implemented to reduce the risk of making mistakes when configuring Eradiate, reduce user-side code boilerplate and make the user experience more enjoyable:

- **Unit handling.** Whenever relevant, numeric quantities handled by Eradiate are attached physical units using the Pint library (Grecco, 2022). This enforces dimensional consistency and guarantees unit conversion when relevant. This lets



users input their data in the set of units they are most familiar with and makes using Eradiate easier for users unfamiliar with domain-specific units. In order to avoid excessive boilerplate, unitless input is automatically converted to configurable and overridable default units.

- **Data delivery and consumption.** Eradiate comes with various data (*e.g.* absorption cross-section databases, sensor spectral response, aerosol single-scattering properties) managed by an *asset manager* which, in practice, behaves like a basic package manager with a command-line interface. When consuming data, relative filesystem paths are resolved according to a configurable list of locations, which allows relocating data without modifying any code.
- **Object attribute pre-processing.** Eradiate uses the *attrs* library (Schlawack, 2024) to implement object initialization sequences. A range of converters and validators can pre-process values used to initialize scene element objects and check if their attributes have correct values. Failed validations raise exceptions which can be tracked to the code that emitted them using the Python traceback.

*Example: Basic interface.* Algorithm C1 shows a basic configuration for a 1D atmospheric radiative transfer simulation that outputs the TOA BRF of the scene in the principal plane.

All scene elements can also be instantiated from basic Python dictionaries. An `Experiment` can therefore be initialized either using Python objects explicitly, or using a dictionary in the style of the Mitsuba dictionary-based scene specification. This input method is preferred for its conciseness. Algorithm C2 refactors algorithm C1 with this approach.

*Example: Expert interface.* Algorithm C3 shows an example of complex scene building using the expert interface. Of notable importance is the need to hint Eradiate when searching the Mitsuba scene parameters which will undergo updates during the spectral loop using the keyword arguments of the `scene_parameter()` function.

*Author contributions.* VL: Writing process lead. VL, CE, NMa, NMi, MG, SS: Eradiate development, testing, documentation and example creation. NC, FG, YG: Scientific supervision. All: Manuscript editing.

*Competing interests.* The authors declare that they have no conflict of interest.

*Acknowledgements.* We thank Yvan Nollet and Matthias Kovacic for their valuable contributions to Eradiate development. We express our gratitude to Prof. Wenzel Jakob and the Mitsuba team for their support, especially during the early times of Mitsuba 3. We thank the DART team for making their pre-processed RAMI input data available to the scientific community. We thank Dr Giulia Rocchetti for making available the 1 km resampled HAMSTER data over Gobabeb.

The development and maintenance of Eradiate are funded by the Copernicus programme through a project managed by the European Space Agency (contract no 40000127201/19/I-BG). The design phase was funded by the MetEOC-3 project (EMPIR grant 16ENV03).



## References

- 680 Anderson, G. P., Clough, S. A., Kneizys, F., Chetwynd, J. H., and Shettle, E. P.: AFGL atmospheric constituent profiles (0.120 km), 1986.  
 André, F.: The  $\ell$ -distribution method for modeling non-gray absorption in uniform and non-uniform gaseous media, *Journal of Quantitative Spectroscopy and Radiative Transfer*, 179, 19–32, <https://doi.org/10.1016/j.jqsrt.2016.02.034>, 2016.
- André, F., Cornet, C., Galtier, M., and Dubuisson, P.: Radiative transfer in the O<sub>2</sub> A-band — a fast and accurate forward model based on the  $\ell$ -distribution approach, *Journal of Quantitative Spectroscopy and Radiative Transfer*, 260, 107 470,  
 685 <https://doi.org/10.1016/j.jqsrt.2020.107470>, 2021.
- Berk, A., Conforti, P., Kennett, R., Perkins, T., Hawes, F., and van den Bosch, J.: MODTRAN6: a major upgrade of the MODTRAN radiative transfer code, *Proceedings of SPIE, the International Society for Optical Engineering/Proceedings of SPIE*, 9088, 90 880H, <https://doi.org/10.1117/12.2050433>, 2014.
- Bucciarelli, D., Wendsche, S., and Klemm, M.: LuxCoreRender/LuxCore: 2.10, <https://luxcorerender.org>, 2025.
- 690 Buehler, S. A., Larsson, R., Lemke, O., Pfreundschuh, S., Brath, M., Adams, I., Fox, S., Roemer, F. E., Czarnecki, P., and Eriksson, P.: The Atmospheric Radiative Transfer Simulator ARTS, Version 2.6 — Deep Python Integration, *Journal of Quantitative Spectroscopy and Radiative Transfer*, 341, 109 443, <https://doi.org/10.1016/j.jqsrt.2025.109443>, 2025.
- Buras, R. and Mayer, B.: Efficient Unbiased Variance Reduction Techniques for Monte Carlo Simulations of Radiative Transfer in Cloudy Atmospheres: The Solution, *Journal of Quantitative Spectroscopy and Radiative Transfer*, 112, 434–447,  
 695 <https://doi.org/10.1016/j.jqsrt.2010.10.005>, 2011.
- Calders, K., Origo, N., Burt, A., Disney, M., Nightingale, J., Raunonen, P., Åkerblom, M., Malhi, Y., and Lewis, P.: Realistic Forest Stand Reconstruction from Terrestrial LiDAR for Radiative Transfer Modelling, *Remote Sensing*, 10, 933, <https://doi.org/10.3390/rs10060933>, 2018.
- Clough, S.: Line-By-Line Radiative Transfer Model, <https://github.com/AER-RC/LBLRTM>, 1991.
- 700 Clough, S. A., Shephard, M. W., Mlawer, E. J., Delamere, J. S., Iacono, M. J., Cady-Pereira, K., Boukabara, S., and Brown, P. D.: Atmospheric Radiative Transfer Modeling: A Summary of the AER Codes, *Journal of Quantitative Spectroscopy and Radiative Transfer*, 91, 233–244, <https://doi.org/10.1016/j.jqsrt.2004.05.058>, 2005.
- Coddington, O. M., Richard, E. C., Coddington, O., Harber, D., Pilewkie, P., Richard, E., Pilewskie, P., Woods, T. N., Chance, K., Liu, X., and Sun, K.: The TSIS-1 Hybrid Solar Reference Spectrum, *Geophysical Research Letters*, 48, <https://doi.org/10.1029/2020GL091709>,  
 705 2021.
- Compiègne, M., C-Labonnote, L., and Dubuisson, P.: The Phase Matrix Truncation Impact on Polarized Radiance, *AIP Conference Proceedings*, 1531, 95–98, <https://doi.org/10.1063/1.4804716>, 2013.
- Cornet, C., Labonnote, L. C., and Szczap, F.: Three-Dimensional Polarized Monte Carlo Atmospheric Radiative Transfer Model (3DM-CPOL): 3D Effects on Polarized Visible Reflectances of a Cirrus Cloud, *Journal of Quantitative Spectroscopy and Radiative Transfer*,  
 710 111, 174–186, <https://doi.org/10.1016/j.jqsrt.2009.06.013>, 2010.
- de Boissieu, F., Chraïbi, E., Lavalley, C., and Féret, J.-B.: pytools4dart: Python API to DART Radiative Transfer Simulator, <https://gitlab.com/pytools4dart/pytools4dart>, 2019.
- De Vis, P., Howes, A., Vanhellemont, Q., Bialek, A., Morris, H., Sinclair, M., and Ruddick, K.: Feasibility of Satellite Vicarious Calibration Using HYPERNETS Surface Reflectances from Gobabeb and Princess Elisabeth Antarctica Sites, *Frontiers in Remote Sensing*, 5,  
 715 <https://doi.org/10.3389/frsen.2024.1323998>, 2024.



- Delahaye, T., Armante, R., Scott, N. A., Jacquinet-Husson, N., Chédin, A., Crépeau, L., Crevoisier, C., Douet, V., Perrin, A., Barbe, A., Boudon, V., Campargue, A., Coudert, L. H., Ebert, V., Flaud, J. M., Gamache, R. R., Jacquemart, D., Jolly, A., Kwabia Tchana, F., Kyuberis, A., Li, G., Lyulin, O. M., Manceron, L., Mikhailenko, S., Moazzen-Ahmadi, N., Müller, H. S. P., Naumenko, O. V., Nikitin, A., Perevalov, V. I., Richard, C., Starikova, E., Tashkun, S. A., family=Tyuterev, given=Vl. G., g.-i., Vander Auwera, J., Vispoel, B., Yachmenev, A., and Yurchenko, S.: The 2020 Edition of the GEISA Spectroscopic Database, *Journal of Molecular Spectroscopy*, 380, 111 510, <https://doi.org/10.1016/j.jms.2021.111510>, 2021.
- Disney, M. I., Lewis, P., Gomez-Dans, J., Roy, D., Wooster, M. J., and Lajas, D.: 3D Radiative Transfer Modelling of Fire Impacts on a Two-Layer Savanna System, *Remote Sensing of Environment*, 115, 1866–1881, <https://doi.org/10.1016/j.rse.2011.03.010>, 2011.
- Emde, C. and Mayer, B.: Errors Induced by the Neglect of Polarization in Radiance Calculations for Three-Dimensional Cloudy Atmospheres, *Journal of Quantitative Spectroscopy and Radiative Transfer*, 218, 151–160, <https://doi.org/10.1016/j.jqsrt.2018.07.001>, 2018.
- Emde, C., Buras, R., and Mayer, B.: ALIS: An efficient method to compute high spectral resolution polarized solar radiances using the Monte Carlo approach, *Journal of Quantitative Spectroscopy and Radiative Transfer*, 112, 1622–1631, <https://doi.org/10.1016/j.jqsrt.2011.03.018>, 2011.
- Emde, C., Barlakas, V., Cornet, C., Evans, F., Korkin, S., Ota, Y., Labonnote, L. C., Lyapustin, A., Macke, A., Mayer, B., and Wendisch, M.: IPRT polarized radiative transfer model intercomparison project – Phase A, *Journal of Quantitative Spectroscopy and Radiative Transfer*, 164, 8–36, <https://doi.org/10.1016/j.jqsrt.2015.05.007>, 2015.
- Emde, C., Buras-Schnell, R., Kylling, A., Mayer, B., Gasteiger, J., Hamann, U., Kylling, J., Richter, B., Pause, C., Dowling, T., and Bugliaro, L.: The libRadtran software package for radiative transfer calculations (version 2.0.1), *Geoscientific Model Development*, 9, 1647–1672, <https://doi.org/10.5194/gmd-9-1647-2016>, 2016.
- Fox, N. and Green, P.: Traceable Radiometry Underpinning Terrestrial- and Helio-Studies (TRUTHS): An Element of a Space-Based Climate and Calibration Observatory, *Remote Sensing*, 12, 2400, <https://doi.org/10.3390/rs12152400>, 2020.
- Galtier, M., Blanco, S., Caliot, C., Coustet, C., Dauchet, J., El Hafi, M., Eymet, V., Fournier, R., Gautrais, J., Khuong, A., Piaud, B., and Terrée, G.: Integral formulation of null-collision Monte Carlo algorithms, *Journal of Quantitative Spectroscopy and Radiative Transfer*, 125, 57–68, <https://doi.org/10.1016/j.jqsrt.2013.04.001>, 2013.
- Gasteiger, J. and Wiegner, M.: MOPSMAP v1.0: a versatile tool for the modeling of aerosol optical properties, *Geoscientific model development*, 11, 2739–2762, <https://doi.org/10.5194/gmd-11-2739-2018>, 2018.
- Gasteiger, J., Emde, C., Mayer, B., Buras, R., Buehler, S., and Lemke, O.: Representative wavelengths absorption parameterization applied to satellite channels and spectral bands, *Journal of Quantitative Spectroscopy and Radiative Transfer*, <https://doi.org/10.1016/j.jqsrt.2014.06.024>, 2014.
- Gobron, N., Pinty, B., Verstraete, M. M., and Govaerts, Y.: A semidiscrete model for the scattering of light by vegetation, *Journal of Geophysical Research: Atmospheres*, 102, 9431–9446, <https://doi.org/10.1029/96JD04013>, 1997.
- Goodenough, A. A. and Brown, S. D.: DIRSIG5: Next-Generation Remote Sensing Data and Image Simulation Framework, *IEEE Journal of Selected Topics in Applied Earth Observations and Remote Sensing*, 10, 4818–4833, <https://doi.org/10.1109/JSTARS.2017.2758964>, 2017.
- Goody, R., West, R., Chen, L., and Crisp, D.: The correlated-k method for radiation calculations in nonhomogeneous atmospheres, *Journal of Quantitative Spectroscopy and Radiative Transfer*, 42, 539–550, [https://doi.org/10.1016/0022-4073\(89\)90044-7](https://doi.org/10.1016/0022-4073(89)90044-7), 1989.
- Gordon, I., Rothman, L., Hargreaves, R., Hashemi, R., Karlovets, E., Skinner, F., Conway, E., Hill, C., Kochanov, R., Tan, Y., Wcislo, P., Finenko, A., Nelson, K., Bernath, P., Birk, M., Boudon, V., Campargue, A., Chance, K., Coustenis, A., Drouin, B., Flaud, J.-M., Gamache,



- R., Hodges, J., Jacquemart, D., Mlawer, E., Nikitin, A., Perevalov, V., Rotger, M., Tennyson, J., Toon, G., Tran, H., Tyuterev, V., Adkins, E., Baker, A., Barbe, A., Canè, E., Császár, A., Dudaryonok, A., Egorov, O., Fleisher, A., Fleurbaey, H., Foltynowicz, A., Furtenbacher, T., Harrison, J., Hartmann, J.-M., Horneman, V.-M., Huang, X., Karman, T., Karns, J., Kass, S., Kleiner, I., Kofman, V., Kwabia-Tchana, F., Lavrentieva, N., Lee, T., Long, D., Lukashevskaya, A., Lyulin, O., Makhnev, V., Matt, W., Massie, S., Melosso, M., Mikhailenko, S., Mondelain, D., Müller, H., Naumenko, O., Perrin, A., Polyansky, O., Raddaoui, E., Raston, P., Reed, Z., Rey, M., Richard, C., Tóbiás, R., Sadiq, I., Schwenke, D., Starikova, E., Sung, K., Tamassia, F., Tashkun, S., Vander Auwera, J., Vasilenko, I., Vigasin, A., Villanueva, G., Vispoel, B., Wagner, G., Yachmenev, A., and Yurchenko, S.: The HITRAN2020 molecular spectroscopic database, *Journal of Quantitative Spectroscopy and Radiative Transfer*, 277, 107 949, <https://doi.org/10.1016/j.jqsrt.2021.107949>, 2022.
- Gorshchev, V., Serdyuchenko, A., Weber, M., Chade, W., and Burrows, J. P.: High spectral resolution ozone absorption cross-sections — Part 1: Measurements, data analysis and comparison with previous measurements around 293 K, *Atmospheric Measurement Techniques*, 7, 609–624, <https://doi.org/10.5194/amt-7-609-2014>, 2014.
- Govaerts, Y., Nollet, Y., and Leroy, v.: Radiative Transfer Model Comparison with satellite Observations over CEOS Calibration Site Libya-4, *Atmosphere*, 13, <https://doi.org/10.3390/atmos13111759>, 2022.
- Grecco, H.: hgrecco/pint: 0.19.2, <https://github.com/hgrecco/pint>, 2022.
- Haberreiter, M., Schöll, M., Dudok de Wit, T., Kretschmar, M., Misios, S., Tourpali, K., and Schmutz, W.: A New Observational Solar Irradiance Composite, *Journal of Geophysical Research: Space Physics*, 122, 5910–5930, <https://doi.org/10.1002/2016JA023492>, 2017.
- Hansen, J. E. and Travis, L. D.: Light Scattering in Planetary Atmospheres, *Space Science Reviews*, 16, 527–610, <https://doi.org/10.1007/BF00168069>, 1974.
- Hapke, B.: Bidirectional Reflectance Spectroscopy: 3. Correction for Macroscopic Roughness, *Icarus*, 59, 41–59, 1984.
- Hapke, B.: *Theory of Reflectance and Emittance Spectroscopy*, Cambridge University Press, ISBN 978-0-521-88349-8, 2012.
- Hapke, B. W.: A theoretical photometric function for the lunar surface, *Journal of Geophysical Research*, 68, 4571–4586, <https://doi.org/10.1029/JZ068i015p04571>, 1963.
- Holben, B. N., Eck, T. F., Slutsker, I., Tanré, D., Buis, J. P., Setzer, A., Vermote, E., Reagan, J. A., Kaufman, Y. J., Nakajima, T., Lavenu, F., Jankowiak, I., and Smirnov, A.: AERONET—A Federated Instrument Network and Data Archive for Aerosol Characterization, *Remote Sensing of Environment*, 66, 1–16, [https://doi.org/10.1016/S0034-4257\(98\)00031-5](https://doi.org/10.1016/S0034-4257(98)00031-5), 1998.
- Hoyer, S. and Hamman, J.: xarray: N-D labeled arrays and datasets in Python, *Journal of Open Research Software*, 5, <https://doi.org/10.5334/jors.148>, 2017.
- Inness, A., Ades, M., Agustí-Panareda, A., Barré, J., Benedictow, A., Blechschmidt, A.-M., Dominguez, J. J., Engelen, R., Eskes, H., Flemming, J., Huijnen, V., Jones, L., Kipling, Z., Massart, S., Parrington, M., Peuch, V.-H., Razinger, M., Remy, S., Schulz, M., and Suttie, M.: The CAMS Reanalysis of Atmospheric Composition, *Atmospheric Chemistry and Physics*, 19, 3515–3556, <https://doi.org/10.5194/acp-19-3515-2019>, 2019.
- Jakob, W.: Mitsuba renderer, [https://mitsuba-renderer.org/index\\_old.html](https://mitsuba-renderer.org/index_old.html), 2010.
- Jakob, W., Speierer, S., Roussel, N., Nimier-David, M., Vicini, D., Zeltner, T., Nicolet, B., Crespo, M., Leroy, V., and Zhang, Z.: Mitsuba 3 renderer, <https://mitsuba-renderer.org>, 2022a.
- Jakob, W., Speierer, S., Roussel, N., and Vicini, D.: Dr.Jit: A Just-In-Time Compiler for Differentiable Rendering, *Transactions on Graphics (Proceedings of SIGGRAPH)*, 41, <https://doi.org/10.1145/3528223.3530099>, 2022b.
- Joint Research Centre: The new RAMI4ATM, [https://rami-benchmark.jrc.ec.europa.eu/\\_www/phase\\_descr.php?strPhase=RAMI4ATM](https://rami-benchmark.jrc.ec.europa.eu/_www/phase_descr.php?strPhase=RAMI4ATM), [2025-08-25], 2025.



- Kajiya, J. T.: The Rendering Equation, in: ACM SIGGRAPH Computer Graphics, vol. 20, pp. 143–150, ACM, 1986.
- 795 Kluyver, T., Ragan-Kelley, B., Pérez, F., Granger, B., Bussonnier, M., Frederic, J., Kelley, K., Hamrick, J., Grout, J., Corlay, S., Ivanov, P., Avila, D., Abdalla, S., Willing, C., and development team, J.: Jupyter Notebooks - a publishing format for reproducible computational workflows, in: Positioning and Power in Academic Publishing: Players, Agents and Agendas, edited by Loizides, F. and Schmidt, B., pp. 87–90, IOS Press, Netherlands, <https://eprints.soton.ac.uk/403913/>, 2016.
- Korkin, S., Yang, E.-S., Spurr, R., Emde, C., Zhai, P., Krotkov, N., Vasilkov, A., and Lyapustin, A.: Numerical results for polarized light scattering in a spherical atmosphere, *Journal of Quantitative Spectroscopy and Radiative Transfer*, 287, 108 194, <https://doi.org/10.1016/j.jqsrt.2022.108194>, 2022.
- 800 Kotchenova, S. Y., Vermote, E. F., Matarrese, R., and Klemm, Jr., F. J.: Validation of a vector version of the 6S radiative transfer code for atmospheric correction of satellite data. Part I: Path radiance, *Applied Optics*, 45, 6762, 2006.
- Krekel, H., Oliveira, B., Pfannschmidt, R., Bruynooghe, F., Laughner, B., and Bruhin, F.: pytest, <https://github.com/pytest-dev/pytest>, 2004.
- Lacis, A. A. and Oinas, V.: A description of the correlated- $k$  distribution method for modeling nongray gaseous absorption, thermal emission, and multiple scattering in vertically inhomogeneous atmospheres, *Journal of Geophysical Research*, 96, 9027, <https://doi.org/10.1029/90JD01945>, 1991.
- 805 Lanconelli, C., Gobron, N., Robustelli, M., Adams, J. S., Calders, K., Disney, M., Gastellu-Etchegorry, J.-P., Goodenough, A., Govaerts, Y., Hogan, R. J., Huang, H., Kobayashi, H., Kuusk, A., Leroy, V., Origo, N., Qi, J., Schunke, S., Leeuwen, M., Wang, Y., Xie, D., Zeng, Y., and Zhao, F.: The Fifth Phase of the Radiation Transfer Model Intercomparison Exercise (RAMI-V): Experiment Description and Results on Actual Canopy Scenarios, *Journal of Remote Sensing*, 5, 0663, <https://doi.org/10.34133/remotesensing.0663>, 2025.
- 810 Leroy, V., Aschan, R., Woolliams, P., Schunke, S., Manoocheri, F., and Govaerts, Y.: An SI-Traceable Protocol for the Validation of Radiative Transfer Model-Based Reflectance Simulation, *IEEE Transactions on Geoscience and Remote Sensing*, 63, 1–22, <https://doi.org/10.1109/TGRS.2025.3547305>, 2025a.
- Leroy, V., Nollet, Y., Schunke, S., Misk, N., Marton, N., Emde, C., and Govaerts, Y.: Eradiate radiative transfer model, <https://doi.org/10.5281/zenodo.17226380>, 2025b.
- 815 Lewis, P.: Three-dimensional plant modelling for remote sensing simulation studies using the Botanical Plant Modelling System, *Agronomie*, 19, 185–210, <https://doi.org/10.1051/agro:19990302>, 1999.
- Litvinov, P., Chen, C., Dubovik, O., Bindreiter, L., Matar, C., Fuertes, D., Lopatin, A., Lapyonok, T., Lanzinger, V., Hangler, A., Aspetsberger, M., de Graaf, M., Tilstra, L. G., Stammes, P., Dandocsi, A., Gasbarra, D., Fluck, E., Zehner, C., and Retscher, C.: Extended aerosol and surface characterization from S5P/TROPOMI with GRASP algorithm. Part I: Conditions, approaches, performance and new possibilities, *Remote Sensing of Environment*, 313, 114 355, <https://doi.org/10.1016/j.rse.2024.114355>, 2024.
- 820 Lucht, W., Schaaf, C., and Strahler, A.: An algorithm for the retrieval of albedo from space using semiempirical BRDF models, *IEEE Transactions on Geoscience and Remote Sensing*, 38, 977–998, <https://doi.org/10.1109/36.841980>, 2000.
- Luffarelli, M., Misk, N., Leroy, V., and Govaerts, Y.: Elaboration of Simulated Hyperspectral Calibration Reference over Pseudo-Invariant Calibration Reference, *Atmosphere*, 16, 583, <https://doi.org/10.3390/atmos16050583>, 2025.
- 825 Mayer, B.: Radiative Transfer in the Cloudy Atmosphere, in: European Physical Journal Conferences, vol. 1, pp. 75–99, EDP Sciences, 2009.
- Mayer, B. and Kylling, A.: Technical Note: The libRadtran Software Package for Radiative Transfer Calculations - Description and Examples of Use, *Atmospheric Chemistry and Physics*, 5, 1855–1877, <https://doi.org/10.5194/acp-5-1855-2005>, 2005.



- Meftah, M., Damé, L., Bolsée, D., Hauchecorne, A., Pereira, N., Sluse, D., Cessateur, G., Irbah, A., Bureau, J., Weber, M., Bramstedt, K., Hilbig, T., Thiéblemont, R., Marchand, M., Lefèvre, F., Sarkissian, A., and Bekki, S.: SOLAR-ISS: A New Reference Spectrum Based on  
 830 SOLAR/SOLSPEC Observations, *Astronomy & Astrophysics*, 611, A1, <https://doi.org/10.1051/0004-6361/201731316>, 2018.
- Mei, L., Rozanov, V., Jiao, Z., and Burrows, J. P.: A new snow bidirectional reflectance distribution function model in spectral regions from UV to SWIR: Model development and application to ground-based, aircraft and satellite observations, *ISPRS Journal of Photogrammetry and Remote Sensing*, 188, 269–285, <https://doi.org/10.1016/j.isprsjprs.2022.04.010>, 2022.
- Miller, B., Georgiev, I., and Jarosz, W.: A null-scattering path integral formulation of light transport, *ACM Transactions on Graphics*, 38,  
 835 1–13, <https://doi.org/10.1145/3306346.3323025>, 2019.
- Minnaert, M.: The Reciprocity Principle in Lunar Photometry, *Astrophysical Journal*, pp. 403–410, 1941.
- Mishchenko, M. I. and Travis, L. D.: Satellite retrieval of aerosol properties over the ocean using polarization as well as intensity of reflected sunlight, *Journal of Geophysical Research: Atmospheres*, 102, 16 989–17 013, <https://doi.org/10.1029/96JD02425>, 1997.
- Mishchenko, M. I., Lacis, A. A., and Travis, L. D.: Errors Induced by the Neglect of Polarization in Radiance Calculations for Rayleigh-  
 840 Scattering Atmospheres, *Journal of Quantitative Spectroscopy and Radiative Transfer*, 51, 491–510, [https://doi.org/10.1016/0022-4073\(94\)90149-X](https://doi.org/10.1016/0022-4073(94)90149-X), 1994.
- Nicodemus, F. E., Richmond, J. C., Hsia, J. J., Ginsberg, I. W., and Limperis, T.: Geometrical Considerations and Nomenclature for Reflectance, vol. 160, US Department of Commerce, National Bureau of Standards, 1977.
- Nimier-David, M., Vicini, D., Zeltner, T., and Jakob, W.: Mitsuba 2, *ACM Transactions on Graphics*, 38, 1–17,  
 845 <https://doi.org/10.1145/3355089.3356498>, 2019.
- Nollet, Y. and Leroy, V.: Joseki, <https://github.com/rayference/joseki>, 2024.
- Novák, J., Georgiev, I., Hanika, J., and Jarosz, W.: Monte Carlo Methods for Volumetric Light Transport Simulation, *Computer Graphics Forum*, 37, 551–576, <https://doi.org/10.1111/cgf.13383>, 2018.
- Pannier, E. and Laux, C. O.: RADIS: A nonequilibrium line-by-line radiative code for CO<sub>2</sub> and HITRAN-like database species, *Journal of*  
 850 *Quantitative Spectroscopy and Radiative Transfer*, 222–223, 12–25, <https://doi.org/10.1016/j.jqsrt.2018.09.027>, 2019.
- Pharr, M., Jakob, W., and Humphreys, G.: *Physically Based Rendering: From Theory to Implementation*, MIT Press, 4th edition edn., ISBN 978-0-262-04802-6, <https://pbr-book.org/>, 2023.
- Pinty, B., Roveda, F., Verstraete, M. M., Gobron, N., Govaerts, Y., Martonchik, J. V., Diner, D. J., and Kahn, R. A.: Surface albedo retrieval from Meteosat: 1. Theory, *Journal of Geophysical Research: Atmospheres*, 105, 18 099–18 112, <https://doi.org/10.1029/2000JD900113>,  
 855 2000.
- Pinty, B., Gobron, N., Widlowski, J.-L., Gerstl, S. A. W., Verstraete, M. M., Antunes, M., Bacour, C., Gascon, F., Gastellu, J.-P., Goel, N., Jacquemoud, S., North, P., Qin, W., and Thompson, R.: Radiation transfer model intercomparison (RAMI) exercise, *Journal of Geophysical Research: Atmospheres*, 106, 11 937–11 956, <https://doi.org/10.1029/2000JD900493>, 2001.
- Pinty, B., Widlowski, J.-L., Taberner, M., Gobron, N., Verstraete, M. M., Disney, M., Gascon, F., Gastellu, J.-P., Jiang, L., Kuusk, A., Lewis,  
 860 P., Li, X., Ni-Meister, W., Nilson, T., North, P., Qin, W., Su, L., Tang, S., Thompson, R., Verhoef, W., Wang, H., Wang, J., Yan, G., and Zang, H.: Radiation Transfer Model Intercomparison (RAMI) exercise: Results from the second phase, *Journal of Geophysical Research: Atmospheres*, 109, n/a–n/a, <https://doi.org/10.1029/2003JD004252>, 2004.
- Qi, J., Xie, D., Yin, T., Yan, G., Gastellu-Etchegorry, J.-P., Li, L., Zhang, W., Mu, X., and Norford, L. K.: LESS: Large-Scale remote sensing data and image simulation framework over heterogeneous 3D scenes, *Remote Sensing of Environment*, 221, 695–706,  
 865 <https://doi.org/10.1016/j.rse.2018.11.036>, 2019.



- Rahman, H., Pinty, B., and Verstraete, M. M.: Coupled surface-atmosphere reflectance (CSAR) model: 2. Semiempirical surface model usable with NOAA advanced very high resolution radiometer data, *Journal of Geophysical Research*, 98, 20791, <https://doi.org/10.1029/93JD02072>, 1993.
- Ramon, D., Steinmetz, F., Jolivet, D., Compiègne, M., and Frouin, R.: Modeling polarized radiative transfer in the ocean-atmosphere system with the GPU-accelerated SMART-G Monte Carlo code, *Journal of Quantitative Spectroscopy and Radiative Transfer*, 222-223, 89–107, <https://doi.org/10.1016/j.jqsrt.2018.10.017>, 2019.
- Roccetti, G., Bugliaro, L., Götde, F., Emde, C., Hamann, U., Manev, M., Sterzik, M. F., and Wehrum, C.: HAMSTER: Hyper-spectral Albedo Maps dataset with high Spatial and Temporal Resolution, *Atmospheric measurement techniques*, 17, 6025–6046, <https://doi.org/10.5194/amt-17-6025-2024>, 2024.
- 875 Rozanov, V., Rozanov, A., Kokhanovsky, A., and Burrows, J.: Radiative transfer through terrestrial atmosphere and ocean: Software package SCIATRAN, *Journal of Quantitative Spectroscopy and Radiative Transfer*, 133, 13–71, <https://doi.org/10.1016/j.jqsrt.2013.07.004>, 2014.
- Salehi, F., Thome, K., Wenny, B. N., Lockwood, R., and Wang, Z.: Band-Averaged Response Sensitivity Study of an Imaging Spectrometer for the CLARREO Pathfinder Mission, *Remote Sensing*, 14, 2302, <https://doi.org/10.3390/rs14102302>, 2022.
- Salesin, K., Knobelspiesse, K. D., Chowdhary, J., Zhai, P.-W., and Jarosz, W.: Unifying Radiative Transfer Models in Computer Graphics and Remote Sensing, Part I: A Survey, *Journal of Quantitative Spectroscopy and Radiative Transfer*, 314, 108847, <https://doi.org/10.1016/j.jqsrt.2023.108847>, 2024.
- 880 Schlawack, H.: attrs, <https://github.com/python-attrs/attrs>, 2024.
- Schunke, S., Leroy, V., and Govaerts, Y.: Retrieving BRDFs from UAV-based Radiometers for Fiducial Reference Measurements: Caveats and Recommendations, *Frontiers in Remote Sensing*, 4, <https://doi.org/10.3389/frsen.2023.1285800>, 2023.
- 885 Serdyuchenko, A., Gorshchev, V., Weber, M., Chade, W., and Burrows, J. P.: High spectral resolution ozone absorption cross-sections — Part 2: Temperature dependence, *Atmospheric Measurement Techniques*, 7, 625–636, <https://doi.org/10.5194/amt-7-625-2014>, 2014.
- Somers, B., Delalieux, S., Verstraeten, W. W., and Coppin, P.: A Conceptual Framework for the Simultaneous Extraction of Sub-Pixel Spatial Extent and Spectral Characteristics of Crops, *Photogrammetric Engineering & Remote Sensing*, 75, 57–68, 2009.
- Stamnes, K., Tsay, S.-C., Wiscombe, W., and Laszlo, I.: DISORT, a general-purpose Fortran program for discrete-ordinate-method radiative transfer in scattering and emitting layered media: documentation of methodology, <http://www.rtatmocn.com/disort/docs/DISORTReport1.1.pdf>, 2000.
- 890 Strahler, A. H., Muller, J.-P., Lucht, W., Barker Schaaf, C., Trevor, T., Gao, F., Xiaowen Li, Muller, J.-P., Lewis, P., and Barnsley, M. J.: MODIS BRDF/Albedo Product: Algorithm Theoretical Basis Document Version 5.0, [https://modis.gsfc.nasa.gov/data/atbd/atbd\\_mod09.pdf](https://modis.gsfc.nasa.gov/data/atbd/atbd_mod09.pdf), 1999.
- 895 Strobl, P.: The new Copernicus digital elevation model, in: GSICS Quarterly, edited by Szantoi, Z., Boccia, V., and Quang, C., vol. 14, <https://doi.org/10.25923/enp8-6w06>, 2020.
- Stuckens, J., Somers, B., Delalieux, S., Verstraeten, W. W., and Coppin, P.: The Impact of Common Assumptions on Canopy Radiative Transfer Simulations: A Case Study in Citrus Orchards, *Journal of Quantitative Spectroscopy and Radiative Transfer*, 110, 1–21, <https://doi.org/10.1016/j.jqsrt.2008.09.001>, 2009.
- 900 Thuillier, G., Hersé, M., Labs, D., Foujols, T., Peetermans, W., Gillotay, D., Simon, P., and Mandel, H.: The Solar Spectral Irradiance from 200 to 2400 Nm as Measured by the SOLSPEC Spectrometer from the Atlas and Eureka Missions, *Solar Physics*, 214, 1–22, <https://doi.org/10.1023/A:1024048429145>, 2003.



- Tong, C., Bao, Y., Zhao, F., Fan, C., Li, Z., and Huang, Q.: Evaluation of the FluorWPS Model and Study of the Parameter Sensitivity for Simulating Solar-Induced Chlorophyll Fluorescence, *Remote Sensing*, 13, 1091, <https://doi.org/10.3390/rs13061091>, 2021.
- 905 Veach, E.: Robust Monte Carlo Methods For Light Transport Simulation, Ph.D. thesis, Stanford University, Stanford, California, 1997.
- Villefranque, N., Fournier, R., Couvreur, F., Blanco, S., Cornet, C., Eymet, V., Forest, V., and Tregan, J.-M.: A Path Tracing Monte Carlo Library for 3D Radiative Transfer in Highly Resolved Cloudy Atmospheres, *Journal of Advances in Modeling Earth Systems*, 11, 2449–2473, <https://doi.org/10.1029/2018MS001602>, 2019.
- Wang, Y., Kallel, A., Yang, X., Regaieg, O., Lauret, N., Guilleux, J., Chavanon, E., and Gastellu-Etchegorry, J.-P.: DART-Lux: An unbiased and rapid Monte Carlo radiative transfer method for simulating remote sensing images, *Remote Sensing of Environment*, 274, 112973, <https://doi.org/10.1016/j.rse.2022.112973>, 2022.
- 910 Widlowski, J.-L., Taberner, M., Pinty, B., Bruniquel-Pinel, V., Disney, M., Fernandes, R., Gastellu-Etchegorry, J.-P., Gobron, N., Kuusk, A., Lavergne, T., Leblanc, S., Lewis, P. E., Martin, E., Möttus, M., North, P. R. J., Qin, W., Robustelli, M., Rochdi, N., Ruiloba, R., Soler, C., Thompson, R., Verhoef, W., Verstraete, M. M., and Xie, D.: Third Radiation Transfer Model Intercomparison (RAMI) exercise: Documenting progress in canopy reflectance models, *Journal of Geophysical Research*, 112, <https://doi.org/10.1029/2006JD007821>, 2007.
- 915 Widlowski, J.-L., Robustelli, M., Disney, M., Gastellu-Etchegorry, J.-P., Lavergne, T., Lewis, P., North, P., Pinty, B., Thompson, R., and Verstraete, M.: The RAMI On-line Model Checker (ROMC): A web-based benchmarking facility for canopy reflectance models, *Remote Sensing of Environment*, 112, 1144–1150, <https://doi.org/10.1016/j.rse.2007.07.016>, 2008.
- Widlowski, J.-L., Mio, C., Disney, M., Adams, J., Andredakis, I., Atzberger, C., Brennan, J., Busetto, L., Chelle, M., Ceccherini, G., Colombo, R., Côté, J.-F., Eenmäe, A., Essery, R., Gastellu-Etchegorry, J.-P., Gobron, N., Grau, E., Haverd, V., Homolová, L., Huang, H., Hunt, L., Kobayashi, H., Koetz, B., Kuusk, A., Kuusk, J., Lang, M., Lewis, P. E., Lovell, J. L., Malenovsky, Z., Meroni, M., Morsdorf, F., Möttus, M., Ni-Meister, W., Pinty, B., Rautiainen, M., Schlerf, M., Somers, B., Stuckens, J., Verstraete, M. M., Yang, W., Zhao, F., and Zenone, T.: The fourth phase of the radiative transfer model intercomparison (RAMI) exercise: Actual canopy scenarios and conformity testing, *Remote Sensing of Environment*, 169, 418–437, <https://doi.org/10.1016/j.rse.2015.08.016>, 2015.
- 920 Wilkie, A., Vevoda, P., Bashford-Rogers, T., Hošek, L., Iser, T., Kolářová, M., Rittig, T., and Křivánek, J.: A fitted radiance and attenuation model for realistic atmospheres, *ACM Transactions on Graphics*, 40, 1–14, <https://doi.org/10.1145/3450626.3459758>, 2021.
- Wilson, R. T.: Py6S: A Python interface to the 6S radiative transfer model, *Computers & Geosciences*, 51, 166–171, <https://doi.org/10.1016/j.cageo.2012.08.002>, 2013.
- Woods, T. N., Chamberlin, P. C., Harder, J. W., Hock, R. A., Snow, M., Eparvier, F. G., Fontenla, J., McClintock, W. E., and Richard, E. C.: Solar Irradiance Reference Spectra (SIRS) for the 2008 Whole Heliosphere Interval (WHI), *Geophysical Research Letters*, 36, <https://doi.org/10.1029/2008GL036373>, 2009.
- 930



---

**Algorithm C1** Basic interface.

---

```
1: import numpy as np
2: import eradiate
3: from eradiate.experiments import AtmosphereExperiment
4: from eradiate.scenes.atmosphere import MolecularAtmosphere
5: from eradiate.scenes.bsdfs import LambertianBSDF
6: from eradiate.scenes.measure import MultiDistantMeasure
7: from eradiate.scenes.illumination import DirectionalIllumination
8:
9: # Select mode before doing anything else
10: eradiate.set_mode("ckd")
11:
12: # Configure the experiment
13: exp = AtmosphereExperiment(
14:     atmosphere=MolecularAtmosphere(),
15:     surface=LambertianBSDF(reflectance=0.5),
16:     illumination=DirectionalIllumination(azimuth=45.0, zenith=30.0),
17:     measures=MultiDistantMeasure.hplane(azimuth=45.0, zeniths=np.arange(-75, 76, 5.0)),
18: )
19:
20: # Run the simulation
21: # The 'spp' parameter controls the number of Monte Carlo samples at each
22: # iteration of the spectral loop
23: result = eradiate.run(exp, spp=10000)
24:
25: # Display the results using xarray's plotting features
26: result["brf"].plot()
```

---



---

**Algorithm C2** Basic interface (dictionary-based).

---

```
1: import numpy as np
2: import eradiate
3: from eradiate.experiments import AtmosphereExperiment
4:
5: eradiate.set_mode("ckd")
6:
7: exp = AtmosphereExperiment(
8:     atmosphere={"type": "molecular"},
9:     surface={"type": "lambertian"},
10:    illumination={"type": "directional", "azimuth": 45.0, "zenith": 30.0},
11:    measures={
12:        "type": "mdistant",
13:        "construct": "hplane",
14:        "azimuth": 45.0,
15:        "zeniths": np.arange(-75, 76, 5.0),
16:    },
17: )
18:
19: result = eradiate.run(exp, spp=10000)
20:
21: result["brf"].plot()
```

---



---

**Algorithm C3** Expert interface.

---

```
1: import mitsuba as mi
2:
3: import eradiate
4: from eradiate import KernelContext
5: from eradiate import unit_registry as ureg
6: from eradiate.kernel import scene_parameter
7:
8: eradiate.set_mode("mono")
9:
10:
11: # Define "yellow" reflectance spectrum
12: VALUES = {440.0: 0.1, 550.0: 0.5, 660.0: 0.9}
13:
14: def spectrum_lambertian(ctx: KernelContext):
15:     return VALUES[ctx.si.w.m_as("nm")]
16:
17:
18: # Declare an Experiment with custom kernel dictionary and parameters
19: exp = eradiate.experiments.AtmosphereExperiment(
20:     atmosphere={"type": "molecular"},
21:     surface={"type": "lambertian"},
22:     measures={
23:         "type": "perspective",
24:         "origin": [5, 5, 1],
25:         "target": [0, 0, 0.5],
26:         "film_resolution": (320, 240),
27:         "srf": {"type": "delta", "wavelengths": [440, 550, 660]},
28:     },
29:     kdict={
30:         "mat_thesphere": {"type": "diffuse", "id": "mat_thesphere"},
31:         "mat_thesquare": {"type": "roughplastic", "id": "mat_thesquare"},
32:         "sphere": {
33:             "type": "sphere",
34:             "id": "thesphere",
35:             "bsdf": {"type": "ref", "id": "mat_thesphere"},
36:         },
37:         "square": {
38:             "type": "rectangle",
39:             "to_world": mi.ScalarTransform4f.translate([0, 0, 0.1])
40:             @ mi.ScalarTransform4f.scale(2.0),
41:             "bsdf": {"type": "ref", "id": "mat_thesquare"},
42:         },
43:     },
44:     kmap={
45:         "mat_thesphere.reflectance.value": scene_parameter(
46:             spectrum_lambertian,
47:             node_type=mi.BSDF,
48:             node_id="mat_thesphere",
49:             parameter_relpath="reflectance.value",
50:         ),
51:     },
52: )
53:
54:
55: # Run simulation
56: result = eradiate.run(exp, spp=256)
```

---