

1 **Drivers of Flash Flood Frequency and Intensity in the United States: A**  
2 **Quantitative Analysis of Hydrometeorological Interactions**

3 Ying Hu<sup>1,2</sup>, Huan Wu<sup>2,3,4\*</sup>, Yiwen Mei<sup>5</sup>, Zhijun Huang<sup>2,3</sup>, Aihui Wang<sup>6</sup>, Chaoqun Li<sup>2,3</sup>, Bing Sui<sup>7</sup>

4 <sup>1</sup> Hubei Meteorological Service Center, Wuhan, China

5 <sup>2</sup> Southern Marine Science and Engineering Laboratory (Zhuhai), and School of Atmospheric Sciences, Sun Yat-sen University,  
6 Guangdong, China

7 <sup>3</sup> Guangdong Province Key Laboratory for Climate Change and Natural Disaster Studies, Sun Yat-sen University, Guangdong,  
8 China

9 <sup>4</sup> State Key Laboratory of Climate System Prediction and Risk Management, Nanjing University of Information Science and  
10 Technology, Nanjing, China

11 <sup>5</sup> Carbon-Water Observation and Research Station in Karst Regions of Northern Guangdong, School of Geography and Planning,  
12 Sun Yat-sen University, Guangzhou, China

13 <sup>6</sup> Nansen-Zhu International Research Centre, Institute of Atmospheric Physics, Chinese Academy of Sciences, Beijing, China

14 <sup>7</sup> Hunan Research Institute of Meteorological Sciences, Hunan Meteorological Bureau, Changsha, China

15 *Correspondence to:* Huan Wu ([wuhuan3@mail.sysu.edu.cn](mailto:wuhuan3@mail.sysu.edu.cn))

16 **Abstract.** Inconsistent changes in precipitation and flooding have spurred investigations into the underlying mechanisms, yet the  
17 quantitative understanding of interactions between precipitation, temperature, and land cover in streamflow dynamics remains  
18 limited. We investigate streamflow changes in 294 small and medium-sized catchments across the contiguous United States  
19 (CONUS), using over 30 years of ~~hourly~~ data from the USGS river-watching network. We find that 17.3% of catchments exhibit  
20 significant increases in flash flood frequency ( $p<0.05$ ), and 6.5% show significant increases in flashiness, while the majority  
21 experience no substantial changes. Despite a 67% increase in sub-daily heavy precipitation frequency, only 23% show flood  
22 frequency increases, indicating complex catchment-specific hydrometeorological interactions. To quantify the contributions of  
23 precipitation, temperature, and land cover changes, we employ a novel time-space varying distributed unit-hydrograph (TS-DUH)  
24 model integrated with the DRIVE hydrological model and random forest regression. The results reveal that land cover changes  
25 across ~~these predominantly upstream, forested catchments~~ have remained stable over the past four decades, with 90.8% of  
26 catchments showing minimal flow change (within  $\pm 3\%$ ) from 1985 to 2015. Precipitation emerges as the primary driver of  
27 streamflow changes, but rising temperature and evapotranspiration mitigate ~~the expected increases in flood frequency and~~  
28 ~~intensity associated with heavier precipitation. Model sensitivity experiments~~ show a 3.6% reduction in flood frequency and an

删除了: sub-daily

删除了: the CONUS

删除了: this effect

删除了: , with

删除了: simulations

删除了: ing

35 8.0% reduction in flood intensity since the 1980s. Additionally, in rapidly urbanizing catchments, a 10% increase in impervious  
36 surfaces could lead to a 20% peak flow increase, highlighting the importance of urbanization in flood risk. These findings enhance  
37 the understanding of spatial-temporal variation in flash flooding. They also provide crucial insights for better flood hazard  
38 mitigation strategies.

39 **Key words:** Flash floods; Streamflow dynamics; Precipitation variability; Climate change; Land cover change;  
40 Hydrometeorological interactions

删除了: our results show

删除了: ,

删除了: ing

删除了: ,

删除了: ,

删除了: ,

## 1. Introduction

Global warming and human-induced land cover changes are widely acknowledged for their effects on enhancing the hydrological cycles (Milly et al. 2008; Winkler et al. 2021). Observational data consistently show increasing frequency and intensity of heavy precipitation events, thereby amplifying flood risks (Alexander et al. 2006; Allan and Soden 2008; Westra et al. 2013). Flash floods, which are particularly hazardous due to their rapid onset and intensity, pose significant threats to human safety and socio-economic stability (Ahmadalipour and Moradkhani 2019; Khajehi et al. 2020). These growing concerns underline the need for a better understanding of flash flood causes and characteristics to develop effective disaster management strategies.

While significant progresses have been made in analyzing historical flood changes through long-term discharge records (Archfield et al. 2016; Liu et al. 2022; Merz et al. 2021; Slater and Villarini 2016), the study of flash flood trends is hindered by the lack of high-quality, long-term sub-daily observational data, particularly for small catchments (Gaume and Borga 2008; Gourley et al. 2013). This data gap, coupled with short time spans, limited spatial coverage, and infrequent observations, complicates the attribution of changes in flash flood behavior. Flash flood dynamics are influenced by the interaction of multiple drivers within the hydrometeorological system (Borga et al. 2014; Hapuarachchi et al. 2011). The mechanisms of precipitation-runoff processes across various landscapes are complex, and the current understanding remains limited (De Niel and Willems 2019; Merz et al. 2012). Furthermore, in the context of land surface environmental changes and climate warming driven by human activities, the mechanisms behind flood occurrence have become increasingly complex. Therefore, a comprehensive investigation into the trends and causes of flash flood changes not only enhances our understanding of flash flood behavior but also provides a scientific foundation for future risk management and policy development related especially to flash floods.

In the study of attributing changes in flood characteristics, the roles of climate change and land use/land cover (LULC) changes have been increasingly focused (Wagener et al. 2010). In order to comprehensively evaluate these effects, researchers have widely employed methods such as hydrological models (Frans et al. 2013), statistical analysis (Blum et al. 2020), Budyko theory (Wang and Hejazi 2011) and machine learning techniques (Jiang et al. 2022; Kemter et al. 2023). Climate-related changes, such as increased precipitation frequency and intensity, are widely recognized as the primary drivers of runoff ratio (Wang et al. 2022) and streamflow change (Slater et al. 2021). It is widely acknowledged that increasing impervious surfaces can intensify the hydrological response to precipitation events (De Niel and Willems 2019); however, the extent of this impact remains uncertain (Anderson et al. 2022; Blum et al. 2020; Debbage and Shepherd 2018).

77

78 Numerous studies utilizing historical observational data have revealed a lack of systematic increase in flood intensity, despite  
79 observed increases in extreme precipitation (Archfield et al. 2016; Bloeschl et al. 2017; Do et al. 2017; Liu et al. 2022; Sharma  
80 et al. 2018). The low signal-to-noise ratio in hydrological data, coupled with the inherent complexity of rainfall-runoff processes,  
81 hinders the derivation of a unified conclusion to explain this inconsistency (Hall et al. 2014; Wasko and Nathan 2019). Current  
82 research indicates that the inconsistency between changes in precipitation and flooding can be attributed to several factors: rising  
83 temperature and decreased soil moisture (Ivancic and Shaw 2015; Sharma et al. 2018; Wasko and Sharma 2017; Wasko and  
84 Nathan 2019), although the accelerating global transition toward flash droughts may paradoxically amplify flood response  
85 through altered soil hydrological properties when intense precipitation follows prolonged dry periods (Barendrecht et al. 2024;  
86 Yuan et al. 2023); the complexity arising from diverse flood generation mechanisms, leading to signal mixing (Zhang et al. 2022);  
87 and the varying hydrological responses to precipitation events of differing magnitudes (Brunner et al. 2021). While the impact of  
88 rising temperatures on flooding is increasingly recognized, quantitative assessments of flood intensity and frequency remain  
89 limited, and the comprehensive effects of LULC require further investigation (Ivancic and Shaw 2015; Sharma et al. 2018). No  
90 consensus has been reached regarding the dominant influence of climate change and land cover change. The majority of research  
91 on flood changes utilizes daily data because of the availability of relatively longer time series; however, only a few studies have  
92 conducted trend attribution analyses of annual maximum flow using sub-daily data (Hodgkins et al. 2019; Kemter et al. 2023).  
93 Understanding abrupt flash floods depends on further study of sub-daily event intensity, frequency, and duration in small and  
94 medium watersheds (Carmen Llasat et al. 2016). This necessitates a quantitative analysis of changes in sub-daily flash flood  
95 characteristics, and the interactive effects of climate and land cover change on streamflow and flash floods.

96

97 In this study, we investigate the trends in flash flood intensity and frequency over the past 30 years (1990-2020) across the  
98 contiguous United States (CONUS), utilizing extensive observational instantaneous streamflow data from the United States  
99 Geological Survey (USGS) in small and medium-sized catchments (drainage area < 3000 km<sup>2</sup>). Subsequently, the random forest  
100 regression method is used to quantify the impact of climate variables and land cover changes, as well as their interactions, on  
101 flash floods. Furthermore, we employ the Dominant River Tracing-Routing Integrated with VIC Environment (DRIVE) model  
102 (Wu et al. 2011; Wu et al. 2012a; Wu et al. 2014), alongside a newly developed Time-Space varying Distributed Unit Hydrograph  
103 (TS-DUH) model (Hu et al. 2024), driven by DRIVE, to quantitatively assess the impacts of temperature and land cover changes  
104 on flash floods. We aim to enhance understanding of flash flood trends and their driving factors, providing valuable insights for

improving flood risk management and policy formulation across the CONUS.

This paper is organized as follows: Section 2 describes the methodology used for analysis. Section 3 introduces the study catchments and datasets. Section 4 presents the results and analysis, including trends in the magnitude and frequency of heavy precipitation, flash floods, and other variables, as well as their impact on flash floods. Finally, Section 5 provides discussion and conclusions based on the study results.

## 2. Methodology

This section outlines the methods used to detect trends in flash flood characteristics and assess their relationship with hydrometeorological variables. Initially, time series datasets for hydroclimatic variables—including streamflow records, precipitation, air temperature, potential evapotranspiration, and soil moisture were compiled and subsequently analyzed for trends. To quantify the relative contributions of climatic factors (precipitation, temperature), land cover change, and their interactions to annual maximum streamflow, the Random Forest regression model was employed. Additionally, to explore the link between streamflow and temperature, we use both scaling curves and the DRIVE hydrological model for observed and simulated analyses. The DRIVE model, coupled with the TS-DUH model, was used to quantitatively assess the impact of land cover change on the streamflow response. This multi-method approach aims to provide a mechanistic understanding of the key drivers behind changes in flash flood frequency and intensity.

### 2.1. Extraction of hydrological and climatic characteristics based on observations

In this study, flash floods are operationally identified as rapid, high-intensity runoff responses of short duration, characterized solely from instantaneous streamflow hydrographs without imposing a rainfall duration criterion(Hapuarachchi et al. 2011).  
This study focuses on small-to-medium catchments (drainage area<3000 km<sup>2</sup>). Flash flood streamflow characteristics were extracted using two approaches: the Annual Maximum Flow (AMF) method and the Peaks Over Threshold (POT) method (Lang et al. 1999). The AMF method refers to the practice of identifying the highest peak flow for each year from a given record of streamflow data. Throughout this study, flood intensity denotes peak flow magnitude (m<sup>3</sup> s<sup>-1</sup>), as quantified by AMF and Peaks-over-threshold magnitude (POTM). For the POT method, the discharge threshold was iteratively determined for each station to achieve an average of two flood events per year, yielding time series data for both the number of flash flood events and peak flows. To ensure inter-event independence and appropriately handle multi-peak hydrographs, events were included in the POT

删除了: Inclusion of events

time series ~~only if they satisfied both of~~ the following criteria:

$$D > 5 + \log(0.386A) \quad (1)$$

$$Q_{min} < \frac{3}{4} \min(Q_1, Q_2) \quad (2)$$

Here, ~~Eq. (1) prescribes a minimum inter-event separation ( $D$ , in days) that scales with catchment area ( $A$ , in  $\text{km}^2$ ). Eq. 2 requires the minimum inter-peak discharge ( $Q_{min}$ ) to fall below 75 % of the lesser adjacent peak ( $Q_1$  and  $Q_2$ ); when this condition is violated, the peaks are treated as a single event and only the maximum is retained.~~ Unlike the AMF method that ensure at least one event per year, the POT method extracts only flood events that exceed a predetermined threshold. This means in dry years, the maximum flow recorded by AMF may not be identified as a flood event.

Catchment boundaries for each basin were delineated using the hierarchical dominant river tracing (DRT) algorithm (Wu et al. 2011; Wu et al. 2012b), employing 90 m resolution Flow Direction Raster (FDR) data. Basin-averaged temperature ( $^{\circ}\text{C}$ ), precipitation, and potential evapotranspiration (PET,  $\text{mm d}^{-1}$ ) were subsequently calculated. The hydrometeorological variables used for trend detection are listed in Table 1. A threshold of 95th percentile precipitation was employed to define heavy precipitation events (Mallakpour and Villarini 2015). To capture differences in sub-daily (1-h, 6-h, 12-h) and daily (24-h) precipitation patterns, we analyzed the annual frequency of heavy precipitation (AFHP) at multiple timescales. ~~These time windows were selected to span the plausible range of catchment concentration times across our study domain.~~ Annual maximum 1-day precipitation (RX1D) was calculated by summing hourly precipitation for each calendar day. Additionally, the annual maximum cumulative N-day precipitation (AMP-N) was analyzed, ~~where  $n=\log(0.386A)$ ,  $A$  is defined in Equation (1) (Slater and Villarini 2016). This formulation adapts the accumulation window to each catchment's response time. The mean duration of flood occurrence (MDF) was calculated as the average time span of each POT event above the threshold. The Peaks-over-threshold flashiness (POTFL) is calculated as~~ the difference between the peak discharge and action stage discharge normalized by the flooding rise time and basin area (Saharia et al. 2017). ~~In addition to streamflow and precipitation metrics, we analyzed annual daily maximum air temperature (AMT,  $^{\circ}\text{C}$ ), annual total potential evapotranspiration (APET,  $\text{mm d}^{-1}$ ), and annual total soil moisture (ASM,  $\text{kg m}^{-2}$ ) to characterize the thermal and moisture conditions influencing flood generation.~~

**Table 1.** Summary of hydrological and climatic variables used for flood trends analysis.

| Name                           | Unit                       | Abbreviation |
|--------------------------------|----------------------------|--------------|
| Annual maximum flow            | $\text{m}^3 \text{s}^{-1}$ | AMF          |
| Peaks-over-threshold magnitude | $\text{m}^3 \text{s}^{-1}$ | POTM         |

删除了: required adherence to

删除了:  $D$  represents the lag time (day) between two consecutive peaks,  $A$  denotes the catchment area ( $\text{km}^2$ ), and  $Q_{min}$  is the minimum flow between two consecutive peaks  $Q_1$  and  $Q_2$ .

删除了: at each station

删除了: represents the flashiness of POT events, flashiness represent

删除了: ts

删除了: /

删除了: /

设置了格式: 上标

|                                                                      |                    |                   |
|----------------------------------------------------------------------|--------------------|-------------------|
| Mean duration of flood occurrence                                    | hours              | MDF               |
| Peaks-over-threshold frequency (events per year)                     | -                  | POTF              |
| Peaks-over-threshold flashiness                                      | -                  | POTFL             |
| Annual frequency of 1h/6h/12h/24h heavy precipitation                | days               | AFHP1h/6h/12h/24h |
| Annual maximum cumulative precipitation occurring in an N-day window | mm                 | AMP-N             |
| Annual maximum 1-day precipitation                                   | mm                 | RX1D              |
| Annual maximum 6-hourly precipitation                                | mm                 | RX6H              |
| Annual total precipitation                                           | mm                 | AP                |
| Annual total potential evapotranspiration                            | mm d <sup>-1</sup> | APET              |
| Annual total soil moisture                                           | kg m <sup>-2</sup> | ASM               |
| Annual daily maximum air temperature                                 | °C                 | AMT               |

删除了: /d

设置了格式: 上标

删除了: K

删除了: /

设置了格式: 上标

## 2.2 Trend detection

Trend detection in hydroclimatic time series was performed using the non-parametric Mann-Kendall (MK) test (Kendall 1948; Mann 1945). The MK test's robustness to non-normality and versatility across diverse datasets make it suitable for analyzing streamflow, precipitation, temperature, and potential evapotranspiration time series at individual stations . Additionally, trends in event occurrence data, including zero-event counts, were further assessed using Poisson regression, a method well-suited to analyzing discrete variables such as flood or heavy rainfall frequency (Mallakpour and Villarini 2015; Slater and Villarini 2016). Statistical significance was evaluated at the 5% level.

## 2.3 The DRIVE and TS-DUH models

The DRIVE model is a distributed hydrological model developed by coupling the Variable Infiltration Capacity (VIC) land surface model (Liang et al. 1996) and the Dominant River Tracing based Routing (DRTR) model (Wu et al. 2012a; Wu et al. 2012b; Wu et al. 2014). The Global Flood Monitoring System (GFMS) has consistently monitored and forecasted flood occurrences and developments for over a decade, utilizing the DRIVE model informed by satellite precipitation data (Hou et al. 2014; Kirschbaum et al. 2017). Within the DRIVE model, the runoff generation process is derived based on a variable infiltration curve that considers the subgrid heterogeneity of infiltration capacity and multiple soil infiltration layers (Cherkauer et al. 2003; Liang et al. 1996).

189 River discharge, surface water storage, water level, and other streamflow variables are derived for each time step by solving the  
190 kinematic wave equations for each river path within the hierarchically organized river network defined by DRT algorithm (Wu  
191 et al. 2014). The DRIVE model has undergone extensive justification and validation worldwide and has demonstrated reliable  
192 performance (Huang et al. 2021; Huang et al. 2023; Nanding et al. 2021; Wu et al. 2017; Wu et al. 2014; Wu et al. 2019; Yan et  
193 al. 2020). In this study, the DRIVE model is run at a 0.125° spatial resolution with a 3-hourly time step. The hydrography dataset  
194 (e.g., FDR, Strahler order, flow accumulation) is derived using the DRT algorithm. To incorporate land cover information into  
195 DRIVE, the high resolution land cover data (details in Section 3) were reclassified to match the land cover classification scheme  
196 used in DRIVE by aggregating the original fine categories into broader land cover types via a cross-walking table, and  
197 subsequently processed to determine the fractional area of each land cover type within each 0.125° model grid cell. These  
198 fractional areas were then used to derive grid-averaged vegetation parameters within DRIVE, such as leaf area index, albedo, and  
199 roughness length, from the VIC parameter library, reflecting the composite land cover characteristics of each grid cell.

201 Our newly developed TS-DUH model, integrated with and driven by runoff outputs from the DRIVE model, was employed to  
202 refine flood peak estimation under different LUCC scenarios and to contribute to the separation of precipitation and LUCC  
203 impacts on streamflow. The TS-DUH model is designed for efficient flash flood analysis by estimating flow velocity and travel  
204 time based on topographic and hydroclimatic characteristics, emphasizing the dynamic contributions of runoff linked to variations  
205 in rainfall and soil moisture (Hu et al. 2024). The TS-DUH model operates at a significantly finer spatial resolution of 90 m. It  
206 leverages high-resolution DEM data for detailed flow path delineation and topographic analysis. In TS-DUH, Manning's  
207 roughness coefficients (n) for each grid cell are derived as the area-weighted average of n values assigned to the underlying 30  
208 m land cover pixels. These n values determine spatially distributed flow velocities, thereby capturing the influence of land surface  
209 characteristics on flood wave propagation at a finer scale.

#### 211 2.4 Analysis of potential driving factors

212 A random forest regression model (Breiman 2001) was developed using AP, AFHP6h, AFHP12h, RX1D, RX6H, AMP-N, APET,  
213 AMT, ASM and TS-DUH simulated peak flows under varying land cover conditions (with values linearly interpolated for  
214 intervening years to represent land cover change) for each catchment to identify the relative importance of different drivers of  
215 AMF changes. Random Forest is an ensemble method that improves prediction accuracy and robustness by aggregating multiple  
216 decision trees, effectively modeling complex non-linear relationships. For each catchment, hyperparameters were independently

删除了: Furthermore, the high-resolution land cover data is a critical input for

删除了: primarily used to

删除了: estimate

删除了: thus accounting for

删除了: impact

删除了: H

optimized using the Tree-structured Parzen Estimator (TPE) algorithm (Bergstra et al. 2011), with the data split into 80% training and 20% validation sets and the  $R^2$  on the validation set maximized over 100 evaluations. The optimized hyperparameters include `n_estimators` (50-500), `max_depth` (None or 10-40 in steps of 10), `min_samples_split` (2-20), and `min_samples_leaf` (1-10). Finally, the mean decrease in impurity (MDI) scores were then used to rank variable contributions. For each catchment, a cumulative importance curve was constructed from the ranked MDI values, and its inflection point, defined as the rank of maximum absolute second-order difference, was identified to mark the transition from dominant to marginal contributors. Variables below this inflection point were considered marginal. These primary drivers were further categorized into three types: precipitation (including AP, AFHP6h, AFHP12h, AMP-N, RX1D and RX6H), land cover (TS-DUH peak flows), and temperature (AT, ASM and APET).

In order to investigate the drivers of observed trends, this study focuses on precipitation, temperature, and land cover change. Firstly, streamflow (Q) and precipitation (P) scaling curves with temperature (T)-Q~T and P~T-were developed to characterize the relationships between these variables (Wasko and Sharma 2017; Yin et al. 2018; Zhang et al. 2022). For each catchment, daily maximum air temperatures were averaged, and standardized peak flows (at catchment outlets) and maximum 3-hourly accumulated precipitation (for each POT event) were grouped into equally spaced temperature bins. The 99th percentile of streamflow and precipitation within each bin was calculated, and these conditional quantiles were connected to form the scaling curves. The scaling curves are generated using 2°C temperature bins with a 1°C overlap to reduce the sensitivity to bin boundary selection (Lenderink and van Meijgaard 2010). Furthermore, events with temperatures below 5°C were excluded to minimize snowmelt effects (Wasko and Sharma 2017). Secondly, we use the DRIVE hydrological model to simulate the impact of temperature changes on streamflow (Wu et al. 2011; Wu et al. 2012a; Wu et al. 2014). The DRIVE model was run separately with dynamic temperature data (1981–2020) (referred to as DRIVE-DT) and static temperature data (repeating only the 1981 3-hourly air temperature for each simulation year, while all other meteorological forcing fields remain dynamic) (referred to as DRIVE-ST) at 3-hourly temporal resolution and a 0.125° spatial resolution. Both simulations shared initial conditions; differences in multi-year average streamflow and POTF/POTM were then compared.

Land cover data from 1985 and 2015, reclassified using the International Geosphere-Biosphere Programme (IGBP) classification (Schaperow et al. 2021), were used to drive the DRIVE model, assessing the impact of land use/land cover change (LUCC) on runoff and multi-year average streamflow. The sensitivity of the DRIVE model parameters to land cover has been validated (Jiang

删除了: tuning employed

删除了: based on

删除了: variable importance

删除了: daily

删除了: cycle

删除了: the entire

删除了: period

et al. 2020). Subsequently, the TS-DUH was applied to further analyze the influence of LUCC on flood peaks during the routing process. Furthermore, the TS-DUH was used to simulate POT events to separate the impacts of precipitation and LUCC on streamflow. The TS-DUH captures the hydrological response of the catchment by accounting for subsurface characteristics, as well as the spatial and temporal dynamics of precipitation and soil moisture distribution (Hu et al. 2024).

### 3. Study area and data

All instantaneous streamflow data used in this study were resampled to a uniform hourly interval to provide a consistent basis for sub-daily analysis. The selection of gauging stations for this study followed a multi-stage filtering protocol to construct a robust dataset suitable for sub-daily flash flood analysis. An initial screening identified 2492 stations matching the DRT river network (Wu et al. 2014) from the total of 21,344 USGS gauges with an area of less than 3,000 km<sup>2</sup> (Hu et al. 2024). This pool was then subjected to a stringent data completeness assessment. Recognizing the challenges in obtaining complete year-round hourly instantaneous streamflow records, this assessment focused on the May to September period, which typically exhibits high flash flood activity in many parts of CONUS. A seasonal year was deemed complete only if no gap exceeding six consecutive hours of missing streamflow occurred during the entire May-September window. Stations with fewer than 20 complete seasonal years were subsequently excluded. This criterion balances station density with record quality. Once a station met this selection criterion, all available data across its entire period of record were utilized for the trend analysis to maximize the length of the time series. Furthermore, stations identified as experiencing long-term drought conditions or those with an entire year of unobserved data within the potential analysis period were excluded. This rigorous screening process finally resulted in 294 stations, covering both eastern and western regions of CONUS. No interpolation or gap-filling procedures were applied to the retained records. Notably, no pre-screening was conducted to exclude regulated catchments. The focus on small to medium-sized headwater catchments inherently minimizes the influence of major reservoir operations, though minor regulation effects at some stations cannot be entirely ruled out. The drainage areas of these 294 catchments range from 78.8 km<sup>2</sup> to 2985.8 km<sup>2</sup>, with a median of 885.6 km<sup>2</sup> and a mean of 1024.2 km<sup>2</sup>. Most of the resulting data spanned 1990-2020, with the analysis periods aligned with the available streamflow data.

This study utilized the phase 2 of the North American Land Data Assimilation System (NLDAS-2) precipitation product (Xia et al. 2012) for precipitation trends analysis and to force the DRIVE model, at a 0.125° resolution. Soil moisture data in 0-100 cm were also obtained from NLDAS-2. Atmospheric forcing data (air temperature and wind speed) for the DRIVE model and air

删除了: In this study

删除了: ,

删除了: a

删除了: and to focus on the period of

删除了: er

删除了: , station selection prioritized the May to September season

删除了: Completeness was defined by allowing no more than six consecutive hours of missing instantaneous streamflow data, a criterion adopted to balance station density with record quality. ...

删除了: Subsequently, 385 stations were selected that possessed at least 20 years of complete streamflow data during these months. Furthermore

删除了: ,

删除了:


删除了: All instantaneous streamflow data were resampled to hourly intervals.

temperature trend analysis came from NASA's Modern-Era Retrospective Analysis for Research and Applications version 2 (MERRA-2) (Gelaro et al. 2017), at a  $0.5^\circ \times 0.625^\circ$  resolution. [The Global Land-Cover product with Fine Classification system at 30m \(GLC\\_FC30\) \(Zhang et al. 2021\)](#) provided 30 m resolution land cover data for 1985 and 2015. Potential evapotranspiration data were obtained from the Global Land Evaporation Amsterdam Model (GLEAM, version 4.1a) at a  $0.25^\circ$  resolution. Finally, catchment characteristics, including the Digital Elevation Model (DEM) and FDR data consistent with Hu et al. (2024), were used to extract the TS-DUH.

#### 4. Results

##### 4.1 Trends and spatial patterns of heavy precipitation characteristics


Heavy precipitation frequency trends vary across different time scales (Fig. 1). Significant upward trends in 1-hour (AFHP1h) and 6-hour (AFHP6h) heavy precipitation frequency are observed at approximately 67% of the stations. However, this proportion decreases to 30% for 24-hour accumulations (AFHP24h). This discrepancy may be attributed to the inherently localized and intense nature of short-duration heavy precipitation events, which can mask consistent trends at longer timescales. Regional analysis reveals increasing trends in heavy precipitation frequency across the eastern CONUS, suggesting a heightened risk of flash flooding, while western regions show decreasing trends.

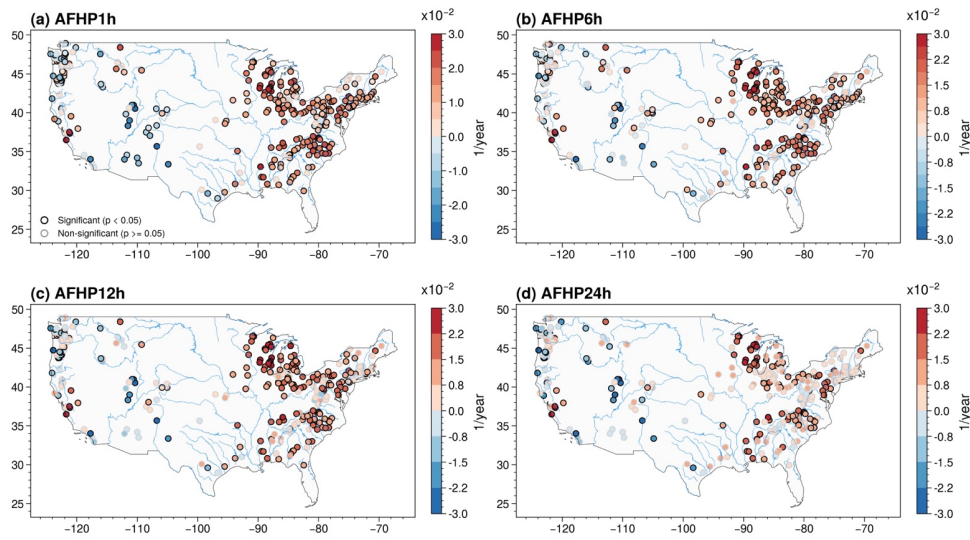

**Figure 1.** Trends in [annual frequency of heavy precipitation \(AFHP\)](#) for AFHP1h (a), AFHP6h (b), AFHP12h (c), and AFHP24h

(d), representing 1-hour, 6-hour, 12-hour, and 24-hour accumulation periods, respectively. Red represents upward trends, while blue indicates downward trends. Areas outlined in black represent trends that are significant at the 5% level (both increases and decreases), with slopes estimated using the Theil-Sen estimator.

Regarding intensity, significant increasing trends are observed in RX1D at 12.6% of stations and in RX6H at 33.7% (Fig. 2). Spatially, the distribution of these intensity trends is largely consistent with the observed changes in heavy precipitation frequency. Specifically, the increase in RX1D and RX6H near the Gulf of Mexico is considerably greater than that of AMP-N, likely due to increased hurricane influences (Balaguru et al. 2023; Emanuel 2005).

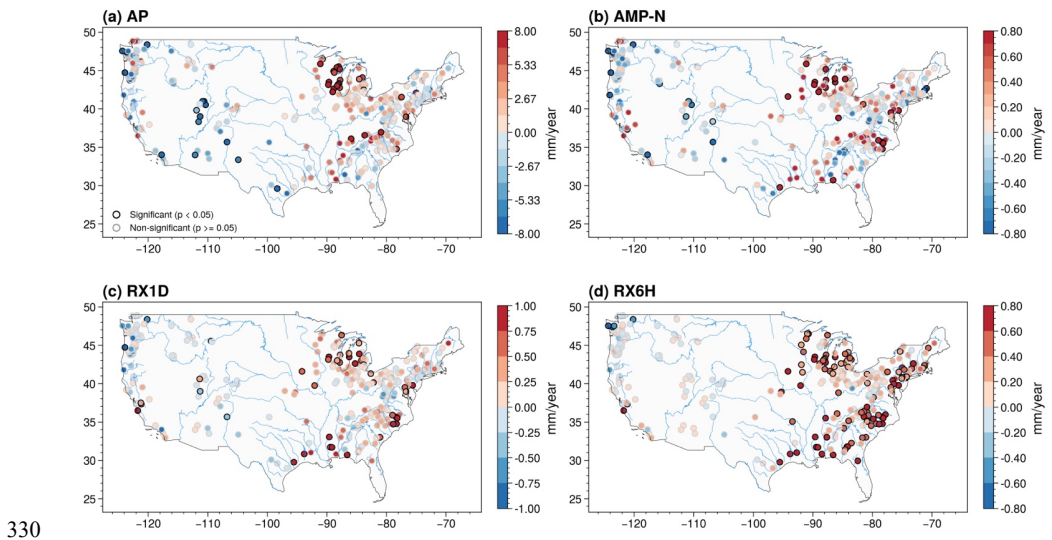


**Figure 2.** Trends in annual total precipitation (AP, a), annual maximum cumulative N-day precipitation (AMP-N, b), annual maximum 1-day precipitation (RX1D, c), and annual maximum 6-hourly precipitation (RX6H, d). The color bar descriptions are consistent with those in Fig. 1.

#### 4.2 Trends and spatial patterns of soil moisture and PET characteristics

Soil moisture (ASM) trends exhibit varied patterns across the studied catchments (Fig. 3a). Approximately 10.9% of catchments show a significant downward trend in ASM, while 3.7% exhibit a significant upward trend. Overall, a decreasing trend in ASM is observed in approximately 65.3% of catchments, with the remaining 34.7% showing an increasing trend, irrespective of

statistical significance. This widespread drying trend in antecedent soil moisture may significantly impact runoff generation. Consequently, a decreasing trend in ASM may act as a dampening effect on flood magnitudes and frequencies. Concurrently, a significant increase in APET was observed in over half of the catchments (58.2%), which is typically associated with rising temperatures and a heightened demand for atmospheric water vapor (Dai et al. 2004). While increased precipitation may have an indirect effect on APET, analysis reveals a mean correlation of -0.35 between AP and APET across all catchments, and -0.39 in the eastern region (east of 100°W), suggesting a weak inverse relationship. Increased precipitation generally leads to higher humidity and lower vapor pressure deficit (VPD), reducing atmospheric demand for water. Nevertheless, the overall effect also depends on local conditions, including air temperature, wind speed, and radiation (Li et al. 2022). The combined effect of increasing APET and overall decreasing soil moisture highlights a shifting hydrological regime that could influence flood processes.

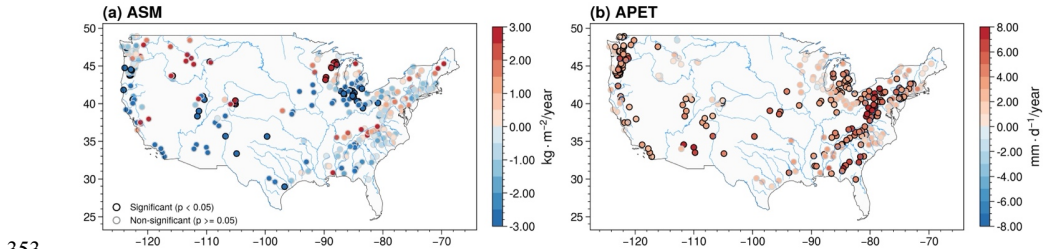


**Figure 3.** Trends in annual total soil moisture (ASM, a), and annual total potential evapotranspiration (APET, b). The color bar descriptions are consistent with those in Fig. 1.

### 4.3 Trends and spatial patterns of flash flood characteristics

Analysis of flash flood frequency and intensity trends reveals considerable spatial variability among catchments (Fig. 4). 17.3% of catchments exhibit a significant upward trend in POTF, increasing by an average of 0.5 events per decade; conversely, 5.1% show a significant downward trend, with an average decline of 0.4 events per decade. AMF displays limited statistically significant changes in most catchments, only 7.1% exhibit a significant increase (average  $2.5 \text{ m}^3 \text{ s}^{-1} \text{ decade}^{-1}$ ), and 1.4% show a significant decrease (average  $3.3 \text{ m}^3 \text{ s}^{-1} \text{ decade}^{-1}$ ). Additionally, 3.7% of catchments exhibit a significant increase in POTM, 3.1% show a significant decrease. Approximately 6.5% of catchments show a significant upward trend in POTFL, with 3.4% exhibiting a significant downward trend. Moreover, MDF shows a significant increase in 4.1% of catchments (average 1.5 hours/decade), while showing a significant decrease in only 0.3% (average 0.12 hours/decade). The observed MDF is generally on the order of

tens of hours (median 21 hours). While Section 4.1 revealed that approximately 67% of stations experienced significant upward trends in AFHP6h, only 23% of catchments exhibited a corresponding significant increase in POTF, suggesting complex catchment-scale interactions among precipitation, temperature, and land cover. Furthermore, statistical trends for catchments with drainage areas less than 1000 km<sup>2</sup> (169 stations) showed only minor numerical differences compared to the overall trends.

Regionally, the spatial distribution of POTF trends mirrors the distribution of heavy precipitation frequency, consistent with our previous global-scale study (Yan et al. 2020) demonstrating a stronger correlation between flood frequency and daily precipitation frequency, especially at mid- to high-range daily frequencies. While heavy precipitation frequency significantly increased across much of the eastern CONUS (Fig. 1), significant POTF increases were concentrated near the Great Lakes and in the Appalachian Mountains (Fig. 4). Conversely, a limited number of catchments exhibit a significant decrease in POTF in the western CONUS, consistent with the reduced heavy precipitation trends observed in Section 4.1. The changes in flash flood intensity (AMF and POTM) exhibit a more mixed pattern, with POTM showing a higher number of declining catchments compared to AMF. The upward trend in MDF is most pronounced in the Great Lakes and northwestern CONUS. This is likely linked to warmer temperatures accelerating snowmelt, leading to more frequent and prolonged spring floods. The combination of increased precipitation, winter snowpack, and spring snowmelt in the Great Lakes region extends flood duration. Similarly, in the mountainous Northwest, combined snow and rain prolong spring flood events.

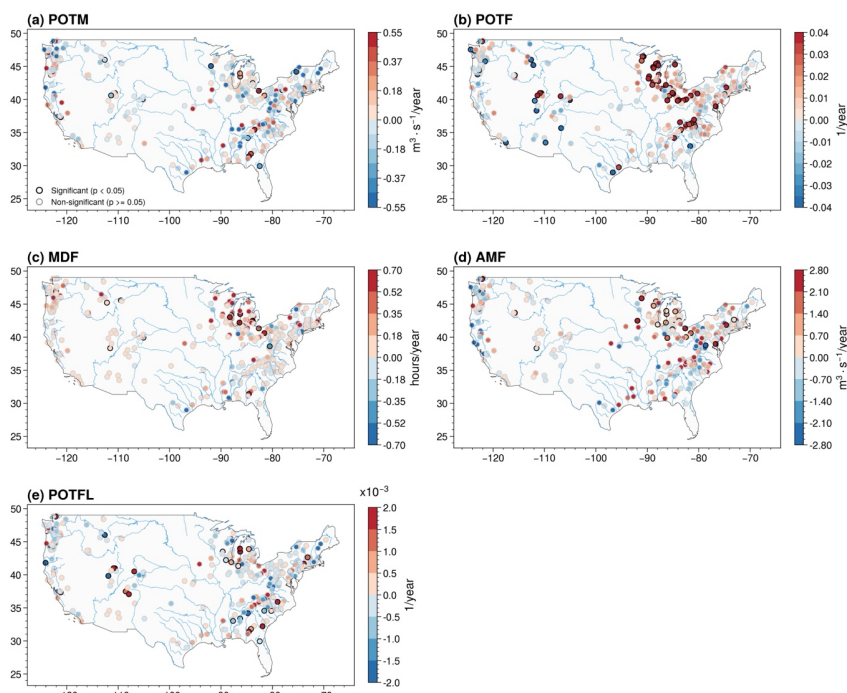

**Figure 4.** Trends in **Peaks-over-threshold magnitude (POTM, a)**, **Peaks-over-threshold frequency (POTF, b)**, **mean duration of flood occurrence (MDF, c)**, **annual maximum flow (AMF, d)** and **Peaks-over-threshold flashiness (POTFL, e)**. The color bar descriptions are consistent with those in Fig. 1.

#### 4.4 Identifying major drivers of AMF trends using random forest regression

Examination of the cumulative MDI curves across all catchments reveals a median inflection point at approximately 22% of cumulative importance. A conservative threshold of 15% was therefore adopted to retain only the strongest contributors. Random Forest regression analysis indicates that precipitation is the dominant driver of AMF trends across the studied catchments. Approximately 63.9% of the catchments show that AMF trends are primarily driven by precipitation. However, land cover change and potential evapotranspiration/temperature can also play a significant role in certain catchments, with about 26.2% of catchments influenced by both precipitation and temperature (P&T). A complete breakdown of all driver categories is provided in Table S1. Spatially, P&T-dominated catchments tend to be more prevalent in the western CONUS, whereas P-dominated catchments are proportionally more concentrated in the humid eastern CONUS. To further distinguish these two groups, we

删除了: (

删除了:

删除了: (

删除了:

删除了: (

删除了:

删除了: (

删除了:


删除了: (

删除了: most frequently identified

删除了:

删除了: (whether increasing or stable)

compare their baseline climate and land cover characteristics. Compared to the 188 P-dominated catchments, the 77 P&T-dominated catchments receive approximately 17% less mean annual precipitation (median of 982 mm versus 1184 mm) and are cooler on average (14.5°C versus 15.9°C). Despite comparable warming rates (0.269 and 0.291 °C decade<sup>-1</sup>), similar rates of soil moisture decline, and little difference in land cover composition between the two groups, the lower precipitation in P&T-dominated catchments means that temperature-driven increases in evaporative demand consume a proportionally larger share of the water budget, amplifying the sensitivity of runoff generation to warming. Rising air temperature elevates the atmospheric vapor pressure deficit, enhancing evapotranspiration and depleting soil moisture more rapidly during inter-storm periods. The drier antecedent conditions, consistent with the widespread decline in ASM documented in Section 4.3, increase available soil storage at storm onset so that a larger fraction of rainfall infiltrates rather than generating direct runoff, thereby attenuating flood peaks.

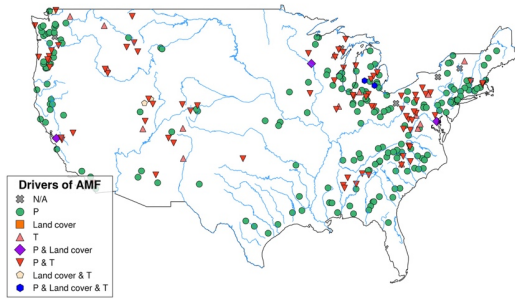

**Figure 5.** Spatial distribution of the drivers influencing annual maximum flow (AMF) trends. Colors indicate the dominant drivers of AMF trends: precipitation (P, as a green circle), land cover (as an orange square), temperature (T, as a pink triangle), and their combinations. Gray points indicate areas where no significant driver has been identified (N/A).


#### 4.5 The impact of air temperature changes on streamflow

Fig. 6 illustrates the relationship between streamflow (Q), precipitation (P), and temperature (T). The scaling curves for moderate- and high-intensity flash floods, defined by the 90th percentile threshold, are presented for three regions: the entire CONUS, the non-arid regions of CONUS, and the arid regions of CONUS (Beck et al. 2018). Limitations in sample size preclude a detailed analysis across hydroclimatic zones, and events with temperature exceeding 30°C are excluded. P generally increases between 5°C and 30°C during both moderate- and high-intensity flood events, except in arid regions. For moderate events (below the 90th percentile), while P and Q increase with T, Q declines between approximately 25°C and 30°C across the CONUS, despite minimal


precipitation change. This decline accounts for approximately 11.6% of the total flood events (12852) across the CONUS. This reduction might stem from enhanced evapotranspiration and increased soil water retention. Conversely, for high-intensity events (above the 90th percentile), Q and P generally increase with T. Between 25°C and 30°C, high peak flows persist despite stable or slightly reduced precipitation, likely due to concentrated extreme rainfall and efficient runoff.

In order to further quantify the impact of temperature changes, we compare multi-year average streamflows (1985-2015) from dynamic (DRIVE-DT) and static (DRIVE-ST) temperature scenarios (Fig. 7). Under this experimental design where only temperature varies while precipitation remains identical, this comparison reveals that 67.0% of catchments experience a flow change between -6% and 0%, while 16.7% experience a decrease exceeding -8% (Fig. 7b). DRIVE model simulations indicate that from 1981 to 2015-2020, rising temperatures lead to a 3.6% reduction in catchments with significantly increased POTF and an 8.0% reduction in those with significantly increased POTM in annual averages.

删除了: T

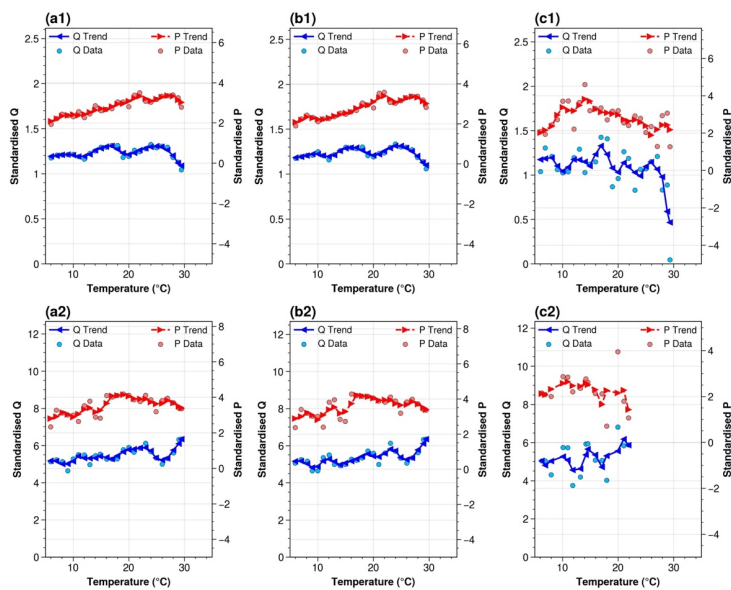


**Figure 6.** Scaling curves of standardized peak flow (Q) and precipitation (P) with temperature for Peaks-over-threshold (POT) events below (a1, b1, c1) and above (a2, b2, c2) the 90th percentile across CONUS, the non-arid regions of CONUS, and the arid regions of CONUS. Circular markers highlight the 99th percentile, and solid lines depict the moving average.

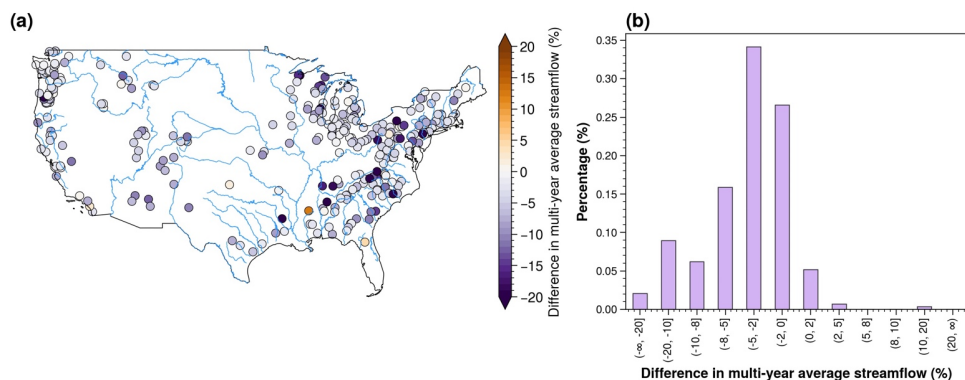

**Figure 7.** (a) Spatial distribution of the percentage difference in multi-year average streamflow (1985-2015) between dynamic (DRIVE-DT; using observed temperature from 1981-2020) and static temperature (DRIVE-ST; recycling the complete 1981 3-hourly air temperature series for each simulation year) scenarios (calculated as  $((\text{DRIVE-DT} - \text{DRIVE-ST}) / \text{DRIVE-ST}) * 100\%$ ); (b) histogram showing the frequency distribution of the percentage differences in multi-year average flow.

#### 4.6 Impact of land cover changes on streamflow between 1985 and 2015

Analysis of land cover change between 1985 and 2015 reveals that urban areas comprised an average of 3.6% across all study stations by 2015. Forest cover is significantly greater than urban areas, averaging 64.4%. Most study areas are mountainous upstream catchments with minimal urban land and predominantly forest cover. Overall land cover change was minimal, with the total area undergoing any class transition averaging only 3.3%. The primary net shifts were urban expansion (from 2.8% to 3.6%) and a slight decline in forest cover (from 65.2% to 64.4%), while all other classes changed by less than 0.3%. DRIVE model simulations of land cover change between 1985 and 2015 (Fig. 8a, b) show that the multi-year average flow changes at 90.8% of observation points fall within  $\pm 3\%$ , indicating minimal impact compared to temperature variations (Section 4.5). Similarly, 82.7% of gauges show TS-DUH peak changes between  $\pm 5\%$  (Fig. 8c, d), suggesting relatively stable variation. However, some gauges that show increases exceeding 9% are influenced by various factors such as snowmelt or urban expansion. Overall, the model suggests that temperature changes have a greater impact than land cover changes.

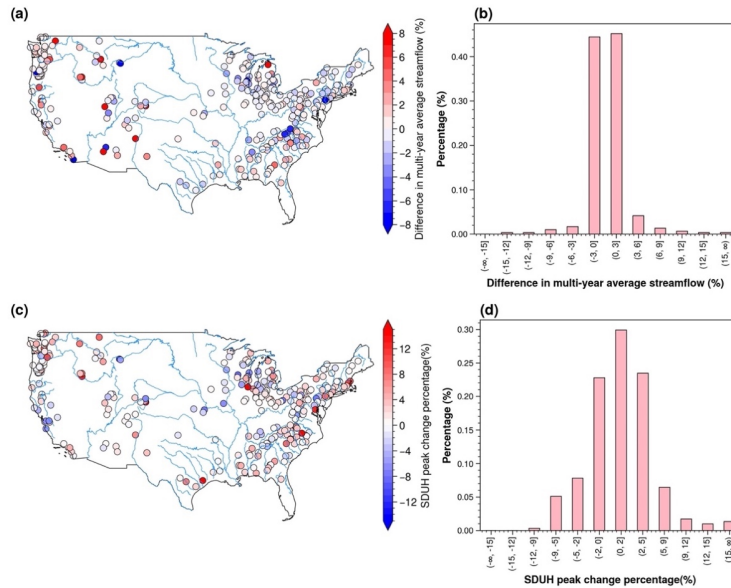

**Figure 8.** (a) Spatial distribution of percentage differences in multi-year average flow between 1985 and 2015 land cover scenarios, modelled by the DRIVE model; (b) Frequency distribution of percentage differences in multi-year average flow; (c) Spatial distribution of TS-DUH peak change percentage between 1985 and 2015; (d) Frequency distribution of TS-DUH peak change percentage.

## 5. Discussion and conclusions

This study analyzed long-term (30 years) USGS hourly streamflow data from small to medium-sized catchments ( $\leq 3000 \text{ km}^2$ ) to assess historical trends in flash flood intensity and frequency across the CONUS. It investigated the influences of precipitation, temperature, and land cover change on streamflow by employing multiple methodologies, including the DRIVE, TS-DUH, and random forest regression models, to quantitatively attribute their main drivers and impacts on flash floods. Specifically, we quantitatively assessed the modulatory effects of climate warming on flash flood occurrences and the possible impacts of land cover changes, providing a mechanistic understanding of the primary drivers behind changes in flash flood frequency and intensity. The main conclusions are as follows:

(1) Observations reveal an increase in heavy precipitation events, but this change does not uniformly translate to increase in flood frequency and intensity; 17.3% of catchments show significant increase in flash flood frequency ( $p < 0.05$ ), and 6.5% (3.7%) show

485 significant increase in POTFL (POTM). Specifically, while approximately 67% of catchments exhibit a significant upward trend  
486 in AFHP6h, only about 23% of these same catchments show a corresponding significant increase in POTF.

487 (2) In our model experiments isolating temperature effects, rising temperature tends to decrease both the magnitude and frequency  
488 for general floods. DRIVE model simulations demonstrate that since the 1980s, there is a 3.6% reduction in catchments with  
489 significantly increased POTF and an 8.0% reduction in those with significantly increased POTM.

490 (3) Land cover changes across the CONUS (1985-2015) are modest overall. DRIVE model simulations indicate that the multi-  
491 year average flow changes are within  $\pm 3\%$  at 90.8% of the catchments.

492  
493 The limited translation of widespread precipitation intensification into proportional flood increases likely reflects the combined  
494 buffering effects of declining antecedent soil moisture, warming-enhanced evapotranspiration, and catchment storage capacity.  
495 In order to examine whether larger catchments show stronger associations with longer-duration precipitation, we computed  
496 Spearman rank correlations between each precipitation index and flood metrics, stratified into four drainage-area classes (<500,  
497 500-1000, 1000-2000, and >2000 km<sup>2</sup>). Median correlations remain stable across size classes for all three flood metrics, with  
498 ranges across groups typically below 0.05 and no systematic strengthening of longer duration indices in larger catchments (Fig.  
499 S1). Sensitivity analysis across alternative thresholds ( $p < 0.01, 0.05, 0.10$ ) further confirms that the asymmetry between increasing  
500 and decreasing trends is consistent regardless of the threshold adopted (Table S2).

501  
502 Several caveats related to statistical robustness merit discussion. Applying trend tests across 294 catchments and multiple  
503 variables introduces the potential for false positives; approximately 15 spurious rejections per variable would be expected at  $p =$   
504 0.05 under the null hypothesis. The Benjamini-Hochberg FDR correction was therefore applied (Table S3). The heavy  
505 precipitation frequency trends prove highly robust, with 190 of 195 significant AFHP6h upward trends surviving correction at  $q$   
506  $= 0.05$ , and 22 of 51 POTF upward trends remaining significant. Regarding process-level limitations, a long-term decline in ASM  
507 indicates a shift toward drier antecedent conditions prior to flood-producing events. However, ASM cannot fully capture the role  
508 of antecedent soil moisture in runoff generation. Event-scale attribution linking antecedent moisture windows to individual flood  
509 responses therefore warrants further investigation. Furthermore, the study did not consider the evolution of river channels.

510  
511 The influence of land cover change on flood intensity varies markedly with the degree of urbanization. Since most catchments  
512 are located in the less urbanized upstream mountainous areas, the impact of land cover change on flood intensity tends to be low.

删除了: R

删除了: in

删除了: region

删除了: relatively small.

删除了: 3

删除了: These findings provide valuable insights for flash flood hazard management, particularly regarding the impact of climate change. However, several caveats should also be noted. The study did not consider the evolution of river channels. The changes in flash flood/heavy precipitation frequency are more significant than those in intensity. This discrepancy may be due to the differences in statistical methods applied (Mann-Kendall test and Poisson regression) and the differences in study regions and datasets, which warrants further investigation. Also, s

528 However, in the rapidly urbanizing ~~catchments, the impact can be substantial. For example, in the Peachtree Creek catchment in~~  
529 Atlanta (Debbage and Shepherd 2018), ~~the~~ impervious surface ~~fraction increased from 45.2% in 1985 to 54.8% in 2015,~~ leading  
530 to a 20% rise ~~(from 57.8 m<sup>3</sup> s<sup>-1</sup> to 69.2 m<sup>3</sup> s<sup>-1</sup>)~~ in TS-DUH peak flow. This highlights that land cover changes can significantly  
531 influence flood intensity in certain areas.

删除了: regions

删除了: such as

删除了: an increase in

删除了: s by 10% between 1985 and 2015

删除了: can

533 ~~Finally, several data and modeling uncertainties should be acknowledged. Data quality, record length, and completeness influence~~  
534 ~~the reliability of trend analyses. Although the May-to-September window was used solely to screen data completeness at the~~  
535 ~~station level, this criterion may favour catchments whose records are most complete during the warm season. Consequently, it~~  
536 ~~may underrepresent basins where rain-on-snow or autumn extratropical storms contribute appreciably to flash flood activity. In~~  
537 ~~the RF attribution, inter-correlated predictors share MDI scores, which dilutes individual variable importance. Aggregating~~  
538 ~~importances into three broad driver categories before catchment classification renders within-category redistribution~~  
539 ~~inconsequential. Cross-category redistribution cannot be excluded but is expected to be minor given the distinct physical nature~~  
540 ~~of the three driver groups. Furthermore, the 0.125° resolution of NLDAS-2 provides limited grid coverage for the smallest~~  
541 ~~catchments, potentially smoothing localized convective peaks and introducing uncertainty in extreme precipitation frequency~~  
542 ~~estimates. This constraint is less consequential for the controlled DRIVE experiments, where identical precipitation forcing is~~  
543 ~~applied across scenarios and only the relative response to temperature or land cover perturbations is compared. Finally, we~~  
544 ~~acknowledge that the inherent limitations of the hydrological models and the uncertainties arising from different data sources~~  
545 ~~warrant further parameter calibration.~~

删除了: Additionally, d

## 547 Author contributions

548 Conceptualization: YH and HW; Methodology: YH and HW; Data curation: YH, ZH, and CL; Formal analysis: YH; Writing –  
549 original draft: YH; Writing – review & editing: HW, YM, AW, and BS.

## 551 Acknowledgments

552 This study was supported by the National Key R&D Program of China (Grants: 2024YFC3013302), the National Natural Science  
553 Foundation of China (Grants: 42275019, 42088101), CMA’s Open Fund Project for Heavy Rain of China (Grants: BYKJ2024Z10)  
554 and also partially supported by Hainan R&D Program (CXFZ2022J074, SCSF202203).

移动了(插入) [1]

删除了: The study did not consider the evolution of river channels. These findings provide valuable insights for flash flood hazard management, particularly regarding the impact of climate change. However, several caveats should also be noted. The hydrological models have limitations as well in evaluating the impact of rising temperature on floods of different magnitudes, pending upon further parameter calibration.<sup>43</sup>

## References

- Ahmadalipour, A., and H. Moradkhani, 2019: A data-driven analysis of flash flood hazard, fatalities, and damages over the CONUS during 1996-2017. *Journal of Hydrology*, **578**.
- Alexander, L. V., and Coauthors, 2006: Global observed changes in daily climate extremes of temperature and precipitation. *Journal of Geophysical Research-Atmospheres*, **111**.
- Allan, R. P., and B. J. Soden, 2008: Atmospheric warming and the amplification of precipitation extremes. *Science*, **321**, 1481-1484.
- Anderson, B. J., L. J. Slater, S. J. Dadson, A. G. Blum, and I. Prosdocimi, 2022: Statistical Attribution of the Influence of Urban and Tree Cover Change on Streamflow: A Comparison of Large Sample Statistical Approaches. *Water Resources Research*, **58**.
- Archfield, S. A., R. M. Hirsch, A. Viglione, and G. Bloeschl, 2016: Fragmented patterns of flood change across the United States. *Geophysical Research Letters*, **43**, 10232-10239.
- Balaguru, K., and Coauthors, 2023: Increased US coastal hurricane risk under climate change. *Science Advances*, **9**.
- Barendrecht, M. H., and Coauthors, 2024: Exploring drought-to-flood interactions and dynamics: A global case review. *Wiley Interdisciplinary Reviews-Water*, **11**.
- Beck, H. E., N. E. Zimmermann, T. R. McVicar, N. Vergopolan, A. Berg, and E. F. Wood, 2018: Present and future Köppen-Geiger climate classification maps at 1-km resolution. *Scientific Data*, **5**.
- Bergstra, J., R. Bardenet, Y. Bengio, and B. Kégl, 2011: Algorithms for hyper-parameter optimization. *Advances in neural information processing systems*, **24**.
- Bloeschl, G., and Coauthors, 2017: Changing climate shifts timing of European floods. *Science*, **357**, 588-590.
- Blum, A. G., P. J. Ferraro, S. A. Archfield, and K. R. Ryberg, 2020: Causal Effect of Impervious Cover on Annual Flood Magnitude for the United States. *Geophysical Research Letters*, **47**.
- Borga, M., M. Stoffel, L. Marchi, F. Marra, and M. Jakob, 2014: Hydrogeomorphic response to extreme rainfall in headwater systems: Flash floods and debris flows. *Journal of Hydrology*, **518**, 194-205.
- Breiman, L., 2001: Random forests. *Machine Learning*, **45**, 5-32.
- Brunner, M. I., D. L. Swain, R. R. Wood, F. Willkofer, J. M. Done, E. Gilleland, and R. Ludwig, 2021: An extremeness threshold determines the regional response of floods to changes in rainfall extremes. *Communications Earth & Environment*, **2**.
- Carmen Llasat, M., R. Marcos, M. Turco, J. Gilabert, and M. Llasat-Botija, 2016: Trends in flash flood events versus convective precipitation in the Mediterranean region: The case of Catalonia. *Journal of Hydrology*, **541**, 24-37.

598 Cherkauer, K. A., L. C. Bowling, and D. P. Lettenmaier, 2003: Variable infiltration capacity cold land process model updates.  
599 *Global and Planetary Change*, **38**, 151-159.

600 Dai, A., K. E. Trenberth, and T. T. Qian, 2004: A global dataset of Palmer Drought Severity Index for 1870-2002: Relationship  
601 with soil moisture and effects of surface warming. *Journal of Hydrometeorology*, **5**, 1117-1130.

602 De Niel, J., and P. Willems, 2019: Climate or land cover variations: what is driving observed changes in river peak flows? A data-  
603 based attribution study. *Hydrology and Earth System Sciences*, **23**, 871-882.

604 Debbage, N., and J. M. Shepherd, 2018: The Influence of Urban Development Patterns on Streamflow Characteristics in the  
605 Charlanta Megaregion. *Water Resources Research*, **54**, 3728-3747.

606 Do, H. X., S. Westra, and M. Leonard, 2017: A global-scale investigation of trends in annual maximum streamflow. *Journal of*  
607 *Hydrology*, **552**, 28-43.

608 Emanuel, K., 2005: Increasing destructiveness of tropical cyclones over the past 30 years. *Nature*, **436**, 686-688.

609 Frans, C., E. Istanbuloglu, V. Mishra, F. Munoz-Arriola, and D. P. Lettenmaier, 2013: Are climatic or land cover changes the  
610 dominant cause of runoff trends in the Upper Mississippi River Basin? *Geophysical Research Letters*, **40**, 1104-1110.

611 Gaume, E., and M. Borga, 2008: Post-flood field investigations in upland catchments after major flash floods: proposal of a  
612 methodology and illustrations. *Journal of Flood Risk Management*, **1**, 175-189.

613 Gelaro, R., and Coauthors, 2017: The Modern-Era Retrospective Analysis for Research and Applications, Version 2 (MERRA-  
614 2). *Journal of Climate*, **30**, 5419-5454.

615 Gourley, J. J., and Coauthors, 2013: A Unified Flash Flood Database across the United States. *Bulletin of the American*  
616 *Meteorological Society*, **94**, 799-805.

617 Hall, J., and Coauthors, 2014: Understanding flood regime changes in Europe: a state-of-the-art assessment. *Hydrology and Earth*  
618 *System Sciences*, **18**, 2735-2772.

619 Hapuarachchi, H. A. P., Q. J. Wang, and T. C. Pagano, 2011: A review of advances in flash flood forecasting. *Hydrological*  
620 *Processes*, **25**, 2771-2784.

621 Hodgkins, G. A., R. W. Dudley, S. A. Archfield, and B. Renard, 2019: Effects of climate, regulation, and urbanization on historical  
622 flood trends in the United States. *Journal of Hydrology*, **573**, 697-709.

623 Hou, A. Y., and Coauthors, 2014: The global precipitation measurement mission. *Bulletin of the American Meteorological Society*,  
624 **95**, 701-+.

625 Hu, Y., and Coauthors, 2024: A time-space varying distributed unit hydrograph (TS-DUH) for operational flash flood forecasting

using publicly-available datasets. *Journal of Hydrology*, **642**, 131785.

Huang, Z., H. Wu, R. F. Adler, G. Schumann, J. J. Gourley, A. Kettner, and N. Nanding, 2021: Multisourced Flood Inventories over the Contiguous United States for Actual and Natural Conditions. *Bulletin of the American Meteorological Society*, **102**, E1133-E1149.

Huang, Z., and Coauthors, 2023: Paired Satellite and NWP Precipitation for Global Flood Forecasting. *Journal of Hydrometeorology*, **24**, 2191-2205.

Ivancic, T. J., and S. B. Shaw, 2015: Examining why trends in very heavy precipitation should not be mistaken for trends in very high river discharge. *Climatic Change*, **133**, 681-693.

Jiang, L., H. Wu, J. Tao, J. S. Kimball, L. Alfieri, and X. Chen, 2020: Satellite-based evapotranspiration in hydrological model calibration. *Remote Sensing*, **12**, 428.

Jiang, S., E. Bevacqua, and J. Zscheischler, 2022: River flooding mechanisms and their changes in Europe revealed by explainable machine learning. *Hydrology and Earth System Sciences*, **26**, 6339-6359.

Kemter, M., N. Marwan, G. Villarini, and B. Merz, 2023: Controls on Flood Trends Across the United States. *Water Resources Research*, **59**.

Kendall, M. G., 1948: Rank correlation methods.

Khajehei, S., A. Ahmadiipour, W. Shao, and H. Moradkhani, 2020: A Place-based Assessment of Flash Flood Hazard and Vulnerability in the Contiguous United States. *Scientific Reports*, **10**.

Kirschbaum, D. B., and Coauthors, 2017: NASA's remotely sensed precipitation: A reservoir for applications users. *Bulletin of the American Meteorological Society*, **98**, 1169-1184.

Lang, M., T. Ouarda, and B. Bobée, 1999: Towards operational guidelines for over-threshold modeling. *Journal of Hydrology*, **225**, 103-117.

Lenderink, G., and E. van Meijgaard, 2010: Linking increases in hourly precipitation extremes to atmospheric temperature and moisture changes. *Environmental Research Letters*, **5**.

Li, S., and Coauthors, 2022: Attribution of global evapotranspiration trends based on the Budyko framework. *Hydrology and Earth System Sciences*, **26**, 3691-3707.

Liang, X., D. P. Lettenmaier, and E. F. Wood, 1996: One-dimensional statistical dynamic representation of subgrid spatial variability of precipitation in the two-layer variable infiltration capacity model. *Journal of Geophysical Research*, **101**, 21403-21422.

654 Liu, J., S. Feng, X. Gu, Y. Zhang, H. E. Beck, J. Zhang, and S. Yan, 2022: Global changes in floods and their drivers. *Journal of*  
 655 *Hydrology*, 128553-128553.

656 Mallakpour, I., and G. Villarini, 2015: The changing nature of flooding across the central United States. *Nature Climate Change*,  
 657 **5**, 250-254.

658 Mann, H. B., 1945: Nonparametric tests against trend. *Econometrica: Journal of the econometric society*, 245-259.

659 Merz, B., S. Vorogushyn, S. Uhlemann, J. Delgado, and Y. Hundecha, 2012: *<i>HESS Opinions</i>* 'More efforts and scientific  
 660 rigour are needed to attribute trends in flood time series'. *Hydrology and Earth System Sciences*, **16**, 1379-1387.

661 Merz, B., and Coauthors, 2021: Causes, impacts and patterns of disastrous river floods. *Nature Reviews Earth & Environment*, **2**,  
 662 592-609.

663 Milly, P. C. D., J. Betancourt, M. Falkenmark, R. M. Hirsch, Z. W. Kundzewicz, D. P. Lettenmaier, and R. J. Stouffer, 2008:  
 664 Climate change - Stationarity is dead: Whither water management? *Science*, **319**, 573-574.

665 Nanding, N., and Coauthors, 2021: Assessment of Precipitation Error Propagation in Discharge Simulations over the Contiguous  
 666 United States. *Journal of Hydrometeorology*, **22**, 1987-2008.

667 Saharia, M., P.-E. Kirstetter, H. Vergara, J. J. Gourley, Y. Hong, and M. Giroud, 2017: Mapping Flash Flood Severity in the United  
 668 States. *Journal of Hydrometeorology*, **18**, 397-411.

669 Schaperow, J. R., D. Li, S. A. Margulis, and D. P. Lettenmaier, 2021: A near-global, high resolution land surface parameter dataset  
 670 for the variable infiltration capacity model. *Scientific Data*, **8**.

671 Sharma, A., C. Wasko, and D. P. Lettenmaier, 2018: If Precipitation Extremes Are Increasing, Why Aren't Floods? *Water*  
 672 *Resources Research*, **54**, 8545-8551.

673 Slater, L. J., and G. Villarini, 2016: Recent trends in US flood risk. *Geophysical Research Letters*, **43**, 12428-12436.

674 Slater, L. J., and Coauthors, 2021: Nonstationary weather and water extremes: a review of methods for their detection, attribution,  
 675 and management. *Hydrology and Earth System Sciences*, **25**, 3897-3935.

676 Wagener, T., and Coauthors, 2010: The future of hydrology: An evolving science for a changing world. *Water Resources Research*,  
 677 **46**.

678 Wang, A., Y. Miao, X. Kong, and H. Wu, 2022: Future Changes in Global Runoff and Runoff Coefficient From CMIP6 Multi-  
 679 Model Simulation Under SSP1-2.6 and SSP5-8.5 Scenarios. *Earths Future*, **10**.

680 Wang, D., and M. Hejazi, 2011: Quantifying the relative contribution of the climate and direct human impacts on mean annual  
 681 streamflow in the contiguous United States. *Water Resources Research*, **47**.

Wasko, C., and A. Sharma, 2017: Global assessment of flood and storm extremes with increased temperatures. *Scientific Reports*, **7**.

Wasko, C., and R. Nathan, 2019: Influence of changes in rainfall and soil moisture on trends in flooding. *Journal of Hydrology*, **575**, 432-441.

Westra, S., L. V. Alexander, and F. W. Zwiers, 2013: Global Increasing Trends in Annual Maximum Daily Precipitation. *Journal of Climate*, **26**, 3904-3918.

Winkler, K., R. Fuchs, M. Rounsevell, and M. Herold, 2021: Global land use changes are four times greater than previously estimated. *Nature Communications*, **12**.

Wu, H., J. S. Kimball, N. Mantua, and J. Stanford, 2011: Automated upscaling of river networks for macroscale hydrological modeling. *Water Resources Research*, **47**.

Wu, H., R. F. Adler, Y. Hong, Y. Tian, and F. Policelli, 2012a: Evaluation of Global Flood Detection Using Satellite-Based Rainfall and a Hydrologic Model. *Journal of Hydrometeorology*, **13**, 1268-1284.

Wu, H., R. F. Adler, Y. Tian, G. Gu, and G. J. Huffman, 2017: Evaluation of Quantitative Precipitation Estimations through Hydrological Modeling in IFloodS River Basins. *Journal of Hydrometeorology*, **18**, 529-553.

Wu, H., J. S. Kimball, H. Li, M. Huang, L. R. Leung, and R. F. Adler, 2012b: A new global river network database for macroscale hydrologic modeling. *Water Resources Research*, **48**.

Wu, H., R. F. Adler, Y. Tian, G. J. Huffman, H. Li, and J. Wang, 2014: Real-time global flood estimation using satellite-based precipitation and a coupled land surface and routing model. *Water Resources Research*, **50**, 2693-2717.

Wu, H., J. S. Kimball, N. Zhou, L. Alfieri, L. Luo, J. Du, and Z. Huang, 2019: Evaluation of real-time global flood modeling with satellite surface inundation observations from SMAP. *Remote Sensing of Environment*, **233**.

Xia, Y., and Coauthors, 2012: Continental-scale water and energy flux analysis and validation for North American Land Data Assimilation System project phase 2 (NLDAS-2): 2. Validation of model-simulated streamflow. *Journal of Geophysical Research-Atmospheres*, **117**.

Yan, Y., and Coauthors, 2020: Climatology and Interannual Variability of Floods during the TRMM Era (1998-2013). *Journal of Climate*, **33**, 3289-3305.

Yin, J., P. Gentile, S. Zhou, S. C. Sullivan, R. Wang, Y. Zhang, and S. Guo, 2018: Large increase in global storm runoff extremes driven by climate and anthropogenic changes. *Nature Communications*, **9**.

Yuan, X., Y. M. Wang, P. Ji, P. L. Wu, J. Sheffield, and J. A. Otkin, 2023: A global transition to flash droughts under climate

change. *Science*, **380**, 187-191.

Zhang, S., and Coauthors, 2022: Reconciling disagreement on global river flood changes in a warming climate. *Nature Climate Change*, **12**, 1160-+.

Zhang, X., L. Liu, X. Chen, Y. Gao, S. Xie, and J. Mi, 2021: GLC\_FCS30: global land-cover product with fine classification system at 30m using time-series Landsat imagery. *Earth System Science Data*, **13**, 2753-2776.