

Measurement of turbulence energy dissipation rate by a standalone high-resolution Doppler lidar

Abdul Haseeb Syed¹, Jakob Mann¹, and Mohammadreza Manami^{1,2}

¹DTU Wind and Energy Systems, Roskilde, Denmark

²Lidar Division, Lumibird SA, Lannion, France

Correspondence: Jakob Mann (jmsq@dtu.dk)

Abstract. A second-order ~~structure-function-model-for-the-lidar-line-of-sight~~ structure-function model for lidar line-of-sight (LOS) velocities is proposed. This ~~structure-function~~ structure-function model corrects for ~~the-turbulence-filtering-due-to-the-turbulence-filtering-caused-by~~ probe volume averaging ~~effect~~ using a Gaussian weighting function. The structure function model corrects for both spatial and temporal averaging effects. It takes advantage of the high range gate resolution of the BEAM 6x pulsed lidar used in this study, i.e., 3m, to effectively resolve the inertial subrange. The structure function model is then used to obtain the turbulence energy dissipation rate (ε) by fitting ~~the-model-over-it-to~~ lidar measurements in the inertial subrange. Unlike previously presented ~~structure-function-methods-to-evaluate~~ structure-function methods for evaluating ε in the literature, this method has a weaker dependence on the turbulence length scale. The estimated ε values ~~obtained~~ from the lidar are compared with ~~the-values-obtained-those~~ from ultrasonic anemometers at three heights: 103 m, 175 m, and 241 m. The comparison results show an excellent correlation between the two sets, with a Pearson correlation coefficient (ρ) ~~value-of-more-than-exceeding~~ 0.9 at-across all three heights. The observed bias was also ~~found-to-be-very-small,-i.e.,-very-small:~~ more than 50% of all ~~the-lidar-measured~~ ε values were ~~found~~ within $\pm 20\%$ of the sonic-measured values. This method relies on ~~the-proper-accurate~~ detection of the inertial subrange; hence, during-under very stable atmospheric conditions, the model fitting-on-fit-to the measurements produced relatively ~~larger-errors-,large-errors~~ due to the difficulty in-of detecting the inertial subrange. Applications of this method include, but are not limited to, quantifying turbulence in the wake of aircraft, understanding pollutant dispersion in urban environments, and ~~wind-resource-and-turbulence-assessment-in-areas~~ assessing wind resources and turbulence in areas or at heights where erecting a meteorological mast is not possible.

1 Introduction

Turbulence measurements hold paramount significance in atmospheric sciences and renewable energy applications. These measurements are used to understand and quantify aerosols, heat, moisture, and momentum in the atmospheric boundary layer (Stull, 1988). In the troposphere, turbulence governs energy and momentum exchange between the Earth's surface and the air above it. Turbulence measurements are also used to monitor and understand air quality, pollutant dispersion, and heat dynamics in urban meteorology. Atmospheric turbulence is usually measured with *in situ* instruments ~~such-as-a-hot-wire-anemometer-or-a-sonic-anemometer-~~ such as sonic anemometers, that can be installed on a meteorological mast. These instruments measure

25 turbulence at a fixed point in space. Erecting a meteorological mast for turbulence measurements may not always be feasible, especially in complex terrain, deep offshore seas, or in conditions where *in situ* measurements are not possible, e.g., aircraft wake vortices. In such cases, remote sensing devices ~~like such as~~ Doppler wind lidars can be ~~employed~~used to estimate atmospheric turbulence~~remotely~~. Commercial scanning lidars also provide the capability to get multi-point statistics and vertical profiles, thus presenting a more detailed view of the atmosphere.

30 Estimating turbulence from a Doppler wind lidar is not a novel concept. There are two key challenges associated with it, as delineated by Peña et al. (2025): turbulence contamination and probe-volume averaging. The former arises from ~~the reconstruction of~~reconstructing wind velocity components from lidar line-of-sight (LOS) velocities, while the latter is inherent to the measuring principle of Doppler lidars, ~~as lidars which~~ do not record point measurements; rather, they measure within a probe volume, acting as a turbulence filter. A number of methods and scanning strategies have been proposed to operate
35 Doppler lidars as ~~a standalone instrument to measure~~standalone instruments for measuring atmospheric turbulence. Eberhard et al. (1989) used a short-pulse Doppler wind lidar with a range gate resolution of 150 m to measure Reynolds stresses and turbulence kinetic energy (TKE) profiles in the atmosphere. Their method relies on the conical scanning of the atmosphere at a fixed elevation angle and deducing Reynolds stress values directly from the individual beam LOS variances. This approach avoids ~~the cross-contamination~~ between among the wind field components; however, it does not address ~~the issue of~~ turbulence
40 filtering due to ~~the~~ probe volume averaging (Bonin et al., 2017; Sathe and Mann, 2013). This method has been further improved and optimized for a Doppler beam swing (DBS) scanning pattern, where only five azimuth measurements at a fixed elevation angle and one vertical measurement are obtained to deduce the full Reynolds stress tensor (Sathe et al., 2015).

A significant amount of research efforts has been made to address the turbulence filtering or the attenuation of small-scale turbulence due to probe-volume averaging. Frehlich et al. (1998), and Frehlich and Cornman (2002) utilized the LOS velocity
45 structure function ($D(r)$, where r is the separation distance) for a pulsed lidar to estimate the turbulence energy dissipation rate ε . They removed the effect of spatial averaging using theoretical corrections, such as modeling the lidar range weighting as a Gaussian function. In this approach, the measured second-order structure function is fitted to a theoretical $D(r)$ model that accounts for the probe-volume averaging of the lidar LOS velocities. Smalikho et al. (2005) obtained ε from the longitudinal structure function of LOS velocities measured by a 2 μm lidar with a range gate resolution of 30 m and compared it with the ε
50 estimates obtained from the Doppler spectrum width (DSW) method, confirming the results with numerical simulations. Their results showed a high correlation between the two methods ~~;~~ and a reduction in bias ~~was observed~~ as ε ~~became higher~~increased. Smalikho and Banakh (2017) and Wildmann et al. (2020) utilized the azimuthal structure function of LOS velocities obtained from the conically scanning vertical profiling lidars to estimate ε and TKE. Both studies account for the probe volume averaging by defining a transverse filter function. However, the latter introduced an additional advection filter to account for ~~the advection~~
55 ~~of turbulence~~turbulence advection within the scanning plane. The ε estimates were then compared with the sonic anemometers. Correcting for advection ~~did reduce~~reduced the bias; however, the random error, as indicated by the observed scatter, ~~was still~~ found to beremained relatively high.

A major drawback of these methods is that the presented $D(r)$ models are also dependent on the outer scale of turbulence $\mathcal{L}_o$. To obtain $\mathcal{L}_o$, it was often assumed that the large-scale turbulence is isotropic and can be modeled by an isotropic spectral

60 model, such as the von Kármán spectral model. However, the von Kármán spectral model ~~can only be used for special cases involving isotropic and applies only to special cases of isotropic~~, homogeneous turbulence. In reality, the atmospheric turbulence is highly anisotropic (Mann, 1994; Kaimal and Finnigan, 1994). In order to find ε from such methods, the modeled $D(r)$ was fitted to the measurements in such a way that the best fitting takes place for both variables: ε and $\mathcal{L}_o$ (Frehlich and Cornman, 2002; Frehlich et al., 1998; Smalikho et al., 2005). The best fit obtained using this method may not provide the best ε value, 65 since $\mathcal{L}_o$ is also being fitted to minimize the error function. Any anisotropy in the large-scale turbulence would distort ε estimates. Furthermore, it unnecessarily complicates the fitting procedure as more than one variable is involved.

Turbulence energy dissipation rate can also be obtained through the one-dimensional LOS velocity spectrum, provided that the inertial sub-range is detected (Davis et al., 2008; O'Connor et al., 2010; Bodini et al., 2018; Wildmann et al., 2019). However, this method requires invoking Taylor's hypothesis of frozen turbulence (Taylor, 1935) and a suitable choice of $\mathcal{L}_o$. 70 The effect of turbulence filtering due to probe volume averaging was also modeled to ~~get~~ obtain the corrected velocity spectrum, ~~which improved thereby improving~~ the prediction of ε (Banakh and Smalikho, 1997; Drobinski et al., 2000). In summary, there are two primary ways of estimating ε from the Doppler lidar measurements reported in the scientific literature: the structure function method and the velocity spectrum method. Both these methods usually require knowledge about the outer scale of turbulence, $\mathcal{L}_o$, and may invoke the assumption of frozen turbulence.

75 In this article, we present an improved second-order longitudinal structure function model for lidar LOS velocities ~~, which that~~ also accounts for ~~the~~ probe volume averaging in a pulsed lidar. The presented structure function model improves on the previously described methods in the following two ways: (i) the lidar system used in this study ~~has a very high resolution of range gates provides LOS velocity estimates at closely spaced range gates, with a range-gate spacing of 3 m along the beam, i.e., 3 m, which offers an enhanced detection. Such a small range-gate spacing enables evaluation of the structure function~~ $D(r)$ at small separations, thereby improving the identification of the inertial subrange, and (ii) the use of longitudinal $D(r)$ means that there is no need to assume Taylor's frozen turbulence hypothesis, as all the LOS measurements along the lidar beam ~~are made at the same instant with a~~ have a known constant separation distance r between the range gates. This ensures that the structure function model only depends on ε in the inertial subrange. The model is then used to estimate the turbulence energy dissipation rate ε in the atmospheric boundary layer, and the values are validated against sonic anemometer measurements at 85 three heights of 103 m, 175 m, and 241 m above ground level at a test site in Denmark.

The second-order longitudinal structure function model for lidar LOS velocities is presented in detail in Section 2. In Section 3, the test site and information about the lidar and the validation data (ultrasonic anemometers) are provided. Section 4 ~~entails presents~~ the complete workflow for estimating ε from ~~the ultrasonic anemometers and the ultrasonic anemometer and~~ lidar data. Section 5 describes the validation of lidar-derived ε estimates ~~with the sonic anemometers' data, against sonic anemometer~~ data and the relevant discussion. Section 6 concludes the article ~~with the description of the by describing the~~ salient features of the model and ~~a summary of the significant results from this study summarizing the study's significant results.~~

2 Second-order structure function model for lidar ~~line-of-sight~~ line-of-sight velocities

The second-order velocity structure function is the variance of the difference in velocity between two points $\mathbf{x}$ and $\mathbf{x} + \mathbf{r}$, where $\mathbf{r}$ is the separation vector between them. The second-order structure function can be defined as:

$$95 \quad D(r) = \langle [\mathbf{n} \cdot \mathbf{v}(\mathbf{x}) - \mathbf{n} \cdot \mathbf{v}(\mathbf{x} + \mathbf{r})]^2 \rangle, \quad (1)$$

where $\mathbf{n} = \mathbf{r}/|\mathbf{r}|$. Since the component $\mathbf{n} \cdot \mathbf{v}$ of the velocity vector is aligned with $\mathbf{n}$, this is called a longitudinal structure function. Kolmogorov (Pope, 2000) hypothesized that in the inertial subrange, the turbulence is locally isotropic and $D(r)$ is only a function of the turbulent energy dissipation rate ε , the separation distance r , and the universal Kolmogorov constant $C_K \approx 2$. Hence, for $|\mathbf{r}| \ll \mathcal{L}_o$, where $\mathcal{L}_o$ is the integral length scale or the size of the largest eddies,

$$100 \quad D(r) = C_K (\varepsilon r)^{2/3}. \quad (2)$$

The ~~lidar-used-in~~ pulsed Doppler lidar measures backscattered light over a finite spatial volume, so-called probe volume, the extent of which is governed by the pulse duration. The return signal, therefore, contains contributions from the aerosol particles distributed throughout the probe volume. The center of the probe volume is typically assigned as the nominal range gate position and determined from the pulse time-of-flight (Peña and Hasager, 2011). Volume measurement is inherently different from point
 105 measurements used in reference instruments, such as sonic or cup anemometers.

The lidar used in this study measures ~~filtered-line-of-sight-LOS~~ LOS velocities at several range gates along the beam. ~~A-lidar does not make point measurements but rather senses the LOS wind distribution in a weighted sample volume in the form of a Doppler spectrum. Different methods are used by lidar manufacturers.~~ Lidar manufacturers use various methods to estimate the representative ~~wind-speed-LOS velocity~~ LOS velocity from the Doppler spectrum. Following Held and Mann (2018), if we assume that
 110 the effect of probe volume on turbulence attenuation can be modeled by the centroid method of determining the dominant frequency in the Doppler spectrum, then the line-of-sight velocity of the lidar beam can be defined as:

$$v_r(\mathbf{x}) = \int_{-\infty}^{\infty} \varphi(s) \mathbf{n} \cdot \mathbf{v}(s\mathbf{n} + \mathbf{x}) ds, \quad (3)$$

where $\mathbf{n}$ is a unit vector along the beam direction, $\mathbf{x}$ is the center of the lidar measuring volume at the point of interest, and s is the distance along the beam from the point $\mathbf{x}$. $\varphi(s)$ is the weighting function normalized to unit integral, and a Gaussian shape
 115 is assumed here:

$$\varphi(s) = \frac{1}{\sigma\sqrt{2\pi}} e^{-\frac{s^2}{2\sigma^2}}, \quad (4)$$

where σ is the standard deviation of the Gaussian distribution. Though Held and Mann (2018) defined (3) for a continuous-wave lidar system, the same can be assumed for a pulsed lidar system. Dolfi-Bouteyre et al. (2017) evaluated the accuracy of the centroid frequency estimator method with a coherent pulsed lidar system and found it to perform well in calculating
 120 both the first- and second-order moments of the Doppler spectrum. The longitudinal structure function along the beam then

becomes:

$$D_{\text{lidar}}(r) = \left\langle \left[\int_{-\infty}^{\infty} \{v(x+s) - v(x+r+s)\} \varphi(s) ds \right]^2 \right\rangle, \quad (5)$$

where r is the distance between two range gates along the beam and $v = \mathbf{n} \cdot \mathbf{v}$ is the velocity component along the beam direction as a function of distance along the beam. It is assumed that r and σ are small as compared to the turbulence length scale $\mathcal{L}_o$ and the flow is homogeneous. This can be solved for the inertial subrange as (see Appendix A for a detailed derivation):

$$D_{\text{lidar}}(r) = \frac{C_K}{\sqrt{\pi}} 2^{2/3} \sigma^{2/3} \varepsilon^{2/3} \Gamma\left(\frac{5}{6}\right) \left\{ {}_1F_1\left[-\frac{1}{3}, \frac{1}{2}, -\frac{r^2}{4\sigma^2}\right] - 1 \right\}, \quad (6)$$

where Γ is the Gamma function, and ${}_1F_1$ is the confluent hypergeometric function. The structure function model described in Eq. (6) only considers the spatial averaging and ignores any effect of temporal averaging on the lidar LOS velocities. By including the effect of the time Δt over which the lidar's Doppler signal is averaged, we can derive a modified second-order longitudinal structure function model containing both spatial and temporal averaging effects:

$$D_{\text{lidar}}(r) = \frac{\alpha \varepsilon^{2/3} \Gamma(\frac{4}{3})}{2\pi^{1/2} \Gamma(\frac{11}{6})} \int_0^{2\pi} \int_0^{\infty} e^{-(\sigma \kappa \cos(\beta - \theta))^2} [1 - \cos(r \kappa \cos(\beta - \theta))] \text{sinc}^2\left(\frac{\Delta t U \kappa \cos \beta}{2}\right) \frac{1 - \frac{8}{11} \cos^2(\beta - \theta)}{\kappa^{5/3}} d\kappa d\beta, \quad (7)$$

where U is the mean wind speed, α is the spectral Kolmogorov constant, θ is the beam-to-wind angle measured in the plane containing both beam and wind unit vectors, and κ and β are the polar coordinates in $k_1 - k_2$ plane (k_1 and k_2 are the along-wind and cross-wind wavenumbers). Full details on how this expression is derived are given in Appendix A1.

Here we note that the lidar structure function also depends on the standard deviation of the Gaussian weighting function σ . The main assumption for accurately estimating ε is that σ should be less than $\mathcal{L}_o$. If ~~there is less turbulence in the atmosphere and the length scale of the turbulence~~ atmospheric turbulence is less intense and its length scale is smaller than the ~~sampling volume of the lidar, then the~~ lidar's sampling volume, then turbulence fluctuations will be filtered out. The choice of σ depends on the lidar instrument and can be obtained by fitting the data for a range of σ values and then selecting a value that provides the least amount of bias against true values. Figure 1(a) describes how D_{lidar} (Eq. (6)) changes as a function of r for three different σ values. The change in local slope of the structure function is also a function of r , as seen in Fig. 1(b). Given the measured structure function from a high-resolution lidar beam, Eq. 6 or 7 can be fitted using the least squares method or other optimization techniques to obtain the turbulence energy dissipation rate ε .

3 Data and site description

3.1 Test site

The Østerild test site is located in the northern region of Jutland, Denmark, situated between Limfjorden and Skagerrak, as shown in the inset of Figure 2. As of 2024, the site hosts nine wind turbines for testing purposes, arranged in a north-south orientation, spanning approximately 4.7 km. Figure 2 illustrates the positions of these turbines, denoted by red dots.

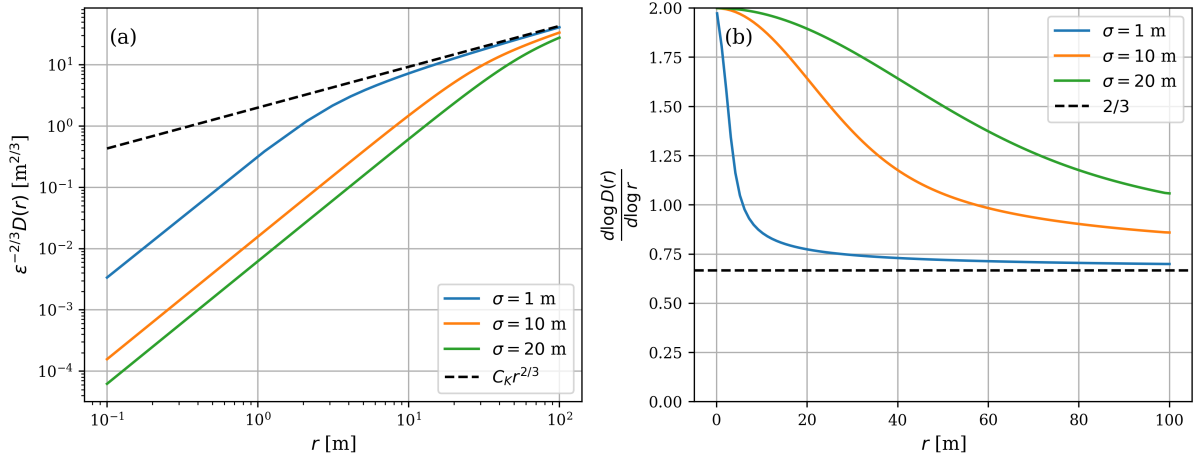


Figure 1. (a) Normalized structure function $\epsilon^{-2/3} D(r) / \epsilon^{-2/3} D_{\text{lidar}}(r)$ (from Eq. 6) as a function of the separation distance r for three different values of σ : 1 m, 10 m, and 20 m. A $C_K r^{2/3}$ reference line is also added. (b) $d \log D(r) / d \log r$ as a function of r . The dashed black line represents a slope value of $2/3$.

Each turbine is accompanied by a mast positioned approximately 2.5–4 rotor diameters to the west, with ~~heights~~ a height corresponding to the ~~hub height of the turbines~~ turbine's hub height. Additionally, two light masts are positioned to the north and south of the turbine row (the north mast, which is relevant for this study, is marked by a yellow dot in Figure 2). The terrain depicted in Figure 2 features both flat and heterogeneous characteristics, comprising a mosaic of crop and agricultural lands, urban settlements, and forested areas. Further detailed information about the Østerild site can be found in Peña (2019). For the present study, we focus only on the North mast, which is a 250 m tall mast with a triangular lattice structure. The mast is equipped with cup and ultrasonic anemometers mounted on the booms oriented at 0° from the north. The lidar pad is about 10 m west of the mast and contains the vertical profiling BEAM 6x lidar. The details about the lidar and sonic data are as follows.

3.2 BEAM 6x lidar

The *Halo Photonics* by *Lumibird BEAM 6x Wind Sciences* pulsed lidar is used in this study because of its high-resolution of range gates along the beam. The lidar has six beams, ~~where five inclined beams with~~ of which five are inclined at an elevation angle of about 60° ~~are and~~ arranged in a pentagonal pattern, i.e., with an azimuthal separation of 72° . The sixth beam is the vertical beam staring into zenith, directly measuring vertical velocities. A schematic of the lidar beams is displayed in Fig. 3. The lidar can measure radial velocities up to 1000 m, with the range gates separated by 3 m along the beam, which is an important quality of the instrument for the structure function estimation. The ~~lidar 3 m spacing should not be interpreted as the physical extent of the lidar beam's probe volume, which exceeds 20 m for the lidar under study. Instead, the~~ high range resolution achieved by HALO Photonics lidars results from their autocorrelation-based signal processing technique (Abdelazim et al., 2018), which allows overlapping Fourier windows to be applied to the accumulated autocorrelation matrix.

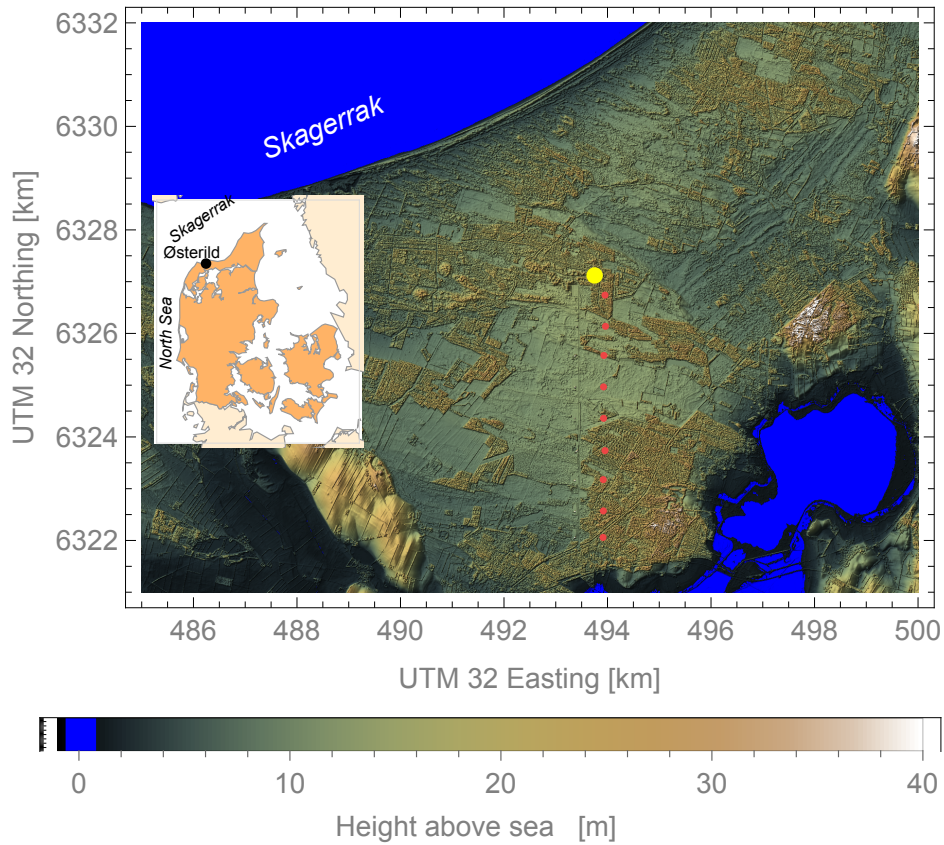


Figure 2. Position of the Østerild site in Denmark (inset) and a digital surface model of the surrounding area. The 250 m mast is in yellow, while the turbine stands at the test site around the red dots. It is seen that the area is relatively flat, and there is low forest to the ~~north-west~~ northwest of the mast. The forest to the west of the turbine row has been cleared out to almost 2 km.

The lidar was placed alongside the mast from 09 April 2024 to 06 December 2024. The lidar measures LOS velocities along a single beam in approximately 1 second, so one complete ~~Doppler Beam Swing (DBS)~~ DBS scan takes ~ 6 seconds. ~~The lidar data availability is determined by the Intensity parameter, which is an indicator of~~ Following the manufacturer's recommendation, the signal-to-noise ratio ~~An Intensity threshold value (SNR) threshold~~ of 1.015 is used to filter out the ~~noise from the signal, following the manufacturer's recommendation~~ noisy Doppler measurements.

3.3 Ultrasonic anemometers

The mast has Metek USA-1 Scientific ultrasonic anemometers at elevations of 37 m, 103 m, 175 m, and 241 m. The anemometers are configured with a sampling frequency of 20 Hz. We convert the x, y, z speed components in the sonic output from a Cartesian coordinate system to the ~~longitudinal-along-wind~~ u , ~~transverse-cross-wind~~ v , and vertical w wind speed components. Afterward, we align the u component with the mean wind direction observed during each 10 minutes. Some peaks/outliers

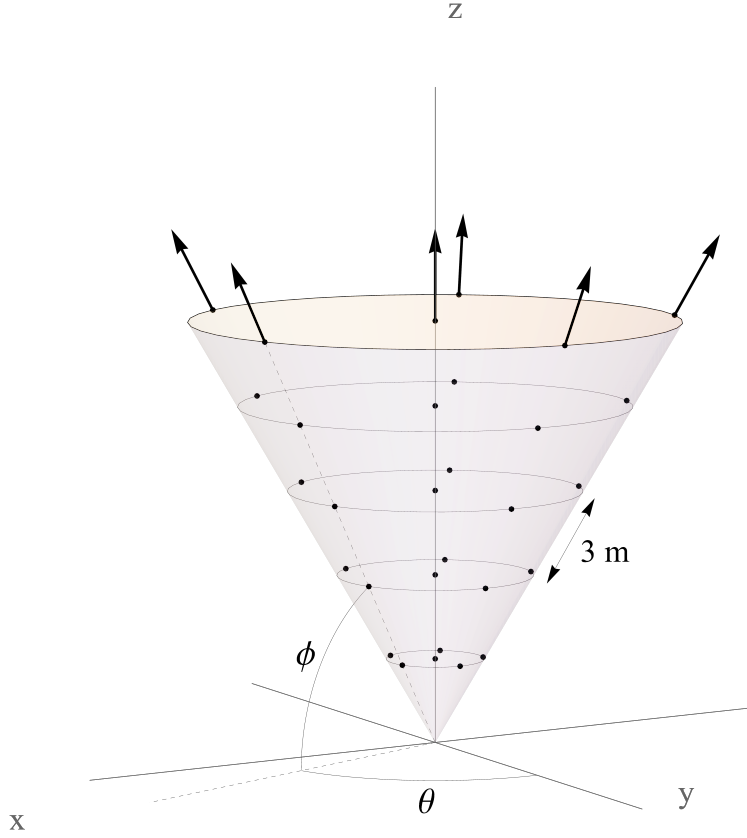


Figure 3. (a) A schematic diagram showing the lidar beams' orientation and the distribution of range gates along the beams. The ~~red arrow depicts the vertical beam.~~ (b) The coordinate system used for the beams is also shown. Here θ represents the azimuth angle, and ϕ represents the elevation angle from the ground.

were observed in the sonic data ~~;~~which and were removed using a Hampel filter (Liu et al., 2004) with a window size of ~~five~~5 measurement points and an outlier threshold of ~~three~~3 standard deviations. The ultrasonic anemometer data at 37 m is used to classify the data into different atmospheric stability classes by using the ~~Monin~~-Obukhov length:

$$180 \quad L_o = -\frac{u_*^3}{\kappa(g/T)\overline{w'\Theta'_v}} \quad , \quad (8)$$

where u_* is the frictional velocity, κ is the von Kármán constant, g is the gravitational acceleration, T is the reference temperature, and $\overline{w'\Theta'_v}$ is the virtual kinematic heat flux where Θ_v is the virtual potential temperature. Table 1 describes seven different stability classes from “Very Unstable” to “Very Stable” based on ~~Monin~~-Obukhov length L_o .

Table 1. Stability classification based on the ~~Monin-Obukhov~~ Obukhov length

Obukhov Length L_o [m]	Atmospheric Stability
$-100 < L_o \leq -50$	Very Unstable (vu)
$-200 < L_o \leq -100$	Unstable (u)
$-500 < L_o \leq -200$	Near-Neutral Unstable (nnu)
$ L_o \geq 500$	Neutral (n)
$200 \leq L_o < 500$	Near-Neutral Stable (nns)
$50 \leq L_o < 200$	Stable (s)
$10 \leq L_o < 50$	Very Stable (vs)

4 Workflow for estimating ε

185 In order to estimate the turbulent energy dissipation rate ε , the primary challenge is the detection of the inertial subrange. This can be done in several ways: either through the power spectral density of the wind components or by using the structure function method. For sonic anemometers, the straightforward way is to plot a wavenumber spectrum of the u , v , or w wind component by assuming Taylor’s frozen turbulence hypothesis. In the inertial subrange, the one-point, two-sided velocity spectra in terms of wavenumber k_1 (where $k_1 = 2\pi f / \bar{U}$; f is the ~~sampling~~ frequency and $\bar{U}$ is the mean wind speed) are given by:

190
$$F_u(k_1) = \frac{9}{55} \alpha \varepsilon^{2/3} k_1^{-5/3} , \quad (9)$$

for the along-wind spectrum and

$$F_v(k_1) = F_w(k_1) = \frac{12}{55} \alpha \varepsilon^{2/3} k_1^{-5/3} , \quad (10)$$

for the cross-wind and vertical components, where α is the spectral Kolmogorov constant with a value of ~ 1.5 – 1.52 (Pope, 2000). To detect the inertial subrange, a compensated spectrum $k_1^{5/3} \cdot F_u(k_1)$ is plotted against k_1 . The region where $d(k_1^{5/3} \cdot F_u(k_1)) / dk_1 \approx 0$ represents the inertial subrange (Peña et al., 2019; Syed et al., 2023). Here, we only used wavenumber in the range $5 \times 10^{-2} \text{ m}^{-1} < k_1 < 10^0 \text{ m}^{-1}$ to detect the inertial subrange and allowed a slope deviation of only 10%. This interval was selected after inspecting the spectra across the dataset’s wind-speed range, where the inertial-subrange plateau was consistently observed within these wavenumber bounds. After detecting the range, $\varepsilon_{\text{sonic}}$ is calculated using:

$$\varepsilon_{\text{sonic}} = \left[\frac{55}{9\alpha} \overline{k_1^{5/3} \cdot F_u(k_1)} \right]^{3/2} , \quad (11)$$

200 where $\overline{}$ represents the mean value in the inertial subrange.

For the $\varepsilon_{\text{lidar}}$ calculation from the BEAM 6x lidar, the structure function approach is adopted, meaning that we fit (6), where ε is the only unknown, to the measured lidar data. The benefit of such an approach is that since lidar beams measure LOS velocities at range gates physically separated by a distance at the same time, there is no need to assume Taylor’s frozen

turbulence hypothesis. The distance between the range gates is constant, i.e., 3 m. Furthermore, assuming that the sampling volume $\sigma < \mathcal{L}_o$, it would allow resolving the ε without $\mathcal{L}_o$ dependence. The following steps are taken to derive $\varepsilon_{\text{lidar}}$ from a single 10-minute period from lidar LOS data:

1. For a selected height h , range gates within $h \pm 12\text{--}14$ m are selected to get the measured longitudinal structure function from LOS velocities. For each beam, a mean structure function is ~~obtained for all the scans in~~ computed from all scans over the 10-minute time period. ~~Before the structure function is calculated, the mean line-of-sight velocity is subtracted at all heights. This is necessary to avoid an extra term in the structure function originating from the mean wind profile.~~
2. For the spatial+temporal averaging method, the mean wind vector was reconstructed using the LOS data from the five inclined beams to obtain U and θ_b for each 10-minute period.
3. Another average from all six beams is taken to obtain the mean longitudinal structure function, D_{meas} . The lidar structure function model described in Eq. 6 is fitted to the inertial subrange of the mean measured structure function for ~~$r < 24$~~ $r < 28$ m using the non-linear least squares fitting method to obtain $\varepsilon_{\text{lidar}}$. ~~The downhill-simplex algorithm is used to minimize the fitting error function, described as:~~ following error function is minimized:

$$\sum_{j=1}^N n [\log_{10} D_{\text{lidar}}(r_j, \varepsilon, \sigma) - \log_{10} D_{\text{meas}}(r_j)]^2, \quad (12)$$

where n is the number of spatial separation distances included in the structure-function fit.

4. The lidar data is then classified into two different categories based on the percentage error obtained from the model fitting, defined as:

$$\% \text{Error} = (10^{\text{RMSE}} - 1) \times 100, \quad (13)$$

where,

$$\text{RMSE} = \sqrt{\frac{\sum_{j=1}^N [\log_{10} D_{\text{lidar}}(r_j, \varepsilon, \sigma) - \log_{10} D_{\text{meas}}(r_j)]^2}{N}} \sqrt{\frac{\sum_{j=1}^N [\log_{10} D_{\text{lidar}}(r_j, \varepsilon, \sigma) - \log_{10} D_{\text{meas}}(r_j)]^2}{n}}. \quad (14)$$

- The first is the strict criterion, where only those 10-minute periods are accepted where the $\% \text{Error} \leq 15\%$, whereas the relaxed criterion allows periods with the $\% \text{Error} \leq 30\%$.

As mentioned earlier, an appropriate value of σ is needed to account for the ~~LOS filtering by the lidar~~ lidar's LOS filtering. Here we used a value of ~~$\sigma = 9.5$ m (FWHM ≈ 22.3 m)~~ $\sigma = 9.4$ m (Full Width at Half Maximum (FWHM) ≈ 22 m) for fitting the D_{lidar} model in Eq. (6) (only spatial averaging) and $\sigma = 7.9$ m (FWHM ≈ 18.5 m) for the D_{lidar} model in Eq. (7) (spatial + temporal averaging). These values are based on the amount of bias or average systematic error obtained after fitting the modeled structure function ~~in (6)~~ using a range of σ values between ~~7.5~~ m and 12 m with a step of 0.1 m. ~~A value of $\sigma = 9.5$ m~~

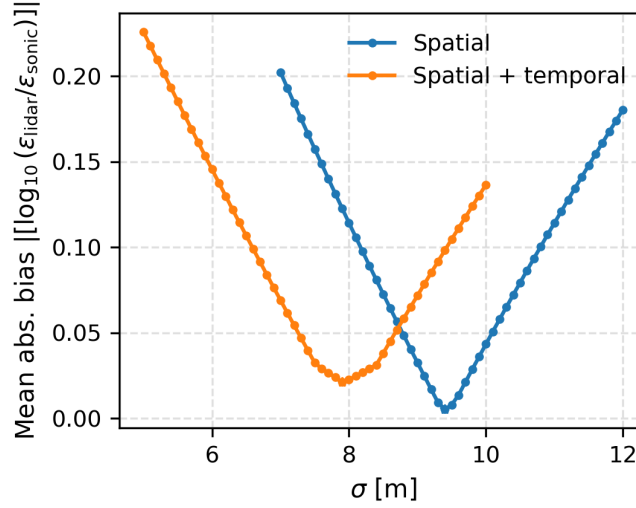


Figure 4. Mean bias or systematic error produced by fitting the modeled structure function over a range of σ values ~~from 7 m to 12 m with a step of 0.1 m~~ for the D_{lidar} models presented in Eq. (6) (spatial) and Eq. (7) (spatial+temporal averaging), respectively.

The selected σ values produced the least amount of bias in the ε estimation at all three heights (see Fig. 4) and therefore were used in the analysis presented hereafter.

An illustration of estimating ε from sonic and lidar data is shown in Fig. 5. For both sonic anemometers and lidar, ε is
 235 calculated for those 10-minute time periods where $\overline{U} \geq 4 \text{ ms}^{-1}$ and the wind direction $\in [0^\circ-120^\circ]$ or $[225^\circ-360^\circ]$. The winds coming from the south sector $[121^\circ-224^\circ]$ were discarded to avoid wake flow from wind turbines at the test site and the wake from the mast itself. This study includes ε results from three heights: 103 m, 175 m, and 241 m. Results ~~from the at a~~ height of 37 m are excluded from the analysis because the pulsed lidar is blind ~~for the heights~~ below 30 m, and there are not enough data points to ~~get obtain~~ a realistic second-order structure function.

240 The agreement between the lidar- and sonic-derived dissipation rates is evaluated in log space because ε spans several orders of magnitude. Two different metrics are used to judge the quality of comparison. The first one is the Pearson correlation coefficient (ρ) calculated between $\log_{10}(\varepsilon_{\text{lidar}})$ and $\log_{10}(\varepsilon_{\text{sonic}})$. This metric represents the scatter between the lidar and sonic measurements, i.e., the strength of their linear association. To judge whether the sonic and lidar-obtained ε values vary at the same rate and if there is a systematic offset, a second metric is used: an ordinary least-squares (OLS) regression. For the OLS
 245 regression, $\log_{10}(\varepsilon_{\text{lidar}}) = a \log_{10}(\varepsilon_{\text{sonic}}) + b$, where a and b represent the slope and intercept of the OLS regression line.

5 Results~~and discussion~~

The atmospheric conditions observed at the Østerild test site during the lidar measurement period were predominantly neutral, with about 55% of the data falling ~~in either of these~~ into one of three categories: nns, n, or nnu. Stable atmospheric conditions

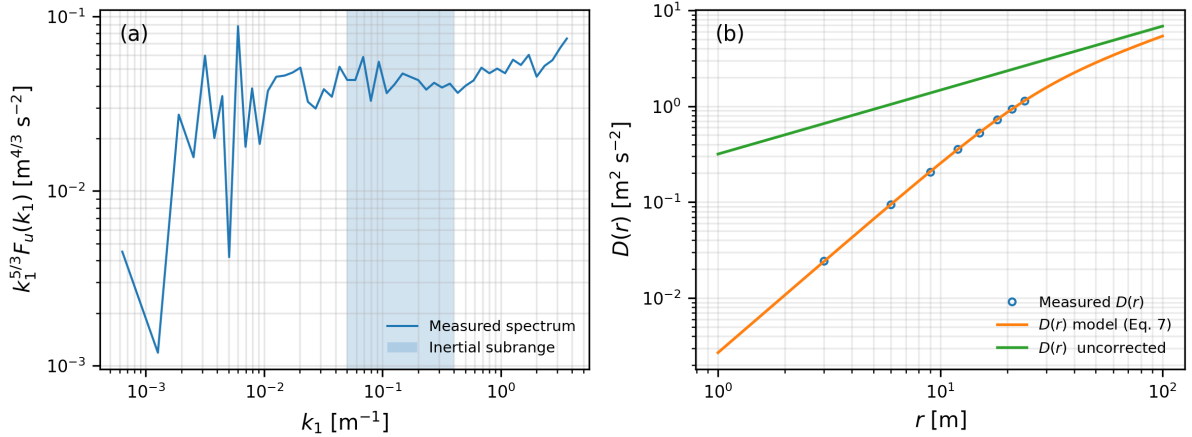


Figure 5. Two different ways used in this study to get turbulence energy dissipation rate ε . (a) Sonic anemometer: an illustration of the compensated spectrum $k_1^{5/3} \cdot F_u(k_1)$ and the inertial subrange at 103 m above ground level. (b) BEAM 6x lidar: an example of the measured structure function (black markers) and the $D_{lidar} - D_{lidar}$ model in Eq. 6-7 fitted over it (red-dashed-orange line). The unfiltered $D(r)$ with Kolmogorov's scaling of $r^{2/3}$ is also shown (blue-green line)

(s, vs) occurred about 30% of the measurement time, while the unstable conditions (u, vu) were present for about only 15% of the time. With this in mind, let's view the $D_{lidar}(r)$ model fitting error, described in (13), as a function of the atmospheric stability in Fig. 6 at the three measurement heights of 103 m, 175 m, and 241 m. The neutral conditions (nns, n, nnu) produced the lowest fitting errors at all three heights. The unstable conditions (u and vu) showed slightly higher errors when fitting the structure function model over the measured data. The highest model-fitting-model-fitting errors were observed for the under very stable (vs) atmospheric conditions, as these conditions have the least amount-of-atmospheric turbulence, which-makes making it difficult to identify the inertial subrange. We also observed an increase in fitting errors with the-increase-in-height, as-both-height, with the median and maximum values-of-the-errors-were-error values highest at 241 m for-across all stability conditions. This is caused by a combination of a weaker lidar return signal with increasing height and weaker turbulence fluctuations. The resulting lower signal-to-noise ratio makes it harder to detect the inertial subrange and fitting of ε .

The comparison of turbulence energy dissipation rates obtained from lidar and sonic anemometers at the three heights of 103 m, 175 m, and 241 m is displayed in Fig. 7 and Fig. 8 for the strict and relaxed error criteria, respectively. The data shown here represents all seven stability classes and, therefore, is not subdivided. The Each figure is further divided into two panels: (I) only spatial averaging, where the ε_{lidar} values are obtained by fitting Eq. (6) over the measured structure function data, and (II) spatial + temporal averaging, where Eq. (7) is fitted over the data. In both panels, the number of available 10-minute time periods (N) that qualify for all the requirements, i.e., wind speed, wind direction, and whether the fitting error is within the defined limit, is highest at 103 m. The sample number subsequently drops-for-the-higher-heights-because-of-the increase-in-the-model-fitting-error-and-the-decreases-at-higher-heights-due-to-increased-model-fitting-error-and-greater difficulty

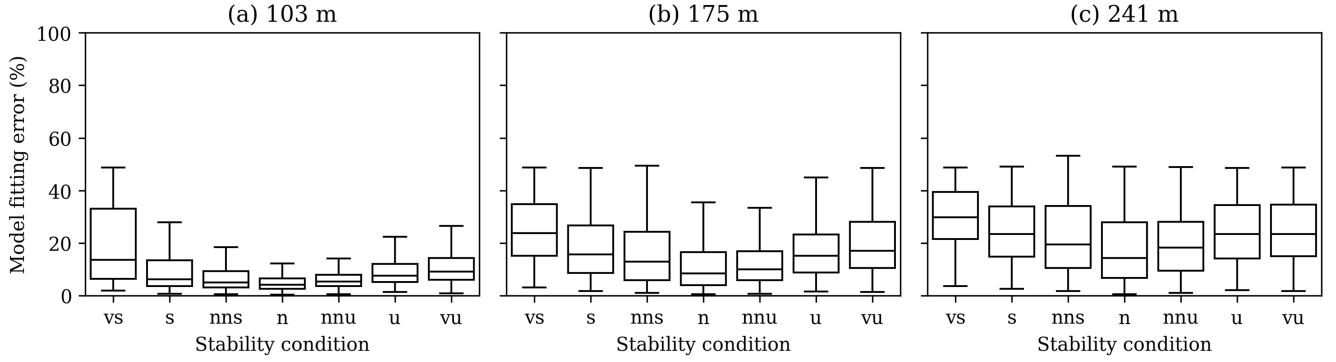



Figure 6. The model fitting error as a function of the seven stability classes described in Table 1 at three different heights: (a) 103 m, (b) 175 m, and (c) 241 m. The box plot shows the median (center line) and the first and third quartiles. The whiskers represent the minimum and maximum values of the observed error.

in detecting the inertial subrange at higher heights. The point density plots show an excellent correlation between the two instruments for both criteria. For the strict criterion ($\leq 15\%$ error), a Pearson correlation coefficient (ρ) value of

In Fig. 7, the scatter between the data points at all heights is minimal for both panels which can be observed by nearly identical values of ρ , i.e., 0.96-0.97 at 106 m, 0.95 at 175 m, and 0.91 at 241 m. These large values of ρ imply a strong linear association between the model-predicted $\varepsilon_{\text{lidar}}$ and measured $\varepsilon_{\text{sonic}}$ values. However, ρ alone does not describe the full picture. Looking at the OLS regression lines for both the spatial-averaging and spatial + temporal-averaging panels, one can clearly see the utility of including temporal averaging in the fitting process. The slope of the OLS regression line (a) represents the rate of change of $\varepsilon_{\text{lidar}}$ with $\varepsilon_{\text{sonic}}$ while the intercept (b) reveals any offset. Including temporal averaging in the fitting process significantly improves predictions of $\varepsilon_{\text{lidar}}$ values: a 5-percentage-point increase in a at 103 m and a 3-point increase at 175 m, and 0.91 at and 241 m was observed. For the. Similarly, the intercept b approaches zero with temporal averaging. The results show that the model without temporal averaging (in Eq. (6)) tends to overestimate $\varepsilon_{\text{lidar}}$ when turbulence is low and to underestimate it under strong turbulence.

In Fig. 8, similar trends are observed for the relaxed criterion ($\leq 30\%$ error), model fitting error). For the relaxed criterion, however, the number of available 10-minute periods is are increased significantly: from 90% of the available data to almost 100% at 103 m, from 60% of the available data to 85% at 175 m, and from 40% of the available data to 70% at 241 m. This increase is marked by a very slight decrease in ρ values: 0.94-0.93-0.94 at 103 m, 0.93-0.91-0.92 at 175 m, and 0.9-0.89 at 241 m. This implies that relaxing the error criterion significantly increases the amount of available data but does not severely sacrifice the correlation without severely sacrificing the strong linear association between lidar and sonic ε . Although the number of 10-minute periods where lidar overestimates ε increases, they are still relatively smaller in number, as indicated by the color in the density plots (see Fig. 8). Comparison of $\varepsilon_{\text{lidar}}$ with $\varepsilon_{\text{sonic}}$ at three heights of (a) 103 m, (b) 175 m, and (c) 241 m for the strict criterion (model fitting error $\leq 15\%$). The values are plotted on a log-log plot, and the black dashed line represents 1:1 correspondence. The number of 10-minute samples used in the plots (N) and the Pearson correlation coefficient

(I) Only spatial averaging

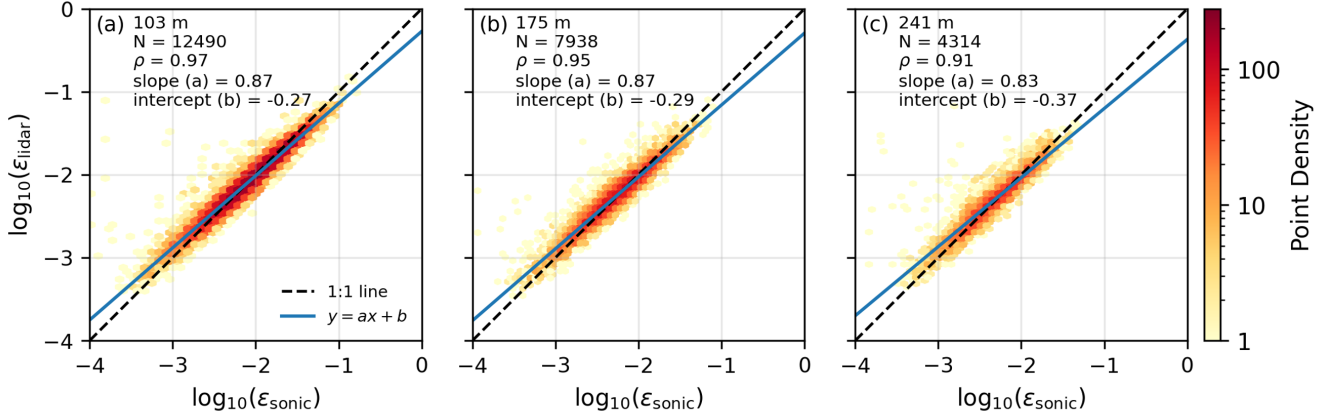

(II) Spatial + temporal averaging

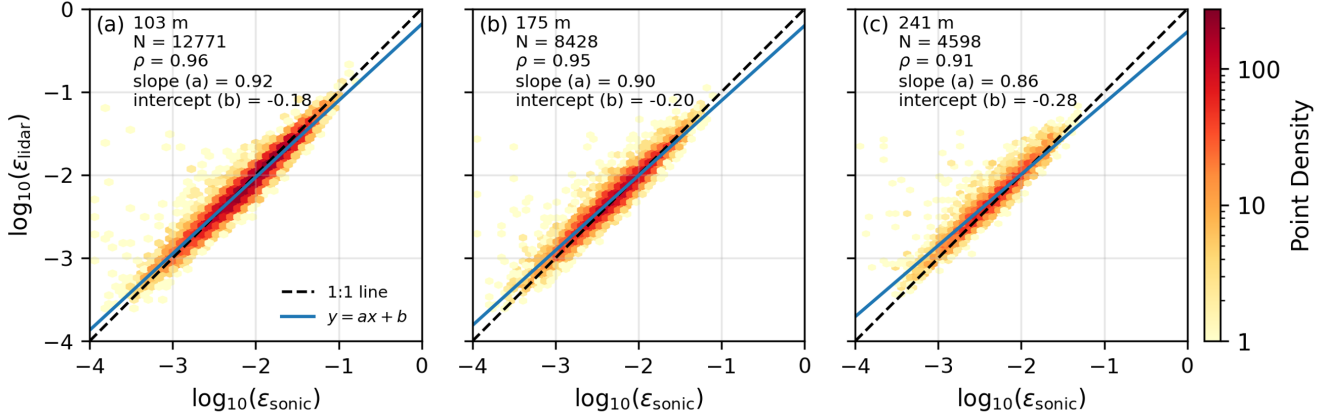


Figure 7. Comparison of ϵ_{lidar} with ϵ_{sonic} at three heights of (a) 103 m, (b) 175 m, and (c) 241 m for the strict criterion (model fitting error $\leq 15\%$). The top panel shows (I) only spatial averaging, where Eq. (6) is fitted over lidar LOS structure function measurements. The bottom panel displays (II) Spatial + temporal averaging using Eq. (7). The values are plotted on a log-log plot, and the black dashed line represents 1:1 correspondence. OLS regression line $\log_{10}(\epsilon_{\text{lidar}}) = a \log_{10}(\epsilon_{\text{sonic}}) + b$ is also plotted in blue color. The number of 10-minute samples used in the plots (N) and the Pearson correlation coefficient (ρ) are also mentioned. The point density represents the number of data points in each hexagonal cell.

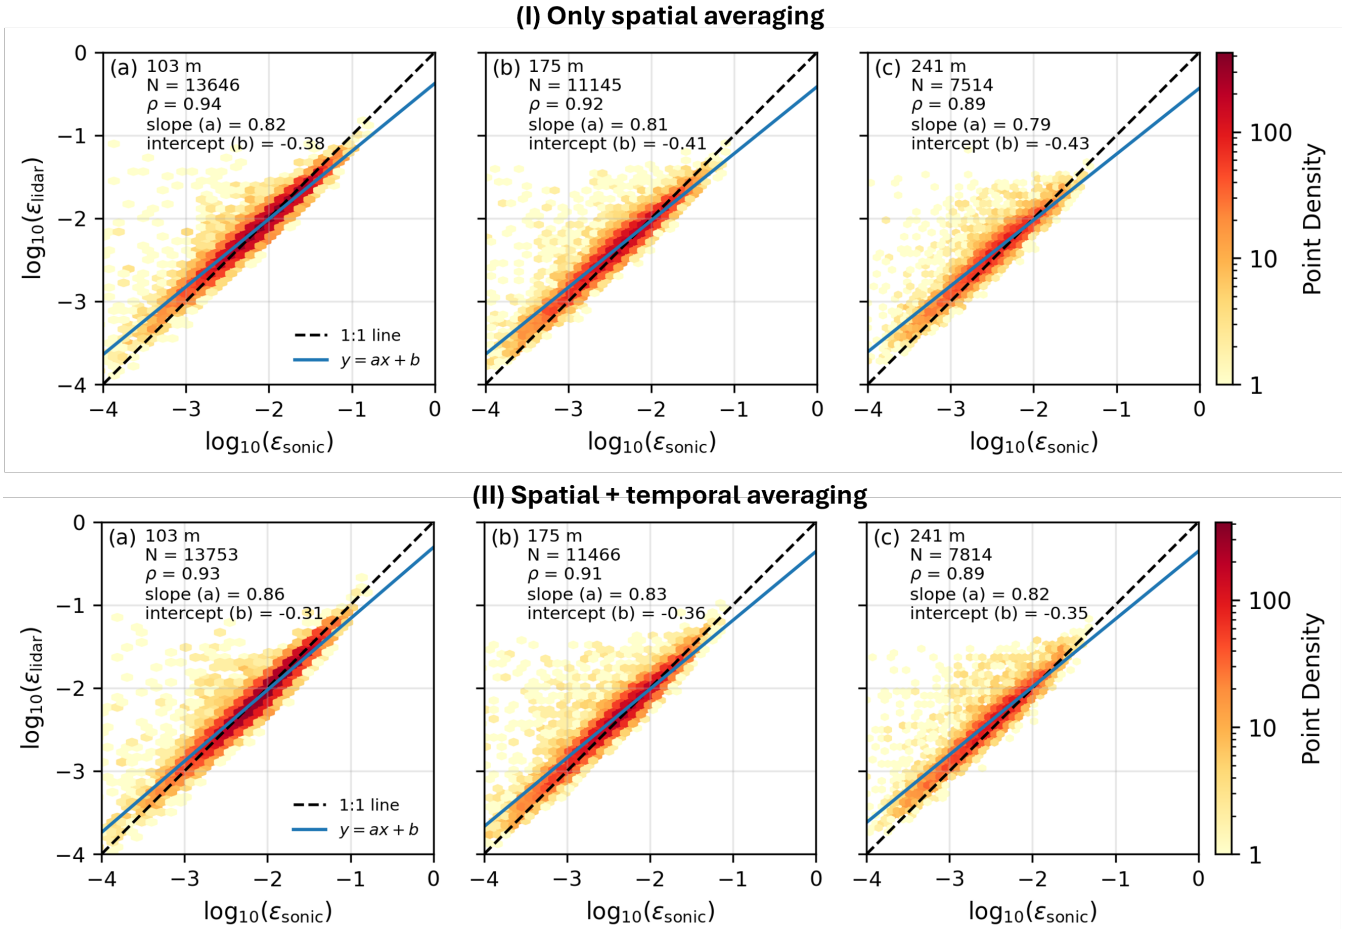


Figure 8. Same as Fig. 7 but for the relaxed error criterion (model fitting error $\leq 30\%$).

(ρ) are also mentioned. The OLS regression parameters a and b also improve under the relaxed fitting criterion when temporal averaging effects are included. 4 percentage points increase in a at 103 m, 2 points increase at 175 m, and 3 points increase at 241 m. The intercept value also moves closer to zero in the plots with spatial + temporal averaging. These results highlight the importance of including both kinds of probe volume-averaging effects, i.e., spatial and temporal, when calculating the second-order structure functions. Further plots will show only the results from fitting the spatial + temporal model (Eq. 7) to the data.

Same as Fig. 7 but for the relaxed error criterion (model fitting error $\leq 30\%$).

The bias analysis of the lidar-obtained-lidar-derived turbulence energy dissipation rates is presented in Fig. 9 and Fig. 10. Histograms of the $\log_{10}(\varepsilon_{\text{lidar}}/\varepsilon_{\text{sonic}})$ are illustrated in Fig. 9 for the three heights while the bias ranges of $\varepsilon_{\text{lidar}}$ relative to $\varepsilon_{\text{sonic}}$ are shown in Fig. 10. These plots are shown for both relaxed and strict error criteria. From the histogram plots, one can see

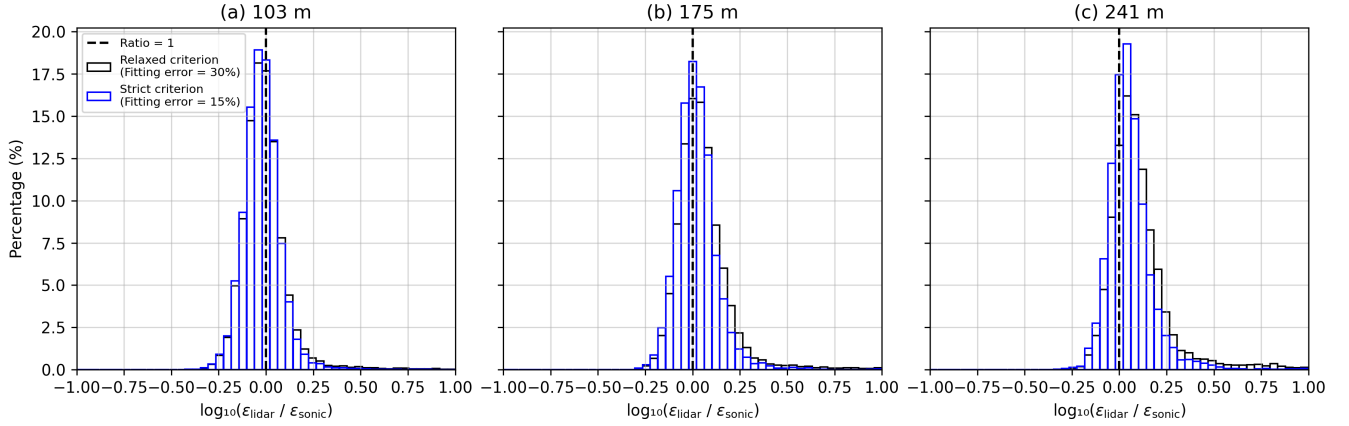


Figure 9. Histogram of $\log_{10}(\varepsilon_{\text{lidar}}/\varepsilon_{\text{sonic}})$ at the three heights under investigation, i.e., (a) 103 m, (b) 175 m, and (c) 241 m. Histograms are presented for both relaxed fitting criterion (in black color) and strict fitting criterion (in blue color).

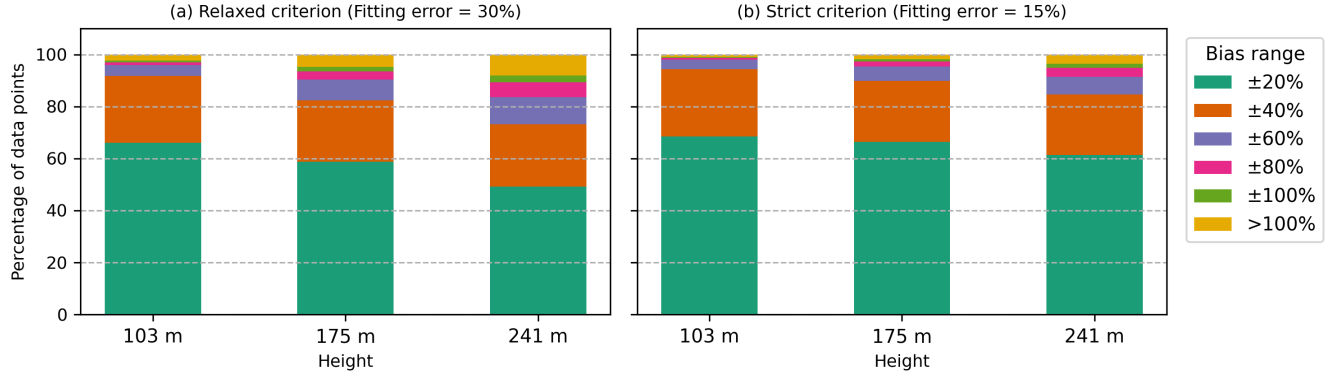


Figure 10. Bias ranges of $\varepsilon_{\text{lidar}}$ relative to $\varepsilon_{\text{sonic}}$. More than 60% of the lidar-obtained lidar-derived turbulence energy dissipation rate values lie within $\pm 20\%$ of the values those derived from sonic anemometers.

that the majority of most of the data is centered around at $\log_{10}(\varepsilon_{\text{lidar}}/\varepsilon_{\text{sonic}}) = 0$. For the strict criterion, there is no tail in the distribution on either side of the center. But for the relaxed criterion, a small tail on the right side, i.e. $\log_{10}(\varepsilon_{\text{lidar}}/\varepsilon_{\text{sonic}}) > 0$ is observed, which shows those 10-minute periods where the lidar overestimates ε . Combined, these data points represent less than 5% of the total data analyzed.

Another interesting way to look at the bias is to categorize the data in bias ranges, as seen in Fig. 10. For all three heights, more than 50% of the lidar obtained $\varepsilon_{\text{lidar}}$ values are within $\pm 20\%$ range of the $\varepsilon_{\text{sonic}}$. Similarly, >90% and >75% of $\varepsilon_{\text{lidar}}$ values obtained are inside the $\pm 40\%$ range of the $\varepsilon_{\text{sonic}}$ for the strict and relaxed error criteria, respectively. These results clearly show the high accuracy of the structure function method in obtaining determining the turbulence energy dissipation rate from a lidar possessing a high resolution of range gates with a small range-gate spacing.

6 Discussion

The utility of the modeled structure function containing the lidar filtering effect in estimating ε is clearly observed in the above shown comparison. The largest source of random errors in this method originates-arises from the detection of the inertial subrange. It was challenging to detect an inertial subrange during very stable atmospheric conditions and during low wind speeds ($< 5 \text{ ms}^{-1}$) due to the lidar's filtering of small-scale turbulence structures. Since we used only the high-level lidar data, i.e., LOS velocities, in-estimating-to estimate ε , any fluctuations smaller than the lidar's-probe volume length is-going-to-be-are filtered out. A-One way to overcome this is to use the-low-level lidar data, i.e.e.g., Doppler spectrum width, or to increase-the range-gate-resolution-minimize the range gate spacing of the lidar beams. A comparison between the Doppler-spectrum-width (DSW)->DSW and the structure function methods is not performed here but kept-is left for future investigation.

Unlike The choice of the Kolmogorov constant C_K also impacts the estimated ε values. C_K is reported to be 2.1 ± 0.1 in the literature (Pope, 2000). For the fixed measured structure function, the turbulence energy dissipation rate scales as $\varepsilon \propto C_K^{-3/2}$, thus using $C_K = 2.1$ instead of $C_K = 2$ would lower the ε estimates by approximately 7%. This is true for the absolute comparison between ε estimates obtained from a single instrument/method. However, in the relative comparison between ε values obtained from lidar and sonic anemometer, the choice of C_K does not matter. The sonic-based dissipation rates are inferred using the spectral Kolmogorov constant $\alpha = 1.52$, which comes from $C_K = 2$ (a value of $C_K = 2.1$ results in $\alpha = 1.6$). Therefore, although the choice of C_K does introduce uncertainty in the absolute magnitude of the obtained ε values, it does not affect the relative lidar-sonic comparison. It should be noted that two different methods are used to estimate ε from sonic anemometer and lidar measurements: the spectral and structure function methods, respectively. However, both estimates are based on the same fundamental assumptions of local isotropy in the inertial subrange and Kolmogorov scaling. Some slight systematic differences may arise between the two methods owing to differences in the fitting procedure and measurement filtering.

Unlike in older systems, instrument noise in modern lidar systems, such as the one used in this study, instrument-noise can be neglected (Mann et al., 2009; Sathe and Mann, 2013). Since the magnitude of ε spans the order of multiple decades (10^{-4} to 10^{-1}), the instrument noise can possibly pollute the measurements, especially at low ε values. However, the random errors from the instrument noise are reduced by using a conservative threshold-for-the-lidar-Intensity parameter SNR threshold. A lower threshold would allow more data points at the cost of increasing the random error. Furthermore, the statistical uncertainty associated with the lidar-measured ε is reduced by taking the mean structure function for-across all six beams within-over the 10-minute time-period and then fitting the model on-to that averaged measured structure function.

The method presented in this article is not specific to the BEAM 6x lidar. In principle, it could be applied to any other pulsed Doppler lidar if the range-gate spacing is sufficiently smaller over the region of interest. The advantage of the BEAM 6x configuration here is that 3 m range gate spacing is available throughout the atmospheric column, allowing the method to be applicable over an extended range. The excellent correlation between ε obtained from the lidar and sonic anemometer indicates that ε can be computed directly from the inertial subrange, provided that $\sigma < \mathcal{L}_o$. This also requires that the inertial subrange is detected with a high certainty, where the high range-gate resolution of the Beam 6x lidar proves especially useful. Large

model fitting errors observed in the very stable atmospheric conditions (see Fig. 6) may indicate that the inertial subrange may not be detected properly or that the turbulence length scales are relatively small, i.e., $\mathcal{L}_o < \sigma$. A possible solution would be to include a correction parameter for very stable conditions in the structure function model, or to use a lidar with even higher range-gate resolution smaller range-gate spacing. Recently introduced *Halo Photonics* by *Lumibird BEAM 6x Wind Power* lidar with a range gate resolution of 1.5 m along the beam can be used to resolve small-scale turbulence even further, but has not been tested yet. For wind energy applications, turbulence intensity (TI) is a more practical parameter to describe turbulence instead of ε . An ongoing study aims to accurately estimate the TI parameter using the methods described in this paper. The aim is to correct the LOS variance estimates for each beam once we know ε , and then use LOS variances to compute the Reynolds stress tensor using a method described by Eberhard et al. (1989) and Sathe et al. (2015).

7 Conclusions

A second-order longitudinal structure function model for lidar LOS velocities is presented in this article. The model also contains a Gaussian filter function to account for the probe volume averaging inside probe volume (both spatial and temporal averaging effects) within a pulsed lidar beam. The model is used to measure ε at three heights of: 103 m, 175 m, and 241 m, with using a six-beam pulsed lidar. The lidar-obtained ε values were compared against with those from ultrasonic anemometers.

The second-order structure function model presented here can be successfully used to estimate ε with using a standalone lidar having a high range-gate resolution with high range-gate resolution (i.e., small spacing between range gates). The lidar used here has a range-gate resolution range-gate spacing of 3 m and is able to can effectively detect the inertial subrange. We compared almost 8 months of lidar-measured ε with the corresponding sonic-measured ε and found an excellent correlation between the two datasets. We observed Pearson correlation coefficient (ρ) values of more than 0.9 at across all three heights, significantly higher than in similar previous studies, and methods (Smalikho and Banakh, 2017; Wildmann et al., 2020; Bodini et al., 2018). The observed bias was also very small, i.e., more than 50% of all the lidar-measured ε values lie within $\pm 20\%$ of the sonic-measured values.

It was observed that the main source of random errors in lidar-measured ε values is the improper detection of the inertial subrange. Since the structure function method heavily relies on the detection of the inertial subrange, relaxing the error criterion during model fitting can significantly increase random errors in the estimated ε . It is therefore advised to be cautious when using this method during low wind speed under low wind-speed conditions ($< 5 \text{ ms}^{-1}$), where lower-reduced atmospheric turbulence may result in possible contamination from lead to contamination by instrument noise. During Under very stable atmospheric conditions, detecting the inertial subrange becomes even more challenging due to the smaller turbulence length scales, which are filtered out by the lidar's probe volume averaging volume-averaging process. Prospective studies may include quantifying the random error originating from the instrumental noise, and a comparison with arising from instrumental noise and comparing it with that of other similar methods, such as the Doppler spectrum width

method, to estimate ε . Additionally, the effect of lidar motion on ε measurements in a floating configuration, which we expect to be null, would also be an interesting investigation.

Appendix A: Derivation of lidar longitudinal structure function

It is convenient to transform the square of the integral in (5) to a double integral such that the ensemble average can be moved inside the integrals:

$$D_{\text{lidar}}(r) = \iint_{-\infty}^{\infty} \langle \{v(x+s_1) - v(x+r+s_1)\} \{v(x+s_2) - v(x+r+s_2)\} \rangle \varphi(s_1) \varphi(s_2) ds_1 ds_2 . \quad (\text{A1})$$

Expanding the parentheses and using the definition of the covariance function $R(r) \equiv \langle v(x)v(x+r) \rangle$, the product of the curly parentheses can be written as

$$2R(s_1 - s_2) - R(s_1 - s_2 - r) - R(s_1 - s_2 + r) , \quad (\text{A2})$$

and if we further exploit the fact that due to the symmetry of φ the integrals over the last two terms are the same, and the formal relation $D(r) = 2(R(0) - R(r))$, the term can be written as

$$D(s_1 - s_2 - r) - D(s_1 - s_2) . \quad (\text{A3})$$

We now transform the integration variables into $s = s_1 - s_2$ and $s' = s_1 + s_2$ with the Jacobian determinant $|\partial(ss')/\partial(s_1 s_2)| = 2$ such that

$$D_{\text{lidar}}(r) = \int_{-\infty}^{\infty} \{D(s-r) - D(s)\} \int_{-\infty}^{\infty} \frac{1}{2} \varphi\left(\frac{s+s'}{2}\right) \varphi\left(\frac{s'-s}{2}\right) ds' ds . \quad (\text{A4})$$

The inner integral over s' is essentially a convolution of two Gaussian functions, so the expression becomes

$$D_{\text{lidar}}(r) = \int_{-\infty}^{\infty} \{D(s-r) - D(s)\} \frac{1}{2\sqrt{\pi}\sigma} \exp\left(-\frac{s^2}{4\sigma^2}\right) ds . \quad (\text{A5})$$

Using the inertial subrange expression of the structure function (2) and consulting the symbolic algebra capabilities of *Mathematica*, we finally arrive at (6).

A1 Additional temporal averaging

In the discussion so far, we have ignored the temporal averaging in (3). In reality, this equation should read

$$v_r(\mathbf{x}) = \frac{1}{\Delta t} \int_{-\Delta t/2}^{\Delta t/2} \int_{-\infty}^{\infty} \varphi(s) \mathbf{n} \cdot \mathbf{v}(s\mathbf{n} + \mathbf{x} + tU\mathbf{e}_1) ds dt , \quad (\text{A6})$$

where U is the mean wind speed, Δt the time over which the lidar's Doppler signal is averaged, typically between 0.2 and 2 s, and $\mathbf{e}_1$ is a unit vector in the mean wind direction. We have implicitly used Taylor's hypothesis in this equation. The statistics of this expression of the velocity does not only depend on the length scale σ in the weighting function φ , which is the case when the turbulence on scales smaller than σ is isotropic, but also on the time averaging Δt and the angle between $\mathbf{n}$ and $\mathbf{e}_1$.

400 Let us first look at the simplest case where $\mathbf{n} \parallel \mathbf{e}_1$, that is, the lidar beam is aligned with the mean wind. In this case (A6) is, using $\mathbf{n} \cdot \mathbf{v} = v_1$,

$$v_r(\mathbf{x}) = \frac{1}{\Delta t} \int_{-\Delta t/2}^{\Delta t/2} \int_{-\infty}^{\infty} \varphi(s) v_1((s+tU)\mathbf{e}_1 + \mathbf{x}) ds dt , \quad (\text{A7})$$

or, substituting $s' = s + tU$,

$$v_r(\mathbf{x}) = \int_{-\infty}^{\infty} \tilde{\varphi}(s') v_1(s'\mathbf{e}_1 + \mathbf{x}) ds' , \quad (\text{A8})$$

405 where

$$\tilde{\varphi}(s') = \frac{1}{\Delta t} \int_{-\Delta t/2}^{\Delta t/2} \varphi(s' - tU) dt . \quad (\text{A9})$$

So, the velocity field v_1 is folded with $\tilde{\varphi}$ whose transfer function or absolute squared Fourier transform is

$$|\hat{\tilde{\varphi}}(k)|^2 = e^{-k^2 \sigma^2} \text{sinc}^2\left(\frac{\Delta t U k}{2}\right) . \quad (\text{A10})$$

By matching the second derivative of this function with a single Gaussian, we arrive at

$$410 \quad |\hat{\tilde{\varphi}}(k)|^2 \approx e^{-k^2 \sigma^2} e^{-\frac{(\Delta t U k)^2}{12}} \quad (\text{A11})$$

such that we can approximate the process of spatial and temporal averaging with a single spatial averaging using the width parameter $\tilde{\sigma}$, defined by

$$\boxed{\tilde{\sigma}^2 = \sigma^2 + \frac{\Delta t^2 U^2}{12}} \quad (\text{A12})$$

reusing the expression (6). A comparison of the sinc-function in (A10) and its approximation in (A11) is shown in figure A1(left).

415 In this figure (right), we also show the calculated inertial subrange structure functions with various kinds of averaging. In this example, we choose a strong spatial averaging (high wind speed) with $\Delta t U / \sigma = 4$, meaning that if $\sigma \approx 9$ m and $\Delta t = 1$ s, then U would have to be 36 m/s. The spatial plus temporal averaging is calculated numerically using (A4), but with $\tilde{\varphi}$ from

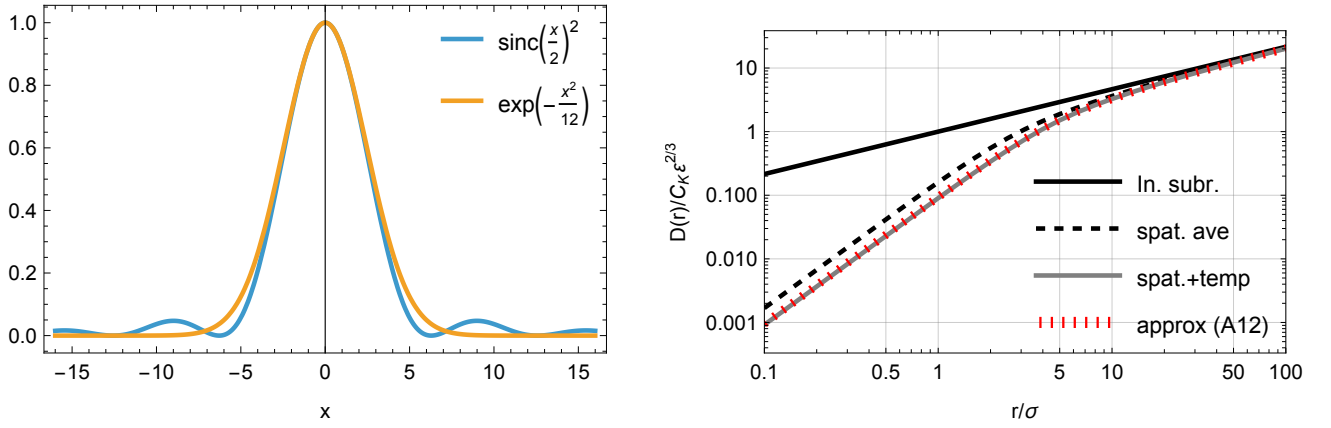


Figure A1. Left: Comparison of the sinc-term in (A10) with its Gaussian approximation in (A11). Right: Comparison of structure functions: Inertial subrange (solid black), spatial averaging only with the lidar's spatial weighting function (6) (dashed), also including temporal averaging with $\Delta t U / \sigma = 4$ (gray), and the approximation using (A12) and (6) (red, dashed).

(A9) instead of φ . All curves match when $r \gg \sigma$ but for small r , ignoring the temporal averaging overestimates the structure function with 80%, while the approximation (A12) using (6) only overestimates with 4%. The wind speeds analyzed here are generally much smaller than 36 m/s, and the corresponding errors are quadratically smaller, so we conclude (A12) is a very good approximation.

The question now arises whether (A12) is a good approximation, even in the case where $\mathbf{n} \nparallel \mathbf{e}_1$, i.e. the beam is not aligned with the wind direction. With $R_r(\mathbf{x}) = \langle v_r(\mathbf{x}') v_r(\mathbf{x}' + \mathbf{x}) \rangle$ the lidar-measured structure function can be written as

$$D_{\text{lidar}}(r) = 2 \left(\langle v_r^2 \rangle - R_r(r\mathbf{n}) \right). \quad (\text{A13})$$

We can express both terms in the above equation in terms of the three-dimensional spectrum of v_r , which can be calculated in the following way. The Fourier transform of v_r is

$$\hat{v}_r(\mathbf{k}) = \hat{\varphi}(\mathbf{k} \cdot \mathbf{n}) \text{sinc}\left(\frac{\Delta t U k_1}{2}\right) \mathbf{n} \cdot \hat{\mathbf{v}}(\mathbf{k}), \quad (\text{A14})$$

and the spectrum is the mean of the absolute square of $\hat{v}_r$:

$$\Phi_r(\mathbf{k}) = e^{-(\mathbf{k} \cdot \mathbf{n})^2 \sigma^2} \text{sinc}^2\left(\frac{\Delta t U k_1}{2}\right) n_i n_j \Phi_{ij}(\mathbf{k}), \quad (\text{A15})$$

where Φ_{ij} the spectral tensor of the velocity field.

Since

$$R_r(r\mathbf{n}) = \int \Phi_r(\mathbf{k}) \exp(-ir\mathbf{k} \cdot \mathbf{n}) d\mathbf{k} \quad (\text{A16})$$

where $\int d\mathbf{k} \equiv \iiint_{-\infty}^{\infty} dk_1 dk_2 dk_3$, the lidar structure function is

$$D_{\text{lidar}}(r) = 2 \int \Phi_r(\mathbf{k}) [1 - \exp(-ir\mathbf{k} \cdot \mathbf{n})] d\mathbf{k} . \quad (\text{A17})$$

435 In the inertial subrange, the spectral velocity tensor is

$$\Phi_{ij}(\mathbf{k}) = \frac{\alpha \varepsilon^{2/3}}{4\pi} k^{-17/3} (k^2 \delta_{ij} - k_i k_j) , \quad (\text{A18})$$

where α is the spectral Kolmogorov constant related to C_K by

$$C_K = \frac{27 \cdot 2^{1/3} \pi^{1/2} \Gamma(\frac{2}{3})}{55 \Gamma(\frac{5}{6})} \alpha \approx 1.31512 \alpha . \quad (\text{A19})$$

Because of the assumed isotropy of the small scales, we can without loss of generality assume that

$$440 \quad \mathbf{n} = (\cos \theta, \sin \theta, 0) . \quad (\text{A20})$$

With this definition and the change of variables

$$(k_1, k_2) = \kappa (\cos \beta, \sin \beta) , \quad (\text{A21})$$

such that $\mathbf{k} \cdot \mathbf{n} = \kappa \cos(\beta - \theta)$, using (A18), the last term in (A15) becomes

$$n_i n_j \Phi_{ij}(\mathbf{k}) = \frac{\alpha \varepsilon^{2/3}}{4\pi} k^{-17/3} [k^2 - (\mathbf{k} \cdot \mathbf{n})^2] = \frac{\alpha \varepsilon^{2/3}}{4\pi} k^{-17/3} [k^2 - \kappa^2 \cos^2(\beta - \theta)] . \quad (\text{A22})$$

445 The expression for the lidar structure function (A17) now becomes

$$D_{\text{lidar}}(r) = 2 \int e^{-(\mathbf{k} \cdot \mathbf{n})^2 \sigma^2} [1 - \cos(r\mathbf{k} \cdot \mathbf{n})] \text{sinc}^2\left(\frac{\Delta t U k_1}{2}\right) n_i n_j \Phi_{ij}(\mathbf{k}) d\mathbf{k} . \quad (\text{A23})$$

With the choices we have made, the first three terms inside the integral do not depend on k_3 , so the last term can be integrated over k_3 , and this can be done analytically to ease the numerical integration. The last term integrates to, using (A22),

$$\int_{-\infty}^{\infty} n_i n_j \Phi_{ij}(\mathbf{k}) dk_3 = \frac{\alpha \varepsilon^{2/3}}{4\pi} \frac{\pi^{1/2} \Gamma(\frac{4}{3})}{\Gamma(\frac{11}{6}) \kappa^{8/3}} \left(1 - \frac{8}{11} \cos^2(\beta - \theta)\right) . \quad (\text{A24})$$

450 Using the variable transform (A21) with the Jacobian determinant κ , the final expression for the lidar structure function becomes

$$D_{\text{lidar}}(r) = \frac{\alpha \varepsilon^{2/3} \Gamma(\frac{4}{3})}{2 \pi^{1/2} \Gamma(\frac{11}{6})} \int_0^{2\pi} \int_0^{\infty} e^{-(\sigma \kappa \cos(\beta - \theta))^2} [1 - \cos(r\kappa \cos(\beta - \theta))] \text{sinc}^2\left(\frac{\Delta t U \kappa \cos \beta}{2}\right) \frac{1 - \frac{8}{11} \cos^2(\beta - \theta)}{\kappa^{5/3}} d\kappa d\beta \quad (\text{A25})$$

Author contributions. AHS conceptualized the work presented here. JM and AHS developed the model presented in this study. AHS and MM performed the data analysis. AHS wrote the initial draft of the manuscript. All authors reviewed and edited the manuscript. JM acquired the funding and resources for the work.

Competing interests. MM is employed by Lumibird SA, the manufacturer of the lidar used in this study. The other authors declare no competing interests.

Acknowledgements. The funding for JM and AHS comes from Atmospheric Flow, Loads and pOwer for Wind energy (FLOW, HORIZON-CL5-2021-D3-03-04, Grant number 101084205), funded by the European Union. MM's work is funded by HORIZON-MSCA-2022-DN-01 under grant agreement no. 101119550 (AptWind). The authors acknowledge the technical staff at DTU Wind Energy for maintaining the BEAM 6x lidars stationed at the Østerild test site. Special thanks to Alfredo Peña for valuable inputs and suggestions. We also acknowledge and appreciate the efforts of the two reviewers: Feng Guo and Maxime Thiébaud, whose constructive comments and suggestions have greatly improved the quality of this article.

References

- 465 Abdelazim, S., Santoro, D., Arend, M., Moshary, F., and Ahmed, S.: A Hardware Implemented Autocorrelation Technique for Estimating Power Spectral Density for Processing Signals from a Doppler Wind Lidar System, *Sensors*, 18, <https://doi.org/10.3390/s18124170>, 2018.
- Banakh, V. and Smalikho, I.: Determination of the turbulent energy dissipation rate from lidar sensing data, *Atmospheric and oceanic optics c/c of optika atmosfery i okeana*, 10, 295–302, 1997.
- Bodini, N., Lundquist, J. K., and Newsom, R. K.: Estimation of turbulence dissipation rate and its variability from sonic anemometer and
470 wind Doppler lidar during the XPIA field campaign, *Atmospheric Measurement Techniques*, 11, 4291–4308, <https://doi.org/10.5194/amt-11-4291-2018>, 2018.
- Bonin, T. A., Choukulkar, A., Brewer, W. A., Sandberg, S. P., Weickmann, A. M., Pichugina, Y. L., Banta, R. M., Oncley, S. P., and Wolfe, D. E.: Evaluation of turbulence measurement techniques from a single Doppler lidar, *Atmospheric Measurement Techniques*, 10, 3021–3039, <https://doi.org/10.5194/amt-10-3021-2017>, 2017.
- 475 Davis, J. C., Collier, C. G., Davies, F., and Bozier, K. E.: Spatial variations of sensible heat flux over an urban area measured using Doppler lidar, *Meteorological Applications*, 15, 367–380, <https://doi.org/https://doi.org/10.1002/met.79>, 2008.
- Dolfi-Bouteyre, A., Canat, G., Lombard, L., Valla, M., Durécu, A., and Besson, C.: Long-range wind monitoring in real time with optimized coherent lidar, *Optical Engineering*, 56, 031 217–031 217, 2017.
- Drobinski, P., Dabas, A. M., and Flamant, P. H.: Remote Measurement of Turbulent Wind Spectra by Heterodyne DopplerLidar Technique,
480 *Journal of Applied Meteorology*, 39, 2434 – 2451, [https://doi.org/10.1175/1520-0450\(2000\)039<2434:RMOTWS>2.0.CO;2](https://doi.org/10.1175/1520-0450(2000)039<2434:RMOTWS>2.0.CO;2), 2000.
- Eberhard, W. L., Cupp, R. E., and Healy, K. R.: Doppler lidar measurement of profiles of turbulence and momentum flux, *Journal of Atmospheric and Oceanic Technology*, 6, 809–819, 1989.
- Frehlich, R. and Cornman, L.: Estimating spatial velocity statistics with coherent Doppler lidar, *Journal of Atmospheric and Oceanic Technology*, 19, 355–366, 2002.
- 485 Frehlich, R., Hannon, S. M., and Henderson, S. W.: Coherent Doppler lidar measurements of wind field statistics, *Boundary-Layer Meteorology*, 86, 233–256, 1998.
- Held, D. P. and Mann, J.: Comparison of methods to derive radial wind speed from a continuous-wave coherent lidar Doppler spectrum, *Atmospheric Measurement Techniques*, 11, 6339–6350, <https://doi.org/10.5194/amt-11-6339-2018>, 2018.
- Kaimal, J. C. and Finnigan, J. J.: *Atmospheric boundary layer flows: their structure and measurement*, Oxford university press, 1994.
- 490 Liu, H., Shah, S. L., and Jiang, W.: On-line outlier detection and data cleaning, *Comput. Chem. Eng.*, 28, 1635–1647, <https://api.semanticscholar.org/CorpusID:15696230>, 2004.
- Mann, J.: The spatial structure of neutral atmospheric surface-layer turbulence, *Journal of fluid mechanics*, 273, 141–168, 1994.
- Mann, J., Cariou, J.-P. C., Parmentier, R. M., Wagner, R., Lindelöw, P., Sjöholm, M., and Enevoldsen, K.: Comparison of 3D turbulence measurements using three staring wind lidars and a sonic anemometer, *Meteorologische Zeitschrift*, 18, 135–140,
495 <https://doi.org/10.1127/0941-2948/2009/0370>, 2009.
- O'Connor, E. J., Illingworth, A. J., Brooks, I. M., Westbrook, C. D., Hogan, R. J., Davies, F., and Brooks, B. J.: A Method for Estimating the Turbulent Kinetic Energy Dissipation Rate from a Vertically Pointing Doppler Lidar, and Independent Evaluation from Balloon-Borne In Situ Measurements, *Journal of Atmospheric and Oceanic Technology*, 27, 1652 – 1664, <https://doi.org/10.1175/2010JTECHA1455.1>, 2010.

- 500 Peña, A., Dellwik, E., and Mann, J.: A method to assess the accuracy of sonic anemometer measurements, *Atmospheric Measurement Techniques*, 12, 237–252, <https://doi.org/10.5194/amt-12-237-2019>, 2019.
- Peña, A., Yankova, G. G., and Mallini, V.: On the lidar-turbulence paradox and possible countermeasures, *Wind Energy Science*, 10, 83–102, <https://doi.org/10.5194/wes-10-83-2025>, 2025.
- Peña, A. and Hasager, C., eds.: *Remote Sensing for Wind Energy*, no. 3184(EN) in *Risø-I, Risø National Laboratory for Sustainable Energy*,
505 Technical University of Denmark, 2011.
- Peña, A.: Østerild: A natural laboratory for atmospheric turbulence, *Journal of Renewable and Sustainable Energy*, 11, 063 302, <https://doi.org/10.1063/1.5121486>, 2019.
- Pope, S. B.: *Turbulent Flows*, Cambridge University Press, 2000.
- Sathe, A. and Mann, J.: A review of turbulence measurements using ground-based wind lidars, *Atmospheric Measurement Techniques*, 6,
510 3147–3167, <https://doi.org/10.5194/amt-6-3147-2013>, 2013.
- Sathe, A., Mann, J., Vasiljevic, N., and Lea, G.: A six-beam method to measure turbulence statistics using ground-based wind lidars, *Atmospheric Measurement Techniques*, 8, 729–740, <https://doi.org/10.5194/amt-8-729-2015>, 2015.
- Smalikho, I., Köpp, F., and Rahm, S.: Measurement of atmospheric turbulence by 2- μ m Doppler lidar, *Journal of Atmospheric and Oceanic Technology*, 22, 1733–1747, 2005.
- 515 Smalikho, I. N. and Banakh, V. A.: Measurements of wind turbulence parameters by a conically scanning coherent Doppler lidar in the atmospheric boundary layer, *Atmospheric Measurement Techniques*, 10, 4191–4208, <https://doi.org/10.5194/amt-10-4191-2017>, 2017.
- Stull, R. B.: *An Introduction to Boundary Layer Meteorology*, vol. 13 of *Atmospheric and Oceanographic Sciences Library*, Kluwer Academic Publishers (Springer), Dordrecht, Boston, London, 1 edn., ISBN 978-90-277-2769-5 (softcover), 978-94-009-3027-8 (eBook), <https://doi.org/10.1007/978-94-009-3027-8>, 1988.
- 520 Syed, A. H., Mann, J., Platis, A., and Bange, J.: Turbulence structures and entrainment length scales in large offshore wind farms, *Wind Energy Science*, 8, 125–139, <https://doi.org/10.5194/wes-8-125-2023>, 2023.
- Taylor, G. I.: Statistical theory of turbulence-II, *Proceedings of the Royal Society of London. Series A-Mathematical and Physical Sciences*, 151, 444–454, 1935.
- Wildmann, N., Bodini, N., Lundquist, J. K., Bariteau, L., and Wagner, J.: Estimation of turbulence dissipation rate from Doppler
525 wind lidars and in situ instrumentation for the Perdigão 2017 campaign, *Atmospheric Measurement Techniques*, 12, 6401–6423, <https://doi.org/10.5194/amt-12-6401-2019>, 2019.
- Wildmann, N., Päsche, E., Roiger, A., and Mallaun, C.: Towards improved turbulence estimation with Doppler wind lidar velocity-azimuth display (VAD) scans, *Atmospheric Measurement Techniques*, 13, 4141–4158, <https://doi.org/10.5194/amt-13-4141-2020>, 2020.