

1                   **Prediction of basin-scale river channel migration based**  
2                   **on landscape evolution numerical simulation**

3

4   Jitian Wu<sup>1</sup>, Xiankui Zeng<sup>1</sup>, Qihui Wu<sup>1</sup>, Dong Wang<sup>1</sup>, and Jichun Wu<sup>1</sup>

5   <sup>1</sup> Key Laboratory of Surficial Geochemistry, Ministry of Education, School of Earth

6   Sciences and Engineering, Nanjing University, Nanjing 210023, China

7   **Correspondence:** Xiankui Zeng (xiankuizeng@nju.edu.cn)

8                   Submitted to *Hydrology and Earth System Sciences*

9

## 10 **Abstract**

11       The basin-scale river channel migration, driven by multiple factors such as  
12 hydrometeorological conditions, tectonic movements, and human activities, exerts a  
13 profound influence on regional morphological features, water resource, and ecosystem  
14 over long-term evolution. Conventional river dynamics approaches struggle to  
15 quantitatively characterize basin-scale channel migration due to difficulties in  
16 incorporating factors like basin hydrological processes and tectonic activities. This study  
17 proposed a novel technique for the numerical simulation of river channel migration,  
18 integrating a fully coupled multi-processes landscape evolution model (e.g., hydrological,  
19 geomorphic and tectonic processes) with channel extraction. Furthermore, to address  
20 model parameter uncertainty, a Markov chain Monte Carlo (MCMC) method with  
21 a modified likelihood function is used for parameter uncertainty quantification.  
22 Simultaneously, a computationally efficient Long Short-Term Memory (LSTM)-based  
23 surrogate model for channel migration is developed to overcome the computational  
24 bottleneck in uncertainty analysis. Applied to the Kumalake River Basin within China's  
25 Tarim Basin, the study employs the Landscape Evolution-Penn State Integrated  
26 Hydrologic Model (LE-PIHM) to construct the landscape evolution model. Combined with  
27 channel extraction, it simulates historical (2000-2021) and future (2021-2100) landscape  
28 evolution and channel migration processes. Results demonstrated that the developed river  
29 channel migration model, aided by parameter uncertainty analysis, reliably captures the  
30 dynamics of channel migration in the study area during 2000-2021. Additionally, the  
31 LSTM-based surrogate model achieves high accuracy, effectively resolving computational  
32 challenges in parameter uncertainty analysis. Predictions under different climate scenarios

33 reveal significant variations in future channel evolution, indicating that climate change will

34 profoundly reshape basin geomorphic features and river patterns.

35

## 36 **1. Introduction**

37 Basin-scale river channel migration is the result of interactions among multiple  
38 spheres within the complex earth system, influenced by various factors including  
39 meteorological, hydrological, and geological conditions (Li et al., 2023; Desormeaux et al.,  
40 2021). Over long temporal and basin scales, river channel migration regulates the spatial  
41 configuration of river networks, exerting significant impacts on regional water resources,  
42 ecological environments, and the development of civilizations. For instance, the substantial  
43 downstream migration of the Euphrates River between approximately 2112–2004 BCE  
44 contributed to the collapse of the Sumerian civilization (Hritz et al., 2010). The diversion  
45 of the lower Tarim River in 630 CE led to the disappearance of the ancient Loulan Kingdom  
46 (Yu et al., 2016; Shao et al., 2022). Quantitative research on river channel migration at the  
47 basin scale is crucial; it can not only inform projections of water resource distribution under  
48 climate change scenarios but also facilitate the reconstruction of linkages among channel  
49 evolution, fluvial ecosystems, and the trajectories of human civilizations (Hickin 1983;  
50 Zhou et al., 2022; Zhen et al., 2025).

51 River channel migration in the basin scale involves multiple coupled processes  
52 including surface water and groundwater water, weathering and erosion, and tectonic uplift.  
53 In particular, groundwater flow under real-world complex conditions may exhibit multi-  
54 scale heterogeneity (Lu et al., 2023). Together, these processes operate across broad  
55 spatiotemporal scales, exhibit complex mechanistic interactions, and are highly susceptible  
56 to anthropogenic disturbance. Numerical modeling therefore serves as the principal  
57 approach for quantitatively characterizing these dynamics. Among various modeling  
58 strategies, river channel migration models grounded in fluvial dynamics have been widely

59 used. For example, Ikeda et al. (1981) developed a single meander segment model by  
60 coupling flow fields with erosion rates. Morón et al. (2017) employed Delft3D (Lesser et  
61 al., 2004) to simulate the evolution of channel segments in the Nile River, Columbia River,  
62 Congo River and Negro River. Hsu et al. (2022) utilized Nays2DH (Ali et al., 2017) to  
63 simulate braided river morphology in the lower Dajia River, and identified that channel  
64 width as a primary factor governing migration direction. However, these methods generally  
65 focus on partial river channel domains (e.g., meander reaches) and fail to incorporate  
66 hydrologic processes and tectonic activities at the basin scale, thus limiting their  
67 applicability to river channel migration over engineering timescales and channel segment  
68 scales.

69 As a typical geomorphic unit, river channels are fundamentally governed by landscape  
70 evolution processes (Lisenby et al., 2020). Landscape evolution models (LEMs) are  
71 numerical tools designed to quantify elevation changes across watersheds over geological  
72 timescales, incorporating hydrologic processes and tectonic uplift (Bishop, 2007; Tucker  
73 and Hancock, 2010; Hou et al., 2025). By integrating LEMs with river channel extraction  
74 techniques, it becomes feasible to simulate long-term, basin-scale channel migration.  
75 Commonly used LEMs include CASCADE (Braun et al., 1997), CHILD (Tucker et al.,  
76 2001), CAESAR-Lisflood (Coulthard et al., 2013), DAC (Goren et al., 2014; Yang et al.,  
77 2015), Landlab (Barnhart et al., 2020; Litwin et al., 2024), all of which have been widely  
78 used for simulating landscape evolution. Nevertheless, these models often simplify or  
79 neglect groundwater dynamics and lateral erosion processes (Whipple et al., 2017), making  
80 it difficult to accurately capture these crucial hydrological and geomorphic processes in  
81 large-scale, long-term watershed landscape evolution simulations.

82 Zhang et al. (2016) developed LE-PIHM by coupling surface-subsurface  
83 hydrologic processes with slope and channel sediment transport, while accounting for  
84 bedrock weathering and tectonic uplift, based on the PIHM framework (Qu et al., 2007).  
85 LE-PIHM is particularly suited for quantifying landscape evolution processes over long  
86 durations and basin extents. Nevertheless, current studies rarely integrate multiple  
87 processes for real basin-scale simulations of coupled landscape evolution and river channel  
88 migration. Meanwhile, LEMs contain a large number of parameters to be identified, the  
89 non-negligible parameters uncertainty can lead to unreliable simulations of landscape  
90 evolution and river channel migration, which has not been adequately addressed in current  
91 researches (Temme et al., 2009; Neuendorf et al., 2018; Xu et al., 2024). To quantify river  
92 channel migration at the basin scale under the coupled effects of multiple processes, the  
93 LE-PIHM was used to establish a landscape evolution model in this study, and the  
94 distribution of river channels was identified using a river channel extraction technique. In  
95 addition, Long Short-Term Memory (LSTM) surrogate modeling and Bayesian uncertainty  
96 analysis were employed to quantify parameter uncertainty in the LEMs.

97 This study selects the Kumalake River Basin within China's Xinjiang Tarim Basin as  
98 the research area. This basin features diverse geomorphic types and complex climatic  
99 conditions, and has experienced significant river channel migration in recent decades  
100 (Wang et al., 2024), making it an ideal site for conducting basin-scale simulations of terrain  
101 evolution and river channel dynamics. Based on the identified model parameters  
102 distribution of LE-PIHM, the river channel migration process in the study area over the  
103 past two decades was quantitatively reconstructed. Finally, this study conducted future  
104 scenario simulations of landscape evolution and river channel migration under projected

105 climate change through the end of the 21st century.

106 The structure of this paper is as follows: Sect. 2 outlines the methodology and overall  
107 workflow; Sect. 3 introduces the construction of the basin-scale river channel migration  
108 model and the development of an LSTM-based surrogate model for uncertainty analysis;  
109 Sect. 4 presents the results and discussion; and Sect. 5 provides concluding remarks and  
110 summarizes the key findings.

## 111 **2. Methodology**

### 112 **2.1 Framework of basin-scale river channel migration prediction**


113 The framework of predicting basin-scale river channel migration in this paper consists  
114 of three parts (Fig.1).

115 Part 1: Establishment of the basin-scale river channel migration model. The basin-  
116 scale river channel migration model is implemented in two steps. First, landscape evolution  
117 is simulated using LE-PIHM to obtain the elevation distribution of the study area.  
118 Subsequently, the DEM is processed using the D8 algorithm to extract the spatial  
119 distribution of river channel.

120 Part 2: Development of a LSTM-based surrogate model for efficient parameter  
121 uncertainty analysis. To improve the efficiency of parameter identification, a surrogate  
122 model corresponding to the original river channel migration model (Part 1) is developed  
123 for the reconstruction period (2000–2021). Parameter sensitivity analysis is first conducted  
124 to identify the key landscape evolution parameters of LE-PIHM. Then, 3,000 parameter  
125 sets are sampled and input into the basin-scale river channel migration model (Part 1) to  
126 generate the associated planar channel coordinates, which serve as the training datasets.  
127 The LSTM is trained using these data to construct a surrogate model of basin-scale river

128 channel migration, substantially reducing the computational burden of parameter  
129 uncertainty analysis.

130 Part 3: Parameter uncertainty analysis and the prediction of channel migration. Based  
131 on the LSTM-based surrogate model (Part 2), parameter uncertainty analysis is conducted  
132 using a modified-likelihood Markov chain Monte Carlo (MCMC) approach constrained by  
133 observed river channel data from 2000 to 2021. The resulting posterior distribution of river  
134 channel enable the reconstruction of channel migration processes over 2000–2021. The  
135 maximum-likelihood posterior parameter set is then selected, and the original river channel  
136 migration model (Part 1) is executed under future climate scenarios to predict channel  
137 migration from 2021 to 2100.

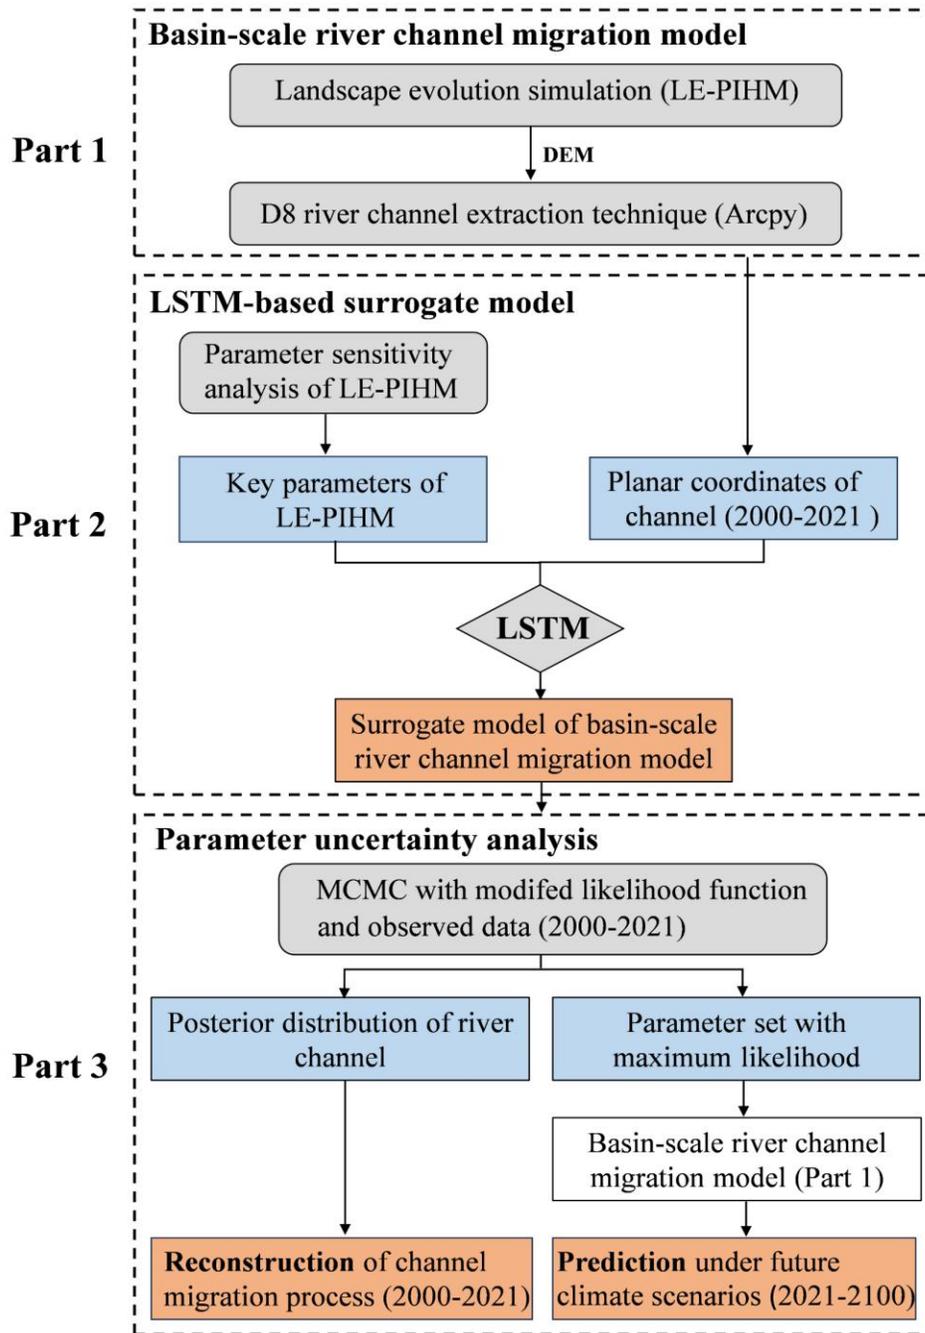

138  
139

**Figure 1.** Technical roadmap of basin-scale river channel migration prediction

## 140 2.2 Basin-scale river channel migration model

### 141 2.2.1 Landscape evolution simulation

142 The Landscape Evolution–Penn State Integrated Hydrologic Model (LE-PIHM) was  
143 used to simulate the landscape evolution processes. LE-PIHM couples the processes of

144 surface water and groundwater, snow accumulation and melt, hillslope and river channel  
 145 sediment transport, weathering and erosion, as well as tectonic uplift (Fig. 2). It is a basin-  
 146 scale fully coupled hydrologic-process-based landscape evolution model (Zhang et al.,  
 147 2016). The hydrologic and geomorphic modules are tightly coupled within the same control  
 148 volume through mass conservation and flux closure, and the state variables are updated  
 149 synchronously at each time step. For each grid element (a Triangulated Irregular Network,  
 150 TIN), the model simultaneously tracks seven state variables: canopy water storage,  
 151 snowpack, surface-water depth, vadose-zone water storage, saturated-zone groundwater  
 152 table, land-surface elevation, and bedrock-interface elevation. These state variables are  
 153 assembled into a unified global system of ordinary differential equations and are solved  
 154 concurrently. Within each TIN control volume, multiple fluxes including infiltration,  
 155 recharge, overland flow, groundwater flow, and sediment/weathering/uplift fluxes coexist  
 156 and are transported in a coupled manner across the entire TIN mesh domain.

157 The model simulates surface elevation change based on the principle of mass  
 158 continuity. According to the law of mass conservation, the geomorphic process equation  
 159 can be expressed as the temporal variation of the mass of the regolith and bedrock.

$$\begin{aligned}
 \frac{\partial(\sigma_{re} h dx dy)}{\partial t} + \frac{\partial(\sigma_{ro} e dx dy)}{\partial t} = & \sigma_{re} q_c dy - [\sigma_{re} q_c dy + \frac{\partial(\sigma_{re} q_c dy)}{\partial x} dx] \\
 & + \sigma_{re} q_c dx - [\sigma_{re} q_c dx + \frac{\partial(\sigma_{re} q_c dy)}{\partial y} dy] \\
 & + \sigma_{re} q_s dy - [\sigma_{re} q_s dx + \frac{\partial(\sigma_{re} q_s dy)}{\partial y} dx] \\
 & + \sigma_{re} q_s dx - [\sigma_{re} q_s dx + \frac{\partial(\sigma_{re} q_s dy)}{\partial y} dy] \\
 & \sigma_{ro} U dx dy
 \end{aligned} \tag{1}$$

161 where  $\sigma_{re}$  is the bulk density of regolith (kg/m<sup>3</sup>);  $\sigma_{ro}$  is the bulk density of bedrock (kg/m<sup>3</sup>);  
 162  $h$  is the regolith thickness (m);  $e$  is the elevation of the bedrock surface (m); The regolith

163 thickness  $h$  is defined as the difference between the ground surface elevation  $z$  and the  
 164 bedrock elevation  $e$ ;  $q_c$  is the lateral volumetric flux of regolith ( $m^2/yr$ ), driven by processes  
 165 such as soil creep;  $q_s$  is the surface sediment flux by overland flow ( $m^2/yr$ );  $U$  is the tectonic  
 166 uplift rate ( $m/yr$ ).

167 The governing equations for hydrologic processes describe the water flux dynamics  
 168 from the vegetation canopy to the regolith layer. These processes can be represented as  
 169 follows:

$$\left. \begin{aligned}
 \frac{\partial \Psi_{\text{canopy}}}{\partial t} &= vFrac(1 - f_s)p - E_c - TF \\
 \frac{\partial \Psi_{\text{snow}}}{\partial t} &= f_s p - SM \\
 \frac{\partial \Psi_{\text{surf}}}{\partial t} &= \nabla q_{\text{sw}} + p_{\text{net}} - I - E_s \\
 \frac{\partial \Psi_{\text{unsat}}}{\partial t} &= I - R - E_g - E_{\text{gt}} \\
 \frac{\partial \Psi_{\text{sat}}}{\partial t} &= \nabla q_{\text{gw}} + R - E_{\text{sat}} - E_{\text{tsat}}
 \end{aligned} \right\} \quad (2)$$

171 where:  $\Psi_{\text{canopy}}$  is the canopy water storage (m);  $\Psi_{\text{snow}}$  is the snow depth (m);  $\Psi_{\text{surf}}$  is the  
 172 surface water depth (m);  $\Psi_{\text{unsat}}$  is the water storage in the unsaturated zone (m);  $\Psi_{\text{sat}}$  is  
 173 the groundwater (saturated zone) storage (m);  $vFrac$  is the fraction of vegetation  
 174 coverage;  $f_s$  is the fraction of precipitation falling as snow;  $P$  is the precipitation rate  
 175 ( $m/day$ );  $E_c$  and  $E_s$  are the evaporation rates from the canopy and surface water, respectively  
 176 ( $m/day$ );  $TF$  is the throughfall rate from canopy to ground ( $m/day$ );  $SM$  is the snowmelt rate  
 177 ( $m/day$ );  $p_{\text{net}}$  is the net precipitation reaching the ground surface ( $m/day$ );  $I$  is the  
 178 infiltration rate ( $m/day$ );  $E_g$  and  $E_{\text{sat}}$  are the evaporation rates from the unsaturated and  
 179 saturated zones, respectively ( $m/day$ );  $E_{\text{gt}}$  and  $E_{\text{tsat}}$  are the transpiration rates from the

180 unsaturated and saturated zones, respectively (m/day);  $q_{sw}$  is the unit-width overland flow  
181 rate (m<sup>2</sup>/day);  $q_{gw}$  is the unit-width groundwater (lateral) flow rate (m<sup>2</sup>/day).

182 The values of  $q_{sw}$  and  $q_{gw}$  are determined by the Manning equation and Darcy's law,  
183 respectively, as follows:

$$184 \quad q_{sw} = \frac{\psi_{surf}^{5/3}}{n_s} (\nabla(\psi_{surf} + z))^{1/2} \quad (3)$$


$$185 \quad q_{gw} = \psi_{sat} k_{sat} \nabla(\psi_{sat} + e) \quad (4)$$

186 where  $n_s$  is the Manning's roughness coefficient;  $k_{sat}$  is the horizontal hydraulic  
187 conductivity of the aquifer (m/day). For detailed formulas and variable descriptions, please  
188 refer to Qu and Duffy (2007).

189 In summary, topography elevation and bedrock elevation determine hydraulic slopes  
190 and head gradients, whereas hydrologic states (e.g., surface-water depth and groundwater  
191 level) govern shear stress and sediment-transport capacity. Sediment fluxes ( $q_s$ ), hillslope  
192 fluxes ( $q_c$ ), and uplift terms are solved in a coupled manner to update elevations, which in  
193 turn modify hydraulic gradients and flow-routing patterns. This two-way feedback implies  
194 that the evolving landscape constrains river dynamics, and river processes reshape the  
195 landscape, thereby forming a self-consistent loop of hydro-geomorphic co-evolution.  
196 Collectively, The governing equations (1-4) couple hydrological processes, hillslope and  
197 channel sediment transport processes, and tectonic movements to form a state-of-the-art  
198 hydro-geomorphic model for simulating landscape evolution.

199

200

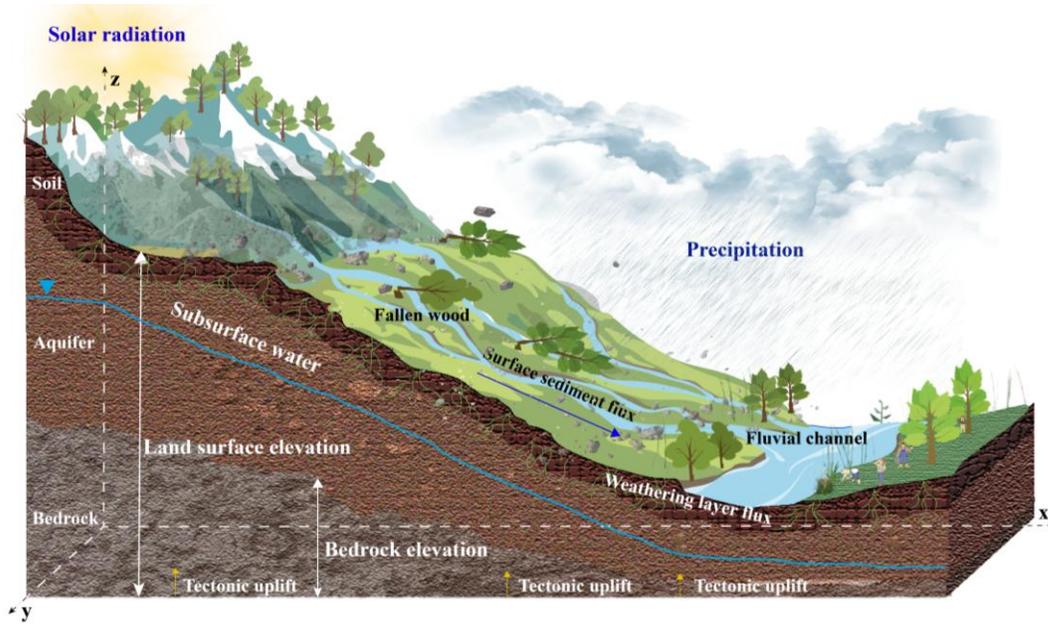

201

202

**Figure 2.** Schematic diagram of the Landscape evolution process.

203

### **2.2.2 D8 algorithm river channel extraction technique**

204

205

206

207

208

209

210

211

The river channel extraction in basin-scale is implemented through a topography-based extraction technique. This technique is based on the principle of maximum gradient and identifies river channels within the watershed using surface elevation data. Specifically, the landscape evolution simulation provides the surface elevation distribution of the study area, from which a digital elevation model (DEM) is constructed. The DEM is first filled to remove depressions, followed by spatial analysis to determine surface flow direction and compute flow accumulation. River channel distribution is then extracted based on the accumulated flow.

212

213

214

215

216

The standard D8 algorithm, known for its simplicity and practicality, is currently the most widely used and reliable method for determining water flowpaths from DEM (O’Callaghan & Mark, 1984; Tarboton, 1997). The ArcPy scripting in ArcGIS, which implements the standard D8 algorithm (Esri, 2022), will be used in this study to extract watershed river channels through the ArcGIS hydrological analysis platform.

## 217 **2.2.3 Long Short-Term Memory algorithm**

218 Long Short-Term Memory (LSTM) is a specialized type of Recurrent Neural Network  
219 (RNN), originally proposed by Hochreiter et al. (1997) and later extended and popularized  
220 by Graves et al. (2005). Traditional RNNs often suffer from the vanishing or exploding  
221 gradient problem when processing long sequential data, making it difficult to capture long-  
222 term dependencies effectively. LSTM addresses this issue by introducing gated  
223 mechanisms namely the forget gate, input gate, and output gate, which dynamically  
224 regulate the flow of information. These gates allow the network to selectively store, update,  
225 and output information within memory cells, thereby effectively addressing the gradient  
226 instability problem in long-sequence modeling.

227 To address the computational burden caused by repeated model evaluations during  
228 the parameter uncertainty analysis of the basin-scale river channel migration model, this  
229 study constructs a surrogate model using an LSTM network. Specifically, the LSTM  
230 algorithm is employed to build the nonlinear response relationship between the key  
231 parameters of LE-PIHM and the spatial distribution of river channels (i.e., planar  
232 coordinates of reaches) within the study area.

## 233 **2.3 Bayesian uncertainty analysis**

### 234 **2.3.1 Markov chain Monte Carlo simulation**

235 Markov chain Monte Carlo (MCMC) is a statistical simulation technique based on  
236 Bayesian theory. Its core idea is to construct a Markov chain that iteratively explores the  
237 parameter probability space to generate samples from the target posterior distribution. As  
238 the chain evolves, its stationary distribution converges to the posterior distribution of the  
239 parameters of interest (Vrugt et al., 2009).

240 MCMC integrates observational data through Bayes' theorem, enabling parameter  
 241 samples to progressively converge from the prior distribution  $p(\theta)$  to the posterior  
 242 distribution  $p(\theta | D)$ .

$$243 \quad p(\theta | D) = \frac{L(\theta | D)p(\theta)}{\int L(\theta | D)P(\theta)d(\theta)} \quad (5)$$

244 where  $L(\theta | D)$  represents the likelihood function of a parameter sample  $\theta$ ,  $D$  represents  
 245 the observed data. The likelihood function  $L$  is typically defined as a Gaussian likelihood  
 246 function:

$$247 \quad L(\theta^i | D) = \frac{1}{2\pi^{n/2} |\Sigma|^{1/2}} \exp \left[ -\frac{[D - f(\theta^i)]^T \Sigma^{-1} [D - f(\theta^i)]}{2} \right] \quad (6)$$

248 where  $n$  is the number of observed data points,  $f(\theta^i)$  denotes the hydrologic model  
 249 simulation result given the parameter  $\theta^i$ , and  $\Sigma$  is the covariance matrix of the simulation  
 250 residuals.

### 251 **2.3.2 Hausdorff distance and the modified likelihood function**


252 The Hausdorff distance is employed as a metric to quantify the discrepancy between  
 253 the simulated and the observed river channels. The Hausdorff distance is a well-established  
 254 measure of curve-to-curve spatial similarity and has been widely applied in studies of river-  
 255 morphology matching, path comparison, and geomorphic feature shape analysis (Lei and  
 256 Lei, 2022; Bogoya et al., 2019; Ranacher and Tzavella, 2014). The Hausdorff distance  
 257 summarizes distances across all discretized points along the entire channel, thereby  
 258 accounting for both the overall displacement and differences in channel curvature and  
 259 planform geometry.

260 The core concept of the Hausdorff distance is to treat two curves as two sets of discrete  
 261 points (Fig. 3). Suppose we have two point-sets,  $A = \{a_1, \dots, a_p\}$ ,  $B = \{b_1, \dots, b_q\}$ ,  $p$  and  $q$

262 represent the number of points in sets A and B, respectively, the bidirectional Hausdorff  
 263 distance  $HD(A, B)$  between sets A and B is defined as:

$$264 \quad HD(A, B) = \text{Max} [h(A, B), h(B, A)] \quad (7)$$

265 where  $h(A, B)$  and  $h(B, A)$  represent the one-sided Hausdorff distances. Specifically,  $h(A,$   
 266  $B)$  denotes the set of minimum distances from each point in set A to the nearest point in  
 267 set B,  $h(A, B) = h(a_{1\min}, a_{2\min}, \dots, a_{p\min})$ , where  $a_{1\min}$  is the minimum distance from point  
 268  $a_1$  to the points in set B. Similarly,  $h(B, A) = h(b_{1\min}, b_{2\min}, \dots, b_{p\min})$  which denotes the set  
 269 of minimum distances from each point in B to the nearest point in A.

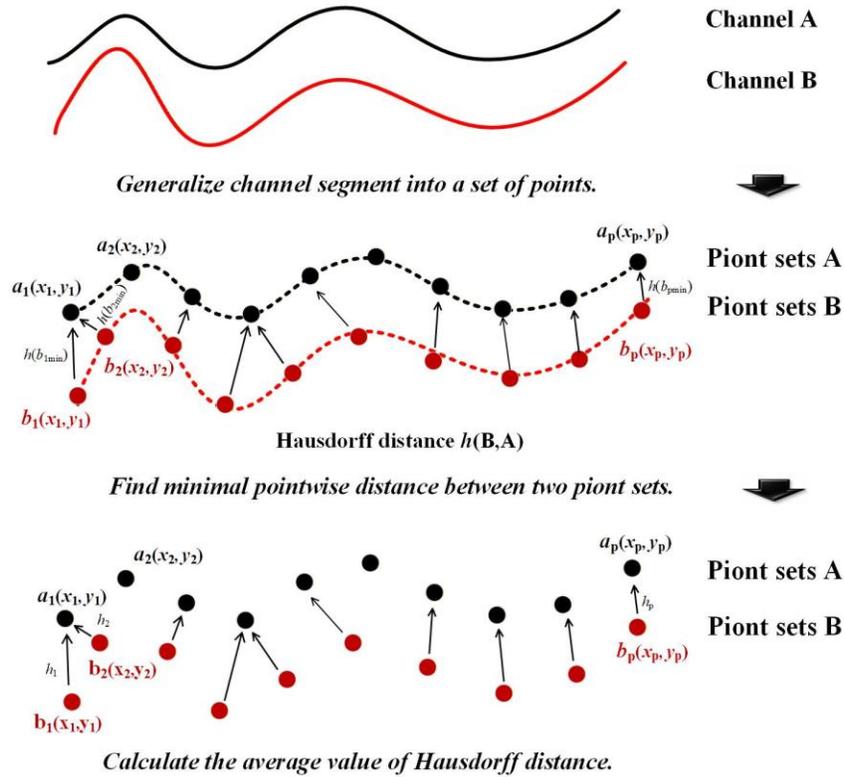

270

271 **Figure 3.** Conceptual schematic diagram of Hausdorff distance.

272 In this study, we modified Eq. (7) by replacing the maximum operation in the one-  
 273 sided distance with the mean of the minimum distances, and set p equal to q. This  
 274 modification better captures the overall spatial discrepancy between two river channel  
 275 curves and is referred to as the average Hausdorff distance ( $H$ ). A smaller value of  $H$

276 indicates that the simulated river channel more closely matches the observed channel.

$$277 \quad H = \frac{1}{2p} \sum_{i=1}^p [h(A, B) + h(B, A)] \quad (8)$$

278 In the uncertainty analysis of river channel migration simulation, the likelihood  
279 function quantifies the degree of fit between the simulated and observed river channels. To  
280 enable the parameter uncertainty quantification through MCMC, the original likelihood  
281 function (i.e., Eq. (6)) is revised by treating the average Hausdorff distance ( $H$ ) as the  
282 simulation target. The observed value of  $H$  (denoted as  $H_{obs}$ ) is set to 0, this indicates the  
283  $H$  between the real river channel and itself. Meanwhile, the  $\Sigma$  in Eq. (6) collapses to a single  
284 variance term, and the residuals in likelihood function can be expressed as:

$$285 \quad D - f(\theta^i) = H - H_{obs} = H - 0 = H \quad (9)$$

286 The observation error of  $H_{obs}$  is treated as a random error variable that follows a zero-  
287 mean, independent and identically distributed gaussian error model, i.e.,  $N(0, \sigma^2)$ .  
288 Combining Eq. (6) with Eq. (9) and taking the natural logarithm, a modified likelihood  
289 function designed for quantifying river channel simulation is obtained:

$$290 \quad \ln L = -\frac{1}{2} \left[ \frac{H^2}{\sigma^2} + \ln(2\pi\sigma^2) \right] \quad (10)$$

291 In other words, this modified form of the likelihood function (Equation 10) is used in the  
292 MCMC-based uncertainty analysis of river channel model parameters.


### 293 **3. Construction of the river channel migration model**

#### 294 **3.1 Study area**

295 The Kumalake River Basin is located in the northwestern corner of the Tarim Basin  
296 in Xinjiang, China, covering an area of about 3,500 square kilometers. The basin is

297 bordered by the towering Tianshan mountains to the north, the flat Aksu Plain to the south,  
 298 and the Toxkan River Basin to the west. The landscape exhibits a distinct elevation gradient  
 299 sloping from north to south, with a complex geomorphic setting comprising mountainous  
 300 hillslopes, valley plains, and fluvial terraces (Fig. 4). The Kumalake River, approximately  
 301 89.34 km in length, is the largest tributary of the Aksu River. It flows from the northwest  
 302 to the southeast across the study area and exits at the southeastern edge of the basin, where  
 303 it joins the Tuoshigan River. The combined flow continues into the Aksu River and  
 304 eventually discharges into the main stem of the Tarim River (Tang et al., 2007).

305 The Kumalake River has experienced pronounced channel migration during the last  
 306 two decades. This study selects the Kumalake River Basin as the case study area, with a  
 307 focus on simulating river channel migration over the period from 2000 to 2021. The  
 308 simulation is conducted within the landscape evolution modeling framework, and a  
 309 parameter uncertainty analysis is performed to improve the reliability of the model outputs.

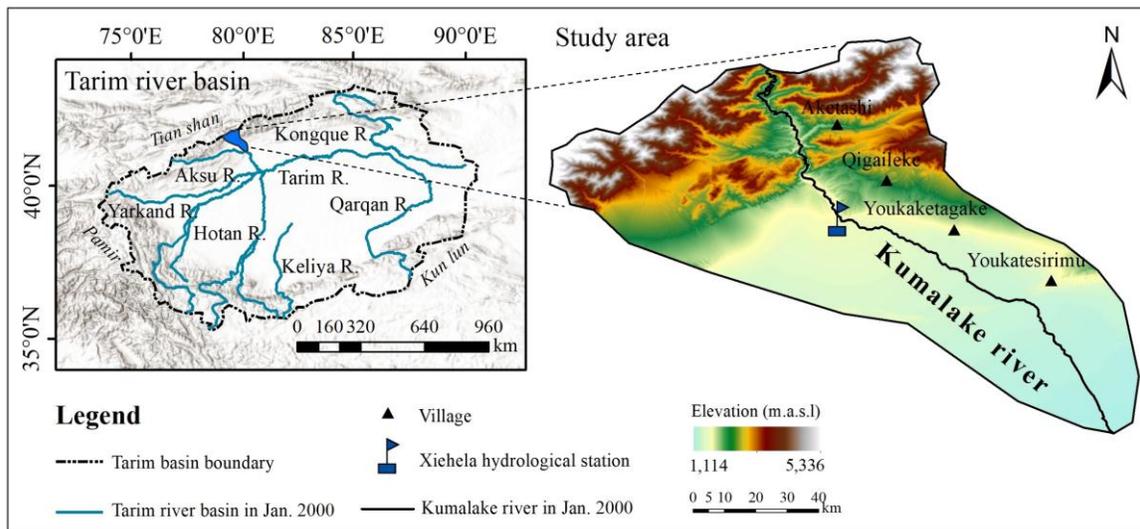


310  
 311 **Figure 4.** Schematic diagram of the watershed in the study area. Basemap: Esri World  
 312 Hillshade (Esri).

313

314 **3.2 Model input data**

315 In this study, LE-PIHM combined with a river channel extraction technique is  
316 employed to simulate the spatial distribution of river channels. Notably, four categories of  
317 physical properties within the study area, i.e., soil, aquifer, bedrock, and land cover, exhibit  
318 significant spatial heterogeneity (see Table 1 and Fig. 5). The driving force data in LE-  
319 PIHM primarily include leaf area index, precipitation rate, air temperature, downward  
320 shortwave radiation, snowmelt rate, wind speed, and relative humidity (Table 1)

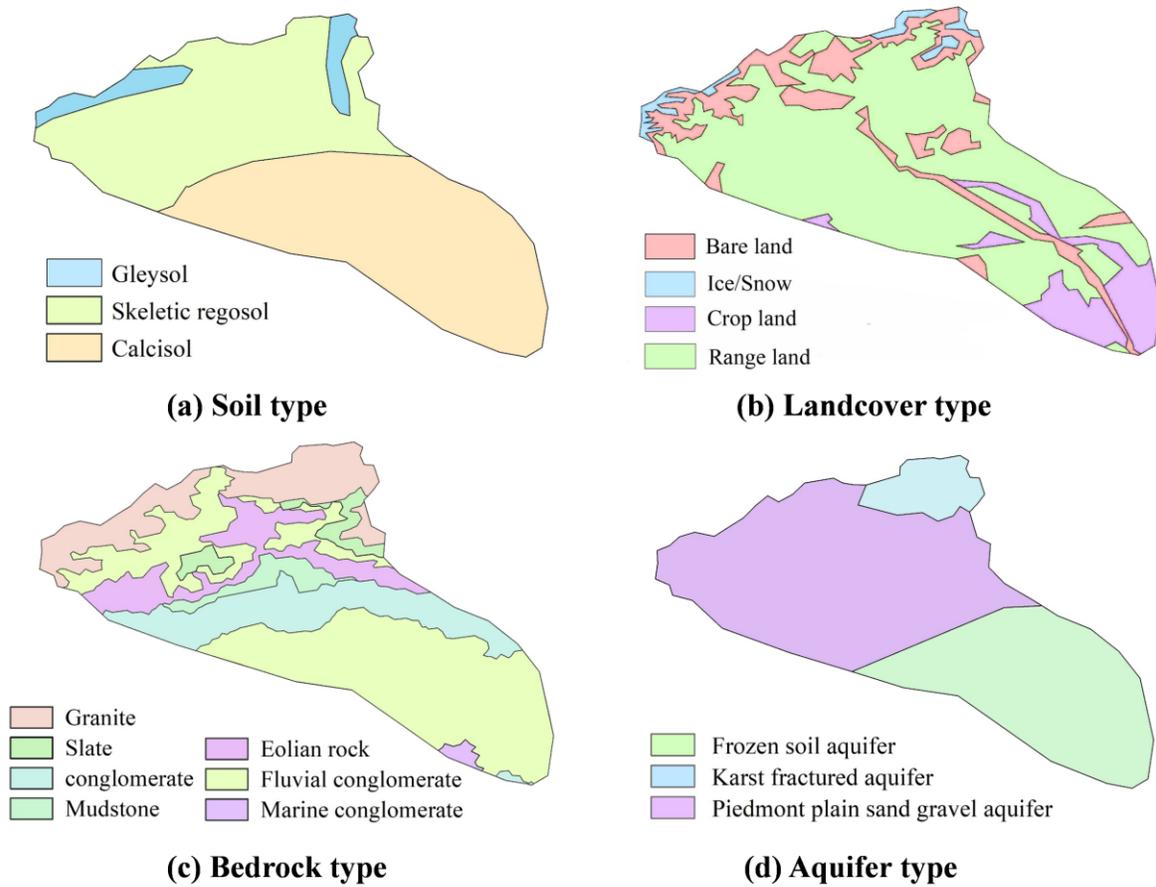

321


322 **Figure 5.** Zonation of average tectonic uplift rates in the study area from 2000 to 2021.

323 **Table 1.** Types and sources of input data for the landscape evolution model.

<b>Data Type</b>	<b>Spatial Resolution</b>	<b>Temporal Resolution</b>	<b>Data Source</b>	<b>URL</b>
Soil type	1:5000000	/	Food and Agriculture Organization of the UN	<a href="https://data.apps.fao.org/?lang=en">https://data.apps.fao.org/?lang=en</a>
Bedrock type	1:1000000	/	International Soil Reference and Information Center	<a href="https://soilgrids.org/">https://soilgrids.org/</a>
Land cover	10 m	/	Environmental Systems Research Institute, Inc	<a href="https://livingatlas.arcgis.com/landcover/">https://livingatlas.arcgis.com/landcover/</a>
Aquifer type	/	/	China Cartographic Publishing House	<a href="https://www.sinomaps.com/pub/">https://www.sinomaps.com/pub/</a>
Leaf area index	0.5°×0.625°	1h		
Surface roughness	0.5°×0.625°	1h		
Precipitation rate	0.25°	3h		
Air temperature	0.25°	3h		
Shortwave radiation	0.25°	3h		
Canopy interception storage	0.25°	3h	National Aeronautics and Space Administration	<a href="https://www.nasa.gov/">https://www.nasa.gov/</a>
Soil water storage	0.25°	3h		
Snow depth	0.25°	3h		
Snow melt rate	0.25°	3h		
Wind speed	0.25°	3h		
Relative humidity	1.25°	3h		
Initial surface elevation	30 m	/		
Initial bedrock depth	250 m	/	International Soil Reference and Information Center	<a href="https://isric.org/">https://isric.org/</a>

All links in the table were last accessed on 2 December 2025

325 As an essential driving factor in landscape evolution, the rock uplift rate data were  
326 derived from the vertical crustal velocity field of China (Wang et al., 2020; Zubovich et al.,  
327 2016), with the Chinese GNSS velocity field taken from Wang and Shen (2020;  
328 <https://doi.org/10.7910/DVN/C1WE3N>) and the Pamir–Tien Shan GNSS velocities from  
329 Zubovich et al. (2016; <https://doi.org/10.1002/2015TC004055>). The spatial distribution of  
330 the average rock uplift rate in the study area from 2000 to 2021 was obtained through  
331 kriging interpolation (Fig. 6).

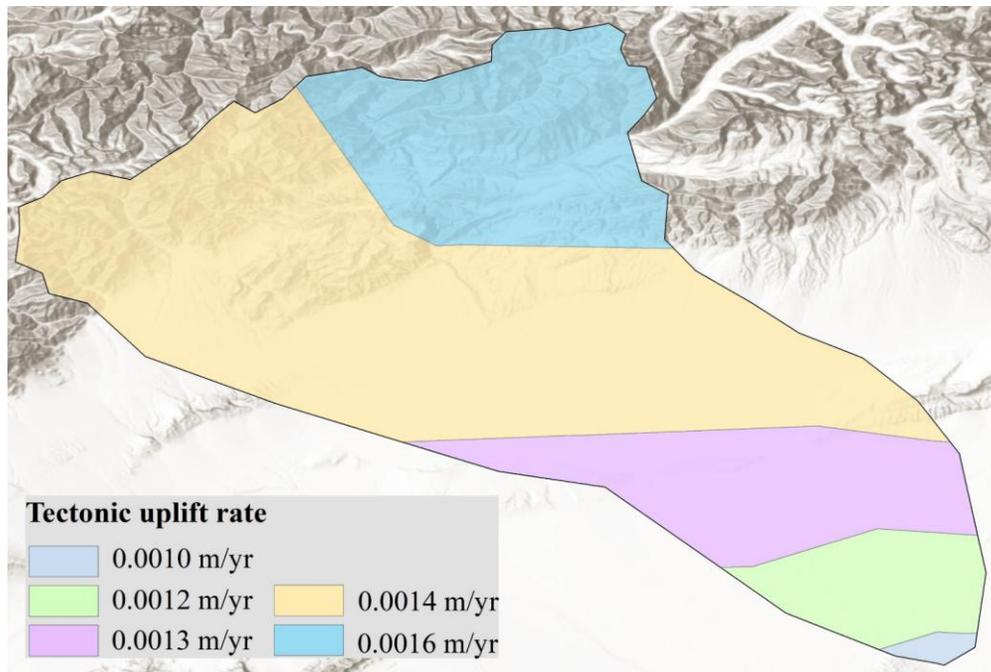


332  
333 **Figure 6.** Zonation of average tectonic uplift rates in the study area from 2000 to 2021.  
334 Basemap: Esri World Hillshade (Esri).

### 335 **3.3 Observed river channel planform data**

336 Observed river channel planform data for December 2007, February 2014, and  
337 December 2021 were obtained using the Google Earth Pro image platform (see Fig. 7).  
338 Among these, the spatial distribution of river channels from December 2007 and February  
339 2014 were used to identify the posterior distribution of model parameters (i.e., key


340 parameters of LE-PIHM), while the December 2021 data were employed to validate the  
341 river channel migration results.

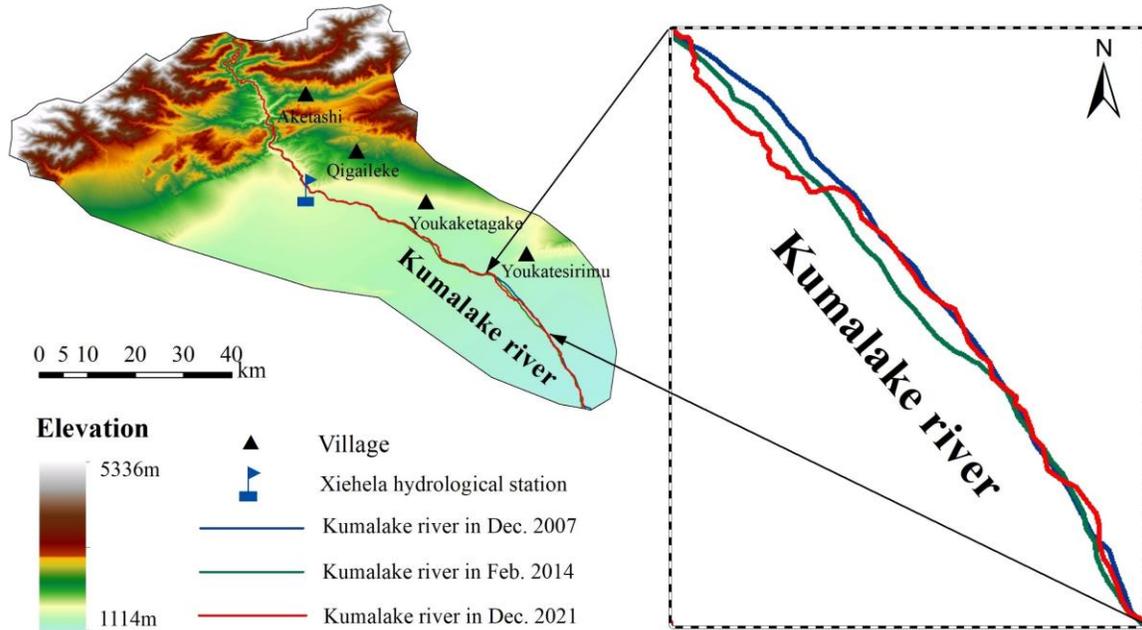

**Figure 7.** The spatial distribution of the Kumalake River channels in the study area.

### 3.4 Model settings

345 The outlet of the Kumalake River Basin was set at the intersection with the  
346 southeastern boundary of the study area, while all other boundaries were defined as no-  
347 flow boundaries. An unstructured triangular mesh was used to discretize the study area  
348 spatially. To accurately capture the landscape evolution processes in areas surrounding the  
349 river channel, mesh refinement was applied in the channel zones, with grid sizes less than  
350 50 meters near the river. A total of 25,968 unstructured triangular elements were generated  
351 for the study area (see Fig. 8a).

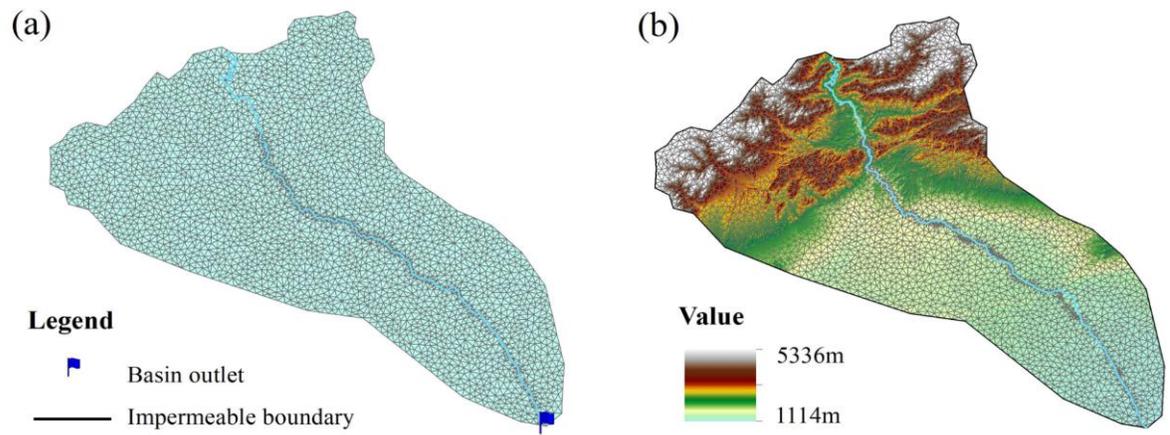

352

353

**Figure 8.** Mesh discretization and initial elevation grid of the research area.

354

355

356

357

The initial conditions required by LE-PIHM include ground surface elevation (Fig. 8b), canopy interception storage, snow depth, surface water depth, soil water storage, and groundwater storage. The canopy interception storage is initialized to 0 m in the model (Fig. 9 and Table 1).

358


359

360

361

362

The model was configured to run from January 2000 to December 2021, covering a total of 264 months (22 years). To capture the seasonal variability of hydrologic processes in the study area while controlling computational load, the time step was set to one month. The LE-PIHM model was executed on an Intel Xeon E5-2680 v3 server, with an average runtime per simulation of 195 minutes.

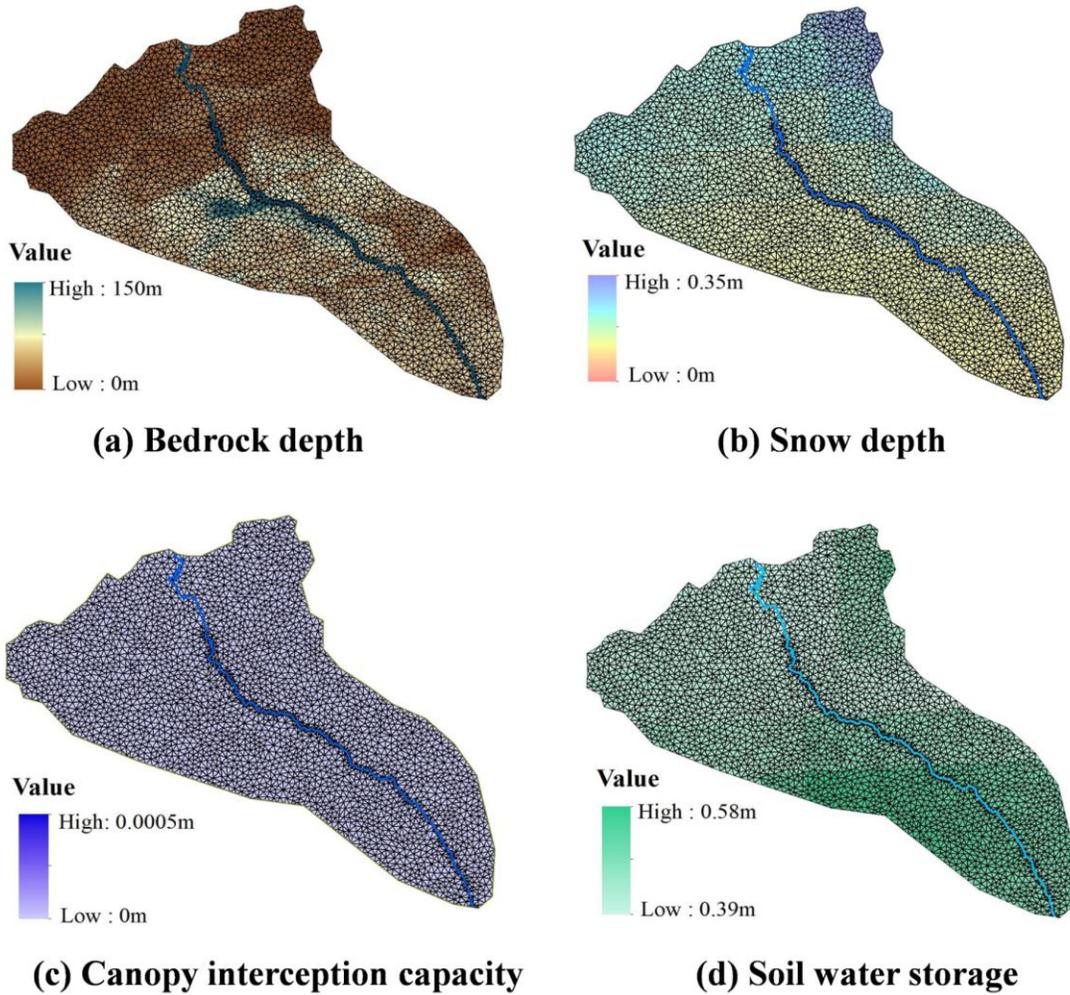

363

364

**Figure 9.** The initial conditions of landscape evolution model.

365

### 3.5 LSTM-based surrogate model for uncertainty analysis

366

After constructing the basin-scale channel migration model, the next part is to conduct

367

parameter uncertainty analysis, followed by the reconstruction of river channel migration

368

over 2000–2021 and the prediction of landscape evolution and river channel changes from

369

2021 to 2100 under future climate scenarios.

370

However, performing parameter uncertainty analysis using MCMC requires a large

371

number of runs of the original model (i.e., the basin-scale channel migration model), which

372

results in a significant computational burden. To reduce this computational cost, this study

373 employs an LSTM network to construct a surrogate model for river channel migration. The  
 374 surrogate model employs a two-layer LSTM architecture followed by a linear fully  
 375 connected layer, with normalized LE-PIHM parameters as inputs and flattened planar  
 376 river-channel coordinates as outputs, and is trained using the Adam optimizer to minimize  
 377 the root-mean-square error (RMSE) loss between predicted and reference channel  
 378 planforms. The main steps and more details of LSTM-based surrogated models are as  
 379 follows:

380 *i.* The Sobol method is applied for parameter sensitivity analysis. Considering the  
 381 property parameters of surface cover, soil, aquifer, and bedrock, 11 highly sensitive  
 382 parameters LE-PIHM are selected as the input variables for the surrogate model (Table 2).

383 **Table 2.** The parameters of landscape evolution model and their prior ranges.

Parameters	Units	Prior distribution
Vegetation fractional coverage (VegFrac)	/	[0.075, 0.225]
Root zone depth (Rzd)	m	[0.15, 0.45]
Soil vertical hydraulic conductivity (KVs)	m/d	[0.30, 0.90]
Soil porosity (Ns)	/	[0.175, 0.525]
Morphological diffusivity (K1)	m <sup>2</sup> /yr	[0.10, 0.30]
Soil particle diameter (Ds)	m	[0.0005, 0.0015]
Aquifer horizontal hydraulic conductivity (KHg)	m/d	[3.50, 10.50]
Aquifer vertical hydraulic conductivity (KVg)	m/d	[0.70, 2.10]
Bedrock weathering rate for bare rock (P0)	m/yr	[0.004, 0.012]
Tectonic uplift rate (U)	m/yr	[0.00050, 0.00155]
Coefficient for bedrock weathering equation ( $\alpha$ )	1/m	[0.01, 0.03]

384 *ii.* Latin hypercube sampling is employed to generate 3,000 sample sets within the  
 385 prior ranges of the input variables.

386 *iii.* These 3,000 parameter sets are individually input into the LE-PIHM model to  
 387 generate surface elevation data at three time points, December 2007, February 2014, and  
 388 December 2021. Subsequently, the corresponding spatial distribution of river channel is  
 389 extracted through Arcpy scripting in ArcGIS. For each parameter set, the corresponding

390 river channel is discretized uniformly into 2,000 points, producing 2,000 sets of planar  
391 coordinates of reaches.

392 *iv.* The obtained 3,000 sets of input variables and their corresponding coordinates are  
393 split into training and validation datasets at 70% and 30% ratios. The LSTM network is  
394 trained to learn the nonlinear mapping between the input variables and river channel  
395 positions, thereby constructing a surrogate model for river channel migration. The network  
396 terminates in a fully connected output layer with a linear activation function and He-normal  
397 weight initialization. Training is performed using the Adam optimizer with a learning rate  
398 of  $1 \times 10^{-3}$ , minimizing the root-mean-square error (RMSE) between the predicted and  
399 reference river coordinate points. The model is trained for 10,000 epochs with a batch size  
400 of 100 and a validation split of 0.1.


401 As shown in the validation results (Table 3), the surrogate model constructed using  
402 LSTM demonstrates great predictive performance for river channel locations (i.e., the  
403 planar coordinates of river reaches). It achieved a mean absolute error (MAE) of 1,411.16  
404 m, a root mean square error (RMSE) of 1,980.10 m, and a coefficient of determination ( $R^2$ )  
405 of 0.983. Furthermore, the average Hausdorff distance of the entire river between the  
406 surrogate model and original model outputs is 229.71 m. Given the total length of river  
407 channels in the study area is 89,337.95 m, this corresponds to only 0.25%. Thus, these  
408 results demonstrate that the surrogate model for basin-scale river channel migration  
409 exhibits high accuracy and reliability and can replace the original model for river channel  
410 dynamics simulation.

411 **Table 3.** Evaluations of the surrogate model for basin-scale river channel migration.

Metrics	RMSE	MSE	$R^2$	H/Total length of river
Results	1411.60m	1980.10m	0.98	0.0025

412       The spatial distribution of river channels predicted by the original model and the  
413 surrogate model are compared across three time points (Fig. 10). The surrogate model  
414 closely matches the original in the middle and upper reaches of the river channel, while  
415 some deviations occur in the downstream reaches. This discrepancy is primarily due to the  
416 mountainous topography upstream, where the landscape is rugged and river channels are  
417 relatively stable. In contrast, the downstream region is a flat plain, where river channel  
418 migration is highly sensitive to model parameters, leading to slightly reduced accuracy in  
419 the surrogate model's performance in that area.

420       Compared to the original model, the surrogate model for basin-scale river channel  
421 migration achieves approximately a 20,000-fold increase in computational speed.  
422 Therefore, employing this surrogate model in the parameter uncertainty analysis of river  
423 channel migration can significantly reduce computational costs and effectively alleviate  
424 the computational burden associated with the uncertainty analysis process.

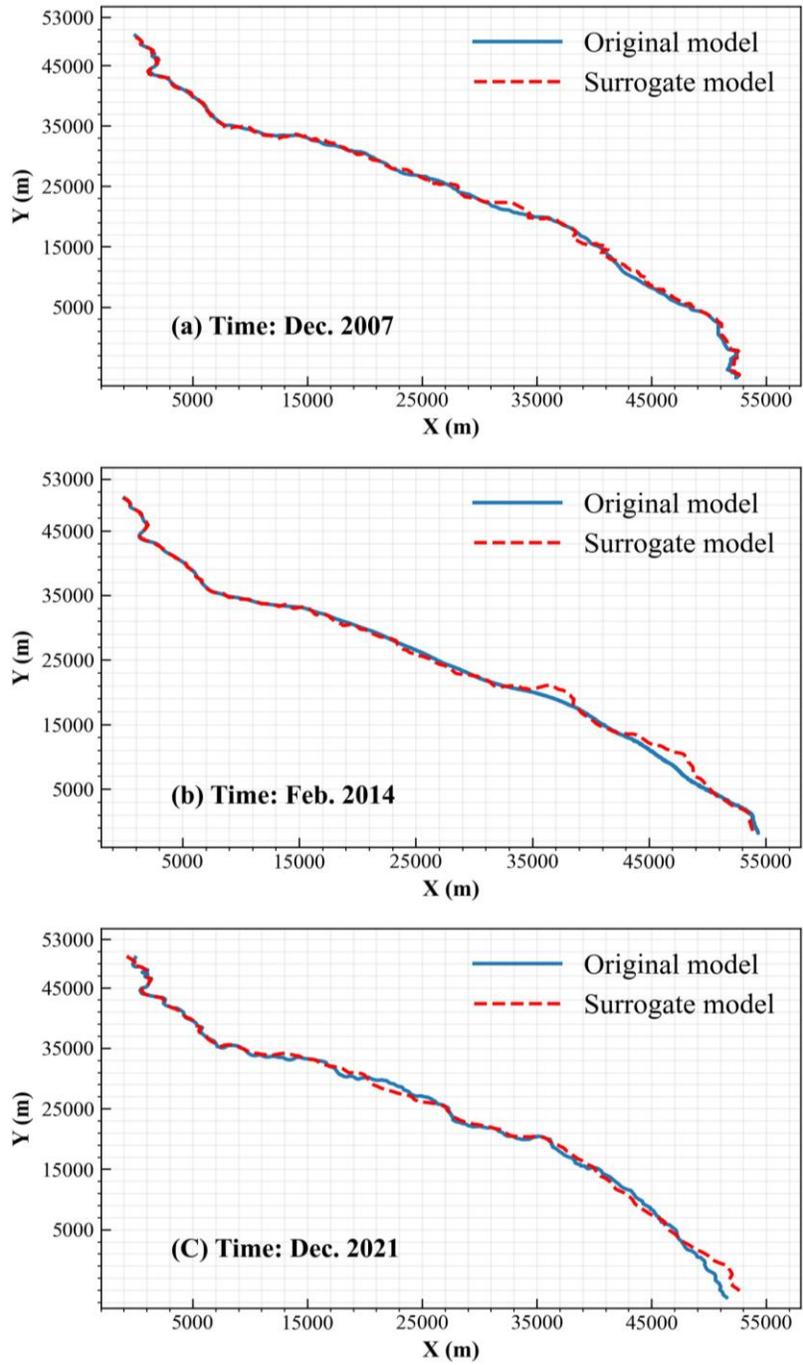

425

426 **Figure 10.** Comparison between the original river channel migration model and the  
 427 surrogate model at different time points.

428

429 **4. Results and discussion**

430 **4.1 Parameter uncertainty analysis**

#### 431 **4.1.1 MCMC configuration**


432 The river channel migration model includes 11 unknown parameters to be identified,  
433 with their prior distributions assumed to be uniform within the specified range (Table 2).  
434 The MCMC simulation is performed using the DREAMzs sampling algorithm, with three  
435 parallel Markov chains. Both the burn-in and formal sampling stages consist of 2,000  
436 iterations. Additionally, the evolution of the Markov chains employs the modified  
437 likelihood function described in Sect. 2.3.2. Based on the inferred posterior distributions  
438 of the parameters, the posterior distribution of the river channel is obtained.

#### 439 **4.1.2 Posterior distributions of model parameters**

440 The posterior probability density histograms of the river channel migration model  
441 parameters through MCMC (horizontal axis indicates the corresponding prior ranges; Fig.  
442 11), together with the maximum likelihood parameter set (Table 4). It is easy to find that  
443 several parameters, such as the vertical soil hydraulic conductivity (KVs), hillslope  
444 diffusion coefficient (K1), bare-bedrock weathering rate (P0), soil grain size (Ds), and  
445 vegetation fraction (VegFrac) exhibit clear convergence to relatively narrow and  
446 concentrated posterior ranges after calibration. This suggests that channel-planform  
447 predictions are highly sensitive to these parameters, and that they exert strong control on  
448 basin-scale erosion-deposition balance and channel migration behavior.

449 In contrast, the posterior distributions of some parameters, such as aquifer horizontal  
450 hydraulic conductivity (KHg), the weathering-law coefficient ( $\alpha$ ), and the tectonic uplift  
451 rate (U), remain comparatively broad. This indicates that, given the spatial scale of this  
452 study and the available observational constraints, channel-planform position is less  
453 responsive to these parameters. Over the past 22 years, channel migration in the basin scale

454 may have limited sensitivity to tectonic uplift, or the effects of uplift may be partially  
 455 compensated by other parameters within the coupled hydro-geomorphic system.

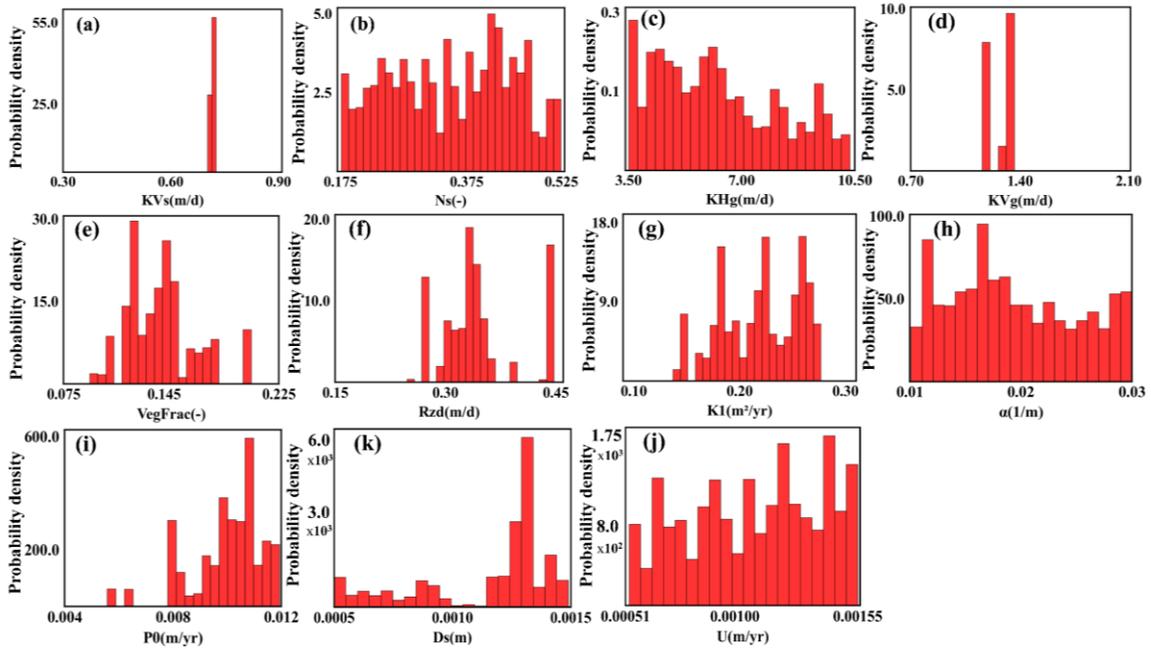

456  
 457 **Figure 11.** Calibrated posterior distributions of model parameters.


458 **Table 4.** Parameter set corresponding to the maximum likelihood estimate.

Parameters	Units	Parameter value
Vegetation fractional coverage (VegFrac)	/	0.14
Root zone depth (Rzd)	m	0.17
Soil vertical hydraulic conductivity (KV <sub>s</sub> )	m/d	0.43
Soil porosity (Ns)	/	0.24
Morphological diffusivity (K <sub>1</sub> )	m <sup>2</sup> /yr	0.20
Soil particle diameter (D <sub>s</sub> )	m	0.001
Aquifer horizontal hydraulic conductivity (KH <sub>g</sub> )	m/d	9.60
Aquifer vertical hydraulic conductivity (KV <sub>g</sub> )	m/d	1.90
Bedrock weathering rate for bare rock (P <sub>0</sub> )	m/yr	0.007
Tectonic uplift rate (U)	m/yr	0.0008
Coefficient for bedrock weathering equation (α)	1/m	0.02

459

460 **4.1.3 Reconstruction of river channel migration (2000-2021)**

461 Based on the posterior distributions of the identified parameters, the river channel  
462 evolution from 2000 to 2021 in the study area was reconstructed. The result shows that the  
463 predicted confidence interval fully encompasses the observed river channel (Fig. 12), and  
464 the blue shaded region denotes the 95% confidence interval, the red line represents the  
465 observed river channel in Fig. 12. The average Hausdorff distance of the entire river  
466 between the simulated channel (marked in black line in Fig. 12) with the maximum  
467 likelihood parameter set and the observed channel is 225.42 m, which accounts for only  
468 0.25% of the total river channel length. This indicates that the discrepancy between the  
469 simulated and observed river channel per unit length is minimal, demonstrating the high  
470 accuracy of the calibrated river channel migration model. Therefore, the river channel  
471 model facilitated by Bayesian parameter uncertainty quantification can reliably predict the  
472 river channel migration processes within the study area.

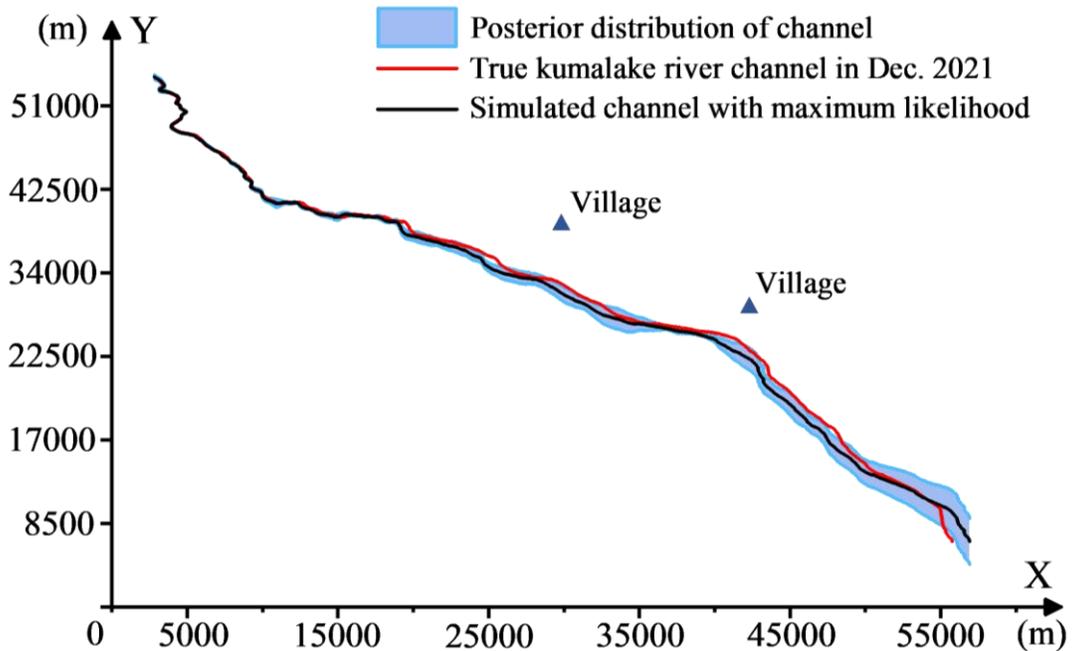


473

474

**Figure 12.** The predicted Kumalake River channel at December 2021.

475 Remote sensing images (Fig. 13) collected during the simulation period of the study  
476 area indicates that, beginning in 2012, the villages along the river initiated to develop  
477 cultivated land near the river channel. This anthropogenic activity altered key parameters  
478 related to land cover and soil type, and may have been a driving factor for the gradual  
479 southward migration of local river reaches. However, this mechanism of human-induced  
480 change is not explicitly represented in the landscape evolution model, which may partly  
481 explain the reduced simulation accuracy in the downstream region. Nevertheless, the  
482 parameter uncertainty analysis conducted in this study helps to partially compensate for  
483 the effects of land reclamation, keeping the prediction deviation of basin-scale river  
484 channel migration model within an acceptable range.

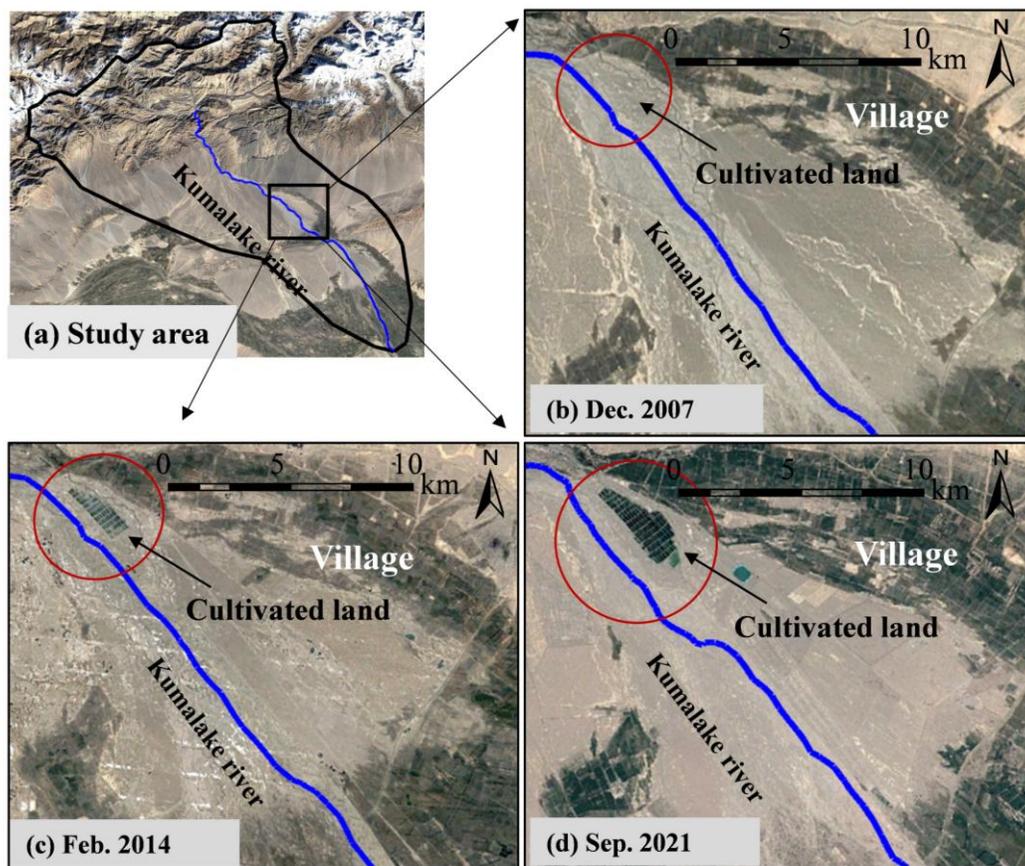

485  
486 **Figure 13.** Formation process of cultivated land along the river in the study area. Satellite  
487 imagery: © Google Earth 2007, 2014, 2021, modified by the authors.


488 **4.2 Prediction of river channel migration in future (2021-2100)**

489 Future climate change will influence landscape evolution and river channel migration,  
 490 thereby affecting regional water resource patterns and ecological environments. The EC-  
 491 Earth3-Veg climate model, released under phase 6 of the Coupled Model Intercomparison  
 492 Project (CMIP6), incorporates vegetation-climate interactions and is well-suited for  
 493 evaluating terrestrial ecosystem and hydrological responses under different climate  
 494 scenarios (Alsalal et al., 2024; Eyring et al., 2016). Based on the EC-Earth3-Veg model,  
 495 this study adopts four scenarios of shared socioeconomic pathways (SSPs), i.e., SSP1-2.6,  
 496 SSP2-4.5, SSP3-7.0, and SSP5-8.5. Each of the four climate scenarios reflects a distinct  
 497 pathway of global socioeconomic development and associated impacts on greenhouse gas  
 498 emissions and climate change (O'Neill et al., 2016).

499 The scenario forcing fields are mapped to the LE-PIHM basin computational units  
 500 using bilinear interpolation. To maintain consistency with the monthly time step adopted  
 501 in LE-PIHM, the forcing data are temporally aggregated to monthly resolution prior to  
 502 being used as model inputs. Scenario-based simulations of landscape evolution and river  
 503 channel migration were conducted by using these climate conditions as the driving force  
 504 of LE-PIHM. The climate conditions for these scenarios over the period (2021–2100) are  
 505 characterized by the annual mean temperature and precipitation (Table 5 and Fig. 14).

506 **Table 5.** Statistics of four climate scenarios under the EC-Earth3-Veg model.

Climate model	Average precipitation	Average temperature	Shared Socioeconomic Pathways
EC-Earth3-Veg	284.97mm	3.76°C	SSP-1.26
	300.89mm	4.05°C	SSP-2.45
	301.76mm	4.68°C	SSP-3.70
	310.16mm	5.33°C	SSP-5.85

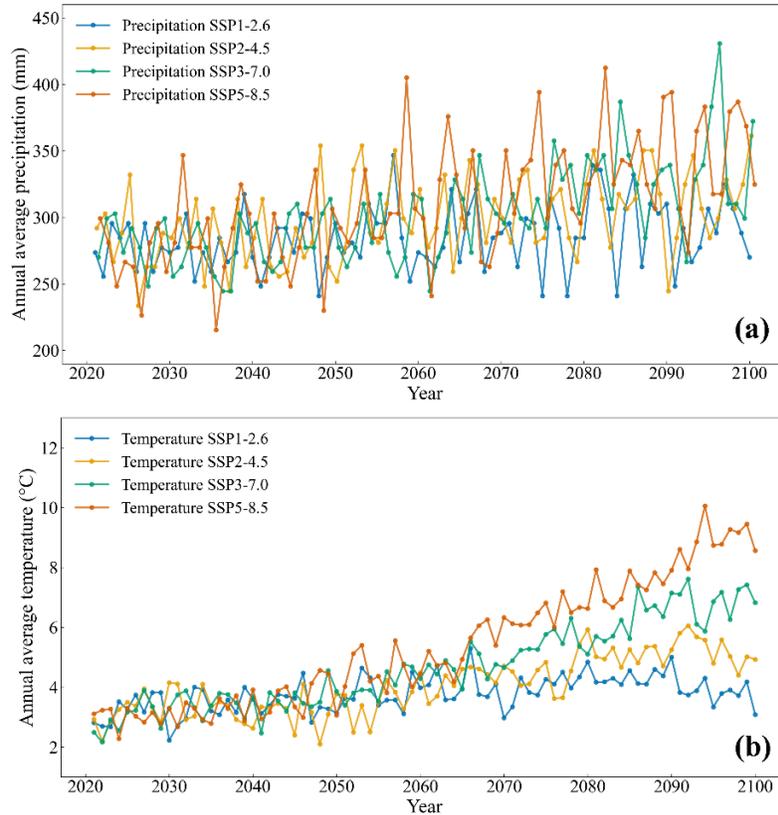


507

508 **Figure 14.** Annual mean precipitation and temperature for the four climate scenarios.

509 Using LE-PIHM and the parameter set corresponding to the maximum likelihood  
 510 estimate (Table 4), the landscape evolution and river channel migration from 2021 to 2100  
 511 were simulated for the study area under four climate change scenarios. After 80 years of  
 512 simulated landscape evolution, the overall topographic pattern of the region remains  
 513 characterized by higher elevations in the north and lower elevations in the south, with  
 514 elevation changes ranging from +1.39 m to -0.37 m. The simulation results under the four  
 515 EC-Earth3-Veg climate scenarios demonstrate that the elevation change and river channel  
 516 migration in basin scale by the year 2100 exhibit distinct characteristics (Fig. 15 a). In the  
 517 northern mountainous area, distinct alternating patterns of uplift and subsidence are  
 518 observed, with relatively large magnitudes of change. This is primarily due to intense  
 519 bedrock weathering and steep slopes in the mountains, where the regolith layer is thin and

520 the weathered soil and sediment are prone to downslope transport into adjacent low-lying  
 521 regions, resulting in significant elevation fluctuations. In contrast, the southern plain  
 522 exhibits gentle topography and minimal elevation differences, making it less conducive to  
 523 large-scale sediment transport. As a result, the landscape undulation in the plain is  
 524 relatively mild and limited in amplitude.

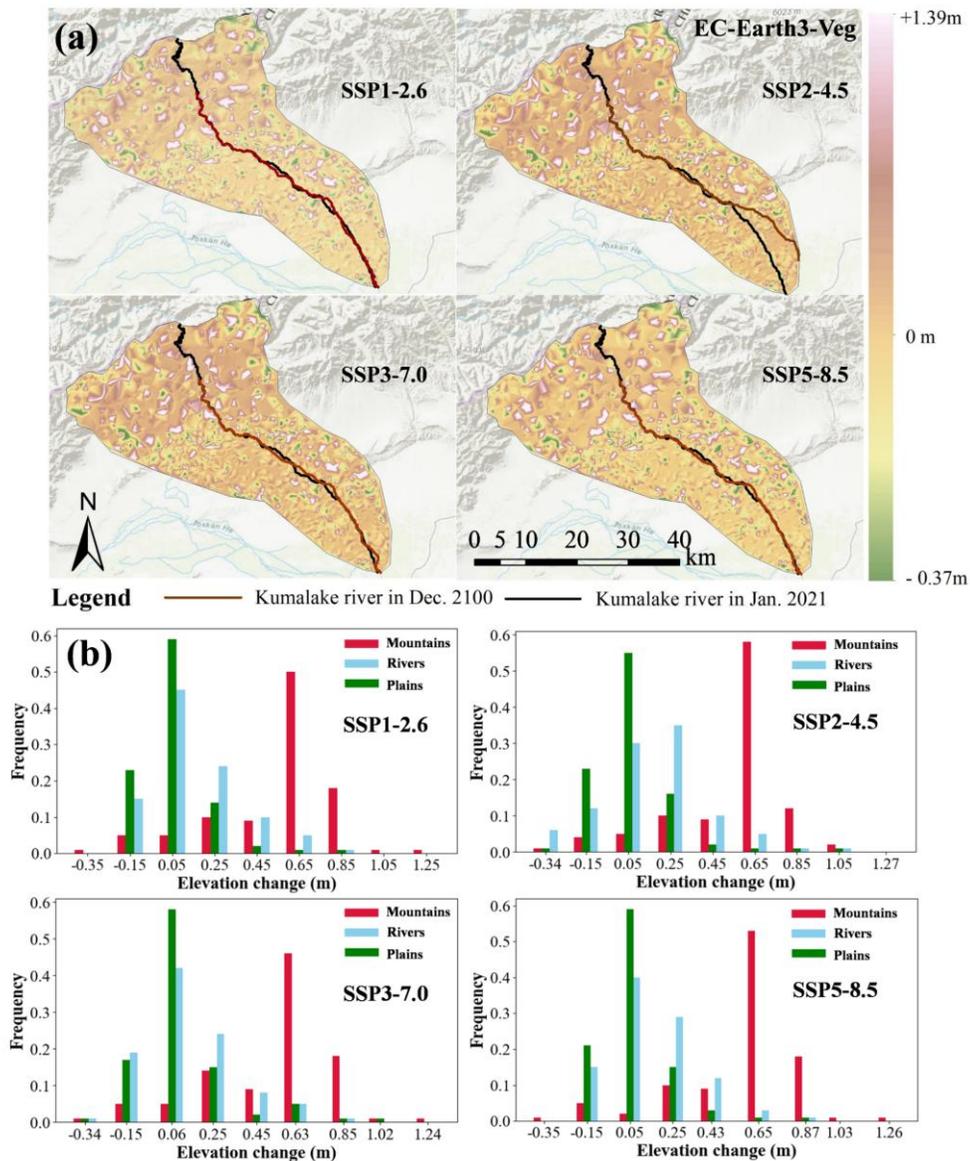

525  
 526 **Figure 15.** Spatial distribution of river channel (a) and Elevation change (b) under four  
 527 future climate scenarios based on the EC-Earth3-Veg climate model. Basemap: Esri World  
 528 Hillshade (Esri).

529 Under the EC-Earth3-Veg climate model, the four future climate scenarios induce  
530 distinct patterns of river channel migration. By the end of the simulation period (2100), the  
531 upstream reaches of the Kumalake River remain largely unchanged from their 2021  
532 positions. This stability is attributed to the fact that these reaches flow through narrow and  
533 geomorphologically stable canyon landscape, where external disturbances are minimal and  
534 the river alignment and morphology remain relatively constant. In contrast, several  
535 downstream reaches situated in the plain exhibit varying degrees of northward migration.  
536 This phenomenon is mainly driven by the relatively gentle topography of the plains,  
537 increased sediment deposition, redistribution of flow energy, and anthropogenic activities.  
538 These factors collectively lead to channel swinging, incision, or aggradation, gradually  
539 shifting the river channel position.

540 The four scenarios under EC-Earth3-Veg exhibit significant differences in  
541 temperature and precipitation characteristics, as well as in the extent of river channel  
542 migration (Table 6). Notably, under the SSP2-4.5 scenario, although the climate variability  
543 is not the most intense among the scenarios, the elevation change shows the largest  
544 amplitude, and the topographic changes in the river area are more pronounced (Fig. 15 a),  
545 leading to a shift of the downstream river channels into the plain area. This suggests that  
546 the climate changes in this scenario trigger a sudden and intense spatial reorganization of  
547 the river network, resulting in significant morphological transformation. The specific  
548 combination of climatic conditions may cause the river system to approach an evolutionary  
549 threshold (Church et al., 2002; Meyer et al., 2018). When such a critical threshold is  
550 reached, the river system may undergo abrupt transitions, manifesting as regime shifts  
551 (Church et al., 2002).

552 In summary, within the LE-PIHM landscape evolution framework, channel planform  
 553 dynamics and elevation changes are jointly controlled by the following processes. (i)  
 554 Precipitation-runoff mechanisms, including rainfall, infiltration and runoff generation, and  
 555 surface-groundwater exchange; (ii) Sediment supply and transport capacity, including  
 556 hillslope diffusion, weathering-driven sediment production, and river sediment transport;  
 557 (iii) Landscape-flow-routing feedbacks, whereby landscape evolution and the associated  
 558 adjustment of D8-based flow paths modify local slope and discharge concentration.

559 These results indicate that the process of river channel migration in the study area  
 560 under climate forcing varies across scenarios. Future climate conditions play a critical role  
 561 in regional landscape evolution and river dynamics. Furthermore, the complex feedbacks  
 562 between climate change and geomorphic systems highlight the importance of incorporating  
 563 these interactions in predictive modeling of fluvial landscape evolution and watershed  
 564 management planning.

565 **Table 6.** Statistics of climate scenarios and average Hausdorff distance of river migration.

	SSP1-2.6	SSP2-4.5	SSP3-7.0	SSP5-8.5
Variance of precipitation (mm <sup>2</sup> )	576	922.45	1227.62	1942.72
Range of precipitation (mm)	105.85	127.75	186.15	197.1
Variance of temperature (°C <sup>2</sup> )	0.34	0.92	1.99	4.27
Range of temperature (°C)	3.08	3.96	5.45	7.79
H(m)	333.26	1873.37	405.69	304.85

## 566 **5. Conclusions**

567 River channel migration at the basin scale not only determines the spatial distribution  
 568 pattern of regional river networks, but also exerts profound influences on local ecosystems  
 569 and the development of civilizations within the basin. Simulating river channel migration  
 570 at the basin scale aids in quantitatively reconstructing this long-term, complex dynamic

571 processes and also provides a scientific basis for decision-making in response to climate  
572 change and natural disasters. To address the limitations of traditional river channel  
573 migration models in temporal and spatial scale applications, this study integrates a  
574 landscape evolution model with river channel extraction techniques, achieving accurate  
575 and reliable simulation of river channel migration processes at the basin scale. Using the  
576 Kumalake River Basin as a case study, the river channel migration process in the region is  
577 reconstructed based on the LE-PIHM landscape evolution model and river channel  
578 extraction techniques. The main conclusions of this study are as follows:

579 1. The LSTM-based surrogate model for river channel migration demonstrates high  
580 accuracy and effectively overcomes the computational challenge associated with parameter  
581 uncertainty analysis. The parameter calibration using MCMC requires numerous  
582 executions of the LE-PIHM model and river channel extraction, resulting in prohibitive  
583 computational demands. The surrogate model for basin-scale river channel migration based  
584 on LSTM networks accurately characterizes the response relationship between landscape  
585 evolution parameters and river channel locations, effectively solving the problem of  
586 computational burden in Bayesian uncertainty analysis.

587 2. The river channel migration model facilitated by Bayesian parameter uncertainty  
588 quantification can reliably predict the river channel evolution process within the study area.  
589 Based on the inferred posterior distributions of model parameters, the predicted confidence  
590 interval of the channel fully encompasses the actual river location. The average Hausdorff  
591 distance between the simulated river channel with the maximum likelihood parameter set  
592 and the observed river channel is 225.42 m, which accounts for only 0.25% of the total  
593 channel length. Thus, the basin-scale river channel migration model incorporating

594 Bayesian uncertainty analysis demonstrates high reliability and predictive capability,  
595 enabling effective characterization of river migration processes within the study area.

596 3. River channel evolution under different climate scenarios demonstrates significant  
597 variability, and future climate change will profoundly affect basin geomorphological  
598 characteristics and river network configurations. Based on the EC-Earth3-Veg model  
599 released by CMIP6, the landscape evolution and river channel migration in the study area  
600 from 2021 to 2100 were projected under four Shared Socioeconomic Pathways (SSP1-2.6,  
601 SSP2-4.5, SSP3-7.0, and SSP5-8.5). The results indicate that climate change and  
602 geomorphological systems exhibit complex response mechanisms.

603 ***Author contributions.***

604 JW and XZ conceptualized the study and designed the research methodology. JW and  
605 QW conducted the simulations and implemented the methodology. JW produced all the  
606 figures and tables. XZ and JW contributed to the data validation and data curation. DW  
607 and JW supervised the research. All authors reviewed, edited and approved the final  
608 version of the manuscript.

609 ***Competing interest.***

610 The contact author has declared that none of the authors has any competing interests.

611 ***Data Availability.***

612 The temperature and precipitation data used in this study from the World Data Center  
613 for Climate (WDCC) are open-access and publicly available: EC-Earth-Consortium EC-  
614 Earth3-Veg (<https://doi.org/10.26050/WDCC/AR6.C6CMEEEEVE>, CMIP6). The observed  
615 river channel planform data used for uncertainty analysis mentioned in Sect. 3.3 have been  
616 made publicly available via the Hydroshare platform  
617 (<https://doi.org/10.4211/hs.a6eb2a2c8ae746cf99d5d89a5ed2600b>, Zeng and Wu., 2025).

618 ***Acknowledgments.***

619 This study was supported by the National Natural Science Foundation of China  
620 (42477082). We are grateful to the High-Performance Computing Center (HPCC) of  
621 Nanjing University for performing the simulations in this paper.

622

623 **References**

624 Ali, M. S., Hasan, M. M., and Haque, M.: Two-dimensional simulation of flows in an open  
625 channel with groin-like structures by iRIC Nays2DH, *Math. Probl. Eng.*, 2017,  
626 1275498, <https://doi.org/10.1155/2017/1275498>, 2017.

627 Alsalal, S., Tan, M. L., Samat, N., Al-Bakri, J. T., and Zhang, F.: Temperature and  
628 precipitation changes under CMIP6 projections in the Mujib Basin, Jordan, *Theor.*  
629 *Appl. Climatol.*, 155, 7703–7720, <https://doi.org/10.1007/s00704-024-05087-2>, 2024.

630 Barnhart, K. R., Hutton, E. W. H., Tucker, G. E., Gasparini, N. M., Istanbuluoglu, E.,  
631 Hopley, D. E. J., Lyons, N. J., Mouchene, M., Nudurupati, S. S., Adams, J. M., and  
632 Bandaragoda, C.: Short communication: Landlab v2.0: a software package for Earth  
633 surface dynamics, *Earth Surf. Dynam.*, 8, 379–397, [https://doi.org/10.5194/esurf-8-](https://doi.org/10.5194/esurf-8-379-2020)  
634 379-2020, 2020.

635 Bishop, P.: Long-term landscape evolution: linking tectonics and surface processes, *Earth*  
636 *Surf. Process. Landf.*, 32, 329–365, <https://doi.org/10.1002/esp.1493>, 2007.

637 Bogoya, J. M., Cuate, O., & Vargas, A. (2019). The Averaged Hausdorff Distances in  
638 Multi-Objective Optimization: A Review. *Mathematics*

639 Braun, J. and Sambridge, M.: Modeling landscape evolution on geological time scales: a  
640 new method based on irregular spatial discretization, *Basin Res.*, 9, 27–52,  
641 <https://doi.org/10.1046/j.1365-2117.1997.00030.x>, 1997.

642 Church, M.: Geomorphic thresholds in riverine landscapes, *Freshw. Biol.*, 47, 541–557,  
643 <https://doi.org/10.1046/j.1365-2427.2002.00919.x>, 2002.

644 Coulthard, T. J., Neal, J. C., Bates, P. D., Ramirez, J., de Almeida, G. A., and Hancock, G.  
645 R.: Integrating the LISFLOOD-FP 2D hydrodynamic model with the CAESAR model:  
646 implications for modelling landscape evolution, *Earth Surf. Process. Landf.*, 38,  
647 1897–1906, <https://doi.org/10.1002/esp.3478>, 2013.

648 Desormeaux, C., Godard, V., Lague, D., Duclaux, G., Fleury, J., Benedetti, L., Bellier, O.,  
649 and the ASTER Team: Investigation of stochastic-threshold incision models across a  
650 climatic and morphological gradient, *Earth Surf. Dynam.*, 10, 473–492,  
651 <https://doi.org/10.5194/esurf-10-473-2022>, 2022.

652 ESRI: ArcGIS Pro, Esri, available at: [https://www.esri.com/en-](https://www.esri.com/en-us/legal/requirements/open-source-acknowledgements)  
653 [us/legal/requirements/open-source-acknowledgements](https://www.esri.com/en-us/legal/requirements/open-source-acknowledgements), last access: 6 December 2023,  
654 2022.

655 Eyring, V., Bony, S., Meehl, G. A., Senior, C. A., Stevens, B., Stouffer, R. J., and Taylor,  
656 K. E.: Overview of the Coupled Model Intercomparison Project Phase 6 (CMIP6)  
657 experimental design and organization, *Geosci. Model Dev.*, 9, 1937–1958,  
658 <https://doi.org/10.5194/gmd-9-1937-2016>, 2016.

659 Goren, L., Willett, S. D., Herman, F., and Braun, J.: Coupled numerical–analytical  
660 approach to landscape evolution modeling, *Earth Surf. Process. Landf.*, 39, 522–545,  
661 <https://doi.org/10.1002/esp.3514>, 2014.

662 Graves, A. and Schmidhuber, J.: Framewise phoneme classification with bidirectional  
663 LSTM and other neural network architectures, *Neural Netw.*, 18, 602–610,  
664 <https://doi.org/10.1016/j.neunet.2005.06.042>, 2005.

665 Hickin, E. J.: River channel changes: retrospect and prospect, in: *Modern and ancient*  
666 *fluvial systems*, 59–83, <https://doi.org/10.1002/9781444303773.ch5>, 1983.

667 Hochreiter, S. and Schmidhuber, J.: Long short-term memory, *Neural Comput.*, 9, 1735–  
668 1780, <https://doi.org/10.1162/neco.1997.9.8.1735>, 1997.

669 Hou, R., Zeng, X., Wang, D., and Wu, J.: Evaluating spatial downscaling surrogate models  
670 for landscape evolution simulations in the Tarim River basin, China, *Stoch. Environ.*  
671 *Res. Risk Assess.*, 39, 2479–2496, <https://doi.org/10.1007/s00477-025-02980-8>,  
672 2025.

673 Hritz, C.: Tracing settlement patterns and channel systems in southern Mesopotamia using  
674 remote sensing, *J. Field Archaeol.*, 35, 184–203,  
675 <https://doi.org/10.1179/009346910X12707321520477>, 2010.

676 Hsu, S. Y. and Hsu, S. M.: Morphological evolution mechanism of gravel-bed braided river  
677 by numerical simulation on Da-Jia River, *J. Hydrol.*, 613, 128222,  
678 <https://doi.org/10.1016/j.jhydrol.2022.128222>, 2022.

679 Ikeda, S., Parker, G., and Sawai, K.: Bend theory of river meanders, Part 1: Linear  
680 development, *J. Fluid Mech.*, 112, 363–377,  
681 <https://doi.org/10.1017/S0022112081000451>, 1981.

682 Lei, T. L. and Lei, Z.: Harmonizing full and partial matching in geospatial conflation: a  
683 unified optimization model, *ISPRS Int. J. Geo-Inf.*, 11, 375,  
684 <https://doi.org/10.3390/ijgi11070375>, 2022.

685 Lesser, G., Roelvink, D., van Kester, J., and Stelling, G.: Development and application of  
686 a three-dimensional model for coastal morphology and hydrodynamics, *Coast. Eng.*,  
687 51, 883–915, <https://doi.org/10.1016/j.coastaleng.2004.07.014>, 2004.

688 Li, K., Qin, X., Xu, B., Yin, Z., Wu, Y., Mu, G., Wei, D., Tian, X., Shao, H., Wang, C.,  
689 Jia, H., Li, W., Song, H., Liu, J., and Jiao, Y.: Hydro-climatic aspects of prehistoric  
690 human dynamics in the drylands of the Asian interior, *Holocene*, 33, 194–207,  
691 <https://doi.org/10.1177/09596836221131694>, 2023.

692 Lisenby, P. E., Fryirs, K. A., and Thompson, C. J.: River sensitivity and sediment  
693 connectivity as tools for assessing future geomorphic channel behavior, *Int. J. River  
694 Basin Manag.*, 18, 279–293, <https://doi.org/10.1080/15715124.2019.1672705>, 2020.

695 Litwin, D. G., Tucker, G. E., Barnhart, K. R., and Harman, C. J.: Catchment coevolution  
696 and the geomorphic origins of variable source area hydrology, *Water Resour. Res.*,  
697 60, e2023WR034647, <https://doi.org/10.1029/2023WR034647>, 2024.

698 Lu, S. F., Wang, Y. X., Ma, M. Y., and Xu, L.: Water seepage characteristics in porous  
699 media with various conduits: Insights from a multi-scale Darcy–Brinkman–Stokes  
700 approach, *Comput. Geotech.*, 157, 105317,  
701 <https://doi.org/10.1016/j.compgeo.2023.105317>, 2023.

702 Meyer, K., Hoyer-Leitzel, A., Iams, S., Klasky, I., Lee, V., Ligtenberg, S., Bussmann, E.,  
703 and Zeeman, M. L.: Quantifying resilience to recurrent ecosystem disturbances using  
704 flow–kick dynamics, *Nat. Sustain.*, 1, 671–678, [https://doi.org/10.1038/s41893-018-](https://doi.org/10.1038/s41893-018-0168-z)  
705 0168-z, 2018.

706 Morón, S., Edmonds, D., and Amos, K.: The role of floodplain width and alluvial bar  
707 growth as a precursor for the formation of anabranching rivers, *Geomorphology*, 278,  
708 78–90, <https://doi.org/10.1016/j.geomorph.2016.10.026>, 2017.

709 Neuendorf, F., von Haaren, C., and Albert, C.: Assessing and coping with uncertainties in  
710 landscape planning: an overview, *Landscape Ecol.*, 33, 861–878,  
711 <https://doi.org/10.1007/s10980-018-0643-y>, 2018.

712 O’Callaghan, J. F. and Mark, D. M.: The extraction of drainage networks from digital  
713 elevation data, *Comput. Vis. Graph. Image Process.*, 28, 323–344,  
714 [https://doi.org/10.1016/S0734-189X\(84\)80011-0](https://doi.org/10.1016/S0734-189X(84)80011-0), 1984.

715 O’Neill, B. C., Tebaldi, C., van Vuuren, D. P., Eyring, V., Friedlingstein, P., Hurtt, G.,  
716 Knutti, R., Kriegler, E., Lamarque, J.-F., Lowe, J., Meehl, G. A., Moss, R., Riahi, K.,  
717 and Sanderson, B. M.: The Scenario Model Intercomparison Project (ScenarioMIP)  
718 for CMIP6, *Geosci. Model Dev.*, 9, 3461–3482, [https://doi.org/10.5194/gmd-9-3461-](https://doi.org/10.5194/gmd-9-3461-2016)  
719 2016, 2016.

720 Qu, Y. and Duffy, C. J.: A semidiscrete finite volume formulation for multiprocess  
721 watershed simulation, *Water Resour. Res.*, 43, W08419,  
722 <https://doi.org/10.1029/2006WR005752>, 2007.

723 Ranacher, P. and Tzavella, K.: How to compare movement? A review of physical  
724 movement similarity measures in geographic information science and beyond,  
725 *Cartogr. Geogr. Inf. Sci.*, 41, 286–307, [doi:10.1080/15230406.2014.890071](https://doi.org/10.1080/15230406.2014.890071), 2014.

726 Schütze, O., Esquivel, X., Lara, A., and Coello, C. A. C.: Using the averaged Hausdorff  
727 distance as a performance measure in evolutionary multiobjective optimization, *IEEE*  
728 *Trans. Evol. Comput.*, 16, 504–522, <https://doi.org/10.1109/TEVC.2011.2161872>,  
729 2012.

730 Shao, Y., Gong, H., Elachi, C., Brisco, B., Liu, J., Xia, X., Guo, H., Geng, Y., Kang, S.,  
731 Liu, C., Yang, Z., and Zhang, T.: The lake-level changes of Lop Nur over the past  
732 2000 years and its linkage to the decline of the ancient Loulan Kingdom, *J. Hydrol.*  
733 *Reg. Stud.*, 40, 101002, <https://doi.org/10.1016/j.ejrh.2022.101002>, 2022.

734 Tang, Q., Hu, H., Oki, T., and Tian, F.: Water balance within intensively cultivated alluvial  
735 plain in an arid environment, *Water Resour. Manag.*, 21, 1703–1715,  
736 <https://doi.org/10.1007/s11269-006-9121-4>, 2007.

737 Tarboton, D. G.: A new method for the determination of flow directions and upslope areas  
738 in grid digital elevation models, *Water Resour. Res.*, 33, 309–319,  
739 <https://doi.org/10.1029/96WR03137>, 1997.

740 Temme, A. J. A. M., Heuvelink, G. B. M., Schoorl, J. M., and Claessens, L.: Geostatistical  
741 simulation and error propagation in geomorphometry, in: *Geomorphometry: Concepts,*  
742 *Software, Applications*, edited by: Hengl, T. and Reuter, H. I., *Developments in Soil*  
743 *Science*, 33, 121–140, [https://doi.org/10.1016/S0166-2481\(08\)00005-6](https://doi.org/10.1016/S0166-2481(08)00005-6), 2009.

744 Tucker, G. E. and Hancock, G. R.: Modelling landscape evolution, *Earth Surf. Process.*  
745 *Landf.*, 35, 28–50, <https://doi.org/10.1002/esp.1952>, 2010.

746 Tucker, G., Lancaster, S., Gasparini, N., and Bras, R.: The channel-hillslope integrated  
747 landscape development model (CHILD), in: *Landscape erosion and evolution*  
748 *modeling*, edited by: Harmon, R. S. and Doe, W. W., 349–388,  
749 [https://doi.org/10.1007/978-1-4615-0575-4\\_12](https://doi.org/10.1007/978-1-4615-0575-4_12), 2001.

750 Vrugt, J. A., ter Braak, C. J. F., Diks, C. G. H., Robinson, B. A., Hyman, J. M., and Higdon,  
751 D.: Accelerating Markov chain Monte Carlo simulation by differential evolution with  
752 self-adaptive randomized subspace sampling, *Int. J. Nonlinear Sci. Numer. Simul.*, 10,  
753 273–290, <https://doi.org/10.1515/IJNSNS.2009.10.3.273>, 2009.

754 Wang, M. and Shen, Z. K.: Present-day crustal deformation of continental China derived  
755 from GPS and its tectonic implications, *J. Geophys. Res. Solid Earth*, 125,  
756 e2019JB018774, <https://doi.org/10.1029/2019JB018774>, 2020.

757 Wang, Y., Zhou, Y., Wu, S., and Peng, X.: Colonize the desert vs. retreat to the mountains:  
758 The evolution of city–water relationships in the Tarim river basin over the past 2000

759 years, *Appl. Geogr.*, 170, 103346, <https://doi.org/10.1016/j.apgeog.2024.103346>,  
760 2024.

761 Whipple, K. X., Forte, A. M., DiBiase, R. A., Gasparini, N. M., and Ouimet, W. B.:  
762 Timescales of landscape response to divide migration and drainage capture:  
763 Implications for the role of divide mobility in landscape evolution, *J. Geophys. Res.*  
764 *Earth Surf.*, 122, 248–273, <https://doi.org/10.1002/2016JF003973>, 2017.

765 Xu, L., Ma, M. Y., Lan, T. G., Wang, Y. X., and Lu, S.-F.: Exploring soil water retention  
766 hysteresis in the entire suction range and microstructure evolution of loess: The  
767 influence of sediment depths, *Eng. Geol.*, 328, 107373,  
768 <https://doi.org/10.1016/j.enggeo.2023.107373>, 2024.

769 Yang, R., Willett, S. D., and Goren, L.: In situ low-relief landscape formation as a result  
770 of river network disruption, *Nature*, 520, 526–529,  
771 <https://doi.org/10.1038/nature14354>, 2015.

772 Yu, G. A., Disse, M., Huang, H. Q., Yu, Y., and Li, Z.: River network evolution and fluvial  
773 process responses to human activity in a hyper-arid environment – case of the Tarim  
774 River in Northwest China, *Catena*, 147, 96–109,  
775 <https://doi.org/10.1016/j.catena.2016.06.038>, 2016.

776 Zhang, Y., Slingerland, R., and Duffy, C.: Fully-coupled hydrologic processes for  
777 modeling landscape evolution, *Environ. Model. Softw.*, 82, 89–107,  
778 <https://doi.org/10.1016/j.envsoft.2016.04.014>, 2016.

779 Zhen, J., Guo, Y., Wang, Y., Li, Y., and Shen, Y.: Spatial–temporal evolution and driving  
780 factors of water–energy–food–ecology coordinated development in the Tarim River  
781 Basin, *J. Hydrol. Reg. Stud.*, 58, 102288, <https://doi.org/10.1016/j.ejrh.2025.102288>,  
782 2025.

783 Zhou, Y., Gao, Y., Shen, Q., Yan, X., Liu, X., Zhu, S., Lai, Y., Li, Z., and Lai, Z.: Response  
784 of channel morphology to climate change over the past 2000 years using vertical  
785 boreholes analysis in the Lancang River headwater in the Tibetan Plateau, *Water*, 14,  
786 1593, <https://doi.org/10.3390/w14101593>, 2022.

787 Zeng, X. and Wu, J.: Numerical simulation of basin-scale river channel migration driven  
788 by landscape evolution, HydroShare [data set],  
789 <https://doi.org/10.4211/hs.a6eb2a2c8ae746cf99d5d89a5ed2600b>, 2025.

790 Zubovich, A., Schöne, T., Metzger, S., Mosienko, O., Mukhamediev, S., Sharshebaev, A.,  
791 and Zech, C.: Tectonic interaction between the Pamir and Tien Shan observed by GPS,  
792 *Tectonics*, 35, 283–292, <https://doi.org/10.1002/2015TC004055>, 2016.