

# Introducing the Model Fidelity Metric (MFM) for robust and diagnostic land surface model evaluation

Zezen Wu<sup>1</sup>, Zhongwang Wei<sup>2\*</sup>, Xingjie Lu<sup>2</sup>, Nan Wei<sup>2</sup>, Lu Li<sup>2</sup>, Shupeng Zhang<sup>2</sup>, Hua Yuan<sup>2</sup>, Shaofeng Liu<sup>2</sup>, Yongjiu Dai<sup>2\*</sup>

5 <sup>1</sup>School of Mathematics (Zhuhai), Sun Yat-sen University, Zhuhai, China

<sup>2</sup>School of Atmospheric Sciences, Sun Yat-sen University, Zhuhai, China

*Correspondence to:* Zhongwang Wei (weizhw6@mail.sysu.edu.cn); Yongjiu Dai (daiyj6@mail.sysu.edu.cn)

**Abstract.** The accurate evaluation of Land Surface Models (LSMs) is fundamental to their development and application. However, ~~standard-baseline~~ metrics such as the Nash-Sutcliffe Efficiency (NSE) and Kling-Gupta Efficiency (KGE) possess well-documented shortcomings ~~in inappropriate contexts~~. Relying on moment-based statistics such as mean, variance, and correlation often falls short for land surface modelling data, which are typically non-normal and skewed. These metrics can be misleading due to issues such as error compensation, instability when variability is low, and the confusion of magnitude and phase errors, leading to inaccurate model assessments. To ~~provide a reliable overall score-address these fundamental flaws~~, we propose the Model Fidelity Metric (MFM), a novel evaluation framework constructed using robust statistics and information theory. MFM integrates three orthogonal dimensions of model performance within a Euclidean framework, including 1) Accuracy, which ~~is measured~~ by the robust Normalized Mean Absolute p-Error (NMAEp) and penalized for timing issues via a Phase Penalty Factor (PPF); 2) Variability, quantified using the information-theoretic Scaled and Unscaled Shannon Entropy differences (SUSE); and 3) Distribution ~~s~~Similarity, assessed non-parametrically using the Percentage of Histogram Intersection (PHI). We evaluated MFM against ~~with~~ traditional metrics using targeted synthetic experiments and the large-sample CAMELS dataset. Our results demonstrate that MFM provides a more authentic and reliable assessment of model fidelity. MFM proved ~~to mitigate immune to~~ error compensation effects that mislead KGE and remained stable in low-variability scenarios where NSE and KGE fail. Furthermore, MFM provides superior diagnostic capabilities by decoupling phase and magnitude errors and decomposing performance into its core components. This work highlights the need to move beyond traditional moment-based metrics. We advocate adopting robust, diagnostic frameworks such as MFM to support the development of more trustworthy LSMs.

## 1 Introduction

Land ~~S~~urface ~~M~~odel (LSM) performance metrics serve as the foundation for model evaluation, calibration, parameter optimization, and intercomparison studies (Clark et al., 2021; Gupta et al., 2009). LSMs produce outputs such as latent heat flux, soil moisture, and runoff. They form the core of the Earth System Models (ESMs) and Numerical Weather Prediction (NWP) systems (Dai et al., 2003). Accurate modelling is critical for climate projection, extreme event forecasting, and water

resource management (Best et al., 2011). By condensing the complex, high-dimensional relationship between observed and simulated time series into a single numerical score, these metrics enable objective model assessment and facilitate decision-making in water resources management, flood forecasting, and climate impact studies (Mizukami et al., 2019). The choice of performance metric highly affects model development trajectories, shapes our understanding of land surface processes, and ultimately determines the reliability of model-based predictions (Cinkus et al., 2023).

The evolution of LSM metrics began with simple error measures like the Root Mean Square Error (RMSE), which calculates the Euclidean distance between simulations ( $S$ ) and observations ( $O$ ):

$$\text{RMSE} = \sqrt{\frac{\sum (s_i - o_i)^2}{n}}. \quad (1)$$

Subscript  $i$  denotes the  $i$ -th time step,  $n$  is the length of the time series.

Recognizing the limitations of scale-dependence of RMSE, Nash and Sutcliffe (1970) introduced the Nash-Sutcliffe Efficiency (NSE), which is widely used has become the standard for LSM evaluation:

$$\text{NSE} = 1 - \frac{(\text{RMSE})^2}{\sigma_o^2}, \quad (2)$$

where  $\sigma_o$  is the standard deviation of observations (Nash and Sutcliffe, 1970). NSE provides a dimensionless indicator of model skill relative to a mean benchmark. Despite its widespread adoption, NSE has significant shortcomings. The quadratic form makes it highly sensitive to outliers and thus well suited for streamflow evaluation with a focus on peak flow. However, the inappropriate application of NSE and can lead to controversial-erroneous conclusions (Gupta et al., 2009; Legates and McCabe, 1999).

To address these shortcomings, Gupta et al. (2009) proposed the Kling-Gupta efficiency (KGE). KGE provides a more balanced assessment by decomposing performance into three distinct components within a Euclidean distance from their ideal values:

$$\text{KGE} = 1 - \sqrt{(r - 1)^2 + \left(\frac{\sigma_S}{\sigma_o} - 1\right)^2 + \left(\frac{\mu_S}{\mu_o} - 1\right)^2} = 1 - \sqrt{(r - 1)^2 + (\alpha - 1)^2 + (\beta - 1)^2}, \quad (3)$$

where  $r$  is the Pearson correlation coefficient,  $\alpha$  is the relative variability,  $\beta$  is the bias ratio. Together, NSE and KGE now dominate the land surface modelling literature, serving as the primary criteria for model calibration and performance assessment across diverse applications and geographical regions (Knoben et al., 2019; Pool et al., 2018). Their widespread adoption has established them as a universal method for assessing model performance, as evidenced by numerous studies, operational systems, and extensive model comparison initiatives such as the Coupled Model Intercomparison Project Phase 6 (CMIP6; Eyring et al., 2016).

However, recent research has increasingly highlighted fundamental flaws in both that the inappropriate application of the NSE and KGE frameworks, challenging their reliability as comprehensive indicators of model fidelity (Cinkus et al.,

60 2023; Clark et al., 2021; Schaeffli and Gupta, 2007). ~~These limitations are not merely theoretical concerns but also lead to~~  
~~systematic biases in model selection, misleading performance rankings, and potentially incorrect conclusions about model skill~~  
~~across different land surface modelling regimes (Klotz et al., 2024; Knoben et al., 2025).~~ One of the most serious failures—A  
critical vulnerability of KGE is ~~that~~ its vulnerability-susceptibility to error compensation, in which opposing errors across  
65 coefficient  $r$  can help penalize this issue, relative variability  $\alpha$  and bias ratio  $\beta$  can cause the KGE to assign higher scores to  
objectively more biased models. Cinkus et al. (2023) demonstrated this phenomenon through systematic synthetic experiments,  
showing that KGE can assign higher scores to models that simultaneously overestimate and underestimate discharge compared  
to models with consistent but unidirectional errors. This behaviour occurs since KGE's variability parameter ( $\alpha$ ) and bias  
parameter ( $\beta$ ) are based on moment-based statistics (mean and standard deviation, see Eq. (3)). These statistics are most  
70 effective for normally distributed data (Fig. S1). However, when applied to non-normal, heavy-tailed, and skewed distributions  
common in land surface modelling data, these statistics are highly sensitive to outliers and do not accurately reflect the true  
characteristics of the system (Fu and Zhang, 2024; Mizukami et al., 2019). Since these two components typically account for  
two-thirds of the weight in KGE formulations, error compensation effects can dominate the overall score, rewarding models  
for being “right for the wrong reasons” ~~(Cinkus et al., 2023).~~ For example, Cinkus et al. (2023) showed the bias ratio and  
75 variability scores were 11 % and 13 % respectively higher for the worse model. This occurs because the errors in worse model  
happen to cancel each other out, not because the model is genuinely better than models with lower KGE. Meanwhile, Cinkus  
et al. (2023) also tested 130321 synthetic hydrographs subjected to controlled transformations to assess their impact across  
nine performance metrics. They discovered that the standard KGE and its variants (mKGE, KGE', KGE'') were all highly  
responsive to these balancing errors. Their analysis showed that models with lower actual skill often scored higher on KGE  
80 because of coincidental error cancellation. This fundamental problem questions KGE's validity as a full performance measure  
and casts doubt on studies that mainly depend on KGE-based evaluations. These limitations—, including error compensation,  
instability under low-variability conditions, sensitivity to outliers in non-normal and highly skewed distributions, and failure  
to reflect the true characteristics of the system, are not merely theoretical concerns but also lead to systematic biases in model  
selection, misleading performance rankings, and potentially incorrect conclusions about model skill across different land  
85 surface modelling regimes (Klotz et al., 2024; Knoben et al., 2025).

Lamontagne et al. (2020) and Clark et al. (2021) emphasized a significant vulnerability, namely the high sampling  
uncertainty in NSE and KGE, which is caused by the heavy-tailed distribution of squared errors. Analysis of 671 catchments  
from the Catchment Attributes and Meteorology for Large-sample Studies (CAMELS) dataset showed that performance metric  
scores are significantly affected by a limited number of extreme data points, with fewer than 0.5 % of simulation-observation  
90 pairs accounting for 50 % of the sum-of-squared errors (Clark et al., 2021). This high sensitivity to outliers leads to considerable  
sampling variability, with 90 % tolerance intervals for NSE and KGE exceeding 0.1 in more than half of the catchments  
examined, suggesting that performance differences below this threshold may be statistically insignificant. The sampling  
uncertainty problem becomes particularly acute in arid regions and during low-flow conditions, where near-zero observed

flows in the denominator render NSE and KGE numerically unstable (Santos et al., 2018). Under these conditions, a single  
95 outlier can cause the metric to shift from near ideal to very negative, making these metrics unreliable for comparing models.  
This instability suggests practical implications for model choice and water management, especially in water-scarce areas where  
precise low-flow predictions are vital (Pool et al., 2018).

Similar issue occurs for NSE metrics. Despite NSE's squared-error formulation, which theoretically emphasizes large  
errors, Mizukami et al. (2019) found that NSE-based calibration systematically underestimates annual peak flows by more  
100 than 20 % at median values across 492 hydrologically unregulated catchments in the contiguous United States. This interesting  
finding arises because NSE tends to underestimate observed flow variability. While KGE partially addresses this issue by  
explicitly including a variability ratio term ( $\alpha$ ), both metrics struggle to represent model accuracy, which is critical for flooding  
risk assessment (Williams, 2025).

Nevertheless, ~~the a fundamental weakness shared by both NSE and KGE is their reliance on~~ Pearson's correlation  
105 coefficient ( $r$ ), which assumes linear relationships and is designed for normally distributed data, ~~also limits the application of~~  
~~NSE and KGE~~. Hydrological time series, especially daily streamflow, often show highly skewed, non-normal distributions  
with high coefficients of variation (Bhatti et al., 2019). For such data, Pearson's  $r$  is severely upward-biased and highly  
variable, making it an unreliable measure of model-observation agreement. Barber et al. (2020) demonstrated this issue across  
905 calibrated rainfall-runoff models, recommending alternative correlation measures such as Spearman's rank correlation or  
110 log-transformed correlation that are more robust to non-normality and outliers. Furthermore, the correlation component in  
KGE conflates magnitude errors with timing errors, creating a "double penalty" problem (Cinkus et al., 2023; Mathevet et al.,  
2020; Santos et al., 2018). A simulation that accurately reproduces the magnitude and shape of a hydrograph but is slightly  
shifted in time will be severely penalized in both the correlation term and the point-wise error metrics. Despite this, it remains  
structurally sound and potentially useful for many applications ~~such as water resource management where total volume or~~  
115 ~~seasonal trends are more critical than time series accuracy~~ (Liu et al., 2011; Magyar and Sambridge, 2023). This issue becomes  
particularly problematic when evaluating models with uncertain timing of forcing data. It also affects routing-dominated  
systems, where even slight temporal misalignment is problematic.

Land surface variables such as soil moisture, latent heat flux, and evapotranspiration exhibit highly skewed non-  
normal distributions. ~~When applied to non-normal distributions, moment-based statistics can produce misleading artifacts. In~~  
120 ~~a normal distribution, the mean, median, and mode coincide due to symmetry, making the mean a faithful representation of~~  
~~central tendency. In skewed or bimodal distributions, however, these statistics diverge, and condensing the entire distribution~~  
~~into a single summary value entails substantial information loss (Fig. S1). These non-Gaussian characteristics violate the~~  
~~normality assumptions in moment-based metrics~~. Evaluations based on KGE and NSE, facing ~~the~~ problems mentioned above,  
may result in biased performance assessments. Therefore, a non-parametric, robust, and diagnostic framework is required to  
125 accurately evaluate model fidelity across these variables.

Recognizing the limitations of variance-based statistical measures, LSM researchers have increasingly turned to  
information theory as an alternative framework for model evaluation. Shannon entropy quantifies the uncertainty or

information content of a probability distribution in a nonparametric manner, making it naturally suited to characterizing the highly skewed, non-normal distributions typical of hydrological data (Pechlivanidis et al., 2014). Unlike standard deviation, which is dominated by extreme values and susceptible to error compensation, entropy captures the entire shape of the probability distribution and provides a robust measure of system variability and complexity. Pechlivanidis et al. (2010) proposed the Scaled and Unscaled Shannon Entropy differences (SUSE) measure for hydrological and land surface models evaluation. By computing entropy differences using both common bins (scaled entropy) and individual bins (unscaled entropy), SUSE provides a comprehensive assessment of distributional similarity that is ~~immune to the compensating errors that plague variance-based metrics~~ holistic under different distributions. Their multi-objective calibration framework combining SUSE with traditional metrics achieved superior performance compared to single-objective or conventional multi-objective approaches by extracting complementary information from different flow regimes (Pechlivanidis et al., 2014). Most recently, Pizarro et al. (2025) developed the Ratio of Uncertainty to Mutual Information (RUMI) metric, which integrates Shannon entropy with uncertainty quantification from the BLUECAT method (Koutsoyiannis and Montanari, 2022). Testing across 99 Chilean catchments spanning diverse macroclimatic zones, RUMI-based simulations outperformed ~~KGE in 82 % of~~ 82 % 50 hydrological signatures analyzed, with notably lower variability in both calibration and validation periods. This success highlights the practical benefits of information-theoretic methods ~~for uses~~. It also integrates confidence intervals directly into the evaluation process, rather than treating them as an afterthought.

Histogram-based comparison methods offer another promising avenue for robust model evaluation. The Percentage of Histogram Intersection (PHI), originally developed for color indexing in computer vision (Swain and Ballard, 1991), measures the overlap between two probability distributions in a nonparametric manner. By comparing entire distributions bin-by-bin rather than relying on summary statistics like means or standard deviations, PHI captures the full statistical signature of model performance without making assumptions about data normality or stationarity. This distribution-matching approach is particularly relevant for LSM evaluation because it naturally handles multimodal distributions, captures extreme-value behavior, and is invariant to monotonic transformations. Unlike KGE's bias term ( $\beta$ ), which reduces the entire distributional comparison to a single ratio of means, PHI assesses whether the model reproduces the complete frequency distribution of observed flows from low flows to extreme peaks. This comprehensive assessment is essential for models intended to support diverse management objectives, from drought planning to flood protection.

A growing body of research emphasizes the importance of distinguishing temporal misalignment from amplitude errors in model evaluation. Liu et al. (2011) demonstrated using wavelet transform analysis that timing errors and magnitude errors often arise from different sources (e.g., routing inaccuracies versus rainfall-runoff process representation) and should therefore be evaluated separately. Their wavelet-based timing adjustment reduced root mean square error (RMSE) from 31.4 to 18.9  $\text{m}^3 \text{s}^{-1}$  and increased correlation from 0.67 to 0.94 for synthetic examples, showing that traditional metrics severely penalize timing-shifted simulations even when the magnitudes are accurate. More recently, the Wasserstein distance (Magyar and Sambridge, 2023), a metric derived from optimal transport theory, was introduced as a LSM objective function that inherently accommodates timing errors by comparing mass distributions rather than point-wise differences. Wasserstein

distance addresses the “double penalty” problem by measuring the minimum effort required to transform one distribution into another, accounting for spatial and temporal displacement of features. While computationally more intensive than traditional metrics, Wasserstein distance provides superior performance when displacement errors are present, a common situation in land surface modelling due to uncertainties in rainfall timing and routing processes.

In summary, the evidence presented above reveals a clear need for performance metrics that (1) ~~are unaffected by mitigate~~ error compensation effects, (2) remain stable and reliable in low-variability conditions, (3) robustly address non-normal, heavy-tailed distributions typical of LSM data, (4) separate timing errors from magnitude errors, and (5) offer diagnostically meaningful decomposition to aid model improvement. To address these requirements, we propose the Model Fidelity Metric (MFM), a comprehensive performance criterion built on three orthogonal components grounded in robust statistics and information theory. MFM integrates four fundamental aspects of model performance into these three dimensions, with the detailed definitions provided in Sect. 2:

1. Normalized Mean Absolute p-Error (NMAEp): A flexible, robust measure of overall simulation accuracy based on  $L_p$ -norm, which is inherently immune to error compensation. It allows transparent control over sensitivity to outliers through the exponent parameter  $p$  without introducing arbitrary component weighting.
2. Scaled and Unscaled Shannon Entropy Difference (SUSE): A nonparametric measure of variability and information content that is robust to extreme values, directly addressing the ~~fundamental flaws~~limitations in KGE’s  $\alpha$  parameter (Pechlivanidis et al., 2014).
3. Percentage of Histogram Intersection (PHI): A distribution similarity metric that compares entire probability distributions without parametric assumptions, replacing KGE’s ~~problematic~~-bias term with a comprehensive assessment of statistical signature reproduction.
4. Phase Penalty Factor (PPF): A spectral-analysis-based quantification of timing errors that scales the magnitude error appropriately rather than treating phase misalignment as an independent component, avoiding the double-penalty problem inherent in correlation-based metrics. PPF is incorporated as a scaling factor within the accuracy component based on the geometric relationship between timing and magnitude errors.

These four components are combined into a single dimensionless score using a Euclidean distance framework similar to KGE (Eq. (15)). ~~PPF is incorporated as a scaling factor within the accuracy component based on the geometric relationship between timing and magnitude errors.~~

To provide a detailed introduction to MFM, the remainder of this paper is organized as follows: Section 2 presents the theoretical foundation and mathematical formulation of MFM, including a detailed justification for each component and a comparison with traditional metrics. Section 3 describes our synthetic experiments and real-world application methodology, including the selection of the CAMELS dataset. We tested MFM using runoff data to measure land surface variables with ~~standard baseline~~ metrics, ensuring broad applicability. Section 4 presents results from both synthetic tests and real catchment applications, demonstrating MFM’s advantages and limitations. Section 5 discusses practical implications, computational

195 considerations, benchmark thresholds, and future research directions. Section 6 provides concluding remarks and recommendations for the community.

## 2 Rationale and formulation of MFM

~~The development of the MFM is driven by the desire to go beyond the limits of traditional metrics that mainly depend on moment based statistics.~~ MFM was designed to improve traditional moment-based metrics. We propose a framework that  
200 leverages robust statistical techniques and information theory to provide a more genuine-rigorous evaluation of model performance. This approach is especially helpful for the non-normal, skewed data often seen in land surface modelling.

### 2.1 Principles for robust metric design

We adhere to the three principles introduced earlier: Holistic Representation, ~~Immunity to~~ Mitigating Error Compensation, and Statistical Robustness. To achieve this, MFM fundamentally replaces the components of KGE ( $\alpha$ ,  $\beta$ , and  $r$ ) with alternatives  
205 grounded in robust statistics and information theory. As mentioned before, KGE evaluates performance by comparing summary statistics (mean, standard deviation, and linear correlation). This approach is efficient for normally distributed data but is susceptible to the flaws discussed previously. In contrast, MFM is based on nonparametric and robust measures. It evaluates the time series through three dimensions: (1) overall accuracy using a generalized error norm penalized by phase shifts; (2) variability using Shannon entropy; and (3) distribution similarity by directly comparing probability distributions.

### 2.2 Revisiting model performance components

We systematically reconstruct the evaluation framework by ~~addressing the flaws in~~ revisiting KGE's components and proposing robust alternatives.

#### 2.2.1 Quantifying accuracy and decoupling phase errors

In the KGE framework, the Pearson correlation coefficient ( $r$ ) is intended to capture temporal synchronization. However,  $r$   
215 measures only linear covariation, not agreement (Legates and McCabe, 1999). Critically, it conflates magnitude errors with phase (timing) errors, as mentioned before. We argue that overall accuracy (magnitude error) and phase error must be decoupled. MFM addresses this by introducing two separate measures, i.e., the Normalized Mean Absolute p-Error (NMAEp) for accuracy, and the Phase Penalty Factor (PPF) to account for timing issues.

To quantify overall accuracy robustly, we introduce NMAEp, based on the generalized  $L_p$ -norm:


$$220 \quad \text{NMAEp} = \left( \frac{\sum |s_i - o_i|^p}{n} \right)^{\frac{1}{p}} / |\mu_o|. \quad (4)$$

The exponent parameter  $p$  controls the metric’s sensitivity to error magnitude. When  $p = 1$ , NMAEp is equivalent to the Normalized Mean Absolute Error (NMAE), which is less sensitive to outliers compared to higher  $p$  values, which is relatively robust to outliers. When  $p = 2$ , it is equivalent to the Normalized Root Mean Square Error (NRMSE), which emphasizes large errors. The flexibility of the  $L_p$ -norm provides a significant advantage over the ad-hoc component weighting often used in multi-objective frameworks (e.g., arbitrarily doubling the weight of the bias term in KGE). Such arbitrary weighting lacks mathematical justification and renders metrics incomparable. In contrast, adjusting  $p$  represents a mathematically consistent redefinition of the error distance within the  $L_p$  space, allowing users to adjust sensitivity while maintaining the metric’s structural integrity transparently. Generally, we recommend using  $p = 1.0$  for a balanced evaluation. When large error evaluation is critical (e.g., flood peak simulation), we recommend raising  $p$  to 2.0.

Standard error metrics often misinterpret a temporal mismatch (phase shift) between simulations and observations. As illustrated in Fig. 1, an instantaneous error metric measures the vertical distance  $d_1 = |S_i - O_i|$  where  $|\cdot|$  means the absolute value. However, the magnitude error corrected for an optimal time lag  $k$  would be  $d_2 = |S_{i+k} - O_i|$ . While time series realignment could find  $d_2$ , it would destroy the temporal structure of the simulation. Instead, we propose to approximate the phase-corrected error geometrically. As suggested by the geometry in Fig. 1, the relationship can be approximated as:

$$\sum d_2 \approx \sum \frac{d_1}{\cos(\theta)}. \quad (5)$$

This indicates that the phase difference acts as a scaling factor on the magnitude error, rather than an independent component of model performance. This is further supported by the observation that histogram-based components (discussed below) are invariant to the temporal ordering of the data.

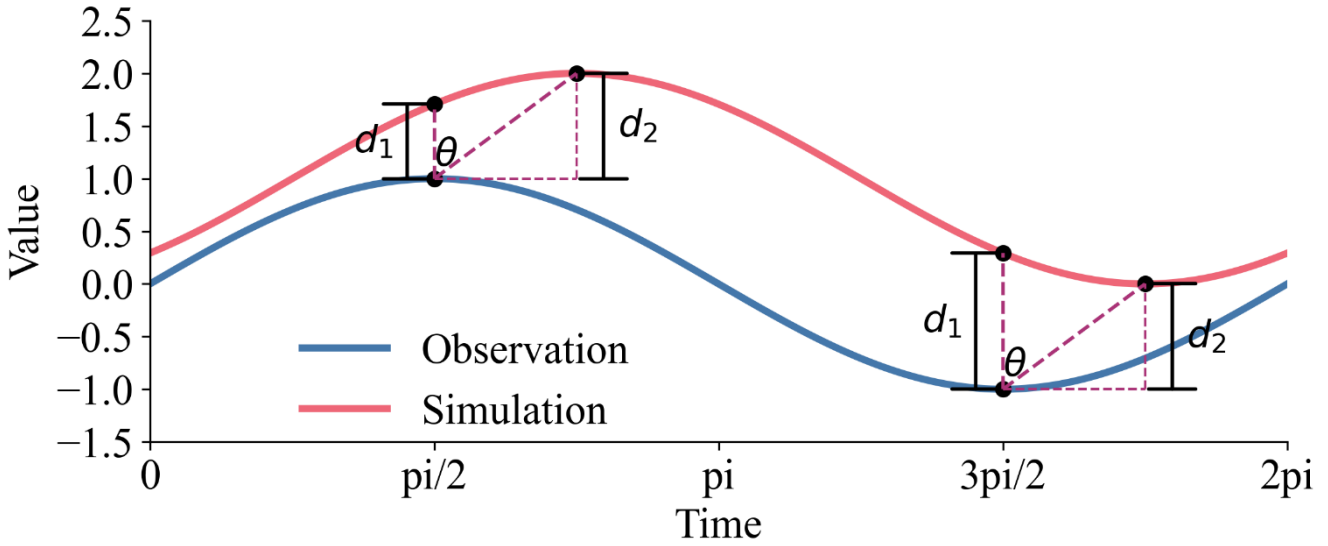

240 **Figure 1.** Geometric interpretation of the relationship between instantaneous error ( $d_1$ ), phase-corrected error ( $d_2$ ), and phase shift ( $\theta$ ). This illustrates how phase differences inflate perceived magnitude errors, thereby justifying treating phase shift as a penalty factor (PPF) applied to the accuracy component.

To quantify this scaling, we first identify the dominant phase lag ( $\theta_{lag}$ ) between the simulated and observed time series. This is achieved by applying the Fast Fourier Transform (FFT) to both series and determining the phase angle at the frequency corresponding to the maximum power in the cross-power spectrum. We ~~then~~ define the Phase Penalty Factor (PPF) using the cosine function, which is naturally ranges from less than 1.0 (zero lag, no penalty) to lower values as the lag increases:

$$PPF = \cos\left(\frac{\theta_{lag}}{c}\right), \quad (6)$$

where  $\theta_{lag}$  is the dominant phase lag in radians  $[-\pi, \pi]$ . The scaling parameter ( $c > 2$ ) is introduced to control the sensitivity of the penalty and to avoid singularity ( $PPF = 0$ ); if the lag approaches  $\pm\pi/2$ . A smaller  $c$  imposes a heavier penalty, while a larger  $c$  minimizes-reduces the impact of phase shift.

### 2.2.2 Capturing variability using information theory

KGE measures variability using the ratio of standard deviations ( $\alpha = \sigma_s/\sigma_o$ ). This ratio standard deviation is a robust measure of spread only for susceptible to sign cancellation normal distributions. For ~~skewed~~ LSM data, it is highly sensitive to outliers and prone to error compensation. In other words, a model can achieve a perfect  $\alpha = 1$  result by simultaneously overestimating and underestimating flows.

To overcome this, we utilize Shannon entropy from information theory to quantify the intrinsic uncertainty and dispersion of the data (Pechlivanidis et al., 2010). Entropy is a non-parametric measure that characterizes the shape of the

probability distribution, regardless of its skewness or modality. Shannon entropy ( $H$ ) is calculated from a discrete probability distribution  $P$ , obtained by binning the time series data into  $n_{\text{SUSE}}$  bins:

$$260 \quad H(P) = - \sum_{k=1}^{n_{\text{SUSE}}} p_k \log(p_k) \quad (7)$$

where  $p_k$  is the probability of the data falling into the  $k$ -th bin. Entropy differences can be misleading if the ranges of the simulated and observed data differ significantly. Therefore, we adopt the Scaled and Unscaled Shannon Entropy differences (SUSE), which considers both the overall range and the internal shape of the distributions.

265 First, the scaled Shannon Entropy Difference ( $\text{SED}_{\text{scaled}}$ ) is calculated by binning both time series using a common range from the minimum of simulations ( $S$ ) and observations ( $O$ ) to their maximum  $\min(S, O)$  to  $\max(S, O)$ .

$$\text{SED}_{\text{scaled}} = |H_{S,\text{scaled}} - H_{O,\text{scaled}}|. \quad (8)$$

Second, the unscaled Shannon Entropy Difference ( $\text{SED}_{\text{unscaled}}$ ) is calculated by binning the time series over their respective ranges (or normalizing them first). This measures the dissimilarity of the distributions' internal shapes, independent of their absolute magnitudes.

$$270 \quad \text{SED}_{\text{unscaled}} = |H_{S,\text{unscaled}} - H_{O,\text{unscaled}}|. \quad (9)$$

The SUSE component is defined as the maximum of these two values:

$$\text{SUSE} = \max(\text{SED}_{\text{scaled}}, \text{SED}_{\text{unscaled}}). \quad (10)$$

275 This ensures that the metric captures discrepancies in either the range or the shape of the variability. The number of bins ( $n_{\text{SUSE}}$ ) serves as a sensitivity parameter, enabling comparisons across different resolutions. Setting  $n_{\text{SUSE}} = 10$  provides a more robust and statistically stable configuration. We recommend using the default setting ( $n_{\text{SUSE}} = 10$ ) in general evaluation and increasing  $n_{\text{SUSE}}$  to 100 when variability evaluation is critical.

280 In LSM data, moment-based statistics often suffer from excessive compression and are overly sensitive to outliers (Fig. S1). A single extreme value can cause the rejection of an otherwise good model, or conversely, a specific error pattern can make a poor model appear adequate. Information-based metrics provide a more comprehensive representation of overall distributional characteristics and are therefore less prone to such artifacts.

### 2.2.3 Nonparametric assessment of distribution similarity

285 KGE's bias term ( $\beta = \mu_S/\mu_O$ ) assesses the central tendency by comparing means. For non-normal streamflow data, the mean is a non-robust statistic, heavily influenced by extreme events and highly susceptible to error propagation. To provide a more comprehensive assessment of distribution similarity, we employ the Percentage of Histogram Intersection (PHI; Swain and Ballard, 1991). PHI is a nonparametric statistic that measures the overlapping area between the normalized probability distributions (histograms) of the simulated and observed data, binning the time series data into  $n_{\text{PHI}}$  bins:

$$\text{PHI} = \sum_{k=1}^{n_{\text{PHI}}} \min(P_{S,k}, P_{O,k}), \quad (11)$$

where  $P_{S,k}$  and  $P_{O,k}$  are the probabilities of the simulated and observed data falling into the  $k$ -th bin, respectively. PHI ranges from 0 (no overlap) to 1 (identical distributions). It provides a bin-by-bin assessment of the model's ability to reproduce the complete statistical signature of the observed data. It is worth noting that half of the absolute difference between probabilities is mathematically equivalent to  $1 - \text{PHI}$ . We employ the minimum in this formulation to enhance the readability of MFM framework (see Eq. (15)).

### 2.3 MFM integration and interpretation

MFM integrates the four components (NMAEp, PPF, SUSE, PHI) into a three-dimensional Euclidean framework. To ensure commensurability, each dimension is normalized to  $[0, 1]$ , where 1.0 represents the ideal value. We use the exponential transform for error and entropy components, as it provides natural and bounded normalization from  $[0, \infty)$  to  $(0, 1]$ . Additionally, the exponential transform introduces nonlinear sensitivity that prioritizes smaller errors over larger errors. This characteristic aligns with the marginal utility of model improvements (Zhou et al., 2025) while preventing extreme outliers from dominating the metric's dynamic range. The exponential transform is also a mathematical inverse of logarithmic operation in information entropy, mapping the entropy back into probability space within  $[0, 1]$ .

The three dimensions of MFM are defined as:

1. Accuracy with phase penalty ( $\omega$ ):

$$\omega = \text{PPF} \times e^{-\text{NMAEp}} = \cos\left(\frac{\theta_{\text{lag}}}{c}\right) \times e^{-\text{NMAEp}}. \quad (12)$$

This component integrates magnitude error and timing accuracy. Spectral phase may be dominated by low variance background states. Evaluating phase shift in isolation overlooks timing errors in short duration extreme events, leading to overestimation, while focusing solely on extremes neglects the background state, leading to underestimation. Coupling PPF with NMAEp prevents score inflation while ensuring comprehensive timing assessment across the entire spectrum. Therefore, we integrate PPF into the accuracy dimension rather than isolating it.

2. Variability ( $\varphi$ ):

$$\varphi = e^{-\text{SUSE}}. \quad (13)$$

This component represents the similarity in information content and dynamic range.

3. Distribution similarity ( $\eta$ ):

$$\eta = \text{PHI}. \quad (14)$$

This component represents the degree of congruence between the probability distributions.

The final MFM score is calculated as 1.0 minus the normalized Euclidean distance from the ideal point (1, 1, 1) in this three-dimensional space:

$$\text{MFM} = 1 - \frac{\sqrt{(\omega-1)^2 + (\varphi-1)^2 + (\eta-1)^2}}{\sqrt{3}} = 1 - \frac{\text{dist}((\omega, \varphi, \eta), (1, 1, 1))}{\sqrt{3}}. \quad (15)$$

The distance is normalized by  $\sqrt{3}$  (the maximum ~~possible~~-distance from (0, 0, 0) to (1, 1, 1)) to ensure that MFM is strictly bounded within the range [0, 1]. An MFM score of 1.0 is achieved if and only if the simulation perfectly matches the observation in magnitude, timing, variability, and distribution. The decomposition into  $\omega$ ,  $\varphi$ , and  $\eta$  provides powerful diagnostic capabilities, allowing users to identify specific aspects of model failure.

### 3 Experimental design and datasets

To evaluate the robustness and diagnostic capabilities of MFM, we designed a series of experiments that compared its performance with established metrics. These experiments include targeted synthetic case studies designed to isolate known failure modes of traditional metrics, as well as an actual application using a large-sample hydrological dataset. Furthermore, we conduct a sensitivity analysis of MFM's hyperparameters.

#### 3.1 ~~Benchmark-Baseline~~ metrics

We compare MFM against the following ~~standard-baseline~~ metrics, including NSE (Eq. (2)), KGE (Eq. (3)), and modified KGE (mKGE, Kling et al. (2012)), which modifies the relationship between the variability and bias terms:

$$\text{mKGE} = 1 - \sqrt{(r-1)^2 + \left(\frac{\alpha}{\beta} - 1\right)^2 + (\beta-1)^2}. \quad (16)$$

Additionally, we include RMSE (Eq. (1)) and Normalized RMSE (NRMSE,  $\text{NRMSE} = \text{RMSE} / \mu_O$ ) as direct ~~benchmarks~~ baselines of error magnitude.

For all MFM calculations in case studies (Sect. 4.1 – Sect. 4.4), we use the default hyperparameters:  $p = 1$  (using NMAE for robustness),  $n_{\text{SUSE}} = n_{\text{PHI}} = 10$  for both SUSE and PHI (providing a coarse-grained distribution comparison), and  $c = 4$  for the PPF (providing a moderate phase penalty).

#### 3.2 CAMELS dataset

We apply MFM and the ~~benchmark~~baseline metrics to the CAMELS dataset (Addor et al., 2017), using the Daymet forcings and corresponding streamflow observations. The CAMELS dataset is a large-sample, publicly available dataset that provides attributes and meteorological forcing for 671 catchments across the contiguous United States, specifically compiled to support the development and evaluation of hydrological and land-surface models. The Daymet dataset provides daily meteorological forcing for CAMELS. Daymet catchments have continuous runoff data spanning 34 years from 1980 to 2014, ~~where~~ the effects of human activity can be ignored. The model output runoff data for CAMELS were generated using a coupled model consisting of the Snow-17 and SAC-SMA models (Addor et al., 2017; Newman et al., 2015). For this study, we selected the

345 model output files corresponding to a starting seed of 05 for consistency. We analysed daily data from 1 October 1980 to 31 December 2014. We adopted the validation criteria used by Clark et al. (2021), which states that a catchment is valid if it contains at least 10 valid years with at least 100 days of positive discharge each. We analysed the spatial distribution of the scores and examined specific catchments that highlight the diagnostic differences between the metrics.

### 3.2.3.3 Synthetic case studies

350 We designed three synthetic scenarios targeting specific metric failures.

#### 3.2.13.3.1 Case 1: Error compensation

This case tests a metric's ability to avoid rewarding models where overestimation cancels out underestimation, a failure mode identified by Cinkus et al. (2023). We utilized a real streamflow time series (ID 01013500) from the CAMELS dataset (Addor et al., 2017) and duplicated it to create a double-length observation series ( $O$ ). Two synthetic simulations are generated: (1) 355 Bad-Good (BG) model: The first half is biased ( $S_i = k_1 \times O_i$ ), and the second half is perfect ( $S_i = O_i$ ); (2) Bad-Bad (BB) model: The first half has the same bias as BG ( $S_i = k_1 \times O_i$ ), and the second half has a compensating bias ( $S_i = k_2 \times O_i$ ). We first test the scenario where  $k_1 = 1.25$  and  $k_2 = 0.75$ . Since the errors are purely proportional, the Pearson correlation ( $r$ ) is 1.0 for both models, isolating the effects of the  $\alpha$  and  $\beta$  components in KGE/mKGE. To test the sensitivity across different error magnitudes, we vary a scaling parameter  $k$  (from 1 to 50) and redefine the models such that the errors decrease as  $k$  360 increases: (1) BG model:  $S_{first} = \frac{k+1}{k} O_{first}$ ,  $S_{second} = O_{second}$ . and 2) BB model:  $S_{first} = \frac{k+1}{k} O_{first}$ ,  $S_{second} = \frac{k-1}{k} O_{second}$ . We analysed the score difference (BG score – BB score) to determine if the metric correctly identifies BG as superior (positive difference).

#### 3.2.23.3.2 Case 2: Stability in near-constant conditions

This case tests the stability of metrics under low-variability conditions, where normalization by small  $\sigma_O$  or  $\mu_O$  can lead to 365 erratic scores (Santos et al., 2018). We construct a time series of length 100 where the first 99 steps are a perfect match ( $S_i = O_i = 1$ ). We then introduce a small perturbation at the final time step ( $i = 100$ ), with (1) Scenario A (anti-phase outlier):  $S_{100} = 1.01$ ,  $O_{100} = 0.99$  and (2) Scenario B (in-phase outlier):  $S_{100} = 1.01$ ,  $O_{100} = 1.03$ . In both scenarios, the overall error magnitude (RMSE) is identical and negligible. We further test the sensitivity by iteratively increasing the magnitude of the outliers in both scenarios over 51 steps ( $k$  ranges from 0 to 50) observing the trajectory of the metrics: (1) Scenario A (anti- 370 phase outlier):  $S_{100} = 1.01 + k/100$ ,  $O_{100} = 0.99 - k/100$ ; (2) Scenario B (in-phase outlier):  $S_{100} = 1.01 + k/100$ ,  $O_{100} = 1.03 + k/100$ .

### 3.2.3.3 Case 3: Phase and error decoupling

This case examines how metrics balance phase errors versus magnitude errors. We design three distinct scenarios that yield the same RMSE (1.0) and NRMSE ( $\approx 1.0$ ), but represent fundamentally different types of model failure: (1) Scenario A (extreme event): Near-constant data ( $S_i = O_i = 1.0$  for the first 99 steps) with a single large mismatch at the end ( $S_{100} = 12$ ,  $O_{100} = 2$ ); (2) Scenario B (anti-phase): A perfectly anti-phase oscillation ( $r = -1.0$ ):  $S_i = -\frac{\cos(i\pi)}{2} + 1$ ,  $O_{i+100} = \frac{\cos(i\pi)}{2} + 1$ ; (3) Scenario C (simulation failure): Perfect phase ( $r = 1.0$ ) but large constant bias:  $S_i = \frac{\cos(i\pi)}{100} + 2$ ,  $O_i = \frac{\cos(i\pi)}{100} + 1$ . We also conduct a sensitivity analysis on the reverse phase scenario (Scenario B) by varying the frequency parameter  $j$  (from 1 to 50) in the equation:  $S_i = -\frac{\cos(i\pi)}{j} + 1$ ,  $O_i = \frac{\cos(i\pi)}{j} + 1$ . This gradually changes the error characteristics, allowing us to observe how metrics respond to changes in error while a constant phase error ( $r = -1.0$ ) remains.

#### 3.31.1 CAMELS dataset

~~We apply MFM and the benchmark metrics to the CAMELS dataset (Addor et al., 2017), using the Daymet forcings and corresponding streamflow observations. The CAMELS dataset is a large sample, publicly available dataset that provides attributes and meteorological forcing for 671 catchments across the contiguous United States, specifically compiled to support the development and evaluation of hydrological and land surface models. The Daymet dataset provides daily meteorological forcing for CAMELS. Daymet catchments have continuous runoff data spanning 34 years from 1980 to 2014, with the effects of human activity can be ignored. The model output runoff data for CAMELS were generated using a coupled model consisting of the Snow-17 and SAC-SMA models (Addor et al., 2017; Newman et al., 2015). For this study, we selected the model output files corresponding to a starting seed of 05 for consistency. We analysed daily data from 1 October 1980 to 31 December 2014. We adopted the validation criteria used by Clark et al. (2021), which states that a catchment is valid if it contains at least 10 valid years with at least 100 days of positive discharge each. We analysed the spatial distribution of the scores and examined specific catchments that highlight the diagnostic differences between the metrics.~~


### 3.4 Hyperparameter sensitivity analysis

To evaluate the robustness of the MFM with respect to its user-defined hyperparameters, a sensitivity analysis was conducted on four primary parameters: 1) Error exponent ( $p$ ), varied from 1.0 (corresponding to NMAE) to 2.0 (corresponding to NRMSE) to examine the sensitivity to outliers; 2) Number of bins, varied from 5 to 100 for both SUSE ( $n_{\text{SUSE}}$ ) and PHI ( $n_{\text{PHI}}$ ) to assess the impact of distribution discretization resolution; 3) Phase penalty scaling factor ( $c$ ), varied from 2 (indicating a heavy penalty) to 10 (indicating a light penalty) for the PPF. We perform this analysis using the CAMELS dataset results, calculating the MFM score distributions across all catchments for different parameter combinations. We analysed score variance to determine the impact of parameter choice on overall evaluation outcomes.

## 4 Results


### 4.1 Immunity to Mitigate error compensation (Case 1)

The error compensation test (Case 1) reveals a failure in KGE and mKGE. In the initial scenario ( $k_1 = 1.25$ ,  $k_2 = 0.75$ ), both KGE and mKGE assign higher scores to the BB model than to the objectively better BG model (Fig. 2a). In contrast, MFM and NSE correctly identify the BG model as superior. The reason for this failure is evident in the KGE components (Fig. 2b). The compensating errors in the BB model (underestimation followed by overestimation) artificially pull its mean ( $\mu_S$ ) and standard deviation ( $\sigma_S$ ) closer to the observed values. Consequently, the BB model achieves  $\alpha$  and  $\beta$  values closer to the ideal (1.0) than the BG model. KGE and mKGE, by design, reward this statistical compensation. MFM and NSE, which incorporate direct error magnitude terms (NMAEp and RMSE<sup>2</sup>, respectively), are immune to address this effect, as larger errors are always penalized more heavily, regardless of cancellation elsewhere in the time series.

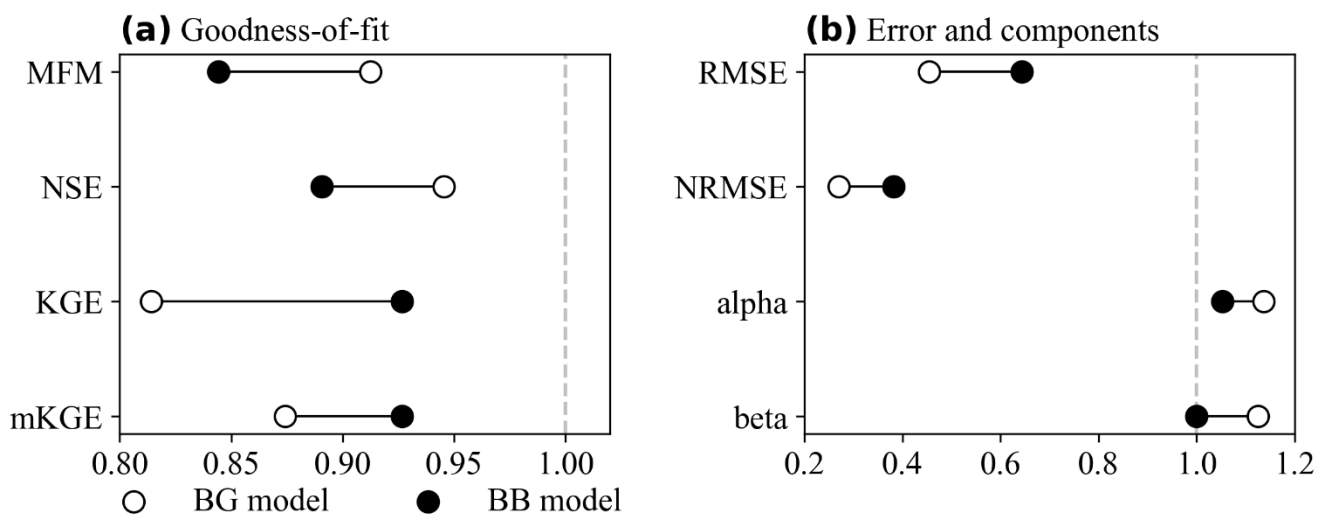

**Figure 2.** Error compensation results ( $k_1 = 1.25$ ,  $k_2 = 0.75$ ). (a) Goodness-of-fit scores. KGE and mKGE incorrectly prefer the BB model, while MFM and NSE correctly identify the BG model; (b) Error benchmarks and KGE components. The BB model's  $\alpha$  and  $\beta$  are misleadingly closer to 1.0.

The sensitivity analysis across varying error magnitudes (Fig. 3) confirms the persistence of this failure. MFM and NSE consistently show a positive difference in scores, favoring the BG model. KGE remains negative, always rewarding the BB model. mKGE succeeds only at the most extreme scaling ( $k = 1$  and  $k = 2$ ) and fails in all other scenarios. This demonstrates that metrics relying on aggregate statistics (e.g., mean, standard deviation) for assessing bias and variability are inherently unreliable when error compensation occurs.

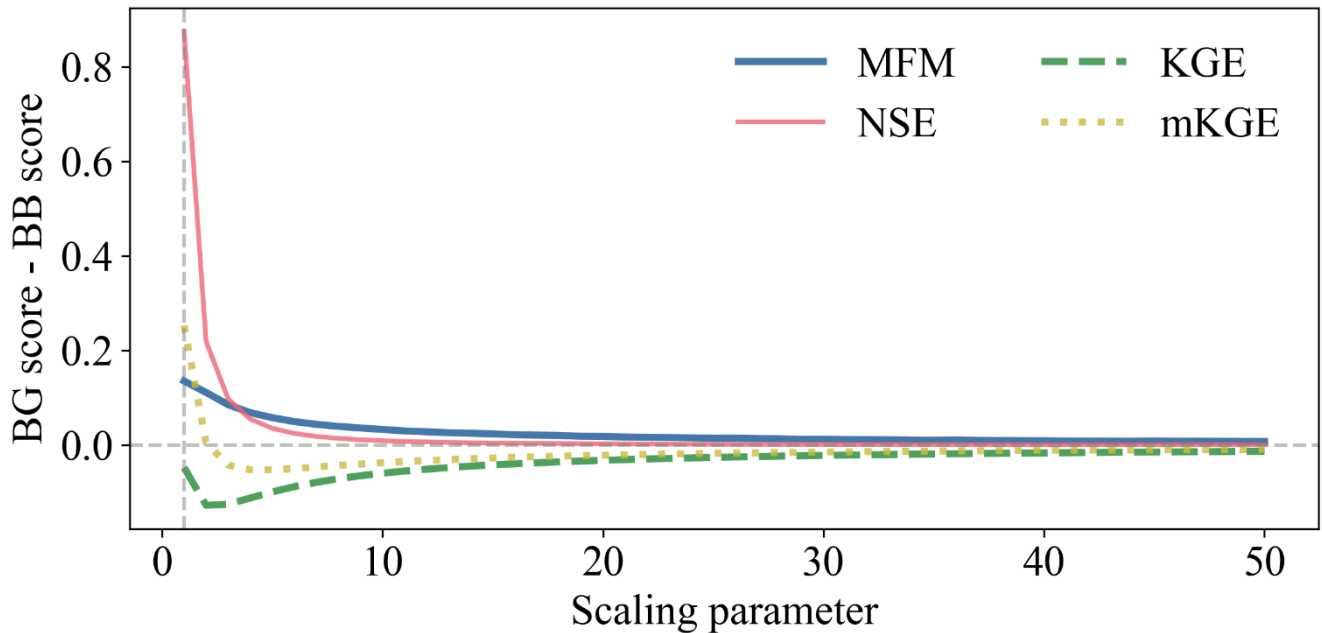

420

**Figure 3.** The difference in goodness-of-fit with different scaling parameters. The trend of metrics when the error decreases. MFM and NSE correctly distinguish BG model, while KGE fails every test. The mKGE, however, only correctly identifies the BG model when the error is large enough and fails immediately as the error shrinks.

#### 4.2 Stability under low-variability conditions (Case 2)


425

The near-constant condition test (Case 2) highlights the instability of traditional metrics. In Scenario A (Fig. 4a), where a single anti-phase outlier exists, the RMSE (0.002) and NRMSE (0.002) indicate a near-perfect simulation (>99.8 % accuracy). However, NSE (-3.04), KGE (-1.00), and mKGE (-1.00) report a failure. This instability arises because the standard deviation ( $\sigma_0$ ) and mean ( $\mu_0$ ) of the observations are very small, thereby amplifying the impact of single-point errors in their normalization schemes. MFM provides a score of 0.830. This score is not near 1.0 because the PPF component successfully identified the phase reversal at  $i = 100$  and applied a penalty. If the phase penalty is disabled (PPF = 1.0), the MFM score increases to 0.994, indicating an excellent magnitude match. This demonstrates MFM's stability and diagnostic capability when traditional metrics fail.

430

In Scenario B (Fig. 4b), where the outlier is in-phase and magnitude errors change slightly (RMSE = 0.002, NRMSE = 0.00199), the traditional metrics recover somewhat (NSE = 0.551, KGE = 0.333, mKGE = 0.333), illustrating their volatility. MFM reports a near-perfect score (0.994), indicating the simulation's high fidelity.


435

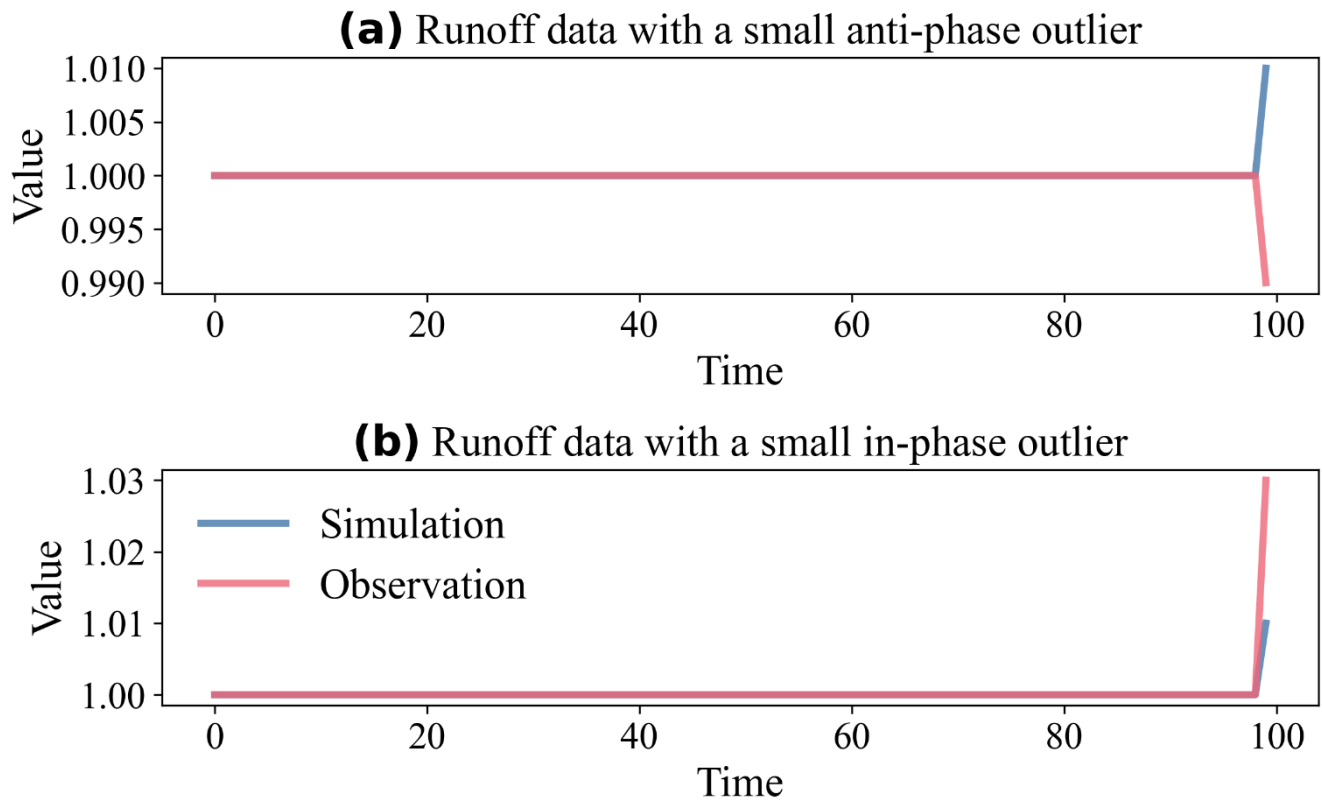

**Figure 4.** Stability test under near-constant conditions. **(a)** Scenario A: Anti-phase outlier. Traditional metrics show failure (scores  $\leq -1$ ) despite negligible error, while MFM provides a diagnostic score (0.830); **(b)** Scenario B: In-phase outlier. Traditional metrics are volatile, while MFM correctly identifies high performance (0.994).

440 The sensitivity analysis (Fig. 5) further emphasizes this instability. In Scenario A (Fig. 5a), as the error (RMSE) increases slightly, MFM responds with a stable, minor decrease in score (0.830 to 0.826), indicating that 99 % of the data remains perfect. NSE, KGE, and mKGE remain stuck at their initial failed values, showing no sensitivity to changes in error magnitude. In Scenario B (Fig. 5b), the RMSE remains constant. However, as the outlier magnitude increases,  $\sigma_o$  also increases. This change in the normalization factor causes the scores of NSE, KGE, and mKGE to rise rapidly from poor to


445 near-perfect. Their scores reflect the changing statistical properties of the observations rather than the model performance itself. MFM remains stable and high (0.994 to 0.999), demonstrating its robustness.

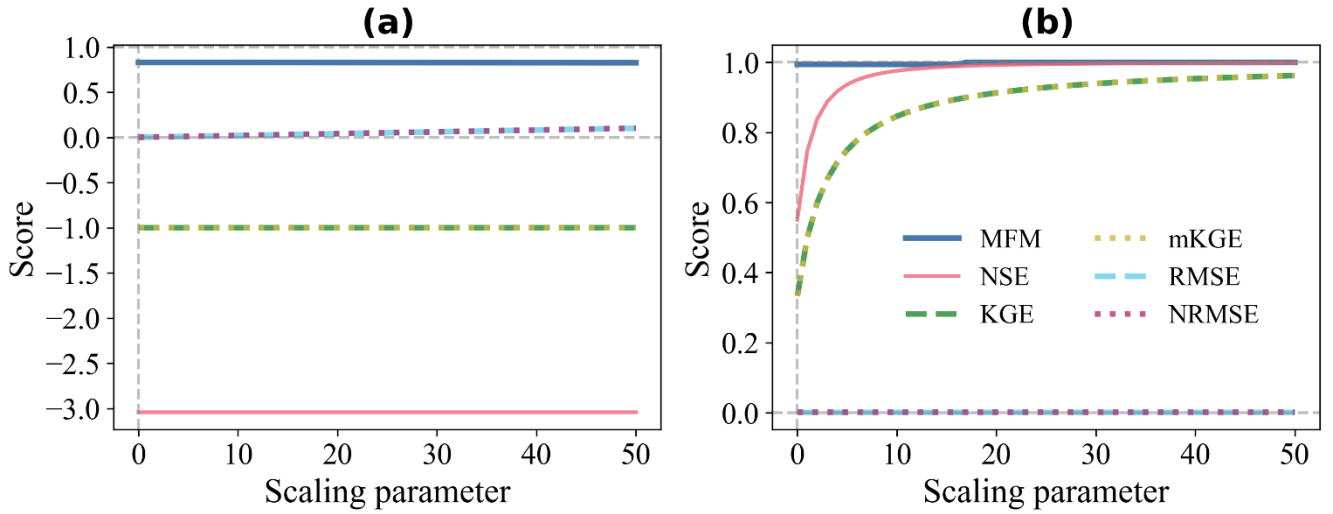

**Figure 5.** Sensitivity analysis under near-constant conditions. **(a)** Scenario A: Increasing error magnitude. MFM shows a slight decrease, while standard-baseline metrics remain insensitive at their failed values; **(b)** Scenario B: Constant error magnitude but increasing outlier size. Standard-Baseline metrics exhibit volatile increases attributable to changes in normalization factors, whereas MFM remains stable.


### 4.3 Diagnostic capability for phase errors (Case 3)

Case 3 compares three scenarios with identical RMSE (1.0) but different structural characteristics (Fig. 6). In Scenario A (extreme event, Fig. 6a), the low variability again causes the standard-baseline metrics to fail (scores  $\leq -8.0$ ). MFM (0.936) is the only metric that indicates this is a generally good model, with a single significant error. In Scenario B (anti-phase, Fig. 6b), the perfect anti-correlation ( $r = -1.0$ ) leads to severe penalties by KGE (-1.00) and mKGE (-1.00). NSE (-3.0) also indicates total failure. MFM (0.572) ~~also~~ rates the model as poor-medium, where PPF (0.707) heavily reduces the accuracy score ( $\omega = 0.260$ ). This medium value is caused by the variability and distribution similarity components ( $\varphi = \eta = 1.0$ ) recognizing the correct capture of the model. In Scenario C (simulation failure; Fig. 6c), all metrics indicate that the model is poor. However, the reasons differ significantly. NSE approaches  $-\infty$  ( $-9999$  in the calculation) due to the combination of low variability and large error. KGE (0.00) is driven solely by the large bias ratio ( $\beta = 2.0$ ), as  $r = 1.0$  and  $\alpha = 1.0$ . MFM (0.316) provides a clear diagnosis through its components ( $\omega = 0.367$ ,  $\varphi = 1.0$ , and  $\eta = 0.0$ ), i.e., large magnitude error, perfect match in variability (entropy), but completely disjoint distributions.

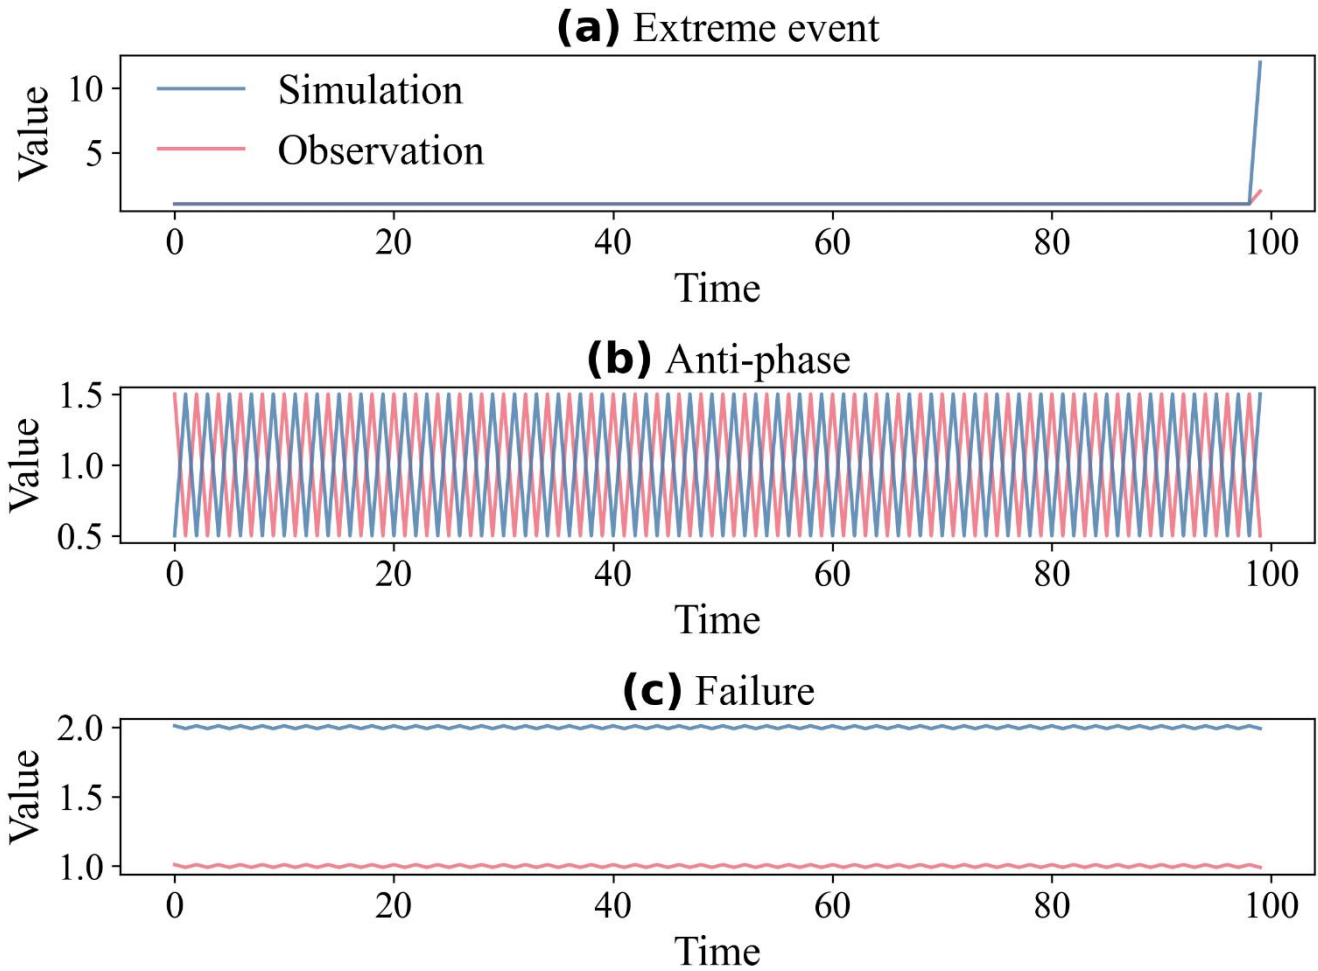

**Figure 6.** Phase and error decoupling test (all scenarios have RMSE = 1.0). (a) Extreme event. MFM (0.936) identifies high fidelity, while standard-baseline metrics fail (NSE = -100, KGE = -9.00, mKGE = -8.00, NRMSE = 0.990); (b) Reverse phase. All metrics identify failure, driven by  $r = -1.0$  or PPF = 0.707 (MFM = 0.572, NSE = -3.0, KGE = -1.0, mKGE = -1.0, NRMSE = 1.0); (c) Simulation failure, driven by large bias/error (MFM = 0.316, NSE = -9999, KGE = 0.0, mKGE = -0.118, NRMSE = 1.0).


The sensitivity analysis of the reverse phase scenario (Fig. 7) highlights a crucial difference in the behaviour of the metric. As the oscillation characteristics change, the magnitude error (RMSE, NRMSE) decreases significantly. MFM is the only metric that responds appropriately to this improvement, with its score increasing as the error decreases. Standard-Baseline metrics remain completely insensitive, fixed at their initial low scores. This occurs because KGE and mKGE prioritize the correlation coefficient (fixed at  $r = -1.0$ ) over the actual error magnitude. MFM, by decoupling phase (via PPF) and magnitude error (via NMAEp), provides a more nuanced and reliable assessment. Given that error modes arise from multiple sources (e.g., magnitude biases, phase shifts, and temporal dynamics), a comprehensive assessment combining error metrics, correlation coefficients, and spatial error pattern maps is helpful for reliable error diagnosis.

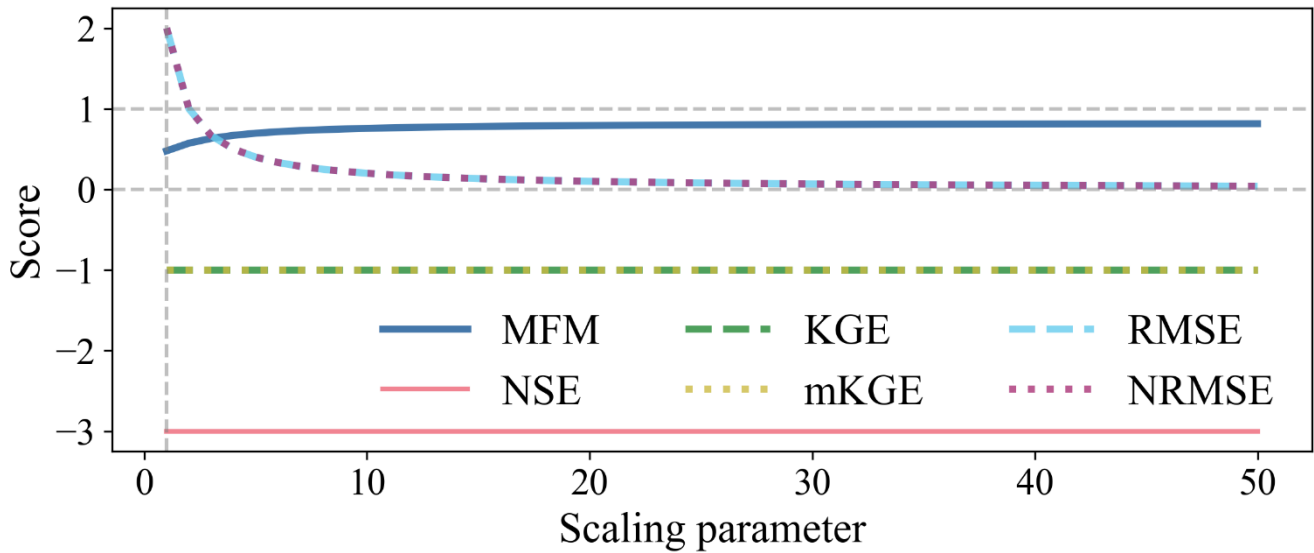

**Figure 7.** Sensitivity analysis of the reverse phase scenario with decreasing magnitude error. MFM correctly responds to the decreasing error, while standard-baseline metrics remain insensitive, overly penalized by the constant anti-correlation ( $r = -1.0$ ).


#### 4.4 Performance in real-world catchments

480 The application to the CAMELS dataset validates the findings from the synthetic experiments. The spatial distribution of scores (Fig. 8a – f) shows general agreement in patterns across all metrics. However, MFM exhibits a much tighter range of scores ([0.486, 0.887]) compared to NSE ([-8.43, 0.910]), KGE ([-1.47, 0.948]), and mKGE ([-1.51, 0.948]). The distribution of scores (Fig. 8g) highlights the robustness of MFM. MFM scores are centralized, whereas the distributions for standard-baseline metrics are flatter and include extreme negative values. These extreme negative scores often reflect the undue  
 485 influence of a few outliers in low-variability catchments, rather than the overall model performance, confirming the instability issues identified in Case 2 (Sect. 3.2.2). This sensitivity of baseline metrics, however, demonstrates their utility as diagnostic tools for detecting specific error modes (like reverse phase and outliers) rather than as overall performance scores.

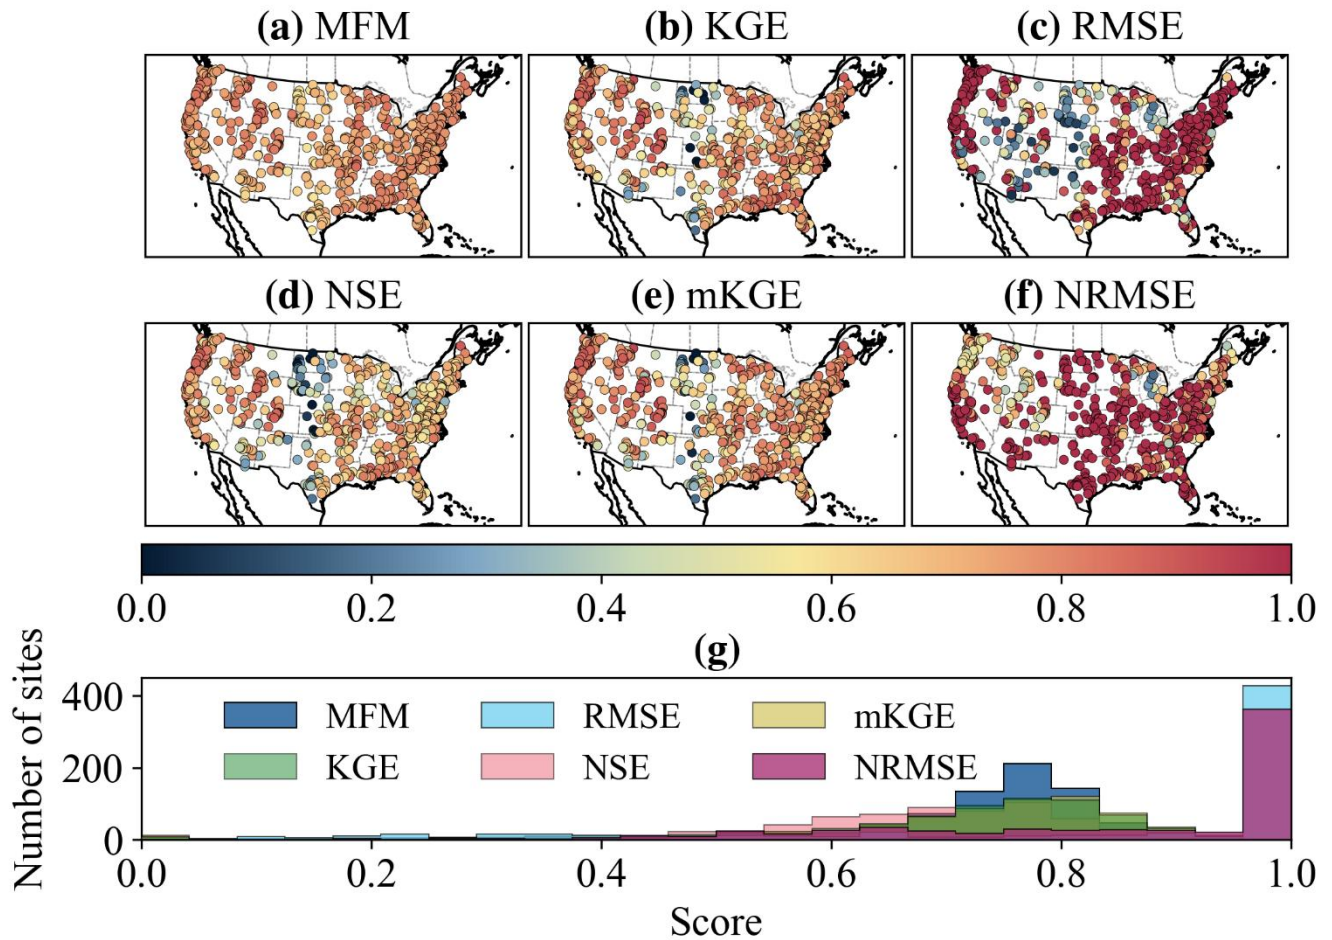

490 **Figure 8.** Spatial pattern and distribution of metrics across CAMELS dataset. (a) - (f) Spatial representation of MFM, KGE, RMSE, NSE, mKGE, and NRMSE; (g) Histogram of scores. MFM shows a more centralized distribution, reflecting its robustness. Standard-Baseline metrics exhibit long tails and extreme negative values.

We examine two specific catchments to illustrate MFM’s diagnostic capabilities (Fig. 9). Site 05120500 (Fig. 9a) represents a low-flow, low-variability catchment ( $\mu_0 = 0.0877$ ), similar to Case 2 (Sect. 3.2.2). The simulation matches most of the observations well, but a single extreme event (April 2009) shows a large overestimation (sim = 34.8 vs obs = 6.3). 495 This single event dominates the standard-baseline metrics, resulting in catastrophic-extreme negative scores (NSE = -8.43, KGE = -1.39). MFM (0.600) identifies the model as medium quality, acknowledging the large error but remaining robust. Site 06409000 (Fig. 9b) exhibits strong periodicity with a slight phase shift (FFT estimated lag  $\approx 1$  d), similar to Case 3 (Sect. 3.2.3). This small lag heavily penalizes the correlation ( $r = 0.677$ ) due to nonlinearity, resulting in poor scores for NSE (-0.164) and KGE (0.438). MFM (0.810) identifies the model as good.

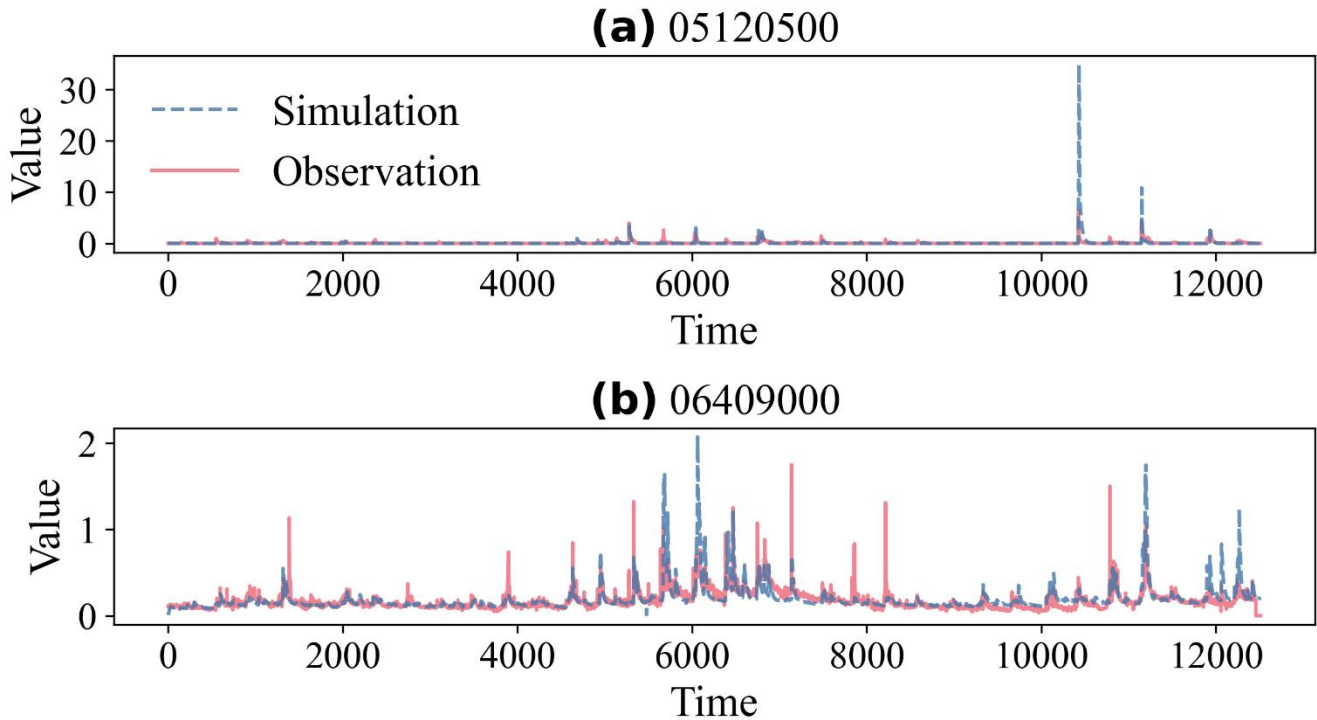


500

**Figure 9.** Time series examples from the CAMELS dataset. **(a)** Site 05120500. Near-constant data with an extreme event, highlighting the instability of ~~standard-baseline~~ metrics; **(b)** Site 06409000. Data with a small phase shift but low  $r$ , highlighting MFM's ability to decouple phase and magnitude errors.

The diagnostic power of MFM is further illustrated by examining its components (Fig. 10). For site 05120500, the moderate MFM score is primarily driven by the relatively low accuracy ( $\omega = 0.319$ ), reflecting the impact of the extreme event on the NMAEp. For site 06409000, the high accuracy ( $\omega = 0.735$ ), the low phase lag (PPF = 0.999), the high variability ( $\varphi = 0.818$ ), and distribution similarity ( $\eta = 0.929$ ) indicate that the model captures the system dynamics well, resulting in an overall good MFM score. ~~This decomposition enables a nuanced understanding of model behavior. MFM can be decomposed as shown in Fig. 10 to identify specific aspects of model failure: low  $\omega$  indicates magnitude or timing errors, low  $\varphi$  suggests inadequate reproduction of observed variability, and low  $\eta$  reveals systematic distributional mismatch.~~

510

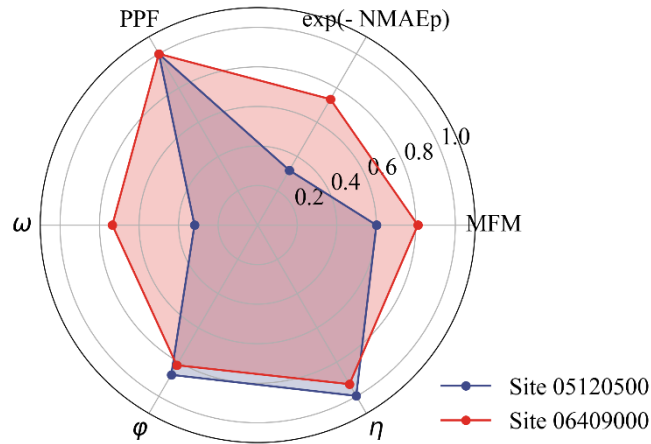


**Figure 10.** Radar plot illustrating the diagnostic components of MFM for the two example catchments. Site 05120500 shows relatively low accuracy ( $\omega$ ) due to the extreme event. Site 06409000 shows high accuracy ( $\omega$ ) and excellent variability ( $\phi$ ) and distribution similarity ( $\eta$ ).

#### 4.5 Sensitivity to hyperparameters

515 The sensitivity analysis of MFM’s hyperparameters across the CAMELS dataset demonstrates its robustness to parameter choices (Fig. 11). Varying the error exponent  $p$  from 1.0 to 2.0 (Fig. 11a) results in a decrease in the MFM score, as expected, because  $p = 2.0$  (NRMSE) imposes heavier penalties on large errors compared to  $p = 1.0$  (NMAE). The overall distribution remains stable with a consistent interquartile range (IQR), indicating that the choice of  $p$  allows for transparent adjustment of sensitivity to outliers without destabilizing the metric. The number of bins for both SUSE ( $n_{\text{SUSE}}$ , Fig. 11b) and PHI ( $n_{\text{PHI}}$ , Fig. 520 11c) shows a high degree of robustness. Varying the bin count from 5 to 100 has a mild impact on median scores and IQR. This suggests that even a coarse discretization (e.g., the default of 10 bins) is sufficient to capture the essential characteristics of variability and distributional similarity in daily streamflow data. The phase penalty scaling factor ( $c$ , Fig. 11d) also shows a stable response. As  $c$  increases from 2 (heaviest penalty) to 10 (lightest penalty), the MFM scores slightly and smoothly increase. This indicates that, while  $c$  adjusts the severity of the phase penalty, it does not fundamentally alter the overall assessment of model fidelity.

525

We recommend using  $p = 1.0$ ,  $n_{\text{SUSE}} = 10$ ,  $n_{\text{PHI}} = 10$ ,  $c = 4.0$  as default settings for general evaluation. When the assessment of extreme events is critical, increasing  $p$  to 2.0 imposes heavier penalties on large errors. When finer distributional resolution is needed, increasing  $n_{\text{SUSE}}$  and  $n_{\text{PHI}}$  to 100 enables percentile-level evaluation of variability and distribution similarity. Rather than introducing additional weighting parameters, adjusting these built-in hyperparameters preserves the metric's structural integrity while smoothly modulating sensitivity. Overall, the sensitivity analysis confirms that MFM is 530 robust to its hyperparameters. The parameters provide meaningful, mathematically consistent adjustments to metric sensitivity without inducing volatility or instability observed in traditional metrics.

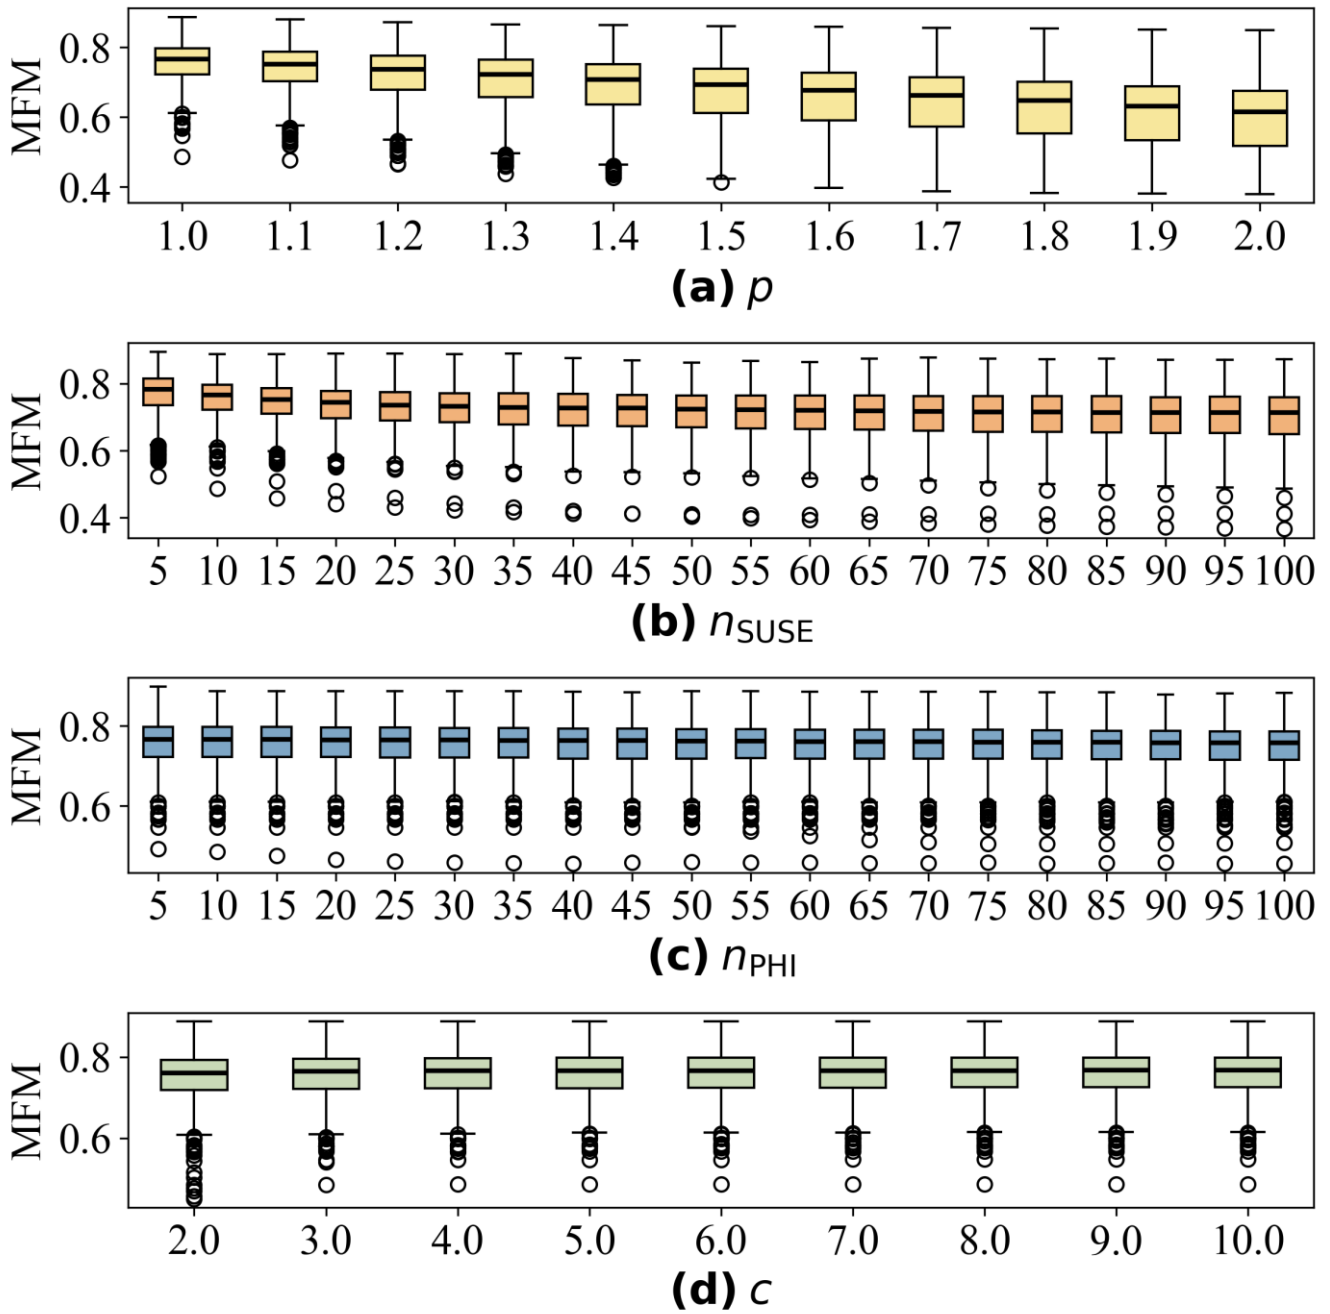

535 **Figure 11.** Sensitivity of MFM scores across the CAMELS dataset to its four hyperparameters. **(a)** Sensitivity to error exponent ( $p$ ). MFM scores decrease as  $p$  increases, reflecting a higher penalty for large errors; **(b)** Sensitivity to bins for SUSE ( $n_{\text{SUSE}}$ ). Scores are stable; **(c)** Sensitivity to bins for PHI ( $n_{\text{PHI}}$ ). Scores are stable; **(d)** Sensitivity to phase penalty ( $c$ ). MFM slightly increases as  $c$  increases.

## 5 Discussion

The systematic failures of NSE, KGE, and mKGE demonstrated in our case studies (Sect. 4.1 – Sect. 4.3) are not isolated anomalies. They are direct consequences of relying on moment-based statistics (mean, standard deviation, and Pearson correlation coefficient) to evaluate LSM data, which are typically non-normal, skewed, and prone to outliers (Mizukami et al., 2019). The vulnerability to error compensation (Sect. 4.1) highlights the danger of inappropriately using moment-based statistics. As Cinkus et al. (2023) argued and our results confirmed, metrics that allow errors to cancel out can reward models that are “right for the wrong reasons”. MFM mitigates ~~’s immunity to~~ this effect to an acceptable extent ~~is achieved~~ by grounding its accuracy component ( $\omega$ ) in the NMAEp, which penalizes errors directly, and its distribution components ( $\varphi$ ,  $\eta$ ) in non-parametric methods (SUSE, PHI) that compare the entire distribution rather than summary statistics. The instability of traditional metrics under low-variability conditions (Sect. 4.2) underscores the problems inherent in their normalization schemes. When  $\sigma_0$  and  $\mu_0$  approaches zero, these metrics become hyper-sensitive to minor fluctuations, leading to erratic and misleading scores. MFM’s architecture, particularly the use of SUSE and histogram intersection (PHI), provides a stable assessment across all flow regimes, as these measures are less affected by the absolute magnitude or variance of the data. For decades, the LSM community has attempted to improve KGE by rearranging or reweighting its components (e.g., Garcia et al., 2017; Pool et al., 2018; Tang et al., 2025). While these variants can offer advantages in specific scenarios, certain inherent statistical limitations remain. MFM offers a complementary perspective, advocating the adoption of robust, information-theoretic methods appropriate to the characteristics of the data being evaluated.

This study primarily validates MFM using streamflow discharge, but its theoretical framework is designed for more LSM cases. Land surface variables, such as soil moisture, latent heat flux, and evapotranspiration, frequently exhibit periodicity, threshold behaviours, and high skewness. To address low-flow failure, traditional metrics such as NSE and KGE require a logarithmic transformation, which can introduce additional biases (Pushpalatha et al., 2012; Santos et al., 2018). In contrast, non-parametric components enable MFM to robustly quantify accuracy, variability, and pattern reproduction. This capacity makes MFM valuable for multivariate LSM evaluation.

It should be noted that, although we use the word “failure” throughout our synthetic experiments, this does not imply that baseline metrics are wrong conceptually. The unreliability we identify stems from using these metrics to quantify overall model performance in contexts where their sensitivity characteristics become liabilities rather than assets. Their high sensitivity remains advantageous for diagnosing specific error modes and assessing extreme events (e.g., Case 2 and Case 3). However, when used as holistic performance scores, this same sensitivity can produce distorted results. MFM is designed to complement these metrics by providing a more stable overall score, while conventional metrics retain their role as targeted diagnostic tools.

We do not advocate for the ~~immediate~~ abandonment of NSE and KGE. These legacy metrics are deeply embedded in the LSM literature and major intercomparison projects (e.g., CMIP6; Eyring et al., 2016), serving as a necessary ~~benchmark~~ baseline for historical comparison. However, it is crucial to distinguish between metrics used for calibration optimization and those used for holistic model evaluation. KGE was originally designed to balance trade-offs during calibration (Gupta et al.,

570 2009). While KGE's use as an overall evaluation metric is problematic, MFM offers a robust alternative for both purposes. MFM can serve as the objective function for calibration, or its components can be used within a multi-objective optimization framework to achieve a balanced model performance. When comprehensive evaluation is the goal, especially under complex or extreme conditions, MFM provides a more authentic and reliable assessment. ~~We recommend that researchers report MFM alongside traditional metrics to provide a more complete picture of model fidelity and to facilitate the transition towards more robust evaluation practices.~~

575 Future LSM developments can include MFM as an overall performance score. Because it is strictly bounded within [0, 1] range and dimensionless, MFM is suitable for multi-model comparisons across different variables where variable-specific metrics fall short. MFM can also serve as an improvement constraint. To ensure that updates do not accidentally degrade overall performance, parameter calibration and coupling of new physical processes should at least maintain the MFM score. Furthermore, the evaluation of different land surface variables often demands tailored diagnostic strategies. For instance, soil moisture evaluation typically emphasizes temporal correlation and unbiased RMSE, with mean bias playing a secondary role (Entekhabi et al., 2010), whereas highly seasonal variables such as evapotranspiration and leaf area index benefit from decomposition into seasonal cycles and anomaly components for more targeted diagnosis (Mahecha et al., 2010). MFM is not intended to replace these variable-specific diagnostic approaches; rather, we recommend reporting MFM alongside fit-for-purpose metrics to provide both a reliable overall score and detailed insight into specific error modes.

580

585

While the sensitivity analysis (Sect. 4.5) demonstrated MFM's robustness to its hyperparameters ( $p, n_{\text{SUSE}}, n_{\text{PHI}}, c$ ), the choice of these parameters still requires user consideration based on the specific application and data characteristics. We recommend initializing MFM with default parameters ( $p = 1.0, n_{\text{SUSE}} = 10, n_{\text{PHI}} = 10, c = 4.0$ ), where NMAEp is equivalent to NMAE, coarse binning mitigates sparsity, and phase shifts incur mild penalties. For rigorous assessments of extreme events or error modes, or during multi-model comparisons where competitive models achieve close scores and are difficult to distinguish, an enhanced configuration ( $p = 2.0, n_{\text{SUSE}} = 100, n_{\text{PHI}} = 100, c = 2.0$ ) is recommended. This setting equates NMAEp to NRMSE to strictly penalize large errors, employs percentile-based binning for distributional fidelity, and forces  $\omega$  to 0 under anti-phase conditions via PPF.

590

To strengthen the interpretability of MFM and establish objective performance benchmarks (Clark et al., 2026), we conducted several calculations. We tested MFM against several naive predictive benchmarks under both default (Fig. S2) and enhanced (Fig. S3) parameter configurations. These benchmarks included the observation mean, uniformly and normally distributed random data, and percentile rankings. During these tests, the benchmark simulation sequences were sorted from smallest to largest to match the ranked observations. Additionally, we analyzed the metric's theoretical boundary conditions. If a model perfectly captures only one of the three MFM dimensions (e.g.,  $\omega = 1.0, \varphi = 0.0, \eta = 0.0$ ), it yields a baseline score of 0.183. If it perfectly captures two out of three dimensions (e.g.,  $\omega = 0.0, \varphi = 1.0, \eta = 1.0$ ), the score is 0.422. Furthermore, we derive the theoretical expectation of MFM for independent simulations ( $s$ ) and observations ( $o$ ) following an exponential distribution ( $f(x) = \lambda e^{-\lambda x}$ ):

595

600

$$E[\text{NMAEp}] = \frac{\int_0^\infty \int_0^\infty |s-o| \lambda^2 e^{-\lambda(s+o)} ds do}{\mu_0} = \frac{\frac{1}{\lambda}}{\frac{1}{\lambda}} = 1. \quad (17)$$

Where  $E[\cdot]$  is expectation. Under these conditions ( $\omega = e^{-1}$ ,  $\varphi = \eta = 1.0$ ) MFM = 0.635. Analogously, the enhanced MFM calculates to 0.563 ( $\omega = e^{-\sqrt{2}}$ ,  $\varphi = \eta = 1.0$ ). The exponential distribution was chosen because it is the most fundamental and easily solvable model for highly skewed LSM variables. Consequently, surpassing this threshold indicates that the model outperforms purely stochastic systems which share the exact same statistical distribution. The superior threshold 0.8 was defined to filter out nearly all simple benchmarks, including mean, randomly distributed, and 10-bin benchmarks. As shown in Fig. S2 and S3, while 47 % of the 100-bin benchmark crossed the 0.8 line, only 2% of the enhanced setting reached this level.

To simplify usage, the benchmark thresholds are defined as 0.2, 0.4, 0.6, and 0.8. Scores within [0.0, 0.2] are deemed unacceptable, indicating outliers. Range (0.2, 0.4] is classified as poor, where the model equivalently captures at most one dimension correctly. Medium range is defined as (0.4, 0.6], indicating the model equivalently captures at least two dimensions. Scores in (0.6, 0.8] are considered as good, reflecting strong overall performance across accuracy, variability, and distribution. Finally, the (0.8, 1.0] range represents superior performance, characterized by near perfect fidelity.

The calculation of MFM (involving FFT, entropy estimation, and histogram) is computationally more intensive than KGE or NSE. This may pose a challenge for applications that require millions of model evaluations, such as intensive Monte Carlo simulations or complex optimization routines. ~~While the sensitivity analysis (Sect. 4.5) demonstrated MFM's robustness to its hyperparameters ( $p$ ,  $n_{\text{NSE}}$ ,  $n_{\text{MFM}}$ ,  $c$ ), the choice of these parameters still requires user consideration based on the specific application and data characteristics.~~ A critical direction for future work is the integration of uncertainty estimation. A metric score is only meaningful if its statistical reliability is understood (Schaeffli and Gupta, 2007). The reliance on observational data, which often contains significant uncertainty, further complicates model evaluation (Moriassi et al., 2007; Refsgaard et al., 2007). We have integrated MFM within uncertainty estimation frameworks, such as the gumboot package (Clark et al., 2021) and the Open Source Land Surface Model Benchmarking System (OpenBench, Wei et al., 2025), to provide confidence intervals for MFM scores. This will enable a more rigorous assessment of model performance, moving beyond deterministic scoring towards a probabilistic evaluation (Vrugt et al., 2022).

## 6 Conclusion

Evaluating LSMs requires metrics that are robust, diagnostic, and reliable across diverse conditions. Traditional metrics like NSE and KGE are appropriate for identifying specific problems in LSMs, while widely used. However, when used as overall scores in performance evaluation, they have fundamental flaws-limitations stemming from their reliance on moment-based statistics that are ill-suited to the non-normal, skewed nature of LSM data. These flaws can lead to error compensation, instability in low-variability conditions, and inadequate treatment of phase errors, resulting in misleading model evaluations. To address these fundamental limitations, we introduced the MFM, a comprehensive performance criterion derived from first

principles, employing robust statistics and information theory. MFM fundamentally reconstructs the evaluation framework, replacing KGE's components with three orthogonal dimensions of model fidelity. It integrates a robust measure of accuracy (NMAEp) penalized by timing errors (PPF), captures variability using information entropy (SUSE), and assesses distribution similarity nonparametrically (PHI). Through targeted synthetic experiments and application to the CAMELS dataset, we demonstrated that MFM provides a more authentic and reliable assessment of model performance than traditional metrics. MFM ~~mitigates is immune to~~ error compensation, remains stable under low-variability conditions in which NSE and KGE fail, and provides powerful diagnostic insights by decomposing performance into its core components. MFM represents a significant advancement in LSMs evaluation. We advocate a transition from the community's reliance on traditional metrics toward more robust, diagnostic frameworks, for which MFM serves as a powerful, reliable alternative, supporting the development of more trustworthy LSMs.

### **Code and data availability**

The CAMELS dataset used in this study is available at <https://zenodo.org/records/15529996> (last access: 24 June 2022) (<https://doi.org/10.5065/D6MW2F4D>, Newman et al., 2022). The MFM and case studies code are available at <https://github.com/wuzezhen5577/Model-Fidelity-Metric/tree/1.0.0> (last access: ~~8+ December~~ [February 2026](#)~~2025~~) (Wu, 2026~~5~~). MFM has been integrated into OpenBench and is available at <https://github.com/zhongwangwei/OpenBench> (last access: 30 November 2025) (Wei, 2025).

### **650 Author contributions**

ZZW prepared the data, designed the experiments, developed the model code, visualized the results, and prepared the draft manuscript with contributions from all co-authors. ZWW developed the model, tested the model, analyzed the results, and prepared the draft manuscript. XL, NW, LL, SZ, HY, and SL contributed to the development and testing of the models. YD edited the paper.

### **655 Competing interests**

The contact author has declared that none of the authors has any conflicting interests.

### **Disclaimer**

Copernicus Publications remains neutral with regard to jurisdictional claims made in the text, published maps, institutional affiliations, or any other geographical representation in this paper. While Copernicus Publications makes every effort to include

660 appropriate place names, the final responsibility lies with the authors. Views expressed in the text are those of the authors and do not necessarily reflect the views of the publisher.

### **Acknowledgements**

~~We also acknowledge the high-performance computing support from the School of Atmospheric Science at Sun Yat-sen University.~~

### **665 Financial support**

~~This research was supported by the Guangdong Major Project of Basic and Applied Basic Research (2021B0301030007), the Guangdong Basic and Applied Basic Research Foundation (grant no. 2024A1515010283), Fundamental and Interdisciplinary Disciplines Breakthrough Plan of the Ministry of Education of China (JYB2025XDXIM902), the National Natural Science Foundation of China (under Grants 42475172, 42088101, 42205149, 42375166, 42375164, and 42175158). It is also supported~~  
670 ~~by the National Key Scientific and Technological Infrastructure project “Earth System Science Numerical Simulator Facility” (EarthLab), and the specific research fund of The Innovation Platform for Academicians of Hainan Province (YSPTZX202143). We also acknowledge the high-performance computing support from the School of Atmospheric Science at Sun Yat-sen University.~~  
~~This work is supported by the Guangdong Major Project of Basic and Applied Basic Research (grant no. 2021B0301030007), Guangdong Basic and Applied Basic Research Foundation (grant no. 2024A1515010283), and the~~  
675 ~~National Natural Science Foundation of China (under grant nos. 42475172, 42088101, 42075158, 42175158, 42375166, 42077168, and 42375164). It is also supported by the National Key Scientific and Technological Infrastructure project “Earth System Science Numerical Simulator Facility” (EarthLab) and the specific research fund of The Innovation Platform for Academicians of Hainan Province (grant no. YSPTZX202143).~~

### **References**

- 680 Addor, N., Newman, A. J., Mizukami, N., and Clark, M. P.: The CAMELS data set: catchment attributes and meteorology for large-sample studies, *Hydrol. Earth Syst. Sci.*, 21, 5293–5313, <https://doi.org/10.5194/hess-21-5293-2017>, 2017.
- Barber, C., Lamontagne, J., and Vogel, R.: Improved estimators of correlation and R2 for skewed hydrologic data, *Hydrol. Sci. J.*, 65, 87–101, <https://doi.org/10.1080/02626667.2019.1686639>, 2020.
- 685 Best, M., Pryor, M., Clark, D., Rooney, G., Essery, R., Ménard, C., Edwards, J., Hendry, M., Porson, A., Gedney, N., Mercado, L., Sitch, S., Blyth, E., Boucher, O., Cox, P., Grimmond, C., and Harding, R.: The Joint UK Land Environment Simulator (JULES), model description - Part 1: Energy and water fluxes, *Geosci. Model Dev.*, 4, 677–699, <https://doi.org/10.5194/gmd-4-677-2011>, 2011.

- Bhatti, S., Kroll, C., and Vogel, R.: Revisiting the Probability Distribution of Low Streamflow Series in the United States, *J. Hydrol. Eng.*, 24, [https://doi.org/10.1061/\(ASCE\)HE.1943-5584.0001844](https://doi.org/10.1061/(ASCE)HE.1943-5584.0001844), 2019.
- 690 Cinkus, G., Mazzilli, N., Jourde, H., Wunsch, A., Liesch, T., Ravbar, N., Chen, Z., and Goldscheider, N.: When best is the enemy of good - critical evaluation of performance criteria in hydrological models, *Hydrol. Earth Syst. Sci.*, 27, 2397–2411, <https://doi.org/10.5194/hess-27-2397-2023>, 2023.
- Clark, M. P., Vogel, R. M., Lamontagne, J. R., Mizukami, N., Knoben, W. J. M., Tang, G., Gharari, S., Freer, J. E., Whitfield, P. H., Shook, K. R., and Papalexiou, S. M.: The Abuse of Popular Performance Metrics in Hydrologic Modeling, *Water Resour. Res.*, 57, <https://doi.org/10.1029/2020WR029001>, 2021.
- 695 [Clark, M. P., Knoben, W. J. M., Spieler, D., Gründemann, G. J., Thébault, C., Vásquez, N. A., Wood, A. W., Song, Y., Shen, C., Carney, S., and Werkhoven, K. van: Comment on Williams \(2025\): “Friends don't let friends use NSE or KGE for hydrologic model accuracy evaluation: A rant with data and suggestions for better practice”, \*Environ. Model. Softw.\*, 197, 106869, <https://doi.org/10.1016/j.envsoft.2026.106869>, 2026.](https://doi.org/10.1016/j.envsoft.2026.106869)
- 700 Dai, Y., Zeng, X., Dickinson, R., Baker, I., Bonan, G., Bosilovich, M., Denning, A., Dirmeyer, P., Houser, P., Niu, G., Oleson, K., Schlosser, C., and Yang, Z.: The Common Land Model, *Bull. Am. Meteorol. Soc.*, 84, 1013–1023, <https://doi.org/10.1175/BAMS-84-8-1013>, 2003.
- [Entekhabi, D., Reichle, R. H., Koster, R. D., and Crow, W. T.: Performance metrics for soil moisture retrievals and application requirements, \*J. Hydrometeor.\*, 11, 832–840, <https://doi.org/10.1175/2010JHM1223.1>, 2010.](https://doi.org/10.1175/2010JHM1223.1)
- 705 Eyring, V., Bony, S., Meehl, G., Senior, C., Stevens, B., Stouffer, R., and Taylor, K.: Overview of the Coupled Model Intercomparison Project Phase 6 (CMIP6) experimental design and organization, *Geosci. Model Dev.*, 9, 1937–1958, <https://doi.org/10.5194/gmd-9-1937-2016>, 2016.
- Fu, T. and Zhang, C.: Towards a generic model evaluation metric for non-normally distributed measurements in water quality and ecosystem models, *Ecol. Inform.*, 80, <https://doi.org/10.1016/j.ecoinf.2024.102470>, 2024.
- 710 Garcia, F., Folton, N., and Oudin, L.: Which objective function to calibrate rainfall-runoff models for low-flow index simulations?, *Hydrol. Sci. J.*, 62, 1149–1166, <https://doi.org/10.1080/02626667.2017.1308511>, 2017.
- Gupta, H. V., Kling, H., Yilmaz, K. K., and Martinez, G. F.: Decomposition of the mean squared error and NSE performance criteria: Implications for improving hydrological modelling, *J. Hydrol.*, 377, 80–91, <https://doi.org/10.1016/j.jhydrol.2009.08.003>, 2009.
- 715 Kling, H., Fuchs, M., and Paulin, M.: Runoff conditions in the upper Danube basin under an ensemble of climate change scenarios, *J. Hydrol.*, 424, 264–277, <https://doi.org/10.1016/j.jhydrol.2012.01.011>, 2012.
- Klotz, D., Gauch, M., Kratzert, F., Nearing, G., and Zscheischler, J.: Technical Note: The divide and measure nonconformity - how metrics can mislead when we evaluate on different data partitions, *Hydrol. Earth Syst. Sci.*, 28, 3665–3673, <https://doi.org/10.5194/hess-28-3665-2024>, 2024.
- 720 Knoben, W., Freer, J., and Woods, R.: Technical note: Inherent benchmark or not? Comparing Nash-Sutcliffe and Kling-Gupta efficiency scores, *Hydrol. Earth Syst. Sci.*, 23, 4323–4331, <https://doi.org/10.5194/hess-23-4323-2019>, 2019.
- Knoben, W., Raman, A., Gründemann, G., Kumar, M., Pietroniro, A., Shen, C., Song, Y., Thébault, C., van Werkhoven, K., Wood, A., and Clark, M.: Technical note: How many models do we need to simulate hydrologic processes across large geographical domains?, *Hydrol. Earth Syst. Sci.*, 29, 2361–2375, <https://doi.org/10.5194/hess-29-2361-2025>, 2025.

- 725 Koutsoyiannis, D. and Montanari, A.: Bluecat: A Local Uncertainty Estimator for Deterministic Simulations and Predictions, *Water Resour. Res.*, 58, <https://doi.org/10.1029/2021WR031215>, 2022.
- [Lamontagne, J. R., Barber, C. A., and Vogel, R. M.: Improved estimators of model performance efficiency for skewed hydrologic data, \*Water Resour. Res.\*, 56, e2020WR027101, <https://doi.org/10.1029/2020WR027101>, 2020.](#)
- Legates, D. and McCabe, G.: Evaluating the use of “goodness-of-fit” measures in hydrologic and hydroclimatic model validation, *Water Resour. Res.*, 35, 233–241, <https://doi.org/10.1029/1998WR900018>, 1999.
- 730 Liu, Y., Brown, J., Demargne, J., and Seo, D.: A wavelet-based approach to assessing timing errors in hydrologic predictions, *J. Hydrol.*, 397, 210–224, <https://doi.org/10.1016/j.jhydrol.2010.11.040>, 2011.
- Magyar, J. and Sambridge, M.: Hydrological objective functions and ensemble averaging with the Wasserstein distance, *Hydrol. Earth Syst. Sci.*, 27, 991–1010, <https://doi.org/10.5194/hess-27-991-2023>, 2023.
- 735 [Mahecha, M. D., Reichstein, M., Jung, M., Seneviratne, S. I., Zaehle, S., Beer, C., Braakhekke, M. C., Carvalhais, N., Lange, H., Le Maire, G., and Moors, E.: Comparing observations and process-based simulations of biosphere-atmosphere exchanges on multiple timescales, \*J. Geophys. Res.\*, 115, G02003, <https://doi.org/10.1029/2009JG001016>, 2010.](#)
- Mathevet, T., Gupta, H., Perrin, C., Andréassian, V., and Le Moine, N.: Assessing the performance and robustness of two conceptual rainfall-runoff models on a worldwide sample of watersheds, *J. Hydrol.*, 585, <https://doi.org/10.1016/j.jhydrol.2020.124698>, 2020.
- 740 Mizukami, N., Rakovec, O., Newman, A., Clark, M., Wood, A., Gupta, H., and Kumar, R.: On the choice of calibration metrics for “high-flow” estimation using hydrologic models, *Hydrol. Earth Syst. Sci.*, 23, 2601–2614, <https://doi.org/10.5194/hess-23-2601-2019>, 2019.
- Moriasi, D., Arnold, J., Van Liew, M., Bingner, R., Harmel, R., and Veith, T.: Model evaluation guidelines for systematic quantification of accuracy in watershed simulations, *Trans. ASABE*, 50, 885–900, <https://doi.org/10.13031/2013.23153>, 2007.
- 745 Nash, J. E. and Sutcliffe, J. V.: River flow forecasting through conceptual models part I — A discussion of principles, *J. Hydrol.*, 10, 282–290, [https://doi.org/10.1016/0022-1694\(70\)90255-6](https://doi.org/10.1016/0022-1694(70)90255-6), 1970.
- Newman, A. J., Clark, M. P., Sampson, K., Wood, A., Hay, L. E., Bock, A., Viger, R. J., Blodgett, D., Brekke, L., Arnold, J. R., Hopson, T., and Duan, Q.: Development of a large-sample watershed-scale hydrometeorological data set for the contiguous USA: data set characteristics and assessment of regional variability in hydrologic model performance, *Hydrol. Earth Syst. Sci.*, 19, 209–223, <https://doi.org/10.5194/hess-19-209-2015>, 2015.
- 750 Newman, A. J., Sampson, K., Clark, M., Bock, A., Viger, R., Blodgett, D., Addor, N., and Mizukami, M.: CAMELS: Catchment Attributes and MEteorology for Large-sample Studies (1.2), Zenodo [data set], <https://doi.org/10.5065/D6MW2F4D>, 2022.
- 755 Pechlivanidis, I., Jackson, B., and Mcmillan, H.: The use of entropy as a model diagnostic in rainfall-runoff modelling, *Int. Congr. Environ. Model. Softw.*, 2, 1780–1787, 2010.
- Pechlivanidis, I. G., Jackson, B., McMillan, H., and Gupta, H.: Use of an entropy-based metric in multiobjective calibration to improve model performance, *Water Resour. Res.*, 50, 8066–8083, <https://doi.org/10.1002/2013WR014537>, 2014.

- 760 Pizarro, A., Koutsoyiannis, D., and Montanari, A.: Combining uncertainty quantification and entropy-inspired concepts into a single objective function for rainfall-runoff model calibration, *Hydrol. Earth Syst. Sci.*, 29, 4913–4928, <https://doi.org/10.5194/hess-29-4913-2025>, 2025.
- Pool, S., Vis, M., and Seibert, J.: Evaluating model performance: towards a non-parametric variant of the Kling-Gupta efficiency, *Hydrol. Sci. J.*, 63, 1941–1953, <https://doi.org/10.1080/02626667.2018.1552002>, 2018.
- 765 Pushpalatha, R., Perrin, C., Le Moine, N., and Andréassian, V.: A review of efficiency criteria suitable for evaluating low-flow simulations, *J. Hydrol.*, 420, 171–182, <https://doi.org/10.1016/j.jhydrol.2011.11.055>, 2012.
- Refsgaard, J., van der Sluijs, J., Hojberg, A., and Vanrolleghem, P.: Uncertainty in the environmental modelling process - A framework and guidance, *Environ. Model. Softw.*, 22, 1543–1556, <https://doi.org/10.1016/j.envsoft.2007.02.004>, 2007.
- 770 Santos, L., Thirel, G., and Perrin, C.: Technical note: Pitfalls in using log-transformed flows within the KGE criterion, *Hydrol. Earth Syst. Sci.*, 22, 4583–4591, <https://doi.org/10.5194/hess-22-4583-2018>, 2018.
- Schaefli, B. and Gupta, H. V.: Do Nash values have value?, *Hydrol. Process.*, 21, ~~207599–1042080~~, <https://doi.org/10.1002/hyp.6825>, 2007.
- Swain, M. J. and Ballard, D. H.: Color indexing, *Int. J. Comput. Vis.*, 7, 11–32, <https://doi.org/10.1007/BF00130487>, 1991.
- 775 Tang, G., Wood, A., and Swenson, S.: On Using AI-Based Large-Sample Emulators for Land/Hydrology Model Calibration and Regionalization, *Water Resour. Res.*, 61, <https://doi.org/10.1029/2024WR039525>, 2025.
- Vrugt, J., de Oliveira, D., Schoups, G., and Diks, C.: On the use of distribution-adaptive likelihood functions: Generalized and universal likelihood functions, scoring rules and multi-criteria ranking, *J. Hydrol.*, 615, <https://doi.org/10.1016/j.jhydrol.2022.128542>, 2022.
- 780 Wei, Z.: The Open Source Land Surface Model Benchmarking System, Zenodo [code], <https://doi.org/10.5281/zenodo.15811122>, 2025.
- Wei, Z., Xu, Q., Bai, F., Xu, X., Wei, Z., Dong, W., Liang, H., Wei, N., Lu, X., Li, L., Zhang, S., Yuan, H., Liu, L., and Dai, Y.: OpenBench: a land model evaluation system, *Geosci. Model Dev.*, 18, 6517–6540, <https://doi.org/10.5194/gmd-18-6517-2025>, 2025.
- 785 Williams, G.: Friends don't let friends use Nash-Sutcliffe Efficiency (NSE) or KGE for hydrologic model accuracy evaluation: A rant with data and suggestions for better practice, *Environ. Model. Softw.*, 194, <https://doi.org/10.1016/j.envsoft.2025.106665>, 2025.
- Wu, Z.: wuzezhen5577/Model-Fidelity-Metric: Model Fidelity Metric: A robust and diagnostic metric for land surface model evaluation (1.0.10), Zenodo [code], ~~<https://doi.org/10.5281/zenodo.18523829>~~~~<https://doi.org/10.5281/zenodo.17775837>~~, 2026~~5~~.
- 790 [Zhou, X., Yamazaki, D., Revel, M., Zhao, G., and Modi, P.: Benchmark Framework for Global River Models, \*J. Adv. Model. Earth Syst.\*, 17, e2024MS004379, <https://doi.org/10.1029/2024MS004379>, 2025.](https://doi.org/10.1029/2024MS004379)